

	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	
Certificate No. 2470.01				

APPENDIX A - SAR MEASUREMENT DATA

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver	380 - 470 MHz		
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 65

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	
Certificate No. 2470.01				

Date Tested: 08/30/2006

Face-Held SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M3) - Mid Channel - 425 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Ambient Temp: 23.9°C; Fluid Temp: 23.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM UHF

Frequency: 425 MHz; Duty Cycle: 1:1

RF Output Power: 3.90 Watts (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: HSL450 ($\sigma = 0.84$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.49 mW/g

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.2 V/m; Power Drift = -0.479 dB

Peak SAR (extrapolated) = 3.95 W/kg

SAR(1 g) = 2.65 mW/g; SAR(10 g) = 1.96 mW/g

Maximum value of SAR (measured) = 2.75 mW/g

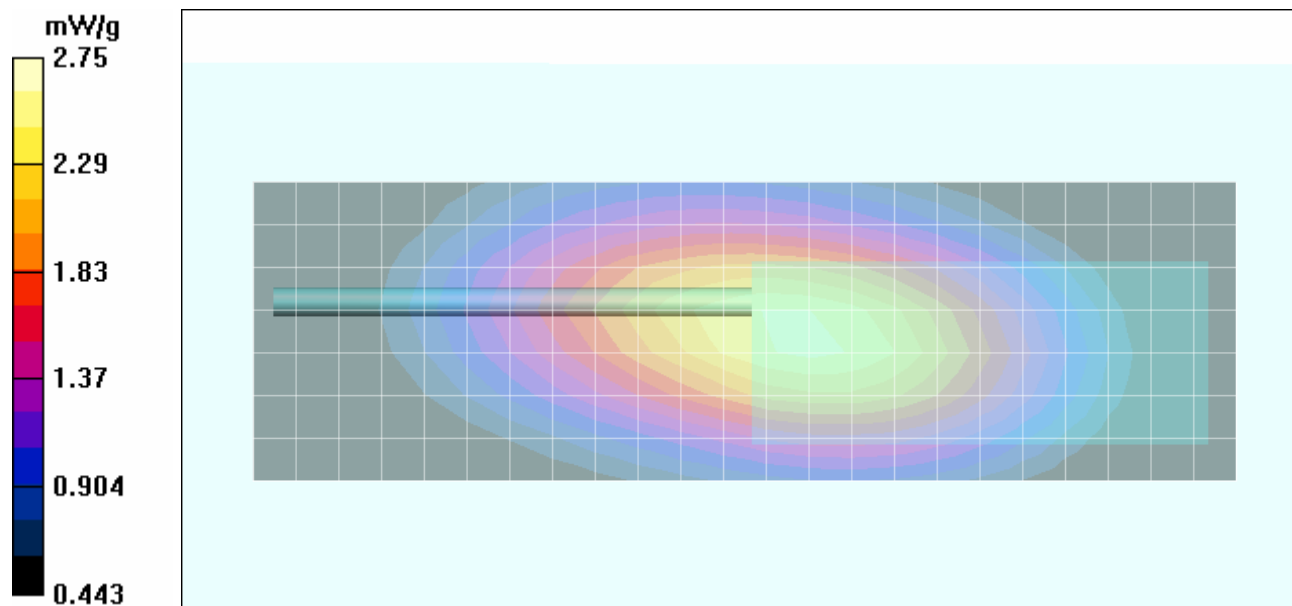

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 65

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	
Certificate No. 2470.01				

Date Tested: 08/30/2006

Face-Held SAR - NiMH Battery - Whip Antenna (P/N: KRA-27M3) - Mid Channel - 425 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Ambient Temp: 23.9°C; Fluid Temp: 23.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM UHF

Frequency: 425 MHz; Duty Cycle: 1:1

RF Output Power: 3.90 Watts (Conducted)

7.5V 2500mAh NiMH Battery Pack (P/N: KNB-32N)

Medium: HSL450 ($\sigma = 0.84$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.53 mW/g

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.4 V/m; Power Drift = -0.426 dB

Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 2.28 mW/g; SAR(10 g) = 1.69 mW/g

Maximum value of SAR (measured) = 2.36 mW/g

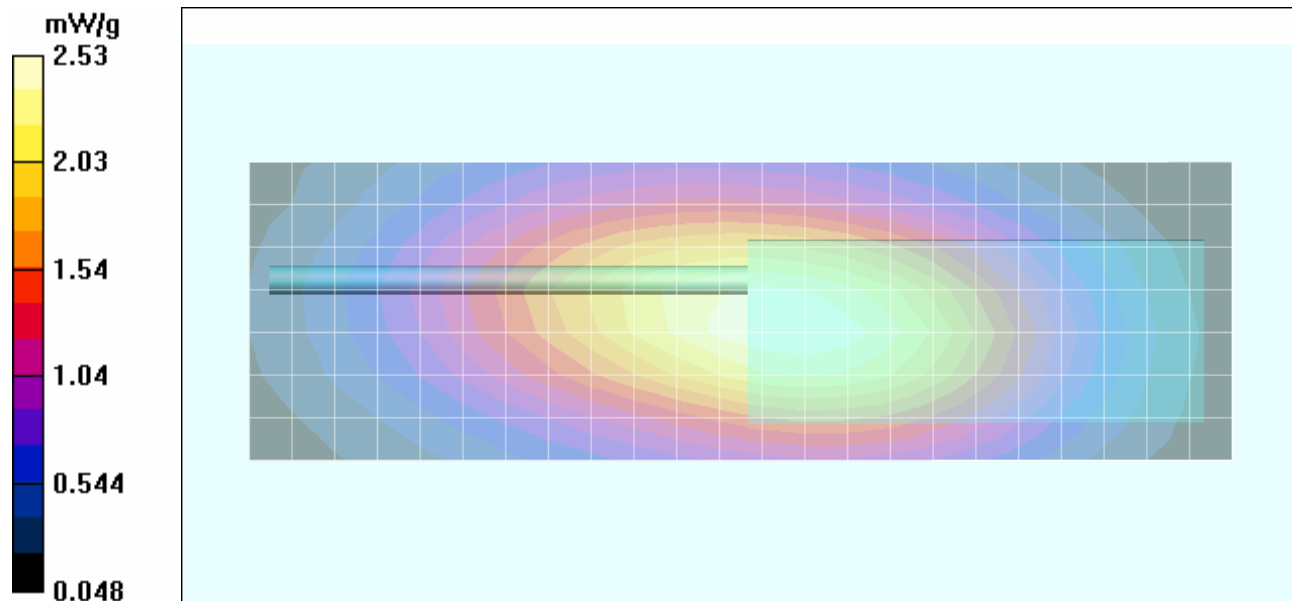

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 20 of 65

	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	
				Certificate No. 2470.01

Date Tested: 08/30/2006

Face-Held SAR - Li-ion Battery - Whip Antenna (P/N: KRA-27M3) - Mid Channel - 425 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Ambient Temp: 23.9°C; Fluid Temp: 23.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM UHF

Frequency: 425 MHz; Duty Cycle: 1:1

RF Output Power: 3.90 Watts (Conducted)

7.5V 1700mAh Li-ion Battery Pack (P/N: KNB-33L)

Medium: HSL450 ($\sigma = 0.84 \text{ mho/m}$; $\epsilon_r = 42.8$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.53 mW/g

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 55.3 V/m; Power Drift = -0.277 dB

Peak SAR (extrapolated) = 3.72 W/kg

SAR(1 g) = 2.50 mW/g; SAR(10 g) = 1.85 mW/g

Maximum value of SAR (measured) = 2.58 mW/g

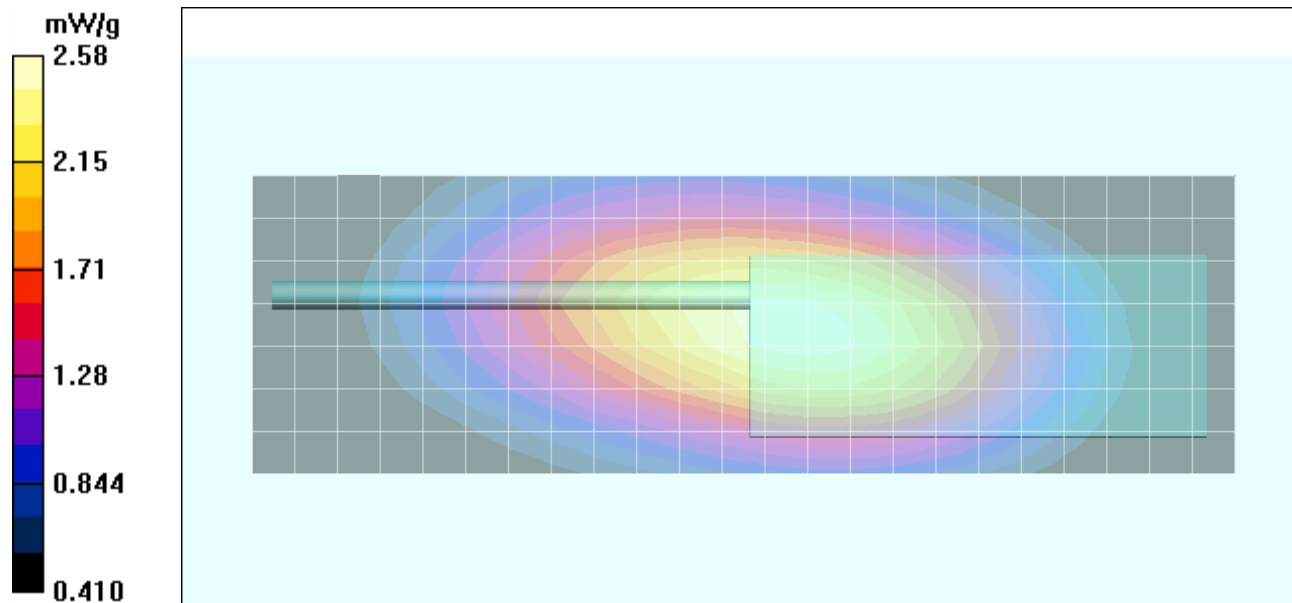

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 65

	Date(s) of Evaluation August 29-30, 2006	Test Report Serial No. 082406ALH-T769-S90U	Report Revision No. Revision 1.0	
	Report Issue Date September 15, 2006	Description of Test(s) RF Exposure - SAR	RF Exposure Category Occupational/Controlled	
				Certificate No. 2470.01

Date Tested: 08/30/2006

Face-Held SAR - NiMH IS Battery - Whip Antenna (P/N: KRA-27M3) - Mid Channel - 425 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Ambient Temp: 23.9°C; Fluid Temp: 23.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM UHF

Frequency: 425 MHz; Duty Cycle: 1:1

RF Output Power: 3.90 Watts (Conducted)

7.5V 2500mAh NiMH IS Battery Pack (P/N: KNB-41NC)

Medium: HSL450 ($\sigma = 0.84$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.17 mW/g

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.6 V/m; Power Drift = -0.355 dB

Peak SAR (extrapolated) = 3.04 W/kg

SAR(1 g) = 2.03 mW/g; SAR(10 g) = 1.49 mW/g

Maximum value of SAR (measured) = 2.11 mW/g

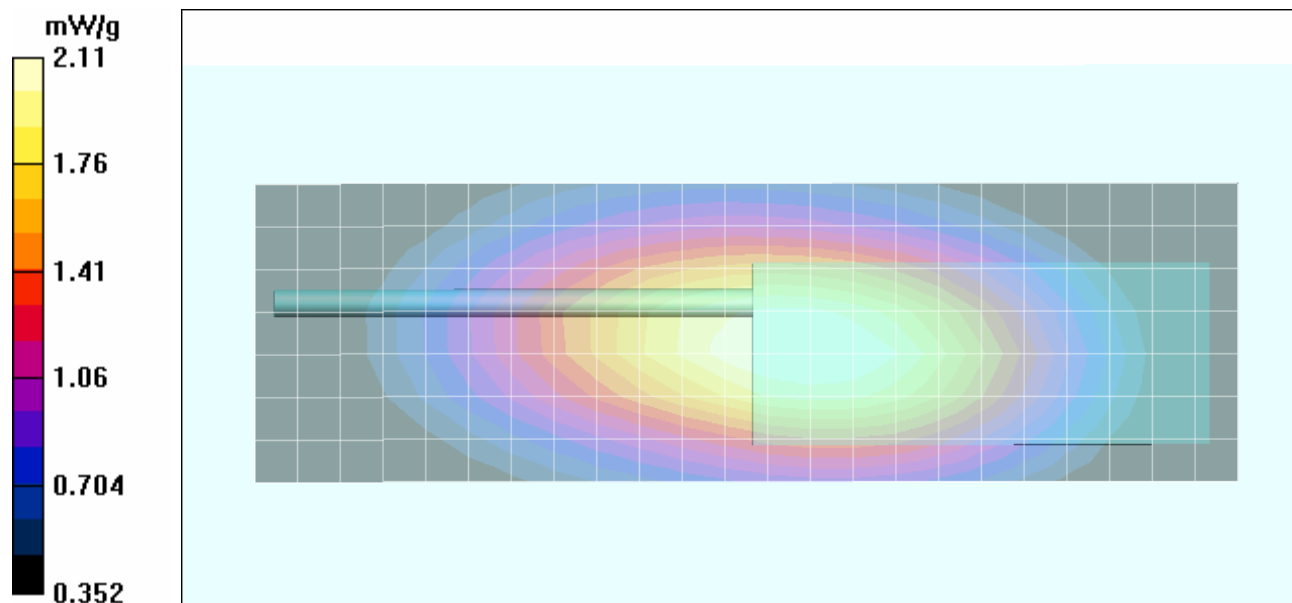

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 65

 Testing and Engineering Services Lab	Date(s) of Evaluation August 29-30, 2006	Test Report Serial No. 082406ALH-T769-S90U	Report Revision No. Revision 1.0	 Certificate No. 2470.01
	Report Issue Date September 15, 2006	Description of Test(s) RF Exposure - SAR	RF Exposure Category Occupational/Controlled	

Date Tested: 08/30/2006

Face-Held SAR - NiCd Battery - Whip Antenna (P/N: KRA-29) - Mid Channel - 425 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Ambient Temp: 23.9°C; Fluid Temp: 23.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM UHF

Frequency: 425 MHz; Duty Cycle: 1:1

RF Output Power: 3.90 Watts (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: HSL450 ($\sigma = 0.84$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.51 mW/g

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.0 V/m; Power Drift = -0.526 dB

Peak SAR (extrapolated) = 3.87 W/kg

SAR(1 g) = 2.58 mW/g; SAR(10 g) = 1.91 mW/g

Maximum value of SAR (measured) = 2.68 mW/g

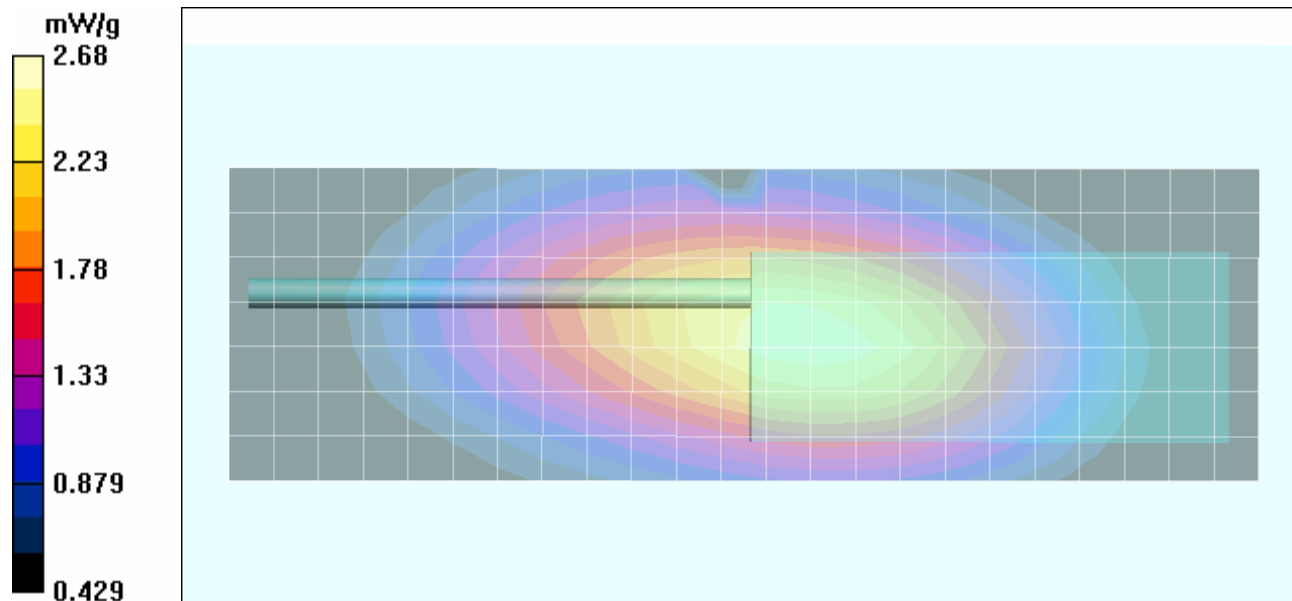

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 23 of 65

	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	
				Certificate No. 2470.01

Date Tested: 08/30/2006

Face-Held SAR - NiCd Battery - Whip Antenna (P/N: KRA-29) - Low Channel - 380 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Ambient Temp: 23.9°C; Fluid Temp: 23.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM UHF

Frequency: 380 MHz; Duty Cycle: 1:1

RF Output Power: 3.86 Watts (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: HSL450 ($\sigma = 0.84$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Low Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.83 mW/g


Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Low Channel

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 66.6 V/m; Power Drift = -0.0722 dB

Peak SAR (extrapolated) = 5.53 W/kg


SAR(1 g) = 3.69 mW/g; SAR(10 g) = 2.72 mW/g

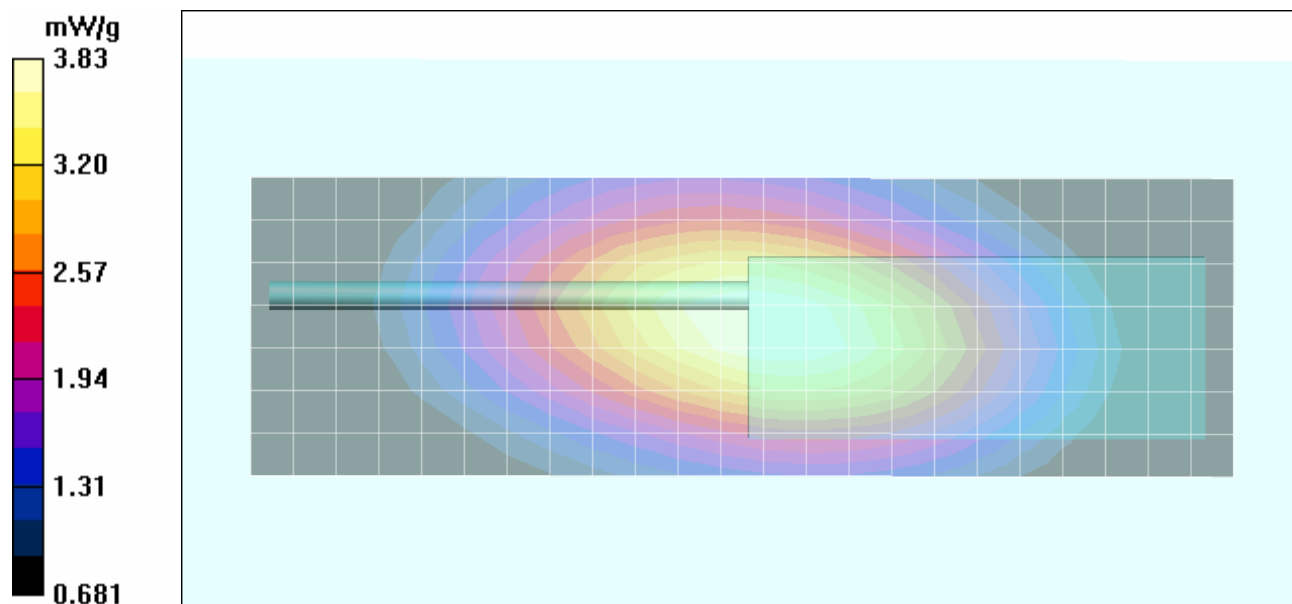

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 65

	Date(s) of Evaluation August 29-30, 2006	Test Report Serial No. 082406ALH-T769-S90U	Report Revision No. Revision 1.0	
	Report Issue Date September 15, 2006	Description of Test(s) RF Exposure - SAR	RF Exposure Category Occupational/Controlled	
				Certificate No. 2470.01

Z-Axis Scan

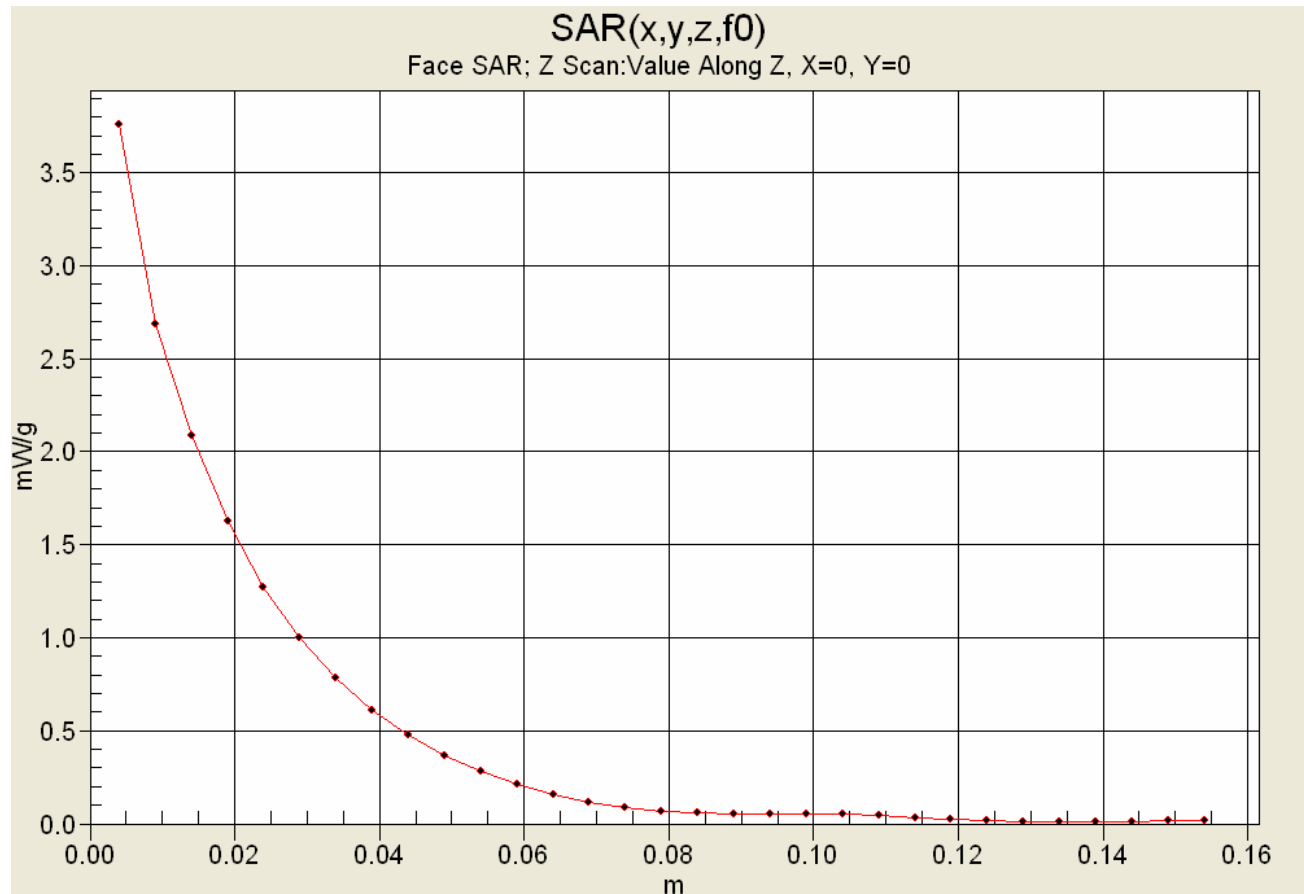

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 25 of 65

	Date(s) of Evaluation August 29-30, 2006	Test Report Serial No. 082406ALH-T769-S90U	Report Revision No. Revision 1.0	
	Report Issue Date September 15, 2006	Description of Test(s) RF Exposure - SAR	RF Exposure Category Occupational/Controlled	
				Certificate No. 2470.01

Date Tested: 08/30/2006

Face-Held SAR - NiCd Battery - Stubby Antenna (P/N: KRA-23M) - High Channel - 470 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Ambient Temp: 23.9°C; Fluid Temp: 23.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM UHF

Frequency: 470 MHz; Duty Cycle: 1:1

RF Output Power: 3.85 Watts (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: HSL450 ($\sigma = 0.84$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - High Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.72 mW/g

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - High Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.6 V/m; Power Drift = -0.216 dB

Peak SAR (extrapolated) = 4.00 W/kg

SAR(1 g) = 2.63 mW/g; SAR(10 g) = 1.92 mW/g

Maximum value of SAR (measured) = 2.73 mW/g

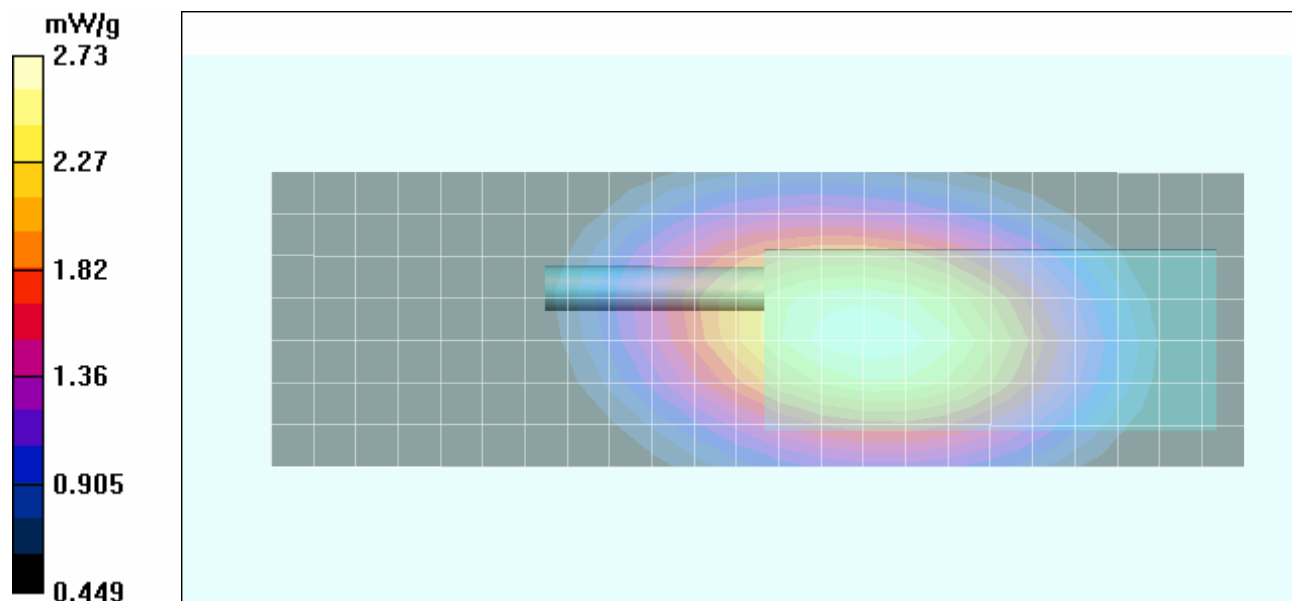

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 26 of 65

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	
Certificate No. 2470.01				

Date Tested: 08/30/2006

Face-Held SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M) - High Channel - 470 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Ambient Temp: 23.9°C; Fluid Temp: 23.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM UHF

Frequency: 470 MHz; Duty Cycle: 1:1

RF Output Power: 3.85 Watts (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: HSL450 ($\sigma = 0.84$ mho/m; $\epsilon_r = 42.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - High Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.51 mW/g

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - High Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.6 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 3.77 W/kg

SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.82 mW/g

Maximum value of SAR (measured) = 2.58 mW/g

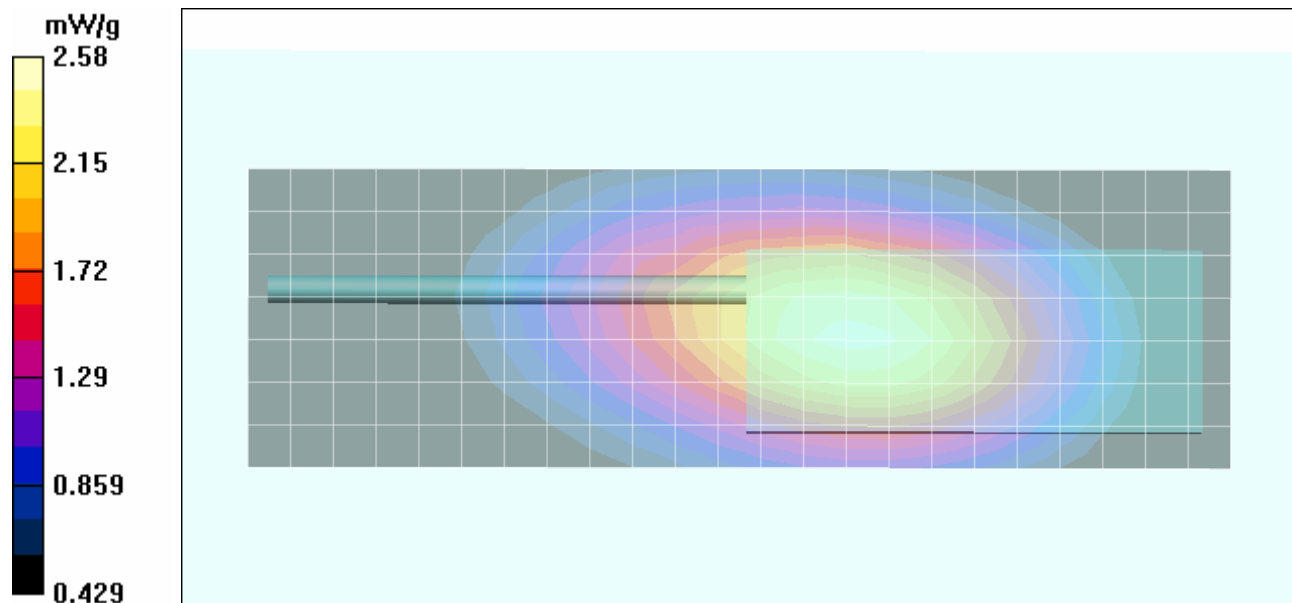

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 65

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	
Certificate No. 2470.01				

Date Tested: 08/29/2006

Body-Worn SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M3) - Mid Channel - 425 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Body-Worn Accessory: Belt-Clip (P/N: J29-0710-XX); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 23.7°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.5 kPa; Humidity: 33%

Communication System: FM UHF

Frequency: 425 MHz; Duty Cycle: 1:1

RF Output Power: 3.90 Watts (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: M450 ($\sigma = 0.91$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.79 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 77.9 V/m; Power Drift = -0.390 dB

Peak SAR (extrapolated) = 8.76 W/kg

SAR(1 g) = 5.46 mW/g; SAR(10 g) = 3.85 mW/g

Maximum value of SAR (measured) = 5.66 mW/g

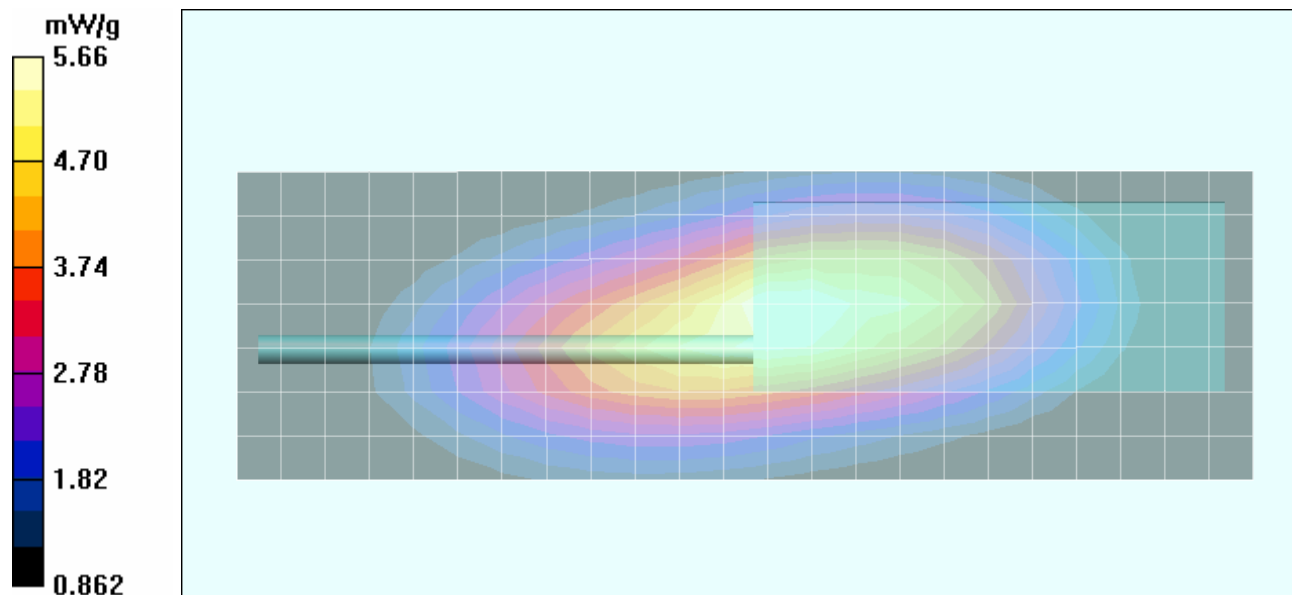

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 65

	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	
				Certificate No. 2470.01

Date Tested: 08/29/2006

Body-Worn SAR - NiMH Battery - Whip Antenna (P/N: KRA-27M3) - Mid Channel - 425 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Body-Worn Accessory: Belt-Clip (P/N: J29-0710-XX); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 23.7°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.5 kPa; Humidity: 33%

Communication System: FM UHF

Frequency: 425 MHz; Duty Cycle: 1:1

RF Output Power: 3.90 Watts (Conducted)

7.5V 2500mAh NiMH Battery Pack (P/N: KNB-32N)

Medium: M450 ($\sigma = 0.91$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 6.59 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 72.6 V/m; Power Drift = -0.282 dB

Peak SAR (extrapolated) = 8.12 W/kg

SAR(1 g) = 5.00 mW/g; SAR(10 g) = 3.5 mW/g

Maximum value of SAR (measured) = 5.25 mW/g

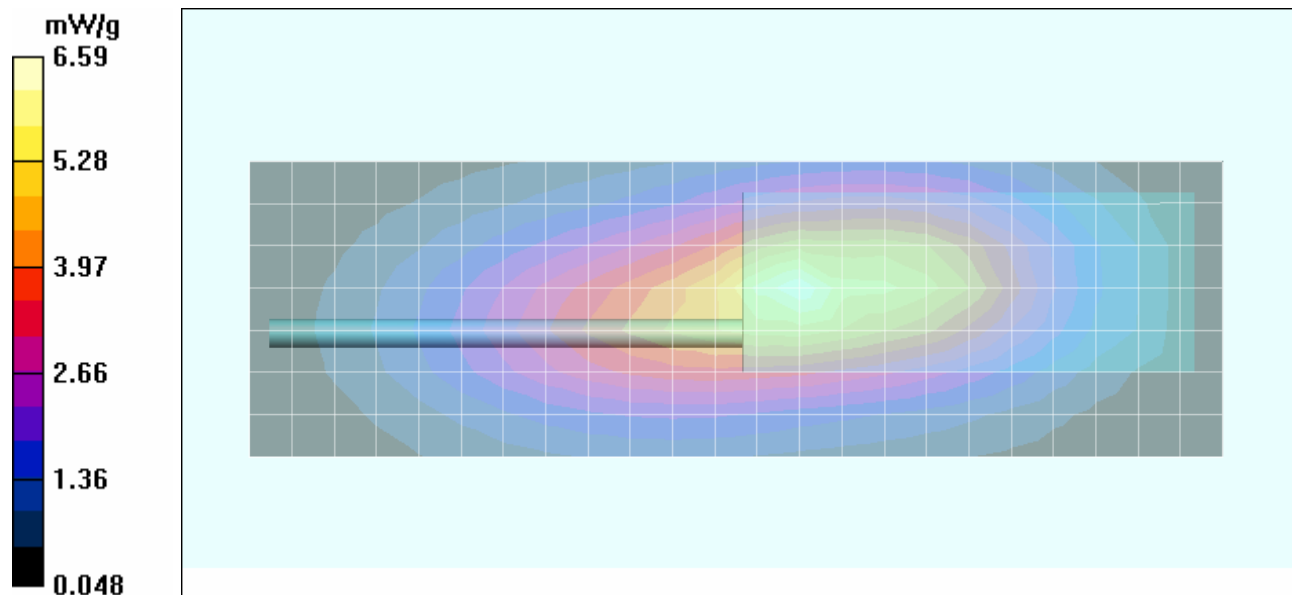

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 65

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	

Date Tested: 08/29/2006

Body-Worn SAR - Li-ion Battery - Whip Antenna (P/N: KRA-27M3) - Mid Channel - 425 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Body-Worn Accessory: Belt-Clip (P/N: J29-0710-XX); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 23.7°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.5 kPa; Humidity: 33%

Communication System: FM UHF

Frequency: 425 MHz; Duty Cycle: 1:1

RF Output Power: 3.90 Watts (Conducted)

7.5V 1700mAh Li-ion Battery Pack (P/N: KNB-33L)

Medium: M450 ($\sigma = 0.91$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 21/06/2006

- Phantom: Side Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.73 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 65.7 V/m; Power Drift = -0.400 dB

Peak SAR (extrapolated) = 7.44 W/kg

SAR(1 g) = 4.55 mW/g; SAR(10 g) = 3.26 mW/g

Maximum value of SAR (measured) = 4.80 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 65.7 V/m; Power Drift = -0.400 dB

Peak SAR (extrapolated) = 7.23 W/kg

SAR(1 g) = 4.76 mW/g; SAR(10 g) = 3.46 mW/g

Maximum value of SAR (measured) = 4.94 mW/g

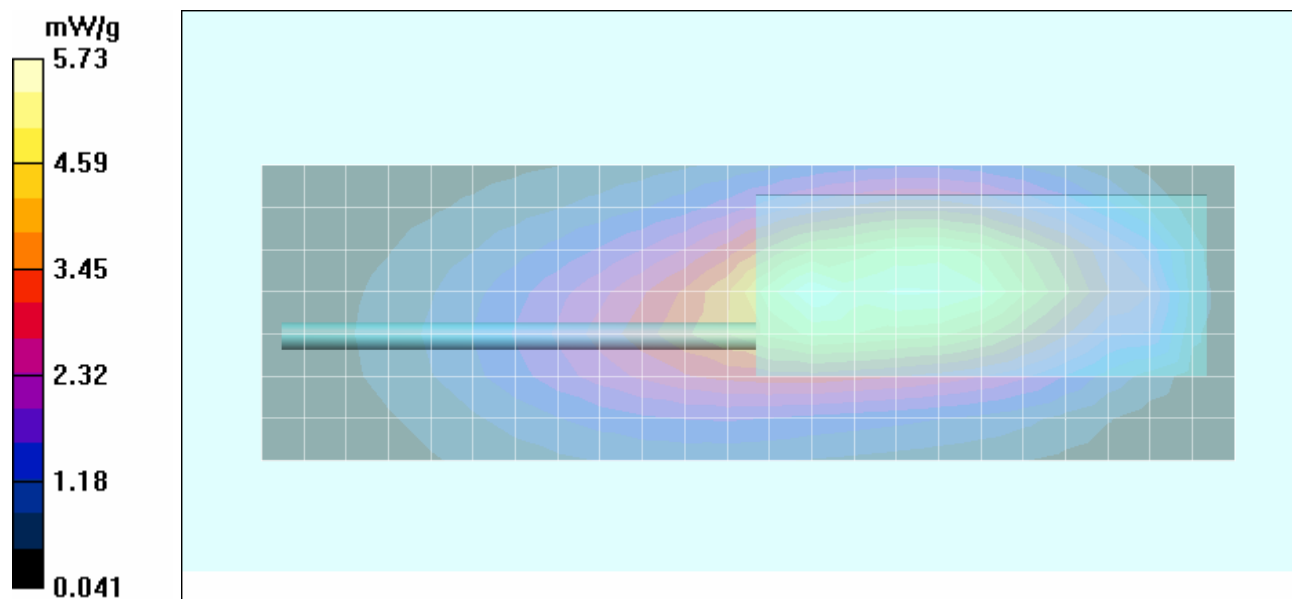

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 65

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	

Date Tested: 08/29/2006

Body-Worn SAR - NiMH IS Battery - Whip Antenna (P/N: KRA-27M3) - Mid Channel - 425 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Body-Worn Accessory: Belt-Clip (P/N: J29-0710-XX); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 23.7°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.5 kPa; Humidity: 33%

Communication System: FM UHF

Frequency: 425 MHz; Duty Cycle: 1:1

RF Output Power: 3.90 Watts (Conducted)

7.5V 2500mAh NiMH IS Battery Pack (P/N: KNB-41NC)

Medium: M450 ($\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 55.3$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 21/06/2006

- Phantom: Side Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.75 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 71.5 V/m; Power Drift = -0.570 dB

Peak SAR (extrapolated) = 7.29 W/kg

SAR(1 g) = 4.53 mW/g; SAR(10 g) = 3.2 mW/g

Maximum value of SAR (measured) = 4.76 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 71.5 V/m; Power Drift = -0.570 dB

Peak SAR (extrapolated) = 5.46 W/kg

SAR(1 g) = 3.68 mW/g; SAR(10 g) = 2.71 mW/g

Maximum value of SAR (measured) = 3.87 mW/g

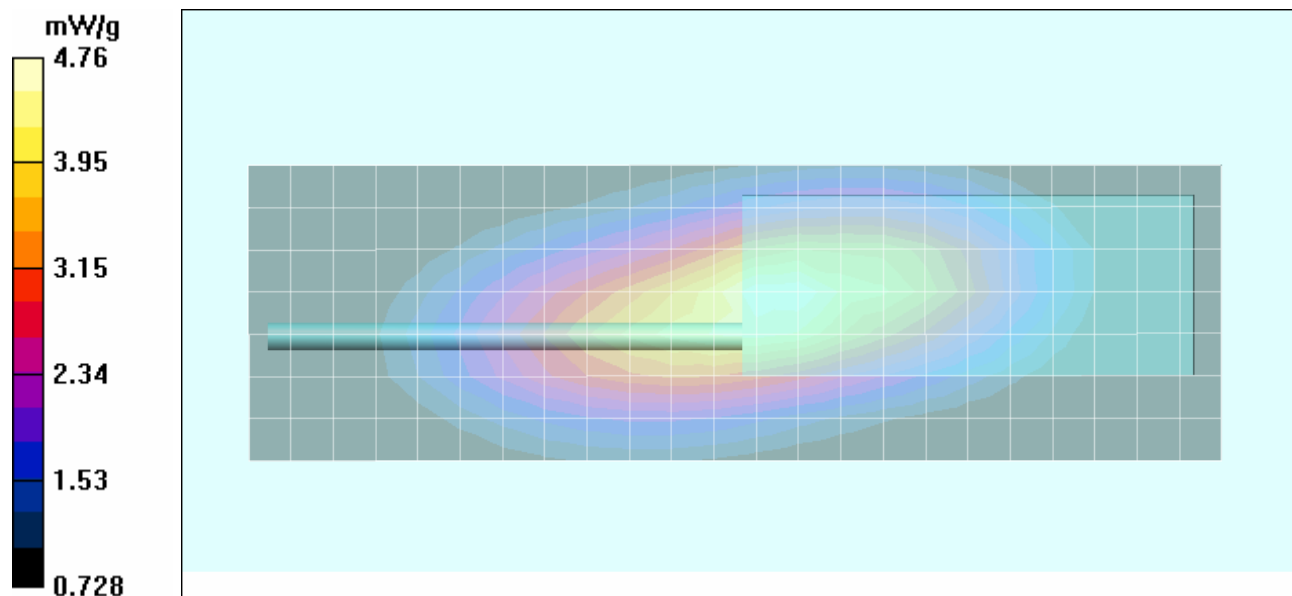

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 65

	Date(s) of Evaluation August 29-30, 2006	Test Report Serial No. 082406ALH-T769-S90U	Report Revision No. Revision 1.0	
	Report Issue Date September 15, 2006	Description of Test(s) RF Exposure - SAR	RF Exposure Category Occupational/Controlled	
				Certificate No. 2470.01

Date Tested: 08/29/2006

Body-Worn SAR - NiCd Battery - Whip Antenna (P/N: KRA-29) - Mid Channel - 425 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Body-Worn Accessory: Belt-Clip (P/N: J29-0710-XX); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 23.7°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.5 kPa; Humidity: 33%

Communication System: FM UHF

Frequency: 425 MHz; Duty Cycle: 1:1

RF Output Power: 3.90 Watts (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: M450 ($\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 55.3$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 21/06/2006

- Phantom: Side Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.15 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 78.3 V/m; Power Drift = -0.509 dB

Peak SAR (extrapolated) = 8.73 W/kg

SAR(1 g) = 5.47 mW/g; SAR(10 g) = 3.87 mW/g

Maximum value of SAR (measured) = 5.68 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 78.3 V/m; Power Drift = -0.509 dB

Peak SAR (extrapolated) = 6.82 W/kg

SAR(1 g) = 4.62 mW/g; SAR(10 g) = 3.4 mW/g

Maximum value of SAR (measured) = 4.81 mW/g

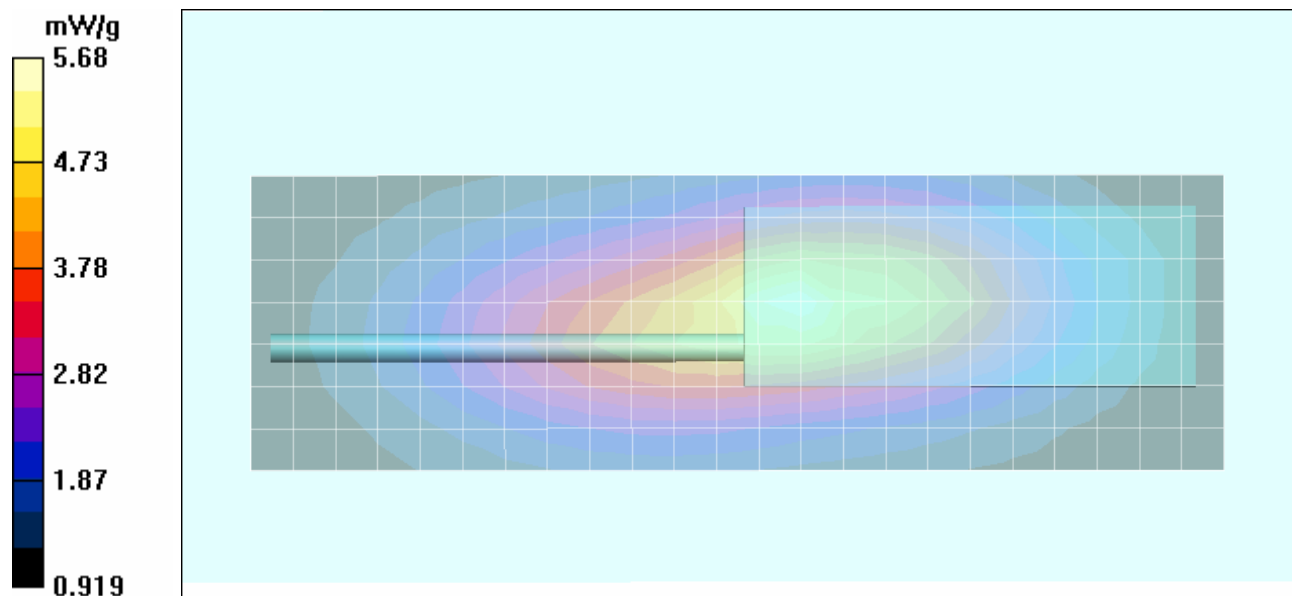

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 65

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	


SAR-versus-Time Power Droop Evaluation

Body-Worn SAR

Ni-Cd Battery (P/N: KNB-31A)

Whip Antenna (P/N: KRA-29)

Mid Channel (425 MHz)

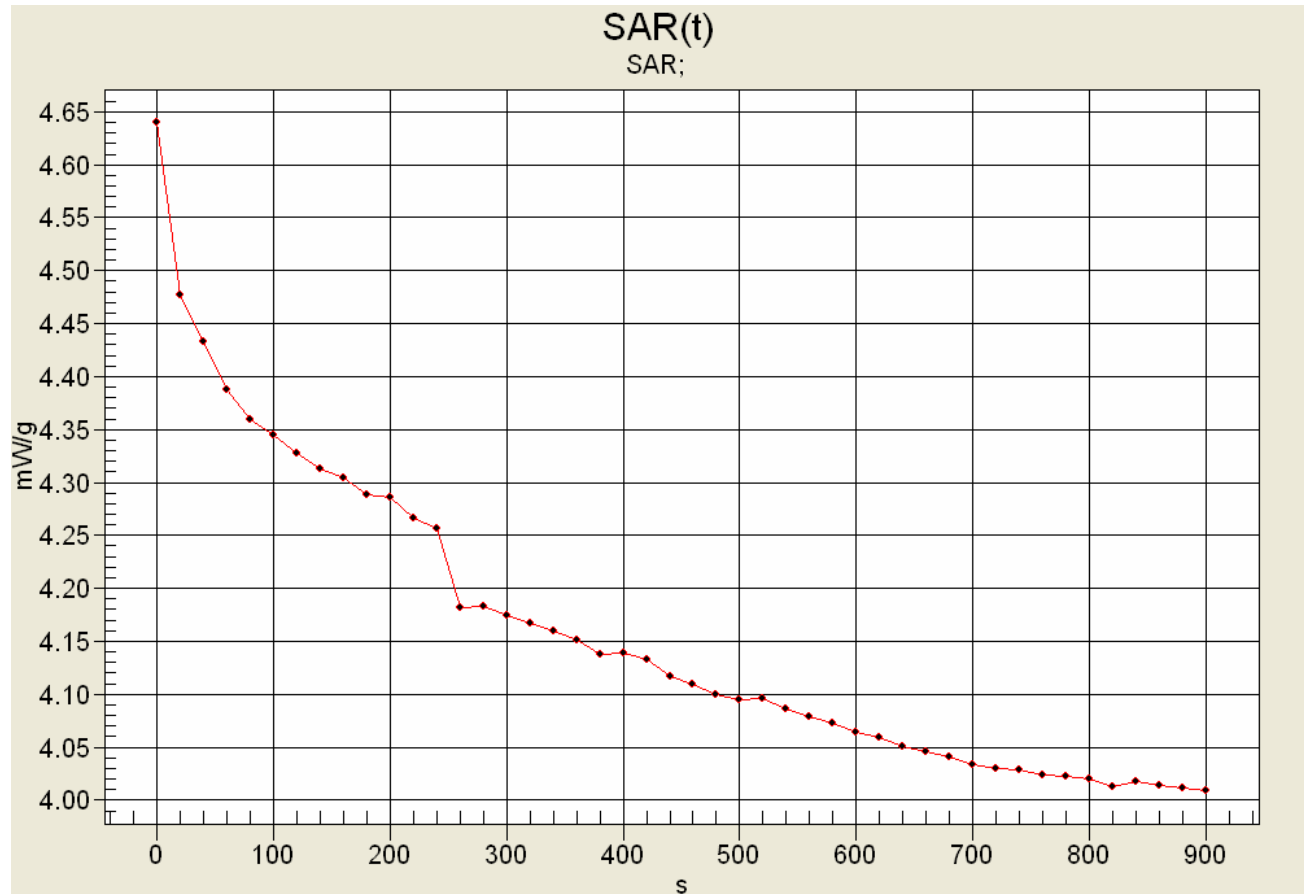

Max SAR: 4.63974 mW/g

Min. SAR: 4.00929 mW/g (-0.634 dB)

SAR after 340s: 4.15939 mW/g (-0.475 dB)

(340s = Zoom Scan Duration)

(900s = Area Scan Duration)

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 65

 Testing and Engineering Services Lab	Date(s) of Evaluation August 29-30, 2006	Test Report Serial No. 082406ALH-T769-S90U	Report Revision No. Revision 1.0	 Certificate No. 2470.01
	Report Issue Date September 15, 2006	Description of Test(s) RF Exposure - SAR	RF Exposure Category Occupational/Controlled	

Date Tested: 08/29/2006

Body-Worn SAR - NiCd Battery - Whip Antenna (P/N: KRA-29) - Low Channel - 380 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Body-Worn Accessory: Belt-Clip (P/N: J29-0710-XX); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 23.7°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.5 kPa; Humidity: 33%

Communication System: FM UHF

Frequency: 380 MHz; Duty Cycle: 1:1

RF Output Power: 3.86 Watts (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: M450 ($\sigma = 0.91$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 21/06/2006

- Phantom: Side Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Low Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.80 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Low Channel

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.9 V/m; Power Drift = -0.158 dB

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 6.67 mW/g; SAR(10 g) = 4.78 mW/g

Maximum value of SAR (measured) = 6.96 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - Low Channel


Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.9 V/m; Power Drift = -0.158 dB

Peak SAR (extrapolated) = 8.07 W/kg

SAR(1 g) = 5.31 mW/g; SAR(10 g) = 3.85 mW/g


Maximum value of SAR (measured) = 5.71 mW/g

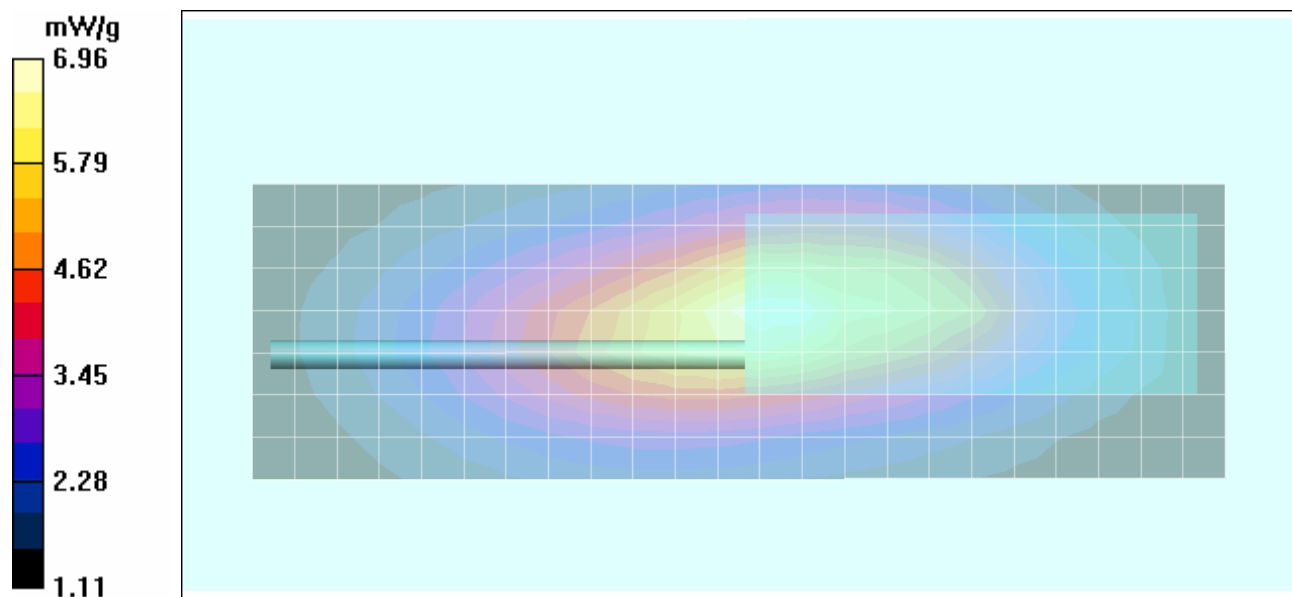

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 34 of 65

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	

Z-Axis Scan

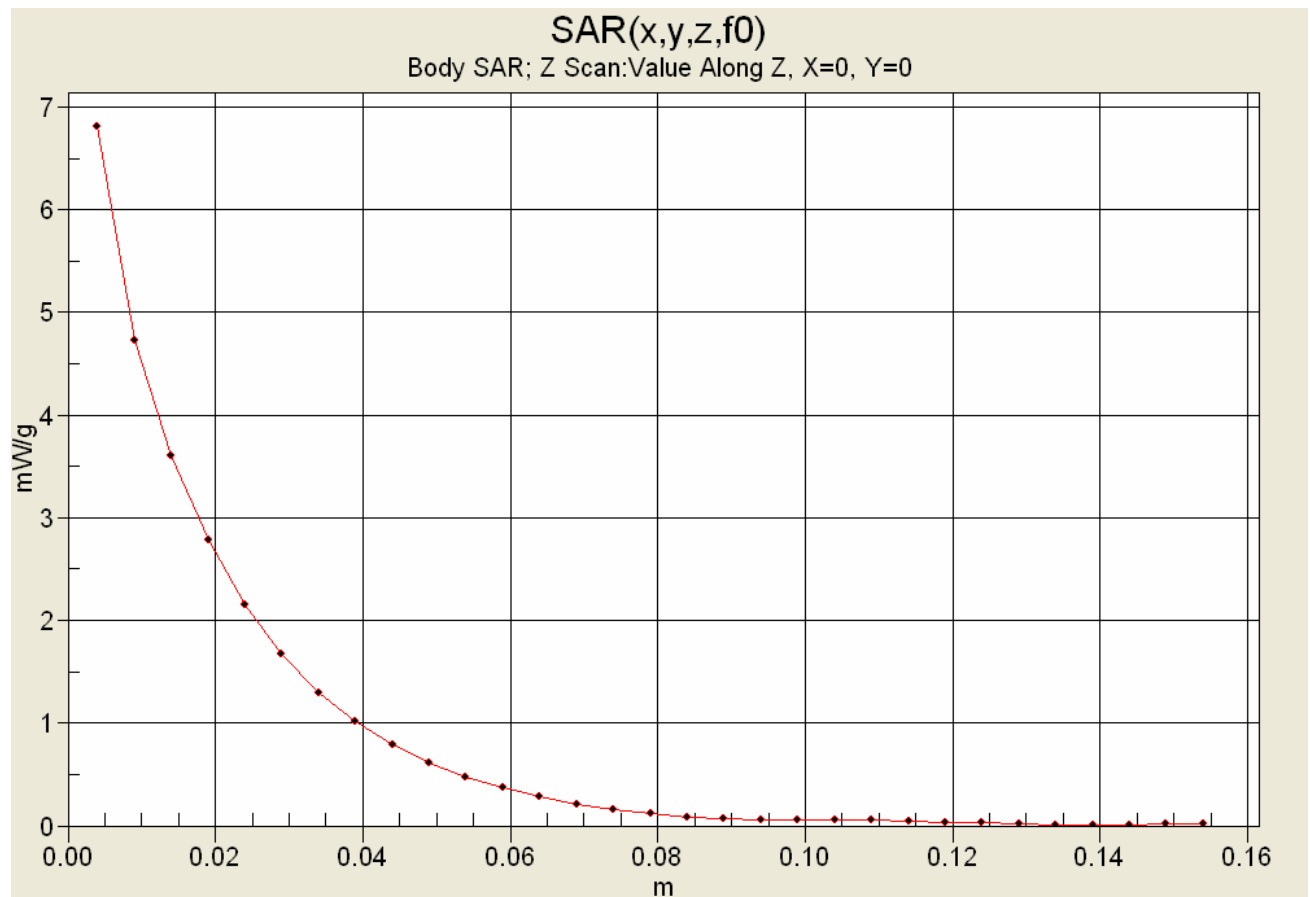

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 65

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	

Date Tested: 08/29/2006

Body-Worn SAR - NiCd Battery - Stubby Antenna (P/N: KRA-23M) - High Channel - 470 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Body-Worn Accessory: Belt-Clip (P/N: J29-0710-XX); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 23.7°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.5 kPa; Humidity: 33%

Communication System: FM UHF

Frequency: 470 MHz; Duty Cycle: 1:1

RF Output Power: 3.85 Watts (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: M450 ($\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 55.3$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 21/06/2006

- Phantom: Side Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - High Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.46 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - High Channel

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 67.0 V/m; Power Drift = -0.263 dB

Peak SAR (extrapolated) = 7.66 W/kg

SAR(1 g) = 4.77 mW/g; SAR(10 g) = 3.41 mW/g

Maximum value of SAR (measured) = 4.95 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - High Channel


Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 67.0 V/m; Power Drift = -0.263 dB

Peak SAR (extrapolated) = 6.94 W/kg

SAR(1 g) = 4.63 mW/g; SAR(10 g) = 3.39 mW/g

Maximum value of SAR (measured) = 4.81 mW/g

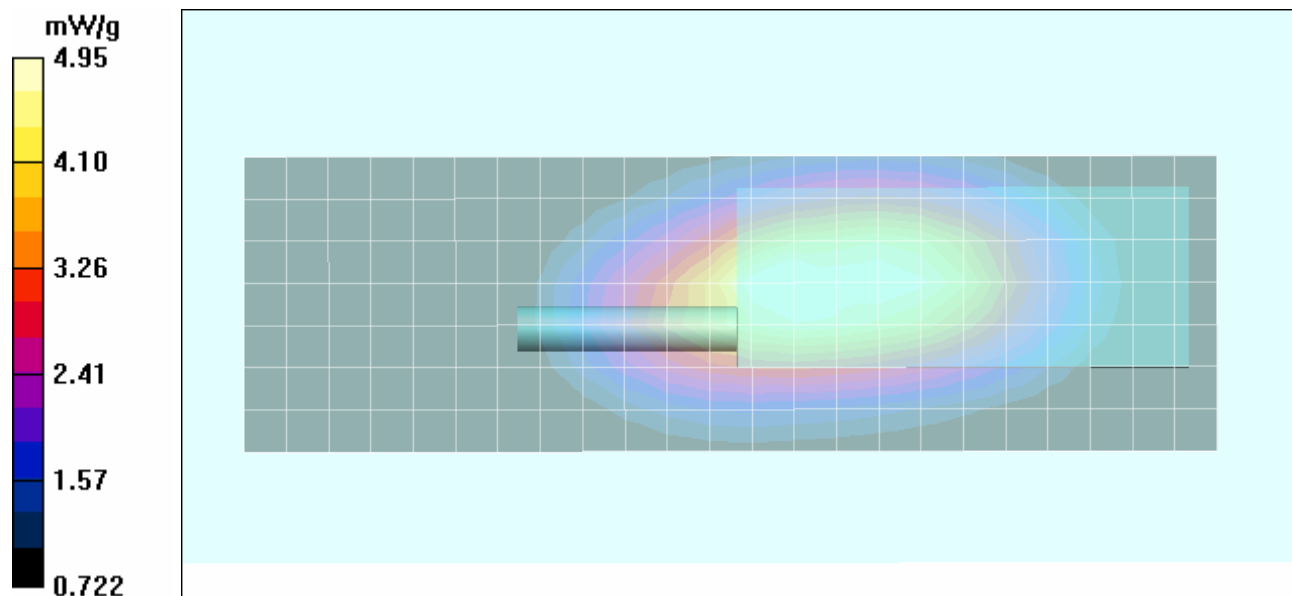

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 65

 Testing and Engineering Services Lab	<u>Date(s) of Evaluation</u> August 29-30, 2006	<u>Test Report Serial No.</u> 082406ALH-T769-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> September 15, 2006	<u>Description of Test(s)</u> RF Exposure - SAR	<u>RF Exposure Category</u> Occupational/Controlled	

Date Tested: 08/29/2006

Body-Worn SAR - NiCd Battery - Whip Antenna (P/N: KRA-27M) - High Channel - 470 MHz

DUT: Kenwood; Model: TK-5310-K6; Type: Portable FM UHF PTT Radio Transceiver; Serial: None

Body-Worn Accessory: Belt-Clip (P/N: J29-0710-XX); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 23.7°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.5 kPa; Humidity: 33%

Communication System: FM UHF

Frequency: 470 MHz; Duty Cycle: 1:1

RF Output Power: 3.85 Watts (Conducted)

7.5V 1700mAh NiCd Battery Pack (P/N: KNB-31A)

Medium: M450 ($\sigma = 0.91$ mho/m; $\epsilon_r = 55.3$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - High Channel

Area Scan (8x24x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.81 mW/g

Body-Worn SAR - 2.0 cm Belt-Clip Separation Distance to Planar Phantom - High Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 69.5 V/m; Power Drift = -0.181 dB

Peak SAR (extrapolated) = 7.10 W/kg

SAR(1 g) = 4.72 mW/g; SAR(10 g) = 3.43 mW/g

Maximum value of SAR (measured) = 4.93 mW/g

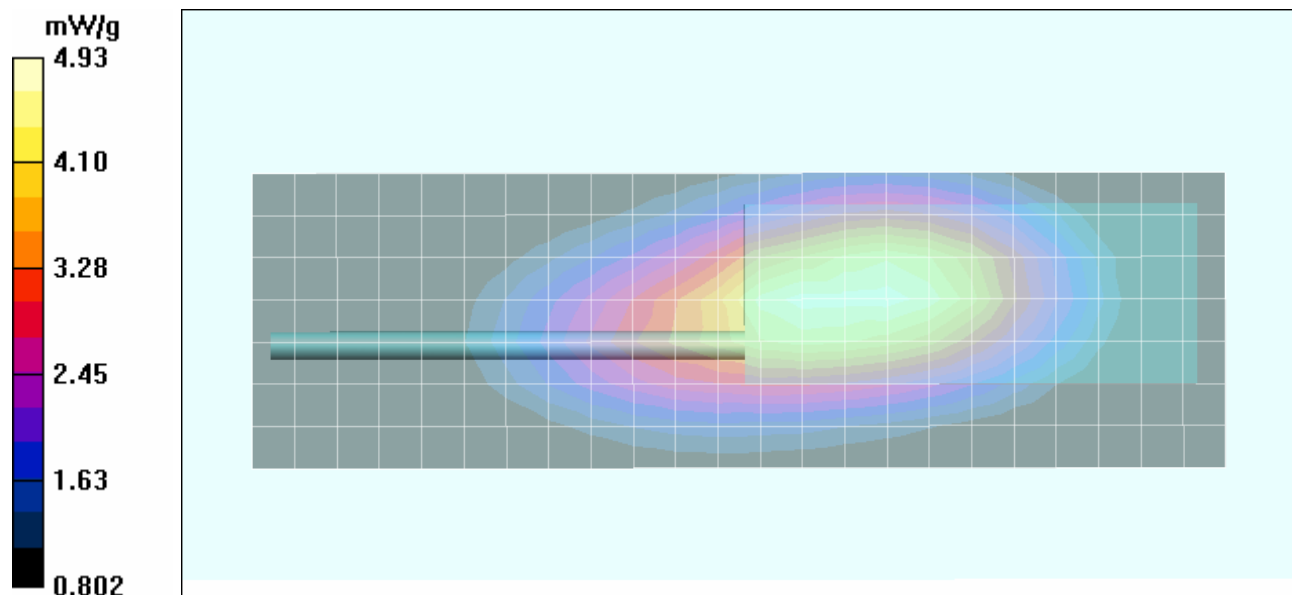

Company:	Kenwood USA Corporation	FCC ID:	ALH39913120	IC ID:	282D-39913120	
Model(s):	TK-5310-K4, -K5, -K6	Type:	Portable FM UHF PTT Radio Transceiver		380 - 470 MHz	
2006 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 37 of 65