



FCC RF Test Report

APPLICANT : Copeland Cold Chain LP.
EQUIPMENT : GO Nano BLE
BRAND NAME : COPELAND
MODEL NAME : TB60L-00
FCC ID : AMHTB60L
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jan. 06, 2025 ~ Jan. 21, 2025

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	9
2.5 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement	16
3.4 Conducted Band Edges and Spurious Emission Measurement	21
3.5 Radiated Band Edges and Spurious Emission Measurement	26
3.6 Antenna Requirements.....	30
4 LIST OF MEASURING EQUIPMENT.....	31
5 MEASUREMENT UNCERTAINTY.....	32
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4D2408	Rev. 01	Initial issue of report	Jul. 14, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.63 dB at 7320.00 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Applicable	Not connect to AC Mains
3.6	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Copeland Cold Chain LP.

6223 N Discovery Way, Park Pointe Center 1 , Suite 120 Boise ID 83713

1.2 Manufacturer

Silicon Mountain Contract Services

1400 Shilo Drive, Nampa, ID 83687

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GO Nano BLE
Brand Name	COPELAND
Model Name	TB60L-00
FCC ID	AMHTB60L
SN Code	Conducted: Z0002672 Radiation: Z0002661
HW Version	0059 5549 Rev. C
SW Version	170-1742 0106

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 6.02 dBm (0.0040 W)
99% Occupied Bandwidth	BLE 1Mbps:1.013MHz
Antenna Type / Gain	PCB Antenna type with gain 3.64 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ 03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated:, radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps

2.3 Connection Diagram of Test System

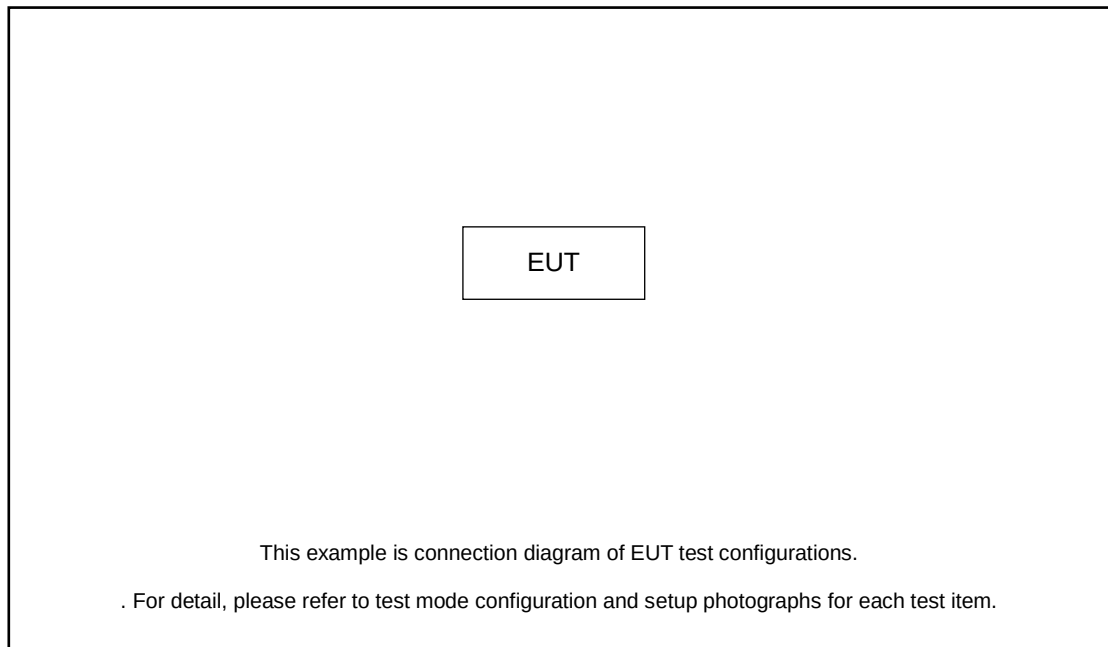

2.4 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.30 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.30 + 10 = 11.30 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


BLE 1Mbps

6 dB Bandwidth Plot on Channel 00

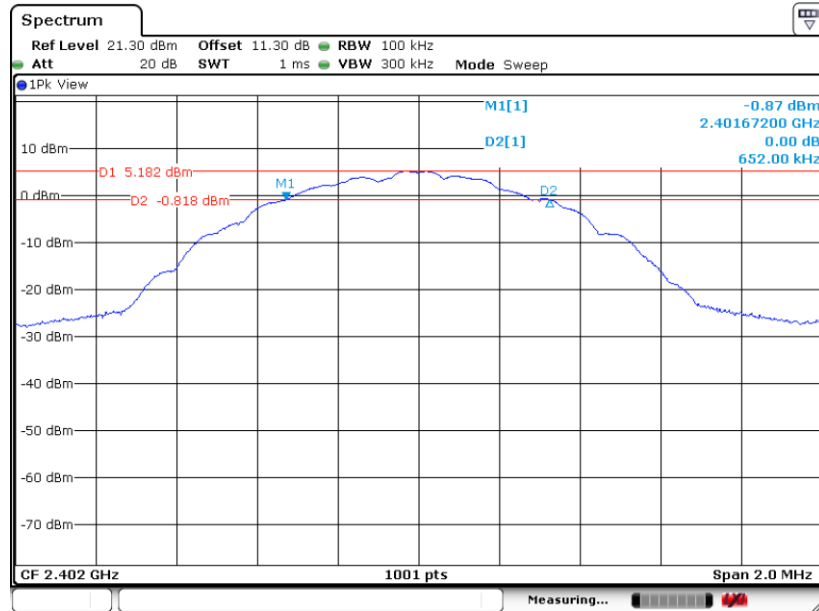

Date: 6 JAN 2025 03:05:03


6 dB Bandwidth Plot on Channel 19

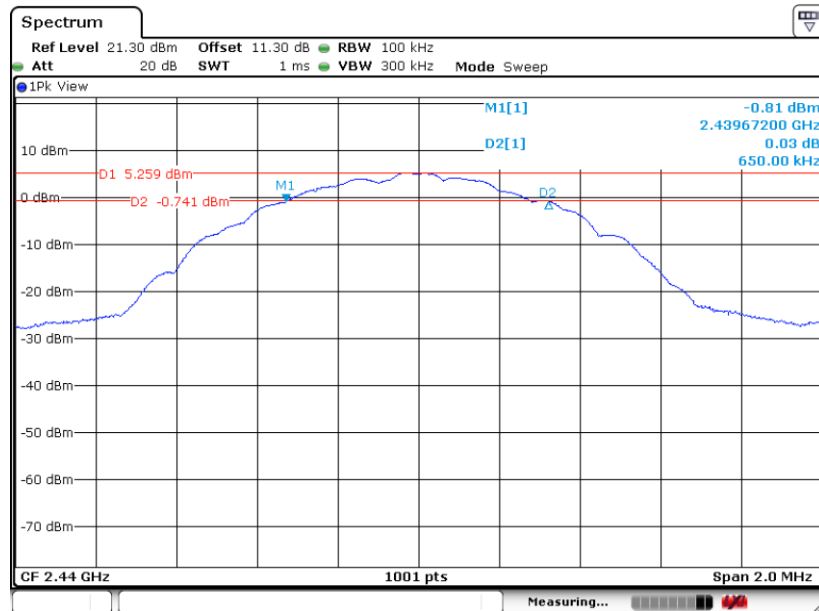

Date: 6 JAN 2025 03:10:23



6 dB Bandwidth Plot on Channel 39

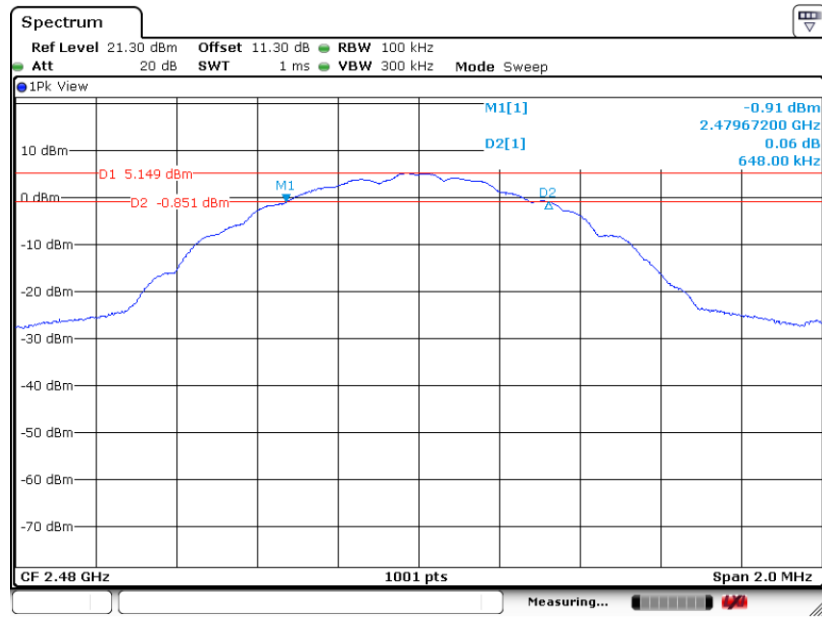




3.1.6 Test Result of 99% Occupied Bandwidth


Please refer to Appendix A.

BLE 1Mbps

99% Occupied Bandwidth Plot on Channel 00

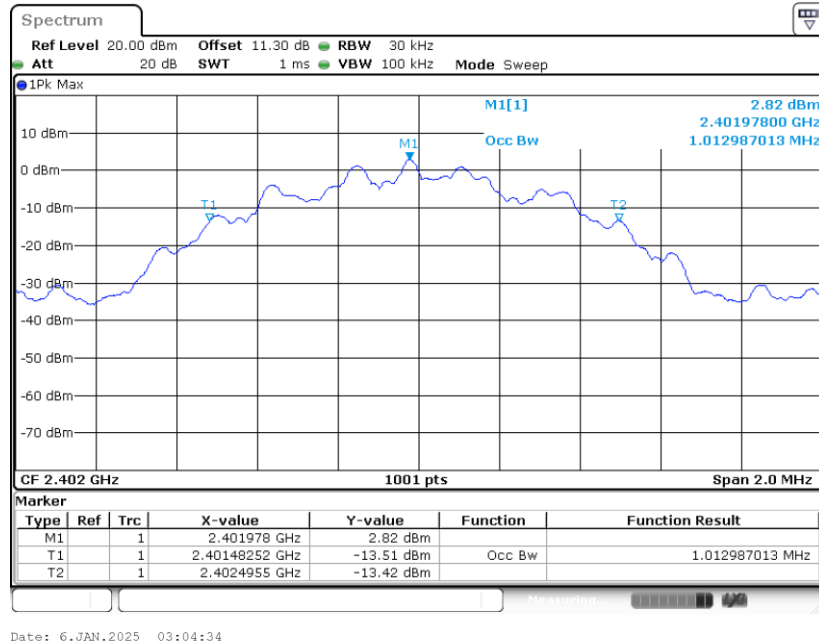


99% Occupied Bandwidth Plot on Channel 19

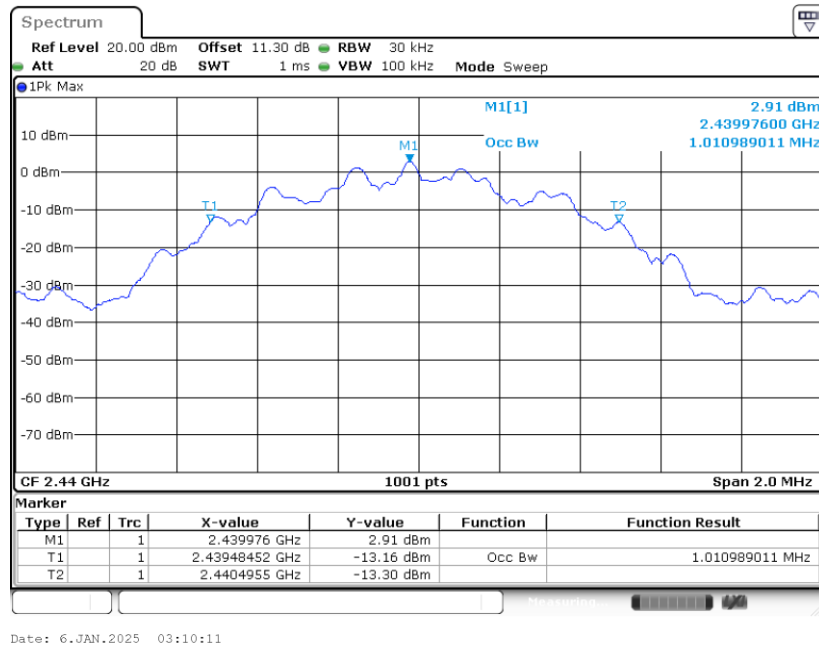



99% Occupied Bandwidth Plot on Channel 39

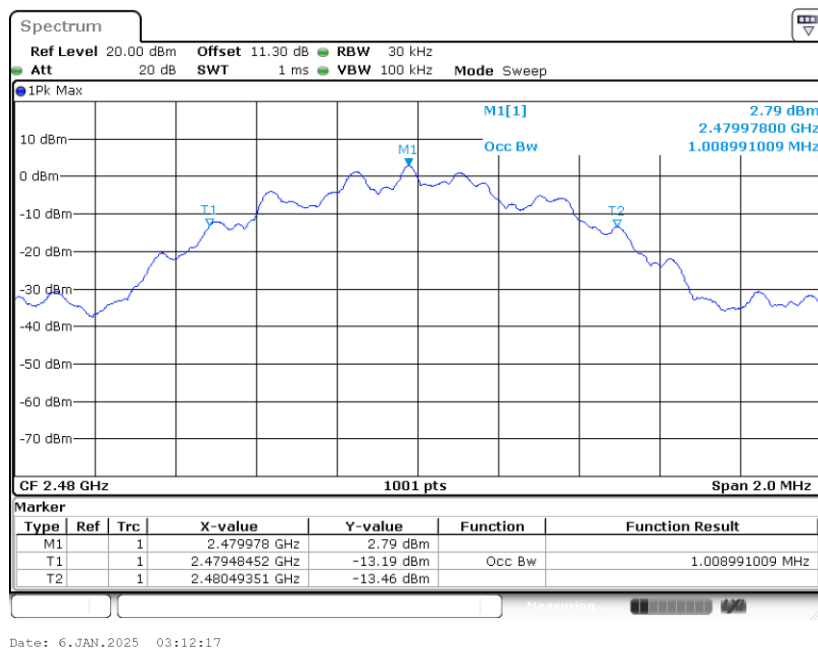

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

BLE 1Mbps

PSD 100kHz Plot on Channel 00

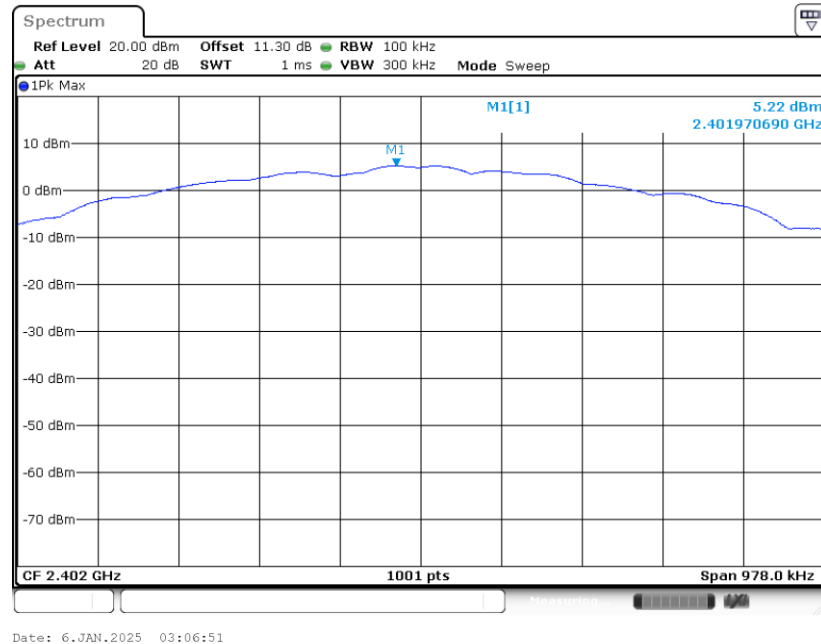


PSD 100kHz Plot on Channel 19

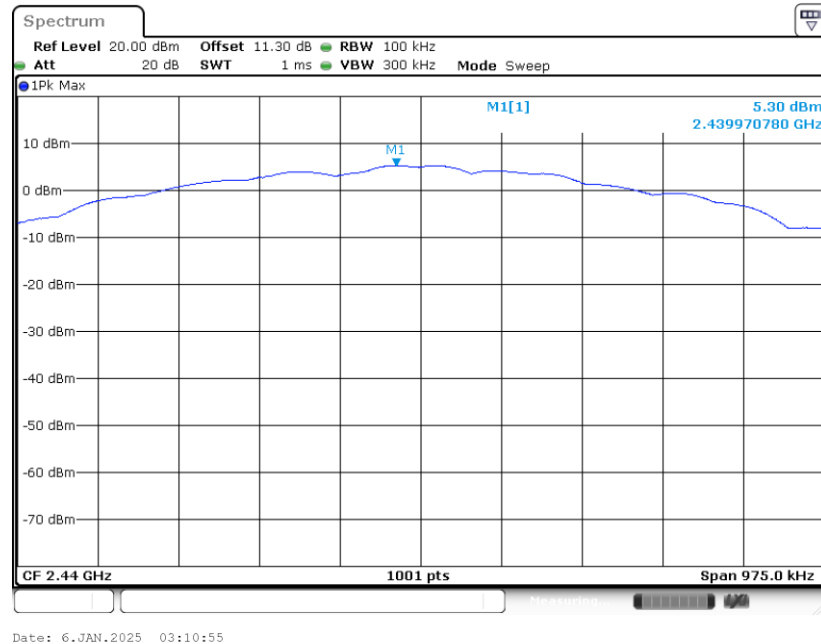



PSD 100kHz Plot on Channel 39

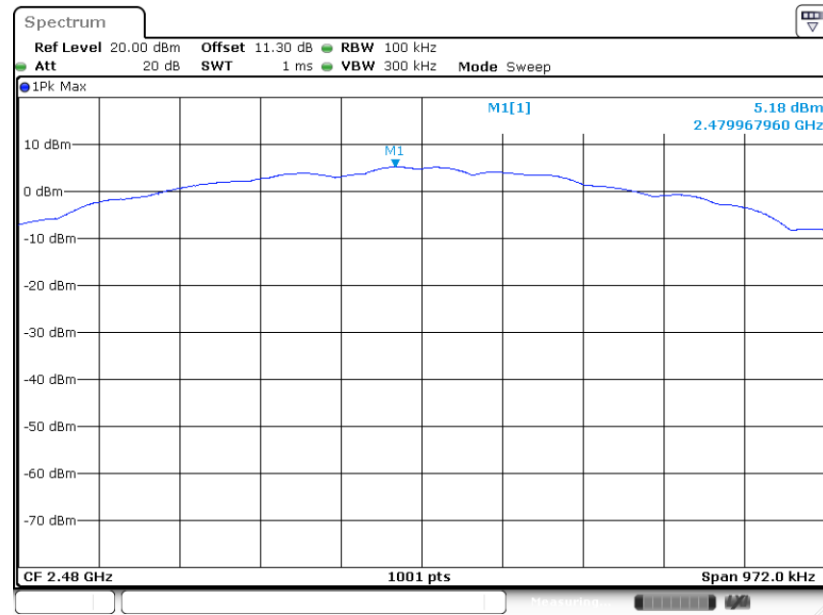


Date: 6.JAN.2025 03:12:56




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

BLE 1Mbps

PSD 3kHz Plot on Channel 00

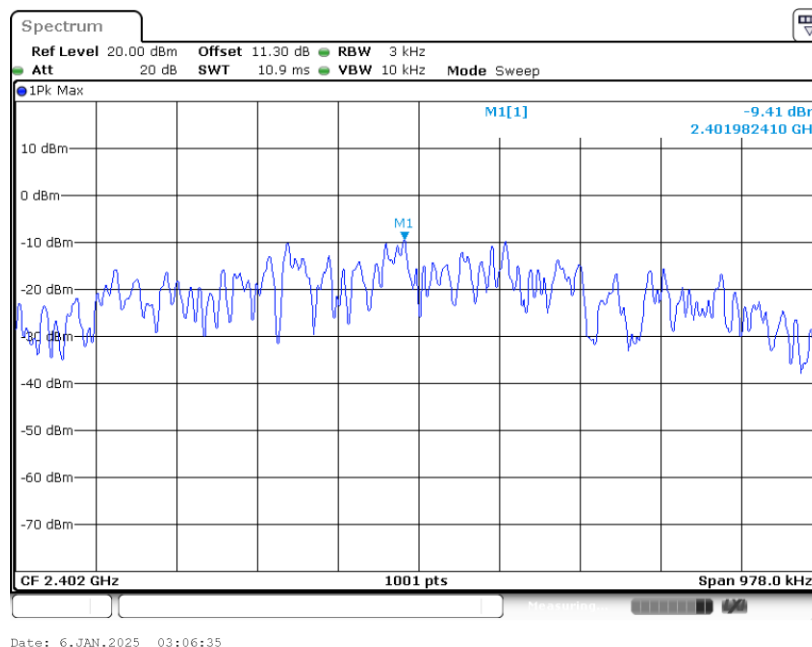


PSD 3kHz Plot on Channel 19

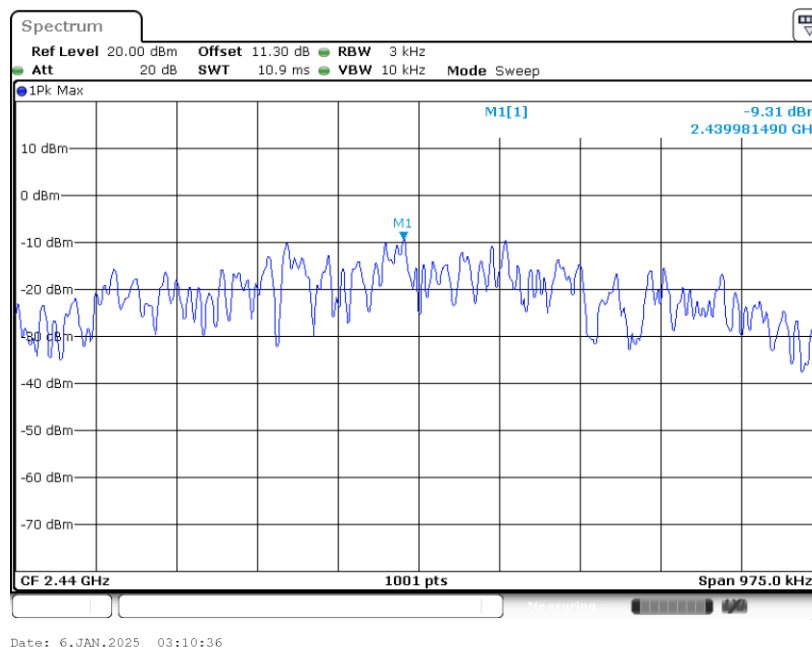



PSD 3kHz Plot on Channel 39

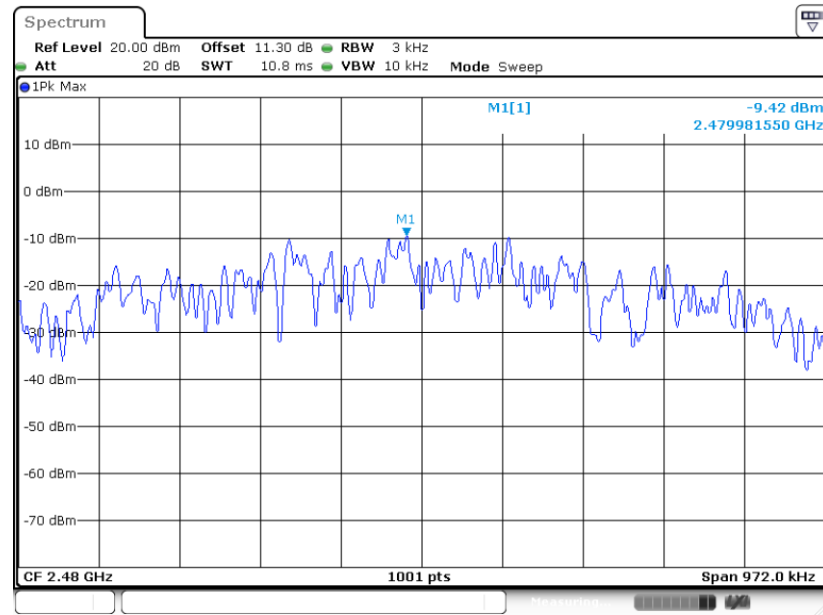

Date: 6.JAN.2025 03:12:40

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges Plots


BLE 1Mbps

Low Band Edge Plot on Channel 00

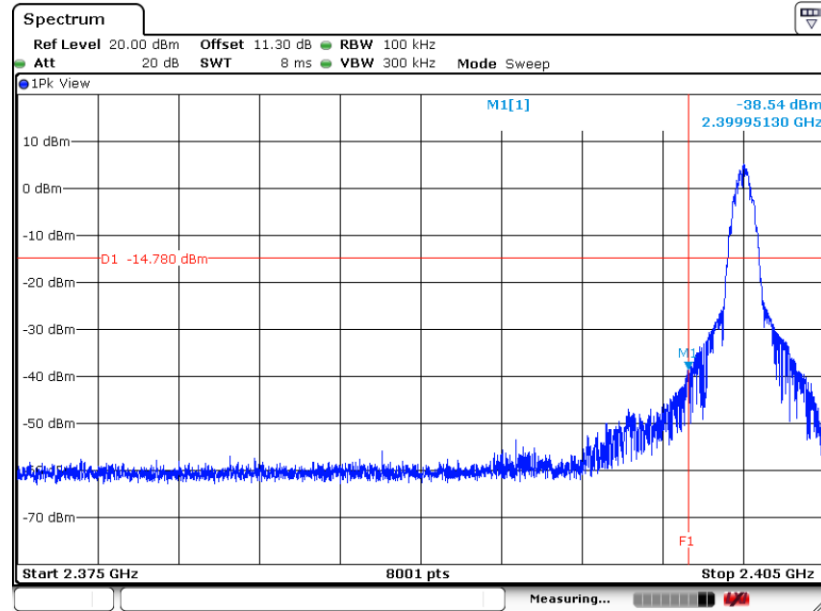

Date: 6.JAN.2025 03:08:35

High Band Edge Plot on Channel 39

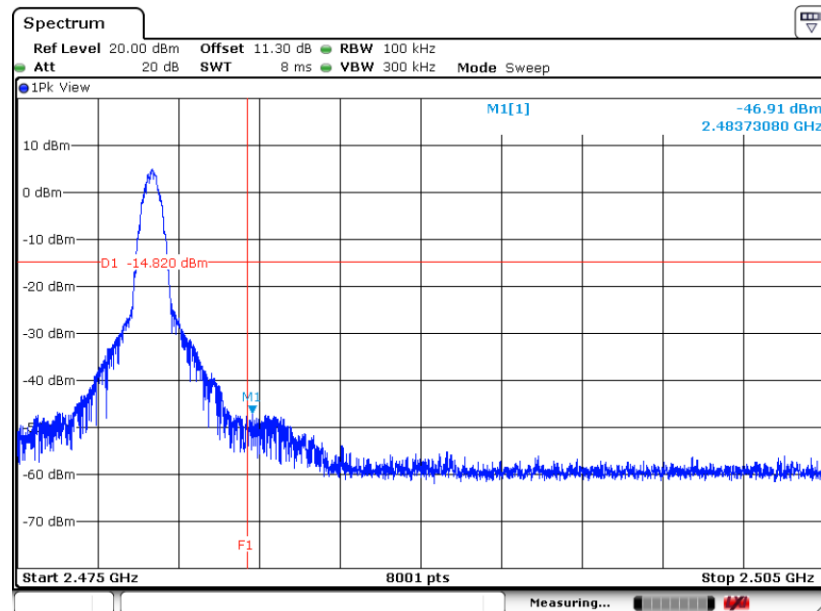


Date: 6.JAN.2025 03:14:01




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

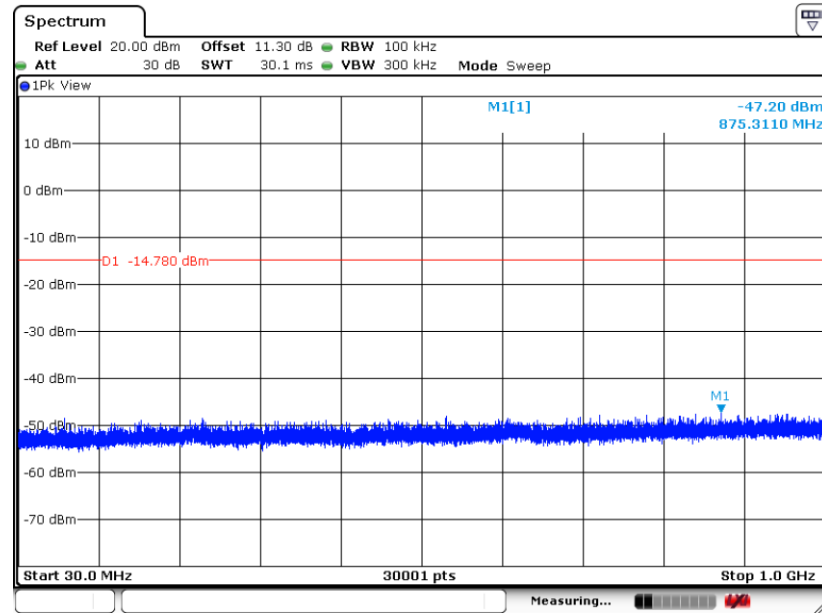

Date: 6.JAN.2025 03:07:20


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

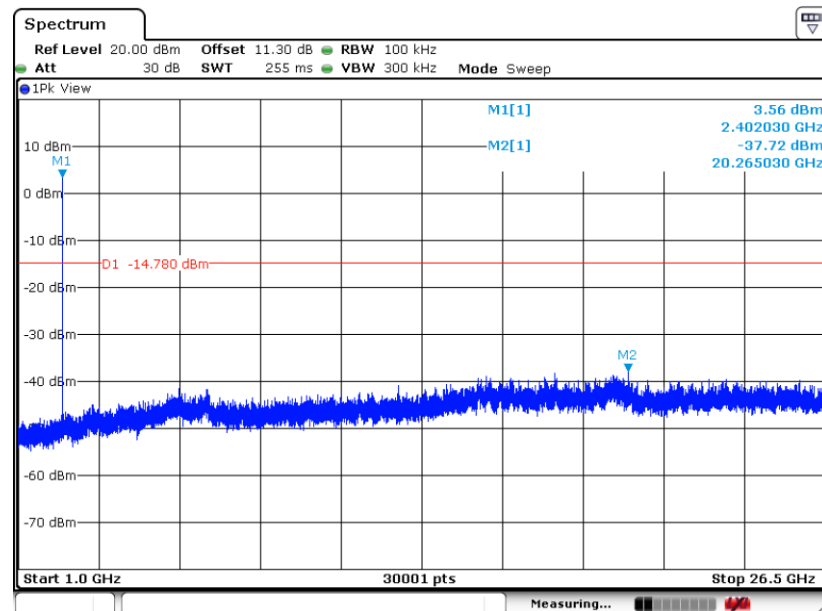

Date: 6.JAN.2025 03:07:37




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

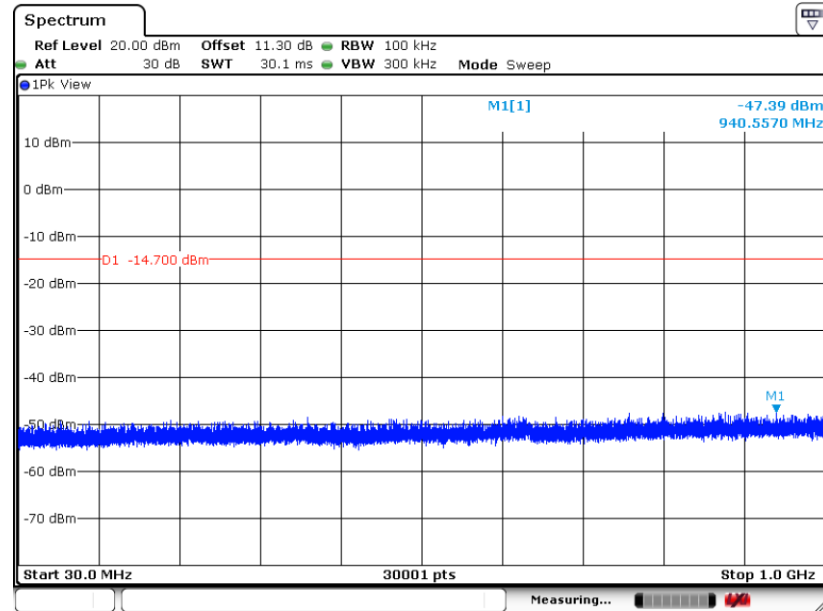

Date: 6.JAN.2025 03:11:28


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

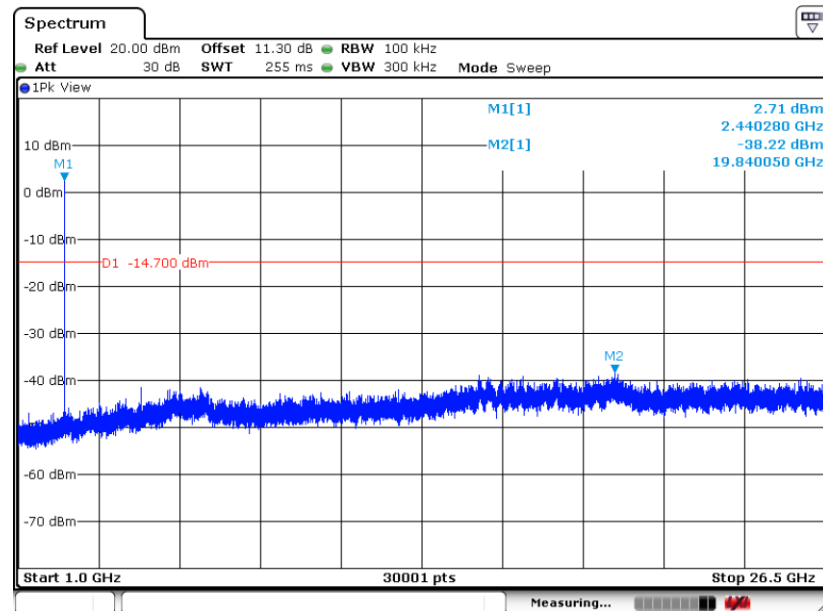


Date: 6.JAN.2025 03:11:44



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

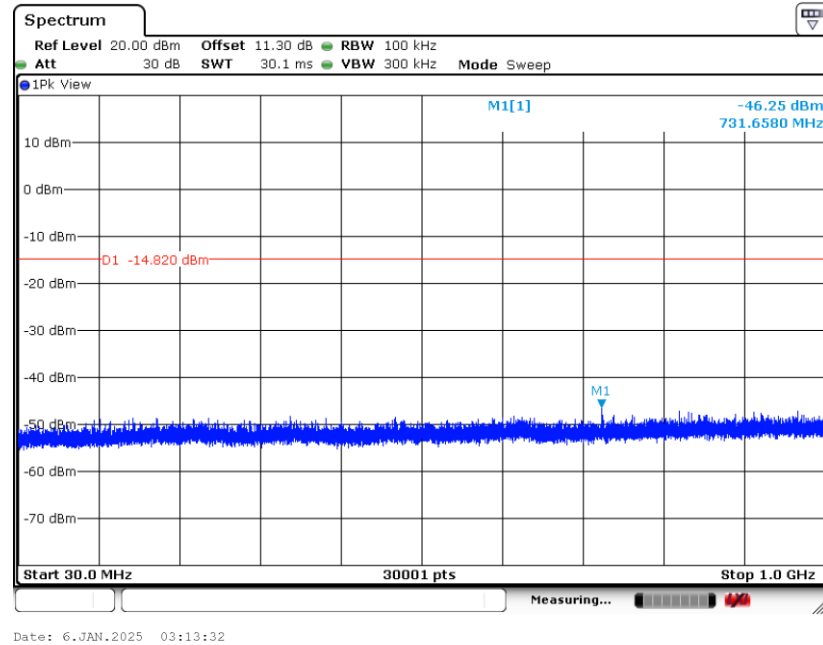

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

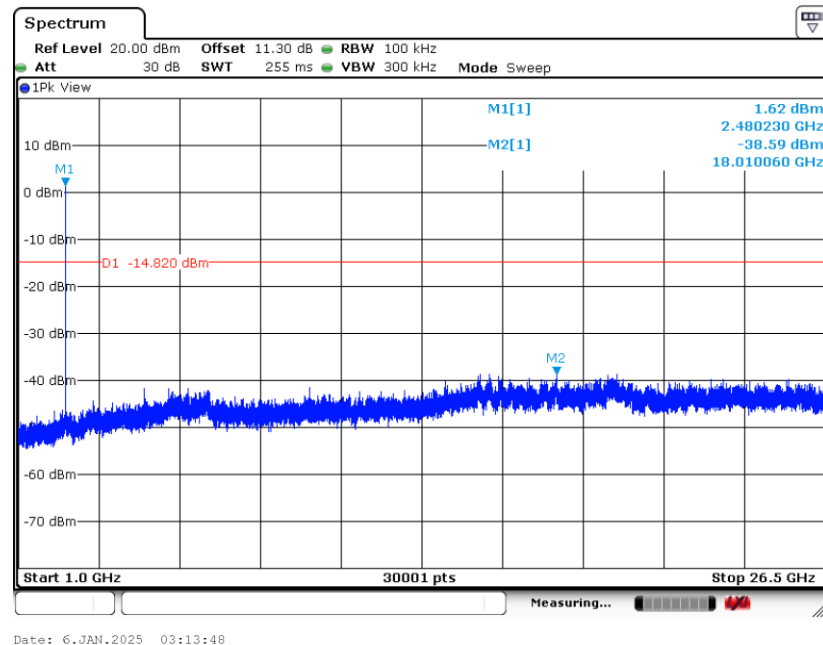

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

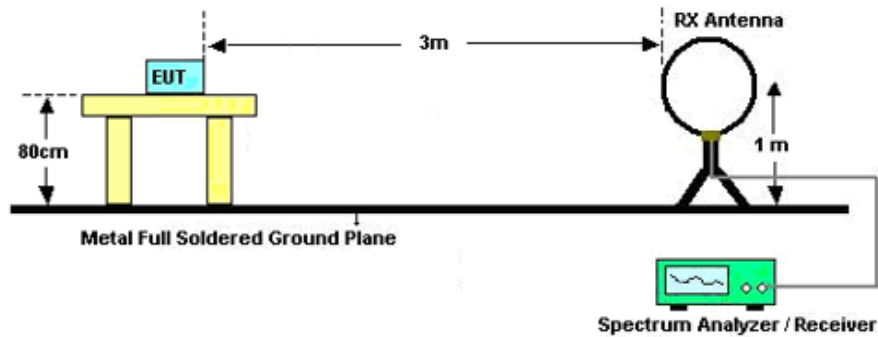

For radiated emissions from 30MHz to 1GHz

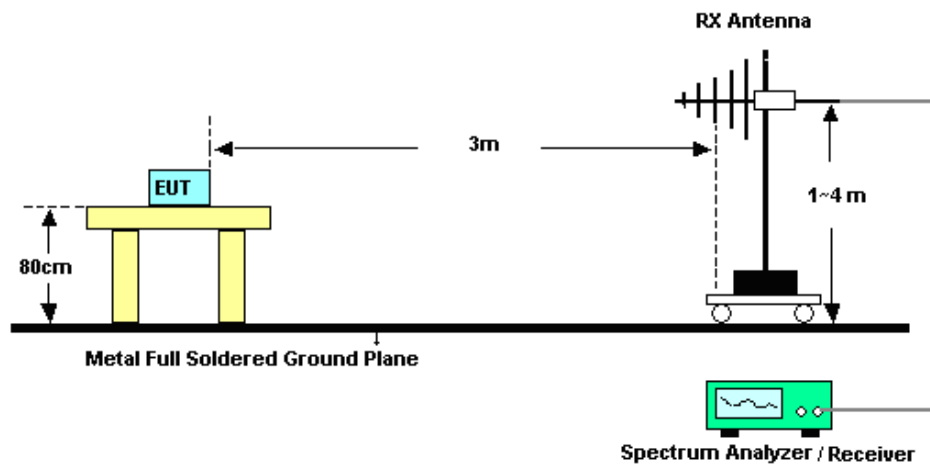

For radiated emissions above 1GHz

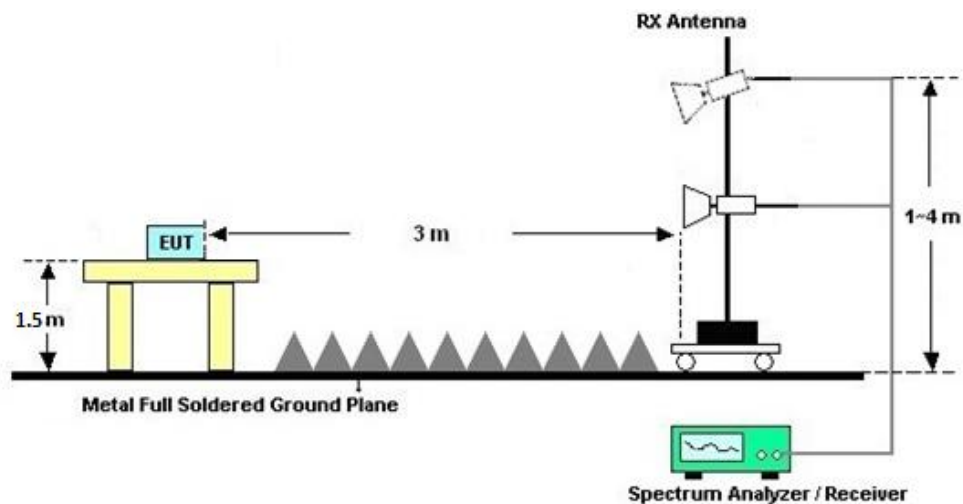



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2024	Jan. 18, 2025~Jan. 21, 2025	Dec. 26, 2025	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Jan. 18, 2025~Jan. 21, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2024	Jan. 18, 2025~Jan. 21, 2025	Dec. 28, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Jan. 18, 2025~Jan. 21, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Jan. 18, 2025~Jan. 21, 2025	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 09, 2024	Jan. 18, 2025~Jan. 21, 2025	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Jan. 18, 2025~Jan. 21, 2025	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Jan. 18, 2025~Jan. 21, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 14, 2024	Jan. 18, 2025~Jan. 21, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Jan. 18, 2025~Jan. 21, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14, 2024	Jan. 18, 2025~Jan. 21, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jan. 18, 2025~Jan. 21, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jan. 18, 2025~Jan. 21, 2025	NCR	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jan. 06, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2024	Jan. 06, 2025	Dec. 28, 2025	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10℃ ~ 50℃ 10%RH~99%RH	Apr. 09, 2024	Jan. 06, 2025	Apr. 08, 2025	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Test Engineer:	Liu Qiu Qiu	Temperature:	21~25	°C
Test Date:	2025/1/6	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.013	0.652	0.50	Pass
BLE	1Mbps	1	19	2440	1.011	0.650	0.50	Pass
BLE	1Mbps	1	39	2480	1.009	0.648	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	6.02	47.00	30.00	3.64	9.66	36.00	Pass
BLE	1Mbps	1	19	2440	5.92	47.00	30.00	3.64	9.56	36.00	Pass
BLE	1Mbps	1	39	2480	5.81	47.00	30.00	3.64	9.45	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	8.33	5.90	47.00	30.00	3.64	9.54	36.00	Pass
BLE	1Mbps	1	19	2440	8.33	5.80	47.00	30.00	3.64	9.44	36.00	Pass
BLE	1Mbps	1	39	2480	8.33	5.60	47.00	30.00	3.64	9.24	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.22	-9.41	3.64	8.00	Pass
BLE	1Mbps	1	19	2440	5.30	-9.31	3.64	8.00	Pass
BLE	1Mbps	1	39	2480	5.18	-9.42	3.64	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

Test Engineer :	Zhaohui Liang	Relative Humidity :	48~49%
		Temperature :	24-25℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	Bluetooth-LE	19	2440	1Mbps	-	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2363.87	38.55	54.00	-15.45	V	AVERAGE	Pass	Band Edge
1	Bluetooth-LE	00	4804.00	44.45	54.00	-9.55	H	Average	Pass	Harmonic
2	Bluetooth-LE	19	2492.51	37.19	54.00	-16.81	H	AVERAGE	Pass	Band Edge
2	Bluetooth-LE	19	7320.00	49.37	54.00	-4.63	V	Average	Pass	Harmonic
3	Bluetooth-LE	39	2483.82	46.32	54.00	-7.68	V	AVERAGE	Pass	Band Edge
3	Bluetooth-LE	39	7440.00	49.19	54.00	-4.81	V	Average	Pass	Harmonic
4	Bluetooth-LE	39	805.03	31.22	46.00	-14.78	H	Peak	Pass	LF

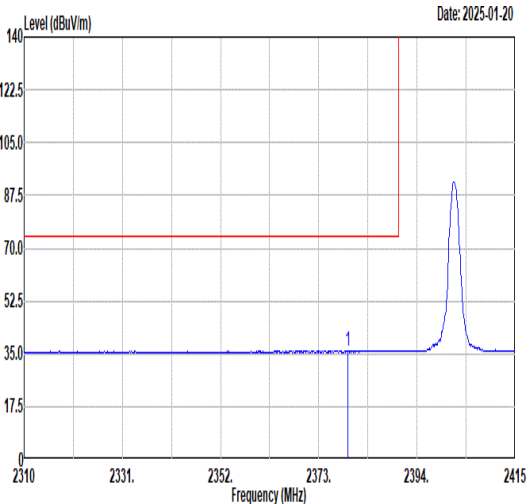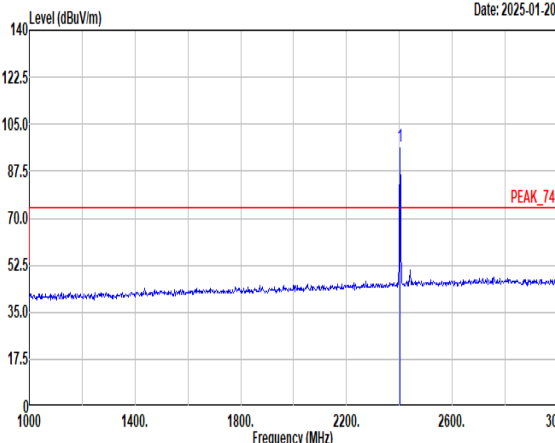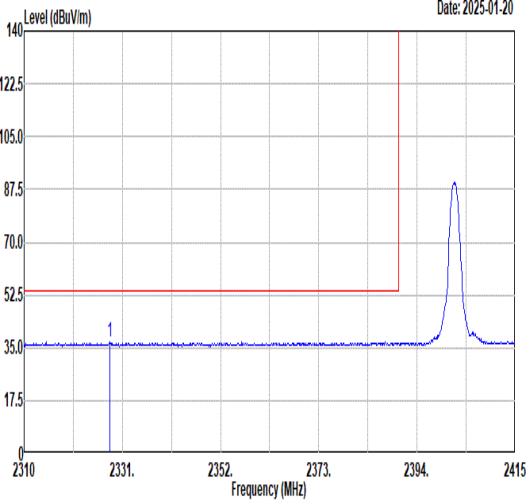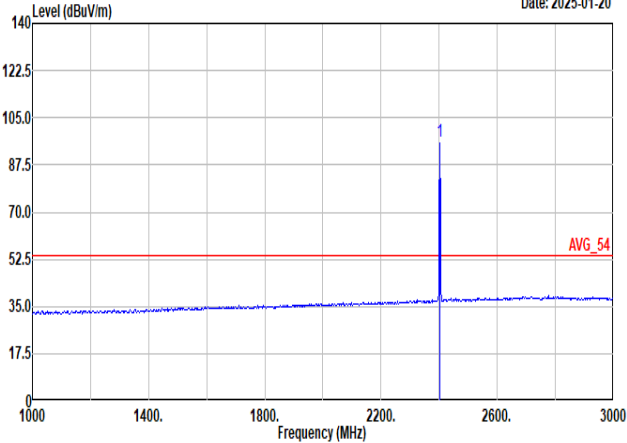

Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	 Level (dBuV/m) vs Frequency (MHz). Date: 2025-01-20. Peak at 2379.20 MHz.						 Level (dBuV/m) vs Frequency (MHz). Date: 2025-01-20. Peak at 2402.00 MHz.																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2379.20</td><td>35.99</td><td>74.00</td><td>-38.01</td><td>30.31</td><td>30.60</td><td>7.73</td><td>32.65</td><td>375</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2379.20	35.99	74.00	-38.01	30.31	30.60	7.73	32.65	375	0	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>96.84</td><td>-----</td><td>-----</td><td>91.09</td><td>30.60</td><td>7.79</td><td>32.64</td><td>375</td><td>0</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	96.84	-----	-----	91.09	30.60	7.79	32.64	375	0
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2379.20	35.99	74.00	-38.01	30.31	30.60	7.73	32.65	375	0	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2402.00	96.84	-----	-----	91.09	30.60	7.79	32.64	375	0	PEAK																																																																															
Avg	 Level (dBuV/m) vs Frequency (MHz). Date: 2025-01-20. Average at 2328.38 MHz.						 Level (dBuV/m) vs Frequency (MHz). Date: 2025-01-20. Average at 2402.00 MHz.																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2328.38</td><td>36.79</td><td>54.00</td><td>-17.21</td><td>31.27</td><td>30.60</td><td>7.59</td><td>32.67</td><td>375</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2328.38	36.79	54.00	-17.21	31.27	30.60	7.59	32.67	375	0	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>96.19</td><td>-----</td><td>-----</td><td>90.44</td><td>30.60</td><td>7.79</td><td>32.64</td><td>375</td><td>0</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	96.19	-----	-----	90.44	30.60	7.79	32.64	375	0
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2328.38	36.79	54.00	-17.21	31.27	30.60	7.59	32.67	375	0	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2402.00	96.19	-----	-----	90.44	30.60	7.79	32.64	375	0	AVERAGE																																																																															



Mode	1																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2025-01-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2364.71</td><td>50.51</td><td>74.00</td><td>-23.49</td><td>44.87</td><td>30.60</td><td>7.69</td><td>32.65</td><td>100</td><td>312 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2364.71	50.51	74.00	-23.49	44.87	30.60	7.69	32.65	100	312 PEAK	Level (dBuV/m) Date: 2025-01-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>99.11</td><td>-----</td><td>-----</td><td>93.36</td><td>30.60</td><td>7.79</td><td>32.64</td><td>100</td><td>312 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	99.11	-----	-----	93.36	30.60	7.79	32.64	100	312 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2364.71	50.51	74.00	-23.49	44.87	30.60	7.69	32.65	100	312 PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2402.00	99.11	-----	-----	93.36	30.60	7.79	32.64	100	312 PEAK																																																																						
Avg	Level (dBuV/m) Date: 2025-01-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2363.87</td><td>38.55</td><td>54.00</td><td>-15.45</td><td>32.91</td><td>30.60</td><td>7.69</td><td>32.65</td><td>100</td><td>312 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2363.87	38.55	54.00	-15.45	32.91	30.60	7.69	32.65	100	312 AVERAGE	Level (dBuV/m) Date: 2025-01-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>98.38</td><td>-----</td><td>-----</td><td>92.63</td><td>30.60</td><td>7.79</td><td>32.64</td><td>100</td><td>312 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	98.38	-----	-----	92.63	30.60	7.79	32.64	100	312 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2363.87	38.55	54.00	-15.45	32.91	30.60	7.69	32.65	100	312 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2402.00	98.38	-----	-----	92.63	30.60	7.79	32.64	100	312 AVERAGE																																																																						





Mode	1																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-01-21 Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>4804.00</td><td>49.75</td><td>74.00</td><td>-24.25</td><td>55.96</td><td>35.30</td><td>11.07</td><td>52.58</td><td>100</td><td>333</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>44.45</td><td>54.00</td><td>-9.55</td><td>50.66</td><td>35.30</td><td>11.07</td><td>52.58</td><td>100</td><td>333</td><td>Average</td></tr><tr><td>3</td><td>7206.00</td><td>51.85</td><td>74.00</td><td>-22.15</td><td>54.52</td><td>36.51</td><td>13.00</td><td>52.18</td><td>100</td><td>60</td><td>Peak</td></tr><tr><td>4</td><td>16814.00</td><td>61.61</td><td>74.00</td><td>-12.39</td><td>55.21</td><td>41.67</td><td>17.45</td><td>52.72</td><td>100</td><td>239</td><td>Peak</td></tr></table>		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	4804.00	49.75	74.00	-24.25	55.96	35.30	11.07	52.58	100	333	Peak	2	4804.00	44.45	54.00	-9.55	50.66	35.30	11.07	52.58	100	333	Average	3	7206.00	51.85	74.00	-22.15	54.52	36.51	13.00	52.18	100	60	Peak	4	16814.00	61.61	74.00	-12.39	55.21	41.67	17.45	52.72	100	239	Peak	Level (dBuV/m) Date: 2025-01-21 Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>4804.00</td><td>49.45</td><td>74.00</td><td>-24.55</td><td>55.66</td><td>35.30</td><td>11.07</td><td>52.58</td><td>100</td><td>284</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>44.05</td><td>54.00</td><td>-9.95</td><td>50.26</td><td>35.30</td><td>11.07</td><td>52.58</td><td>100</td><td>284</td><td>Average</td></tr><tr><td>3</td><td>7206.00</td><td>54.30</td><td>74.00</td><td>-19.70</td><td>56.97</td><td>36.51</td><td>13.00</td><td>52.18</td><td>383</td><td>83</td><td>Peak</td></tr><tr><td>4</td><td>16814.00</td><td>61.87</td><td>74.00</td><td>-12.13</td><td>55.47</td><td>41.67</td><td>17.45</td><td>52.72</td><td>100</td><td>284</td><td>Peak</td></tr></table>		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	4804.00	49.45	74.00	-24.55	55.66	35.30	11.07	52.58	100	284	Peak	2	4804.00	44.05	54.00	-9.95	50.26	35.30	11.07	52.58	100	284	Average	3	7206.00	54.30	74.00	-19.70	56.97	36.51	13.00	52.18	383	83	Peak	4	16814.00	61.87	74.00	-12.13	55.47	41.67	17.45	52.72	100	284	Peak
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																																																														
1	4804.00	49.75	74.00	-24.25	55.96	35.30	11.07	52.58	100	333	Peak																																																																																																															
2	4804.00	44.45	54.00	-9.55	50.66	35.30	11.07	52.58	100	333	Average																																																																																																															
3	7206.00	51.85	74.00	-22.15	54.52	36.51	13.00	52.18	100	60	Peak																																																																																																															
4	16814.00	61.61	74.00	-12.39	55.21	41.67	17.45	52.72	100	239	Peak																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																																																															
1	4804.00	49.45	74.00	-24.55	55.66	35.30	11.07	52.58	100	284	Peak																																																																																																															
2	4804.00	44.05	54.00	-9.95	50.26	35.30	11.07	52.58	100	284	Average																																																																																																															
3	7206.00	54.30	74.00	-19.70	56.97	36.51	13.00	52.18	383	83	Peak																																																																																																															
4	16814.00	61.87	74.00	-12.13	55.47	41.67	17.45	52.72	100	284	Peak																																																																																																															



Mode	2																																																																															
	Band Edge - L																																																																															
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2025-01-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.94</td><td>46.29</td><td>74.00</td><td>-27.71</td><td>40.57</td><td>30.60</td><td>7.76</td><td>32.64</td><td>375</td><td>4 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.94	46.29	74.00	-27.71	40.57	30.60	7.76	32.64	375	4 PEAK	Level (dBuV/m) Date: 2025-01-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>95.89</td><td>-----</td><td>-----</td><td>89.99</td><td>30.68</td><td>7.84</td><td>32.62</td><td>375</td><td>4 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2440.00	95.89	-----	-----	89.99	30.68	7.84	32.62	375	4 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2389.94	46.29	74.00	-27.71	40.57	30.60	7.76	32.64	375	4 PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2440.00	95.89	-----	-----	89.99	30.68	7.84	32.62	375	4 PEAK																																																																						
Avg	Level (dBuV/m) Date: 2025-01-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2325.26</td><td>36.83</td><td>54.00</td><td>-17.17</td><td>31.32</td><td>30.60</td><td>7.58</td><td>32.67</td><td>375</td><td>4 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2325.26	36.83	54.00	-17.17	31.32	30.60	7.58	32.67	375	4 AVERAGE	Level (dBuV/m) Date: 2025-01-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>95.31</td><td>-----</td><td>-----</td><td>89.41</td><td>30.68</td><td>7.84</td><td>32.62</td><td>375</td><td>4 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2440.00	95.31	-----	-----	89.41	30.68	7.84	32.62	375	4 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2325.26	36.83	54.00	-17.17	31.32	30.60	7.58	32.67	375	4 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	2440.00	95.31	-----	-----	89.41	30.68	7.84	32.62	375	4 AVERAGE																																																																						

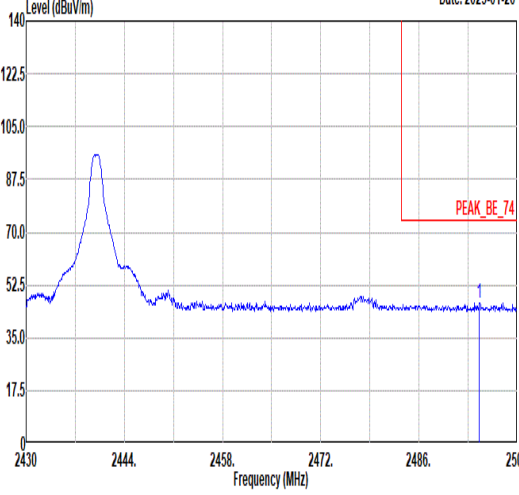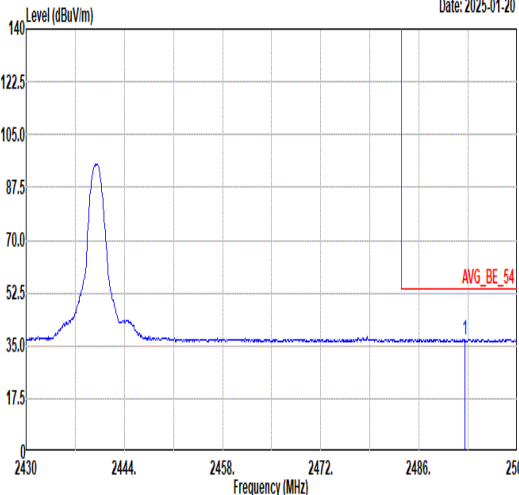

Mode	2																																																	
	Band Edge - R																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																	
Pol.	Horizontal					Fundamental																																												
Peak	Level (dBuV/m) Date: 2025-01-20  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.61</td><td>46.54</td><td>74.00</td><td>-27.46</td><td>40.64</td><td>30.61</td><td>7.89</td><td>32.60</td><td>375</td><td>4</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2494.61	46.54	74.00	-27.46	40.64	30.61	7.89	32.60	375	4	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	2494.61	46.54	74.00	-27.46	40.64	30.61	7.89	32.60	375	4	PEAK																																							
Avg	Level (dBuV/m) Date: 2025-01-20  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.51</td><td>37.19</td><td>54.00</td><td>-16.81</td><td>31.29</td><td>30.61</td><td>7.89</td><td>32.60</td><td>375</td><td>4</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2492.51	37.19	54.00	-16.81	31.29	30.61	7.89	32.60	375	4	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	2492.51	37.19	54.00	-16.81	31.29	30.61	7.89	32.60	375	4	AVERAGE																																							



Mode	2																																																		
	Band Edge - L																																																		
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																		
Pol.	Fundamental																																																		
Peak	Date: 2025-01-20																																																		
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>98.12</td><td>-----</td><td>-----</td><td>92.22</td><td>30.68</td><td>7.84</td><td>32.62</td><td>114</td><td>325</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2440.00	98.12	-----	-----	92.22	30.68	7.84	32.62	114	325	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2440.00	98.12	-----	-----	92.22	30.68	7.84	32.62	114	325	PEAK																																								
Avg	Date: 2025-01-20																																																		
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>97.62</td><td>-----</td><td>-----</td><td>91.72</td><td>30.68</td><td>7.84</td><td>32.62</td><td>114</td><td>325</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2440.00	97.62	-----	-----	91.72	30.68	7.84	32.62	114	325	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2440.00	97.62	-----	-----	91.72	30.68	7.84	32.62	114	325	AVERAGE																																								







Mode	2									
	Band Edge - R									
	2400-2483.5_Bluetooth-LE_CH19_2440MHz									
Pol.	Vertical					Fundamental				
Peak										



Mode	2																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2025-01-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>50.68</td><td>74.00</td><td>-23.32</td><td>56.85</td><td>35.36</td><td>11.10</td><td>52.63</td><td>100</td><td>338</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>45.38</td><td>54.00</td><td>-8.62</td><td>51.55</td><td>35.36</td><td>11.10</td><td>52.63</td><td>100</td><td>338</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>52.67</td><td>74.00</td><td>-21.33</td><td>55.25</td><td>36.56</td><td>13.09</td><td>52.23</td><td>100</td><td>58</td><td>Peak</td></tr><tr><td>4</td><td>7320.00</td><td>47.31</td><td>54.00</td><td>-6.69</td><td>49.89</td><td>36.56</td><td>13.09</td><td>52.23</td><td>100</td><td>58</td><td>Average</td></tr><tr><td>5</td><td>17080.00</td><td>63.13</td><td>74.00</td><td>-10.87</td><td>55.33</td><td>42.96</td><td>17.52</td><td>52.68</td><td>100</td><td>239</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	50.68	74.00	-23.32	56.85	35.36	11.10	52.63	100	338	Peak	2	4880.00	45.38	54.00	-8.62	51.55	35.36	11.10	52.63	100	338	Average	3	7320.00	52.67	74.00	-21.33	55.25	36.56	13.09	52.23	100	58	Peak	4	7320.00	47.31	54.00	-6.69	49.89	36.56	13.09	52.23	100	58	Average	5	17080.00	63.13	74.00	-10.87	55.33	42.96	17.52	52.68	100	239	Peak	Level (dBuV/m) Date: 2025-01-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>49.38</td><td>74.00</td><td>-24.62</td><td>55.55</td><td>35.36</td><td>11.10</td><td>52.63</td><td>103</td><td>276</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>44.28</td><td>54.00</td><td>-9.72</td><td>50.45</td><td>35.36</td><td>11.10</td><td>52.63</td><td>103</td><td>276</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>54.17</td><td>74.00</td><td>-19.83</td><td>56.75</td><td>36.56</td><td>13.09</td><td>52.23</td><td>373</td><td>90</td><td>Peak</td></tr><tr><td>4</td><td>7320.00</td><td>49.37</td><td>54.00</td><td>-4.63</td><td>51.95</td><td>36.56</td><td>13.09</td><td>52.23</td><td>373</td><td>90</td><td>Average</td></tr><tr><td>5</td><td>17080.00</td><td>61.40</td><td>74.00</td><td>-12.60</td><td>53.60</td><td>42.96</td><td>17.52</td><td>52.68</td><td>109</td><td>291</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	49.38	74.00	-24.62	55.55	35.36	11.10	52.63	103	276	Peak	2	4880.00	44.28	54.00	-9.72	50.45	35.36	11.10	52.63	103	276	Average	3	7320.00	54.17	74.00	-19.83	56.75	36.56	13.09	52.23	373	90	Peak	4	7320.00	49.37	54.00	-4.63	51.95	36.56	13.09	52.23	373	90	Average	5	17080.00	61.40	74.00	-12.60	53.60	42.96	17.52	52.68	109	291	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	4880.00	50.68	74.00	-23.32	56.85	35.36	11.10	52.63	100	338	Peak																																																																																																																																																																							
2	4880.00	45.38	54.00	-8.62	51.55	35.36	11.10	52.63	100	338	Average																																																																																																																																																																							
3	7320.00	52.67	74.00	-21.33	55.25	36.56	13.09	52.23	100	58	Peak																																																																																																																																																																							
4	7320.00	47.31	54.00	-6.69	49.89	36.56	13.09	52.23	100	58	Average																																																																																																																																																																							
5	17080.00	63.13	74.00	-10.87	55.33	42.96	17.52	52.68	100	239	Peak																																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	4880.00	49.38	74.00	-24.62	55.55	35.36	11.10	52.63	103	276	Peak																																																																																																																																																																							
2	4880.00	44.28	54.00	-9.72	50.45	35.36	11.10	52.63	103	276	Average																																																																																																																																																																							
3	7320.00	54.17	74.00	-19.83	56.75	36.56	13.09	52.23	373	90	Peak																																																																																																																																																																							
4	7320.00	49.37	54.00	-4.63	51.95	36.56	13.09	52.23	373	90	Average																																																																																																																																																																							
5	17080.00	61.40	74.00	-12.60	53.60	42.96	17.52	52.68	109	291	Peak																																																																																																																																																																							

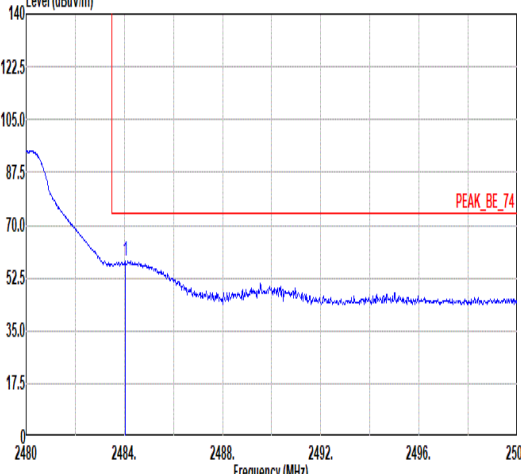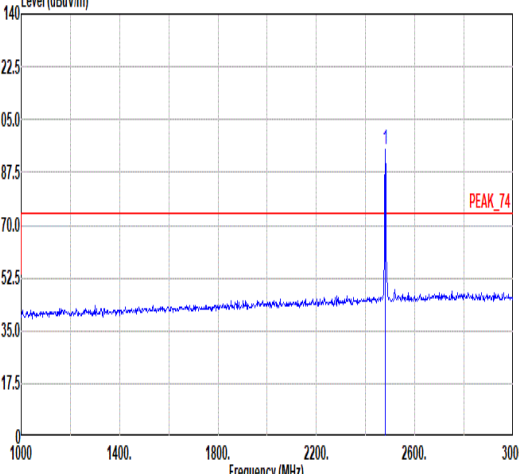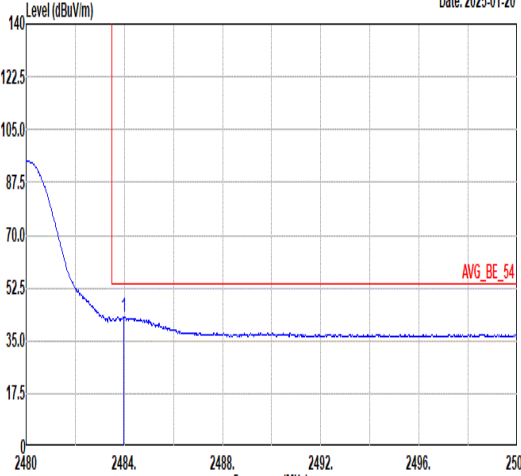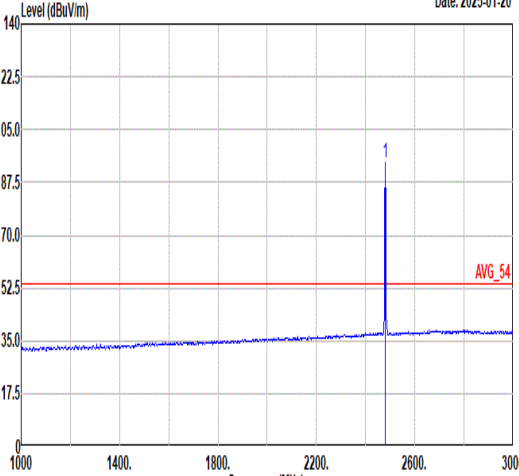

Mode	3																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																									
Pol.	Horizontal										Fundamental																																																																															
Peak	Level (dBuV/m) Date: 2025-01-20  PEAK_BE_74										Level (dBuV/m) Date: 2025-01-20  PEAK_74																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.04</td><td>58.03</td><td>74.00</td><td>-15.97</td><td>52.13</td><td>30.63</td><td>7.88</td><td>32.61</td><td>400</td><td>198</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.04	58.03	74.00	-15.97	52.13	30.63	7.88	32.61	400	198	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.95</td><td>-----</td><td>-----</td><td>89.05</td><td>30.64</td><td>7.87</td><td>32.61</td><td>400</td><td>198</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	94.95	-----	-----	89.05	30.64	7.87	32.61	400	198
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2484.04	58.03	74.00	-15.97	52.13	30.63	7.88	32.61	400	198	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2480.00	94.95	-----	-----	89.05	30.64	7.87	32.61	400	198	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2025-01-20  AVG_BE_54										Level (dBuV/m) Date: 2025-01-20  AVG_54																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.98</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>37.12</td><td>30.63</td><td>7.88</td><td>32.61</td><td>400</td><td>198</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.98	43.02	54.00	-10.98	37.12	30.63	7.88	32.61	400	198	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.15</td><td>-----</td><td>-----</td><td>88.25</td><td>30.64</td><td>7.87</td><td>32.61</td><td>400</td><td>198</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	94.15	-----	-----	88.25	30.64	7.87	32.61	400	198
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2483.98	43.02	54.00	-10.98	37.12	30.63	7.88	32.61	400	198	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2480.00	94.15	-----	-----	88.25	30.64	7.87	32.61	400	198	AVERAGE																																																																															



Mode	3																																																																																												
	Band Edge																																																																																												
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																												
Pol.	Vertical										Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-01-20 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.12</td><td>61.96</td><td>74.00</td><td>-12.04</td><td>56.06</td><td>30.63</td><td>7.88</td><td>32.61</td><td>100</td><td>21</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.12	61.96	74.00	-12.04	56.06	30.63	7.88	32.61	100	21	PEAK	Level (dBuV/m) Date: 2025-01-20 PEAK_74 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.66</td><td>-----</td><td>-----</td><td>91.76</td><td>30.64</td><td>7.87</td><td>32.61</td><td>100</td><td>21</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.66	-----	-----	91.76	30.64	7.87	32.61	100	21	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2484.12	61.96	74.00	-12.04	56.06	30.63	7.88	32.61	100	21	PEAK																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2480.00	97.66	-----	-----	91.76	30.64	7.87	32.61	100	21	PEAK																																																																																		
Avg	Level (dBuV/m) Date: 2025-01-20 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.82</td><td>46.32</td><td>54.00</td><td>-7.68</td><td>40.42</td><td>30.63</td><td>7.88</td><td>32.61</td><td>100</td><td>21</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.82	46.32	54.00	-7.68	40.42	30.63	7.88	32.61	100	21	AVERAGE	Level (dBuV/m) Date: 2025-01-20 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.10</td><td>-----</td><td>-----</td><td>91.20</td><td>30.64</td><td>7.87</td><td>32.61</td><td>100</td><td>21</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.10	-----	-----	91.20	30.64	7.87	32.61	100	21	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2483.82	46.32	54.00	-7.68	40.42	30.63	7.88	32.61	100	21	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2480.00	97.10	-----	-----	91.20	30.64	7.87	32.61	100	21	AVERAGE																																																																																		



Mode	3																																																																																																																																																													
	Harmonic																																																																																																																																																													
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2025-01-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4960.00</td><td>51.78</td><td>74.00</td><td>-22.22</td><td>57.60</td><td>35.72</td><td>11.14</td><td>52.68</td><td>100</td><td>313 Peak</td></tr><tr><td>2 4960.00</td><td>47.58</td><td>54.00</td><td>-6.42</td><td>53.40</td><td>35.72</td><td>11.14</td><td>52.68</td><td>100</td><td>313 Average</td></tr><tr><td>3 7440.00</td><td>51.86</td><td>74.00</td><td>-22.14</td><td>54.57</td><td>36.60</td><td>12.97</td><td>52.28</td><td>100</td><td>31 Peak</td></tr><tr><td>4 7440.00</td><td>46.26</td><td>54.00</td><td>-7.74</td><td>48.97</td><td>36.60</td><td>12.97</td><td>52.28</td><td>100</td><td>31 Average</td></tr><tr><td>5 17360.00</td><td>60.62</td><td>74.00</td><td>-13.38</td><td>54.07</td><td>42.24</td><td>17.60</td><td>53.29</td><td>100</td><td>236 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4960.00	51.78	74.00	-22.22	57.60	35.72	11.14	52.68	100	313 Peak	2 4960.00	47.58	54.00	-6.42	53.40	35.72	11.14	52.68	100	313 Average	3 7440.00	51.86	74.00	-22.14	54.57	36.60	12.97	52.28	100	31 Peak	4 7440.00	46.26	54.00	-7.74	48.97	36.60	12.97	52.28	100	31 Average	5 17360.00	60.62	74.00	-13.38	54.07	42.24	17.60	53.29	100	236 Peak	Level (dBuV/m) Date: 2025-01-21 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4960.00</td><td>52.34</td><td>74.00</td><td>-21.66</td><td>58.16</td><td>35.72</td><td>11.14</td><td>52.68</td><td>394</td><td>260 Peak</td></tr><tr><td>2 4960.00</td><td>47.64</td><td>54.00</td><td>-6.36</td><td>53.46</td><td>35.72</td><td>11.14</td><td>52.68</td><td>394</td><td>260 Average</td></tr><tr><td>3 7440.00</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>56.37</td><td>36.60</td><td>12.97</td><td>52.28</td><td>390</td><td>82 Peak</td></tr><tr><td>4 7440.00</td><td>49.19</td><td>54.00</td><td>-4.81</td><td>51.90</td><td>36.60</td><td>12.97</td><td>52.28</td><td>390</td><td>82 Average</td></tr><tr><td>5 17360.00</td><td>62.19</td><td>74.00</td><td>-11.81</td><td>55.64</td><td>42.24</td><td>17.60</td><td>53.29</td><td>107</td><td>284 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4960.00	52.34	74.00	-21.66	58.16	35.72	11.14	52.68	394	260 Peak	2 4960.00	47.64	54.00	-6.36	53.46	35.72	11.14	52.68	394	260 Average	3 7440.00	53.66	74.00	-20.34	56.37	36.60	12.97	52.28	390	82 Peak	4 7440.00	49.19	54.00	-4.81	51.90	36.60	12.97	52.28	390	82 Average	5 17360.00	62.19	74.00	-11.81	55.64	42.24	17.60	53.29	107	284 Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																					
1 4960.00	51.78	74.00	-22.22	57.60	35.72	11.14	52.68	100	313 Peak																																																																																																																																																					
2 4960.00	47.58	54.00	-6.42	53.40	35.72	11.14	52.68	100	313 Average																																																																																																																																																					
3 7440.00	51.86	74.00	-22.14	54.57	36.60	12.97	52.28	100	31 Peak																																																																																																																																																					
4 7440.00	46.26	54.00	-7.74	48.97	36.60	12.97	52.28	100	31 Average																																																																																																																																																					
5 17360.00	60.62	74.00	-13.38	54.07	42.24	17.60	53.29	100	236 Peak																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																					
1 4960.00	52.34	74.00	-21.66	58.16	35.72	11.14	52.68	394	260 Peak																																																																																																																																																					
2 4960.00	47.64	54.00	-6.36	53.46	35.72	11.14	52.68	394	260 Average																																																																																																																																																					
3 7440.00	53.66	74.00	-20.34	56.37	36.60	12.97	52.28	390	82 Peak																																																																																																																																																					
4 7440.00	49.19	54.00	-4.81	51.90	36.60	12.97	52.28	390	82 Average																																																																																																																																																					
5 17360.00	62.19	74.00	-11.81	55.64	42.24	17.60	53.29	107	284 Peak																																																																																																																																																					



Mode	4																																																																																																																																																																																																																	
	LF																																																																																																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																
Peak	Level (dBuV/m) Date: 2025-01-18 FCC CLASS-B -60dB Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/n</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>42.61</td><td>18.93</td><td>40.00</td><td>-21.07</td><td>31.35</td><td>17.58</td><td>1.20</td><td>31.20</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>176.47</td><td>19.23</td><td>43.50</td><td>-24.27</td><td>32.33</td><td>15.48</td><td>2.41</td><td>30.99</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>337.49</td><td>21.26</td><td>46.00</td><td>-24.74</td><td>28.55</td><td>20.23</td><td>3.31</td><td>30.83</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>432.55</td><td>23.43</td><td>46.00</td><td>-22.57</td><td>27.77</td><td>22.62</td><td>3.74</td><td>30.70</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>652.74</td><td>28.26</td><td>46.00</td><td>-17.74</td><td>29.35</td><td>25.20</td><td>4.60</td><td>30.89</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>805.03</td><td>31.22</td><td>46.00</td><td>-14.78</td><td>31.08</td><td>26.14</td><td>5.09</td><td>31.09</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/n	dB	dB	cm	deg		1	42.61	18.93	40.00	-21.07	31.35	17.58	1.20	31.20	---	---	---	Peak	2	176.47	19.23	43.50	-24.27	32.33	15.48	2.41	30.99	---	---	---	Peak	3	337.49	21.26	46.00	-24.74	28.55	20.23	3.31	30.83	---	---	---	Peak	4	432.55	23.43	46.00	-22.57	27.77	22.62	3.74	30.70	---	---	---	Peak	5	652.74	28.26	46.00	-17.74	29.35	25.20	4.60	30.89	---	---	---	Peak	6	805.03	31.22	46.00	-14.78	31.08	26.14	5.09	31.09	---	---	---	Peak	Level (dBuV/m) Date: 2025-01-18 FCC CLASS-B -60dB Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/n</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>45.52</td><td>18.54</td><td>40.00</td><td>-21.46</td><td>32.37</td><td>16.13</td><td>1.24</td><td>31.20</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>177.44</td><td>21.42</td><td>43.50</td><td>-22.08</td><td>34.55</td><td>15.44</td><td>2.42</td><td>30.99</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>383.08</td><td>21.50</td><td>46.00</td><td>-24.50</td><td>27.28</td><td>21.43</td><td>3.52</td><td>30.73</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>476.20</td><td>24.95</td><td>46.00</td><td>-21.05</td><td>28.36</td><td>23.36</td><td>3.93</td><td>30.70</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>640.13</td><td>27.59</td><td>46.00</td><td>-18.41</td><td>28.81</td><td>25.14</td><td>4.56</td><td>30.92</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>827.34</td><td>31.19</td><td>46.00</td><td>-14.81</td><td>30.78</td><td>26.32</td><td>5.16</td><td>31.07</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/n	dB	dB	cm	deg		1	45.52	18.54	40.00	-21.46	32.37	16.13	1.24	31.20	---	---	---	Peak	2	177.44	21.42	43.50	-22.08	34.55	15.44	2.42	30.99	---	---	---	Peak	3	383.08	21.50	46.00	-24.50	27.28	21.43	3.52	30.73	---	---	---	Peak	4	476.20	24.95	46.00	-21.05	28.36	23.36	3.93	30.70	---	---	---	Peak	5	640.13	27.59	46.00	-18.41	28.81	25.14	4.56	30.92	---	---	---	Peak	6	827.34	31.19	46.00	-14.81	30.78	26.32	5.16	31.07	---	---	---	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/n	dB	dB	cm	deg																																																																																																																																																																																																							
1	42.61	18.93	40.00	-21.07	31.35	17.58	1.20	31.20	---	---	---	Peak																																																																																																																																																																																																						
2	176.47	19.23	43.50	-24.27	32.33	15.48	2.41	30.99	---	---	---	Peak																																																																																																																																																																																																						
3	337.49	21.26	46.00	-24.74	28.55	20.23	3.31	30.83	---	---	---	Peak																																																																																																																																																																																																						
4	432.55	23.43	46.00	-22.57	27.77	22.62	3.74	30.70	---	---	---	Peak																																																																																																																																																																																																						
5	652.74	28.26	46.00	-17.74	29.35	25.20	4.60	30.89	---	---	---	Peak																																																																																																																																																																																																						
6	805.03	31.22	46.00	-14.78	31.08	26.14	5.09	31.09	---	---	---	Peak																																																																																																																																																																																																						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/n	dB	dB	cm	deg																																																																																																																																																																																																							
1	45.52	18.54	40.00	-21.46	32.37	16.13	1.24	31.20	---	---	---	Peak																																																																																																																																																																																																						
2	177.44	21.42	43.50	-22.08	34.55	15.44	2.42	30.99	---	---	---	Peak																																																																																																																																																																																																						
3	383.08	21.50	46.00	-24.50	27.28	21.43	3.52	30.73	---	---	---	Peak																																																																																																																																																																																																						
4	476.20	24.95	46.00	-21.05	28.36	23.36	3.93	30.70	---	---	---	Peak																																																																																																																																																																																																						
5	640.13	27.59	46.00	-18.41	28.81	25.14	4.56	30.92	---	---	---	Peak																																																																																																																																																																																																						
6	827.34	31.19	46.00	-14.81	30.78	26.32	5.16	31.07	---	---	---	Peak																																																																																																																																																																																																						



Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	14.69	0.210	4.762	10kHz

Bluetooth LE 1Mbps

