

JT166P13/T13/ST13 CIRCUIT DIAGRAM


CONTENTS





SCHEMATIC	SHEET
CONTENTS	1
POWER&VGA	2
RGBADC	3
uC&CON	4
ZiproTC_t0946	5
OUTPUT	6
Panel_Power	7
Audio	8
AC-DC Power	9

- (1) SMD capacitor - temperture is 85°C & voltage is 50V, if not indicated.
 (2) SMD resistor - power rating is 1/10W , if not indicated.
 (3) AL-EL capacitor - temperture is 105°C , if not indicated.









MARK	DATE	CONTENT OF MODIFY	SIGN

DRAWN	CHECK	APPROVRL	ISSUE
JEAN CO., LTD.			
Title JT166P13-300			
Size	Document Number		Rev
Contents			
Date: Monday, March 25, 2002		Sheet 1	of 9


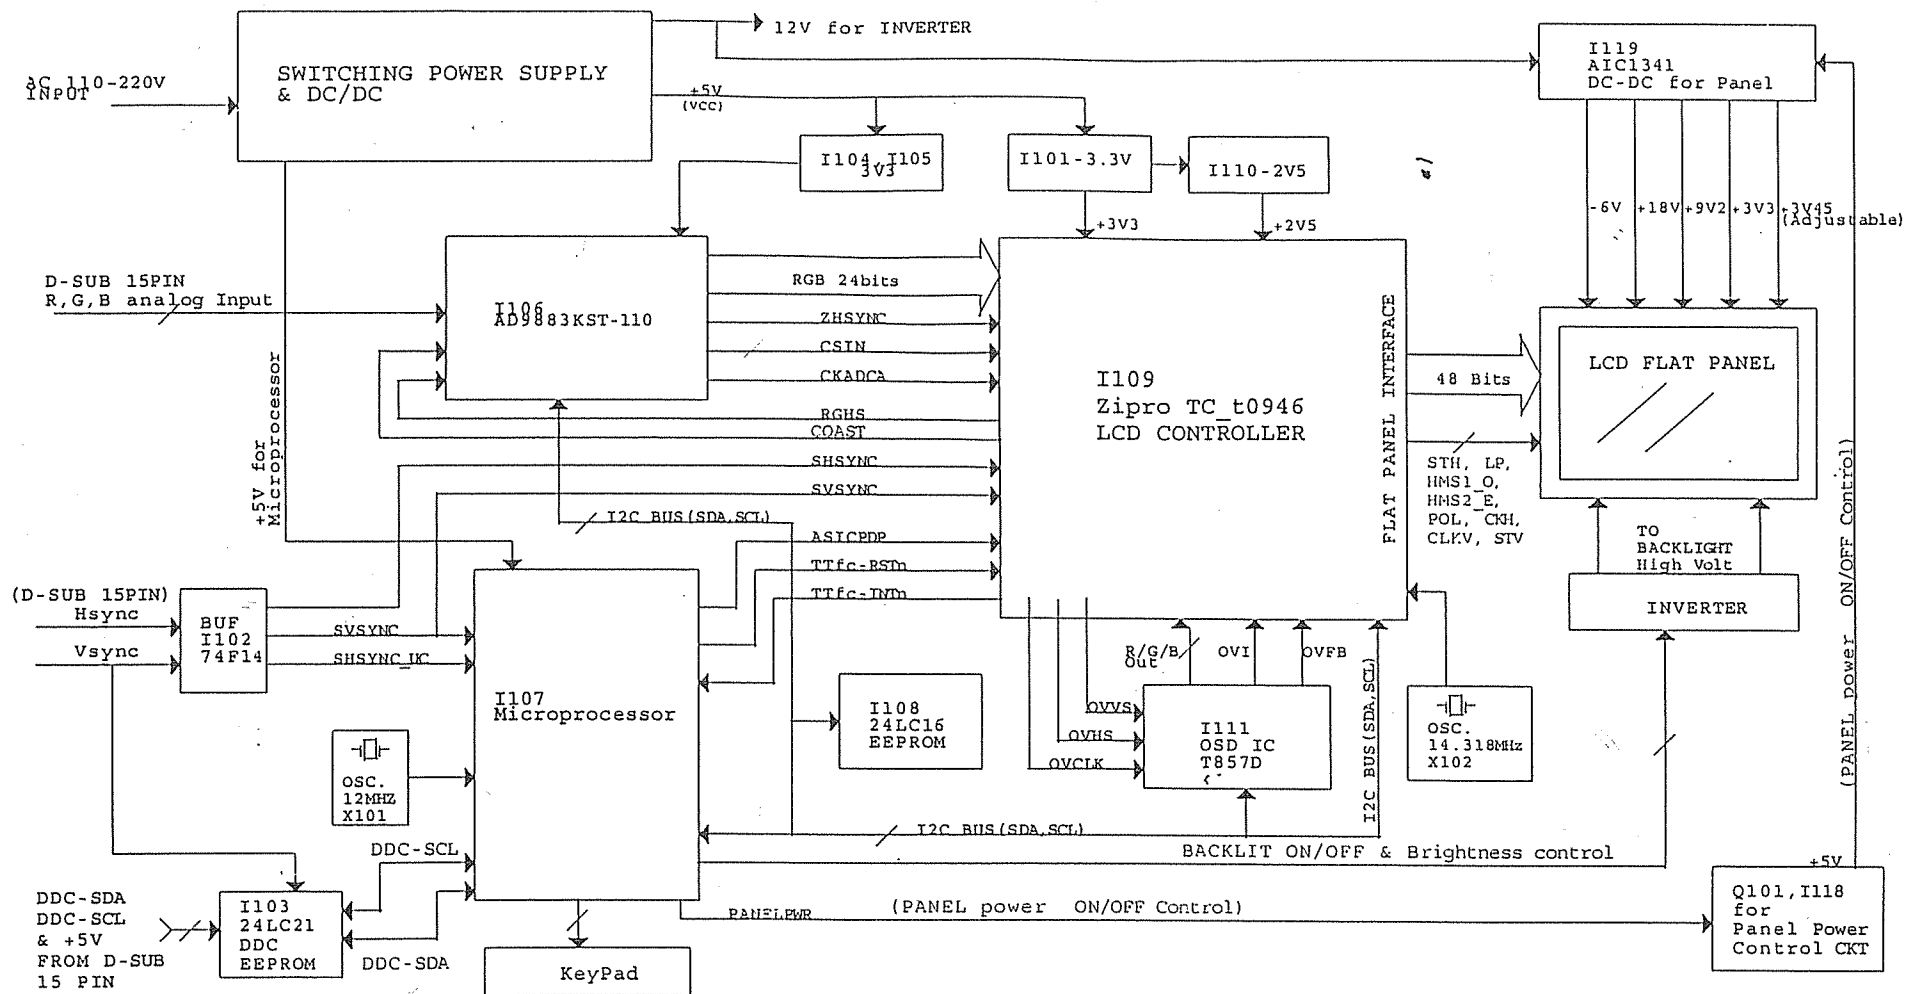


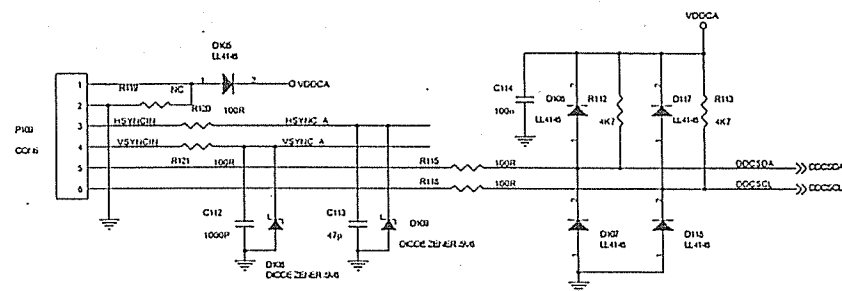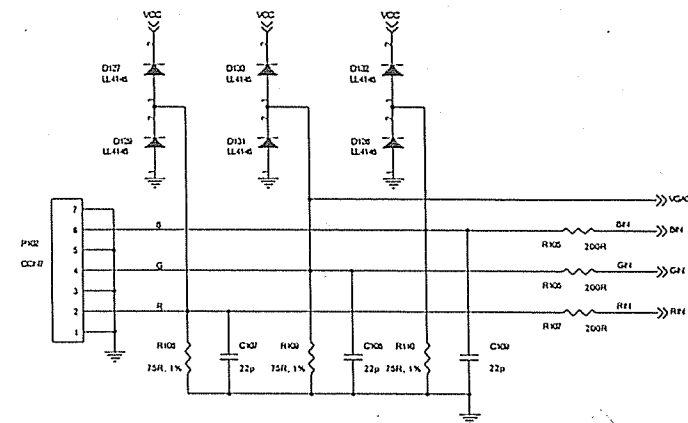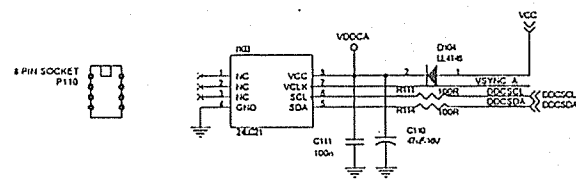

KEY MATRIX

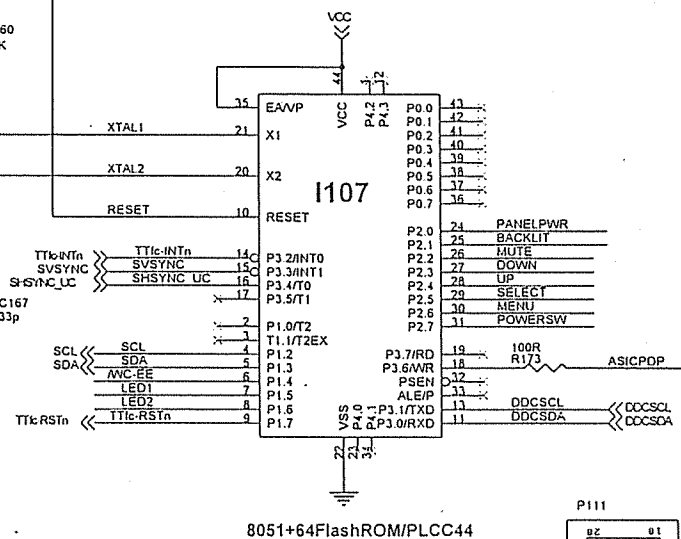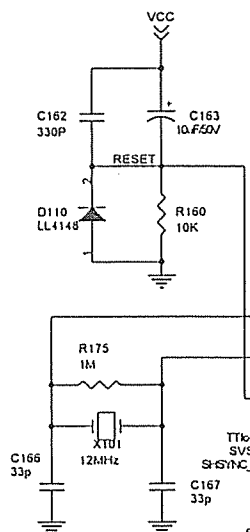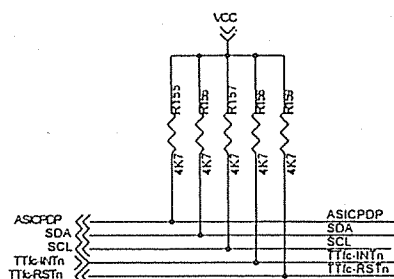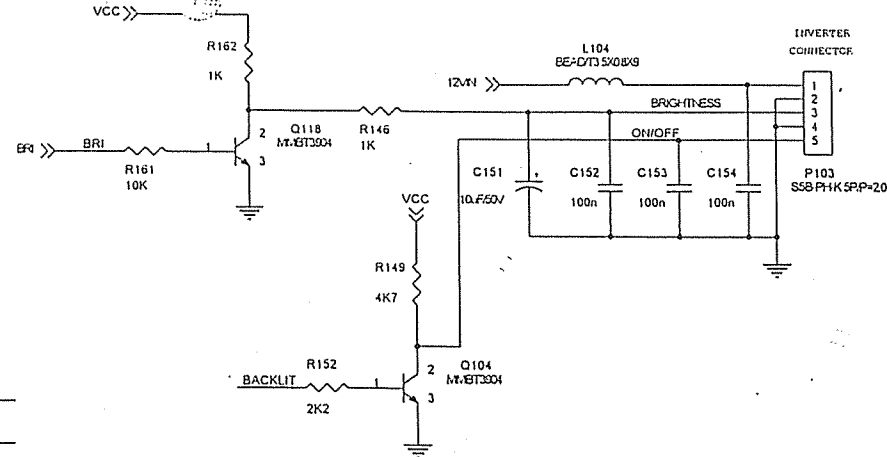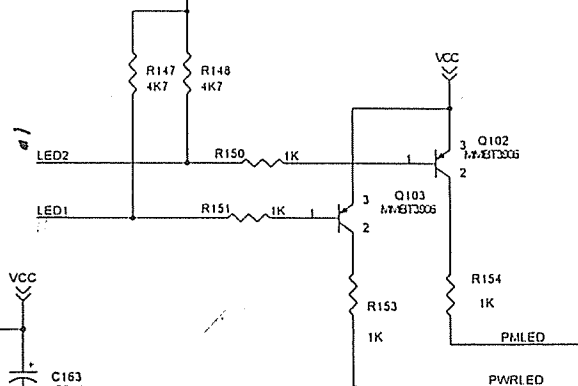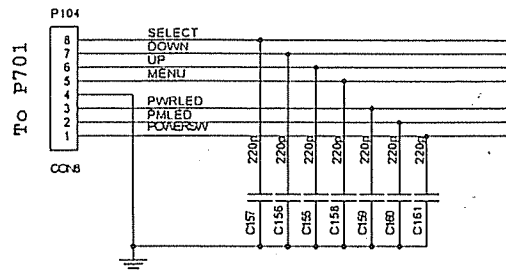



8051+64FlashROM/PLCC44

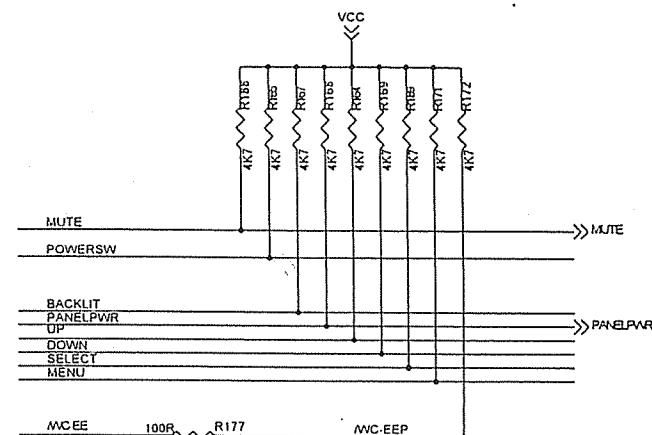


- (1) SMD capacitor - temperture is 85°C & voltage is 50V, if not indicated.
- (2) SMD resistor - power rating is 1/10W , if not indicated.
- (3) AL-EL capacitor - temperture is 105°C , if not indicated.

JEAN	
Title	JT166P13-300
Size	Document Number
CPU & CONTROL	
Date:	Monday, March 25, 2002
Sheet	1 of 9

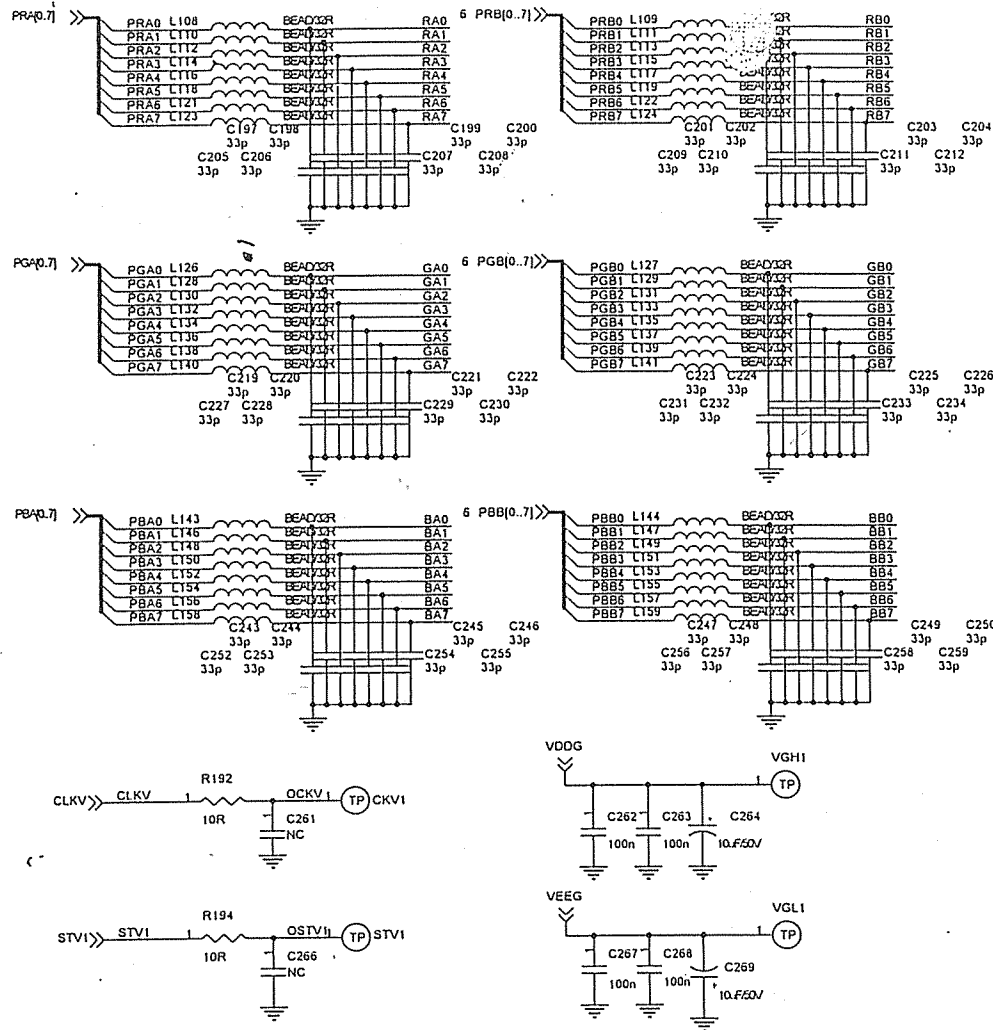

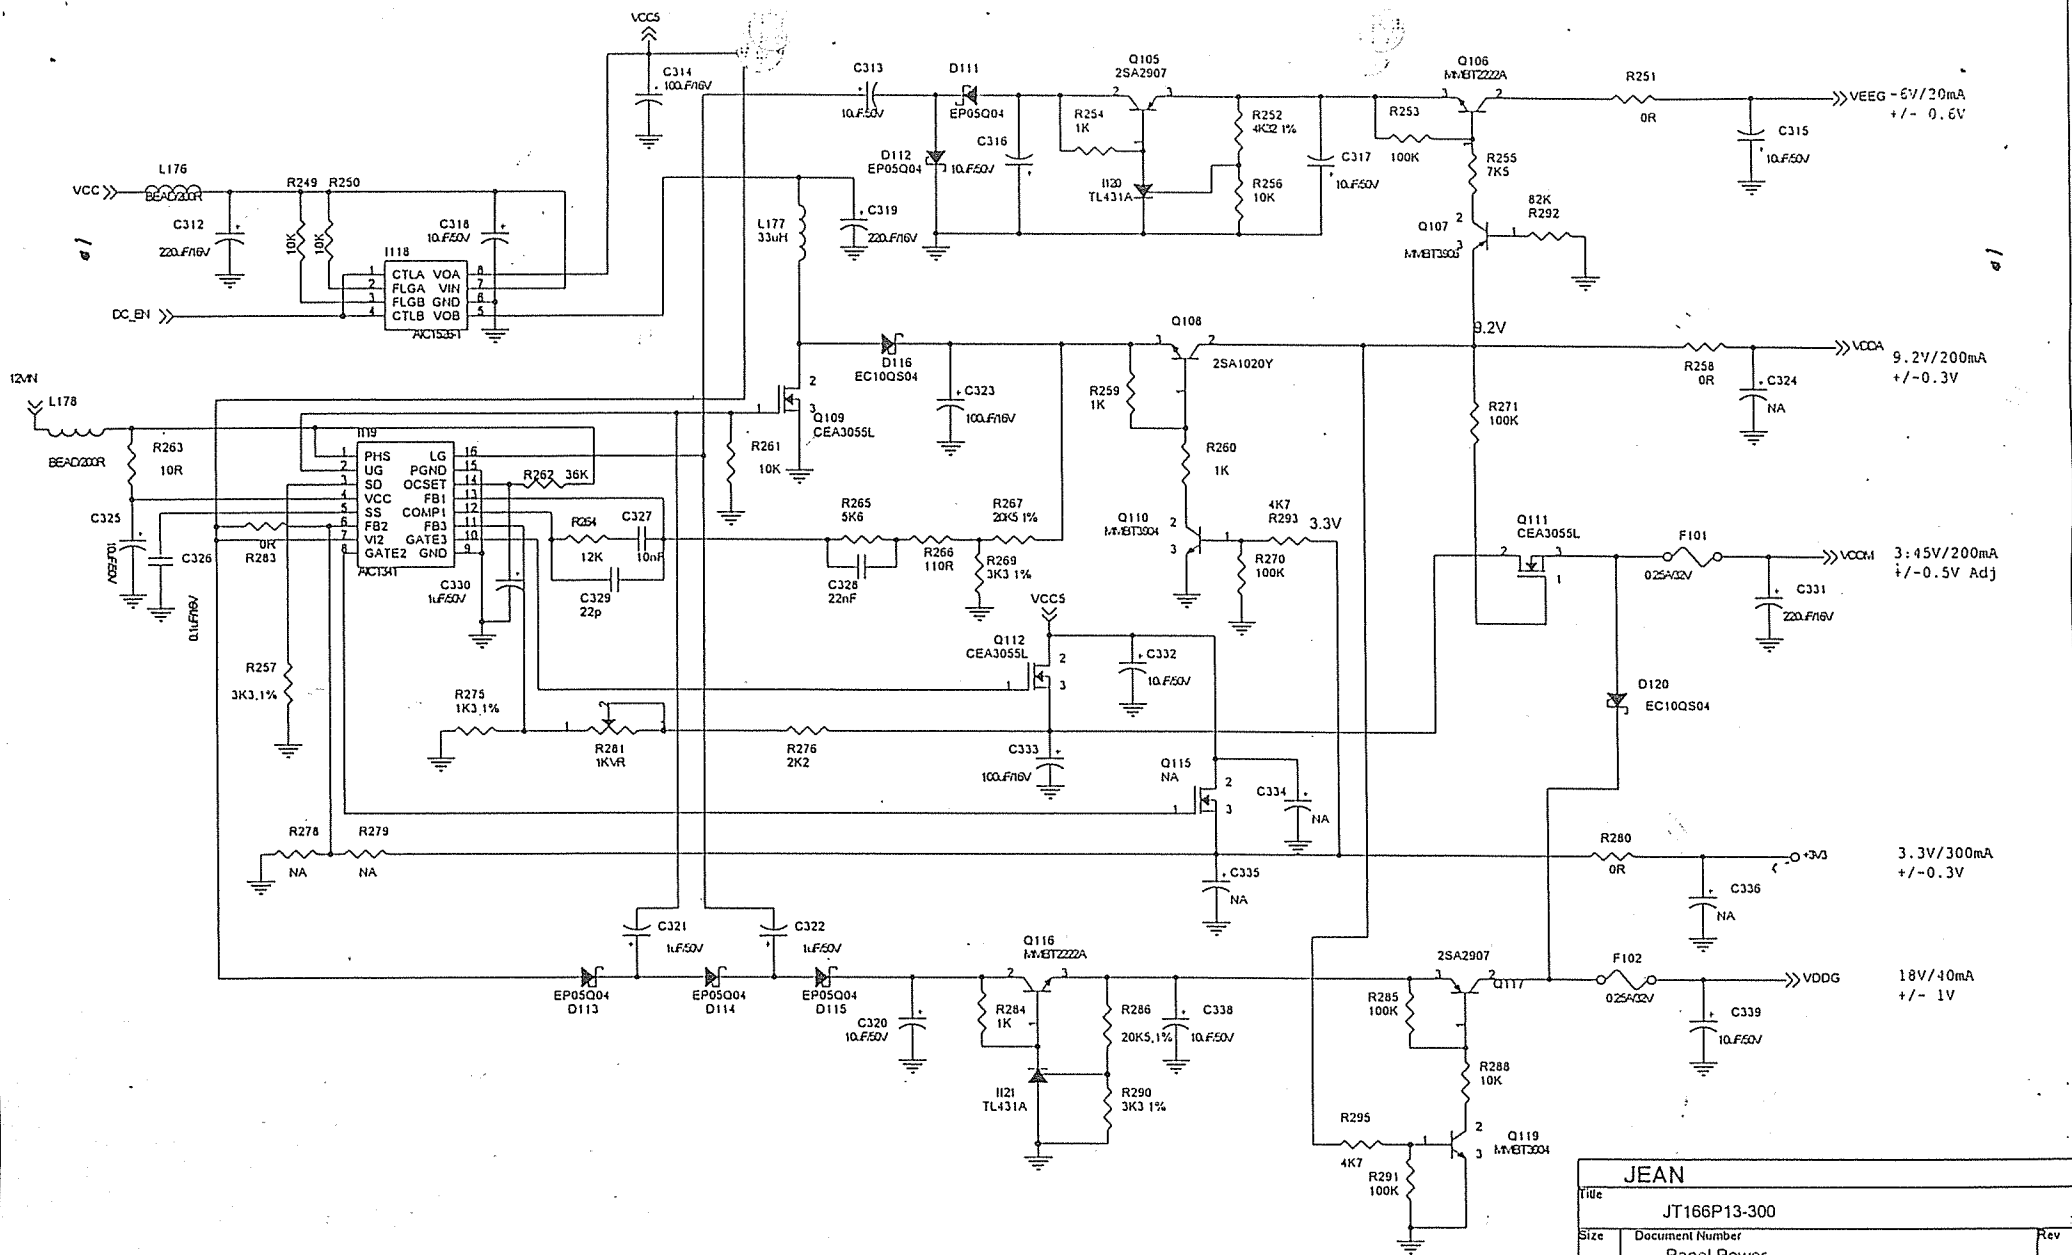

JEAN			
Title JT166P13-300			
Size	Document Number		Rev
	Panel Power		
Date:	Monday, March 25, 2002	Sheet	7 of 9

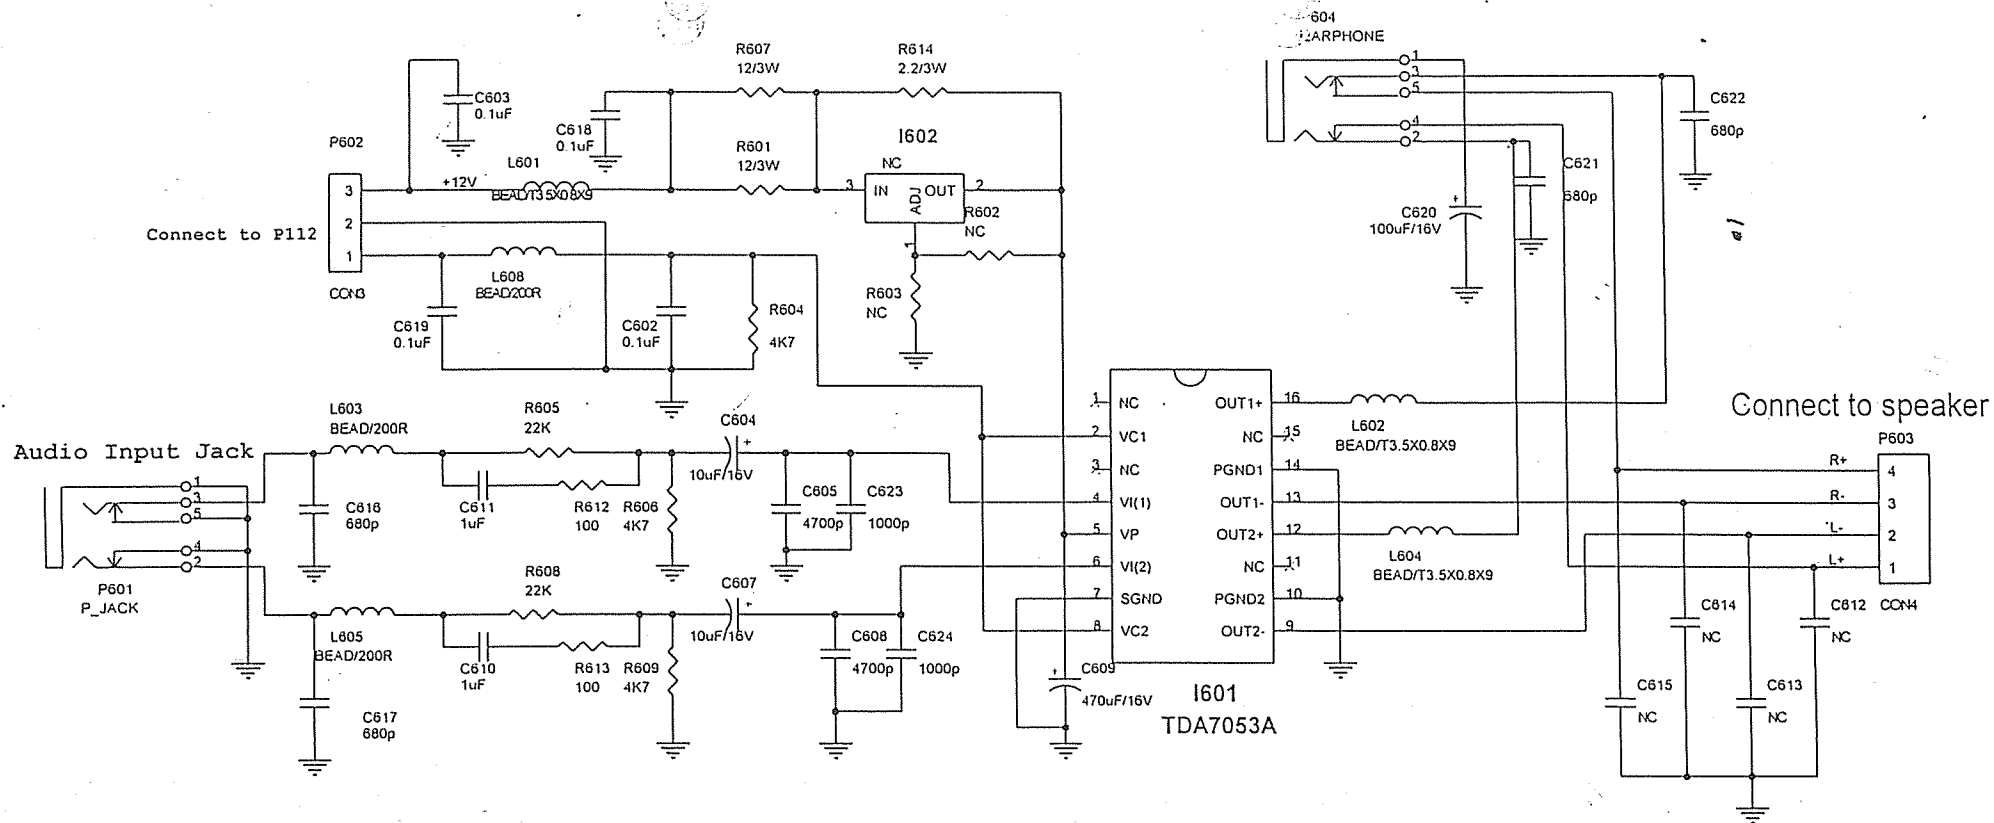

JEAN			
Title			
JT166P13-300			
Size			
Document Number			
Audio			
Date: Monday, March 25, 2002			
Sheet 8 of 9			
Rev			

