

TEST REPORT

ACCORDING TO: FCC 47 CFR PART 15 subpart C, section 15.249 and subpart B

FOR:

SCR Engineers Ltd.
Activity based tag
Model: HR-TAG-LDn
FCC ID:AMUT03

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Changes made in EUT	5
6.4	EUT test positions	6
6.5	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements	8
7.1	Field strength of emissions	8
7.2	Band edge emission	35
7.3	Antenna requirements	40
7.4	Occupied bandwidth test	41
8	Emission tests according to 47CFR part 15 subpart B requirements	46
8.1	Radiated emission measurements	46
9	APPENDIX A Test equipment and ancillaries used for tests	52
10	APPENDIX B Measurement uncertainties	53
11	APPENDIX C Test laboratory description	54
12	APPENDIX D Specification references	54
13	APPENDIX E Test equipment correction factors	55
14	APPENDIX F Abbreviations and acronyms	64

1 Applicant information

Client name: SCR Engineers Ltd.
Address: 18 Hamelacha street, P.O.B. 13564, Netanya 42138, Israel
Telephone: +972 73 240 6053
Fax: +972 9865 0703
E-mail: zeevk@scrdairy.com
Contact name: Mr. Zeev Kapelnik

2 Equipment under test attributes

Product name: Activity based tag
Product type: Transceiver
Model(s): HR-TAG-LDn
Serial number: PO055798
Hardware version: 04.04
Software release: 001.002.021.026
Receipt date 16-Apr-15

3 Manufacturer information

Manufacturer name: SCR Engineers Ltd.
Address: 18 Hamelacha street, P.O.B. 13564, Netanya 42138, Israel
Telephone: +972 73 240 6053
Fax: +972 9865 0703
E-Mail: zeevk@scrdairy.com
Contact name: Mr. Zeev Kapelnik

4 Test details

Project ID: 26956
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 29-Apr-15
Test completed: 08-Jun-15
Test specification(s): FCC 47 CFR Part 15, subpart C, §15.249; subpart B §15.109

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.249(a)(d), Field strength of emissions	Pass
Section 15.249(d), Band edge emissions	Pass
Section 15.207(a), Conducted emission	Not required
Section 15.203, Antenna requirement	Pass
Section 15.215(c), Occupied bandwidth	Pass
Unintentional emissions	
Section 15.107, Conducted emission at AC power port	Not required
Section 15.109, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. V. Einem, test engineer	June 8, 2015	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	July 13, 2015	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	November 5, 2015	

6 EUT description

6.1 General information


The EUT, HR-TAG-LDn, is an activity based tag, including the RF transceiver operating in 2.4 GHz band for outdoor installation. The tag is mounted on a collar on the animal neck, used for the following:

- 1) an identification of animal using the 2.4 GHz RF unit;
- 2) to measure various animal parameters, to process and transmit them via RF.

The tag initiates transmission of few messages each hour by itself or upon request from IDU or BU units.

The EUT is equipped with an integral printed on PCB antenna and is powered by 3.6 V internal battery.

6.2 Test configuration

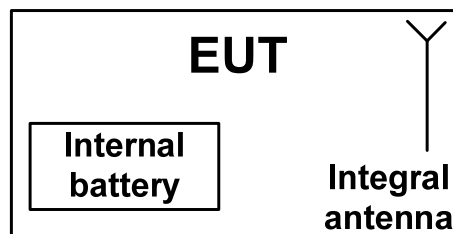

6.3 Changes made in EUT

No changes were performed in the EUT.

6.4 EUT test positions

Photograph 6.4.1 EUT in X-axis orthogonal position



Photograph 6.4.2 EUT in Y-axis orthogonal position



Photograph 6.4.3 EUT in Z-axis orthogonal position





6.5 Transmitter characteristics

Type of equipment						
V	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Assigned frequency range		2400 – 2483.5 MHz				
Operating frequency range		2405 – 2480 MHz				
RF channel spacing		5 MHz				
Maximum field strength of carrier at 3 m distance		104.5 dBµV/m (peak), 74 dBµV/m (average)				
Is transmitter output power variable?		V	No			
			Yes	continuous variable		
				stepped variable with stepsize		
				dB		
				minimum RF power		
			dBm			
			maximum RF power			
			dBm			
Antenna connection						
unique coupling		standard connector		V	Integral	with temporary RF connector
				V		without temporary RF connector
Antenna/s technical characteristics						
Type		Manufacturer		Model number		Gain
Integral		SCR Engineers Ltd.		Printed		0 dBi
Transmitter aggregate data rate/s				250 kbps		
Type of modulation				QPSK		
Modulating test signal (baseband)				PRBS		
Transmitter power source						
V	Battery	Nominal rated voltage	3.6 V	Battery type		
	DC	Nominal rated voltage				
	AC mains	Nominal rated voltage		Frequency	Hz	

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.1.1, Table 7.1.2 and Table 7.1.3.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)		
	Peak	Average	Quasi-Peak
2400 – 2483.5	114.0	94.0	NA

Table 7.1.2 Harmonics limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
2400 – 2483.5	74.0	54.0

Table 7.1.3 Radiated spurious emissions limits (other than harmonics)

Frequency, MHz	Field strength at 3 m, dB(μV/m)*			
	Peak	Quasi Peak	Average	Attenuation below carrier
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	50 dBc (whichever is the less stringent)
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
Above 1000	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency but not exceeding 40 GHz for intentional radiators operated below 10 GHz and up to the fifth harmonic of the highest fundamental frequency but not exceeding 100 GHz for intentional radiators operated above 10 GHz.

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

7.1.3 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.1.3.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.3.2 The measurements were performed in three EUT orthogonal positions.

7.1.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.1.3.4 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.

7.1.4 Test procedure for spurious emission field strength measurements above 30 MHz


7.1.4.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.4.2 The measurements were performed in three EUT orthogonal positions.

7.1.4.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.


7.1.4.4 The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz

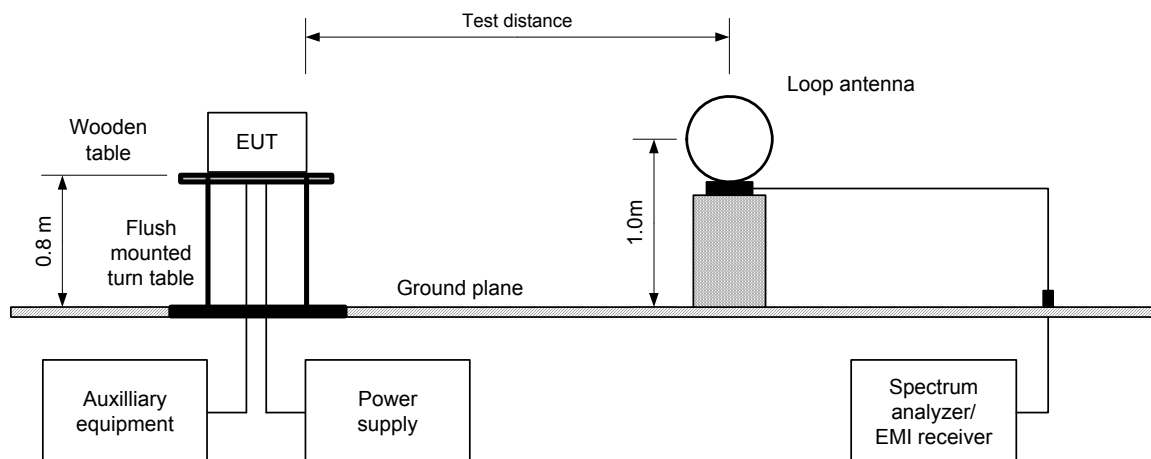

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz

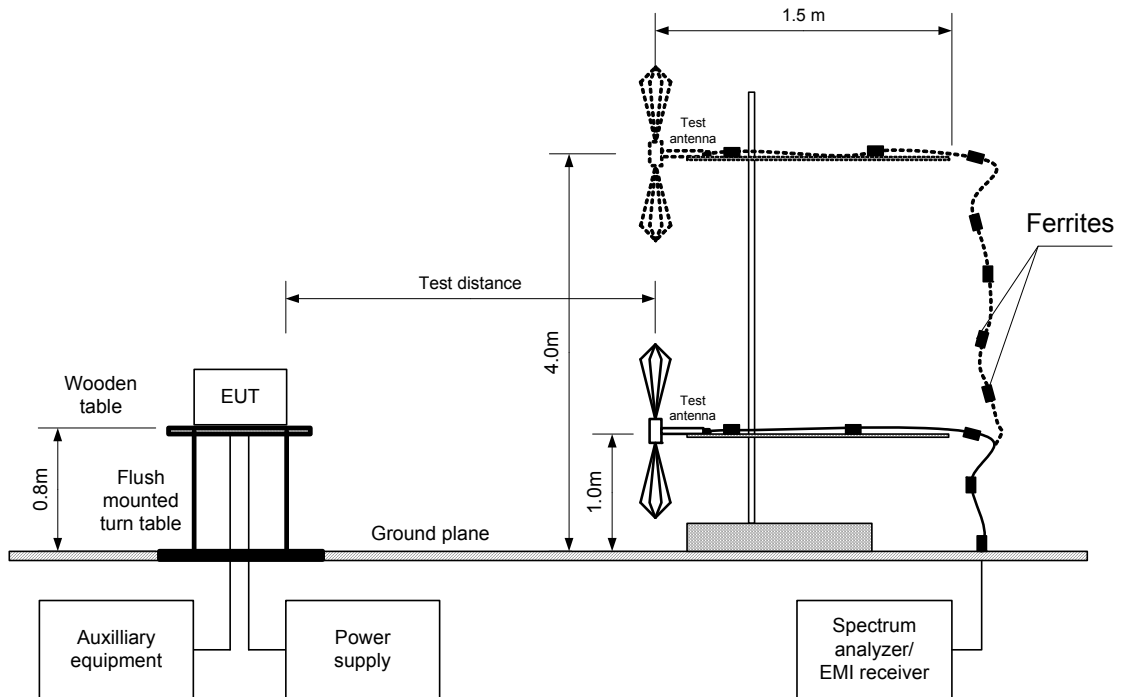

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Verdict: PASS	
Date(s):			
08-Jun-15			
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Table 7.1.4 Field strength of fundamental emission and spurious emissions

TEST DISTANCE:	3 m
EUT POSITION:	3 orthogonal (X/Y/Z-axes)
MODULATION:	QPSK
INVESTIGATED FREQUENCY RANGE:	0.009 – 25000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

Fundamental emission

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission***											
2405.50	V	1.3	330	104.48	114	-9.52	-30.5	73.98	94	-20.02	Pass
2444.60	V	1.8	151	104.25	114	-9.75	-30.5	73.75	94	-20.25	
2480.30	V	1.9	258	103.58	114	-10.42	-30.5	73.08	94	-20.92	
Spurious emissions											
4810.936	H	2.1	180	55.260	74.0	-18.74	-30.5	24.76	54.0	-29.24	Pass
4890.796	H	1.9	190	51.778	74.0	-22.22	-30.5	21.28	54.0	-32.72	
4981.086	H	2.1	180	52.314	74.0	-21.69	-30.5	21.81	54.0	-32.19	
9618.143	H	2.2	10	56.26	74.0	-17.74	-30.5	25.76	54.0	-28.24	
9777.823	H	1.9	20	56.812	74.0	-17.19	-30.5	26.31	54.0	-27.69	
9918.183	H	2.0	10	57.180	74.0	-16.82	-30.5	26.68	54.0	-27.32	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB = Measured (calculated) value, dB(μV/m) - Limit, dB(μV/m).

*** Max value was obtained in Y-axis orthogonal position.

Table 7.1.5 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
0.9975	49.12	NA	NA	NA	-30.5

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 3901	HL 4353	HL 4575	HL 4722	HL 4933
HL 4956							

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.1 Radiated emission measurements at the low fundamental frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:


Semi anechoic chamber
3 m
Vertical
RBW = 3MHz, VBW = 10 kHz
X-axis

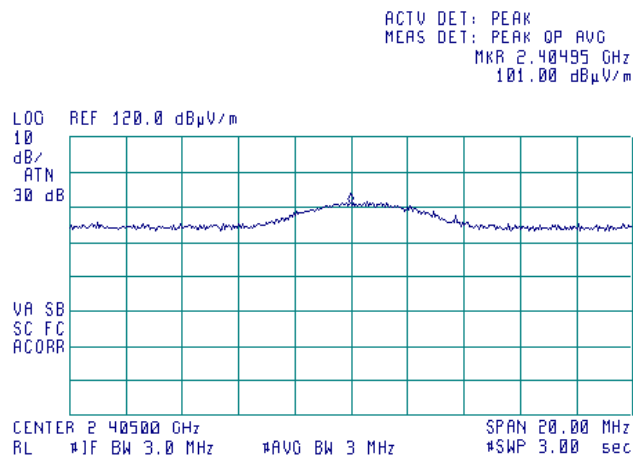

EUT POSITION:

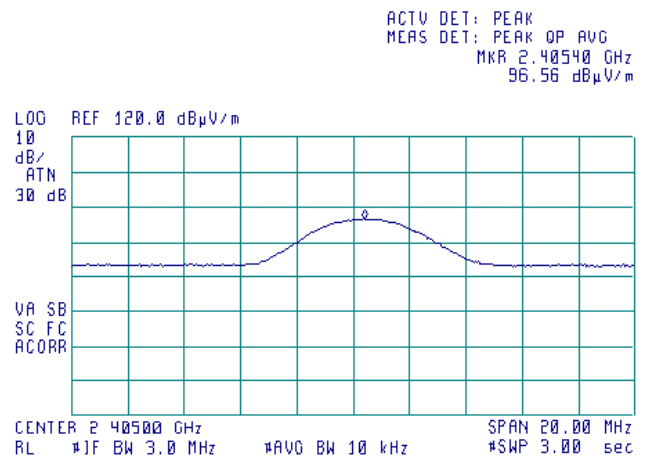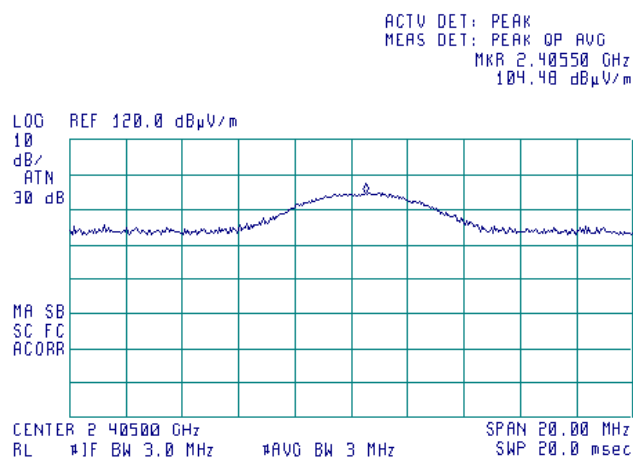

Y-axis

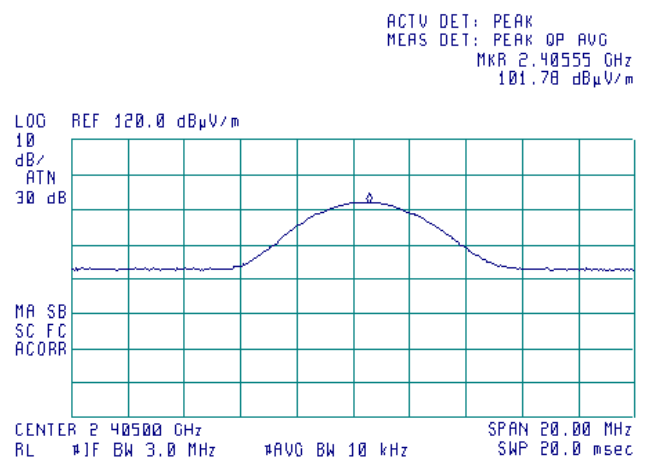





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Plot 7.1.1 Radiated emission measurements at the low fundamental frequency (continued)

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:

Semi anechoic chamber
3 m
Vertical
RBW = 3MHz, VBW = 10 kHz
Z-axis

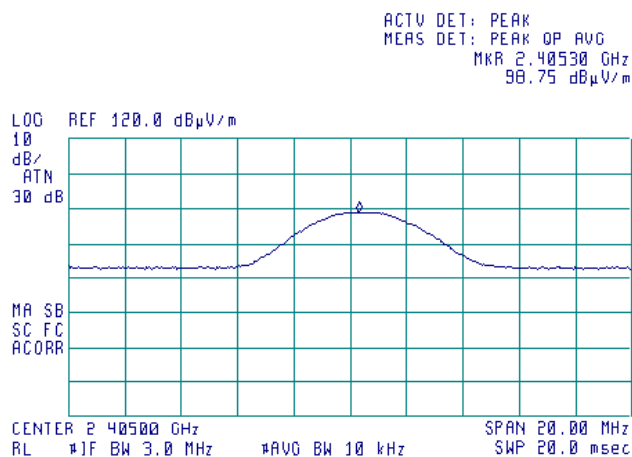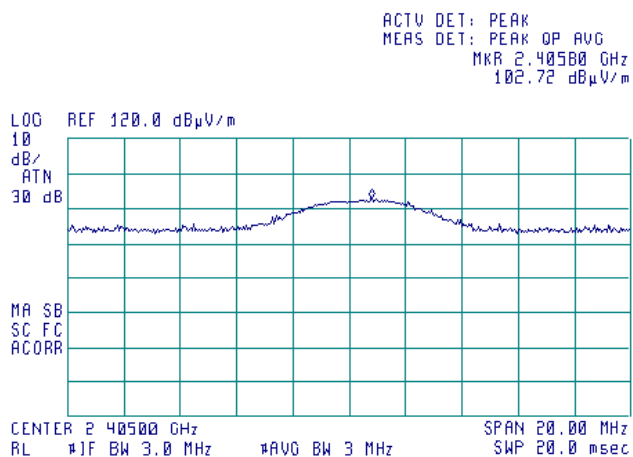




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.2 Radiated emission measurements at the low fundamental frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:


Semi anechoic chamber
3 m
Horizontal
RBW = 3MHz, VBW = 10 kHz
X-axis

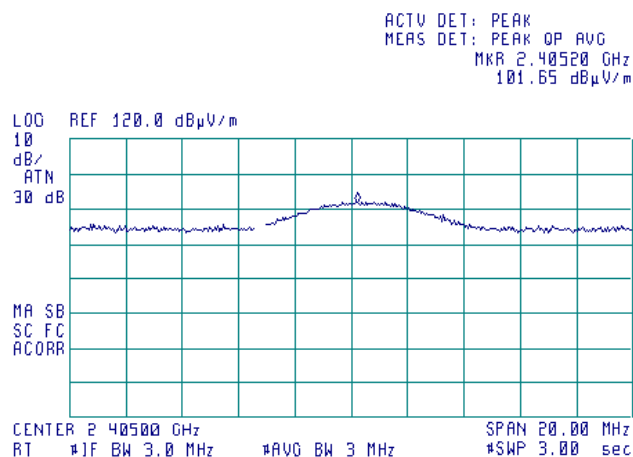

EUT POSITION:

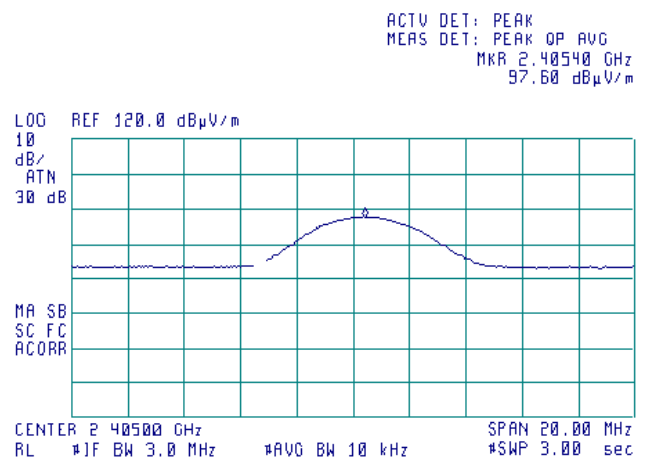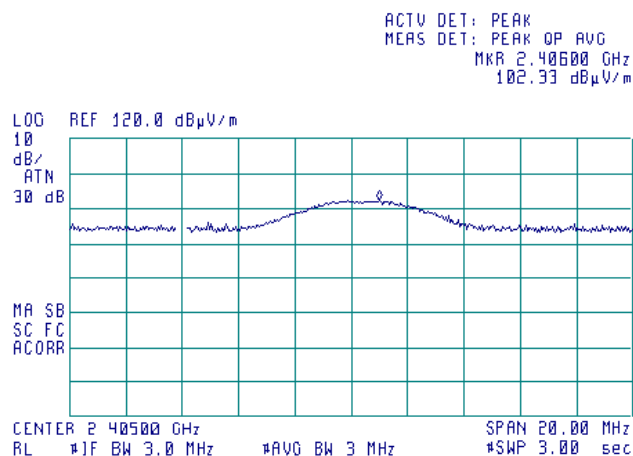

Y-axis

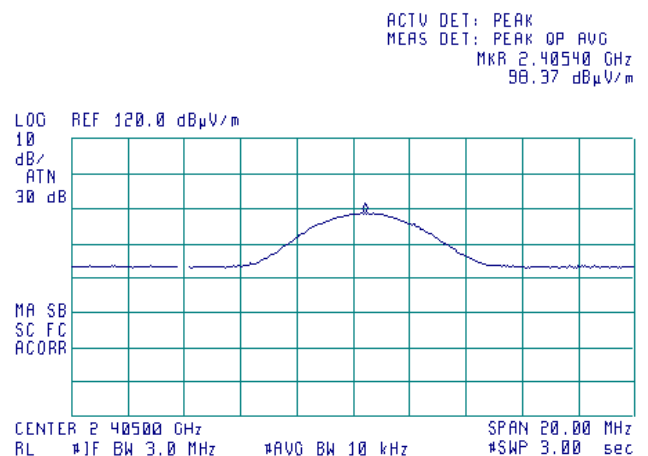





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Plot 7.1.2 Radiated emission measurements at the low fundamental frequency (continued)

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:

Semi anechoic chamber
3 m
Horizontal
RBW = 3MHz, VBW = 10 kHz
Z-axis

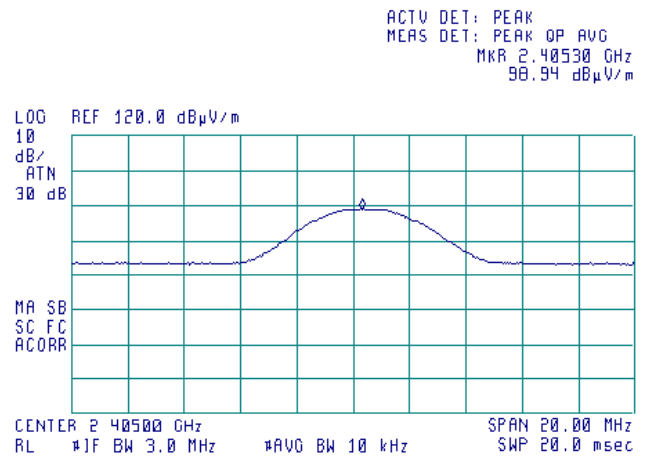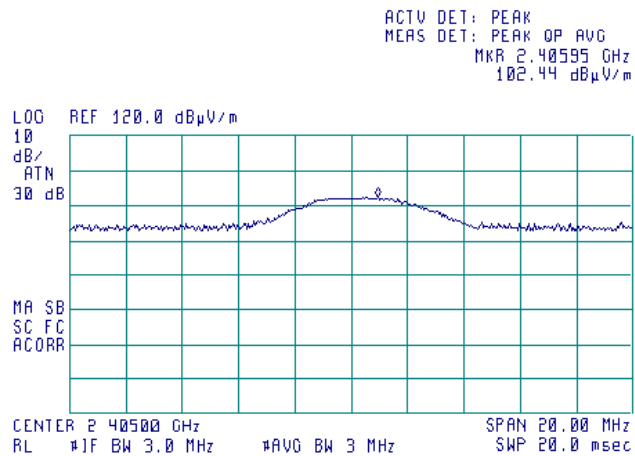




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.3 Radiated emission measurements at the mid fundamental frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:


Semi anechoic chamber
3 m
Vertical
RBW = 3MHz, VBW = 10 kHz
X-axis

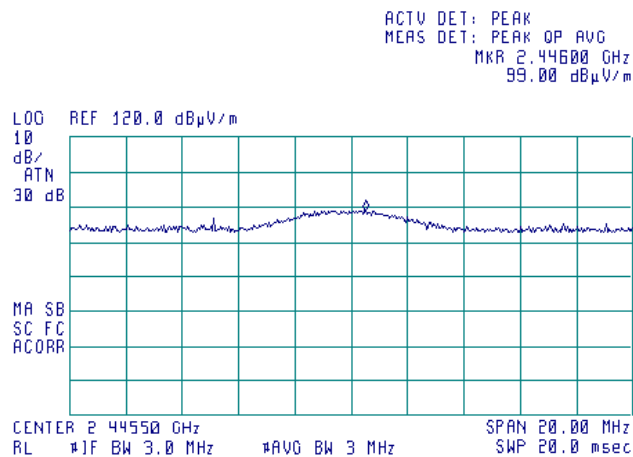

EUT POSITION:

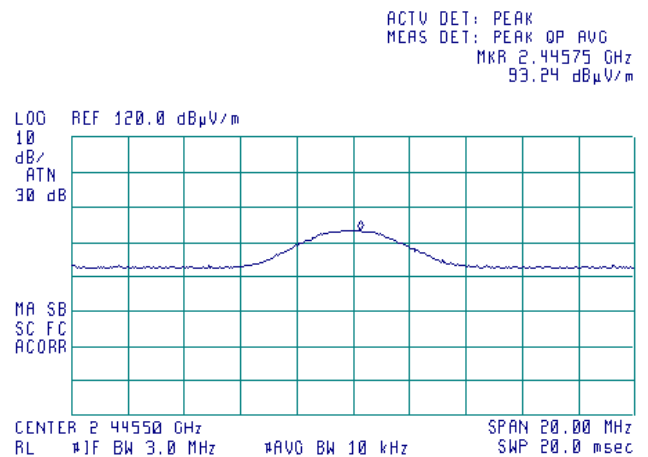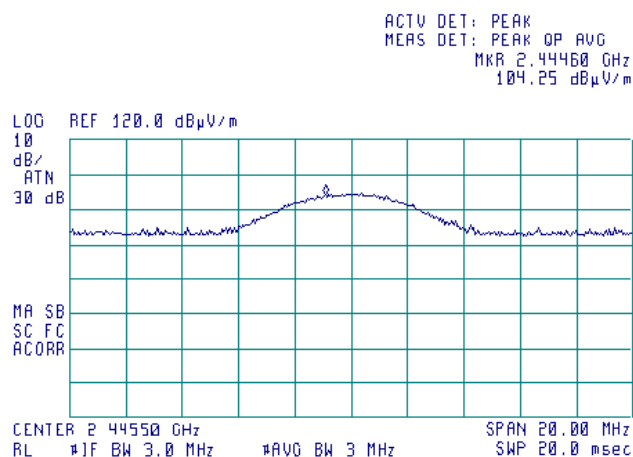

Y-axis

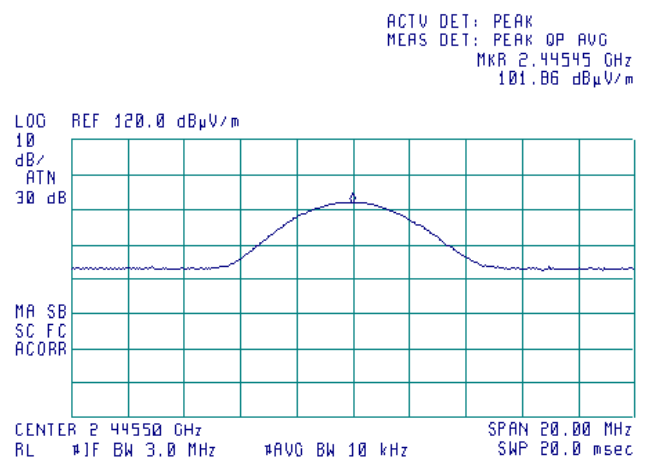





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Plot 7.1.3 Radiated emission measurements at the mid fundamental frequency (continued)

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:

Semi anechoic chamber
3 m
Vertical
RBW = 3MHz, VBW = 10 kHz
Z-axis

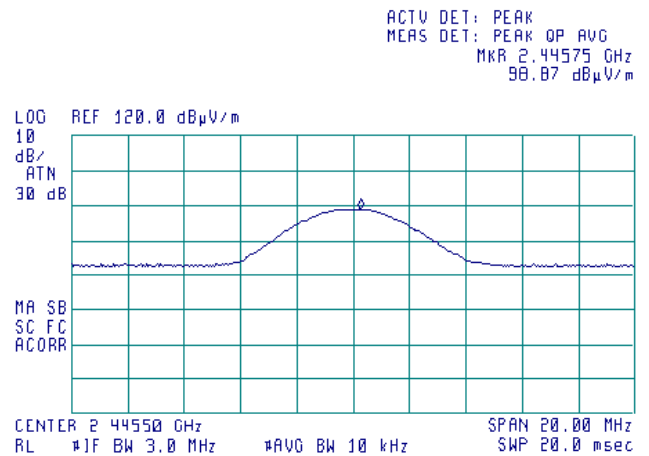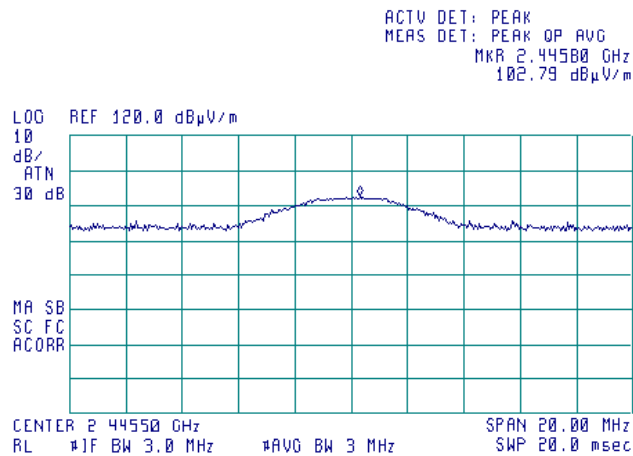




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.4 Radiated emission measurements at the mid fundamental frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:


Semi anechoic chamber
3 m
Horizontal
RBW = 3MHz, VBW = 10 kHz
X-axis

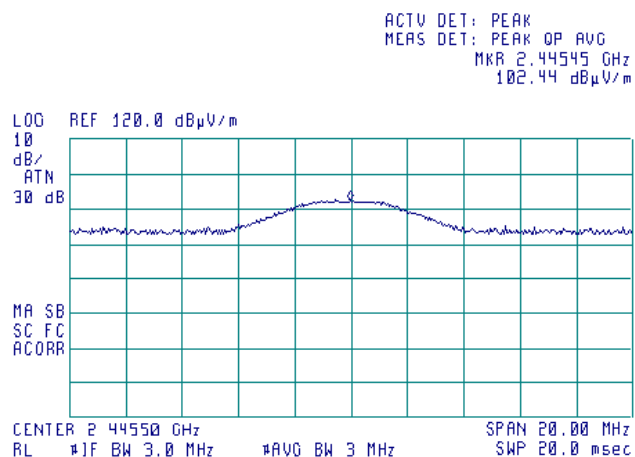

EUT POSITION:

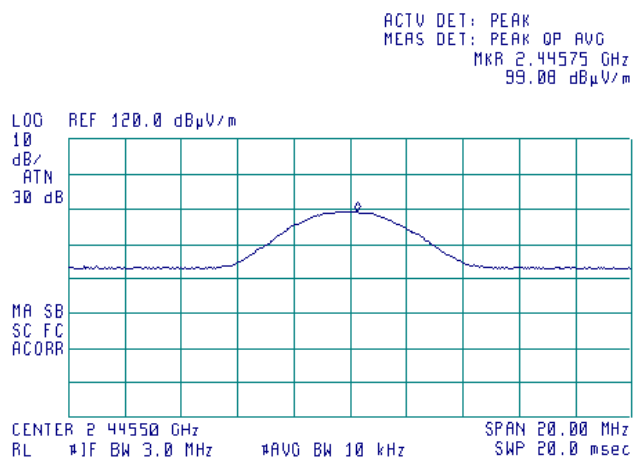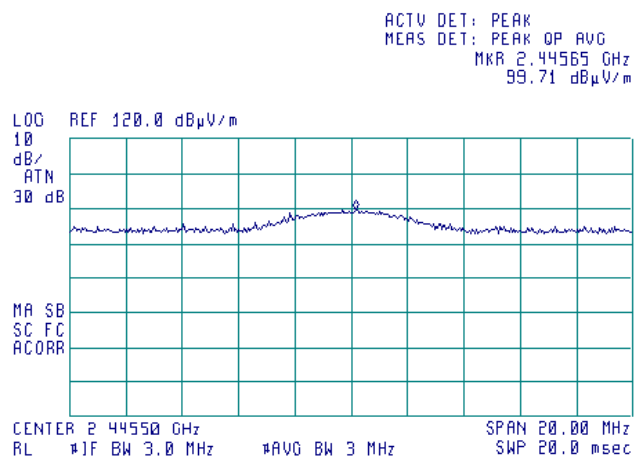

Y-axis

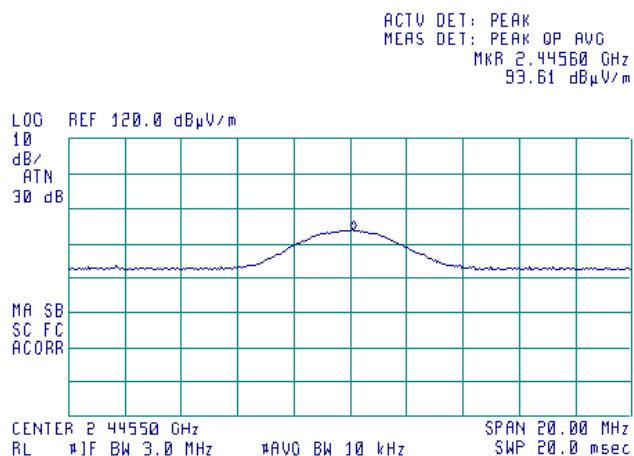





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Plot 7.1.4 Radiated emission measurements at the mid fundamental frequency (continued)

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:

Semi anechoic chamber
3 m
Horizontal
RBW = 3MHz, VBW = 10 kHz
Z-axis

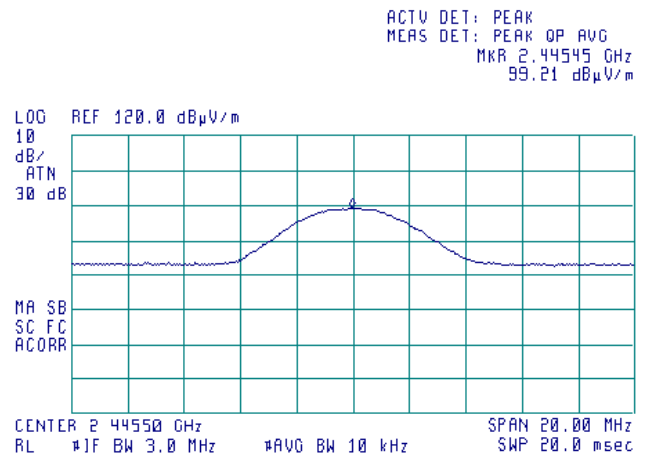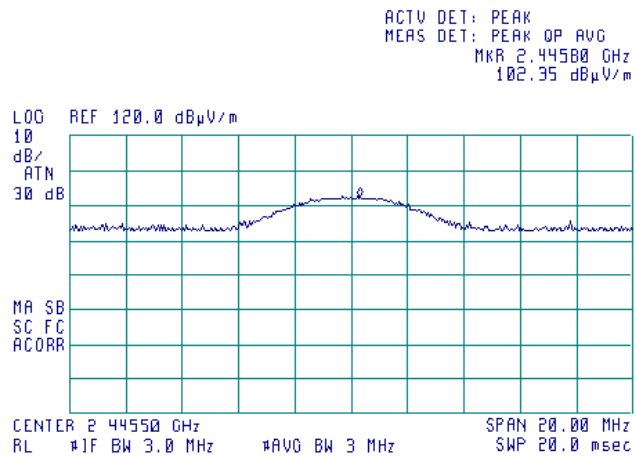




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.5 Radiated emission measurements at the high fundamental frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:


Semi anechoic chamber
3 m
Vertical
RBW = 3MHz, VBW = 10 kHz
X-axis

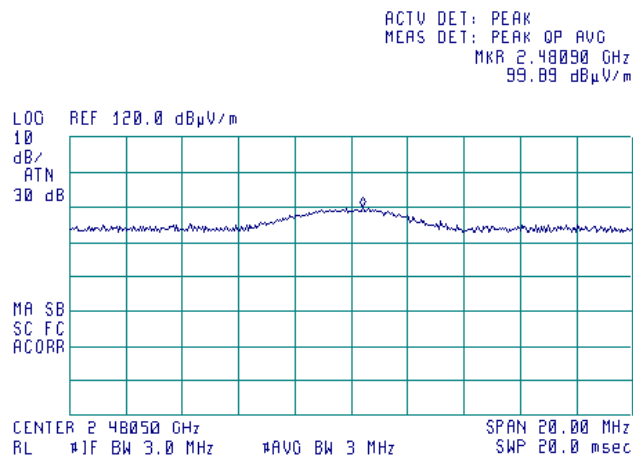

EUT POSITION:

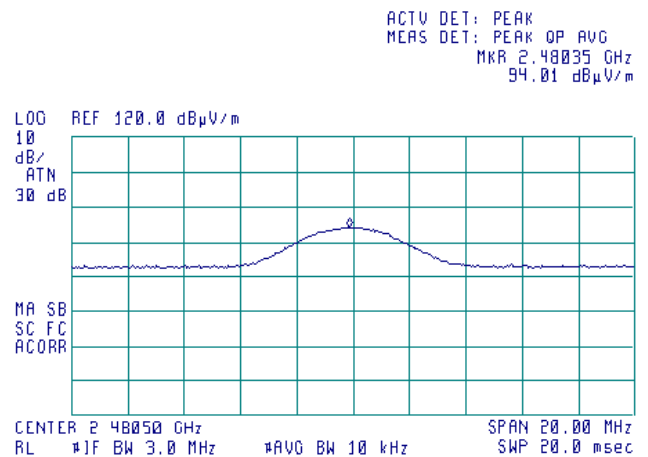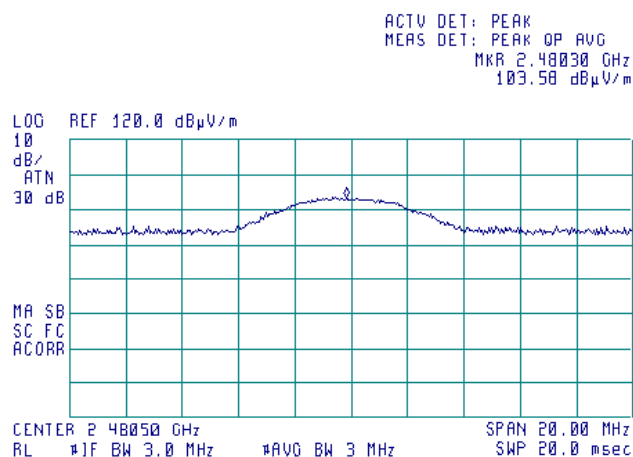

Y-axis

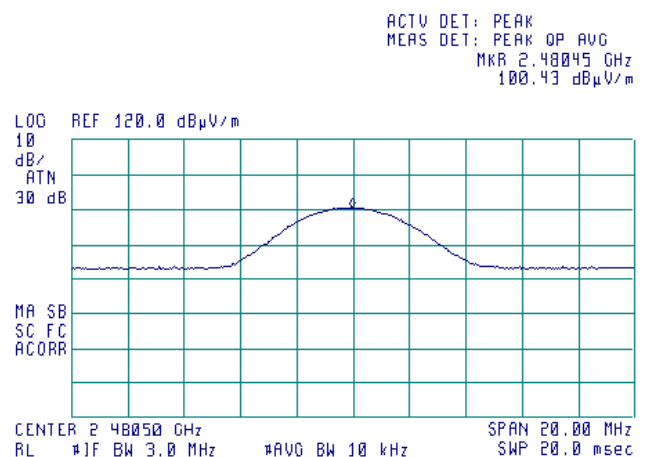





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Plot 7.1.5 Radiated emission measurements at the high fundamental frequency (continued)

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:

Semi anechoic chamber
3 m
Vertical
RBW = 3MHz, VBW = 10 kHz
Z-axis

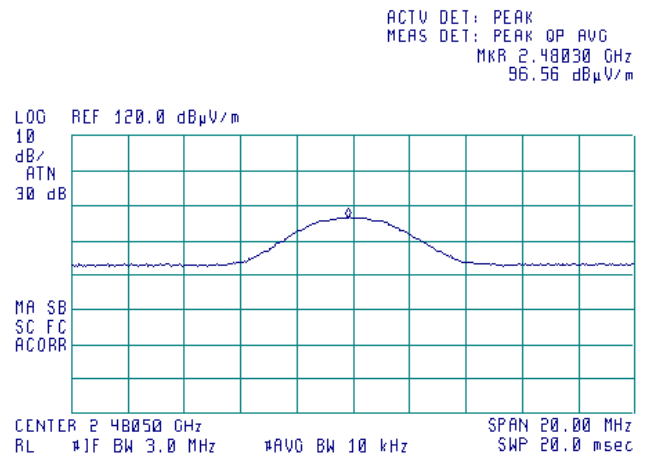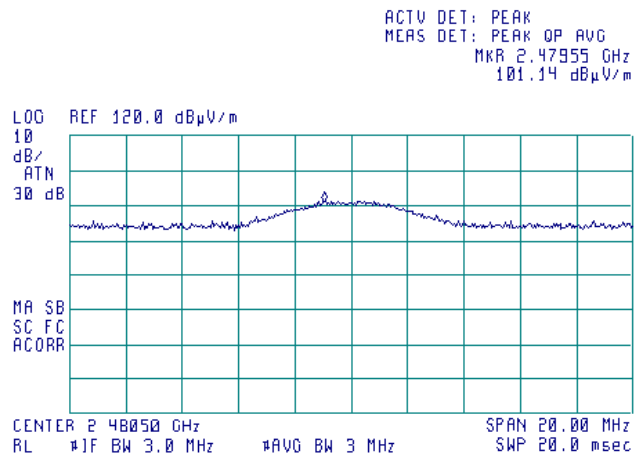




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.6 Radiated emission measurements at the high fundamental frequency

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:


Semi anechoic chamber
3 m
Horizontal
RBW = 3MHz, VBW = 10 kHz
X-axis

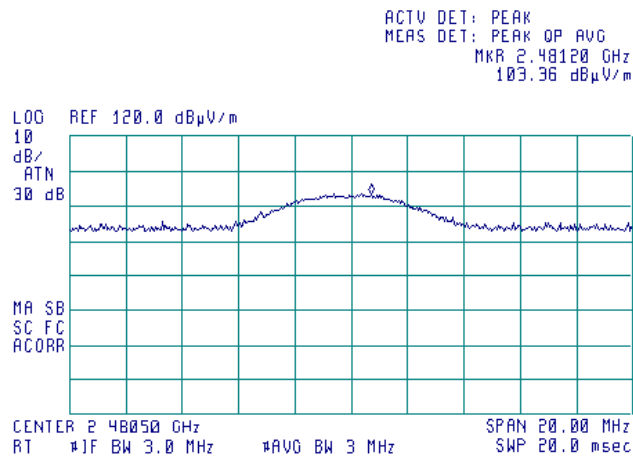

EUT POSITION:

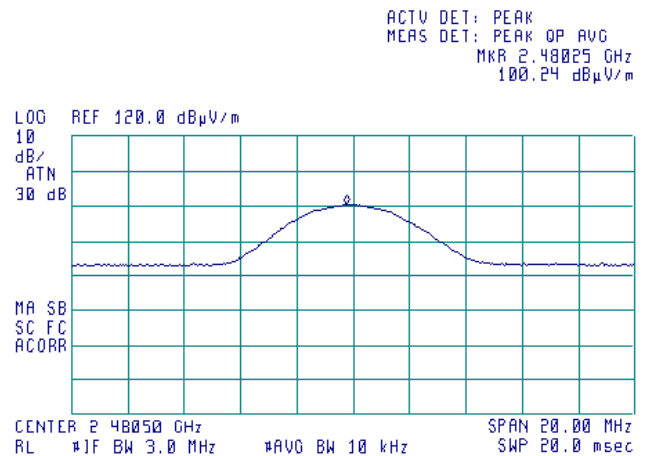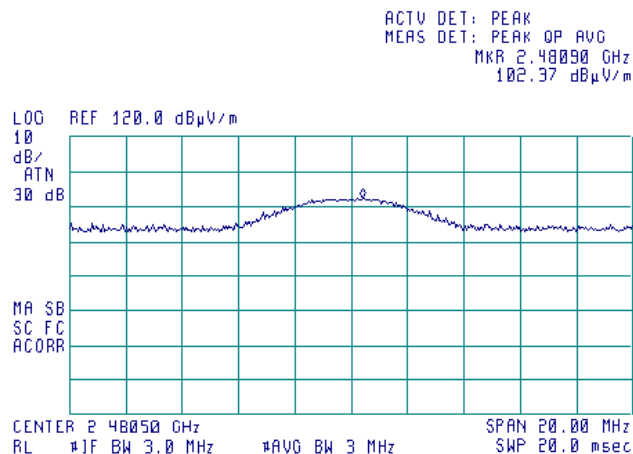

Y-axis

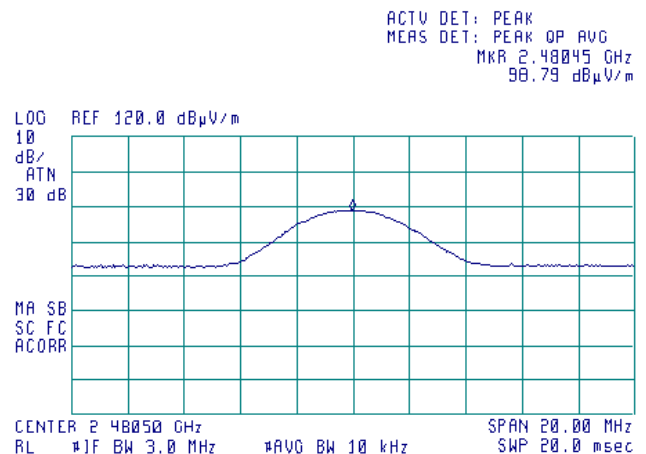





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Plot 7.1.6 Radiated emission measurements at the high fundamental frequency (continued)

TEST SITE:
TEST DISTANCE:
ANTENNA POLARIZATION:
RBW = 3MHz, VBW = 3 MHz
EUT POSITION:

Semi anechoic chamber
3 m
Horizontal
RBW = 3MHz, VBW = 10 kHz
Z-axis

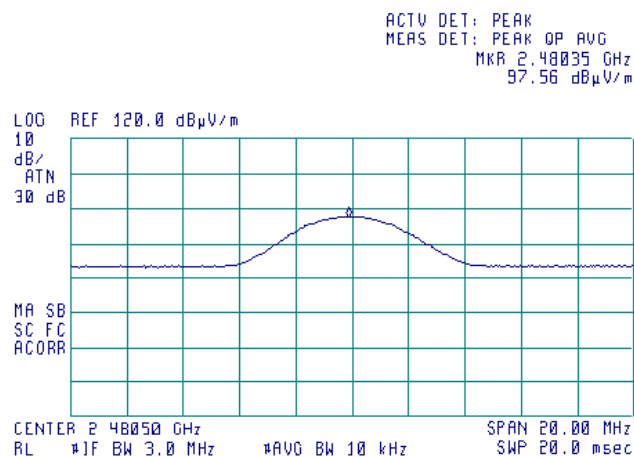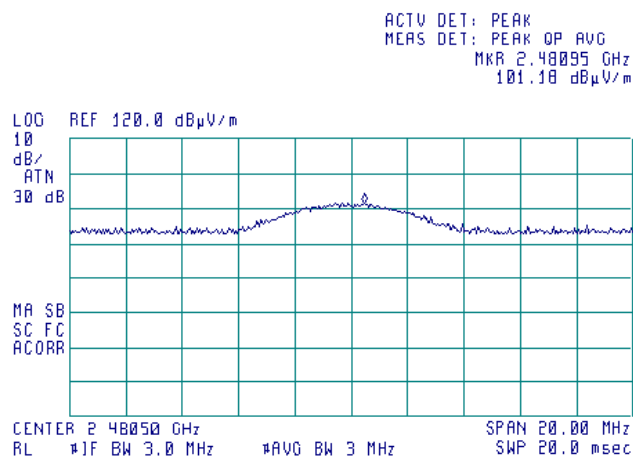




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			


Plot 7.1.7 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Y-axis
CARRIER FREQUENCY: Low, Mid, High

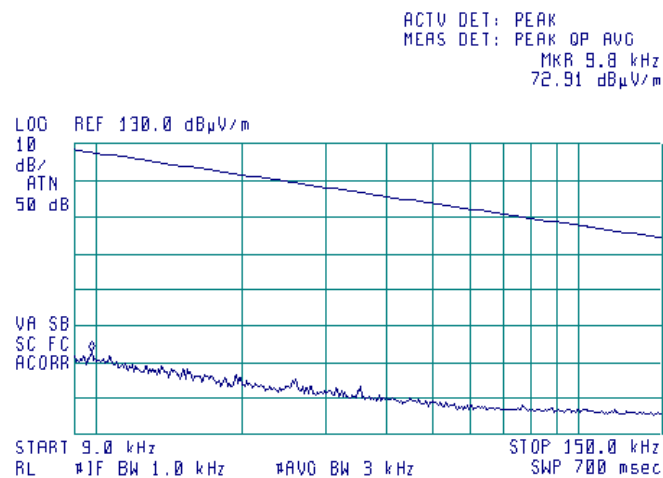

Plot 7.1.8 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Y-axis
CARRIER FREQUENCY: Low, Mid, High

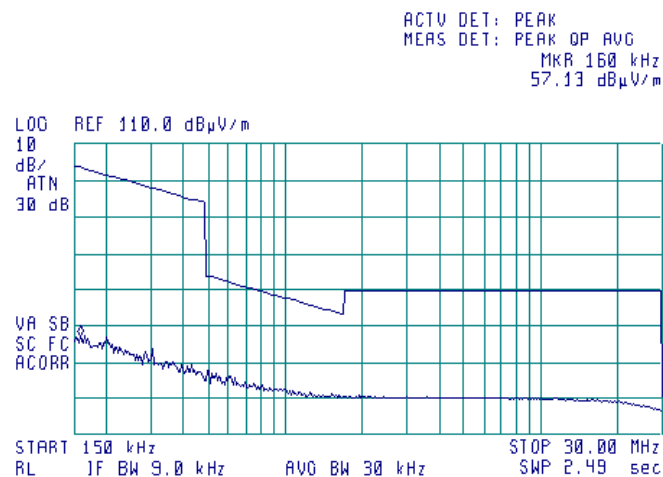



HERMON LABORATORIES

Report ID: SCRRAD_FCC.26956.docx

Date of Issue: 5-Nov-15


Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Plot 7.1.9 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Low, Mid, High



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 952.3 MHz
28.44 dBμV/m

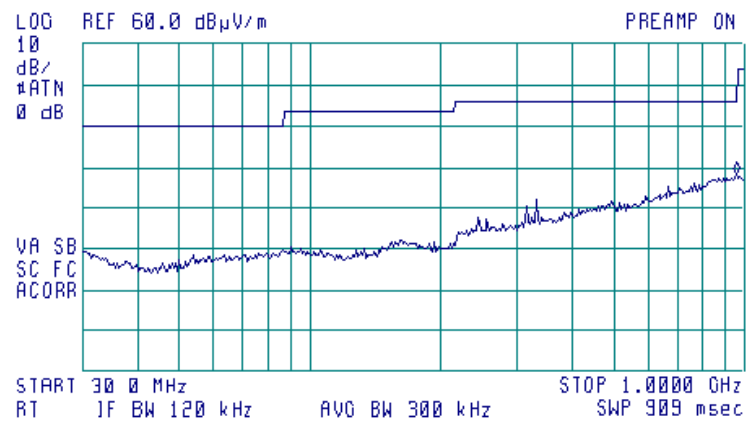




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Jun-15		
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			


Plot 7.1.10 Radiated emission measurements from 1.0 to 3 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Low

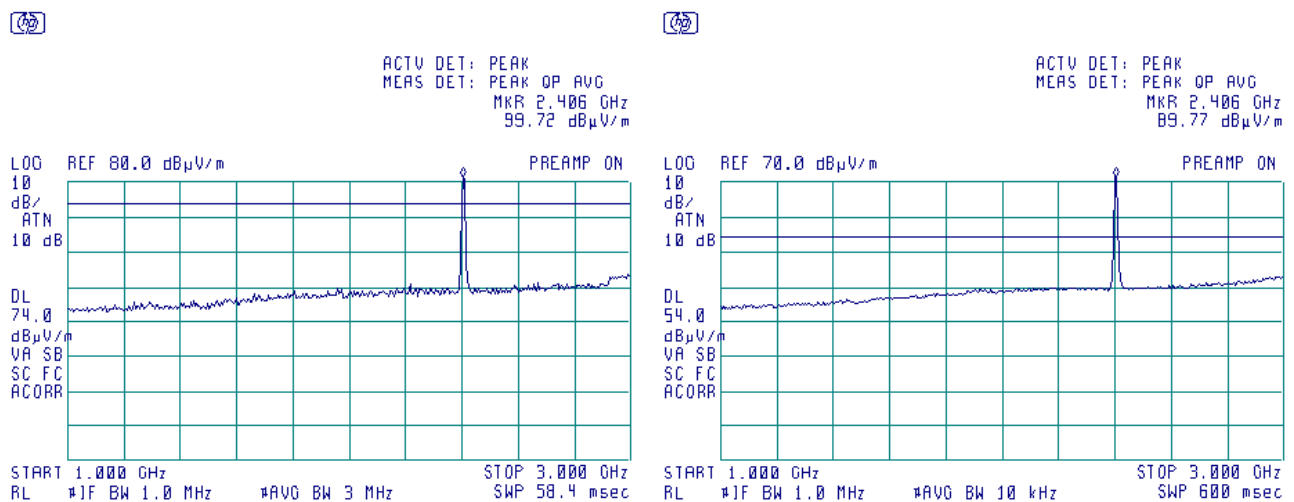

Plot 7.1.11 Radiated emission measurements from 1.0 to 3 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Mid

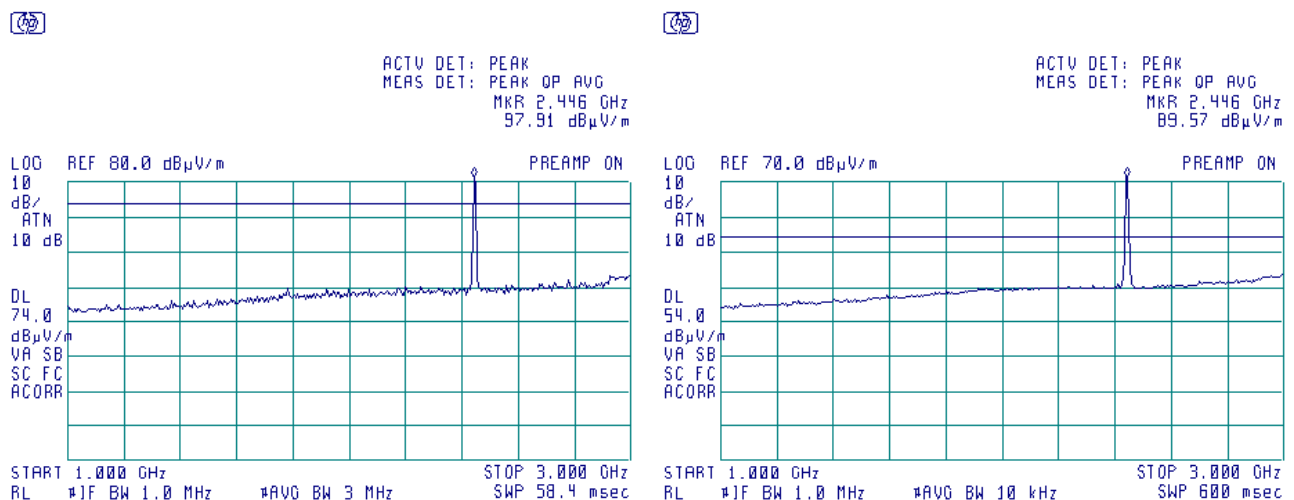




HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			


Plot 7.1.12 Radiated emission measurements from 1.0 to 3 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: High

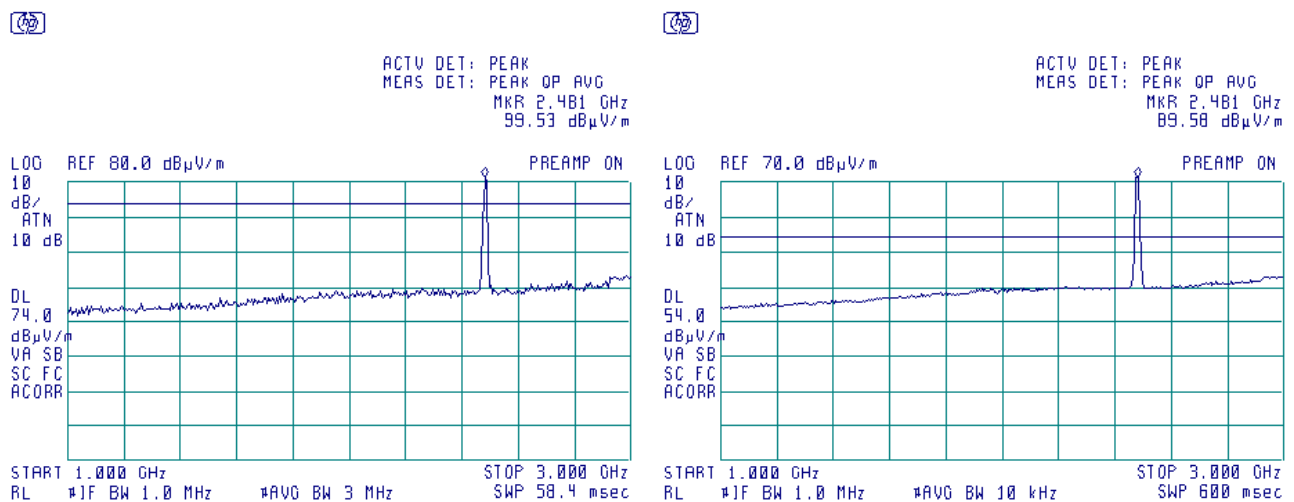

Plot 7.1.13 Radiated emission measurements from 3 to 18 MHz



TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Low

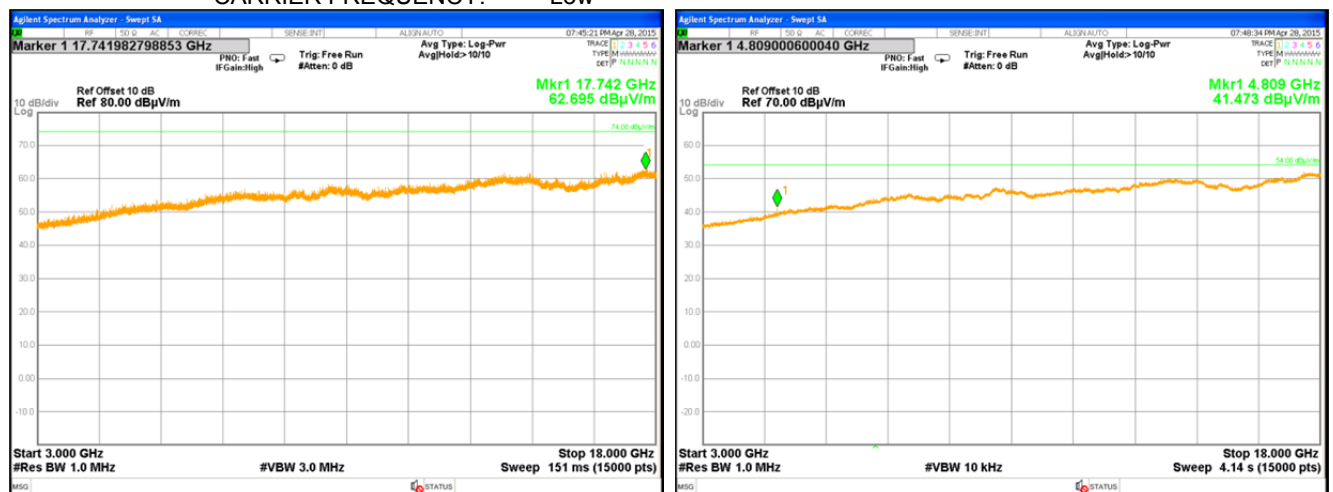

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.14 Radiated emission measurements from 3 to 18 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Mid

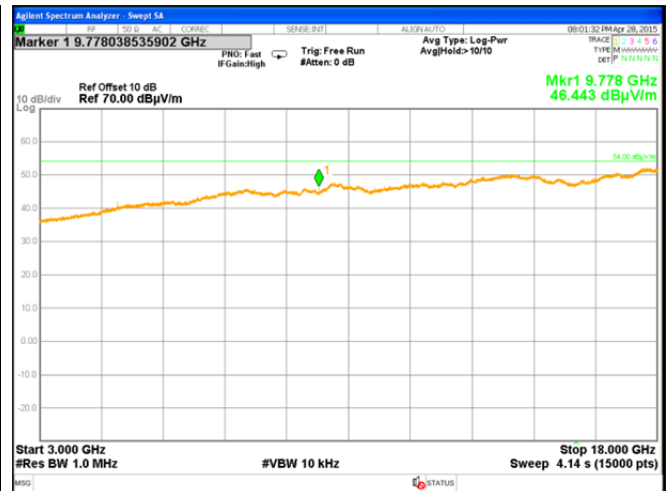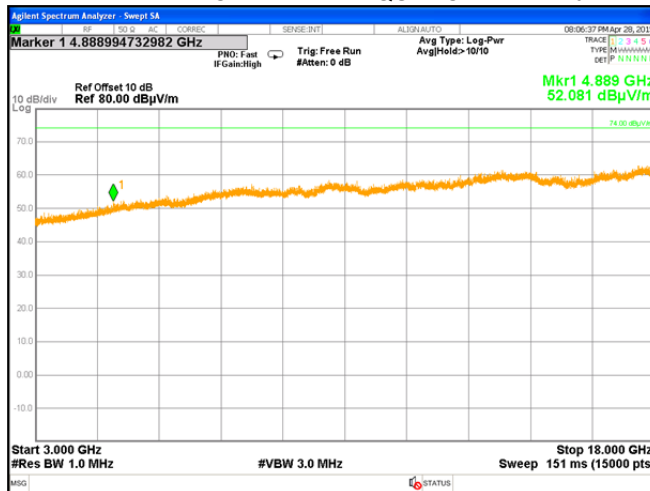

Plot 7.1.15 Radiated emission measurements from 3 to 18 MHz



TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: High

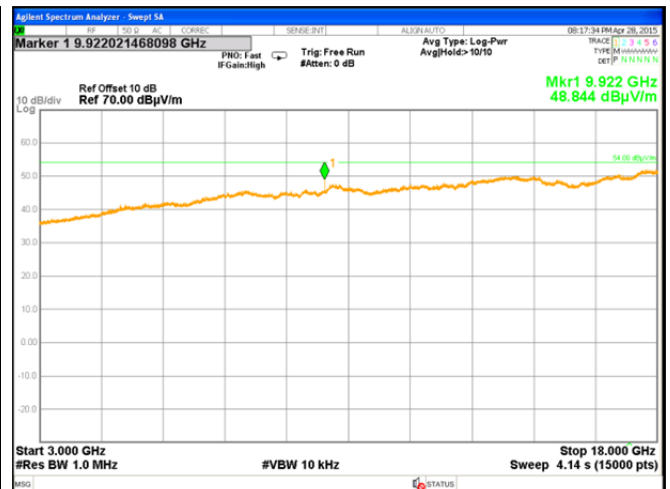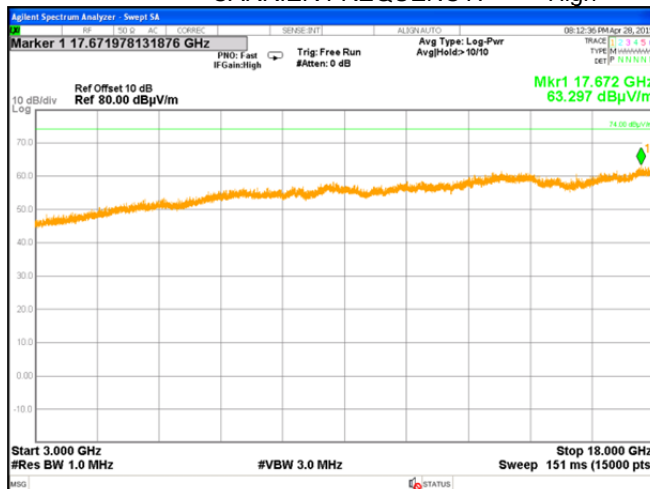

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.16 Radiated emission measurements from 18.0 to 25 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Low

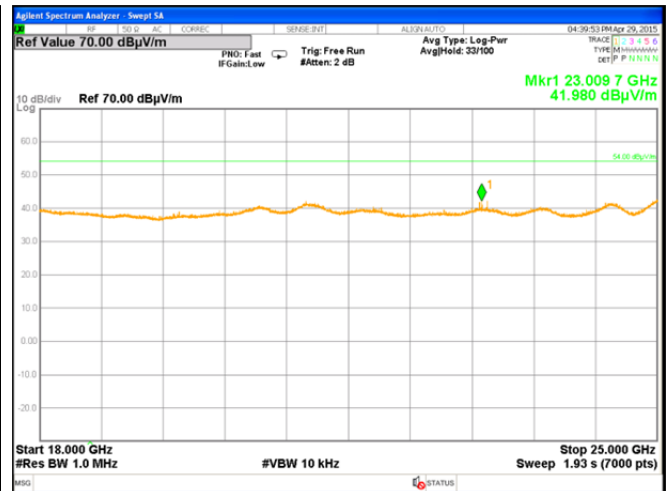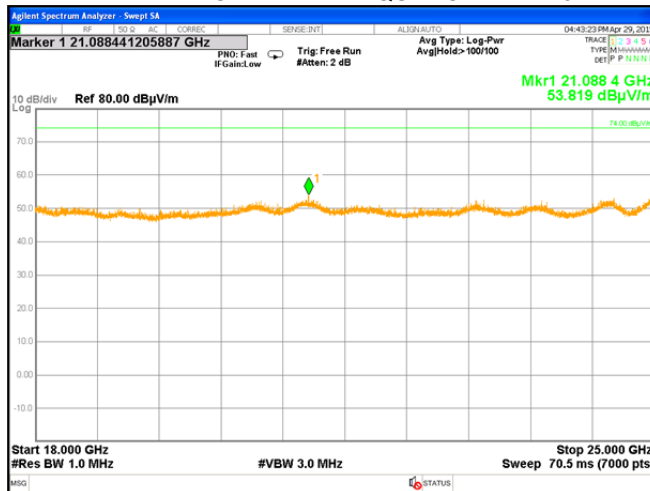

Plot 7.1.17 Radiated emission measurements from 18.0 to 25 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Mid

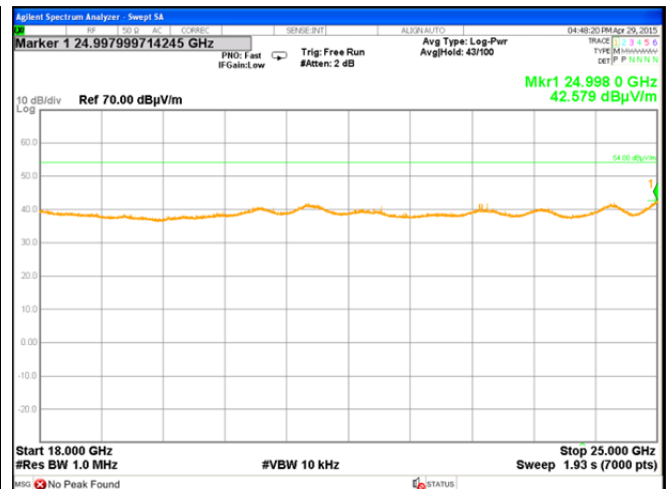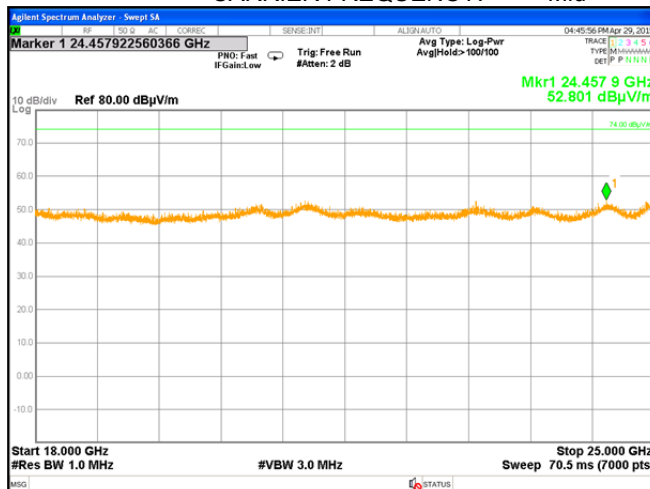





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict: PASS	
Date(s):	08-Jun-15		
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Plot 7.1.18 Radiated emission measurements from 18.0 to 25 GHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: High

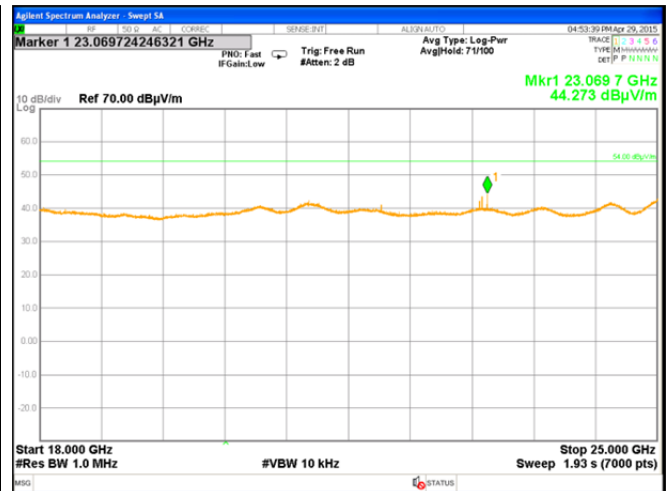
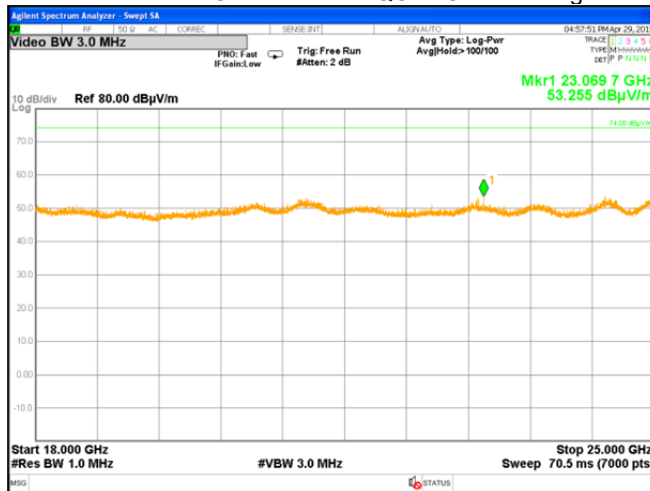


21.09 GHz, 22.9 GHz, 23.01 GHz, 23.07 GHz – are ambient signals

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.19 Radiated emission measurements at the second harmonic frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Low

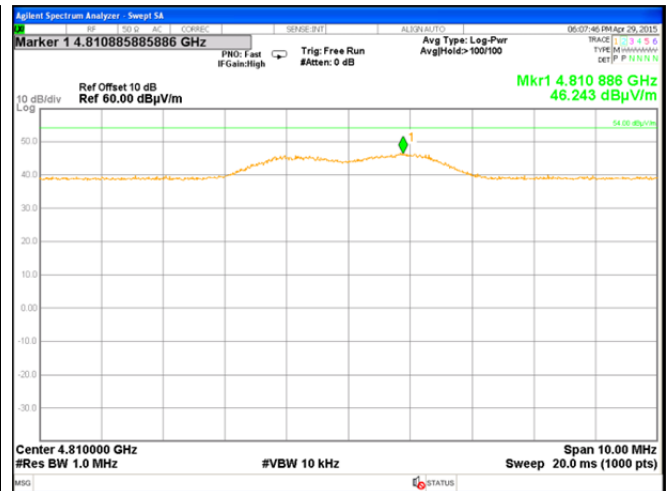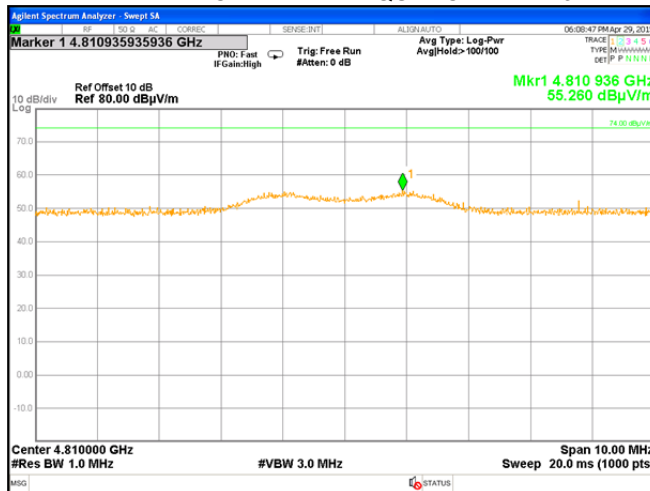

Plot 7.1.20 Radiated emission measurements at the second harmonic frequency



TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Mid

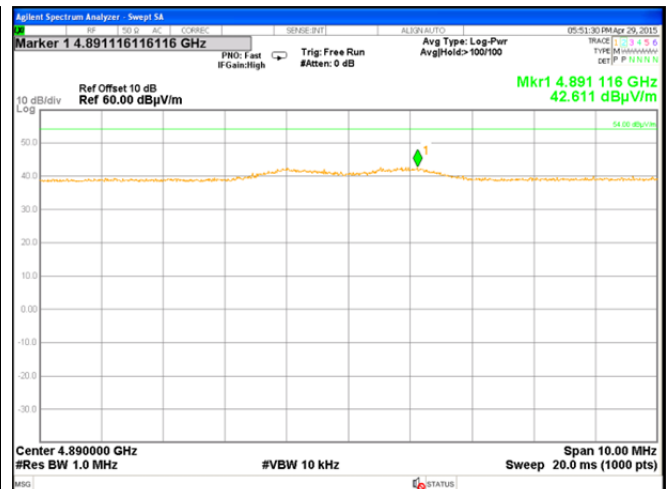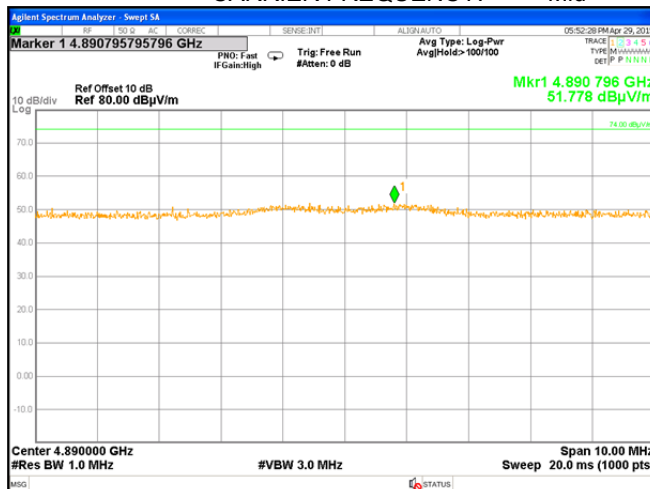

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.21 Radiated emission measurements at the second harmonic frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: High

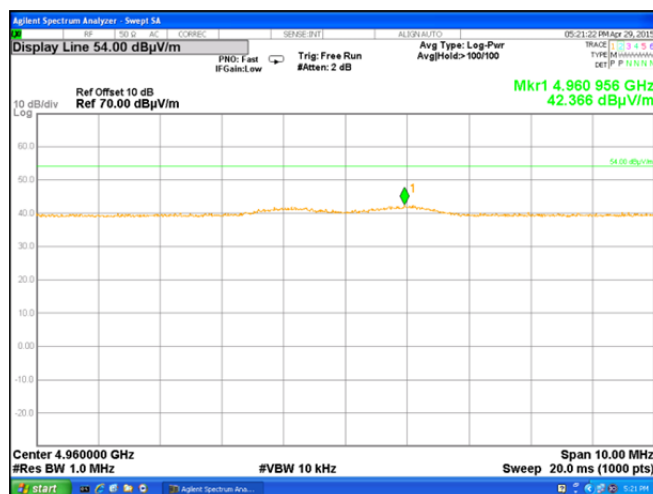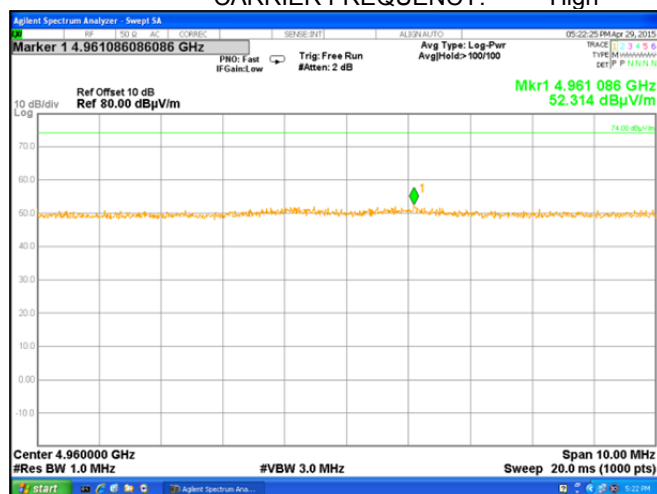

Plot 7.1.22 Radiated emission measurements at the fourth harmonic frequency



TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Low

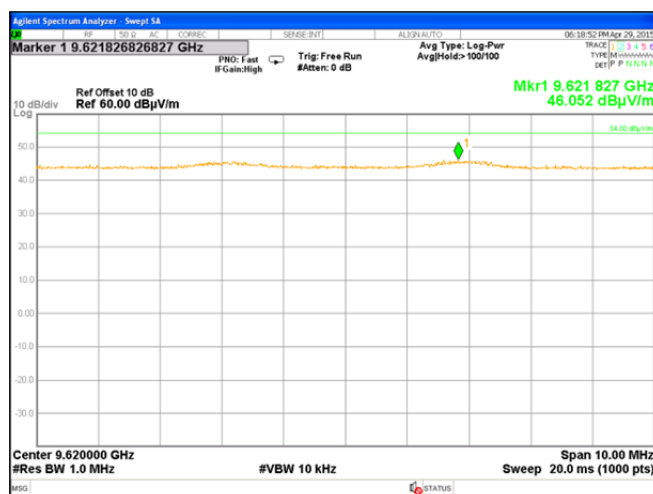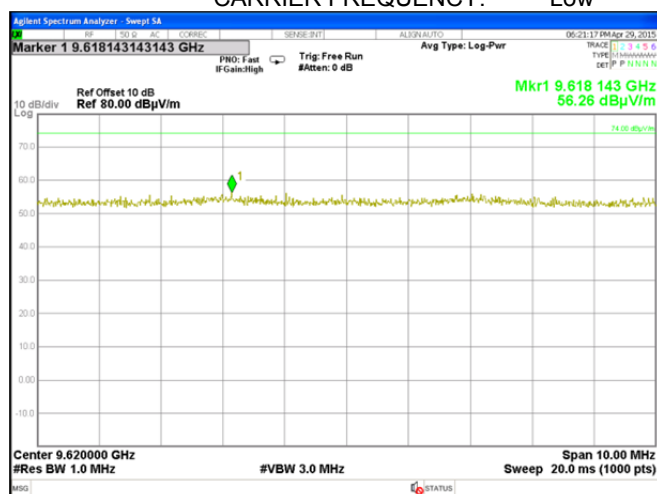

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 7.1.23 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: Mid

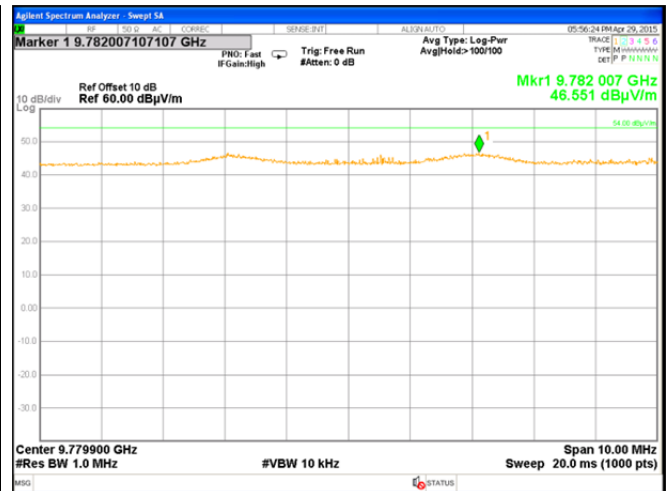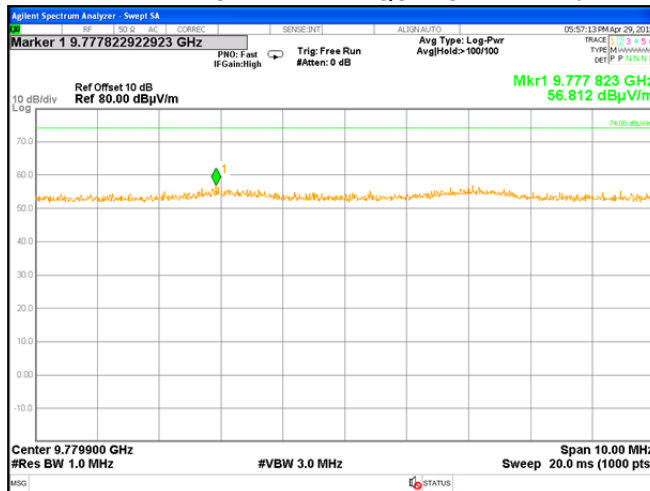

Plot 7.1.24 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Y-axis
CARRIER FREQUENCY: High

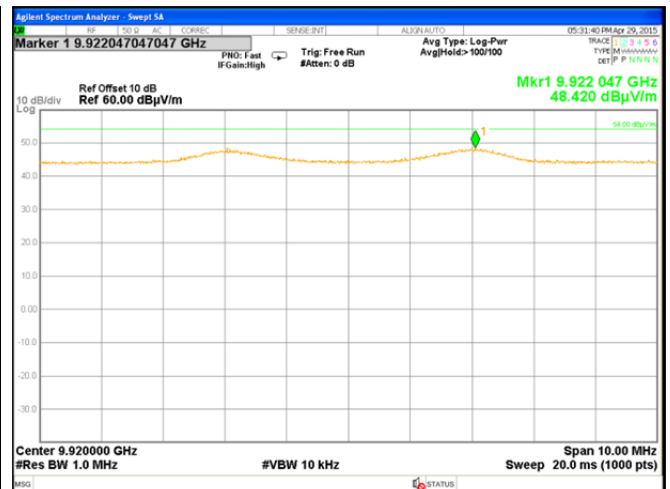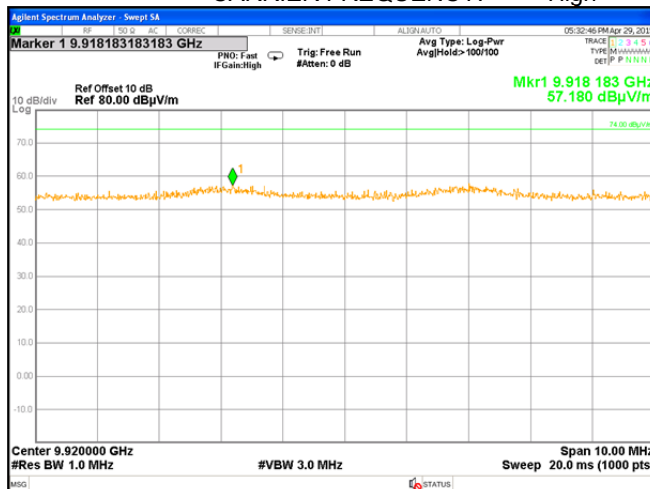





HERMON LABORATORIES

Test specification:		Section 15.249(a)(d), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Plot 7.1.25 Transmission pulse duration

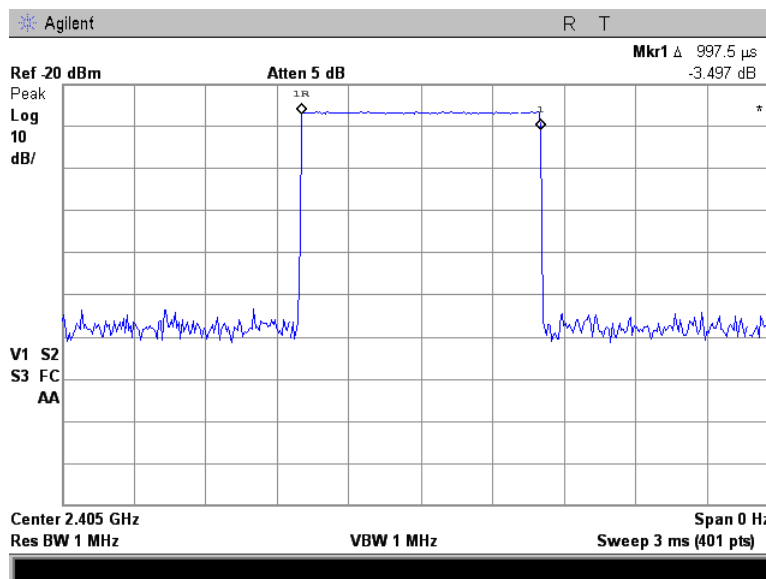

Plot 7.1.26 Transmission pulse period

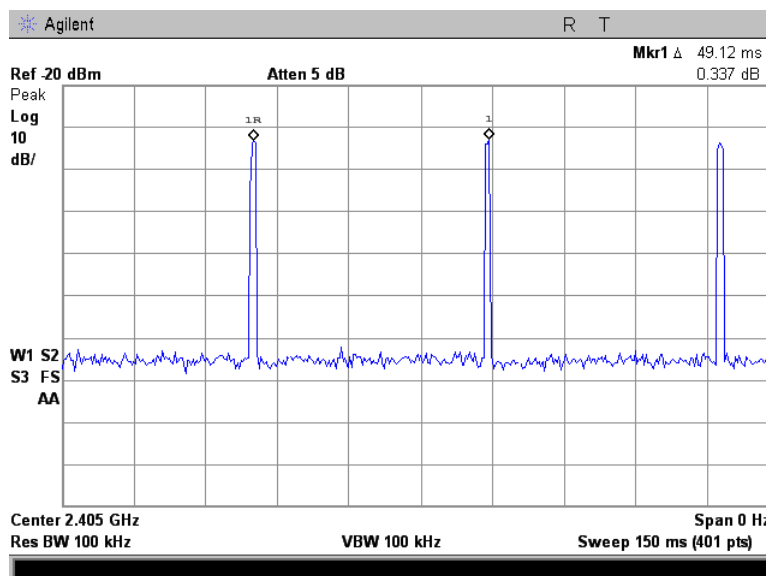



Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		29-Apr-15	
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

7.2 Band edge emission

7.2.1 General

This test was performed to verify the EUT band edge emission including all associated side bands was attenuated at least 50 dB below the unmodulated carrier level or below the general spurious emission limit. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Band edge emission limits

Frequency band, MHz	Field strength limit at 3 m, dBμV/m		Attenuation below carrier, dBc
	Peak	Average	
2400 – 2483.5	74.0	54.0	50

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.


7.2.2.2 The spectrum analyzer frequency span was set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.2.2.3 The frequency of modulation envelope points beyond which power level drops below the band edge emission limit was measured.

7.2.2.4 The test results were recorded in Table 7.2.2 and shown in the associated plots.

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		29-Apr-15	
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Figure 7.2.1 Band edge emission measurement set up

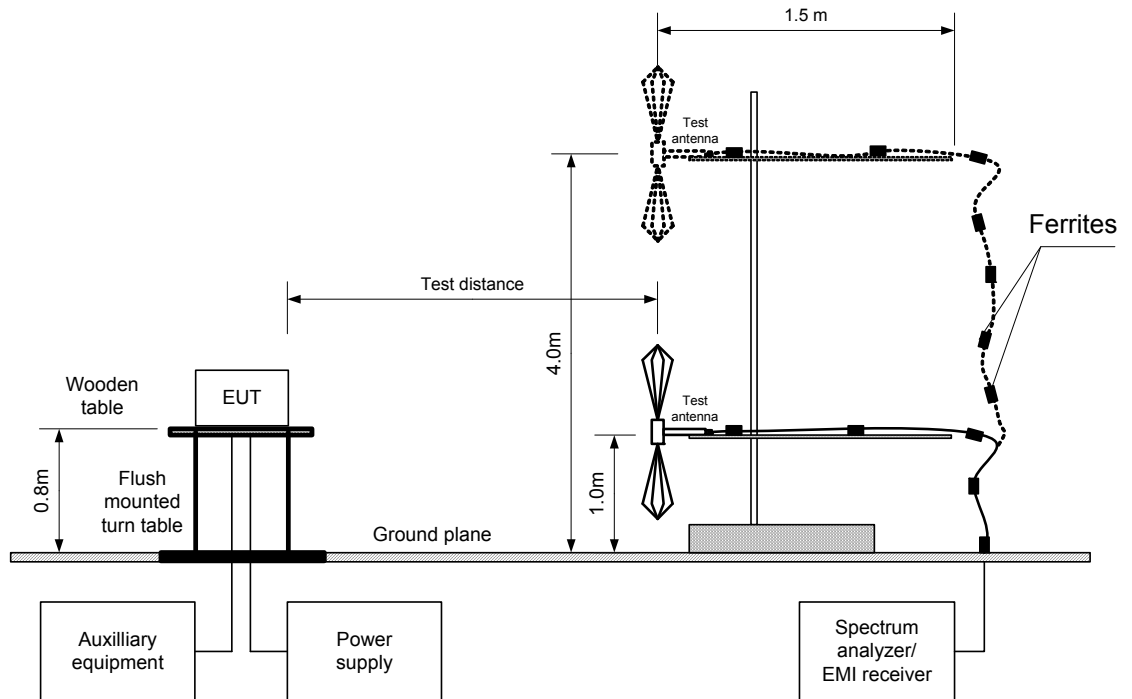



HERMON LABORATORIES

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		29-Apr-15	
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Table 7.2.2 Band edge emission test results

OPERATING FREQUENCY RANGE: 2400 – 2483.5MHz
DETECTOR USED: Peak hold
MODULATION: QPSK
BIT RATE: 250 kbps

Modulation envelope		Band edge limit, MHz	Margin, kHz***	Verdict
Edge	Frequency, MHz*			
Low	2402.84	2400.0	2840	Pass
High	2482.30	2483.5	1200	Pass

* - Measured frequency beyond which the emission dropped 50 dB below the carrier emission or below the field strength limit whichever was a less stringent

** - Margin = Band edge limit – Band edge frequency

Reference numbers of test equipment used

HL 0521	HL 1984	HL 4353	HL 4722				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		29-Apr-15	
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.2.1 Low band edge emission test result

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 EUT POSITION: Y-axis


(A)

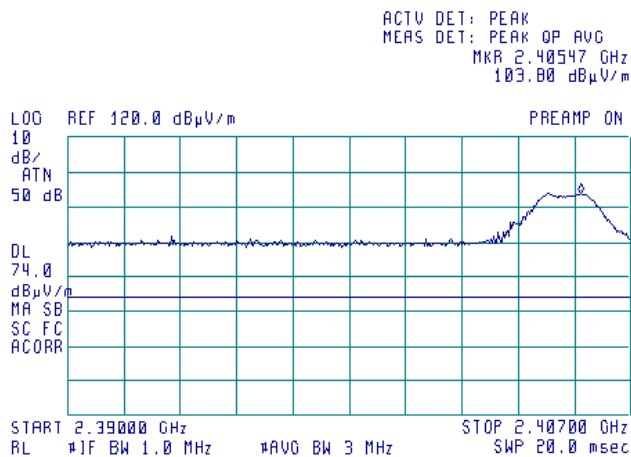


(B)

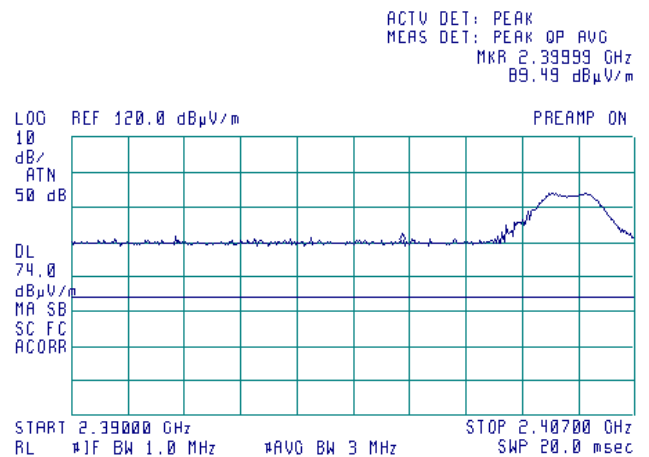

(C)

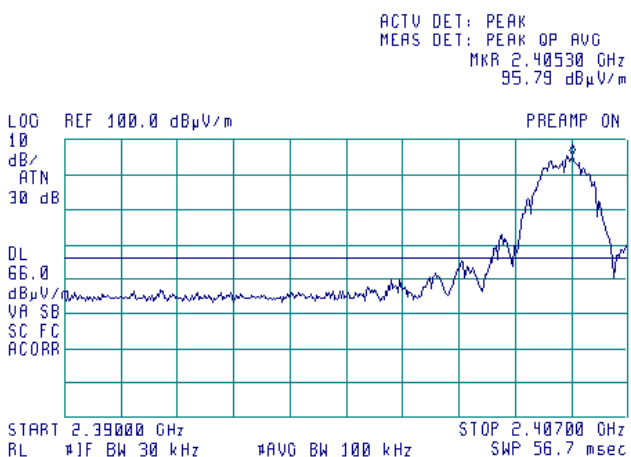

(D)

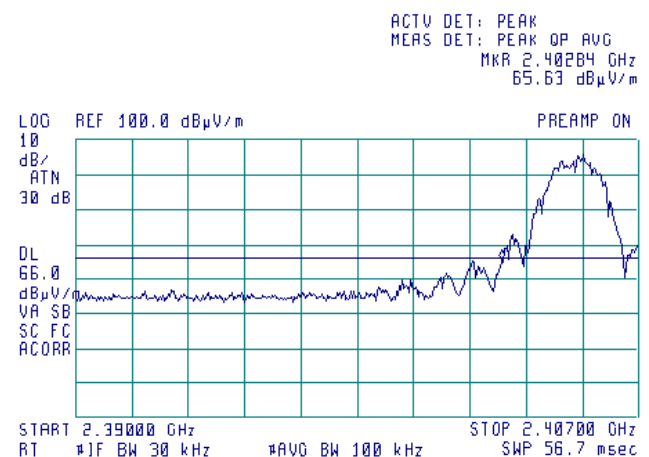

$$DL=95.79-(103.80-74)=65.99 \text{ dBuV/m}$$




HERMON LABORATORIES

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		29-Apr-15	
Temperature: 25 °C	Air Pressure: 1010 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.2.2 High band edge emission test result

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 EUT POSITION: Y-axis


(A)

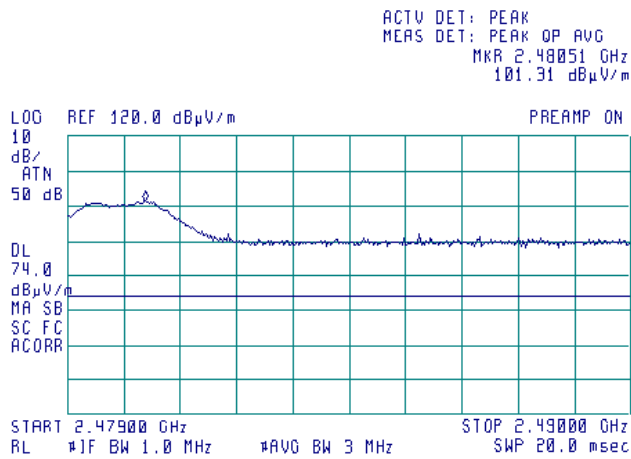


(B)

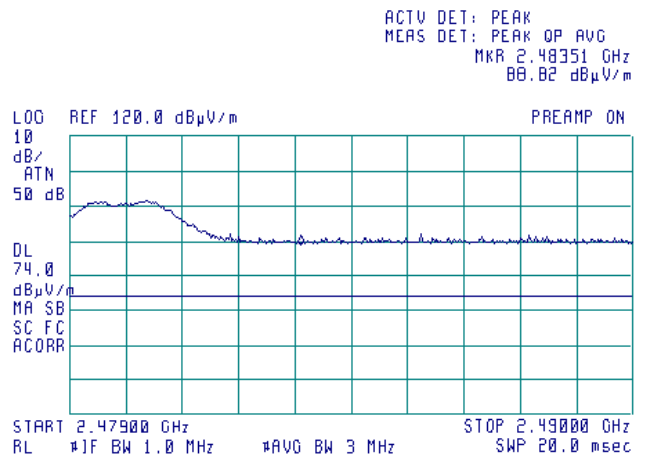

(C)

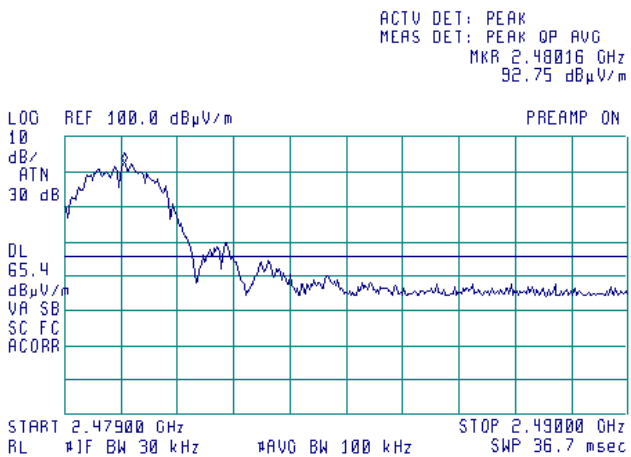

(D)

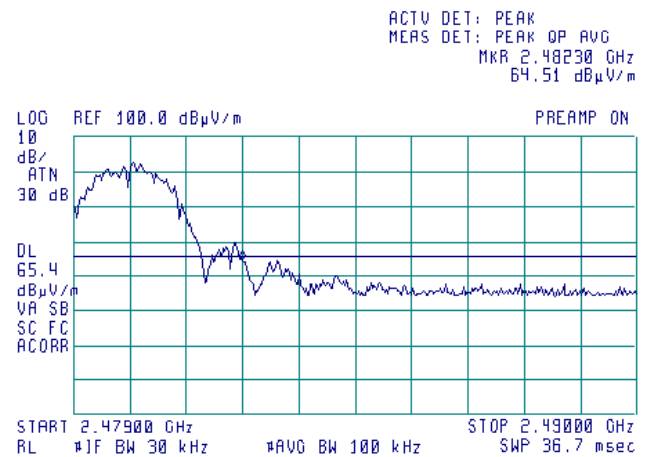

$$DL=92.75 - (101.31-74)=65.44 \text{ dBuV/m}$$

Test specification:		Section 15.203, Antenna requirement	
Test procedure:		Visual inspection / supplier declaration	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 60 %	Power Supply: Battery
Remarks:			

7.3 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.3.1.

Table 7.3.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.3.1 Antenna assembly



Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		17-May-15	
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

7.4 Occupied bandwidth test

7.4.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc
902 - 928	20.0
2400 – 2483.5	
5725 – 5875	
24000 – 24250	

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.4.2.3 The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.4.2 and associated plot.

7.4.2.4 Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.4.1 Occupied bandwidth test setup





Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		17-May-15	
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Table 7.4.2 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND: 2400 – 2483.5 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 100 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: QPSK
 MODULATING SIGNAL: enable

Band edge	Cross point frequency, MHz	Frequency drift, kHz		Modulation band edge, MHz	Assigned band edge, MHz	Verdict
		Negative	Positive			
Low	2403.70	NA	NA	NA	2400.0	Pass
High	2481.35	NA	NA	NA	2483.5	Pass

ASSIGNED FREQUENCY BAND: 2400 – 2483.5 MHz
 DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: QPSK
 MODULATING SIGNAL: enable

Frequency, MHz	OBW, kHz	Limit	Verdict
2405	2358.9	NA	Pass
2445	2428.5	NA	Pass
2480	2455.3	NA	Pass

Reference numbers of test equipment used

HL 3818	HL 4164	HL 4275				
---------	---------	---------	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: Section 15.215(c), Occupied bandwidth			
Test procedure: ANSI C63.4, Section 13.1.7			
Test mode: Compliance			Verdict: PASS
Date(s): 17-May-15			
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.1 Occupied bandwidth test result at low frequency

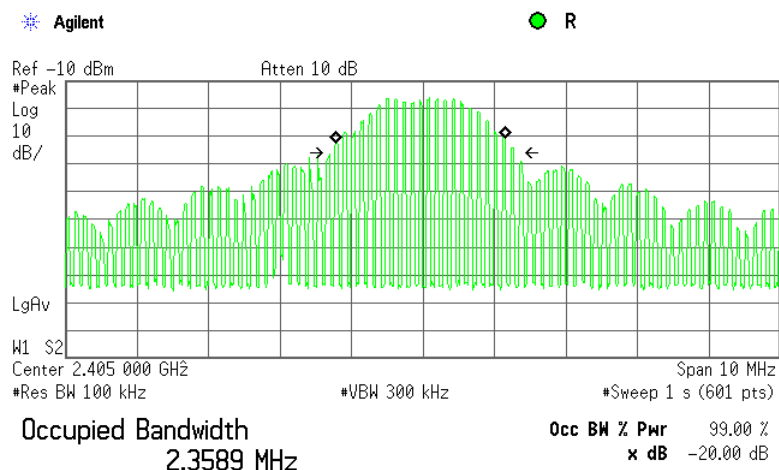

Transmit Freq Error -32.411 kHz

x dB Bandwidth 2.512 MHz*

Plot 7.4.2 Low band edge frequency

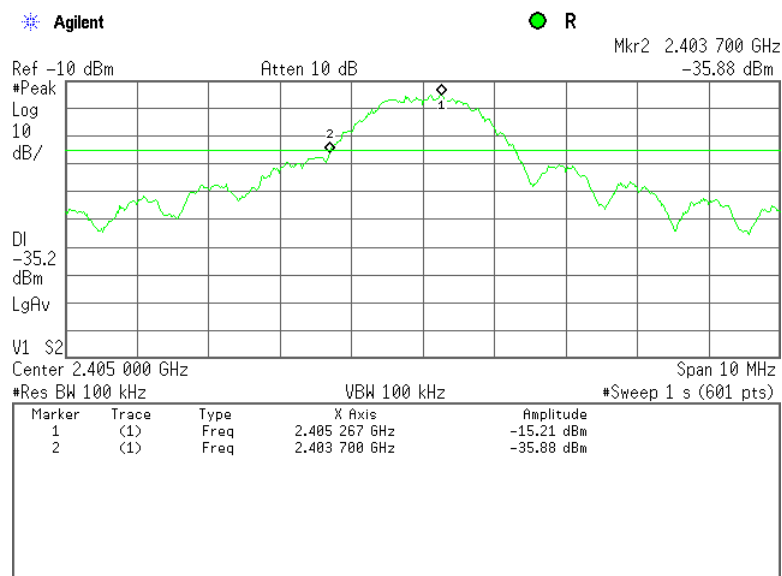




HERMON LABORATORIES

Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:		Compliance	Verdict: PASS
Date(s):		17-May-15	
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.3 Occupied bandwidth test result at mid frequency

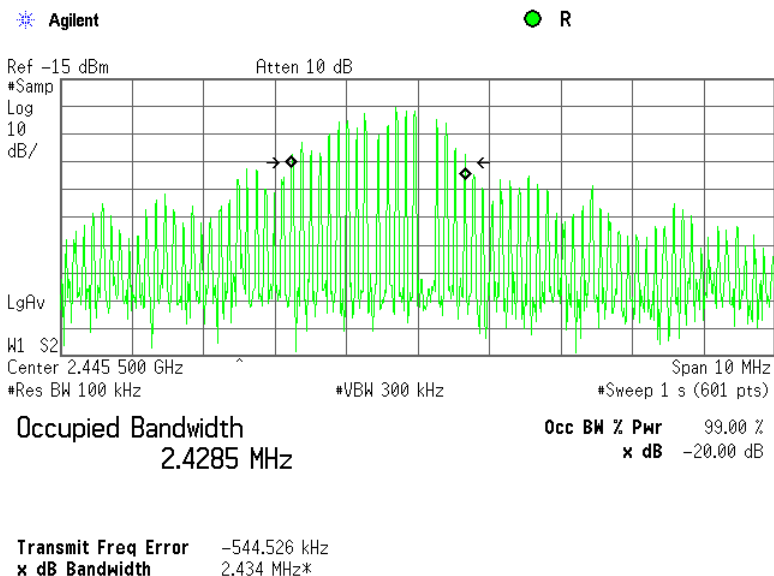




HERMON LABORATORIES

Test specification: Section 15.215(c), Occupied bandwidth			
Test procedure: ANSI C63.4, Section 13.1.7			
Test mode: Compliance			Verdict: PASS
Date(s): 17-May-15			
Temperature: 23 °C	Air Pressure: 1014 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.4 Occupied bandwidth test result at high frequency

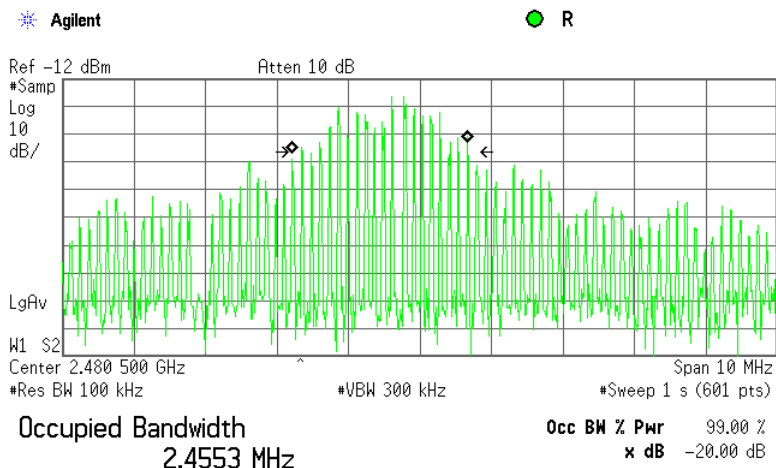

Transmit Freq Error -558.617 kHz

x dB Bandwidth 2.347 MHz*

Plot 7.4.5 High band edge frequency

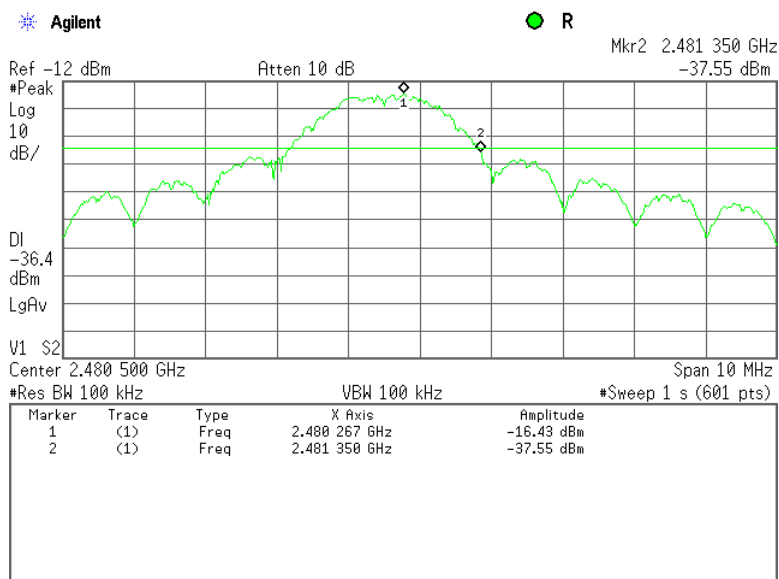

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

8 Emission tests according to 47CFR part 15 subpart B requirements

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.1.2 Test procedure


8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.

8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

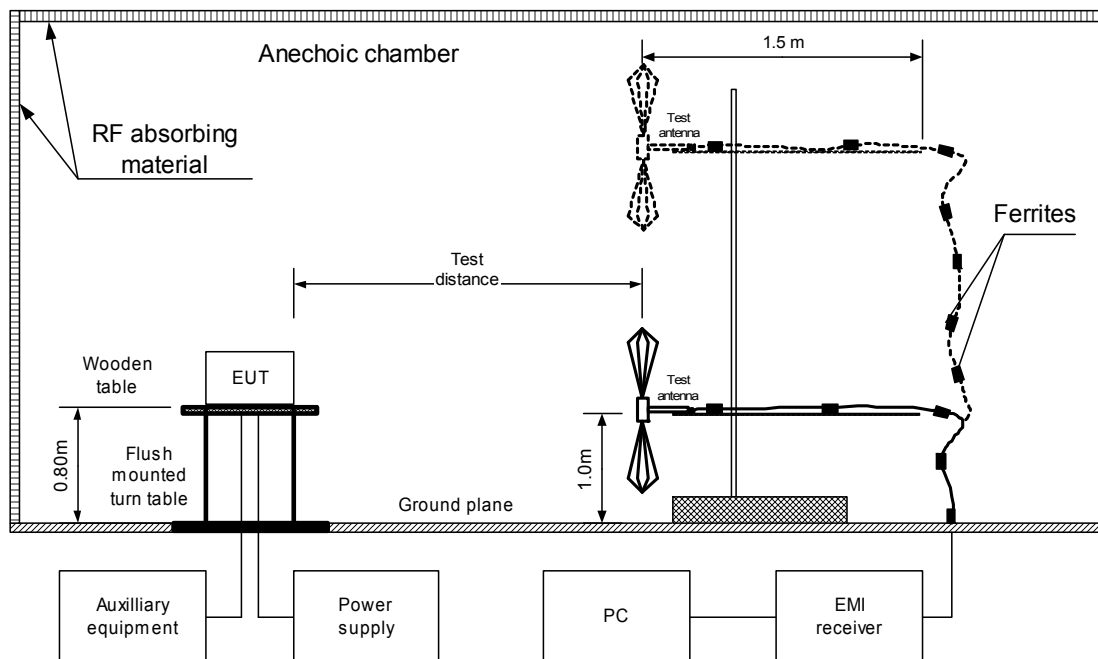

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Photograph 8.1.1 Setup for radiated emission measurements





HERMON LABORATORIES

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

RESOLUTION BANDWIDTH:					120 KHz			
Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 6000 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
4811.150	58.9	74.0	-15.1	44.1	54.0	-9.9	V	1.37	234	Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 4114	HL 4353				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance			Verdict: PASS
Date(s): 08-Jun-15			
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

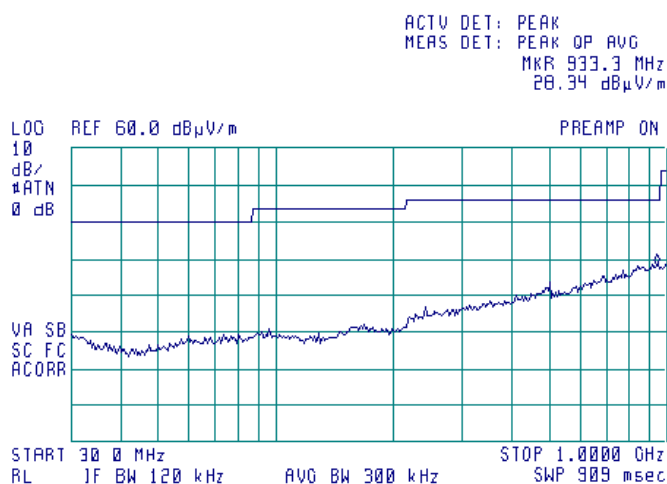

Plot 8.1.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization



TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

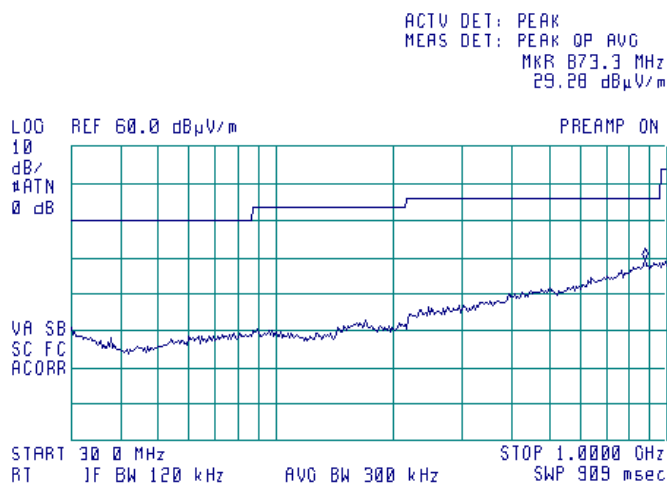

Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		08-Jun-15	
Temperature: 23 °C	Air Pressure: 1012 hPa	Relative Humidity: 58 %	Power Supply: Battery
Remarks:			



Plot 8.1.3 Radiated emission measurements above 1000 MHz, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

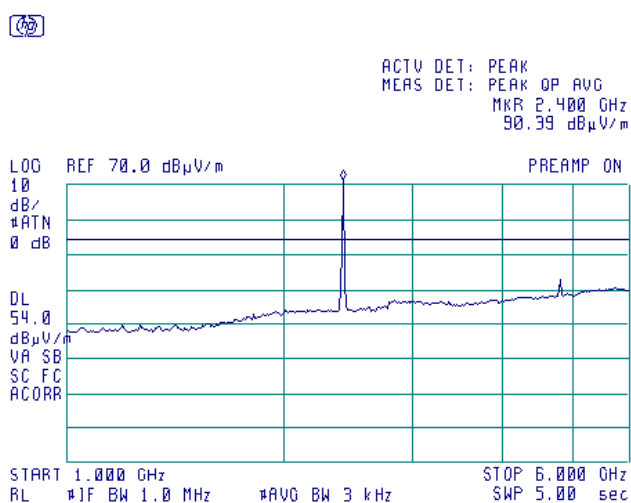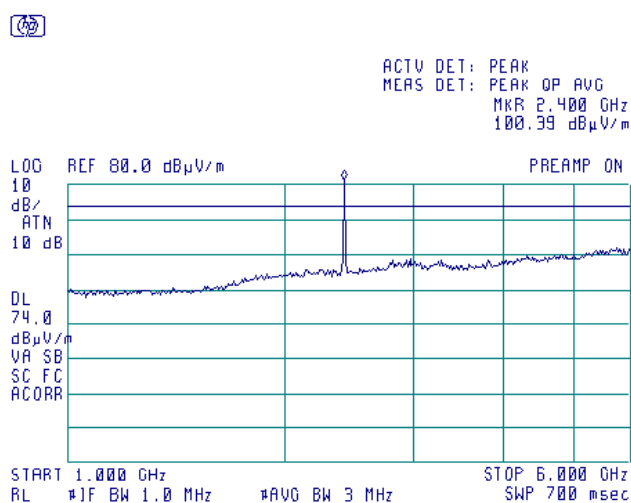

Plot 8.1.4 Radiated emission measurements above 1000 MHz, horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

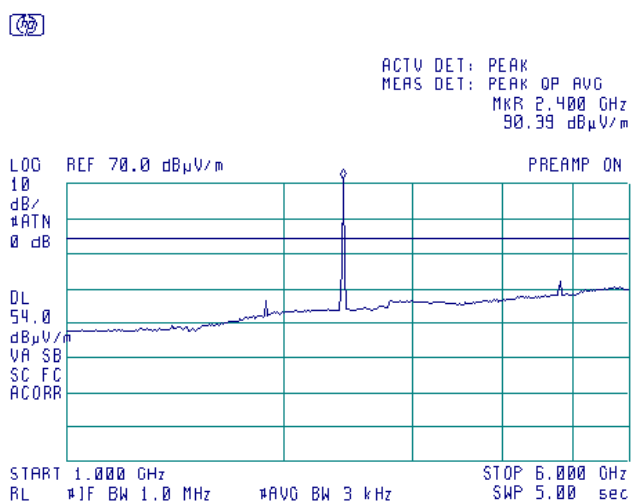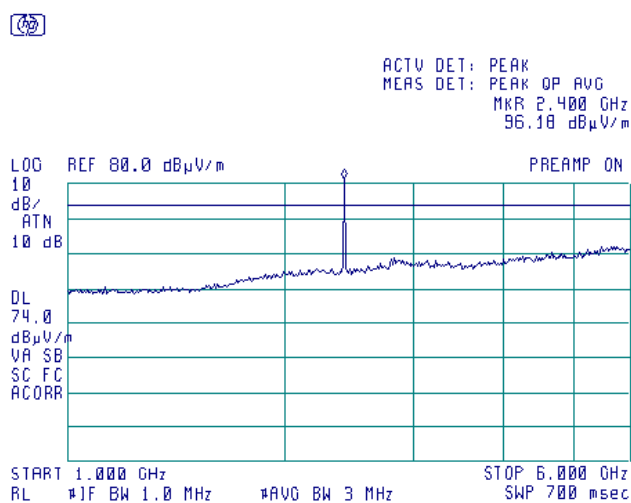

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	13-Jan-15	13-Jan-16
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	22-Oct-14	22-Oct-15
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	15-May-15	15-May-16
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	17-Apr-15	17-Apr-16
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	29-Apr-15	29-Apr-16
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	10-Feb-15	10-Feb-16
4164	DC Power Supply, 60V, 5A	Standig	605D	NA	11-Jan-15	11-Jan-16
4275	Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M	Mini-Circuits	CBL-6FT-SMNM+	70050	20-Nov-14	20-Nov-15
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-15	15-Mar-16
4575	EXA Signal Analyzer, 9 kHz - 26.5 GHz	Agilent Technologies	N9010A	MY480301 10	05-Feb-15	05-Feb-16
4722	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	51228701 001	26-Aug-14	26-Aug-15
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	12-Nov-14	12-Nov-15
4956	Active horn antenna, 18 to 40 GHz	COM-POWER CORPORATION	AHA-840	105004	26-Jan-15	26-Jan-16

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Radiated emissions at 10 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2014	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor, HL 4933

**Active Horn Antenna Factor Calibration**

1 GHz to 18 GHz

Equipment:			ACTIVE HORN ANTENNA		
Model:			AHA-118		
Serial Number:			701046		
Calibration Distance:			3 Meter		
Polarization:			Horizontal		
Calibration Date:			11/12/2014		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
1	40.96	-16.47	10	40.94	-1.97
1.5	41.21	-14.53	10.5	40.63	-1.06
2	41.44	-13.30	11	40.74	-1.50
2.5	41.71	-12.87	11.5	40.65	-0.52
3	41.96	-12.26	12	40.76	-0.15
3.5	42.14	-11.77	12.5	41.03	-0.85
4	42.13	-10.91	13	41.37	-0.81
4.5	41.79	-9.41	13.5	41.18	0.05
5	41.44	-7.54	14	40.98	0.36
5.5	40.91	-6.47	14.5	40.81	1.26
6	40.69	-5.48	15	40.65	0.25
6.5	40.64	-5.53	15.5	40.93	-1.05
7	40.76	-4.12	16	41.31	-1.44
7.5	40.94	-3.12	16.5	40.96	-0.80
8	40.68	-1.69	17	40.64	-0.02
8.5	40.08	-1.71	17.5	40.57	1.81
9	40.41	-1.86	18	40.08	3.63
9.5	41.21	-2.73			
Calibration according to ARP 958					
Antenna Factor to be added to receiver reading: Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m)					



HERMON LABORATORIES

Antenna factor, HL 4956

**Active Horn Antenna Factor Calibration**

18 GHz to 40 GHz

Equipment:			ACTIVE HORN ANTENNA		
Model:			AHA-840		
Serial Number:			105004		
Calibration Distance:			3 meter		
Polarization:			Horizontal		
Calibration Date:			1/26/2015		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
18	38.83	-1.06	29.5	42.47	-5.33
18.5	39.34	-2.65	30	41.91	-4.86
19	39.71	-3.88	30.5	41.60	-4.64
19.5	39.87	-4.35	31	41.52	-4.60
20	39.98	-3.97	31.5	41.56	-4.79
20.5	40.42	-3.68	32	41.80	-5.21
21	41.12	-4.06	32.5	42.29	-5.54
21.5	41.74	-5.46	33	42.79	-5.63
22	42.14	-6.22	33.5	42.88	-5.38
22.5	42.35	-6.42	34	42.62	-4.76
23	42.50	-6.59	34.5	42.63	-4.84
23.5	42.65	-6.82	35	43.15	-5.13
24	42.81	-7.01	35.5	43.91	-5.83
24.5	42.86	-7.37	36	44.59	-6.39
25	42.73	-7.53	36.5	45.04	-6.64
25.5	42.77	-7.45	37	45.08	-6.40
26	42.85	-7.21	37.5	44.82	-5.75
26.5	42.98	-7.17	38	44.16	-4.58
27	43.14	-7.22	38.5	42.90	-2.66
27.5	43.18	-7.32	39	42.39	-1.71
28	43.04	-7.10	39.5	43.76	-2.49
28.5	43.01	-6.73	40	45.98	-5.21
Calibration per ANSI C63.5: 2006 Standard Site Method, Equations 1-6 (3-antenna) Corrected Reading (dBμV/m) = Meter Reading (dBμV) + AFE(dB/m)					

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52

Cable loss
Test cable, Mini-Circuits, S/N 70050, 18 GHz, 1.8 m, SMA/M - N/M
CBL-6FT-SMNM+, HL 4275

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.08	5000	1.71	10200	2.64	15400	3.46
30	0.11	5100	1.73	10300	2.65	15500	3.47
50	0.14	5200	1.75	10400	2.66	15600	3.52
100	0.21	5300	1.76	10500	2.67	15700	3.55
200	0.30	5400	1.77	10600	2.70	15800	3.55
300	0.37	5500	1.82	10700	2.71	15900	3.55
400	0.43	5600	1.84	10800	2.72	16000	3.61
500	0.49	5700	1.86	10900	2.73	16100	3.62
600	0.54	5800	1.86	11000	2.75	16200	3.63
700	0.58	5900	1.89	11100	2.77	16300	3.62
800	0.62	6000	1.94	11200	2.78	16400	3.66
900	0.66	6100	1.95	11300	2.80	16500	3.71
1000	0.70	6200	1.96	11400	2.82	16600	3.71
1100	0.74	6300	1.97	11500	2.83	16700	3.67
1200	0.78	6400	2.01	11600	2.84	16800	3.69
1300	0.81	6500	2.03	11700	2.86	16900	3.74
1400	0.84	6600	2.02	11800	2.88	17000	3.73
1500	0.88	6700	2.02	11900	2.89	17100	3.71
1600	0.91	6800	2.05	12000	2.90	17200	3.73
1700	0.94	6900	2.06	12100	2.92	17300	3.77
1800	0.97	7000	2.07	12200	2.93	17400	3.77
1900	1.00	7100	2.07	12300	2.94	17500	3.76
2000	1.02	7200	2.08	12400	2.96	17600	3.76
2100	1.05	7300	2.11	12500	2.98	17700	3.78
2200	1.07	7400	2.13	12600	2.99	17800	3.80
2300	1.10	7500	2.15	12700	3.01	17900	3.79
2400	1.13	7600	2.16	12800	3.03	18000	3.78
2500	1.15	7700	2.18	12900	3.05		
2600	1.18	7800	2.21	13000	3.07		
2700	1.20	7900	2.24	13100	3.09		
2800	1.24	8000	2.25	13200	3.12		
2900	1.26	8100	2.26	13300	3.13		
3000	1.28	8200	2.29	13400	3.14		
3100	1.30	8300	2.31	13500	3.16		
3200	1.33	8400	2.33	13600	3.18		
3300	1.36	8500	2.33	13700	3.19		
3400	1.37	8600	2.34	13800	3.21		
3500	1.39	8700	2.36	13900	3.23		
3600	1.42	8800	2.38	14000	3.25		
3700	1.45	8900	2.39	14100	3.26		
3800	1.46	9000	2.40	14200	3.27		
3900	1.48	9100	2.42	14300	3.30		
4000	1.50	9200	2.45	14400	3.32		
4100	1.53	9300	2.46	14500	3.33		
4200	1.55	9400	2.48	14600	3.34		
4300	1.57	9500	2.50	14700	3.36		
4400	1.59	9600	2.52	14800	3.39		
4500	1.61	9700	2.54	14900	3.40		
4600	1.64	9800	2.56	15000	3.41		
4700	1.66	9900	2.58	15100	3.41		
4800	1.67	10000	2.60	15200	3.44		
4900	1.69	10100	2.61	15300	3.46		

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244, S/N 51228701 001
HL 4722

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.22	9000	2.93
100	0.30	9500	3.06
300	0.52	10000	3.16
500	0.66	10500	3.20
1000	0.93	11000	3.34
1500	1.15	11500	3.39
2000	1.33	12000	3.48
2500	1.49	12500	3.55
3000	1.64	13000	3.66
3500	1.77	13500	3.75
4000	1.90	14000	3.76
4500	2.03	14500	3.87
5000	2.17	15000	3.98
5500	2.30	15500	4.01
6000	2.39	16000	4.14
6500	2.51	16500	4.15
7000	2.59	17000	4.32
7500	2.67	17500	4.36
8000	2.76	18000	4.38
8500	2.84		

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT