



# TEST REPORT

|                                                                                                                                                                                                         |                                                          |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|--|
| <b>Eurofins KCTL Co.,Ltd.</b><br>65, Sinwon-ro, Yeongtong-gu,<br>Suwon-si, Gyeonggi-do, 16677, Korea<br>Tel: 82-70-4904-0113 Fax: 82-505-299-8311<br><a href="http://www.kctl.co.kr">www.kctl.co.kr</a> | Report No.:<br><b>KR26-SEF0109-A</b><br>Page (1) of (19) |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|--|

- 1. Client**
  - Name : Uniden America Corporation
  - Address : 301 International Parkway, Suite 460 Flower Mound,  
TX 75022
  - Date of Receipt : 2026-03-10
- 2. Use of Report** : -
- 3. Name of Product / Model** : RADAR DETECTOR / R8w
- 4. Manufacturer / Country of Origin** : ATTOWAVE CO., LTD / Korea
- 5. Date of Test** : 2026-03-20
- 6. Location of Test** : ☒ Permanent Testing Lab ☐ On Site Testing  
 (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)
- 7. Test method used** : ANSI C63.4:2014, FCC 02-211, Class B  
FCC Part 15 Subpart B
- 8. FCC ID** : AMWUA2406
- 9. Test Results** : Refer to the test result in the test report

|             |                                                   |                                                          |
|-------------|---------------------------------------------------|----------------------------------------------------------|
| Affirmation | Tested by<br><br>Name : Byunghwan Min (Signature) | Technical Manager<br><br>Name : Sunbin Hwang (Signature) |
|-------------|---------------------------------------------------|----------------------------------------------------------|

2026-04-06

**Eurofins KCTL Co.,Ltd.**

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.

## REPORT REVISION HISTORY

| Date       | Revision          | Page No |
|------------|-------------------|---------|
| 2026-03-30 | Originally issued | -       |
| 2026-04-06 | Note revision     | p.13    |
|            |                   |         |
|            |                   |         |
|            |                   |         |

*This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.*

Note. The report No. KR26-SEF0109 is superseded by the report No. KR26-SEF0109-A.

## General remarks for test reports

### Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

#### Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing


## Contents

|                                               |           |
|-----------------------------------------------|-----------|
| <b>1. Applicant information .....</b>         | <b>4</b>  |
| <b>2. Laboratory information .....</b>        | <b>5</b>  |
| <b>3. Test system configuration.....</b>      | <b>6</b>  |
| 3.1 Operation environment.....                | 6         |
| 3.2 Measurement Uncertainty .....             | 7         |
| <b>4. Description of EUT .....</b>            | <b>9</b>  |
| 4.1 General information.....                  | 9         |
| 4.2 Product description.....                  | 10        |
| 4.3 Auxiliary equipments .....                | 10        |
| 4.4 Test configuration .....                  | 11        |
| 4.5 Operating conditions .....                | 12        |
| <b>5. Summary of test results .....</b>       | <b>13</b> |
| 5.1 Summary of EMI emission test results..... | 13        |
| <b>6. Test results .....</b>                  | <b>14</b> |
| 6.1 Radiated Emission .....                   | 14        |

|                                                                                                                                                                                                         |                                                   |                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Eurofins KCTL Co.,Ltd.</b><br>65, Sinwon-ro, Yeongtong-gu,<br>Suwon-si, Gyeonggi-do, 16677, Korea<br>Tel: 82-70-4904-0113 Fax: 82-505-299-8311<br><a href="http://www.kctl.co.kr">www.kctl.co.kr</a> | Report No.:<br>KR26-SEF0109-A<br>Page (4) of (19) |    <b>KCTL</b> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------------------------------------------------------------------------------------|

## 1. Applicant information

**Applicant:** Uniden America Corporation  
**Address:** 301 International Parkway, Suite 460 Flower Mound, TX 75022  
  
**Manufacturer:** ATTOWAVE CO., LTD  
**Address:** 1005, 10F Leader's Tower, 286, Beotkkot-ro, Geumcheon-gu,  
 South Korea 08511

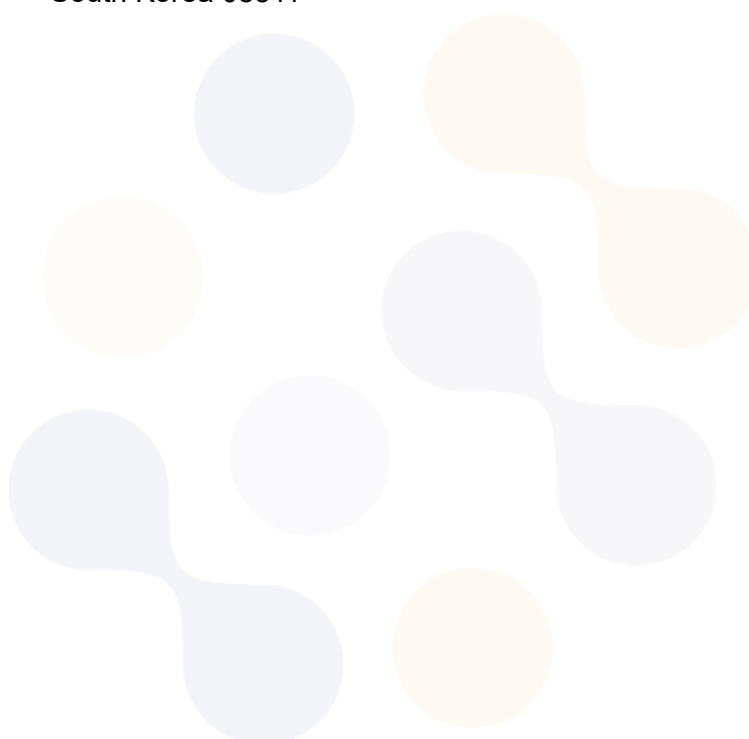

## 2. Laboratory information

### Address

#### **Eurofins KCTL Co.,Ltd. (Suwon Lab.)**

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: 82 70 4904 0113

Facsimile Number: 82 505 299 8311

FCC Site Designation No: KR0040

VCCI Member No.: 1980, VCCI Registration No.: R-20080, G-20078, C-20059, T-20056

Industry Canada Registration No. : 8035A

KOLAS NO.: KT231

### **SITE MAP**



### 3. Test system configuration

#### 3.1 Operation environment

|                   | Temperature | Humidity    | Pressure |
|-------------------|-------------|-------------|----------|
| Chamber 10 m (RE) | 21.9 °C     | 29.2 % R.H. | -        |

#### Test site

These testing items were performed following locations;

| Test item          | Test site     |
|--------------------|---------------|
| Conducted Emission | Shielded Room |
| Radiated Emission  | 10 m Chamber  |

## 3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability. Based on CISPR 16-4-2, the measurement uncertainty level with a 95 % confidence level was applied.

| Conducted Emission measurement (Confidence level about 95 %, $k = 2$ ) |                    |              |
|------------------------------------------------------------------------|--------------------|--------------|
| Shielded Room (CE#1)                                                   | 9 kHz ~ 150 kHz:   | 2.0 dB       |
|                                                                        | 150 kHz ~ 30 MHz:  | 2.3 dB       |
| Shielded Room (CE#2)                                                   | 9 kHz ~ 150 kHz:   | 2.0 dB       |
|                                                                        | 150 kHz ~ 30 MHz:  | 2.3 dB       |
| Radiated Emission measurement (Confidence level about 95 %, $k = 2$ )  |                    |              |
| 10 m Chamber (4F)                                                      | 30 MHz ~ 1 000 MHz | 3 m: 4.5 dB  |
|                                                                        |                    | 10 m: 4.3 dB |
|                                                                        | 1 GHz ~ 6 GHz      | 3 m: 5.2 dB  |
|                                                                        | 6 GHz ~ 18 GHz     | 3 m: 5.5 dB  |
|                                                                        | 18 GHz ~ 30 GHz    | 3 m: 5.5 dB  |
|                                                                        | 30 GHz ~ 40 GHz    | 3 m: 5.5 dB  |
| 10 m Chamber (2F)                                                      | 30 MHz ~ 1 000 MHz | 3 m: 4.5 dB  |
|                                                                        |                    | 10 m: 4.3 dB |
|                                                                        | 1 GHz ~ 6 GHz      | 3 m: 5.2 dB  |
|                                                                        | 6 GHz ~ 18 GHz     | 3 m: 5.5 dB  |

### 3.3 Measurement Program

These test items were performed by software programs;

| Test item          | Measurement Program    |                                   | Used                                |
|--------------------|------------------------|-----------------------------------|-------------------------------------|
| Conducted Emission | EP5/CE_Ver 5.4.0(TOYO) |                                   | <input type="checkbox"/>            |
| Radiated Emission  | 2F                     | EP10/RE_Ver 2021.01.000<br>(TOYO) | <input checked="" type="checkbox"/> |
|                    | 4F                     | EP5/RE_Ver 5.11.10(TOYO)          |                                     |

|                                                                                                                                                                                                         |                                                          |                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Eurofins KCTL Co.,Ltd.</b><br>65, Sinwon-ro, Yeongtong-gu,<br>Suwon-si, Gyeonggi-do, 16677, Korea<br>Tel: 82-70-4904-0113 Fax: 82-505-299-8311<br><a href="http://www.kctl.co.kr">www.kctl.co.kr</a> | Report No.:<br><b>KR26-SEF0109-A</b><br>Page (9) of (19) |    <b>KCTL</b> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------------------------|

## 4. Description of EUT

### 4.1 General information

#### Radar

- Receiver type: Dual conversion super-heterodyne
- Antenna type: Linear polarized, self-contained
- Detector type: Scanning frequency discriminator
- Frequency operation: X-band; 10.525 GHz  $\pm$  0.025 GHz  
 K-band; 24.075 GHz  $\pm$  0.175 GHz  
 Ka-band (super-wide); 34.550 GHz  $\pm$  1.150 GHz

#### Laser

- Receiver type: Pulsed laser signal receiver
- Detector type: Digital signal pulse width discriminator
- Optical sensor: Dual convex condenser lens and high-speed photo diode detector, 950nm  $\pm$  150nm (nanometers)

#### General

- Operating Temperature Range: -10° C to +70° C
- Storage Temperature Range: -30° C to +95° C
- Power requirements: 11V to 16V DC, 300 mA, negative ground
- Dimensions(HxWxL): 38.8 mm x 97.71 mm x 124.11 mm


## 4.2 Product description

|                          |                                                                                                                                  |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Type of product          | RADAR DETECTOR                                                                                                                   |
| Model name (Basic)       | R8w                                                                                                                              |
| Model name (Variant)     | -                                                                                                                                |
| Difference               | -                                                                                                                                |
| Serial no                | -                                                                                                                                |
| Testing voltage          | DC 12 V                                                                                                                          |
| Input rating             | DC 11 V ~ DC 16 V                                                                                                                |
| Internal clock frequency | 12 MHz                                                                                                                           |
| RF frequency             | Bluetooth, Wi-Fi 2.4 GHz                                                                                                         |
| FCC ID                   | AMWUA2406                                                                                                                        |
| Note                     | -The following accessories were provided by the manufacturer.<br>1) Cigar Jack<br>2) Bluetooth/WiFi Module<br>-FCC ID: AMWUA2404 |

## 4.3 Auxiliary equipments

| Type               | Model / Part # | S/N         | Manufacturer |
|--------------------|----------------|-------------|--------------|
| DC Power Supply    | E3632A         | KR94907353  | Agilent      |
| Button Controller  | -              | -           | -            |
| Radar Detectors    | R9             | 3A001231    | -            |
| Laser Transponders | -              | -           | -            |
| Headset            | IR-H70V        | -           | IRIVER       |
| Mobile Phone       | SM-S911N       | R3CWA01LH5Z | SAMSUNG      |
| Radar              | -              | -           | -            |

## 4.4 Test configuration

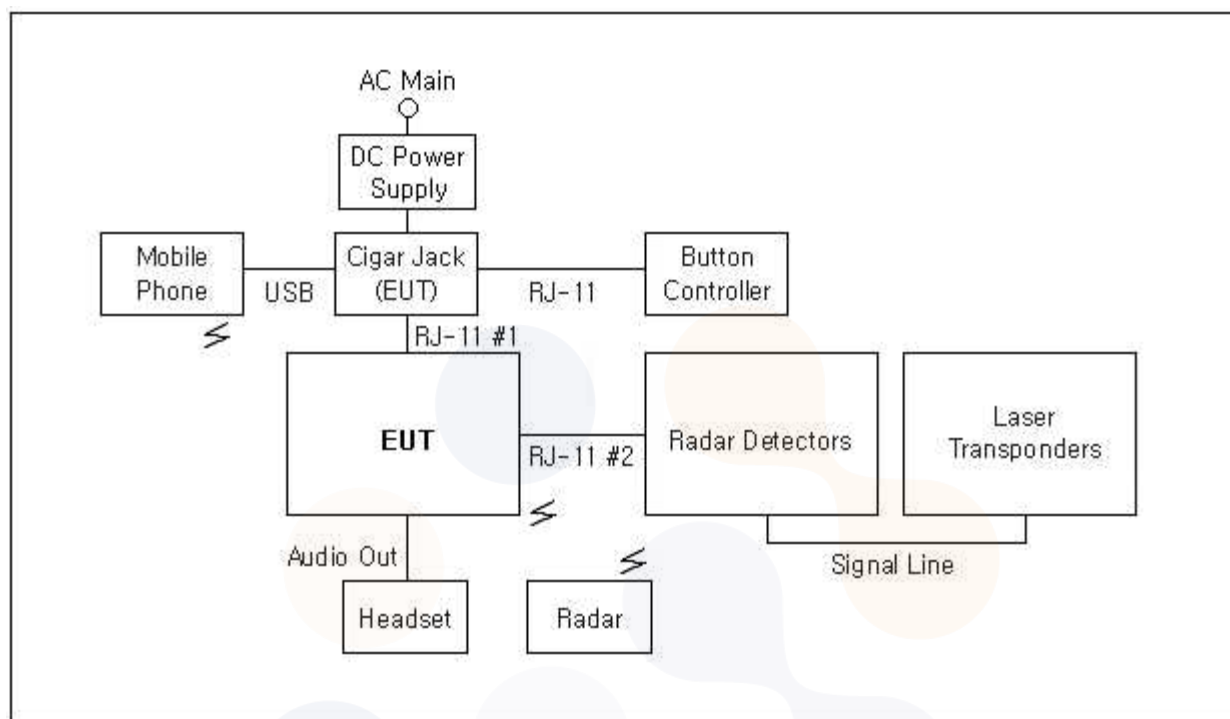

|   | Start            |             | End                |          | Cable      |          |
|---|------------------|-------------|--------------------|----------|------------|----------|
|   | Name             | I/O port    | Name               | I/O port | Length (m) | Spec.    |
| 1 | <b>EUT</b>       | RJ-11 #1    | Cigar Jack (EUT)   | -        | 1.5        | Unshield |
| 2 |                  | RJ-11 #2    | Radar Detectors    | -        | 1.8        | Unshield |
| 3 |                  | Audio Out   | Headset            | -        | 2.0        | Unshield |
| 4 | Cigar Jack (EUT) | Power       | DC Power Supply    | -        | 1.5        | Unshield |
| 5 |                  | RJ-11       | Button Controller  | -        | 2.0        | Unshield |
| 6 |                  | USB         | Mobile Phone       | -        | 0.5        | Shield   |
| 7 | Radar Detectors  | Signal Line | Laser Transponders | -        | 3.0        | Unshield |

## 4.5 Operating conditions

The EUT was configured as normal intended use.

| Test mode | Normal operating                                                                               |
|-----------|------------------------------------------------------------------------------------------------|
| Test #1   | The EUT is linked to user guidance.<br>During the test run, the EUT operates on the following: |
|           | Stand-by mode                                                                                  |
|           | X Band: (10.500 ~ 10.550) GHz                                                                  |
|           | K Band: (23.900 ~ 24.250) GHz                                                                  |
|           | Ka Band(Super-wide band): (33.400 ~ 35.700) GHz                                                |
|           | Laser: (950 ± 150) nm                                                                          |

## 5. Summary of test results

### 5.1 Summary of EMI emission test results

| Applied                             | Test items         | Test method                                                   | Result                       |
|-------------------------------------|--------------------|---------------------------------------------------------------|------------------------------|
| <input type="checkbox"/>            | Conducted Emission | ANSI C63.4:2014, FCC0 2-211<br>FCC Part 15 Subpart B, Class B | N/A<br>(Note <sup>1)</sup> ) |
| <input checked="" type="checkbox"/> | Radiated Emission  | ANSI C63.4:2014, FCC 02-211<br>FCC Part 15 Subpart B, Class B | Pass                         |

The data collected shows that EUT the complied with technical requirements of above rules part 15.109(h).

Note<sup>1)</sup>: Report Number: (KR26-SEF0110) for AC line conducted Emissions results of the system

## 6. Test results

### 6.1 Radiated Emission

|                      |                   |                   |             |
|----------------------|-------------------|-------------------|-------------|
| Testing voltage      | DC 12 V           |                   |             |
| Test facility        | 10 m Chamber (4F) |                   |             |
| Site validation date | Below 1 GHz       | 2026-03-13        |             |
|                      | Above 1 GHz       | 2025-11-12        |             |
| Test distance        | 3 m               |                   |             |
| Date                 | 2026-03-20        |                   |             |
| Temperature (°C)     | 21.9 °C           | Humidity (% R.H.) | 29.2 % R.H. |

#### 6.1.1 Limits of radiated emission measurement

|                 | Class A at 10 m QP(dB(μV/m)) |                     | Class B at 3 m QP(dB(μV/m)) |                     |
|-----------------|------------------------------|---------------------|-----------------------------|---------------------|
| Frequency [MHz] | FCC <sup>1)</sup>            | ISED (ICES Issue 7) | FCC <sup>1)</sup>           | ISED (ICES Issue 7) |
| 30-88           | 39.1                         | 40.0                | 40.0                        | 40.0                |
| 88-216          | 43.5                         | 43.5                | 43.5                        | 43.5                |
| 216-230         | 46.4                         | 46.4                | 46.0                        | 46.0                |
| 230-960         | 46.4                         | 47.0                | 46.0                        | 47.0                |
| Above 960       | 49.5                         | 49.5                | 54.0                        | 54.0                |

- <sup>1)</sup>: Alternative standard: CISPR, Pub. 22

- Test data in this section has been taken against the FCC 15.109(a) or (B) Limit as it is the most stringent limit.

By complying with more restrictive FCC 15.109 Limit compliance with the ICES-003 Issue 7 limit also demonstrated.

### 6.1.2 Measurement procedure

The test was done at a 10 m chamber with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables were folded back and forth forming a bundle 0.3 m to 0.4 m long and were hanged at a 0.4 m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### 6.1.3 Used equipments

Date : 2026-03-20

| Equipment                  | Model no.    | Serial no. | Makers        | Next Cal. Date | Used                                |
|----------------------------|--------------|------------|---------------|----------------|-------------------------------------|
| EMI TEST RECEIVER          | ESW44        | 103121     | R&S           | 2026.06.11     | <input checked="" type="checkbox"/> |
| Antenna Mast               | MA4640-XP-ET | -          | Innco Systems | -              | <input checked="" type="checkbox"/> |
| Turn Table                 | DT3000-2t    | -          | Innco Systems | -              | <input checked="" type="checkbox"/> |
| DOUBLE RIDGED HORN ANTENNA | 3117         | 00161083   | ETS-LINDGREN  | 2027.02.03     | <input checked="" type="checkbox"/> |
| AMPLIFIER                  | BBV9718C     | 00138      | SCHWARZBECK   | 2026.09.29     | <input checked="" type="checkbox"/> |

#### 6.1.4 Sample calculation

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follow:

$$\text{Result} = \text{M.R} + \text{C.F}(\text{A.F} + \text{C.L} + 6 \text{ dB Att} - \text{A.G})$$

M.R = Meter Reading

C.F = Correction Factor

A.F = Antenna Factor

C.L = Cable Loss

A.G = Amplifier Gain

6 dB Att = 6 dB Attenuator

If M.R is 30 dB, A.F 12 dB, C.L 5 dB, 6 dB, A.G 35 dB


The result is  $30 + 12 + 5 + 6 - 35 = 18 \text{ dB } (\mu\text{V/m})$

Bilog Antenna and ATTENUATOR (6 dB) were calibrated together.

AV = CAV : Abbreviation of CISPR Average

## 6.1.6 Radiated emission measurement result


11.7 GHz ~ 12.2 GHz

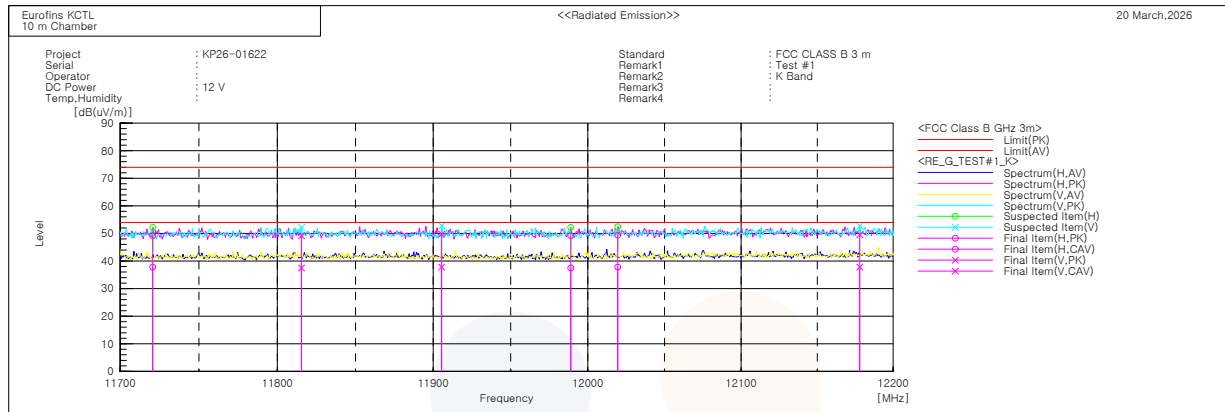

### Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | Reading CAV [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Result CAV [dB(μV/m)] | Limit PK [dB(μV/m)] | Limit AV [dB(μV/m)] | Margin PK [dB] | Margin CAV [dB] | Height [cm] | Angle [deg] |
|-----|-----------------|-----|---------------------|----------------------|---------------|----------------------|-----------------------|---------------------|---------------------|----------------|-----------------|-------------|-------------|
| 1   | 11720.660       | H   | 34.2                | 22.8                 | 15.0          | 49.2                 | 37.8                  | 74.0                | 54.0                | 24.8           | 16.2            | 233.0       | 124.0       |
| 2   | 11815.420       | V   | 34.1                | 22.4                 | 15.1          | 49.2                 | 37.5                  | 74.0                | 54.0                | 24.8           | 16.5            | 339.0       | 292.0       |
| 3   | 11905.420       | V   | 34.8                | 22.8                 | 15.0          | 49.8                 | 37.8                  | 74.0                | 54.0                | 24.2           | 16.2            | 140.0       | 214.0       |
| 4   | 11988.900       | H   | 34.0                | 22.3                 | 15.2          | 49.2                 | 37.5                  | 74.0                | 54.0                | 24.8           | 16.5            | 221.0       | 311.0       |
| 5   | 12019.500       | H   | 34.1                | 22.5                 | 15.3          | 49.4                 | 37.8                  | 74.0                | 54.0                | 24.6           | 16.2            | 350.0       | 260.0       |
| 6   | 12177.920       | V   | 33.8                | 22.0                 | 15.8          | 49.6                 | 37.8                  | 74.0                | 54.0                | 24.4           | 16.2            | 341.0       | 198.0       |


## 11.7 GHz ~ 12.2 GHz

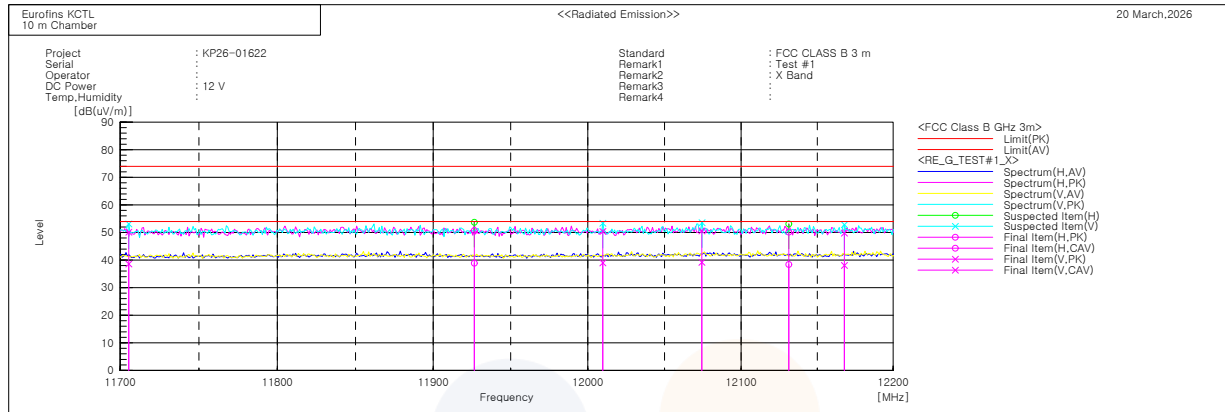

### Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(uV)] | Reading CAV [dB(uV)] | c.f [dB(1/m)] | Result PK [dB(uV/m)] | Result CAV [dB(uV/m)] | Limit PK [dB(uV/m)] | Limit AV [dB(uV/m)] | Margin PK [dB] | Margin CAV [dB] | Height [cm] | Angle [deg] |
|-----|-----------------|-----|---------------------|----------------------|---------------|----------------------|-----------------------|---------------------|---------------------|----------------|-----------------|-------------|-------------|
| 1   | 11705.450       | V   | 35.1                | 23.6                 | 15.0          | 50.1                 | 38.6                  | 74.0                | 54.0                | 23.9           | 15.4            | 375.0       | 325.0       |
| 2   | 11926.480       | H   | 35.7                | 23.9                 | 15.0          | 50.7                 | 38.9                  | 74.0                | 54.0                | 23.3           | 15.1            | 200.0       | 102.0       |
| 3   | 12009.710       | V   | 35.1                | 23.7                 | 15.3          | 50.4                 | 39.0                  | 74.0                | 54.0                | 23.6           | 15.0            | 174.0       | 279.0       |
| 4   | 12074.320       | V   | 35.0                | 23.6                 | 15.6          | 50.6                 | 39.2                  | 74.0                | 54.0                | 23.4           | 14.8            | 358.0       | 296.0       |
| 5   | 12131.330       | H   | 34.4                | 22.7                 | 15.7          | 50.1                 | 38.4                  | 74.0                | 54.0                | 23.9           | 15.6            | 170.0       | 73.0        |
| 6   | 12167.820       | V   | 34.0                | 22.3                 | 15.8          | 49.8                 | 38.1                  | 74.0                | 54.0                | 24.2           | 15.9            | 162.0       | 325.0       |

## 11.7 GHz ~ 12.2 GHz

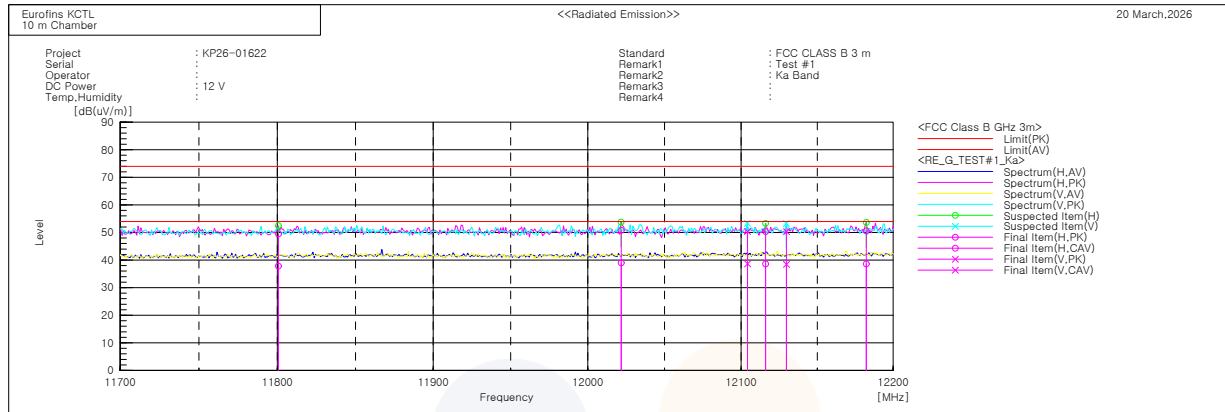

### Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(uV)] | Reading CAV [dB(uV)] | c.f [dB(1/m)] | Result PK [dB(uV/m)] | Result CAV [dB(uV/m)] | Limit PK [dB(uV/m)] | Limit AV [dB(uV/m)] | Margin PK [dB] | Margin CAV [dB] | Height [cm] | Angle [deg] |
|-----|-----------------|-----|---------------------|----------------------|---------------|----------------------|-----------------------|---------------------|---------------------|----------------|-----------------|-------------|-------------|
| 1   | 11800.620       | H   | 34.4                | 22.7                 | 15.1          | 49.5                 | 37.8                  | 74.0                | 54.0                | 24.5           | 16.2            | 297.0       | 231.0       |
| 2   | 12021.690       | H   | 35.5                | 23.7                 | 15.3          | 50.8                 | 39.0                  | 74.0                | 54.0                | 23.2           | 15.0            | 162.0       | 203.0       |
| 3   | 12104.170       | V   | 34.6                | 22.9                 | 15.8          | 50.4                 | 38.7                  | 74.0                | 54.0                | 23.6           | 15.3            | 145.0       | 93.0        |
| 4   | 12116.010       | H   | 34.5                | 22.8                 | 15.8          | 50.3                 | 38.6                  | 74.0                | 54.0                | 23.7           | 15.4            | 111.0       | 46.0        |
| 5   | 12129.670       | V   | 34.6                | 22.8                 | 15.7          | 50.3                 | 38.5                  | 74.0                | 54.0                | 23.7           | 15.5            | 359.0       | 230.0       |
| 6   | 12182.310       | H   | 34.8                | 22.8                 | 15.8          | 50.6                 | 38.6                  | 74.0                | 54.0                | 23.4           | 15.4            | 185.0       | 15.0        |

-End-