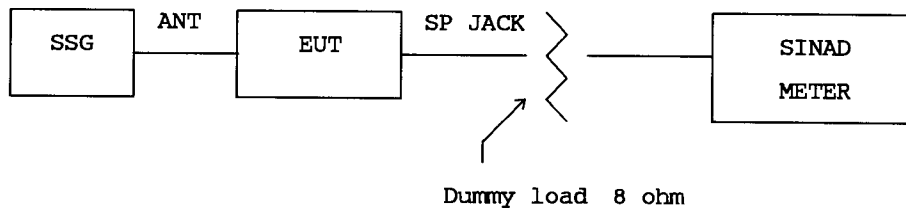


5-3 Test Result: Cellular image rejection

15.121(b)

Rationale:

In order for measuring image(spurious) rejection ratio on scanning receiver, use of one SSG method would be suitable rather than two or three SSG method since cellular image reception would be considered as unwanted reception solely at outside of cellular band.

Test set-up:

Conditions: AF Signal : 1 kHz
 Deviation : +/- 3kHz (for frequency modulation)
 Modulation : 60 % (for amplitude modulation)

Test frequencies: 824.01MHz, 836.52MHz, 849.00MHz
 869.01MHz, 881.52MHz, 894.00MHz

A) Initial screening

- A-1) Disable the output signal of SSG. Disconnect dummy load and enable the EUT to confirm the presence of audio noise on speaker.
- A-2) Set the EUT with "Squelched Threshold" to prevent audio signal.
- A-3) Set the frequency of SSG to cellular band, and apply 60dBuV of RF output to EUT. Note that 60dBuV signal level corresponds approx. 66dB above the "Squelched Threshold" sensitivity of -6dBuV (not, receiving sensitivity). This is approx. 28dB (= 66 - 38) above the FCC limit.
- A-4) Enable EUT and search the cellular frequencies on the all of receiving range.
- A-5) List the all of detected frequencies if EUT detects them, and the following steps shall be taken to determine the actual image rejection ratio individually.
- A-6) Repeat the above procedure for remaining frequencies.
- A-7) Go to Part B of the test.

B) Measuring the image rejection ratio

- B-1) Based on Initial screening, both of EUT and SSG shall be set to the frequency at which obtained in A-5) in the above. Connect the dummy load and set the squelch volume of EUT to unsquelched for obtaining the audio signal.
- B-2) Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT. SSG level at which obtaining the 12dB SINAD is receiving sensitivity of EUT (not, tight squelch sensitivity).
- B-3) Adjust the frequency of SSG to the corresponded cellular frequency associated with A-5. Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT.
- B-4) Image rejection ratio is obtained as differences between B-2) and B-3).

C) Test Data

Spec. : At least 38dB

UB-284Z (BCT-7)

Cellular Frequency (MHz)	Image/spurious (Frequency stopped on EUT) (MHz)	Image Rjection Ratio (dB)
824.01	475.1875	69.9
	852.7500	66.3
	898.9625	79.7
836.52	500.9125	72.5
	815.7375	59.4
	858.2250	61.5
849.00	29.2000	64.1
	481.5000	67.9
	494.7000	62.2
	811.8000	61.6
	818.4000	63.8
	819.8000	54.0
	849.9000	56.1
	853.0125	64.0
	854.4250	53.4
	955.5000	45.8
	851.8750	79.9
869.01	865.0000	64.4
	868.9250	74.0
	910.4750	63.4
881.52	120.2750	68.7
	489.5750	72.4
	859.2250	63.5
	895.7375	53.9
894.00	44.2000	71.9
	132.6000	62.8
	472.2000	64.4
	823.9250	57.1
	849.8000	57.6
	852.9000	62.6
	857.6625	63.2
	894.9000	55.3
	899.4250	54.2
	949.3000	53.9
	955.3125	56.2
	955.4375	56.4
	955.5625	56.3
	955.6875	56.1