


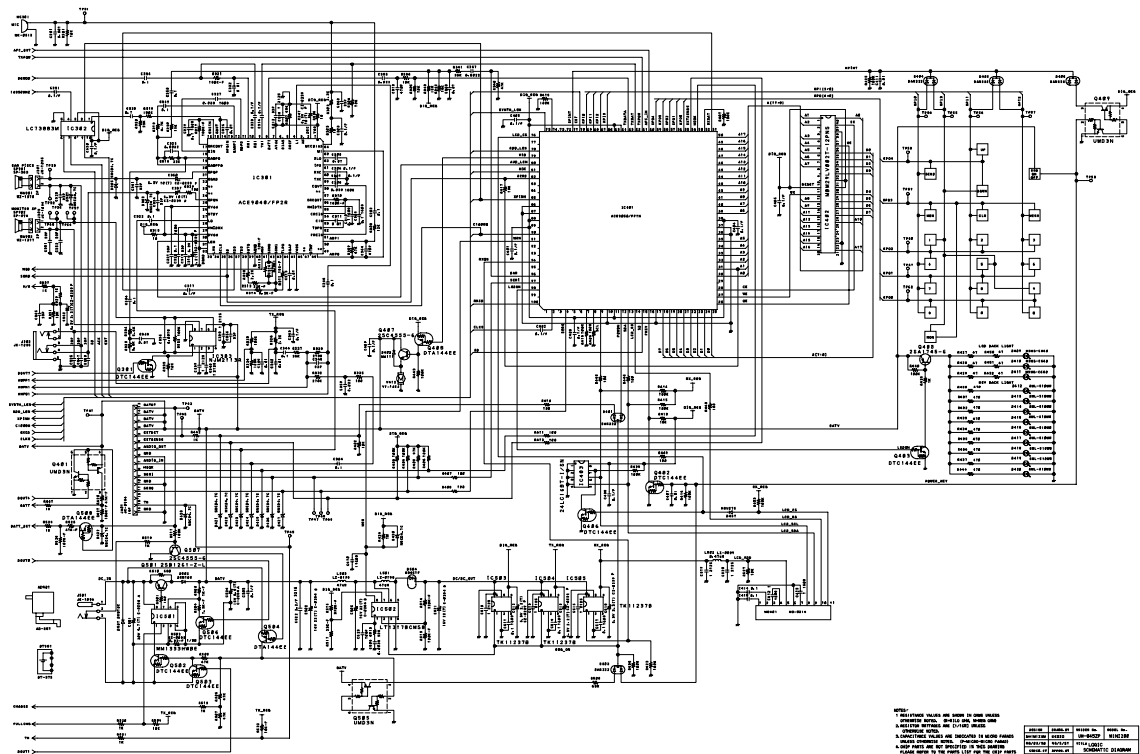

NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. 0=NO DATA, 9999=END
2. RESISTANCE DIFFERENCES ARE $\pm 1\%$ UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. 0=NO-READING DATA
4. CRIP PARTS ARE NOT SPECIFIED IN THIS DRAWING PLACING REFER TO THE PARTS LIST FOR THE CRIP
5. CRIP CAPACITORS TYPE ARE 100VDC UNLESS OTHERWISE NOTED.

DATE: 08	DRAWN BY:	REVISION No.	Q600: No.
REVISED: 09	CHECKED:	UN-0452P	MINGJIB
REVISED: 10	DATE: 12/12/17	TITLE LOGIC SCHEMATIC DIAGRAM	
DESIGNED BY:	APPROVED BY:	DRAWN BY:	
SCALE: No.		UNIDEN CORP.,	