


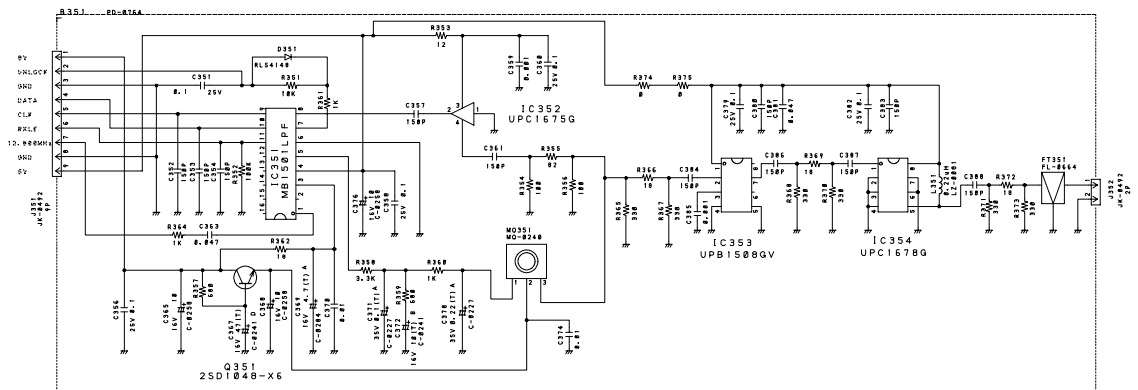



NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILLO OHM, M=MEG OHM)
2. RESISTOR WATTAGES ARE [1/10W] UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=PICTO-MICRO FARAD)
4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE [CH] (LESS THAN 100PPF) OR [C] (MORE THAN 100PPF) UNLESS OTHERWISE NOTED.

5. CHIP PARTS ARE NOT SPECIFIED IN THIS DRAWING PLEASE REFER TO THE PARTS LIST FOR THE CHIP PARTS.
6. CHIP CAPACITORS TYPE ARE [2125] UNLESS OTHERWISE NOTED.

DESIGN	DRAWN BY	UNIDEN No.	MODEL No.
		UL-107Z	MRU408L
CHECK BY	APPROV BY	TITLE RX PLL MODULE	
		SCHEMATIC DIAGRAM	
		DRAWING No.	
REV. No.		UNIDEN CORP.	

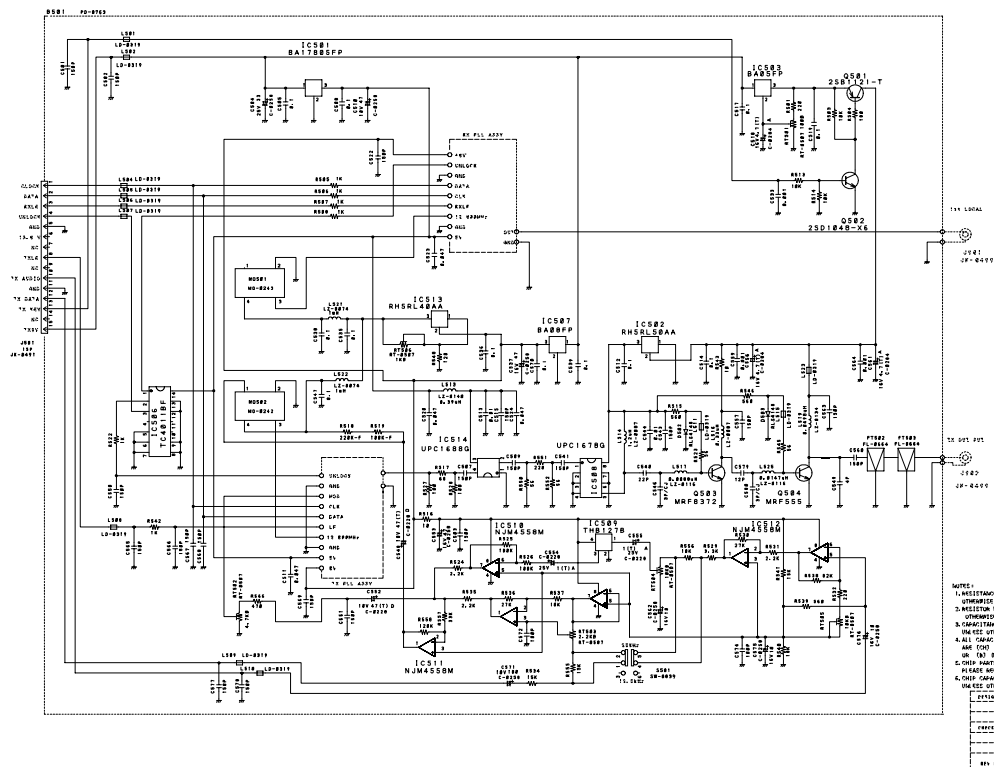

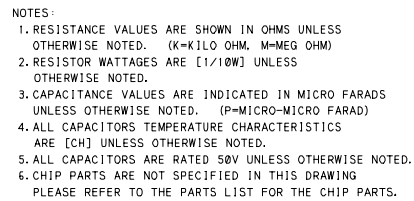

DESIGN	DRAWN BY	UNIDEN No.	MODEL No.
		UL-107Z	MRU400L
		TITLE TX PLL MODULE	
CHECK BY	APPRO BY	SCHEMATIC DIAGRAM	
		DRAWING No.	
REV. No		UNIDEN CORP.	