

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Test Lab Certificate No. 2470.01

COMPLIANCE TEST REPORT		FCC PART 95D RSS-236		EMC/RF MEASUREMENT REPORT	
Test Lab Information	Name	CELLTECH LABS INCORPORATED			
	Address	21-364 Lougheed Road, Kelowna, British Columbia V1X 7R8 Canada			
Test Lab Accreditation(s)	A2LA	ISO 17025:2005 (A2LA Test Lab Certificate No. 2470.01)			
Test Site Registration No.	FCC	Accredited Site			
	IC	3874A-1			
Applicant Information	Name	UNIDEN AMERICA CORPORATION			
	Address	6225 North State Highway 161, Suite 300 Irving, Texas 75038			
Measurement Standard(s) & Procedure(s) Applied	FCC Ind. Can.	47 CFR Part 95 Subpart D RSS-236			
	ANSI	TIA/EIA-382-A	C63.4-2003		
Device Classification(s)	FCC/IC	Licensed Non-Broadcast Station Transmitter (TNB)			
Device RF Exposure Category	FCC	Mobile			
Device Identifier(s)	FCC ID: Ind. Can.	AMWUT395 513C-UT395			
Application Type	FCC/IC	Certification			
Device Under Test (DUT)	Mobile CB Radio Transceiver with Weather Alert				
Date of Sample Receipt	28 July, 2013				
Date(s) of Evaluation	29 July, 2013 – 1 Aug 2013				
Device Model(s)	Bearcat PC787W				
Test Sample Serial No.(s)	TA Sample - Identical Prototype				
Transmit Frequency Range(s)	26.965 - 27.405 MHz				
Channels	1-40				
Rated TX Power	4W (36dBm)				
Modulation Type(s)	AM				
Emission Designator(s)	6K00A3E				
Antenna	External Whip, 0dBi nominal (3dBi maximum).				
Power Source(s) Tested	12 VDC Battery, DC Power Supply (13.8 V)				
This wireless device has demonstrated compliance with the applicable technical standards indicated in the measurement report and was tested in accordance with the measurement procedures specified in FCC 47 CFR Rule Parts 2, Part 15B and Part 95D, RSS-236, RSS-GEN ANSI TIA/EIA-382-A and ANSI C63.4-2003. I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results and statements contained in this report pertain only to the device(s) evaluated. This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.					
Test Report Approved By		Glen Westwell	8/8/2013	Celltech Labs Inc.	

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

TABLE OF CONTENTS

1.0 SCOPE	5
2.0 REFERENCES	5
2.1 Normative References	5
3.0 PASS/FAIL CRITERIA	5
4.0 FACILITIES AND ACCREDITATIONS	6
5.0 GENERAL INFORMATION	6
5.1 DUT Description & Specifications	6
Appendix A RF Output Power Measurement	7
Appendix B Modulation Characteristics (Modulation Limiting)	9
Appendix C Modulation Characteristics (Audio Frequency Response & Low Pass Filter)	11
Appendix D Occupied Bandwidth and Emission Mask	13
Appendix E Spurious Emissions at the Antenna Terminal	15
Appendix F Radiated Spurious Emissions	22
Appendix G Frequency Stability	27
Appendix H Device Photographs	29
END OF DOCUMENT	32

FIGURES

Figure B.5-1 - Setup Drawing – Modulation Characteristics	9
Figure C.5-1 - Setup Drawing – Audio Frequency Response	11
Figure D.5-1 - Setup Drawing – Occupied Bandwidth & Emission Mask	13
Figure E.5-1 - Setup Drawing – Occupied Bandwidth & Emission Mask	15
Figure F.6-1 - Setup Drawing – Detected Radiated Spurious Emissions	23
Figure G.5-1 - Setup Drawing – Frequency Stability	27

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 2 of 32

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Test Lab Certificate No. 2470.01

TEST SUMMARY					
Referenced Standard(s):		FCC CFR Title 47 Parts 2, 95(D), 15(B)			
Appendix	Description of Test	Procedure Reference	Limit Reference	Date of compliance test verification	Result
A	Conducted Power	ANSI/TIA/EIA-382-A	§2.1033, 95 RSS-236	8/8/2013	Pass
B	Modulation Limiting	ANSI/TIA/EIA-382-A	§2.1047, 95 RSS-236	8/8/2013	Pass
C	Audio Frequency Response	ANSI/TIA/EIA-382-A	§2.1047, 95 RSS-236	8/8/2013	Pass
D	Occupied Bandwidth and Emission Mask	ANSI/TIA/EIA-382-A	§2.1049, 95 RSS-236	8/8/2013	Pass
E	Conducted TX Spurious Emissions	ANSI/TIA/EIA-382-A	§2.1053, 95 RSS-236	8/8/2013	Pass
F	Radiated TX Spurious Emissions	ANSI/TIA/EIA-382-A	§2.1053, 95 RSS-236	8/8/2013	Pass
	Radiated Spurious Emissions	ANSI C63.4:2003	§15 Subpart B ICES-003	8/8/2013	Pass
G	Frequency Stability	ANSI/TIA/EIA-382-A	§2.1055, 95 RSS-236	8/8/2013	Pass

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 32

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Test Lab Certificate No. 2470.01

REVISION LOG

Revision	Description	Implemented By	Implementation Date
1.0	1st Release	Glen Westwell	8/8/2013

Test Report Prepared By	Date	QA Review By	Date
Glen Westwell	8/8/2013	Angela Muir	8/8/2013

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert	Frequency Range:	26.965 - 27.405 MHz			
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 32	

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Test Lab Certificate No. 2470.01

1.0 SCOPE

This report outlines the measurements made and results collected during electromagnetic emissions testing of the Uniden America Corporation CB Radio Transceiver FCC/IC: AMWUT395/513C-UT395. The measurement results were applied against the applicable EMC requirements and limits outlined in the technical rules and regulations set forth in the Federal Communication's Commission Code of Federal Regulations Title 47 Part 2, Part 95 Subpart D and RSS-236.

2.0 REFERENCES

2.1 Normative References

ANSI/ISO 17025:2005	General Requirements for competence of testing and calibration laboratories
IEEE/ANSI C63.4:2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/TIA/EIA-382-A	Citizens Band Radio Service Amplitude Modulated (AM) Transceivers Operating in the 27 MHz Band
CFR Title 47 Part 2	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR Title 47 Part 95	Code of Federal Regulations Title 47: Telecommunication Part 95: Personal Radio Services Subpart D - Citizens Band (CB) Radio Service
Industry Canada	RSS-236, RSS-GEN

3.0 PASS/FAIL CRITERIA

Unless otherwise noted in the Appendices, the pass/fail criteria is the limit set forth in the reference standards. The DUT is considered to have passed the requirements if the data collected during the described measurement procedure is no greater than the specified limits as defined. The pass/fail statements made in this report only apply to the unit tested.

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert		Frequency Range:		26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
						Page 5 of 32

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	
					Test Lab Certificate No. 2470.01

4.0 FACILITIES AND ACCREDITATIONS

The facilities used in collecting the test results outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site conforms to the requirements set forth in ANSI C63.4 and is filed and listed with Industry Canada under File Number IC 3874A-1. Celltech test site is listed with the FCC as an accredited test facility.

5.0 GENERAL INFORMATION

5.1 DUT Description & Specifications

Device Type	Mobile CB Radio Transceiver with Weather Alert	
Device Model(s)	Bearcat PC787W	
Test Sample Serial No.	T/A Sample - Identical Prototype	
Device Identifier(s)	FCC ID: Ind. Can.:	AMWUT395 513C-UT395
Transmit Frequency Range	26.965 - 27.405 MHz (Chan. 1-40)	
No. of Channels	40	
Manuf. Rated Output Power	36.0dBm (Conducted)	
RF Output Power Measured:	35.7 (Conducted)	
Modulation	AM	
Emission Designator	6k00A3E Bn = 2M M = 3000 Bn = 6000	
DUT Power Source	12 VDC Battery, DC Power Supply (13.8 V)	
Type of Equipment	Mobile Licensed Non-Broadcast Station Transmitter (TNB)	
Deviation(s) from standard/procedure	None	
Modification of DUT	None	
Applicable Standards	EIA/TIA-382-A, FCC CFR 47 Part 95, RSS-GEN, RSS-236	

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Test Lab Certificate No. 2470.01

A.4 TEST RESULTS: COMPLIES

Transmit Power			
	Measured (dBm)	Rated (dBm)	Margin (dB)
Ch. 1	35.6	36.0	0.4
Ch. 20	35.7	36.0	0.3
Ch. 40	35.5	36.0	0.5

A.5 SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Glen Westwell
Lab Manager
Celltech Labs Inc.

8/8/2013

Date

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 32

 Testing and Engineering Services Ltd	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Appendix B Modulation Characteristics (Modulation Limiting)

B.1 REFERENCES

Normative Reference Standard FCC CFR 47 §2.1047, Part 95D, 95.637, RSS-236, 5.3.2

B.2 LIMITS

FCC §2.1047 Modulation can not exceed 100%

B.3 ENVIRONMENTAL CONDITIONS

Temperature 15 +/- 5 °C

Humidity 40 +/- 10 %


Barometric Pressure 101 +/- 3 kPa

B.4 EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	CAL DUE
00028	HP	8901A	Modulation Analyzer	21Jul14
00027	HP	8903B	Audio Generator/Analyzer	21Jul14

B.5 SETUP DRAWING

Figure B.5-1 - Setup Drawing – Modulation Characteristics



Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

 Testing and Engineering Services Ltd	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Appendix C Modulation Characteristics (Audio Frequency Response & Low Pass Filter)

C.1 REFERENCES

Normative Reference Standard FCC CFR 47 §2.1047, TIA/EIA-382-A, Para 25.

C.2 LIMITS

FCC §2.1047 a) *Voice modulated communication equipment.* A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.

C.3 ENVIRONMENTAL CONDITIONS

Temperature 25 +/- 5 °C

Humidity 40 +/- 10 %


Barometric Pressure 101 +/- 3 kPa

C.4 EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	CAL DUE
00028	HP	8901A	Modulation Analyzer	21Jul14
00027	HP	8903B	Audio Generator/Analyzer	21Jul14

C.5 SETUP DRAWING

Figure C.5-1 - Setup Drawing – Audio Frequency Response



Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Appendix D Occupied Bandwidth and Emission Mask

D.1 REFERENCES

Normative Reference Standard	FCC CFR 47 §2.1049, §95.635, RSS-236, 5.4.4
Procedure Reference / Description	Occupied bandwidth was performed by connecting the output of the DUT to the input of a spectrum analyzer. The unit was supplied a 2500Hz audio signal adjusted to 50% plus 16dB.

D.2 LIMITS

§95.635 RSS-236, 5.4.4	At least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth. At least $53 + 10 \log_{10}(T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%.
---------------------------	--

D.3 ENVIRONMENTAL CONDITIONS


Temperature	10 °C
Humidity	40 +/- 10 %
Barometric Pressure	101 +/- 3 kPa

D.4 EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	CAL DUE
00051	HP	8566B	Spectrum Analyzer RF Section	03-May-14
00047	HP	85685A	RF Preselector	05-May-14
00027	HP	8903B	Audio Generator/Analyzer	21-Jul-14

D.5 SETUP DRAWING

Figure D.5-1 - Setup Drawing – Occupied Bandwidth & Emission Mask



Applicant:	Uniden America Corporation	FCC ID:	AMWUT395	Model(s):	Bearcat PC787W	
		Ind. Can.:	513C-UT395			
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 32

Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013
Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0
Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site



Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Test Lab Certificate No. 2470.01

Appendix E Spurious Emissions at the Antenna Terminal

E.1 REFERENCES

Normative Reference Standard FCC CFR 47 §2.1051, Part 95D, 95.635; RSS-236, 5.4.4, RSS-GEN

E.2 LIMITS

Part 95D: 95.635
RSS-236: 5.4.4

$53 + 10 \log(P_o) = 59\text{dBc}$, $60\text{dBc} \geq$ twice the fundamental frequency.

E.3 ENVIRONMENTAL CONDITIONS

Temperature 25 +/- 5 °C

Humidity 40 +/- 10 %


Barometric Pressure 101 +/- 3 kPa

E.4 EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	CAL DUE
00027	HP	8903B	Audio Generator/Analyzer	21-Jul-14
00099	Mini-Circuits	BHP-50	High Pass Filter	Cal on use
00241	R&S	FSU40	Spectrum Analyzer	04-Sep-15

E.5 SETUP DRAWING

Figure E.5-1 - Setup Drawing – Occupied Bandwidth & Emission Mask



Notes:

- The spectrum was searched from 9 kHz to 3GHz.
- All detected emissions have been reported.


Detected Emissions

Emission Frequency	Level	Level	Limit	Margin
[MHz]	[dBm]	[dBc]	[dBc]	[dB]
16.96	-28.23	64.23	60	-4.23
23.69	-27.69	63.69	60	-3.69
30.71	-32.66	68.66	60	-8.66
54.4	-31.51	67.51	60	-7.51

Applicant:	Uniden America Corporation	FCC ID:	AMWUT395	Model(s):	Bearcat PC787W	
		Ind. Can.:	513C-UT395			
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 15 of 32

 Testing and Engineering Services Ltd	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

E.6 TEST RESULTS: COMPLIES

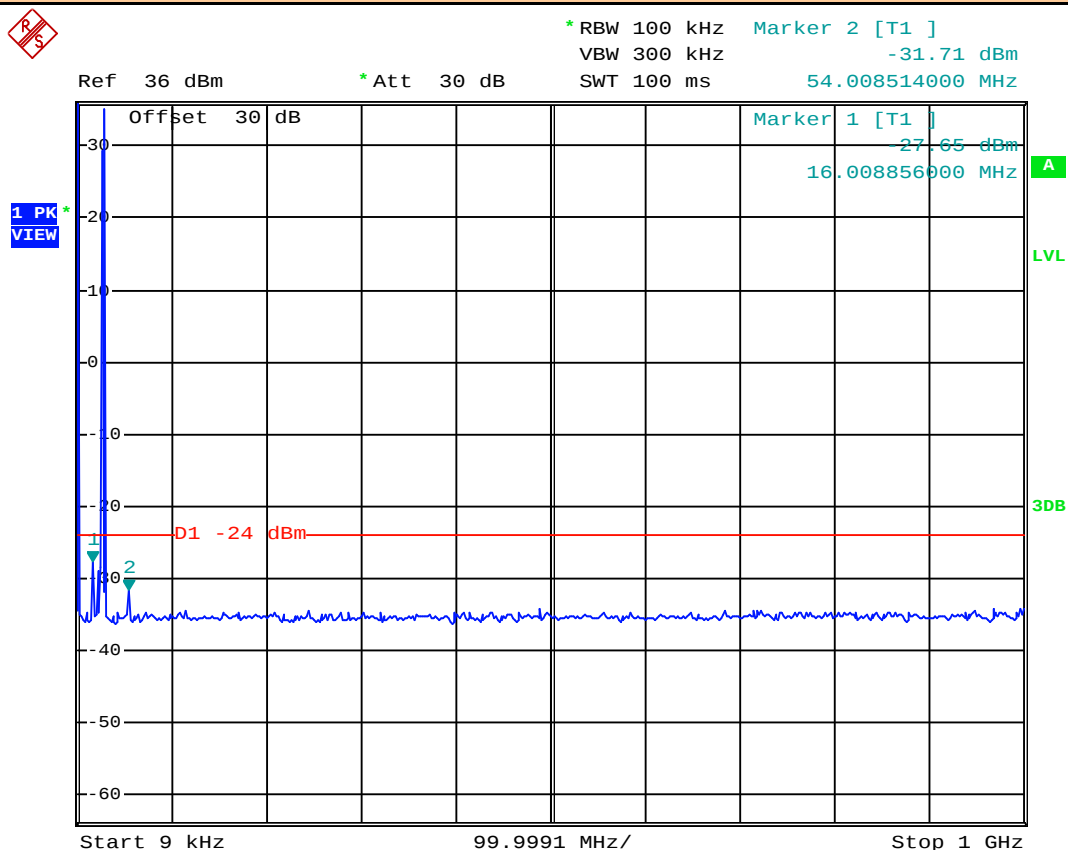


Date: 29.JUL.2013 14:00:58

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	


E.7 TEST RESULTS: COMPLIES

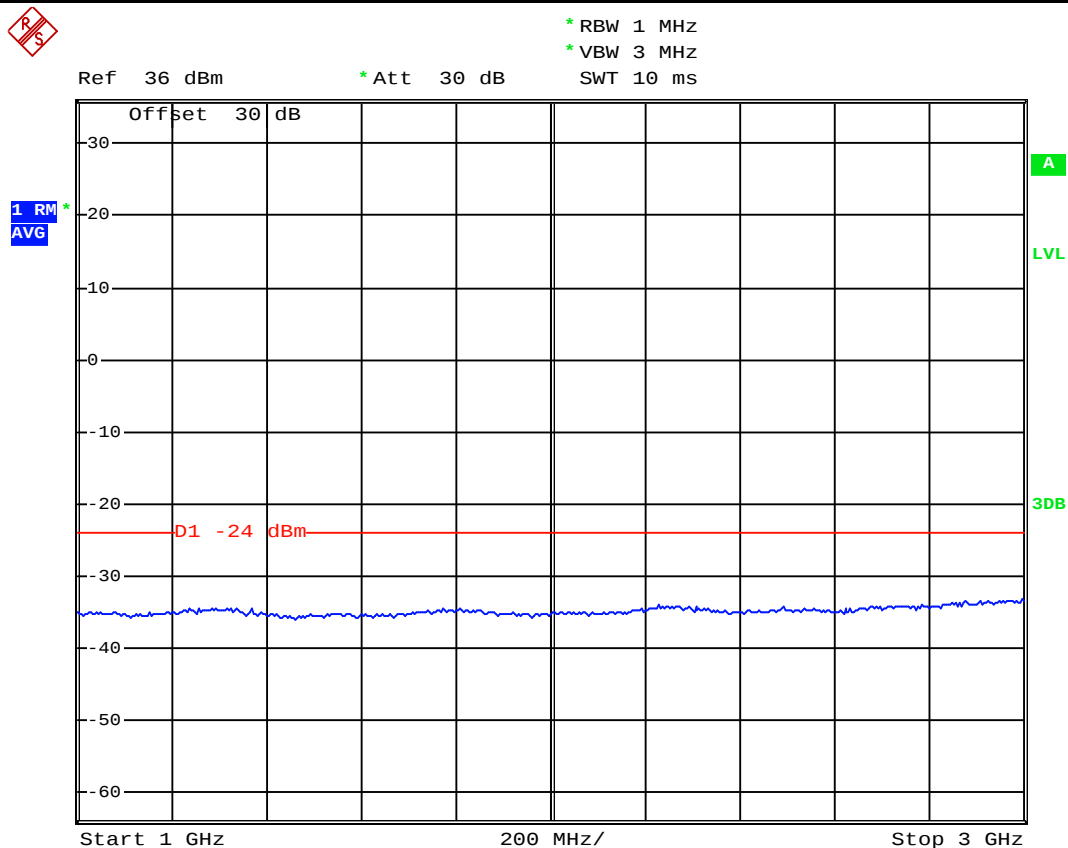

Date: 29.JUL.2013 14:09:45

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				


E.8 TEST RESULTS: COMPLIES

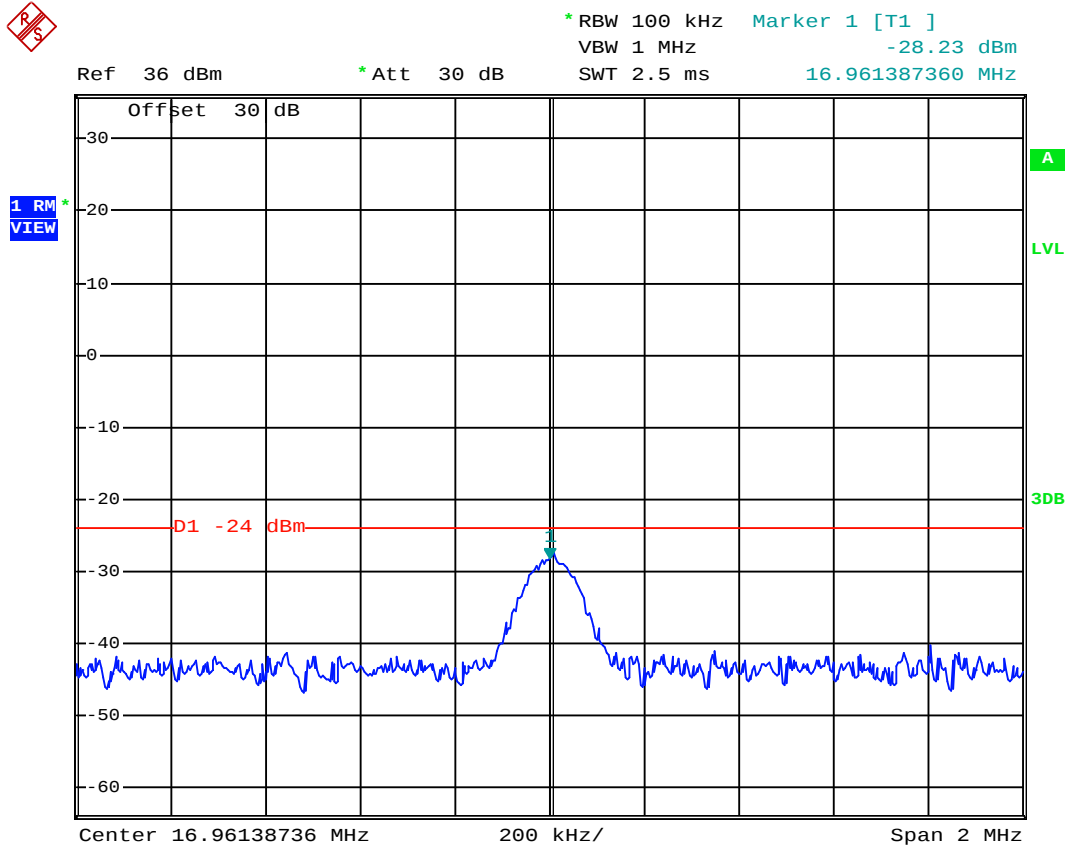

Date: 29.JUL.2013 14:05:38

 Testing and Engineering Services Ltd	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	


E.9 TEST RESULTS: COMPLIES

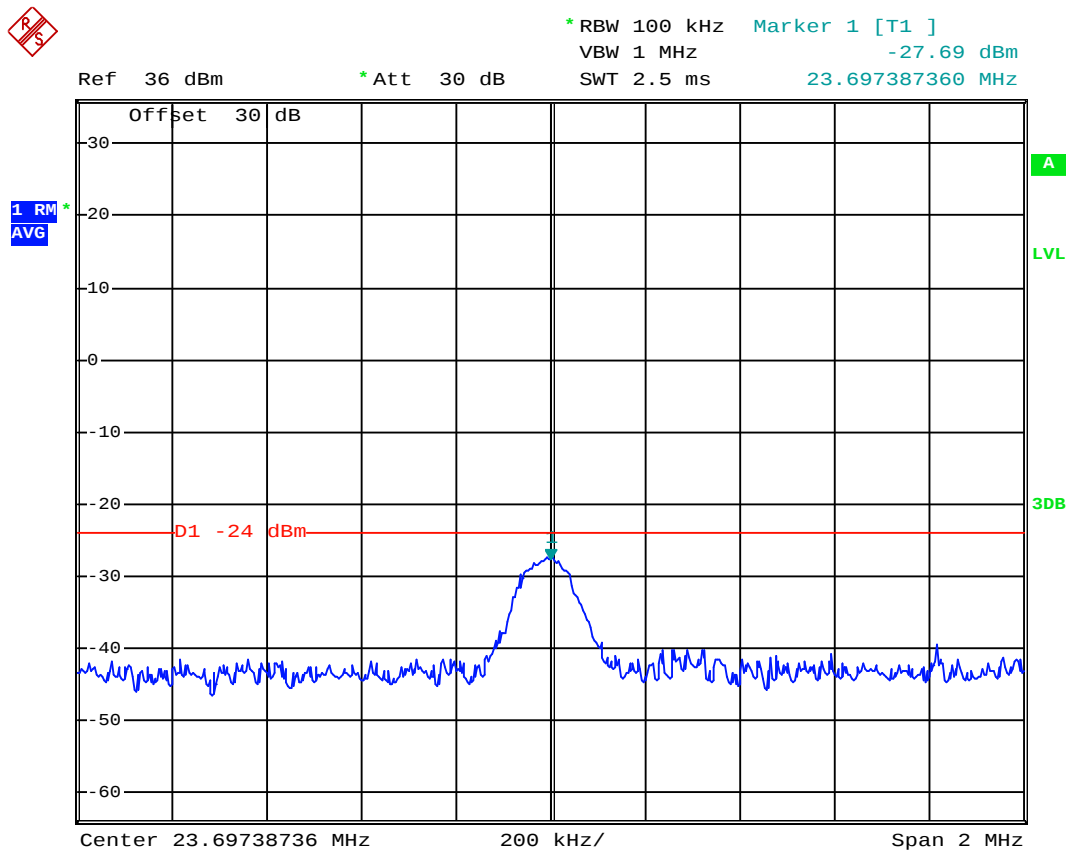

Date: 29.JUL.2013 14:04:43

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

E.12 TEST RESULTS: COMPLIES

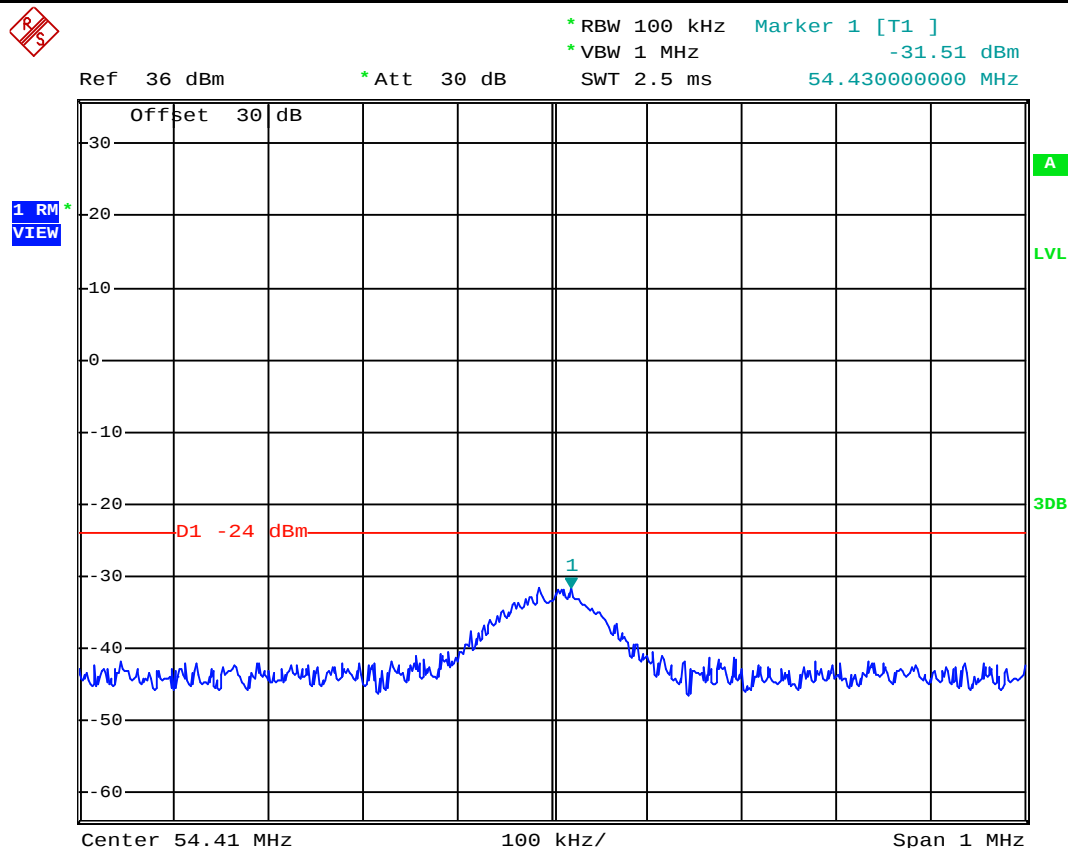

Date: 29.JUL.2013 14:19:36

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Test Lab Certificate No. 2470.01

Appendix F Radiated Spurious Emissions

F.1 REFERENCES

Normative Reference Standard	FCC CFR 47 §2.1053, §95.635, §15B: RSS-236, 5.4, RSS-GEN
Procedure Reference	ANSI/TIA/EIA-382-A, ANSI C63.4

F.2 LIMITS

FCC §95.635 RSS-236, 5.4	At least 53 + 10 log ₁₀ (T) dB on any frequency removed from the center, 60 dB twice removed from fundamental.
-----------------------------	---

F.3 ENVIRONMENTAL CONDITIONS

Temperature	18 °C
Humidity	40 +/- 10 %
Barometric Pressure	101 +/- 3 kPa

F.4 EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	CAL DUE
00072	EMCO	2075	Mini-mast	cnr
00073	EMCO	2080	Turn Table	cnr
00071	EMCO	2090	Multi-Device Controller	cnr
00241	R&S	FSU40	Spectrum Analyzer	04-Sep-15
00050	Chase	CBL-6111A	Bilog Antenna	03-May-15
00055	EMCO	3121C	Dipole Antenna	27-Aug-14
00051	HP	8566B	Spectrum Analyzer RF Section	03-May-14
00049	HP	85650A	Quasi-peak Adapter	06-May-14
00047	HP	85685A	RF Preselector	05-May-14
00006	R & S	SMR 20	Signal Generator (10MHz-40GHz)	30-Apr-14
00239	Mini-Ccts	ZFL-1000VH	Amplifier 10MHz-1GHz	Cal on use
00007	Gigatronics	8652A	Power Meter	04-May-14
00014	Gigatronics	80701A	Power Sensor	04-May-14

cnr = calibration not required

Applicant:	Uniden America Corporation	FCC ID:	AMWUT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert	Ind. Can.:	513C-UT395	Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 22 of 32	

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Test Lab Certificate No. 2470.01

F.7 TEST RESULTS: COMPLIES

Radiated Emissions: Signal Substitution (Fig. A&B)



TX: 27.205 MHz	Ant. Polarity	Emission Level	Substitution Level	Antenna Gain	Amp Gain	Corrected Level	Limit	Margin
(MHz)		(dBuV)	(dB)	(+dBd)	(-dB)	(dBm)	(dBm)	(dB)
54.41	V/H	N.D.	N.D.	-1.45	21.4	N.D.	-24.0	N.D
81.6	V/H	N.D.	N.D.	-0.05	21.5	N.D.	-24.0	N.D
108.82	V	47.4	-57.5	-0.15	21.6	-79.25	-24.0	-55.25
136.025	H	43.9	-65.3	-0.55	21.6	-87.45	-24.0	-63.45
163.23	H	61.33	-46.8	-1.05	21.6	-69.45	-24.0	-45.45
190.435	H	61.82	-51.1	-0.95	21.6	-73.65	-24.0	-49.65
217.64	H	36.25	-52.2	-0.75	21.6	-74.55	-24.0	-50.55
244.845	H	34.51	-73.2	-0.25	21.6	-95.05	-24.0	-71.05
272.05	H	37.0	-71.4	-0.35	21.6	-93.35	-24.0	-69.35

Note: N.D. = Not Detected.

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert		Frequency Range:		26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 32

Data from Chamber, Fig. A



Part 15B, Radiated Emissions plot using peak Detector

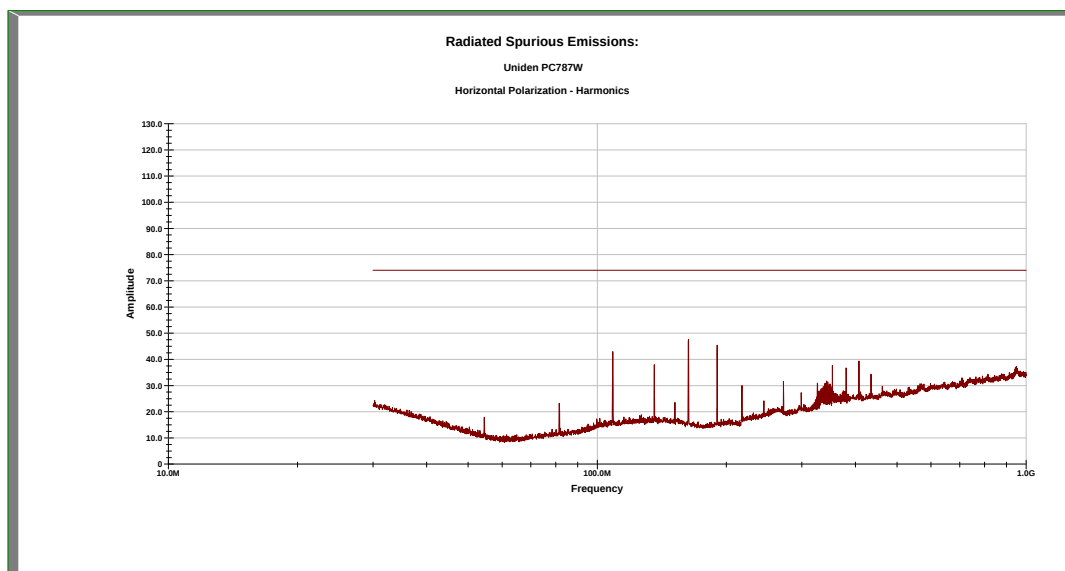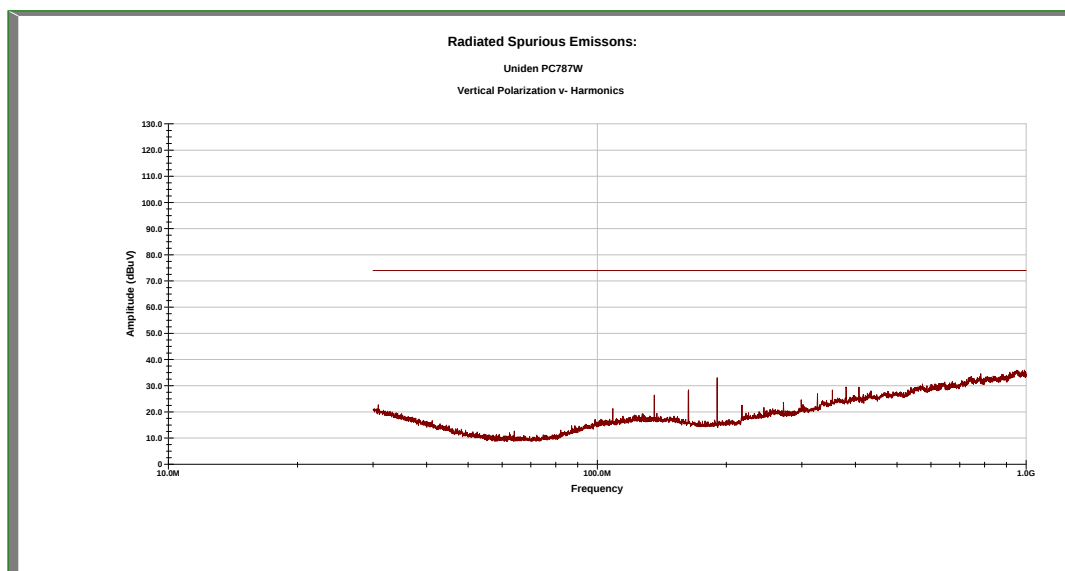

 Testing and Engineering Services Ltd	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Data from Chamber, Fig. A

Part 15B, Radiated Emissions Plots using Peak Detector (RX)

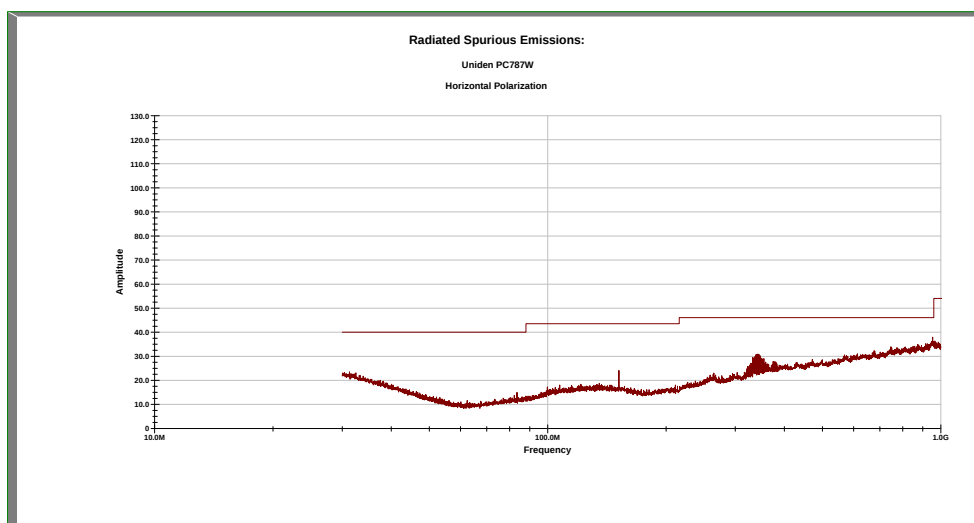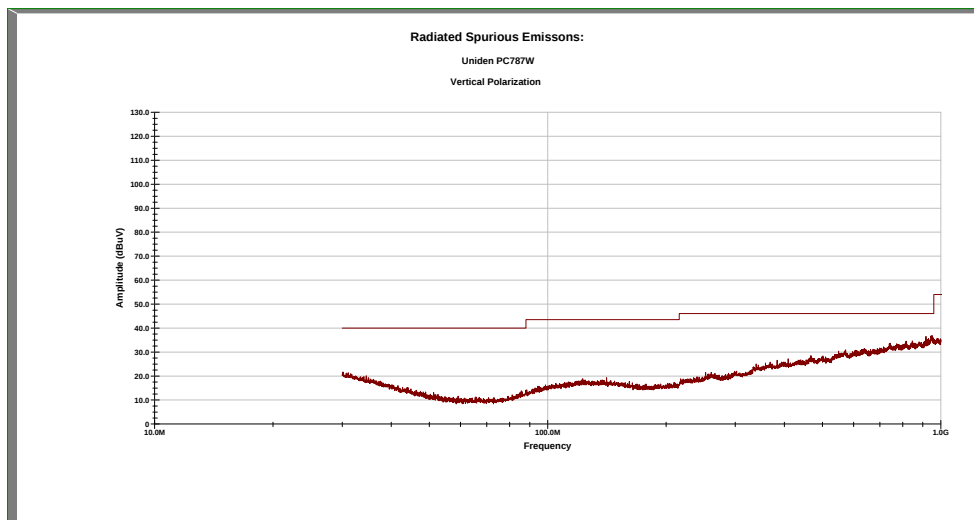

F.8 SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Glen Westwell
Lab Manager
Celltech Labs Inc.

8/8/2013

Date

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

Page 26 of 32

 Testing and Engineering Services Ltd	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Appendix G Frequency Stability

G.1 REFERENCES

Normative Reference Standard	FCC CFR 47 §2.1055, §95.625, RSS-GEN
Procedure Reference / Description	The frequency stability shall be measured with variation of ambient temperature as follows: (1) From -30° to +50° centigrade.

G.2 LIMITS

FCC §95.625	Each channel must be maintained within a frequency tolerance of 0.005%.
-------------	---

G.3 ENVIRONMENTAL CONDITIONS


Temperature	25 +/- 5 °C
Humidity	40 +/- 10 %
Barometric Pressure	101 +/- 3 kPa

G.4 EQUIPMENT LIST

ASSET NUMBER	MANUFACTURER	MODEL	DESCRIPTION	CAL DUE
na	ESPEC	ECT-2	Heater/Refrigerator	na
0003	HP	53181A	Frequency Counter	09-Apr-14
na	HP	E3611A	DC Power Supply	Cal on use
00234	VWR	61161-378	Temperature Humidity Monitor	10-Dec-14

G.5 SETUP DRAWING

Figure G.5-1 - Setup Drawing – Frequency Stability

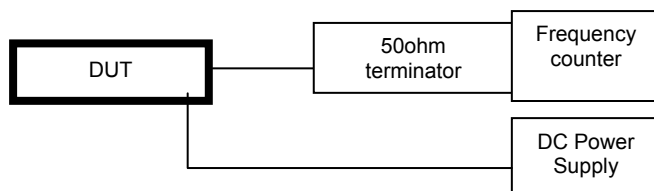

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Test Lab Certificate No. 2470.01

G.6 TEST RESULTS : COMLIES

Channel: 20

Temperature (degrees C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Deviation (%)
-30	27.205 000	27.205 209	+0.0007682%
-20	27.205 000	27.204 992	-0.0000294%
-10	27.205 000	27.204 983	-0.0000625%
0	27.205 000	27.205035	+0.0001287%
10	27.205 000	27.205 045	+0.0001654%
20	27.205 000	27.204 946	-0.0001985%
30	27.205 000	27.204 880	-0.0004411%
40	27.205 000	27.204 878	-0.0004484%
50	27.205 000	27.204 862	-0.0005073%

Remark: Pass/fail criteria for frequency tolerance is 0.005%

Battery %	Assigned frequency (MHz)	Measured Frequency (MHz)	Deviation %
-15%	27.205 000	27.204 945	0.0002022%
0%	27.205 000	27.204 946	0.0001895%
15%	27.205 000	27.204 946	0.0001895%

G.7 SIGN-OFF

I attest to the accuracy of the data. All measurements reported herein were performed by me and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements.



Glen Westwell
Lab Manager
Celltech Labs Inc.

8/8/2013

Date

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Appendix H Device Photographs

H.1 DUT PHOTOS



Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 32

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

Test Lab Certificate No. 2470.01


H.2 DUT PHOTOS



Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert			Frequency Range:	26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 32

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

H.3 DUT PHOTOS

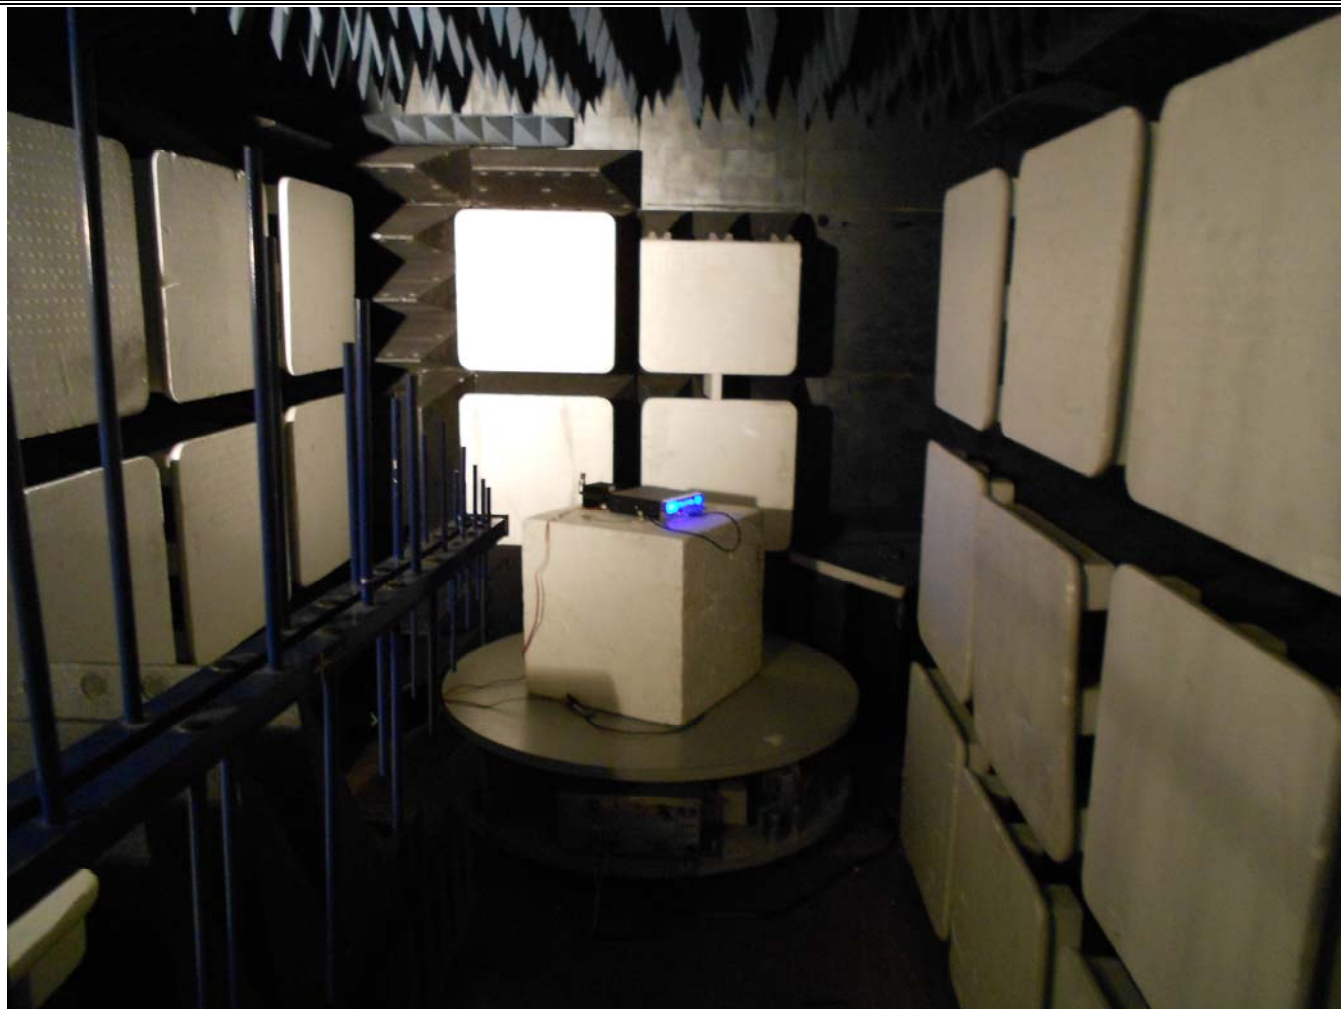

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert		Frequency Range:		26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 32

	Test Report Serial No.:	060713AMW-T1247-E95D	Test Report Issue Date:	8/8/2013	 Test Lab Certificate No. 2470.01
	Measurement Date(s):	29/06/2013-1/07/2013	Test Report Revision No.:	1.0	
	Rule Part(s) Applied:	FCC 47 CFR §2, §95D, RSS-236, RSS_GEN	Test Site Registration(s):	FCC Accredited Site	

END OF DOCUMENT

Applicant:	Uniden America Corporation	FCC ID: Ind. Can.:	AMWUT395 513C-UT395	Model(s):	Bearcat PC787W	
DUT Type:	AM Mobile CB Radio Transceiver with Weather Alert		Frequency Range:		26.965 - 27.405 MHz	
2013 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 32