

TEST REPORT


Application No.: SZEM2103002421CR
Applicant: Uniden America Corporation
Address of Applicant: 6225 N. State Highway 161 Suite 300, Irving, Texas 75038 United States
Manufacturer: Uniden Holding Corporation
Address of Manufacturer: 2-12-7, Hacchobori, Chuo-ku, Tokyo, Japan, 104-8512
Factory: Uniden Vietnam Limited
Address of Factory: Lot 5. 1, Tan Truong Industrial Zone, Cam Giang District, Hai Duong Province, Vietnam

Equipment Under Test (EUT):
EUT Name: VHF Marine Radio with GPS and Bluetooth
Model No.: UM725GBT
Trade Mark: Uniden
Standard(s) : IEC 60945:2002
 EN 60945:2002

Date of Receipt: 2021-03-05
Date of Test: 2021-03-08 to 2021-04-03
Date of Issue: 2021-04-06

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-04-06		Original

Authorized for issue by:				
		Edison Li		
		Edison Li/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at DC Power Input Port (150kHz-30MHz)	IEC 60945:2002 EN 60945:2002	EN 60945:2002/IEC 60945:2002 clause 9.2.2	EN 60945:2002/IEC 60945:2002 clause 9.2	Pass
Radiated Emissions (Below 1GHz)		EN 60945:2002/IEC 60945:2002 clause 9.3.2	EN 60945:2002/IEC 60945:2002 clause 9.3	Pass
Radiated Emissions (Above 1GHz)		EN 60945:2002/IEC 60945:2002 clause 9.3.2	EN 60945:2002/IEC 60945:2002 clause 9.3	Pass
Radiated Emissions (Below 30MHz)		EN 60945:2002/IEC 60945:2002 clause 9.3.2	EN 60945:2002/IEC 60945:2002 clause 9.3	Pass

Immunity Part				
Item	Standard	Method	Requirement	Result
Electrostatic Discharge	IEC 60945:2002 EN 60945:2002	EN 61000-4-2:2009	EN 60945:2002/IEC 60945:2002 clause 10.9	Pass
Radiated Immunity (80MHz-2GHz)		EN 61000-4-3:2006+A1:2008+A2:2010	EN 60945:2002/IEC 60945:2002 clause 10.4	Pass
Electrical Fast Transients-Burst at Power Port		EN 61000-4-4:2012	EN 60945:2002/IEC 60945:2002 clause 10.5	Pass
Conducted Immunity at Power port (150kHz-80MHz)		EN 61000-4-6:2014	EN 60945:2002/IEC 60945:2002 clause 10.3	Pass
Power Supply Failure		EN 61000-4-11:2004 +A1:2017	EN 60945:2002/IEC 60945:2002 clause 10.3	Pass
Acoustic noise and signals		EN 60945:2002/IEC60945:2002 clause 11.1.2	EN 60945:2002/IEC60945:2002 clause 11.1	Pass
Compass safe distance		EN 60945:2002/IEC 60945:2002 clause 11.2.2	EN 60945:2002/IEC 60945:2002 clause 11.2	Pass
Protection against accidental access to dangerous voltages		EN 60945:2002/IEC 60945:2002 clause 12.1.2	EN 60945:2002/IEC 60945:2002 clause 12.1	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Electromagnetic radio frequency radiation	IEC 60945:2002/EN 60945:2002	EN 60945:2002/IEC 60945:2002 clause 12.2.2	EN 60945:2002/IEC 60945:2002 clause 12.2	Pass



3 Contents

	Page
1 COVER PAGE	1
X	
2 TEST SUMMARY	3
3 CONTENTS	5
4 GENERAL INFORMATION	7
4.1 DETAILS OF E.U.T.	7
4.2 DESCRIPTION OF SUPPORT UNITS	7
4.3 MEASUREMENT UNCERTAINTY	8
4.4 TEST LOCATION.....	9
4.5 TEST FACILITY.....	9
4.6 DEVIATION FROM STANDARDS.....	9
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
4.8 EMS MONITOR.....	9
5 EQUIPMENT LIST	10
6 RADIO SPECTRUM MATTER TEST RESULTS	14
6.1 ELECTROMAGNETIC RADIO FREQUENCY RADIATION	14
6.1.1 E.U.T. Operation	14
6.1.2 Test Setup Diagram.....	14
6.1.3 Measurement Procedure and Data.....	14
7 EMISSION TEST RESULTS	15
7.1 CONDUCTED EMISSIONS AT DC POWER INPUT PORT (150KHZ-30MHZ)	15
7.1.1 E.U.T. Operation	15
7.1.2 Test Mode Description	15
7.1.3 Test Setup Diagram.....	15
7.1.4 Measurement Procedure and Data.....	15
7.2 RADIATED EMISSIONS (BELOW 30MHZ)	20
7.2.1 E.U.T. Operation	20
7.2.2 Test Mode Description	20
7.2.3 Test Setup Diagram.....	20
7.2.4 Measurement Procedure and Data.....	20
7.3 RADIATED EMISSIONS (BELOW 1GHZ)	22
7.3.1 E.U.T. Operation	22
7.3.2 Test Mode Description	22
7.3.3 Test Setup Diagram.....	22
7.3.4 Measurement Procedure and Data.....	22
7.4 RADIATED EMISSIONS (ABOVE 1GHZ)	25
7.4.1 E.U.T. Operation	25
7.4.2 Test Mode Description	25
7.4.3 Test Setup Diagram.....	25



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com

7.4.4	Measurement Procedure and Data.....	25
8	IMMUNITY TEST RESULTS	28
8.1	ELECTROSTATIC DISCHARGE	29
8.1.1	Test Setup Diagram	29
8.1.2	E.U.T. Operation	29
8.1.1	Test Mode Description	29
8.1.2	Test Condition and Results:.....	29
8.2	RADIATED IMMUNITY (80MHz-2GHz)	31
8.2.1	Test Setup Diagram	31
8.2.2	E.U.T. Operation	31
8.2.3	Test Mode Description	31
8.2.4	Test Condition and Results:.....	31
8.3	ELECTRICAL FAST TRANSIENTS-BURST AT POWER PORT	33
8.3.1	Test Setup Diagram	33
8.3.2	E.U.T. Operation	33
8.3.1	Test Mode Description	33
8.3.2	Test Condition and Results:.....	33
8.4	CONDUCTED IMMUNITY AT POWER PORT (150kHz-80MHz)	35
8.4.1	Test Setup Diagram	35
8.4.2	E.U.T. Operation	35
8.4.3	Test Mode Description	35
8.4.4	Test Condition and Results:.....	35
8.5	POWER SUPPLY FAILURE	37
8.5.1	Test Setup Diagram	37
8.5.2	E.U.T. Operation	37
8.5.3	Test Mode Description	37
8.5.4	Test Condition and Results:.....	37
8.6	ACOUSTIC NOISE AND SIGNALS	38
8.6.1	Test Setup Diagram	38
8.6.2	E.U.T. Operation	38
8.6.1	Test Mode Description	38
8.6.2	Test Condition and Results:.....	38
8.7	COMPASS SAFE DISTANCE.....	39
8.7.1	Test Setup Diagram	39
8.7.2	E.U.T. Operation	39
8.7.3	Test Mode Description	39
8.7.4	Test Condition and Results:.....	39
8.8	PROTECTION AGAINST ACCIDENTAL ACCESS TO DANGEROUS VOLTAGES	41
8.8.1	Test Setup Diagram	41
8.8.2	E.U.T. Operation	41
8.8.3	Test Mode Description	41
8.8.4	Test Condition and Results:.....	42
9	TEST SETUP PHOTO	43
10	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	47



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 13.8V
Cable(s):	DC Cable: 150cm Unshielded; NMEA0183+Ext Speaker Cable: 100cm Unshielded;
Sample Type:	Mobile device
Internal Source:	More than 108MHz
Transceiver frequency Range:	156.025MHz-161.60MHz(TX) 156.050MHz-163.275MHz(RX, includes WX band)
DSC Transmitter Frequency Range:	156.525MHz(CH70), Meets Global DSC Class D standards.
Modulation Type:	VHF:FM for Analog DSC:FSK
Frequency Spacing:	VHF: 25KHz
Emission Type:	16K0G3E for VHF 16K0G2B for DSC
Rated Output Power:	25W/1W for VHF/DSC;
VHF/DSC Antenna Connectors:	SO-239(50 ohm, External Antenna)
VHF/DSC Antenna Gain:	3dBi
Type of Equipment:	Ship stations

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
DC power	ZHAOXIN	RXN-305D	REF. No.SEA2700
Coaxial Attenuator	Provided by client	TS4	HYT168793

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at DC Power Input Port (150kHz-30MHz)	± 3.0dB
Radiated Emissions (Below 1GHz)	± 4.5dB
Radiated Emissions (Above 1GHz)	± 4.8
Radiated Emissions (Below 30MHz)	± 3.1dB
Electrostatic Discharge	± 6 %
Radiated Immunity (80MHz-2GHz)	± 1.64dB
Electrical Fast Transients-Burst at Power Port	± 5 %
Conducted Immunity at Power port (150kHz-80MHz)	± 0.96dB
Power Supply Failure	± 4 %
Acoustic noise and signals	± 1.64dB
Compass safe distance	± 5 %
Protection against accidental access to dangerous voltages	± 5 %
Electromagnetic radio frequency radiation	± 0.75dB

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

4.8 EMS Monitor

Visual: Monitored the signaling lamps and data throughput.

Audio: None.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at DC Power Input Port (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2019-06-13	2022-06-12
EMI Test Receiver	Rohde&Schwarz	ESCI	SEM004-02	2020-03-24	2021-03-23
Switch	WEINSCHTEL ENGINEERING	1506A	SEN009-01	N/A	N/A
Matching Pad	anzac	PT-75	SEN009-02	N/A	N/A
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2020-07-10	2021-07-09
LISN	Schwarzebeck	NNBM8124	SEM007-08	2020-09-23	2021-09-22
LISN	Schwarzebeck	NNBM8124	SEM007-09	2020-09-23	2021-09-22

Radiated Emissions (Below 30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018-03-31	2021-03-30
MXE EMI receiver(3Hz-3.6GHz)	KEYSIGHT	N9038A	SEM004-16	2019-12-16	2020-12-15
Trilog-Broadband Antenna(25MHz-2GHz)	Schwarzbeck	VULB9168	SEM003-18	2019-08-08	2022-08-07
Pre-amplifier (9kHz-1GHz)	Sonoma Instrument Co	310N	SEM005-04	2020-04-09	2021-04-08
Loop Antenna (9kHz-30MHz)	ETS-Lindgren	6502	SEM003-08	2020-08-14	2023-08-13
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2020-07-10	2021-07-09

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2020-07-19	2023-07-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2020-11-02	2021-11-01
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-02	2019-05-24	2022-05-23
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2020-04-01	2021-03-31
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2020-07-10	2021-07-09

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
EXA Signal Analyzer	Agilent Technologies Inc	N9010A	SEM004-12	2020-04-09	2021-04-08
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2020-09-23	2021-09-22
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2020-07-10	2021-07-09
Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2020-11-14	2023-11-13
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2020-04-01	2021-03-31

Electrostatic Discharge					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
ESD Generator	TESEQ AG	NSG 437	SEM019-02	2020-04-17	2021-04-16
ESD Ground Plane	SGS(3m*3m)	N/A	SEN006-01	N/A	N/A
ESD Simulator	SCHAFFNER	NSG 438	SEM019-01	2020-04-07	2021-04-06

Radiated Immunity (80MHz-2GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Fully-Anechoic Chamber 2	Chang Zhou Zhong Shuo	854	SEM001-05	2020-07-10	2021-07-09
Power Sensor	Rohde&Schwarz	NRP-Z91	SEM009-09	2020-03-23	2021-03-22
Stacked Log.-Per.-Broadband Antenna	Schwarzbeck	STLP 9129	SEM003-25	N/A	N/A
Signal Generator	Rohde&Schwarz	SMB100A	SEM006-11	2020-03-23	2021-03-22
Broadband Amplifier	Rohde&Schwarz	BBA150-BC250	SEM005-12	2020-09-23	2021-09-22
Broadband Amplifier	Rohde&Schwarz	BBA150-D110	SEM005-13	2020-04-01	2021-03-31
Broadband Amplifier	Rohde&Schwarz	BBA150-E60	SEM005-16	2020-05-21	2021-05-20
Measurement Software	Rohde&Schwarz	EMC32 V9.25.00	N/A	N/A	N/A
Amplifier	Amplifier Research	75A250A	SEM005-11	2020-04-01	2021-03-31
Wire ISN	Rohde&Schwarz	ENY 22	EMC0114	N/A	N/A
Audio Analyzer	Rohde&Schwarz	UPL	SEM008-01	2020-09-23	2021-09-22
Conditioning Amplifier	Brüel&Kjaer	2690-OS2	SEM005-10	2020-04-14	2021-04-13
Mouth Simulator	Brüel&Kjaer	4227	SEM017-01	2020-04-14	2021-04-13



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, EMC Laboratory.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Signal Source	Brüel&Kjaer	4231	SEM017-02	2020-03-25	2021-03-24
Coupling/Decoupling Network	SCHLODER	CDN-M2+3	SEM007-10	2020-09-23	2021-09-22
Universal Radio Communication Tester	Rohde&Schwarz	CMU200	SEM010-06	2019-09-23	2021-09-22

Electrical Fast Transients-Burst at Power Port					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	AUDIX	N/A	SEM001-08	2019-06-13	2022-06-12
Ultra Compact Simulator	EM Test	UCS 500N7	SEM018-02	2020-03-26	2021-03-25
Capacitive Coupling Clamp	EM Test	HFK	SEM018-03	2020-03-26	2021-03-25

Conducted Immunity at Power port (150kHz-80MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	AUDIX	N/A	SEM001-08	2019-06-13	2022-06-12
RF-Generator	SCHAFFNER	NSG 2070	SEM006-01	2020-10-22	2021-10-21
Coupling/Decoupling Network	SCHAFFNER	CDN M016	SEM007-03	2020-04-09	2021-04-08
EM Clamp	SCHAFFNER	KEMZ 801	SEM013-01	2020-09-23	2021-09-22

Power Supply Failure					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	AUDIX	N/A	SEM001-08	2019-06-13	2022-06-12
Ultra Compact Simulator	EM Test	UCS 500N7	SEM018-02	2020-03-26	2021-03-25
Capacitive Coupling Clamp	EM Test	HFK	SEM018-03	2020-03-26	2021-03-25
High Speed Coupling/Decoupling Network	EM Test	CNI 508N2	SEM018-05	2020-07-01	2021-06-30

Compass safe distance					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	AUDIX	N/A	SEM001-08	2019-06-13	2022-06-12
Magnetic Field Test Antenna	EM Test	MS100N	SEM018-04	2020-03-26	2021-03-25



General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2020-09-15	2021-09-14
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2020-09-15	2021-09-14
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2020-04-07	2021-04-06



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Shenzhen Branch, China, 518057
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057
中国·深圳·科技园中区M-10栋一号厂房

t (86-755) 26012053 f (86-755) 26710594
t (86-755) 26012053 f (86-755) 26710594
www.sgs.com.cn
sgs.china@sgs.com

6 Radio Spectrum Matter Test Results


6.1 Electromagnetic radio frequency radiation

Test Requirement: EN 60945:2002/IEC 60945:2002 clause 12.2
 Test Method: EN 60945:2002/IEC 60945:2002 clause 12.2.2
 Limit: Where appropriate, the maximum distance from the EUT at which the power density level of 100 W/m² and 10 W/m² of the radio frequency radiation has been measured shall be included in the equipment manual.

6.1.1 E.U.T. Operation

Operating Environment:
 Temperature: 25.1 °C Humidity: 53.8 % RH Atmospheric Pressure: 1010 mbar

6.1.2 Test Setup Diagram

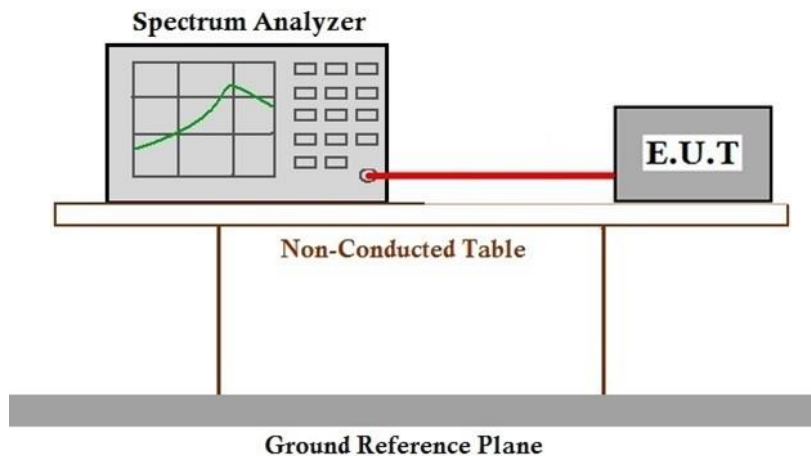

6.1.3 Measurement Procedure and Data

Please refer to the test report SZEM210300242105.

7 Emission Test Results

7.1 Conducted Emissions at DC Power Input Port (150kHz-30MHz)

Test Requirement: IEC 60945:2002/EN 60945:2002
 Test Method: EN 60945:2002/IEC 60945:2002 clause 9.2.2
 Limit:
 0.01MHz-0.15MHz 96dB(μV)-50dB(μV) quasi-peak
 0.15MHz-0.35MHz 60dB(μV)-50dB(μV) quasi-peak
 0.35MHz-30MHz 50dB(μV) quasi-peak
 Detector: Peak for pre-scan (200Hz resolution bandwidth) 0.01MHz to 0.15MHz and (9kHz resolution bandwidth) 0.15MHz to 30MHz


7.1.1 E.U.T. Operation

Operating Environment:
 Temperature: 23.5 °C Humidity: 40.1 % RH Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	On mode, keep EUT working normally.
Pre-scan	04	Idle mode, Keep the EUT at standby mode.


7.1.3 Test Setup Diagram

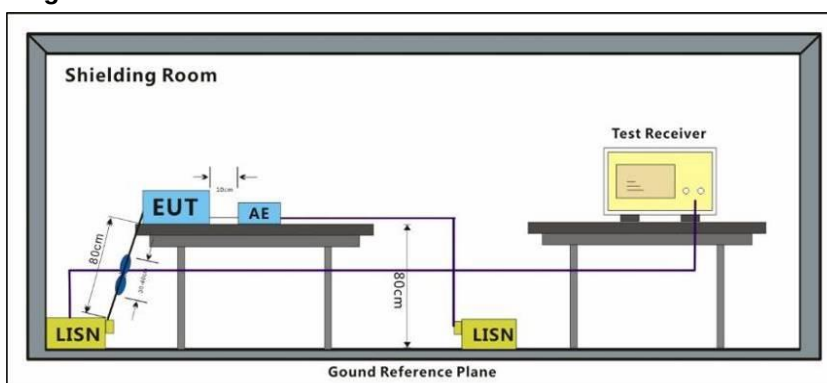

7.1.4 Measurement Procedure and Data

An initial pre-scan was performed with peak detector. Quasi-Peak measurement were performed at the frequencies with maximized peak emission were detected.

Test Mode: 00; Line: Live line

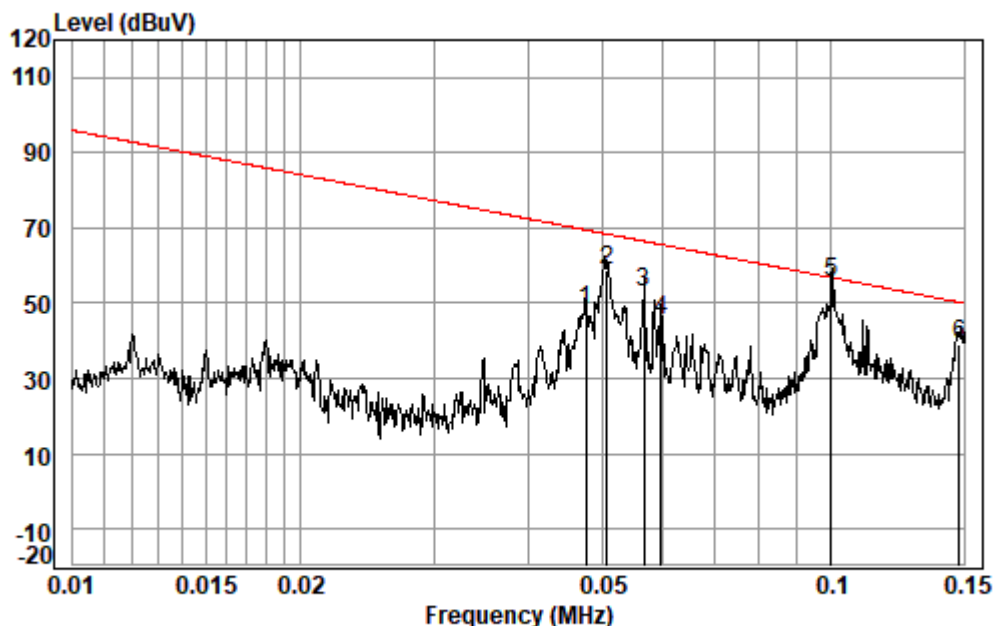

Site : Shielding Room

Condition: Line


Job No. : 02421CR

Test mode: 00

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.0476	0.01	9.54	38.49	48.04	69.50	-21.46	QP
2	0.0506	0.01	9.54	49.06	58.61	68.45	-9.84	QP
3	0.0567	0.01	9.54	43.30	52.85	66.51	-13.66	QP
4	0.0597	0.01	9.54	36.12	45.67	65.64	-19.97	QP
5	0.1000	0.01	9.59	46.20	55.80	56.89	-1.09	QP
6	0.1476	0.03	9.62	29.42	39.07	50.28	-11.21	QP



Test Mode: 00; Line: Live line

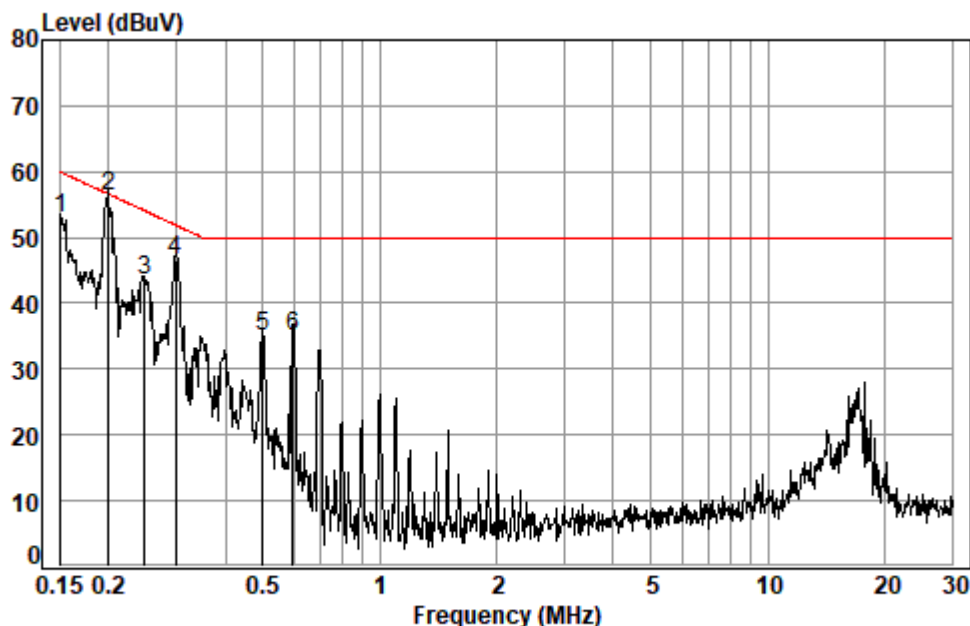

Site : Shielding Room

Condition: Line


Job No. : 02421CR

Test mode: 00

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1508	0.03	9.62	43.20	52.85	59.94	-7.09	QP
2	0.1998	0.04	9.64	46.61	56.29	56.62	-0.33	QP
3	0.2481	0.05	9.65	33.73	43.43	54.06	-10.63	QP
4	0.2987	0.05	9.66	36.82	46.53	51.87	-5.34	QP
5	0.4994	0.07	9.69	25.35	35.11	50.00	-14.89	QP
6	0.5979	0.08	9.68	25.20	34.96	50.00	-15.04	QP



Test Mode: 00; Line: Neutral Line

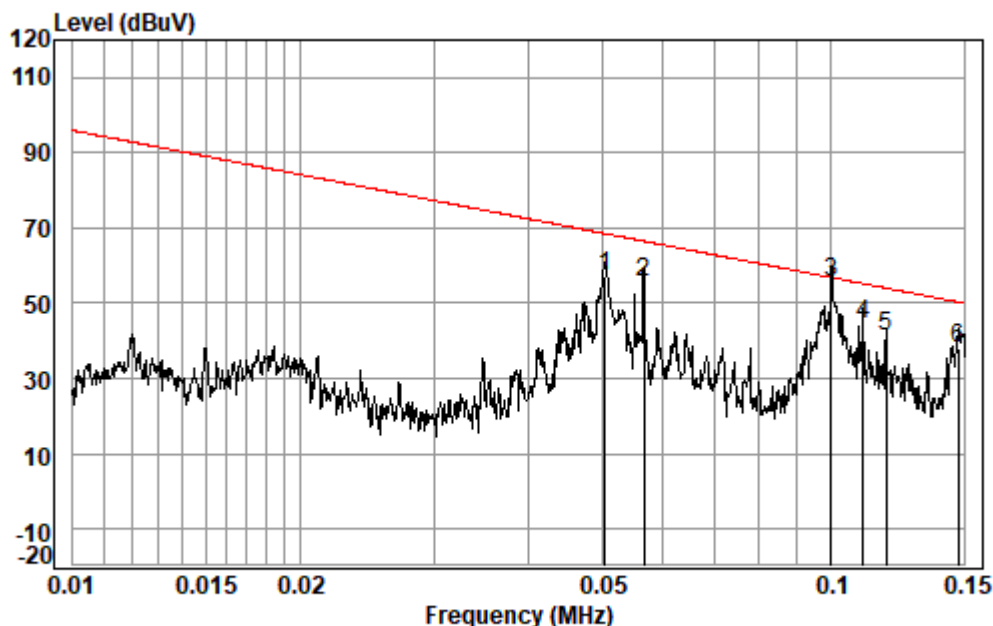

Site : Shielding Room

Condition: Neutral

Job No. : 02421CR

Test mode: 00

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.0504	0.01	9.53	47.49	57.03	68.54	-11.51	QP
2	0.0567	0.01	9.54	45.79	55.34	66.51	-11.17	QP
3	0.1000	0.01	9.59	46.00	55.60	56.89	-1.29	QP
4	0.1102	0.01	9.60	35.00	44.61	55.24	-10.63	QP
5	0.1182	0.02	9.60	31.84	41.46	54.05	-12.59	QP
6	0.1472	0.03	9.62	28.56	38.21	50.32	-12.11	QP




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 00; Line: Neutral Line

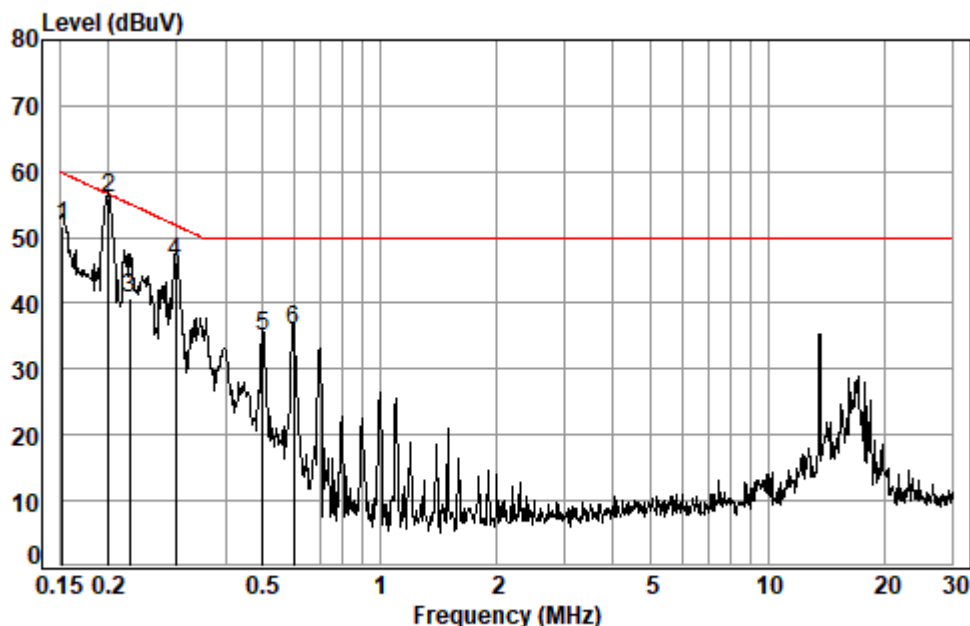

Site : Shielding Room

Condition: Neutral

Job No. : 02421CR

Test mode: 00

	Cable	LISN	Read	Limit	Over	
Freq	Loss	Factor	Level	Line	Limit	Remark
MHz	dB	dB	dBuV	dBuV	dB	
1	0.1524	0.03	9.62	42.21	51.86	59.81 -7.95 QP
2	0.2001	0.04	9.63	46.30	55.97	56.60 -0.63 QP
3	0.2265	0.04	9.64	31.10	40.78	55.14 -14.36 QP
4	0.2987	0.05	9.65	36.62	46.32	51.87 -5.55 QP
5	0.4994	0.07	9.67	25.13	34.87	50.00 -15.13 QP
6	0.6011	0.08	9.67	26.01	35.76	50.00 -14.24 QP



7.2 Radiated Emissions (Below 30MHz)

Test Requirement: IEC 60945:2002/EN 60945:2002
 Test Method: EN 60945:2002/IEC 60945:2002 clause 9.3.2
 Measurement Distance: 3m
 Limit:
 150KHz-300KHz 80 dB(μV/m) to 52 dB(μV/m) quasi-peak
 300KHz-30MHz 52 dB(μV/m) to 34 dB(μV/m) quasi-peak
 Detector: Peak for pre-scan (9KHz resolution bandwidth) 150KHz to 30MHz.


7.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.5 °C Humidity: 48.6 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	On mode, keep EUT working normally.
Pre-scan	04	Idle mode, Keep the EUT at standby mode.


7.2.3 Test Setup Diagram

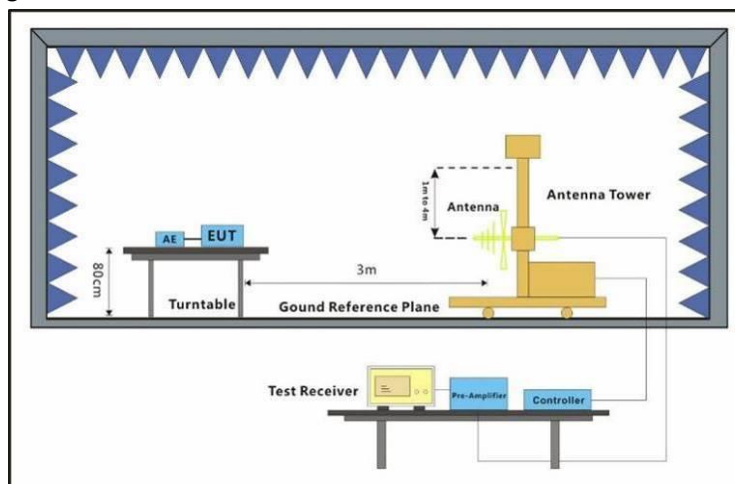

7.2.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Test Mode: 00

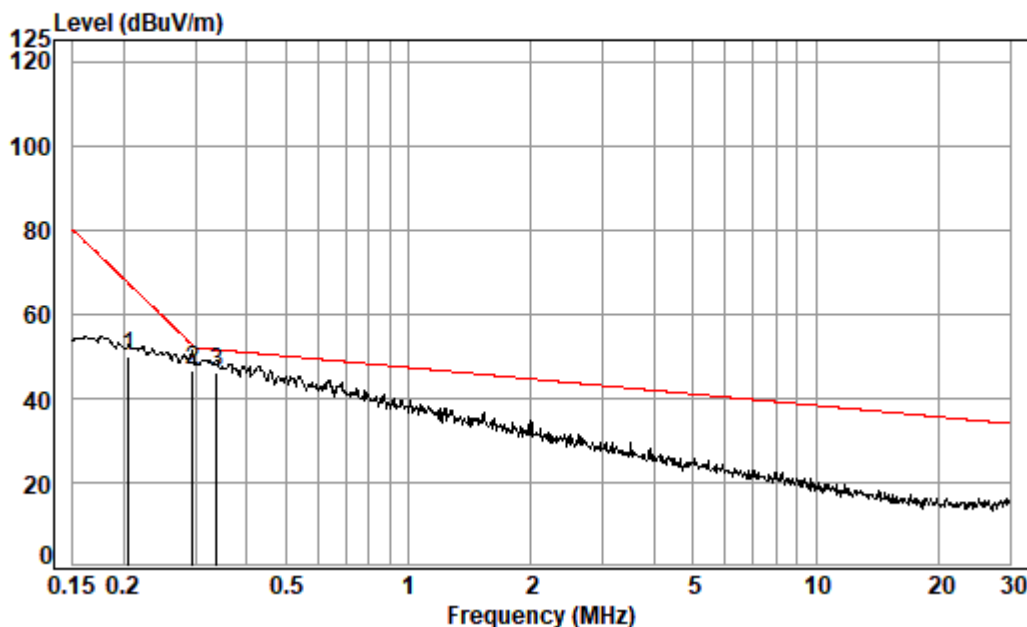

Condition: 3m

Job No. : 02421AT

Test Mode: 00

	Freq	Read Level	Ant Factor	Cable Loss	Preamp Factor	Limit Level	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB	
1	0.206	70.98	10.95	0.14	32.22	49.85	67.16	QP
2	0.296	67.75	10.89	0.25	32.23	46.66	52.60	QP
3 pp	0.337	67.18	10.88	0.30	32.23	46.13	51.54	QP

7.3 Radiated Emissions (Below 1GHz)

Test Requirement: IEC 60945:2002/EN 60945:2002
 Test Method: EN 60945:2002/IEC 60945:2002 clause 9.3.2
 Measurement Distance: 3m
 Limit:
 30MHz-1GHz 54 dB(μV/m) quasi-peak
 156MHz-165MHz 24 dB(μV/m) quasi-peak, 30 dB(μV/m) peak
 Detector: Peak for pre-scan (9KHz resolution bandwidth) 156MHz to 165MHz,
 (120kHz resolution bandwidth) 30MHz to 1000MHz.


7.3.1 E.U.T. Operation

Operating Environment:
 Temperature: 22.5 °C Humidity: 48.6 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	On mode, keep EUT working normally.
Pre-scan	04	Idle mode, Keep the EUT at standby mode.


7.3.3 Test Setup Diagram

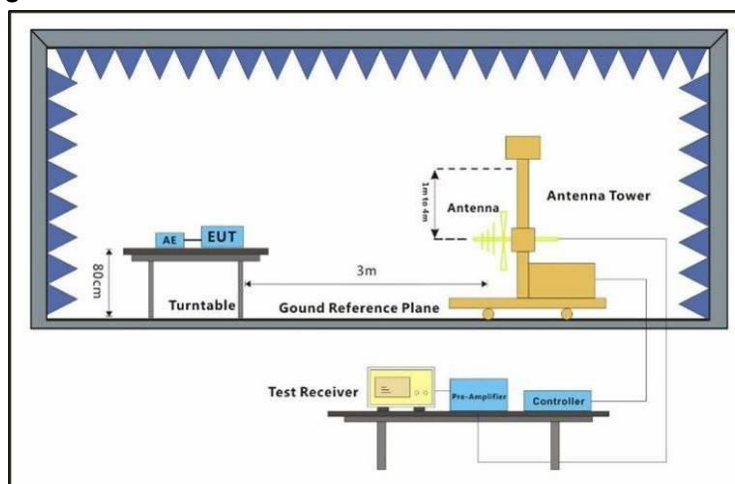

7.3.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Test Mode: 00; Polarity: Horizontal

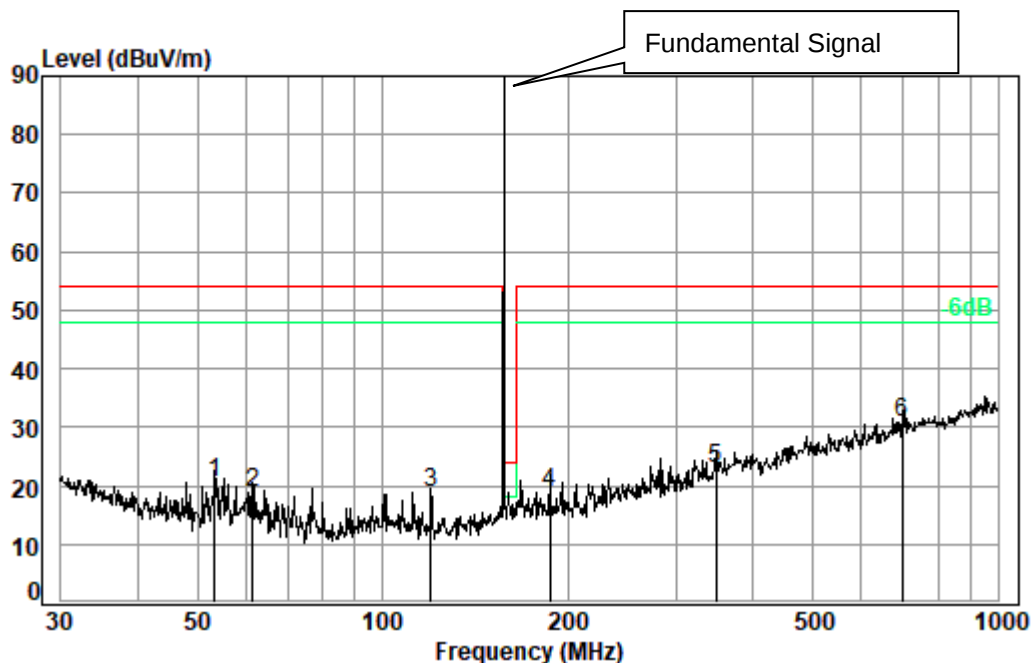

Condition: 3m VERTICAL


Job No. : 02421CR

Test Mode: 00

	Freq	Cable	Ant	Preamp	Read	Limit	Over	
	MHz	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	53.32	0.74	13.50	27.68	33.87	20.43	54.00	-33.57 QP
2	61.56	0.80	12.96	27.66	32.59	18.69	54.00	-35.31 QP
3	119.86	1.13	13.01	27.49	32.02	18.67	54.00	-35.33 QP
4	187.10	1.19	15.47	27.19	29.30	18.77	54.00	-35.23 QP
5	348.03	2.15	20.88	27.14	27.06	22.95	54.00	-31.05 QP
6 pp	699.30	2.90	27.11	27.92	28.86	30.95	54.00	-23.05 QP



Test Mode: 00; Polarity: Vertical

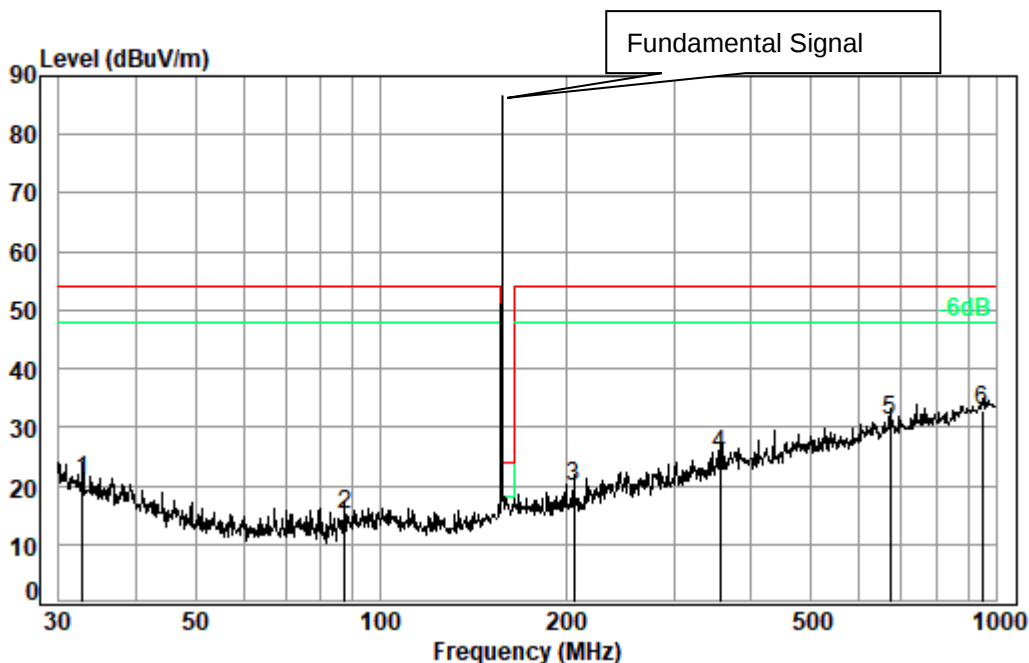

Condition: 3m HORIZONTAL

Job No. : 02421CR

Test Mode: 00

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	32.75	0.63	21.27	27.73	26.87	21.04	54.00	-32.96	QP
2	87.42	1.28	12.78	27.62	28.73	15.17	54.00	-38.83	QP
3	206.40	1.26	15.48	27.12	30.30	19.92	54.00	-34.08	QP
4	356.68	2.18	21.47	27.18	28.70	25.17	54.00	-28.83	QP
5	672.84	2.85	27.13	27.97	29.12	31.13	54.00	-22.87	QP
6 pp	948.76	3.55	29.33	26.91	27.05	33.02	54.00	-20.98	QP

7.4 Radiated Emissions (Above 1GHz)

Test Requirement: IEC 60945:2002/EN 60945:2002
 Test Method: EN 60945:2002/IEC 60945:2002 clause 9.3.2
 Measurement Distance: 3m
 Limit:
 1GHz-2GHz 54 dB(μV/m) peak
 Detector: Peak for pre-scan (120KHz resolution bandwidth) 1GHz to 2GHz


7.4.1 E.U.T. Operation

Operating Environment:
 Temperature: 23.5 °C Humidity: 40.1 % RH Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	On mode, keep EUT working normally.
Pre-scan	04	Idle mode, Keep the EUT at standby mode.


7.4.3 Test Setup Diagram

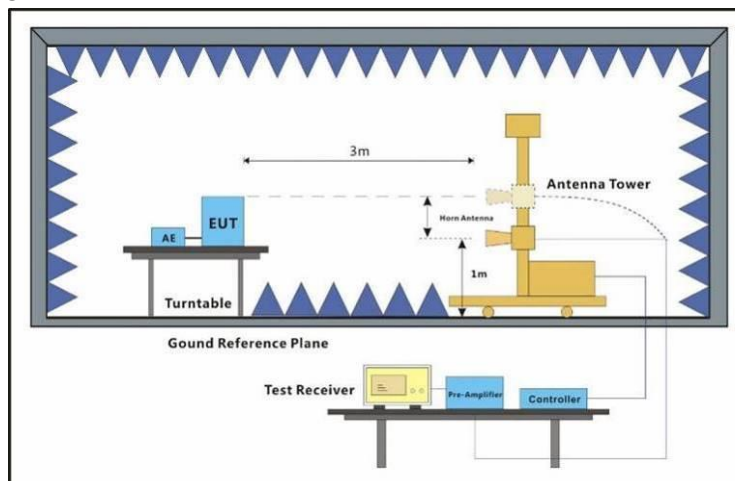

7.4.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. The EUT was measured by Horn antenna with 2 orthogonal polarities.

Test Mode: 00; Polarity: Horizontal

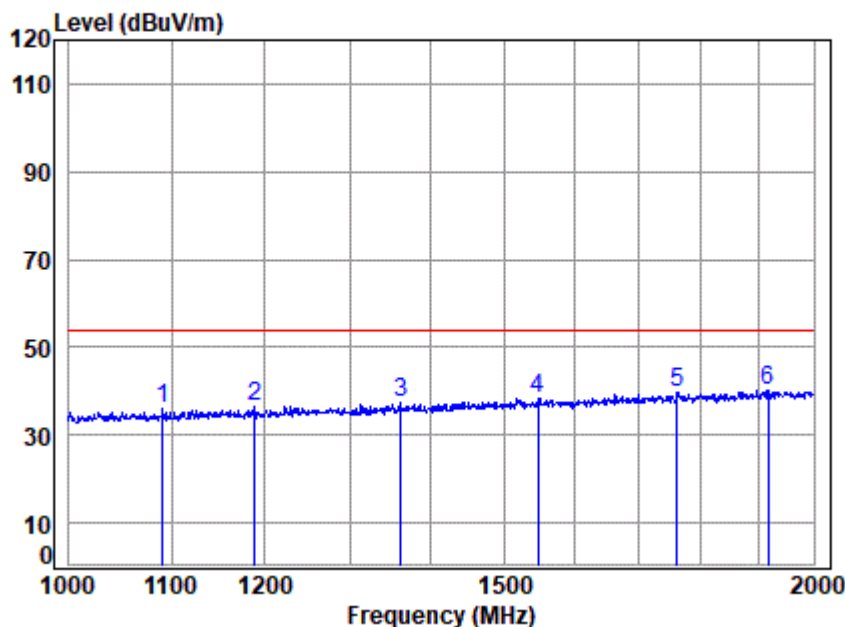

Site : chamber
Condition: 3m HORIZONTAL
Job No : 02421CR
Mode : 00
Note :


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1091.264	2.55	24.07	39.68	48.99	35.93	54.00	-18.07	Peak
2	1188.383	2.74	24.54	39.75	49.20	36.73	54.00	-17.27	Peak
3	1362.258	3.05	25.28	39.87	48.98	37.44	54.00	-16.56	Peak
4	1546.493	3.30	26.01	39.98	48.97	38.30	54.00	-15.70	Peak
5	1760.518	3.48	26.91	40.09	49.24	39.54	54.00	-14.46	Peak
6	1917.199	3.59	27.51	40.16	49.29	40.23	54.00	-13.77	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 00; Polarity: Vertical

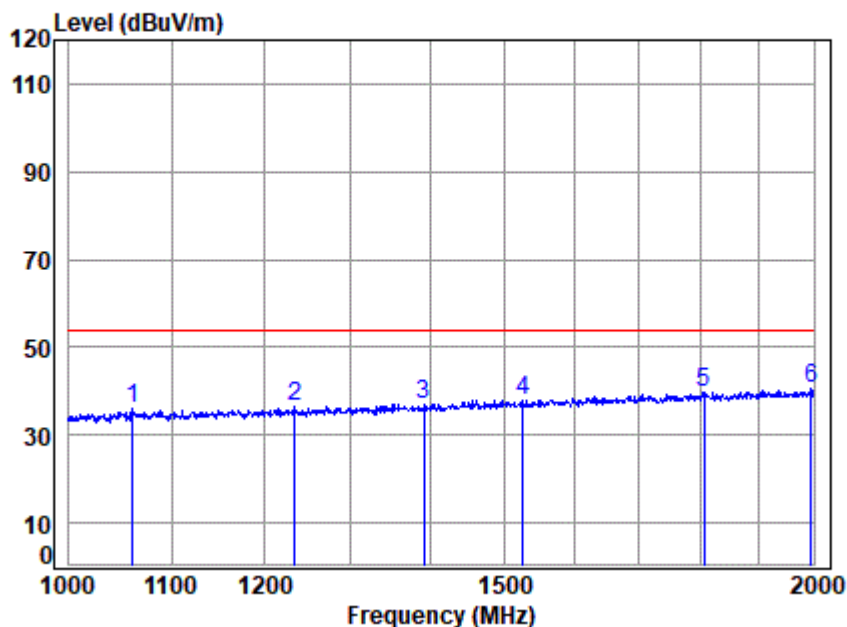

Site : chamber
Condition: 3m VERTICAL
Job No : 02421CR
Mode : 00
Note :

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1061.423	2.49	23.92	39.65	49.30	36.06	54.00	-17.94	Peak
2	1233.707	2.83	24.74	39.78	48.52	36.31	54.00	-17.69	Peak
3	1391.846	3.09	25.39	39.89	48.55	37.14	54.00	-16.86	Peak
4	1525.202	3.28	25.92	39.97	48.74	37.97	54.00	-16.03	Peak
5	1806.253	3.51	27.09	40.11	49.37	39.86	54.00	-14.14	Peak
6	1994.463	3.65	27.78	40.20	49.27	40.50	54.00	-13.50	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


8 Immunity Test Results

- Performance criteria A the EUT shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed, as defined in the relevant equipment standard and in the technical specification published by the manufacturer;
- Performance criteria B the EUT shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed, as defined in the relevant equipment standard and in the technical specification published by the manufacturer.
- During the test, degradation or loss of function or performance which is self-recoverable is however, allowed, but no change of actual operating state or stored data is allowed.
- Performance criteria C temporary degradation or loss of function or performance is allowed during the test, provided the function is self-recoverable, or can be restored at the end of the test by the operation of the controls, as defined in the relevant equipment standard and in the technical specification published by the manufacturer.

8.1 Electrostatic Discharge

Test Requirement: IEC 60945:2002/EN 60945:2002
Test Method: EN 61000-4-2:2009

8.1.1 Test Setup Diagram

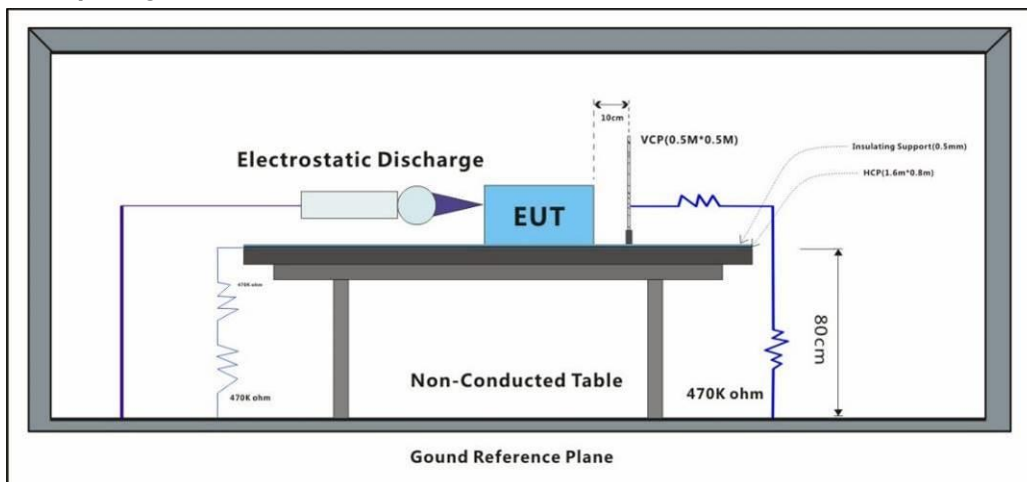

8.1.2 E.U.T. Operation

Operating Environment:
Temperature: 20.2 °C Humidity: 56.3 % RH Atmospheric Pressure: 1010 mbar

8.1.1 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	On mode, keep EUT working normally.
Final test	04	Idle mode, Keep the EUT at standby mode.

8.1.2 Test Condition and Results:

Performance Criterion: B
Discharge Impedance: 330Ω/150pF
Number of Discharge: Minimum 10 times at each test point
Discharge Mode: Single Discharge
Discharge Period: 1 second minimum
Test Point: 1. All insulated enclosure and seams.
2. All accessible metal parts of the enclosure.
3. All side.

Discharge type	Level (kV)	Polarity	Test Point	Result / Observations
Air Discharge	2,4,8	+	1	A
Air Discharge	2,4,8	-	1	A
Contact Discharge	6	+	2	A
Contact Discharge	6	-	2	A
Horizontal Coupling	6	+	3	A
Horizontal Coupling	6	-	3	A
Vertical Coupling	6	+	3	A
Vertical Coupling	6	-	3	A

Results:


A: No degradation in the performance of the EUT was observed.

No false alarms or other malfunctions were observed during or after the test.

8.2 Radiated Immunity (80MHz-2GHz)

Test Requirement: IEC 60945:2002/EN 60945:2002
Test Method: EN 61000-4-3:2006+A1:2008+A2:2010

8.2.1 Test Setup Diagram

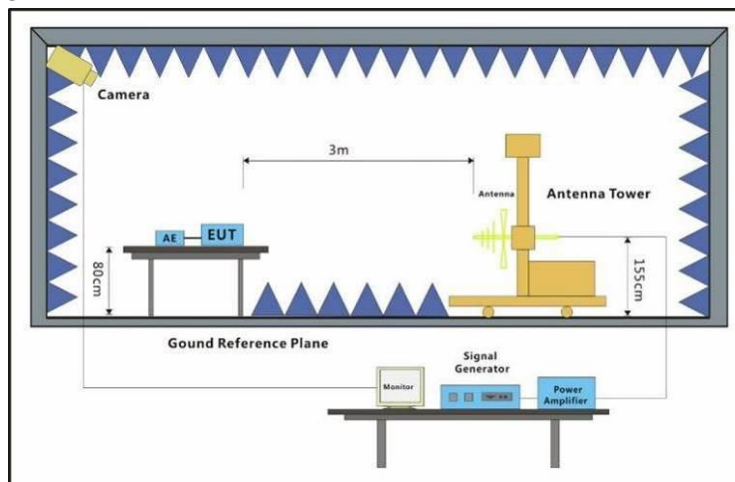

8.2.2 E.U.T. Operation

Operating Environment:
Temperature: 20.2 °C Humidity: 56.3 % RH Atmospheric Pressure: 1010 mbar

8.2.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	On mode, keep EUT working normally.
Final test	04	Idle mode, Keep the EUT at standby mode.

8.2.4 Test Condition and Results:

Performance Criterion: A
Frequency Range: 80MHz to 2GHz
Antenna Polarisation: Vertical and Horizontal
Modulation: 400Hz,80% Amp. Mod,10% increment

Frequency	Level (V/m)	EUT Face	Dwell time	Result / Observations
80MHz-2GHz	10	Front	2s	A
80MHz-2GHz	10	Back	2s	A
80MHz-2GHz	10	Left	2s	A
80MHz-2GHz	10	Right	2s	A
80MHz-2GHz	10	Top	2s	A
80MHz-2GHz	10	Underside	2s	A

A: No degradation in the performance of the EUT was observed.


No false alarms or other malfunctions were observed during or after the test.



8.3 Electrical Fast Transients-Burst at Power Port

Test Requirement: IEC 60945:2002/EN 60945:2002
Test Method: EN 61000-4-4:2012

8.3.1 Test Setup Diagram

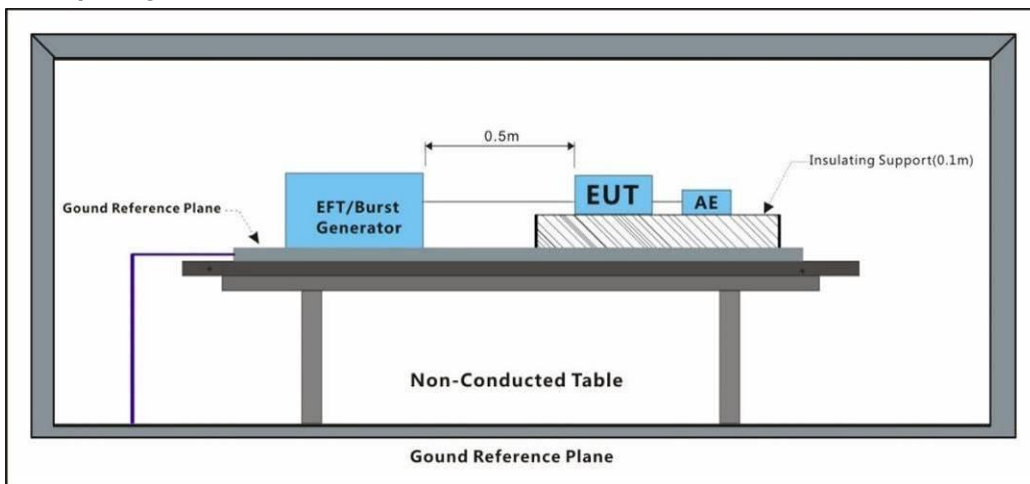

8.3.2 E.U.T. Operation

Operating Environment:
Temperature: 22.3 °C Humidity: 32.9 % RH Atmospheric Pressure: 1010 mbar

8.3.1 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	On mode, keep EUT working normally.
Final test	04	Idle mode, Keep the EUT at standby mode.

8.3.2 Test Condition and Results:

Performance Criterion: B
Repetition Frequency: 5kHz
Burst Period: 300ms
Test Duration: 3 minute per level & polarity

Test Line	Level (kV)	Polarity	CDN/Clamp	Result / Observations
DC power port	1	+	CDN	A
DC power port	1	-	CDN	A

A: No degradation in the performance of the EUT was observed.

No false alarms or other malfunctions were observed during or after the test.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, EMC Laboratory


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

8.4 Conducted Immunity at Power port (150kHz-80MHz)

Test Requirement: IEC 60945:2002/EN 60945:2002

Test Method: EN 61000-4-6:2014

8.4.1 Test Setup Diagram

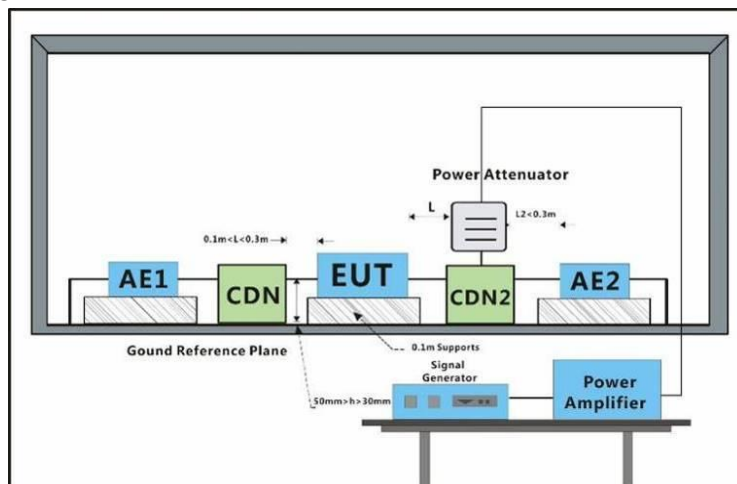

8.4.2 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C

Humidity: 33.0 % RH

Atmospheric Pressure: 1010 mbar

8.4.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	On mode, keep EUT working normally.
Final test	04	Idle mode, Keep the EUT at standby mode.

8.4.4 Test Condition and Results:

Performance Criterion: A

Frequency Range: 0.15MHz to 80MHz

Modulation: 80%, 400Hz Amplitude Modulation

Step Size: 1%



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of its mandate. The Company does not accept any liability for the accuracy or completeness of the information or for any loss or transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: For any request for a copy of the test/inspection report or certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Frequency Range	Level (Vrms)	CDN/Clamp	Dwell time	Result / Observations
150KHz to 80MHz	3	CDN	2s	A
2MHz	10	CDN	2s	A
3MHz	10	CDN	2s	A
4MHz	10	CDN	2s	A
6.2MHz	10	CDN	2s	A
8.2MHz	10	CDN	2s	A
12.6MHz	10	CDN	2s	A
16.5MHz	10	CDN	2s	A
18.8MHz	10	CDN	2s	A
22MHz	10	CDN	2s	A
25MHz	10	CDN	2s	A

A: No degradation in the performance of the EUT was observed.


No false alarms or other malfunctions were observed during or after the test.



8.5 Power Supply Failure

Test Requirement: IEC 60945:2002/EN 60945:2002
Test Method: EN 61000-4-11:2004 +A1:2017

8.5.1 Test Setup Diagram

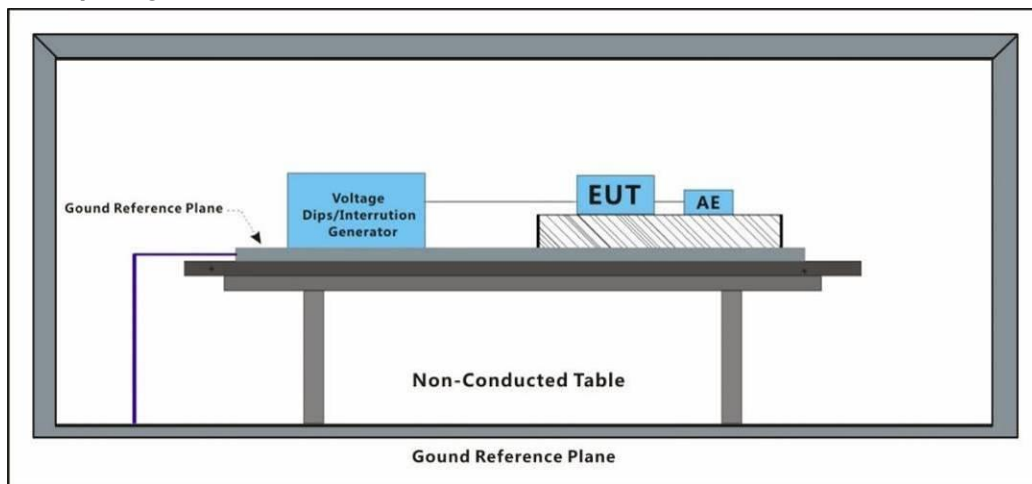

8.5.2 E.U.T. Operation

Operating Environment:
Temperature: 22.3 °C Humidity: 33.0 % RH Atmospheric Pressure: 1010 mbar

8.5.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	On mode, keep EUT working normally.
Final test	04	Idle mode, Keep the EUT at standby mode.

8.5.4 Test Condition and Results:

Performance Criterion: C
Test duration time: 60s
Requirement: 3Times

Voltage (& Reduction)	Duration(Sec)	Performance Criterion	Observation	Test Result
13.8	60	C	Note1	A

Note1: During power supply failure tests, EUT operates automatically and normally each time after power is restored.

A: No degradation in the performance of the EUT was observed


No false alarms or other malfunctions were observed during or after the test.

8.6 Acoustic noise and signals

Test Requirement: IEC 60945:2002/EN 60945:2002

Test Method: EN 60945:2002/IEC60945:2002 clause 11.1.2

8.6.1 Test Setup Diagram

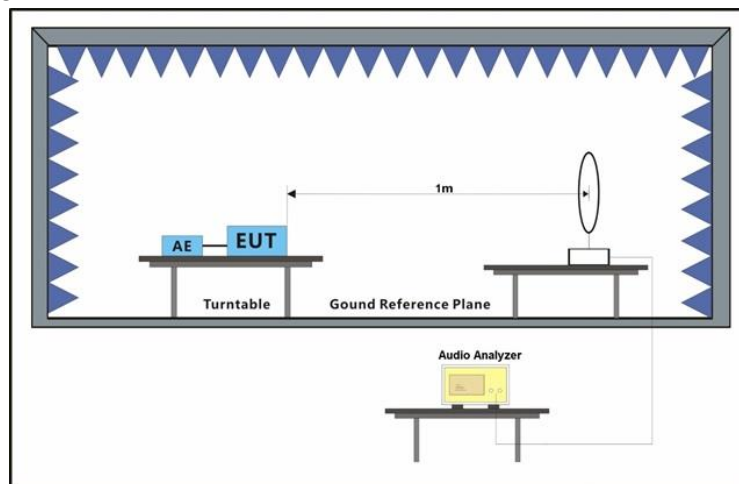

8.6.2 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C

Humidity: 33.0 % RH

Atmospheric Pressure: 1010 mbar

8.6.1 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	On mode, keep EUT working normally.
Final test	04	Idle mode, Keep the EUT at standby mode.


8.6.2 Test Condition and Results:

Test Conditions	Test Distance(m)	Acoustic pressure Level(dB(A))	Limit(dB(A))	Test Result
Normal mode	1	50	60	Pass
Audible alarms mode	1	77	75~85	Pass

8.7 Compass safe distance

Test Requirement: IEC 60945:2002/EN 60945:2002
Test Method: EN 60945:2002/IEC 60945:2002 clause 11.2.2

8.7.1 Test Setup Diagram

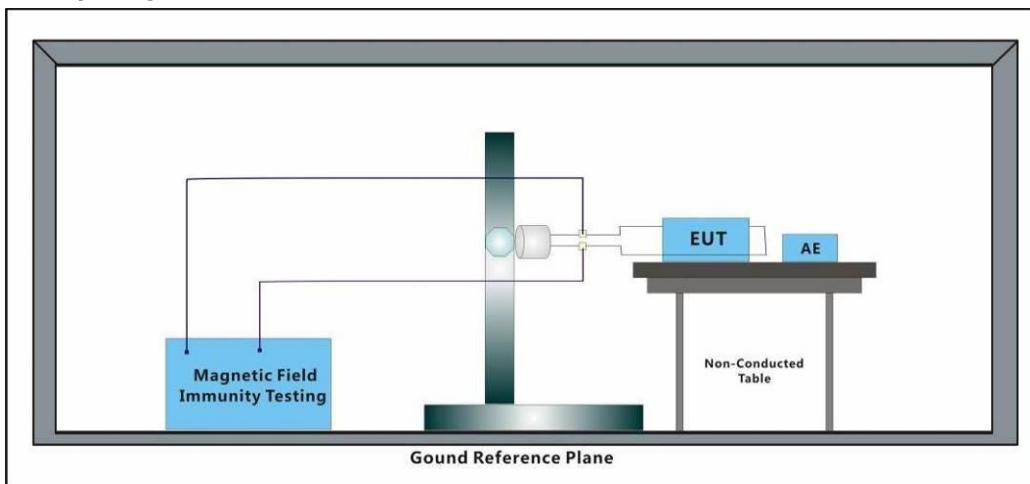

8.7.2 E.U.T. Operation

Operating Environment:
Temperature: 22.3 °C Humidity: 33.0 % RH Atmospheric Pressure: 1010 mbar

8.7.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	Power Off, keep the EUT unpowered.
Final test	05	Power On, Keep the EUT powered.
Final test	04	Idle mode, Keep the EUT at standby mode.

8.7.4 Test Condition and Results:

Compass safe distance is the distance between the nearest point of the EUT and the subject compass, where an unacceptable compass deviation occur.

For a standard compass, the horizontal magnetic flux shall be less than 0.942 mGauss (compass deviation of 5.4°/H).

For a steering/standby/emergency compass, the horizontal magnetic flux shall be less than 3.142 mGauss (compass deviation of 18°/H).

The compass safe distance is measured with a DC milligaussmeter. The EUT is first rotated to determine the worst case direction. Secondly the EUT is moved towards/away from the measurement probe until the required field is measured. The distance is then measured.

All distances rounded up to the nearest 5cm or 10cm.

The EUT was measured before after being normalized, it was normalised by placing it in a Helmholtz coil and applying a a d.c. field of $1 \times 1\,000 / 4\pi$ A/m with a superimposed stabilizing a.c. field of 50 Hz of $18 \times 1\,000 / 4\pi$ A/m r.m.s.

EUT mode	Front	Rear	Left	Right	Top	Bottom
Power Off	5cm	5cm	5cm	5cm	10cm	5cm
Power On	5cm	5cm	5cm	5cm	10cm	5cm
Normalised	5cm	5cm	5cm	5cm	10cm	5cm

Note:

All distances rounded up to the nearest 5cm or 10cm.

The EUT was measured before after being normalized, it was normalised by placing it in a Helmholtz coil and applying a a d.c. field of $1 \times 1\,000 / 4\pi$ A/m with a superimposed stabilizing a.c. field of 50 Hz of $18 \times 1\,000 / 4\pi$ A/m r.m.s.




8.8 Protection against accidental access to dangerous voltages

Test Requirement: IEC 60945:2002/EN 60945:2002

Test Method: EN 60945:2002/IEC 60945:2002 clause 12.1.2

8.8.1 Test Setup Diagram

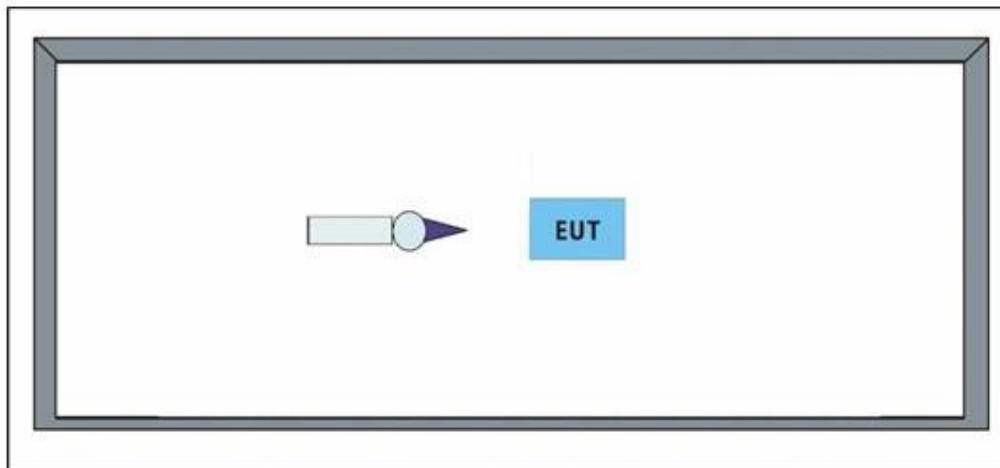

8.8.2 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C

Humidity: 33.1 % RH

Atmospheric Pressure: 1010 mbar

8.8.3 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	Power Off, keep the EUT unpowered.
Final test	05	Power On, Keep the EUT powered.
Final test	04	Idle mode, Keep the EUT at standby mode.

8.8.4 Test Condition and Results:

The EUT shall be subjected to the test corresponding to IEC 60529, table I, first characteristic numeral 2: protected against access to hazardous parts with a finger.

The test shall be carried out by inserting the access probe through any openings of the enclosure of the EUT with the force specified in table VI of IEC 60529.

For the test, the jointed test finger may penetrate to its 80 mm length. Starting from the straight position, both joints of the finger shall be successively bent through an angle of up to 90° with respect to the access of the adjoining section of the finger and shall be placed in every possible position.

For low-voltage equipment (rated voltages not exceeding 1000 V a.c. and 1500 V d.c.) the test finger shall be connected to a low-voltage supply (of not less than 40 V and not more than 50 V) in series with a suitable lamp connected between the access probe and the hazardous parts inside the enclosure.

For high voltage equipment (rated voltages exceeding 1000 V a.c. or 1500 V d.c.), with the access probe placed in the most unfavourable positions, the EUT shall be submitted to the dielectric test as specified in the relevant equipment standard. Verification may be made either by dielectric test or by inspection of the specified clearance dimensions in air which would ensure that the test would be satisfactory under the most unfavourable electric field configuration (see IEC 60071-2).

When an enclosure includes sections at different voltage levels, the appropriate acceptance conditions for adequate clearance shall be applied for each section.

Finally, it shall be verified that any further access to the interior of the EUT is only possible by means of a tool, such as a spanner or screwdriver, and warning labels, if appropriate, are displayed within the EUT and on protective covers.


Test Conditions	Clearances(m)	Working Status	Requirements	Test Result
Low Voltage	0.1	the lamp shall not light	the lamp shall not light	A
High Voltage	0.1	the EUT can withstood the dielectric test.	the EUT shall be capable of withstanding the dielectric test.	A
A: No degradation in the performance of the EUT was observed				

9 Test Setup Photo


Conducted Emissions at DC Power Input Port (150kHz-30MHz)



Radiated Emissions (Below 30MHz)

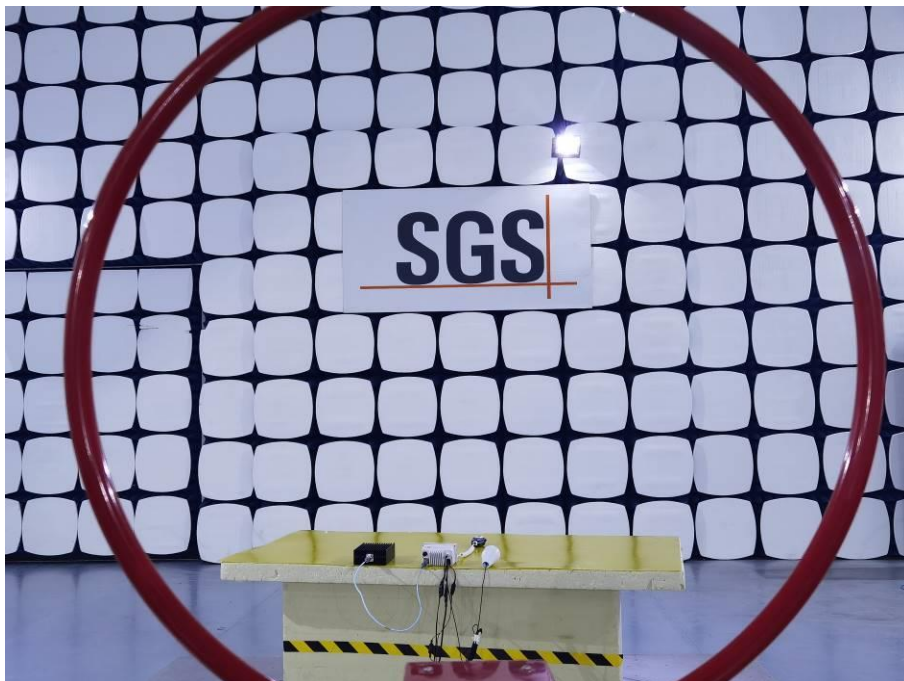


Radiated Emissions (Below 1GHz)

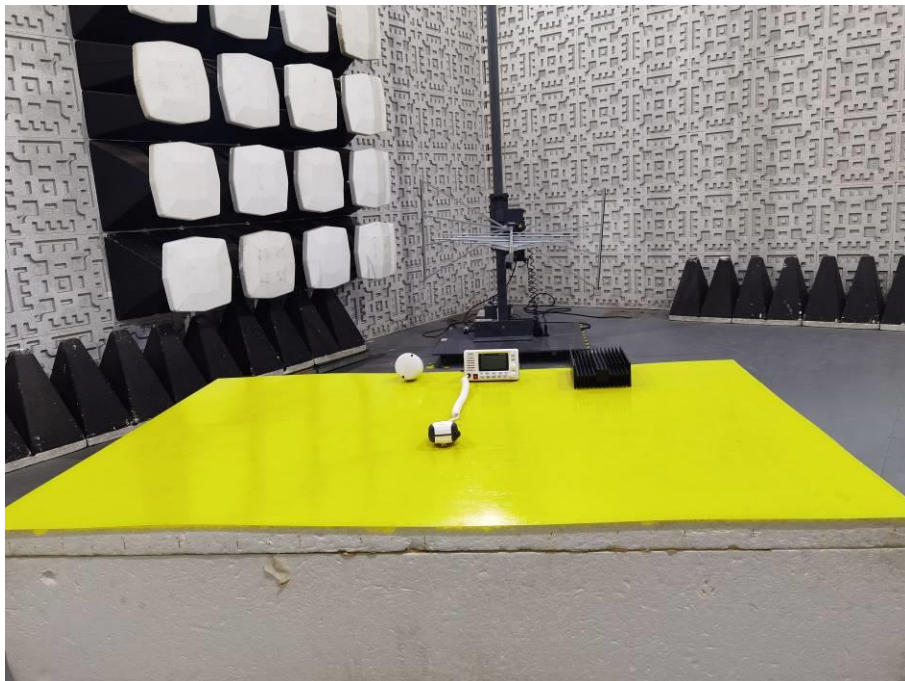


Electrostatic Discharge




Radiated Immunity (80MHz-2GHz)

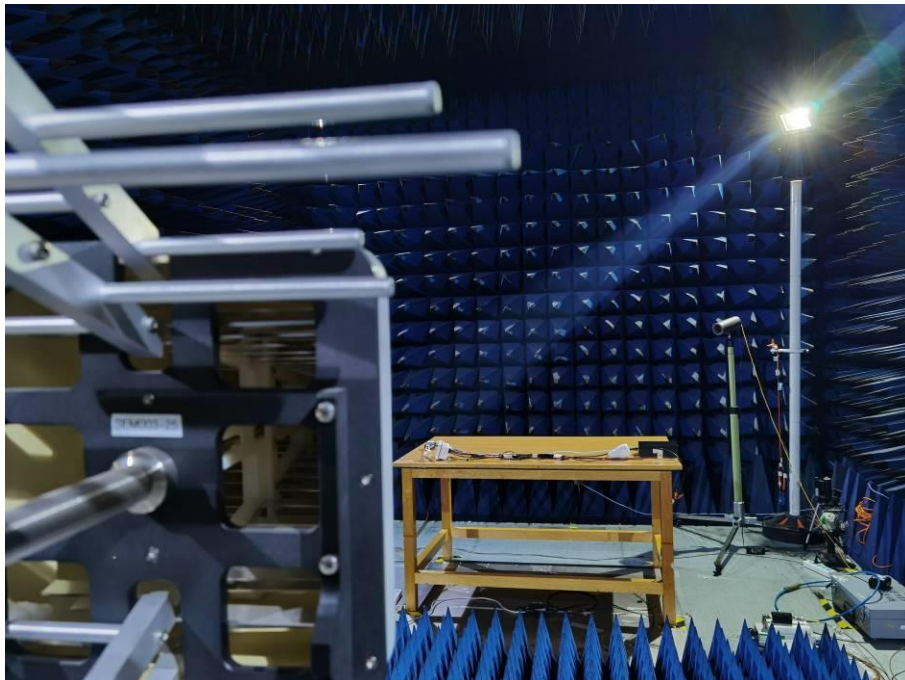


Electrical Fast Transients-Burst at Power Port

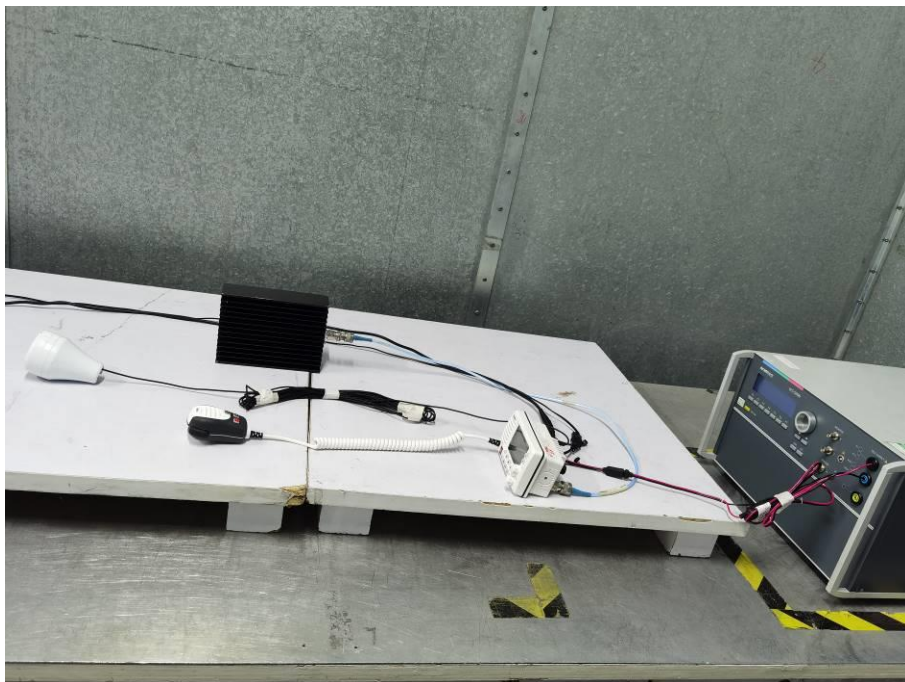

Conducted Immunity at Power port (150kHz-80MHz)

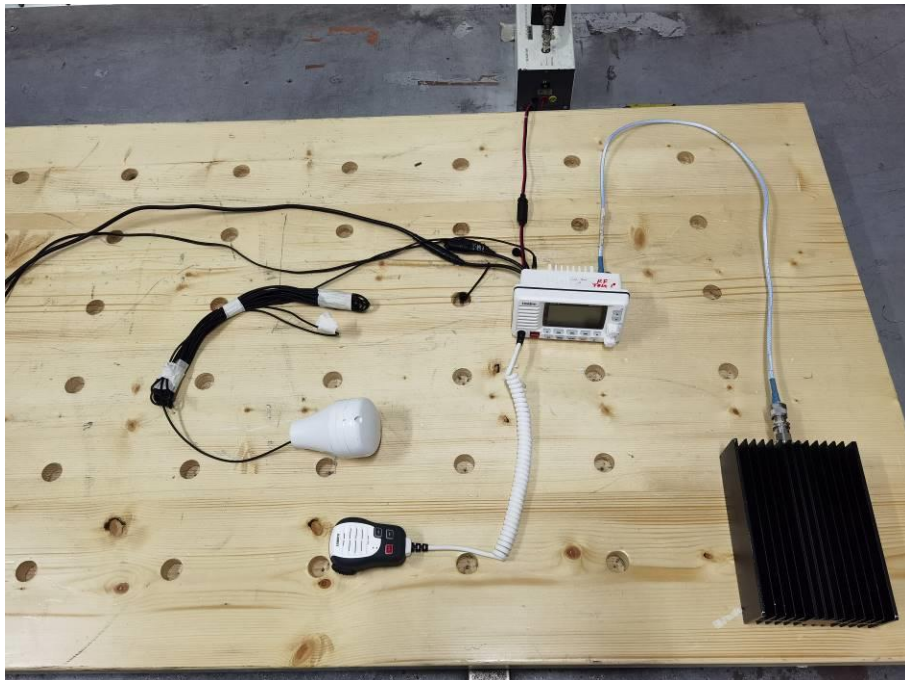

Compass safe distance

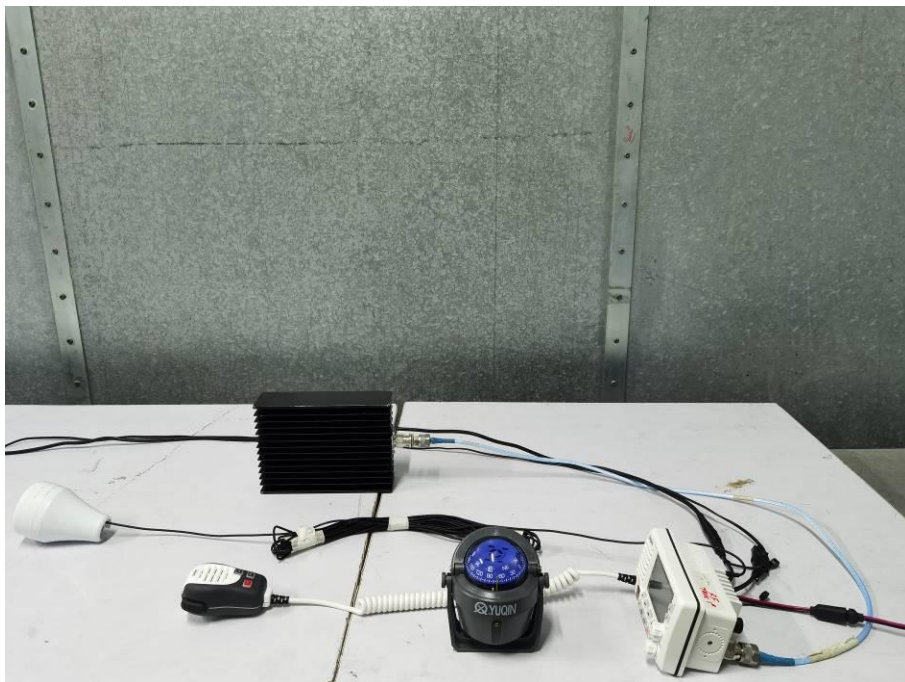

Protection against accidental access to dangerous voltages



10 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for SZEM210300242102CR

- End of the Report -



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SGS-CSTC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com