


File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00194.EMI

Date: 2022-06-09

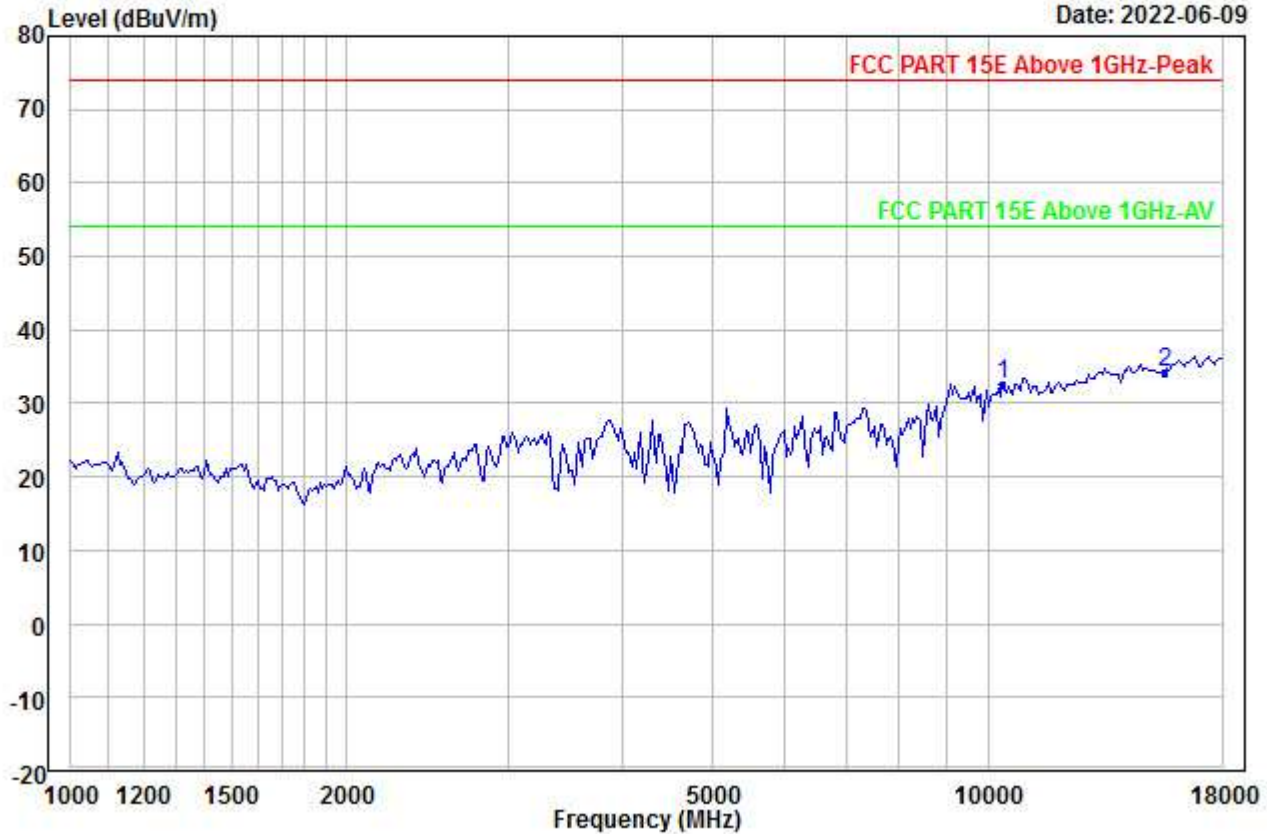


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10380.000	26.24	38.13	45.95	0.00	14.07	32.49	54.00	-21.51	---	---	Aver
2	PP15570.000	23.03	40.30	45.96	0.00	16.95	34.32	54.00	-19.68	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00195.EMI

Date: 2022-06-09

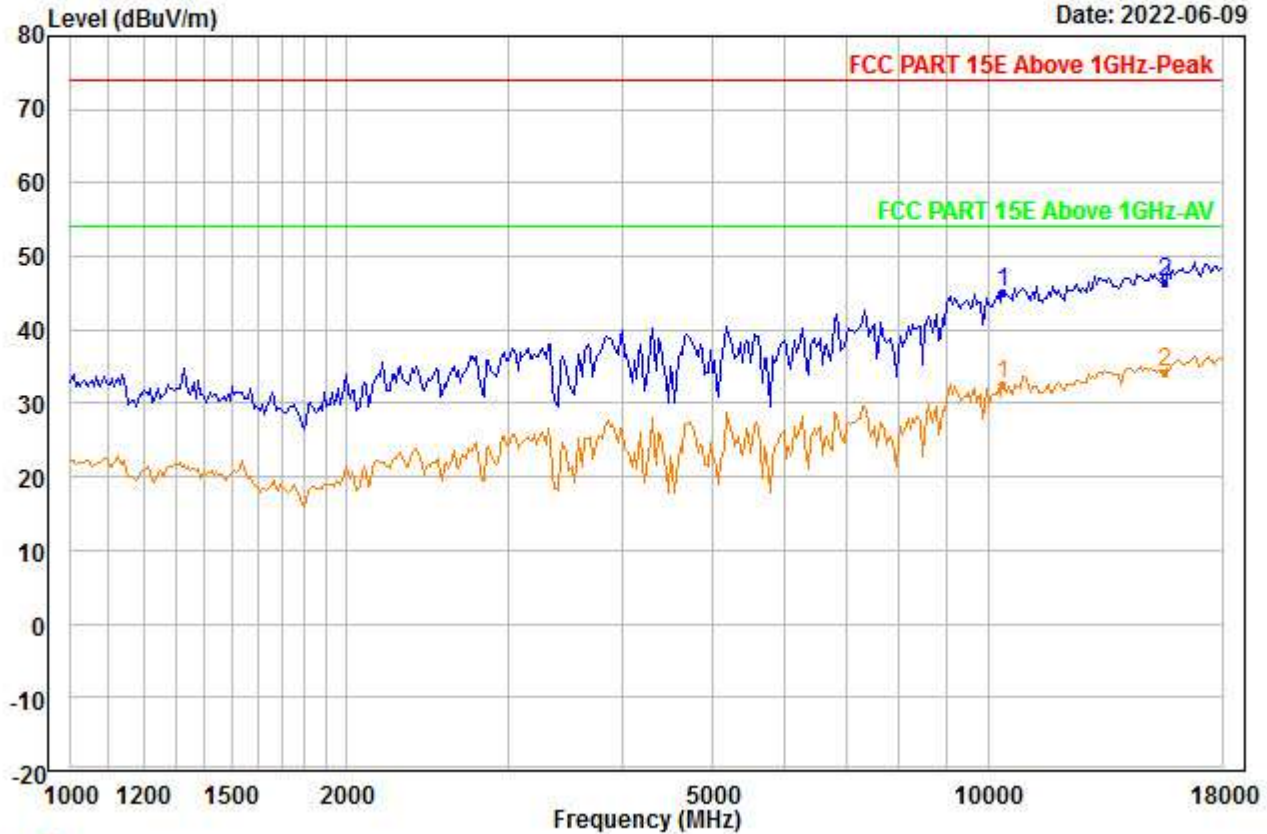


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5190
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10380.000	38.79	38.13	45.95	0.00	14.07	45.04	74.00	-28.96	---	---	Peak
2	PP15570.000	35.33	40.30	45.96	0.00	16.95	46.62	74.00	-27.38	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00196.EMI

Date: 2022-06-09

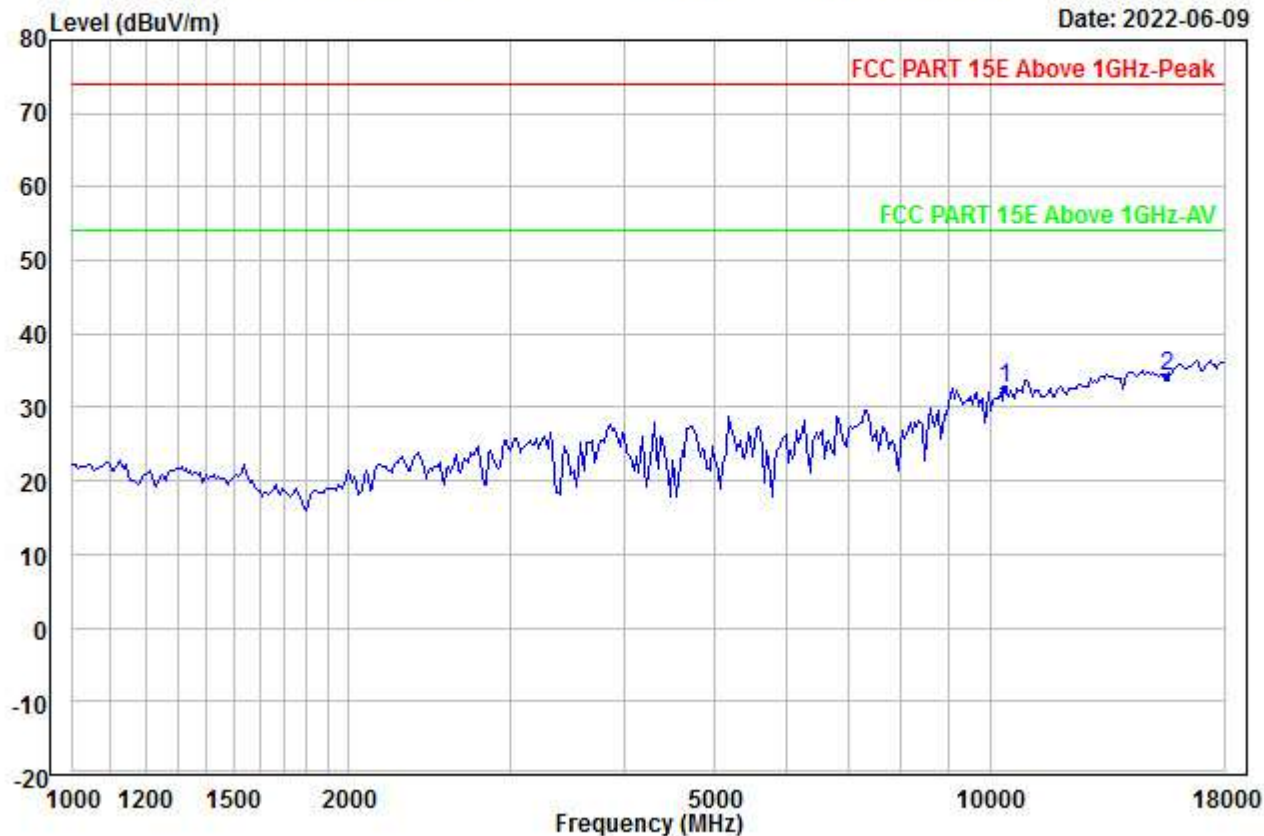


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10380.000	26.31	38.13	45.95	0.00	14.07	32.56	54.00	-21.44	---	---	Aver
2	PP15570.000	23.03	40.30	45.96	0.00	16.95	34.32	54.00	-19.68	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00197.EMI

Date: 2022-06-09

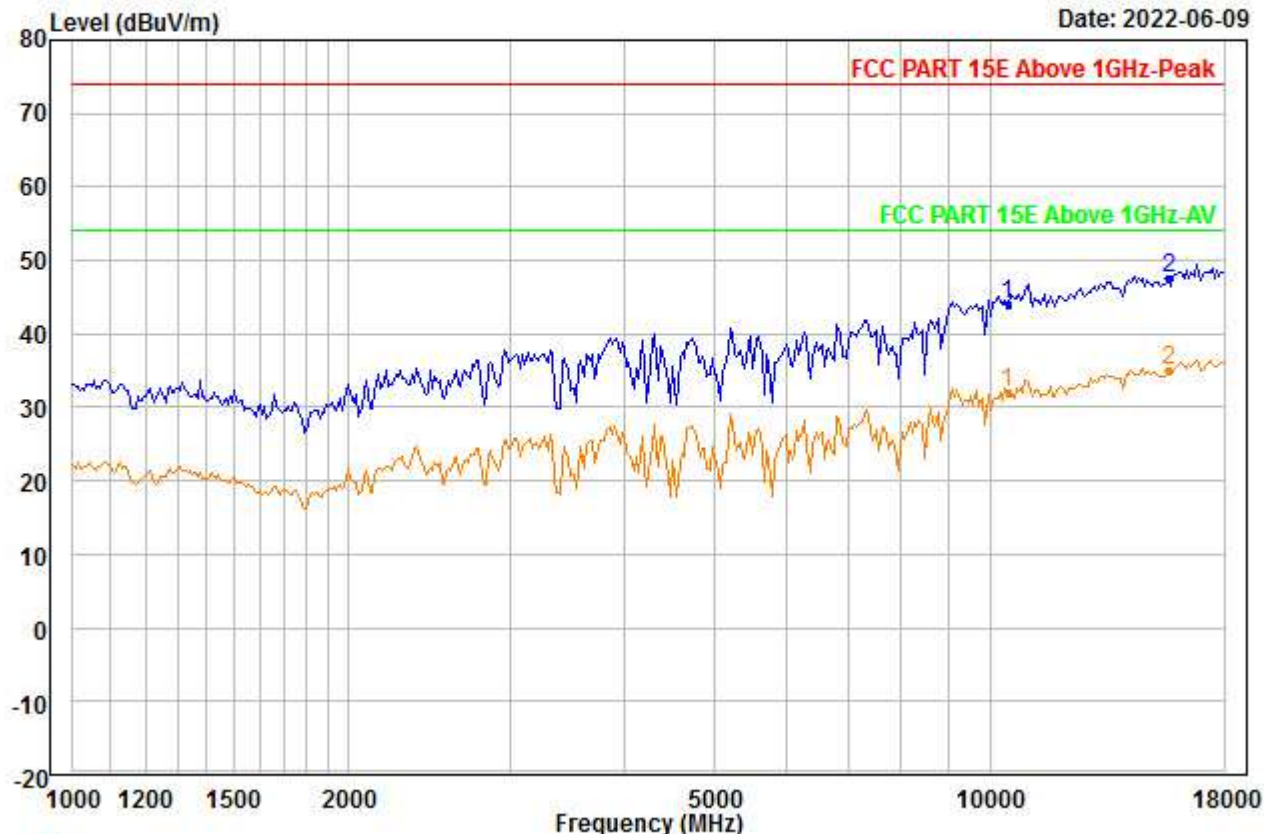


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5230
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10460.000	37.60	38.18	45.92	0.00	14.06	43.92	74.00	-30.08	---	---	Peak
2	PP15690.000	35.99	40.47	46.05	0.00	17.03	47.44	74.00	-26.56	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00198.EMI

Date: 2022-06-09

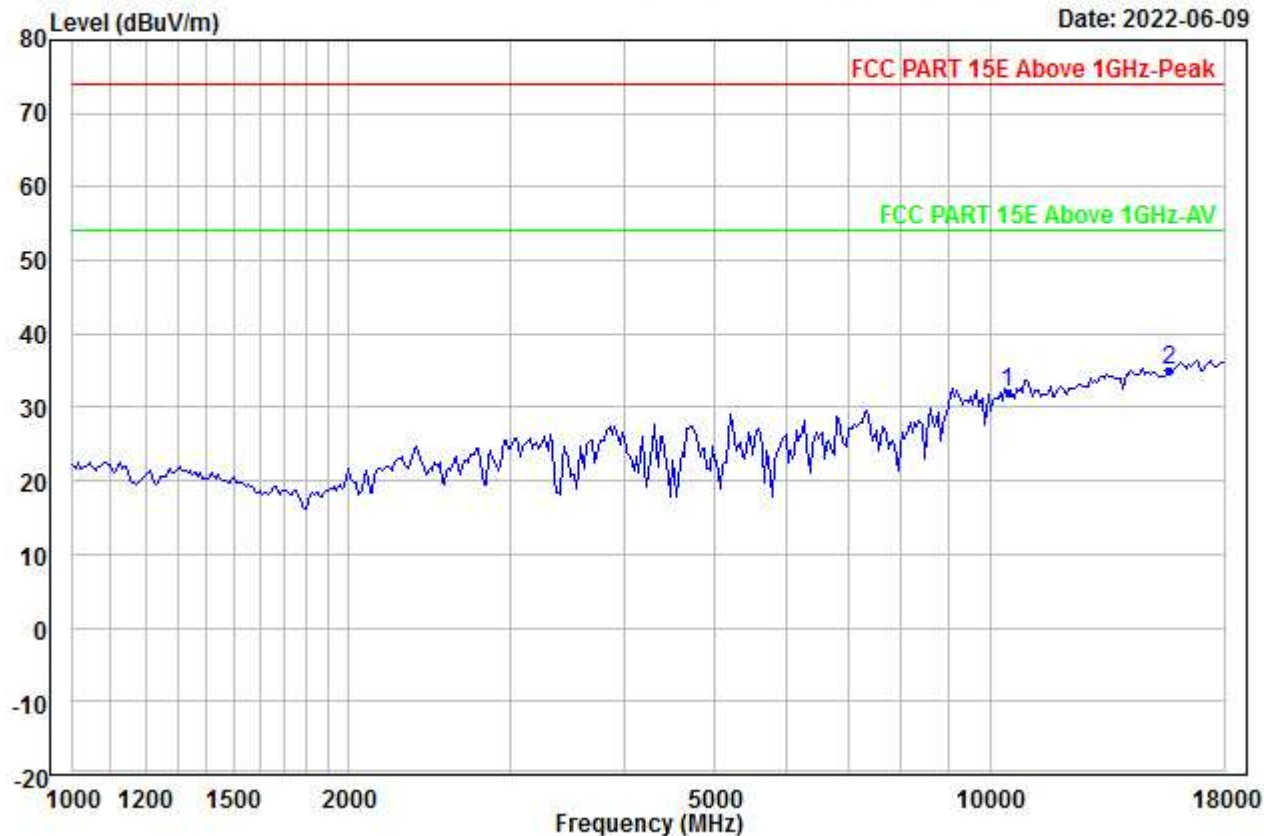


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10460.000	25.63	38.18	45.92	0.00	14.06	31.95	54.00	-22.05	---	---	Aver
2	PP15690.000	23.48	40.47	46.05	0.00	17.03	34.93	54.00	-19.07	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00199.EMI

Date: 2022-06-09

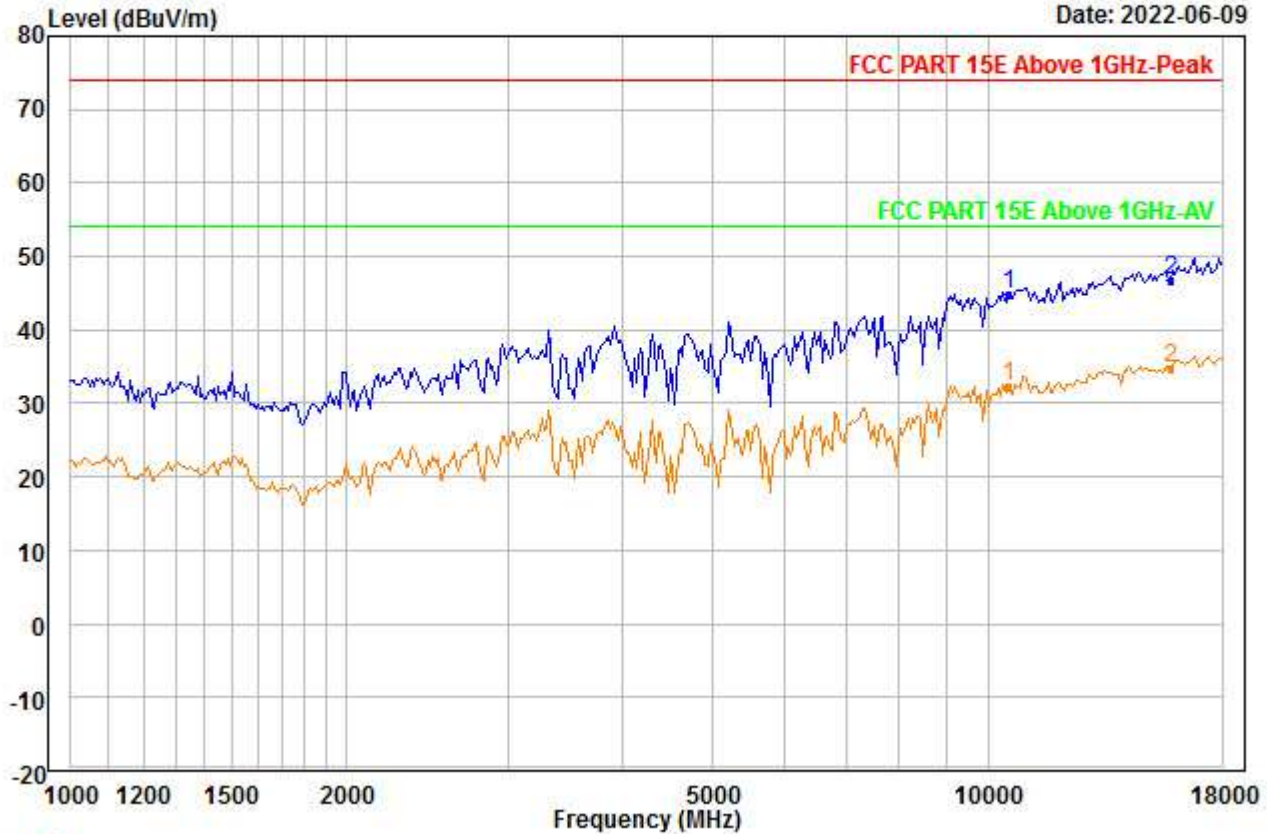


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5270
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10540.000	38.55	38.22	45.83	0.00	14.03	44.97	74.00	-29.03	---	---	Peak
2	PP15810.000	35.29	40.63	46.15	0.00	17.11	46.88	74.00	-27.12	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00200.EMI

Date: 2022-06-09

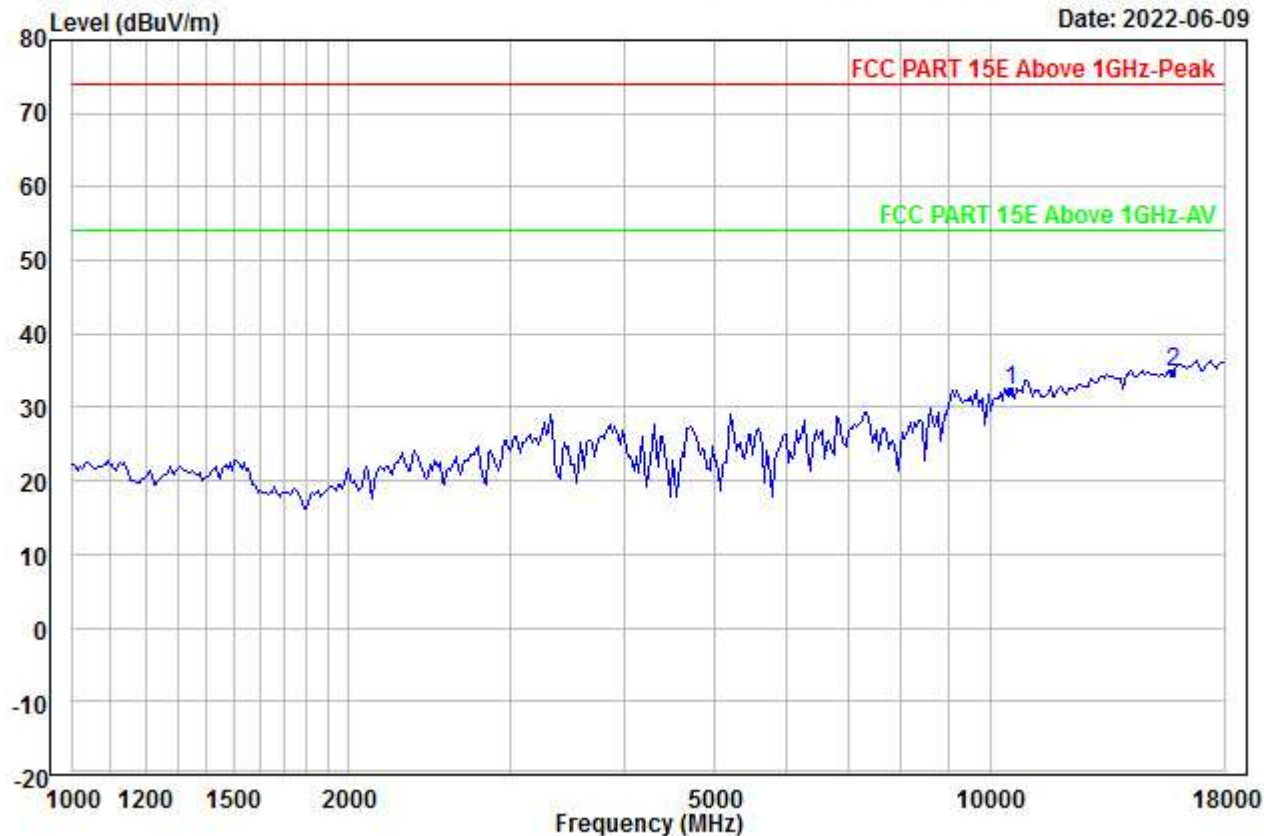


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10540.000	25.86	38.22	45.83	0.00	14.03	32.28	54.00	-21.72	---	---	Aver
2	PP15810.000	23.27	40.63	46.15	0.00	17.11	34.86	54.00	-19.14	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00201.EMI

Date: 2022-06-09

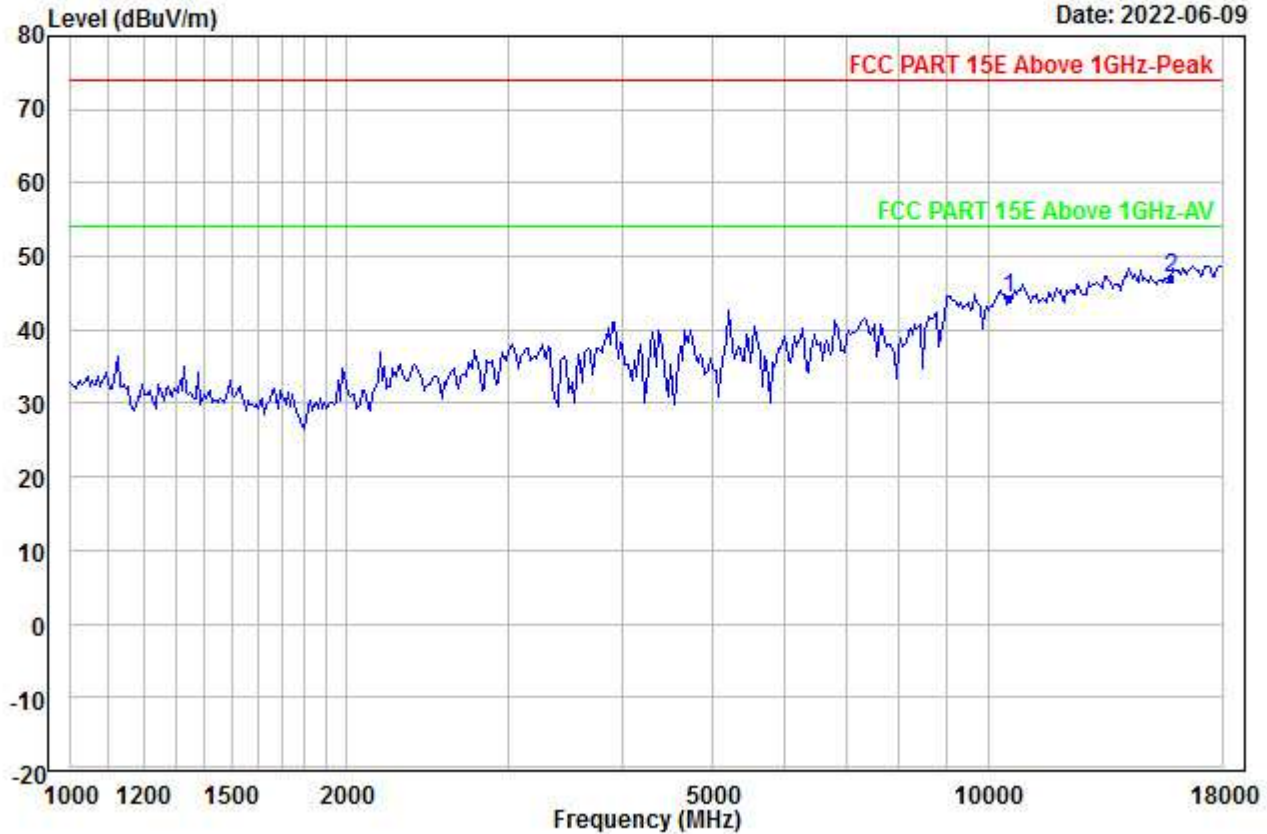


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5270
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10540.000	37.77	38.22	45.83	0.00	14.03	44.19	74.00	-29.81	---	---	Peak
2	PP15810.000	35.51	40.63	46.15	0.00	17.11	47.10	74.00	-26.90	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00202.EMI

Date: 2022-06-09

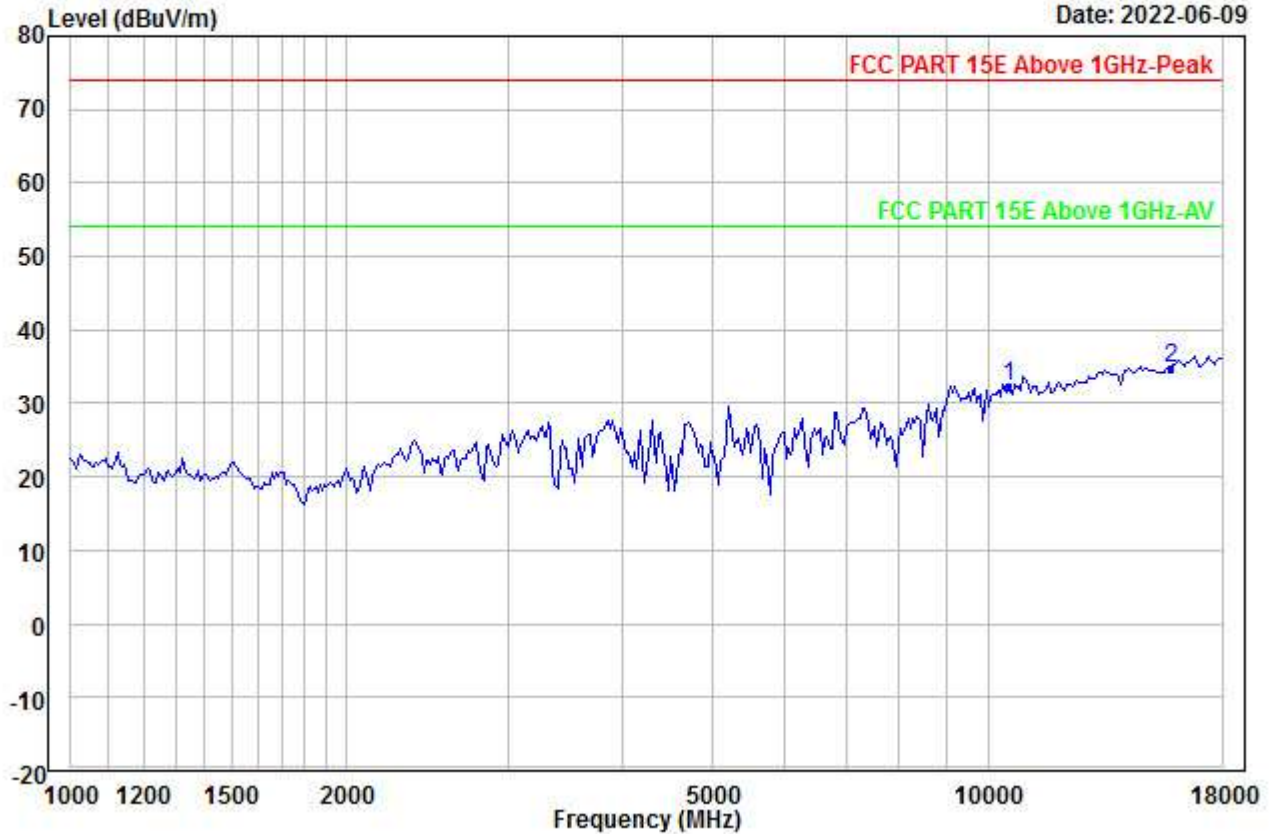


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10540.000	25.79	38.22	45.83	0.00	14.03	32.21	54.00	-21.79	---	---	Aver
2	PP15810.000	23.27	40.63	46.15	0.00	17.11	34.86	54.00	-19.14	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00203.EMI

Date: 2022-06-09

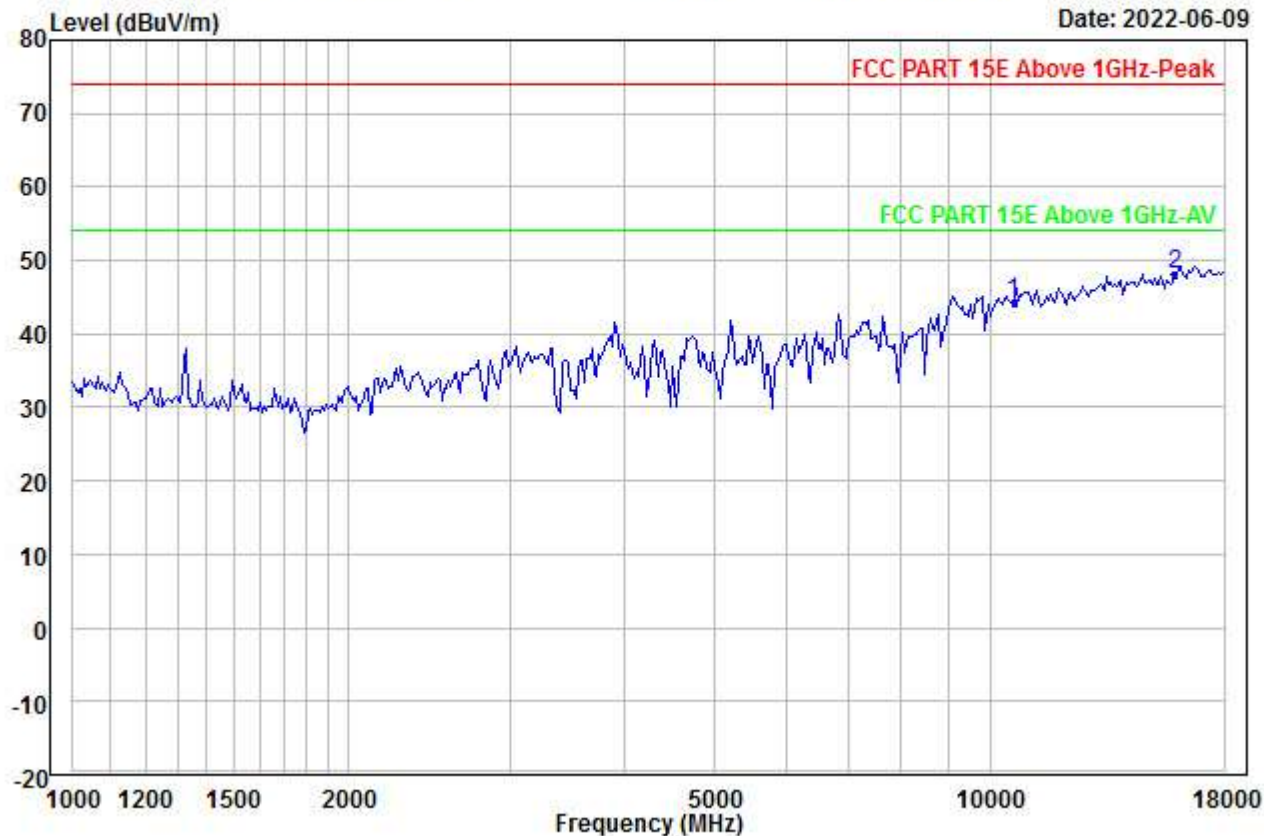


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10620.000	37.79	38.27	45.68	0.00	14.02	44.40	74.00	-29.60	---	---	Peak
2	PP15930.000	36.41	40.80	46.24	0.00	17.19	48.16	74.00	-25.84	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00204.EMI

Date: 2022-06-09

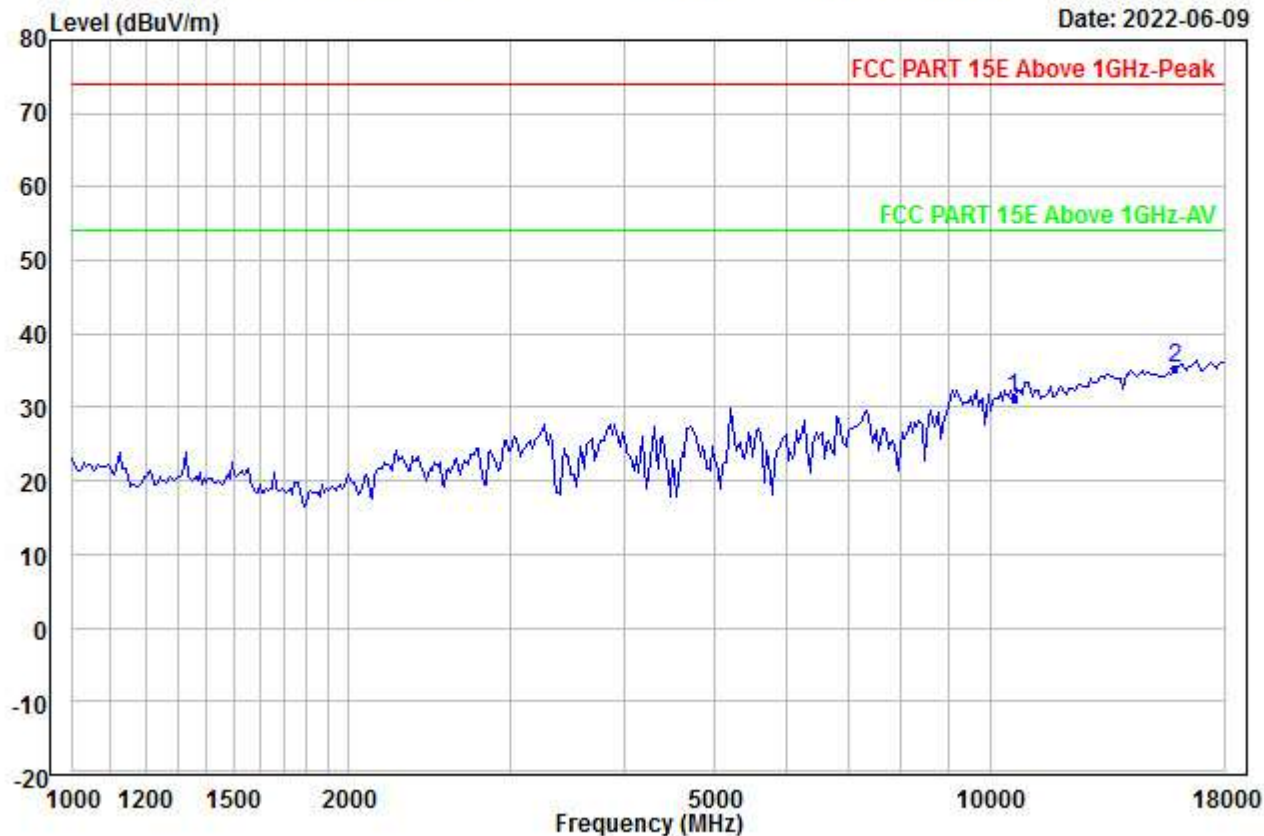


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10620.000	24.70	38.27	45.68	0.00	14.02	31.31	54.00	-22.69	---	---	Aver
2	PP15930.000	23.52	40.80	46.24	0.00	17.19	35.27	54.00	-18.73	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00205.EMI

Date: 2022-06-09

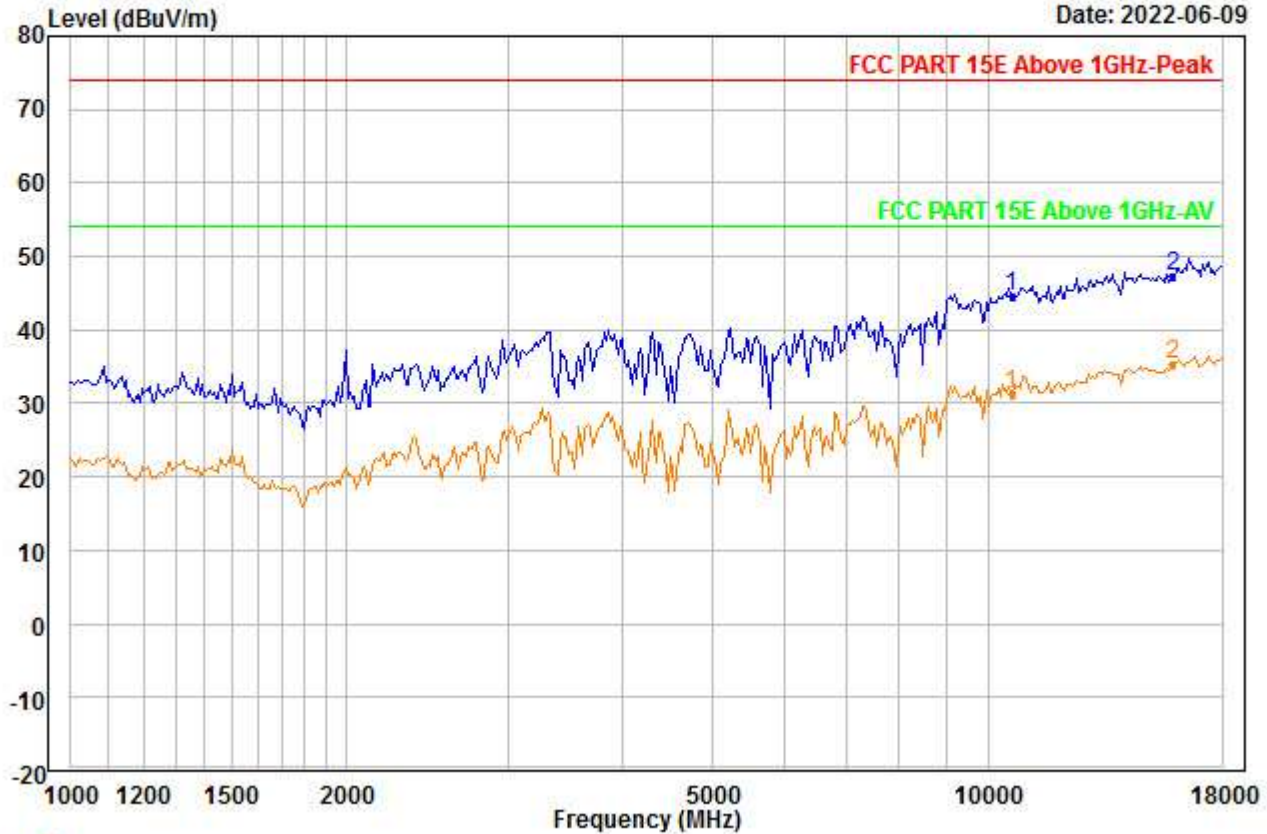


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5310
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10620.000	37.90	38.27	45.68	0.00	14.02	44.51	74.00	-29.49	---	---	Peak
2	PP15930.000	35.66	40.80	46.24	0.00	17.19	47.41	74.00	-26.59	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00206.EMI

Date: 2022-06-09

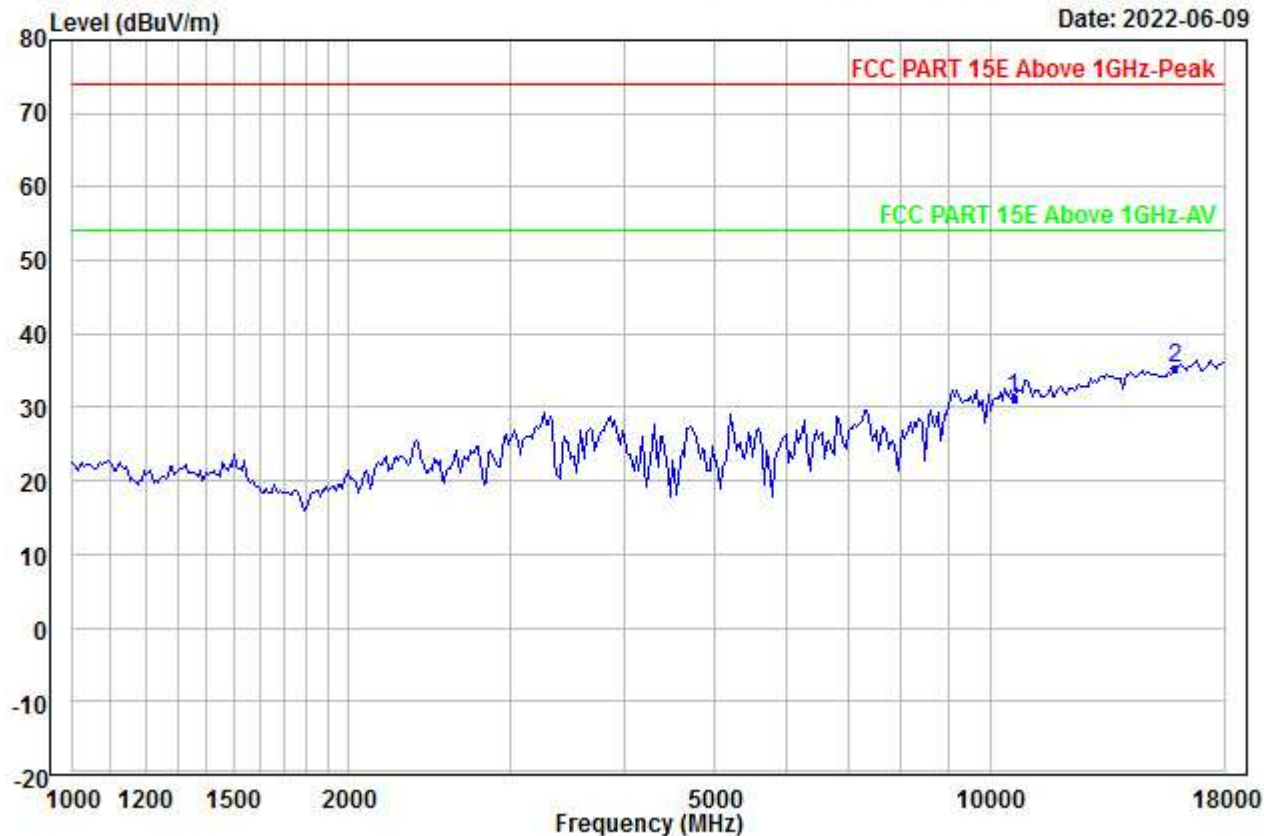


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10620.000	24.70	38.27	45.68	0.00	14.02	31.31	54.00	-22.69	---	---	Aver
2	PP15930.000	23.52	40.80	46.24	0.00	17.19	35.27	54.00	-18.73	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00207.EMI

Date: 2022-06-09

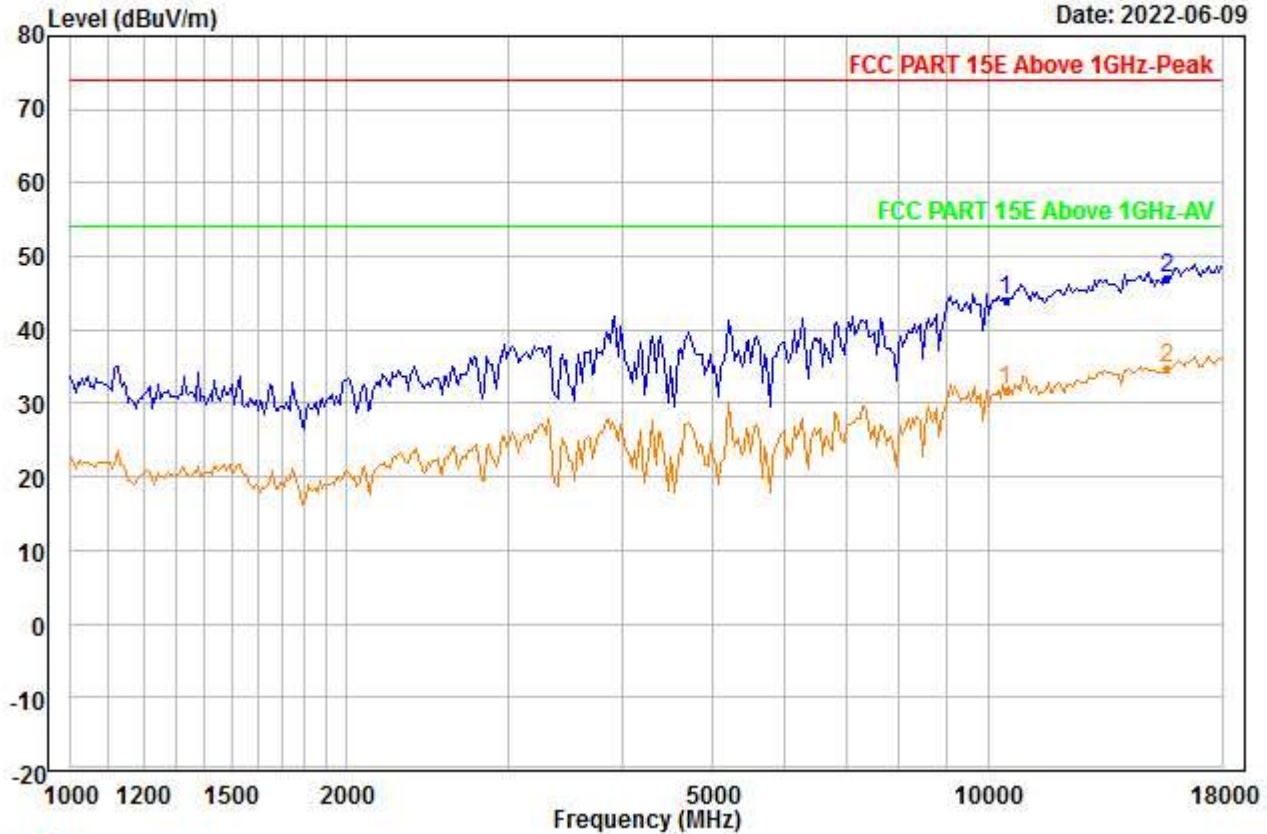


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5230
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10460.000	37.73	38.18	45.92	0.00	14.06	44.05	74.00	-29.95	---	---	Peak
2	PP15690.000	35.60	40.47	46.05	0.00	17.03	47.05	74.00	-26.95	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00208.EMI

Date: 2022-06-09

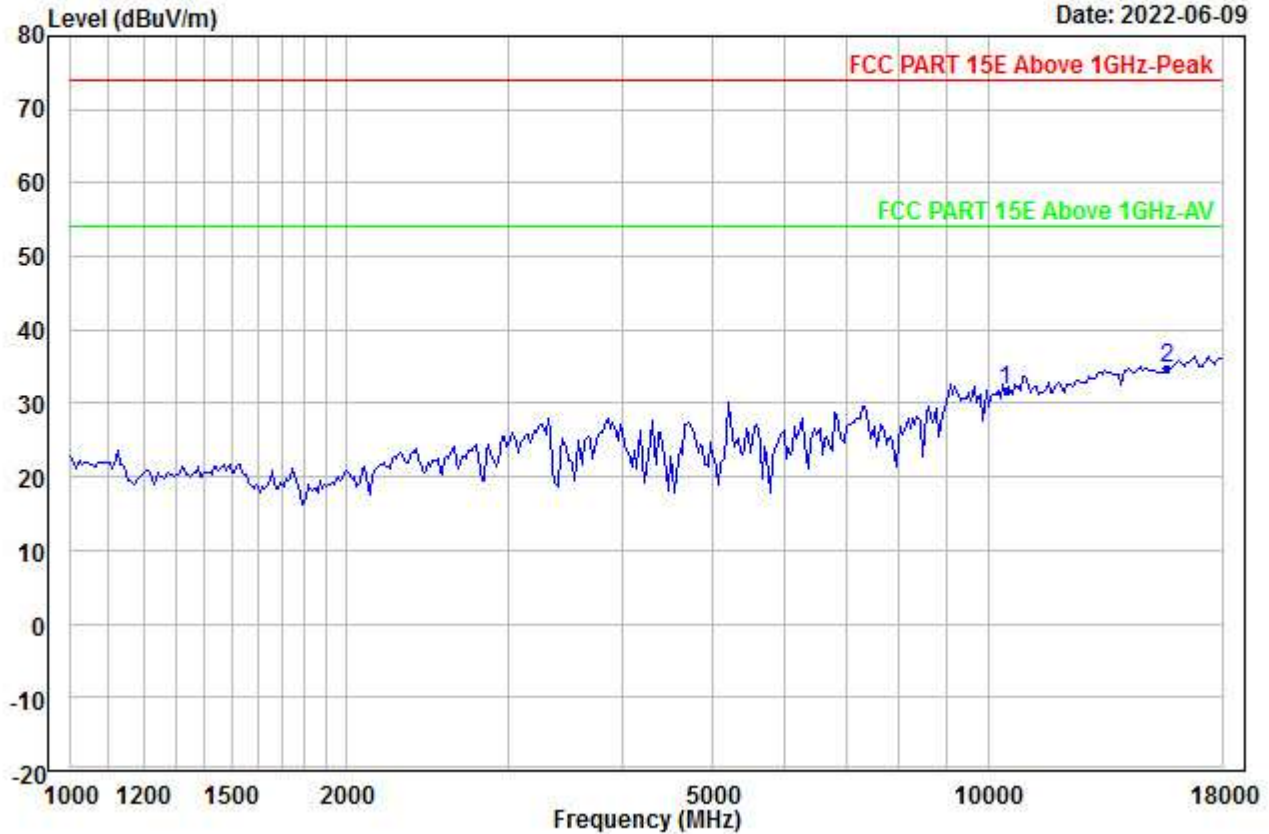


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10460.000	25.48	38.18	45.92	0.00	14.06	31.80	54.00	-22.20	---	---	Aver
2	PP15690.000	23.39	40.47	46.05	0.00	17.03	34.84	54.00	-19.16	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00209.EMI

Date: 2022-06-09

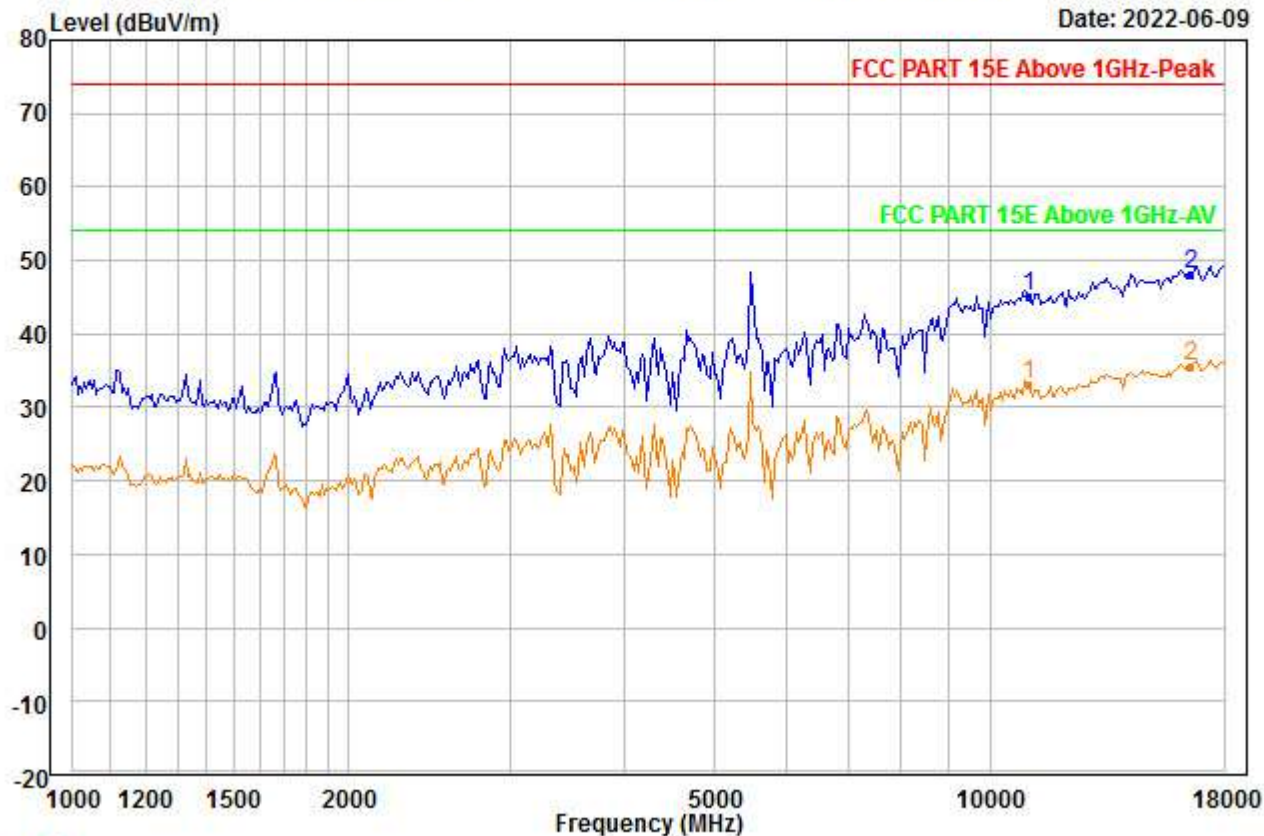


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5510
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	37.64	38.52	45.04	0.00	13.93	45.05	74.00	-28.95	---	---	Peak
2	PP16530.000	35.66	41.55	46.64	0.00	17.47	48.04	74.00	-25.96	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00210.EMI

Date: 2022-06-09

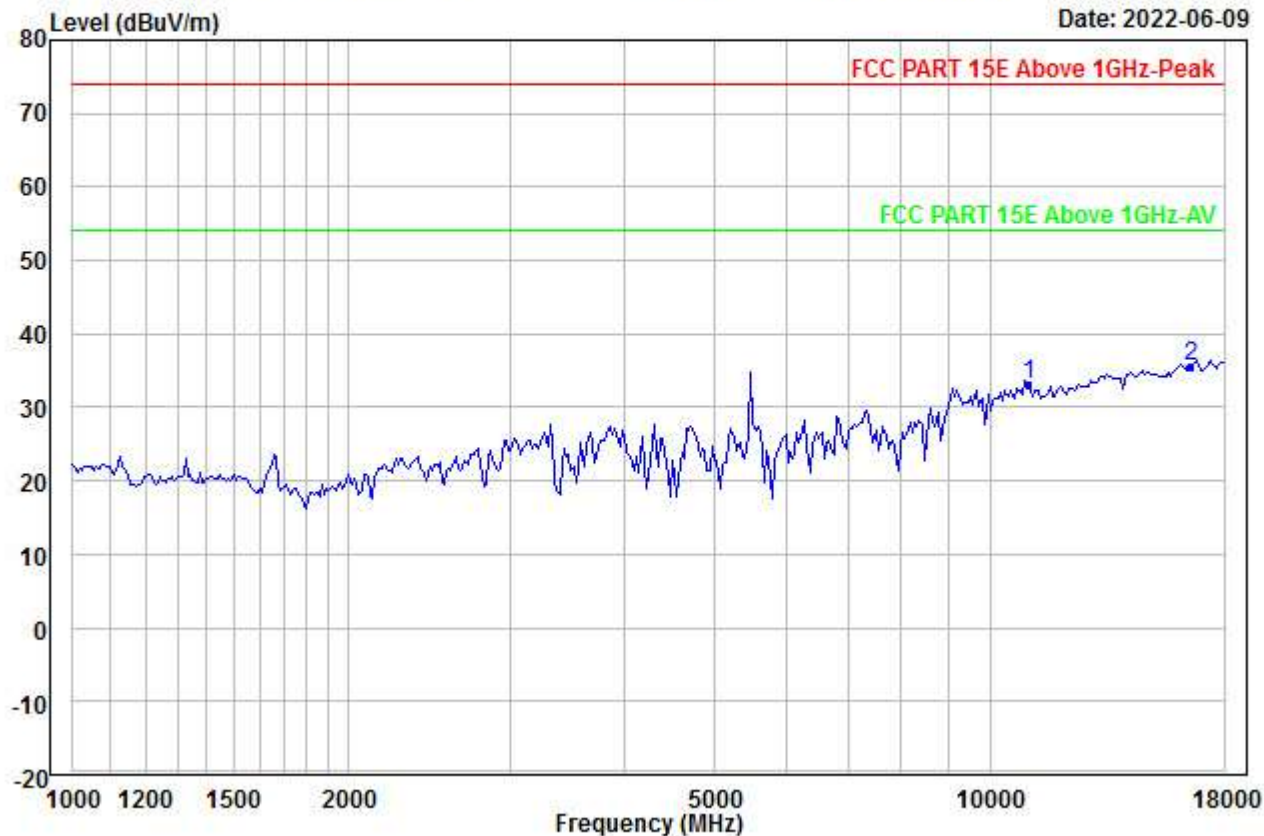


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	25.81	38.52	45.04	0.00	13.93	33.22	54.00	-20.78	---	---	Aver
2	PP16530.000	23.20	41.55	46.64	0.00	17.47	35.58	54.00	-18.42	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00211.EMI

Date: 2022-06-09

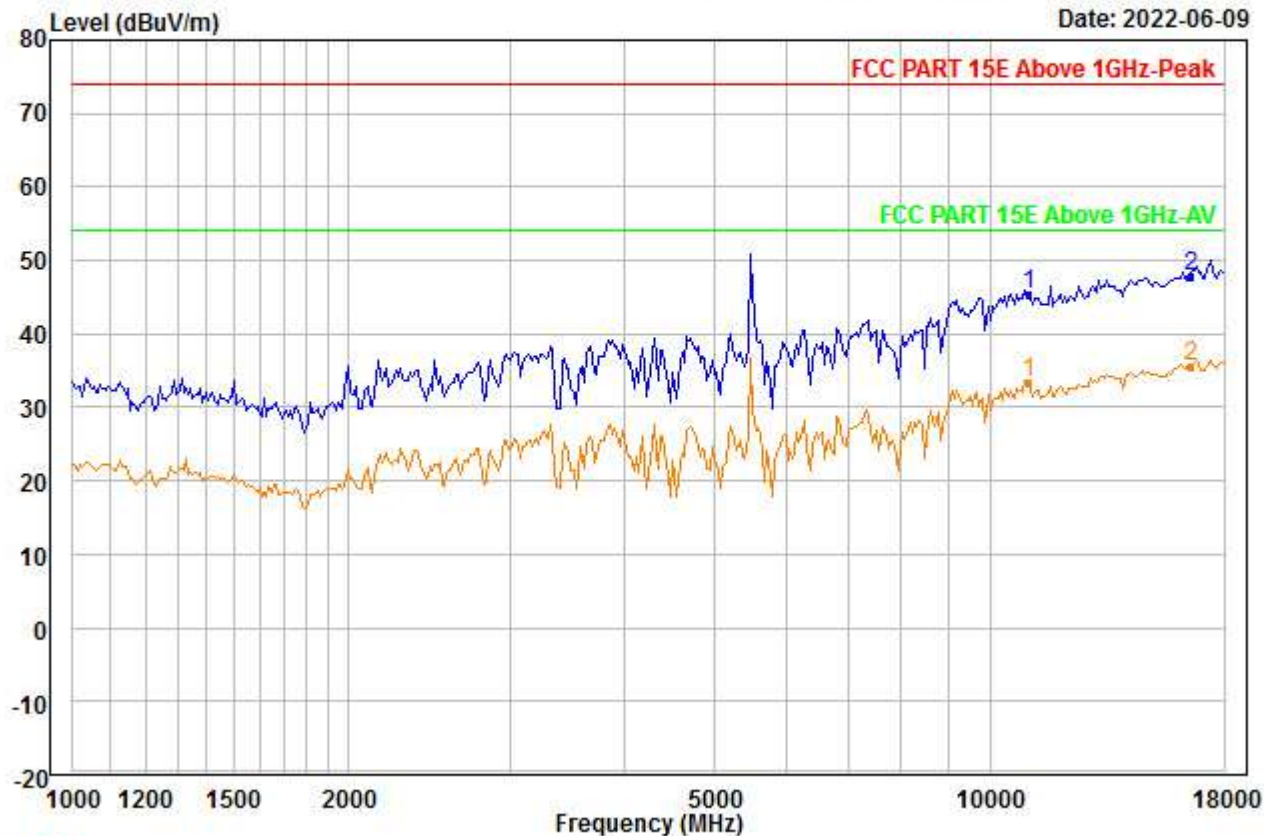


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5510
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	38.07	38.52	45.04	0.00	13.93	45.48	74.00	-28.52	---	---	Peak
2	PP16530.000	35.39	41.55	46.64	0.00	17.47	47.77	74.00	-26.23	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00212.EMI

Date: 2022-06-09

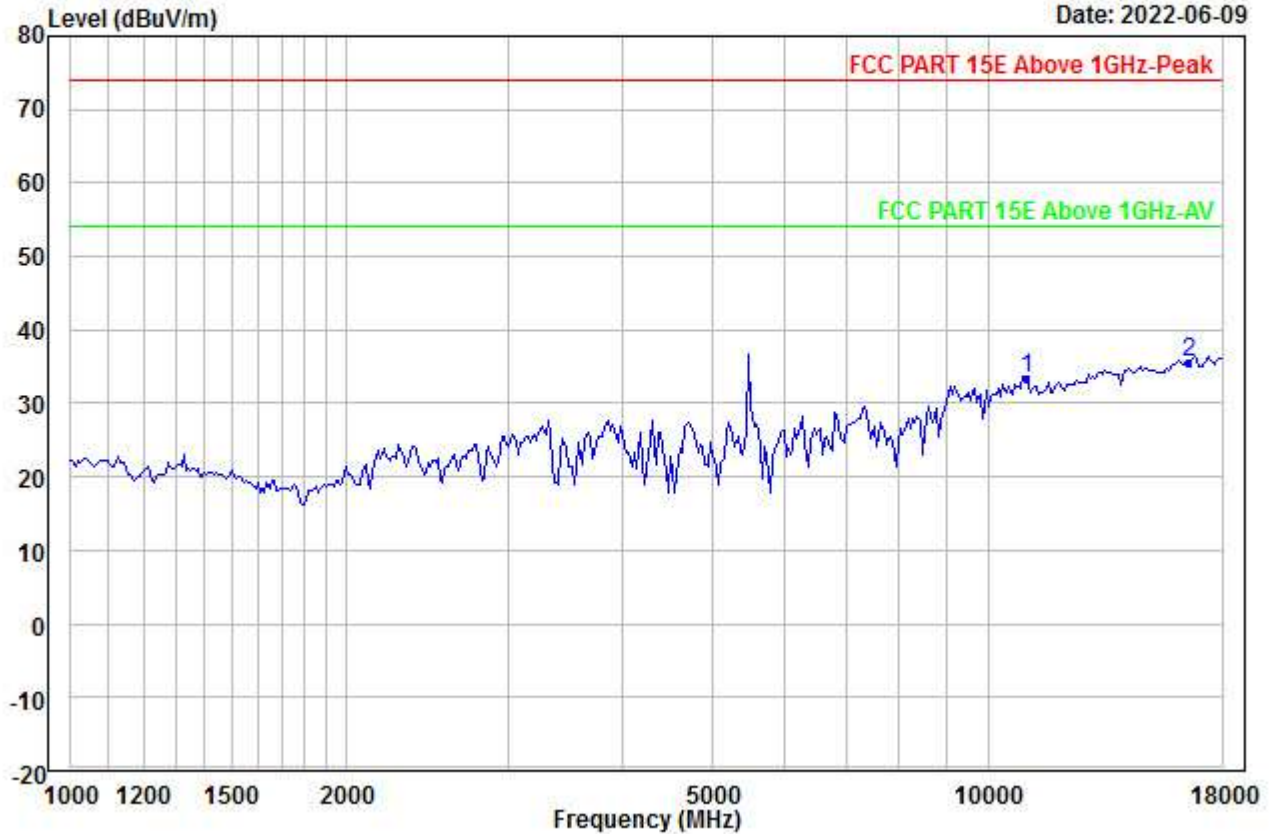


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	25.88	38.52	45.04	0.00	13.93	33.29	54.00	-20.71	---	---	Aver
2	PP16530.000	23.20	41.55	46.64	0.00	17.47	35.58	54.00	-18.42	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00213.EMI

Date: 2022-06-09

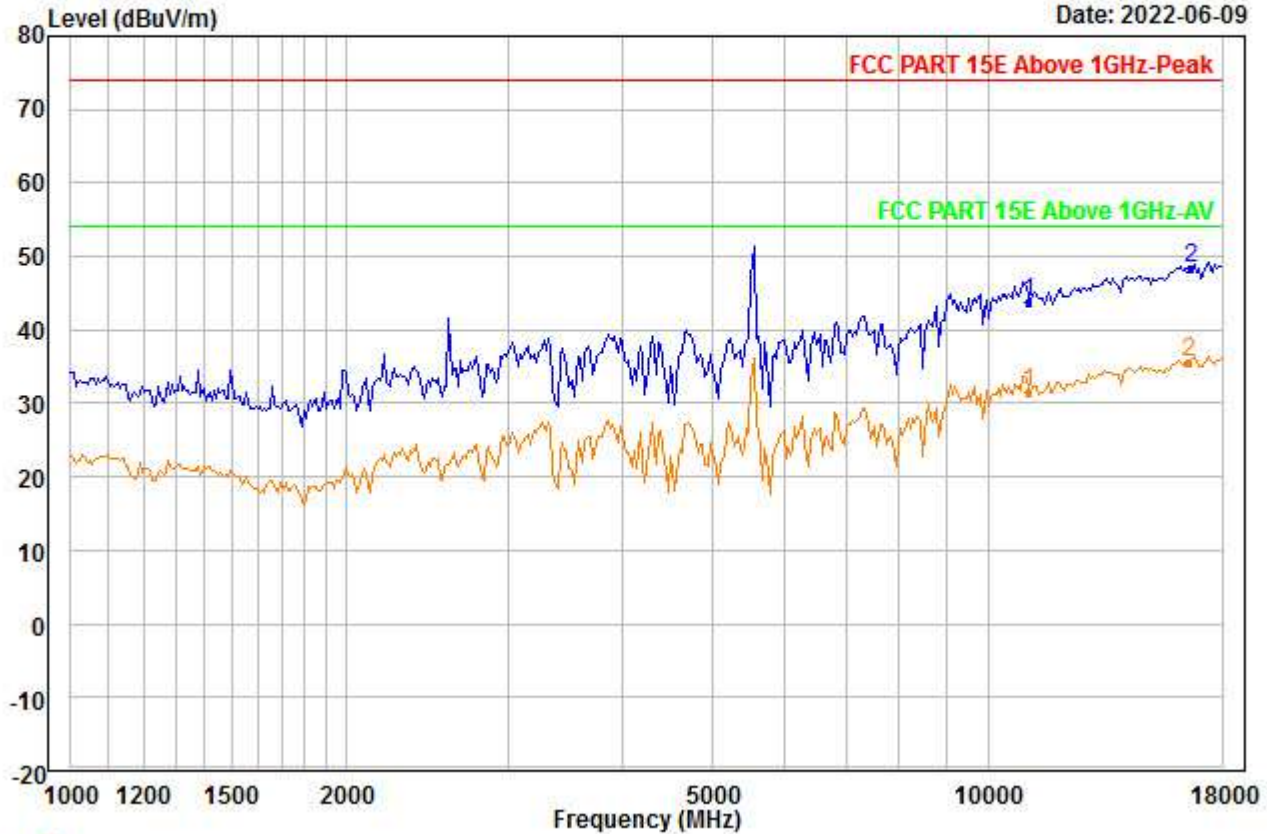


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5550
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	36.39	38.58	45.22	0.00	13.99	43.74	74.00	-30.26	---	---	Peak
2	PP16650.000	35.79	41.74	46.78	0.00	17.52	48.27	74.00	-25.73	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00214.EMI

Date: 2022-06-09

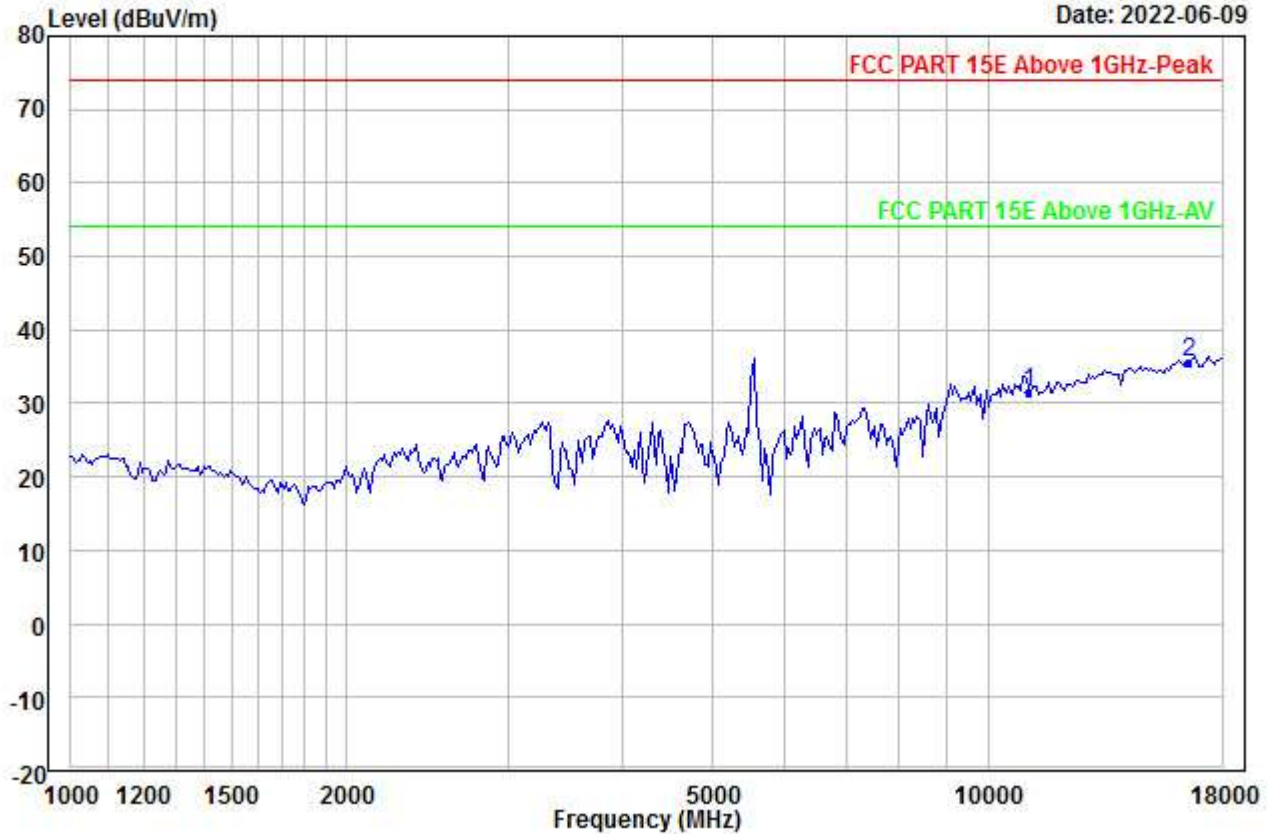


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5550
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	24.15	38.58	45.22	0.00	13.99	31.50	54.00	-22.50	---	---	Aver
2	PP16550.000	23.16	41.58	46.66	0.00	17.48	35.56	54.00	-18.44	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00215.EMI

Date: 2022-06-09

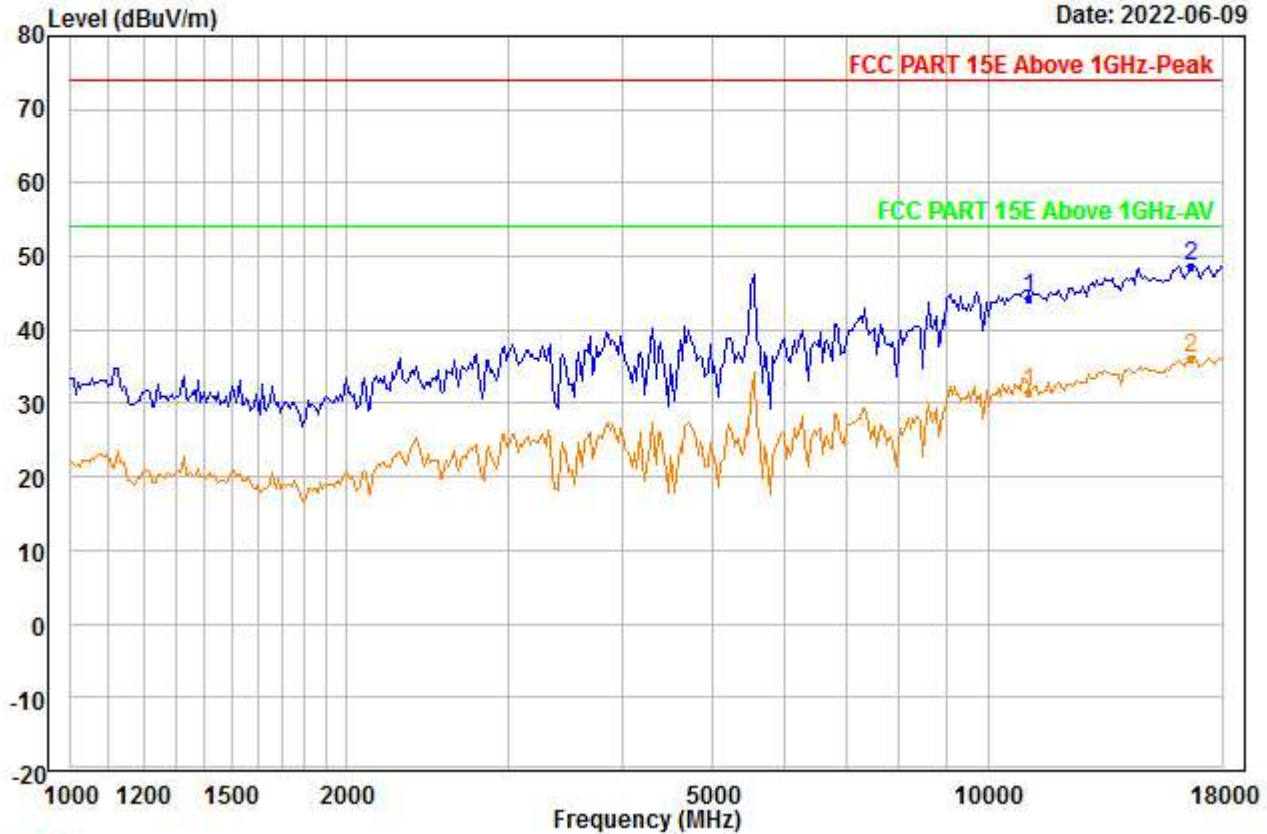


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5550
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	37.01	38.58	45.22	0.00	13.99	44.36	74.00	-29.64	---	---	Peak
2	PP16650.000	36.23	41.74	46.78	0.00	17.52	48.71	74.00	-25.29	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00216.EMI

Date: 2022-06-09

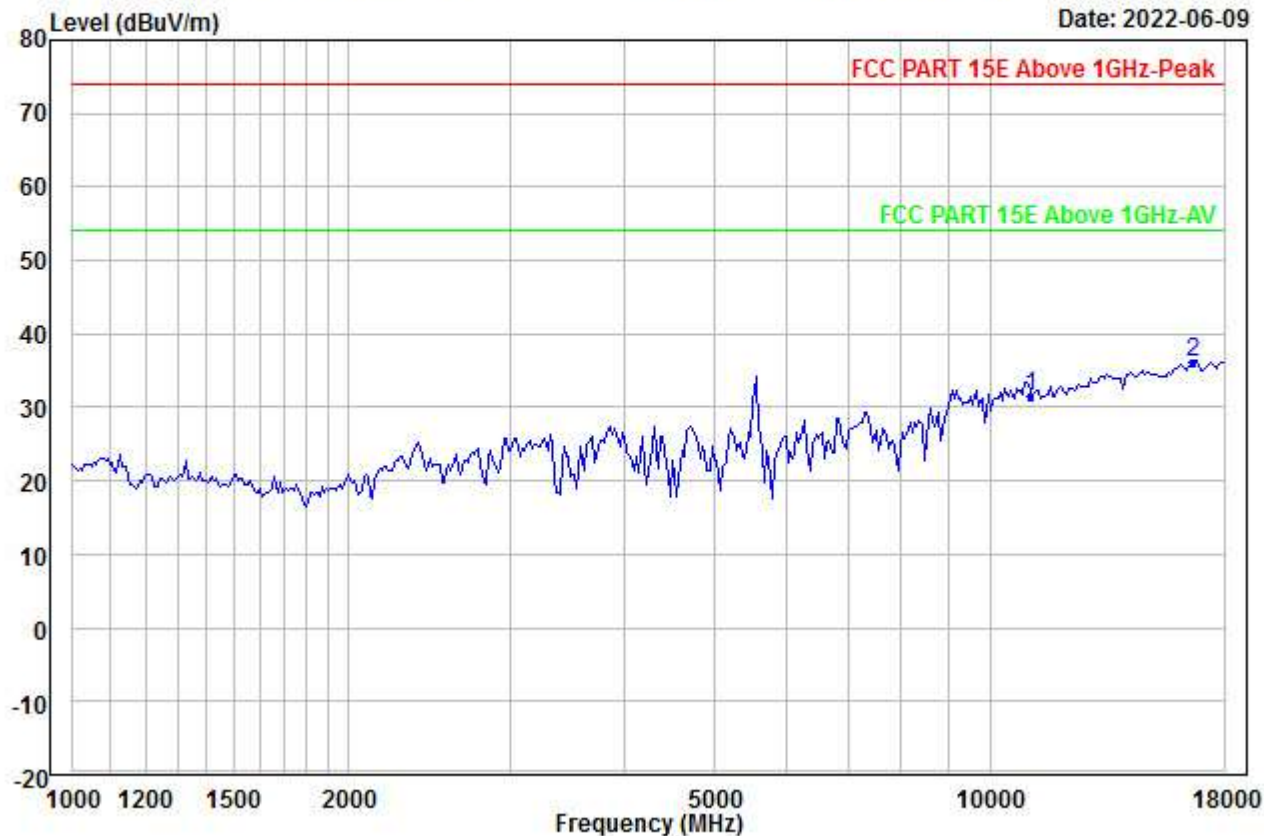


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5550
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	24.24	38.58	45.22	0.00	13.99	31.59	54.00	-22.41	---	---	Aver
2	PP16650.000	23.56	41.74	46.78	0.00	17.52	36.04	54.00	-17.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00217.EMI

Date: 2022-06-09

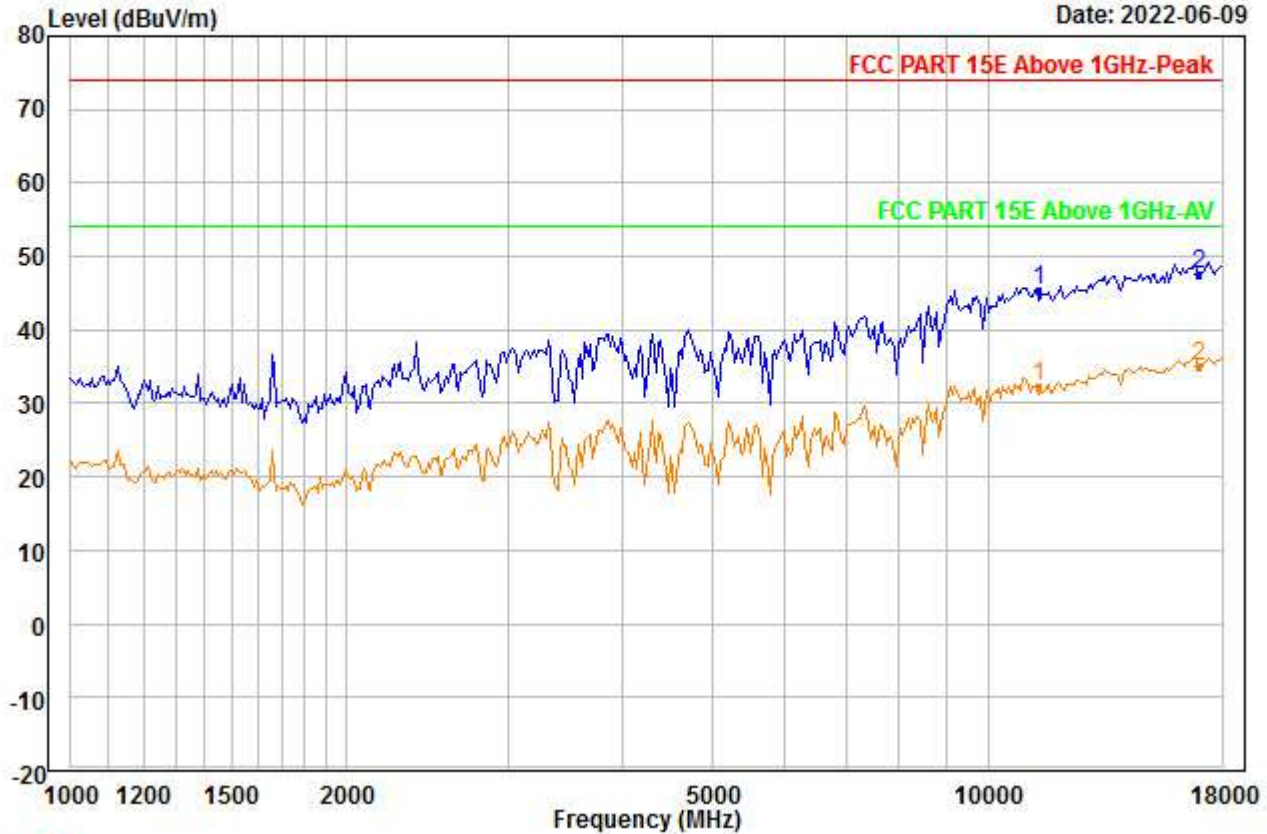


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5670
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11340.000	38.09	38.77	45.75	0.00	14.17	45.28	74.00	-28.72	---	---	Peak
2	PP17010.000	34.69	42.30	47.19	0.00	17.69	47.49	74.00	-26.51	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00218.EMI

Date: 2022-06-09

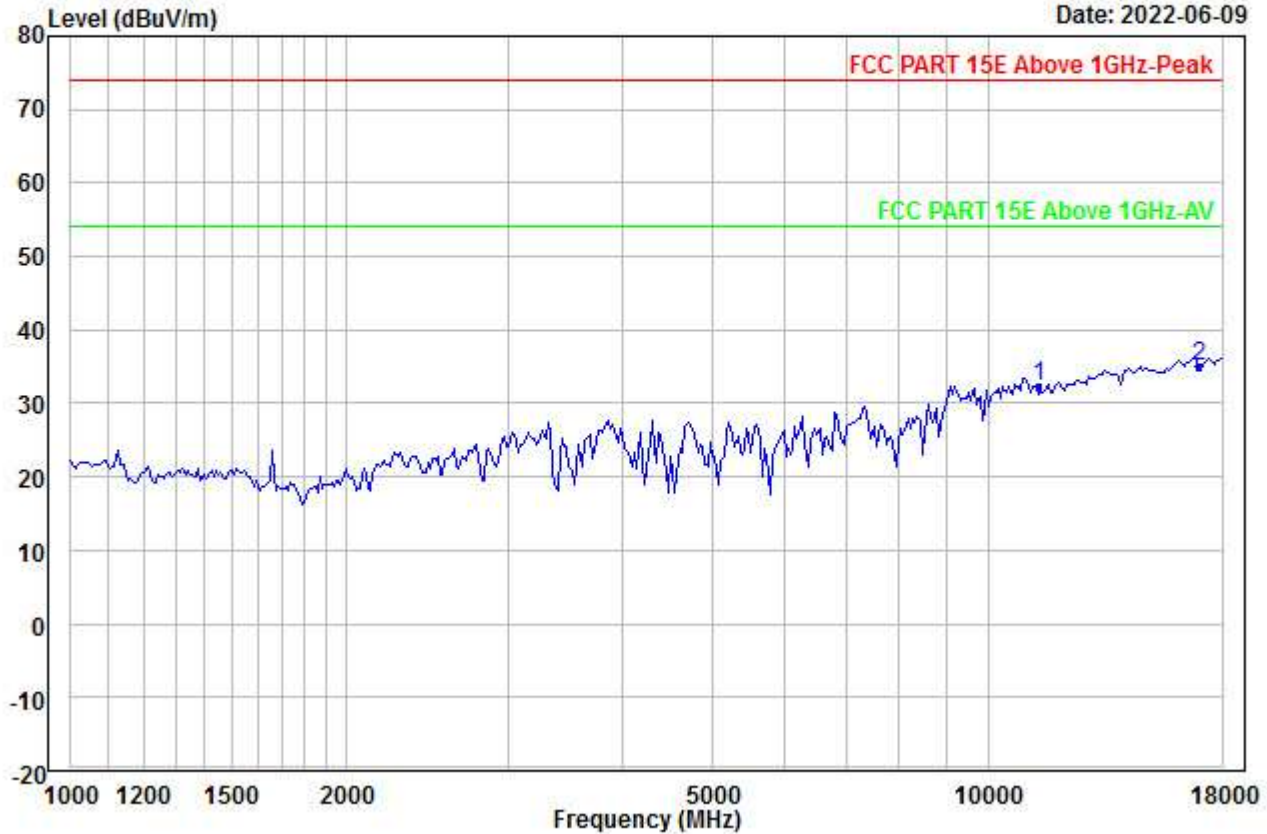


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11340.000	25.03	38.77	45.75	0.00	14.17	32.22	54.00	-21.78	---	---	Aver
2	PP17010.000	22.25	42.30	47.19	0.00	17.69	35.05	54.00	-18.95	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00219.EMI

Date: 2022-06-09

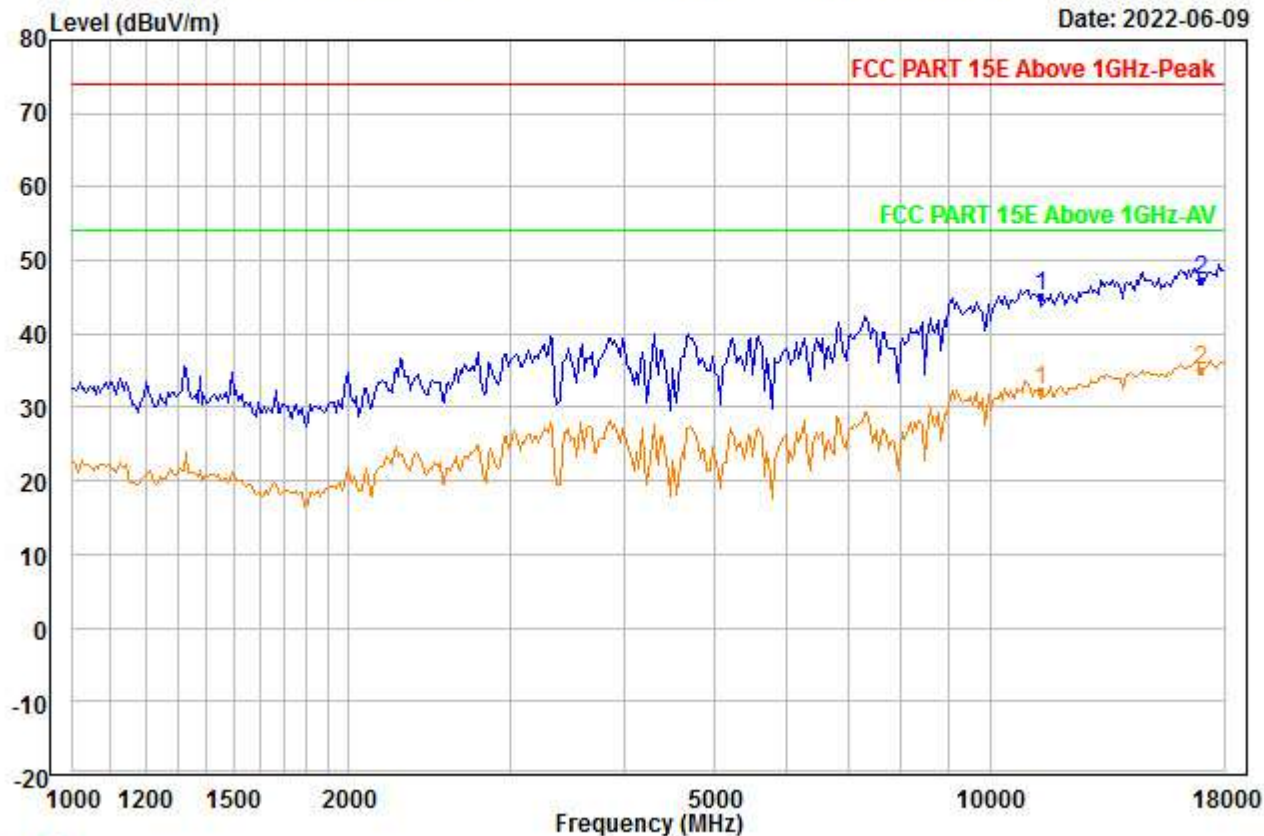


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5670
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11340.000	37.98	38.77	45.75	0.00	14.17	45.17	74.00	-28.83	---	---	Peak
2	PP17010.000	34.61	42.30	47.19	0.00	17.69	47.41	74.00	-26.59	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00220.EMI

Date: 2022-06-09

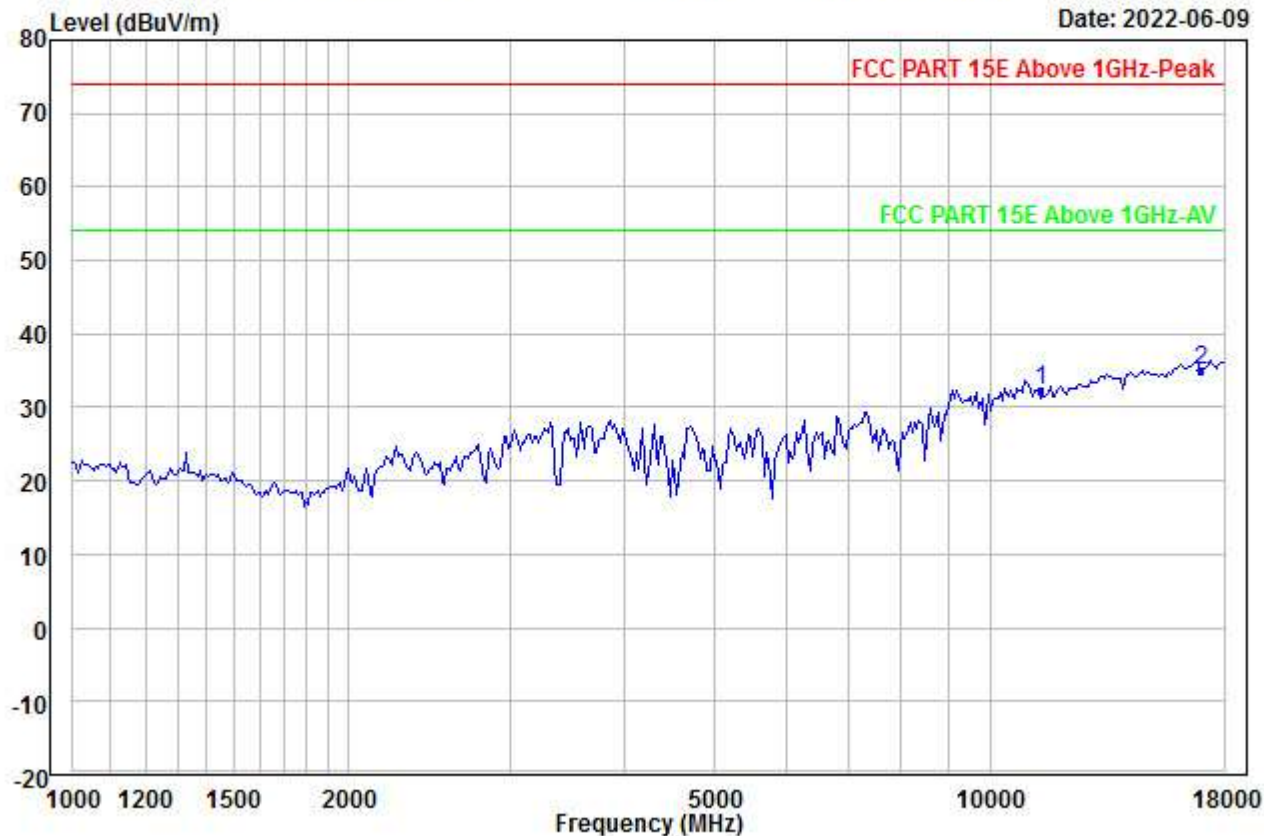


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11340.000	25.12	38.77	45.75	0.00	14.17	32.31	54.00	-21.69	---	---	Aver
2	PP17010.000	22.25	42.30	47.19	0.00	17.69	35.05	54.00	-18.95	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00221.EMI

Date: 2022-06-09

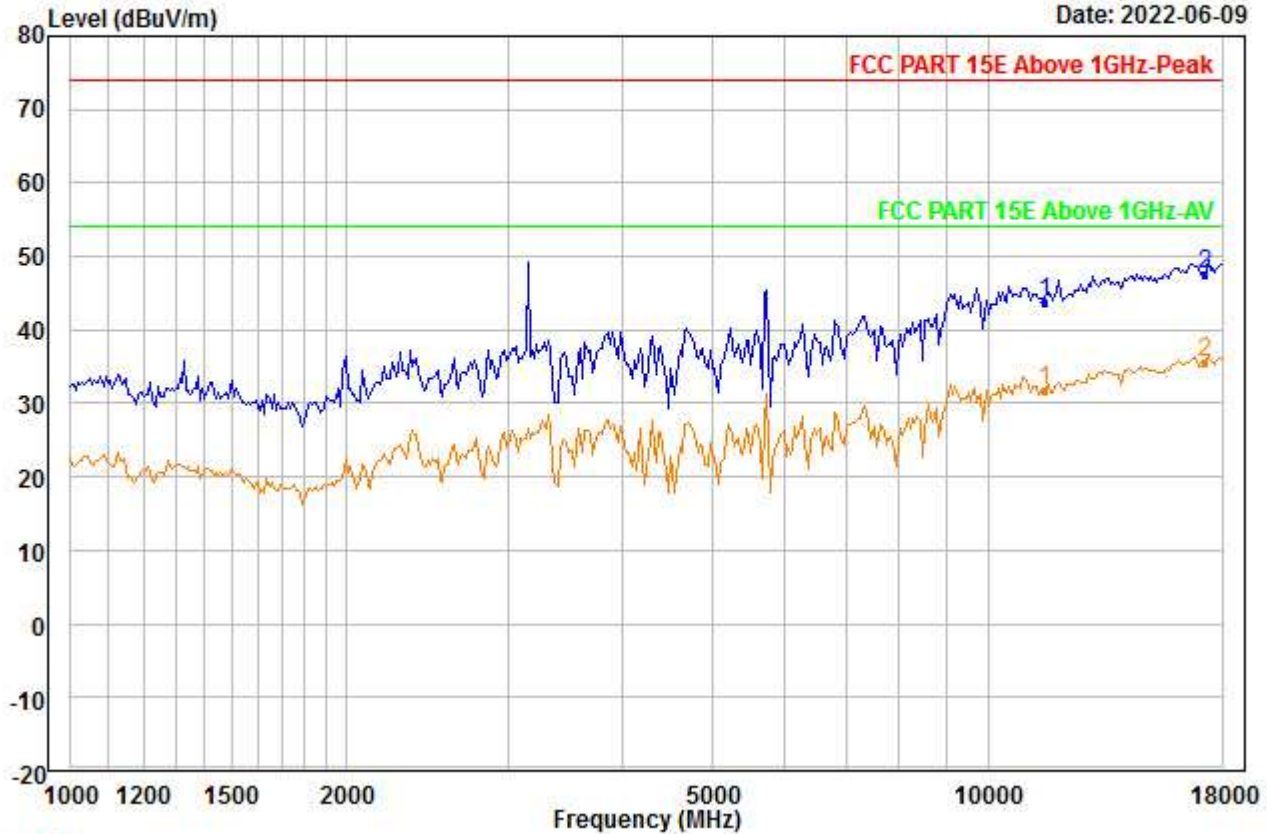


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5755
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	36.77	38.91	46.10	0.00	14.29	43.87	74.00	-30.13	---	---	Peak
2	PP17265.000	34.40	42.19	46.88	0.00	17.85	47.56	74.00	-26.44	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00222.EMI

Date: 2022-06-09

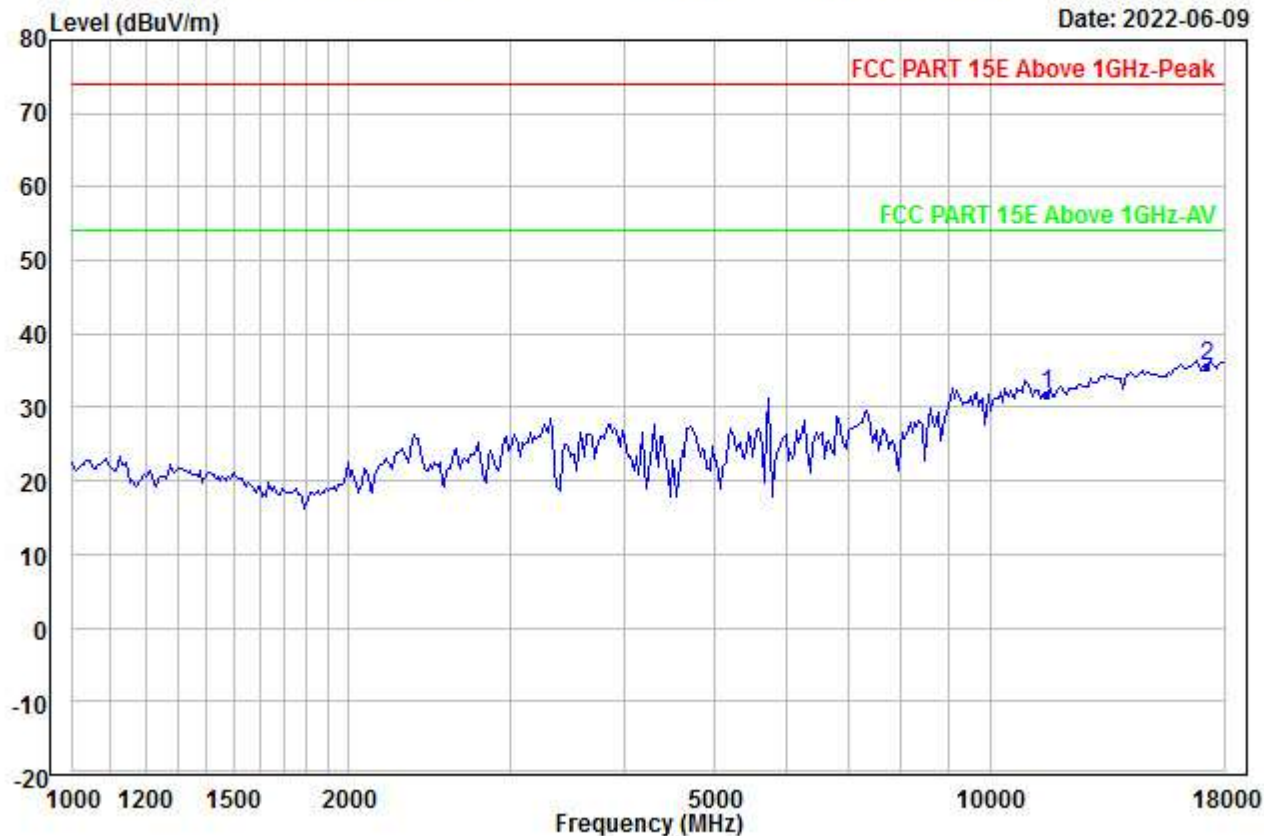


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	24.63	38.91	46.10	0.00	14.29	31.73	54.00	-22.27	---	---	Aver
2	PP17265.000	22.52	42.19	46.88	0.00	17.85	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00223.EMI

Date: 2022-06-09

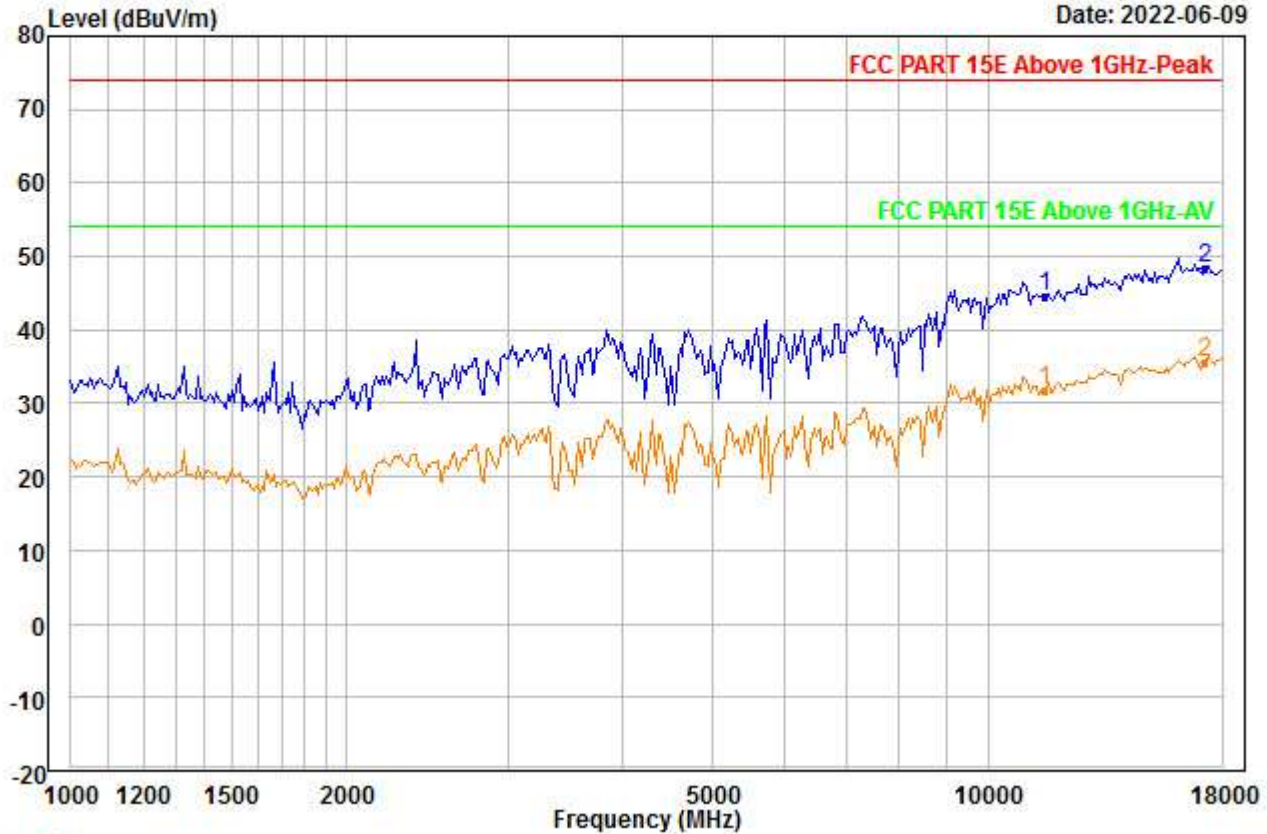


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5755
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	37.40	38.91	46.10	0.00	14.29	44.50	74.00	-29.50	---	---	Peak
2	PP17265.000	35.29	42.19	46.88	0.00	17.85	48.45	74.00	-25.55	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00224.EMI

Date: 2022-06-09

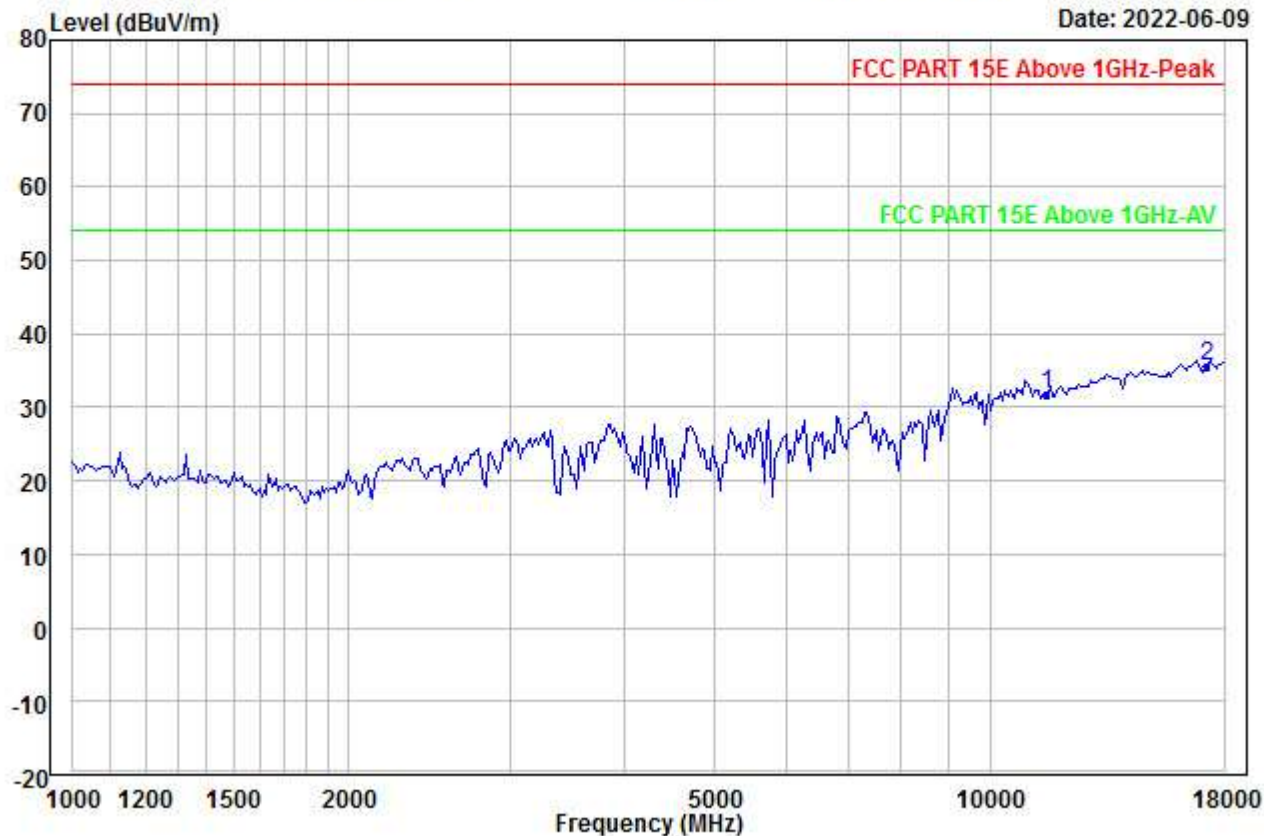


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	24.54	38.91	46.10	0.00	14.29	31.64	54.00	-22.36	---	---	Aver
2	PP17265.000	22.41	42.19	46.88	0.00	17.85	35.57	54.00	-18.43	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00225.EMI

Date: 2022-06-09

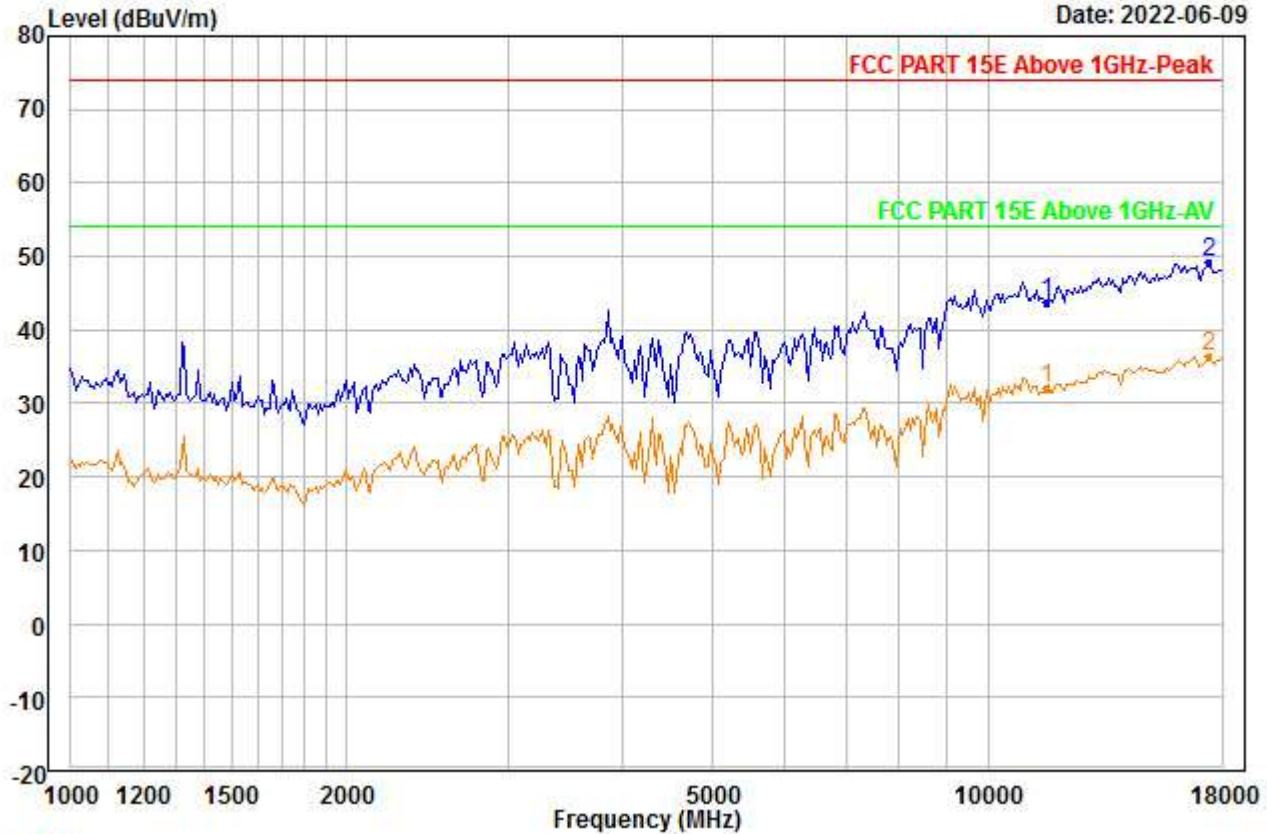


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5795
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	36.61	38.95	46.08	0.00	14.35	43.83	74.00	-30.17	---	---	Peak
2	PP17385.000	35.82	42.15	46.74	0.00	17.92	49.15	74.00	-24.85	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00226.EMI

Date: 2022-06-09

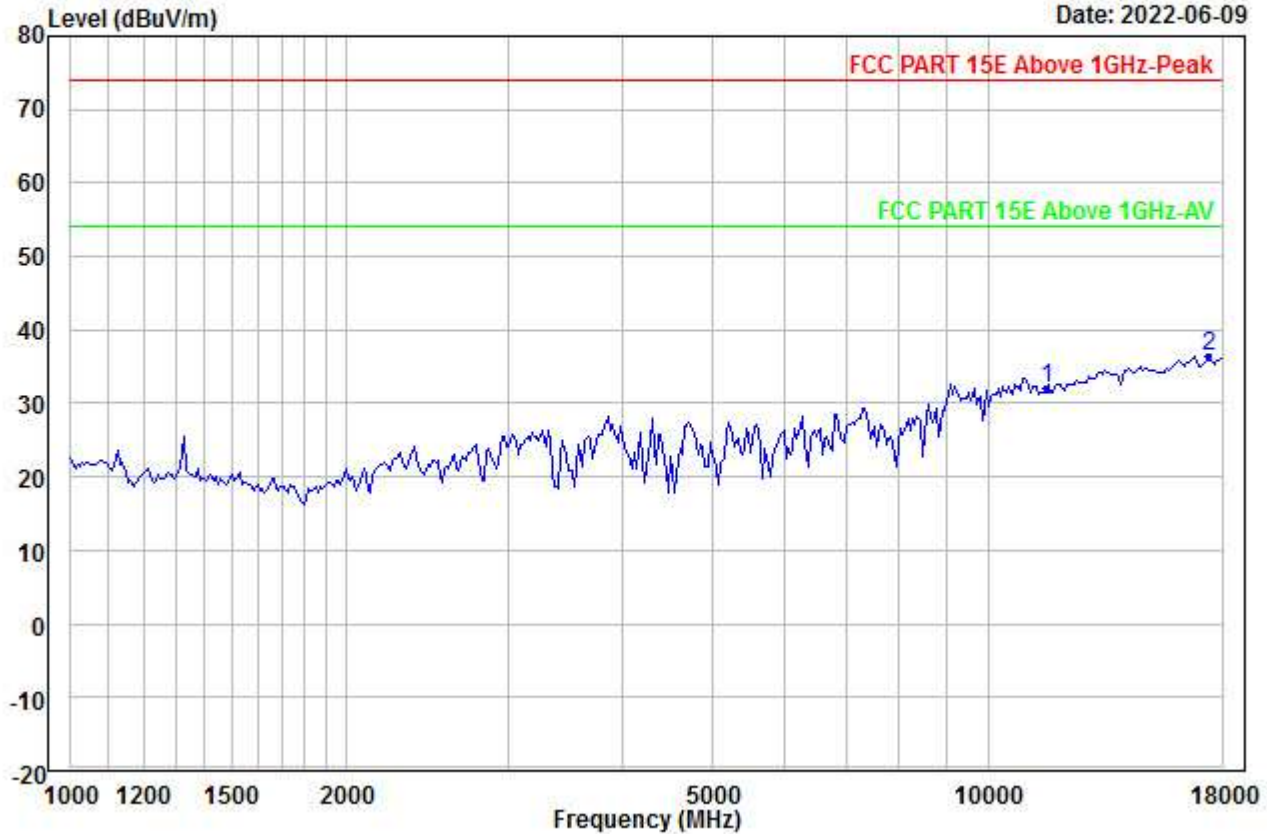


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : N40_ANT0+1_5795
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	24.69	38.95	46.08	0.00	14.35	31.91	54.00	-22.09	---	---	Aver
2	PP17385.000	23.02	42.15	46.74	0.00	17.92	36.35	54.00	-17.65	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00227.EMI

Date: 2022-06-09

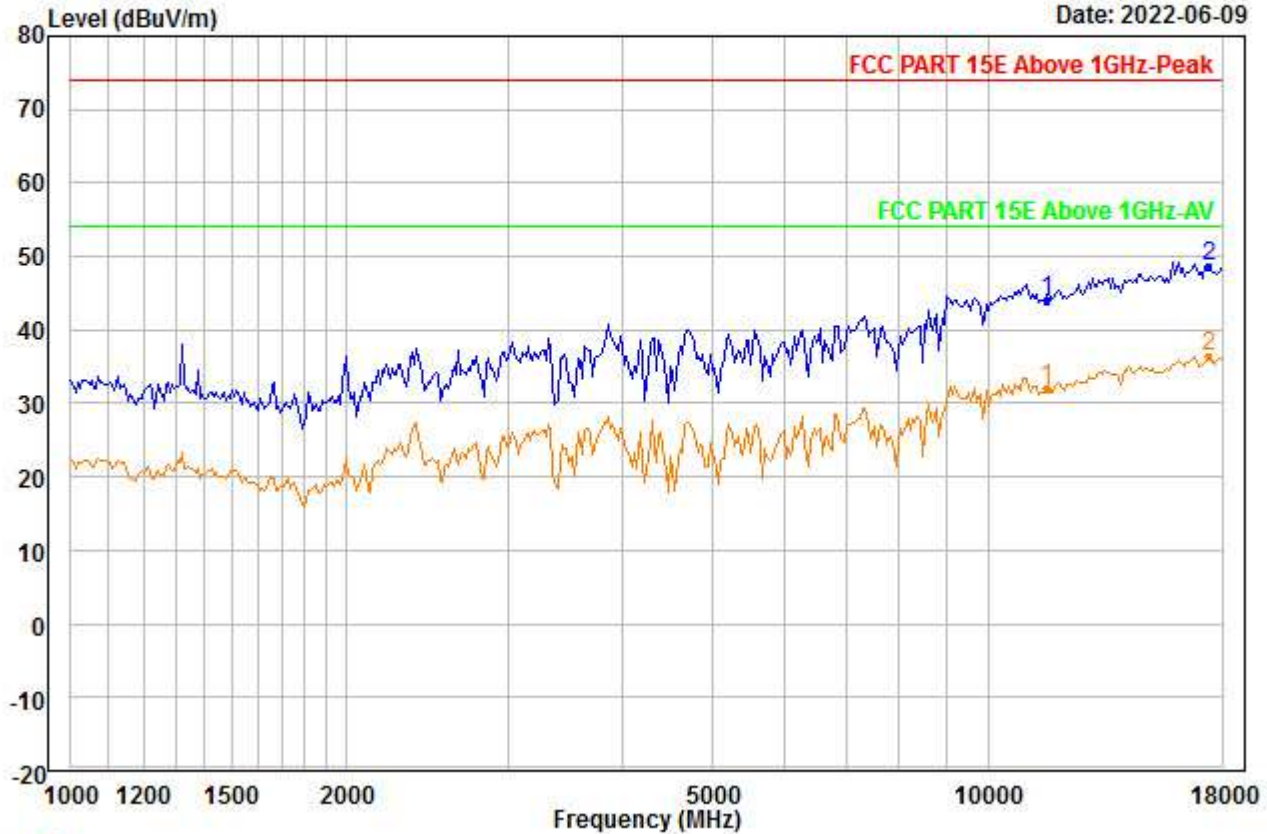


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	36.80	38.95	46.08	0.00	14.35	44.02	74.00	-29.98	---	---	Peak
2	PP17385.000	35.29	42.15	46.74	0.00	17.92	48.62	74.00	-25.38	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00228.EMI

Date: 2022-06-09

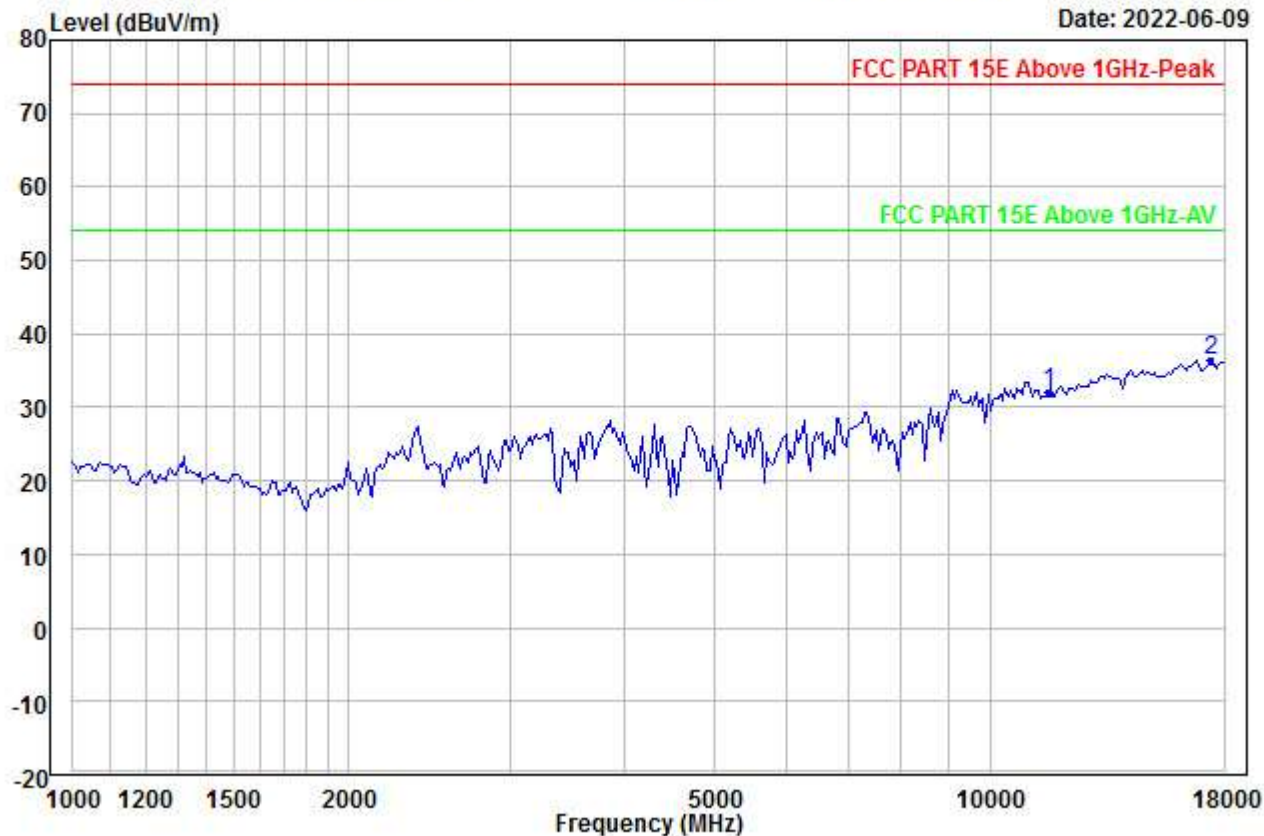


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	24.78	38.95	46.08	0.00	14.35	32.00	54.00	-22.00	---	---	Aver
2	PP17385.000	23.02	42.15	46.74	0.00	17.92	36.35	54.00	-17.65	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00229.EMI

Date: 2022-06-09

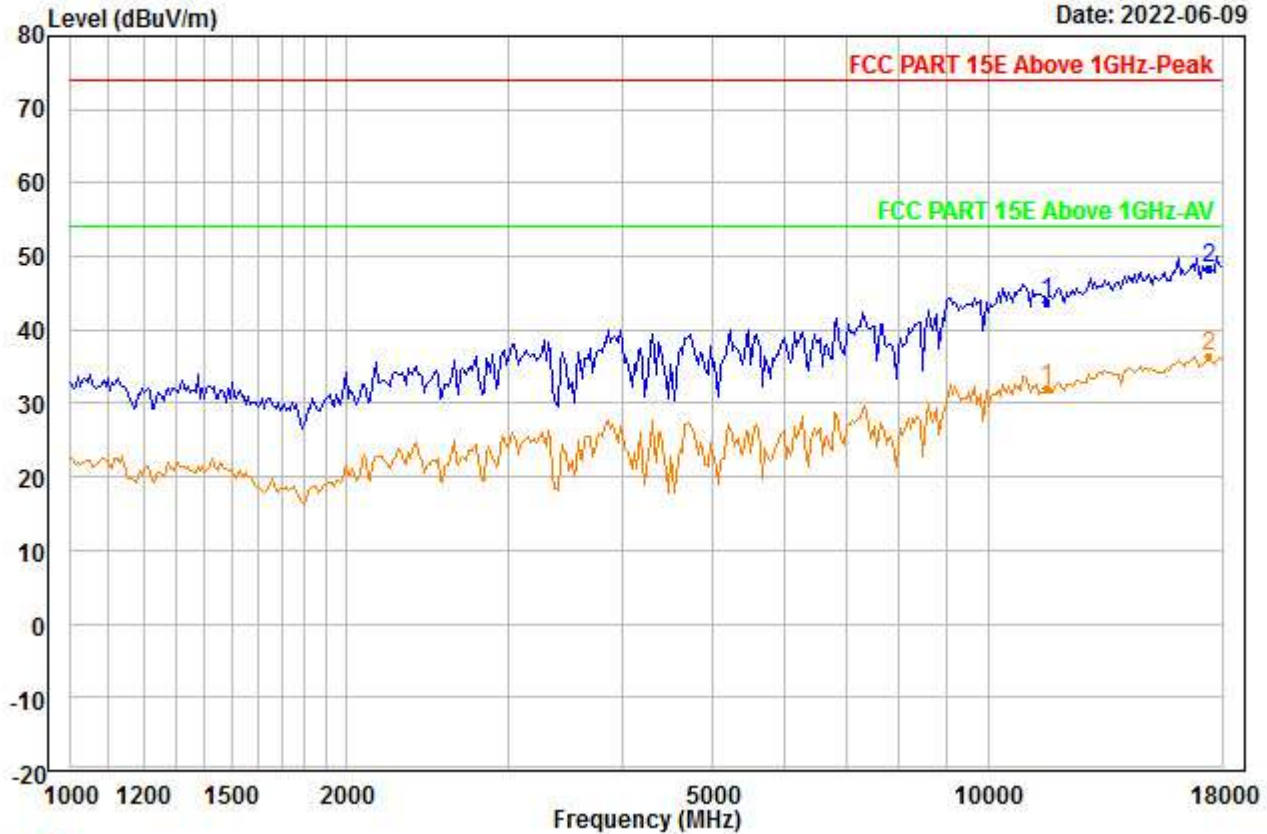


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	36.65	38.95	46.08	0.00	14.35	43.87	74.00	-30.13	---	---	Peak
2	PP17385.000	35.19	42.15	46.74	0.00	17.92	48.52	74.00	-25.48	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00230.EMI

Date: 2022-06-09

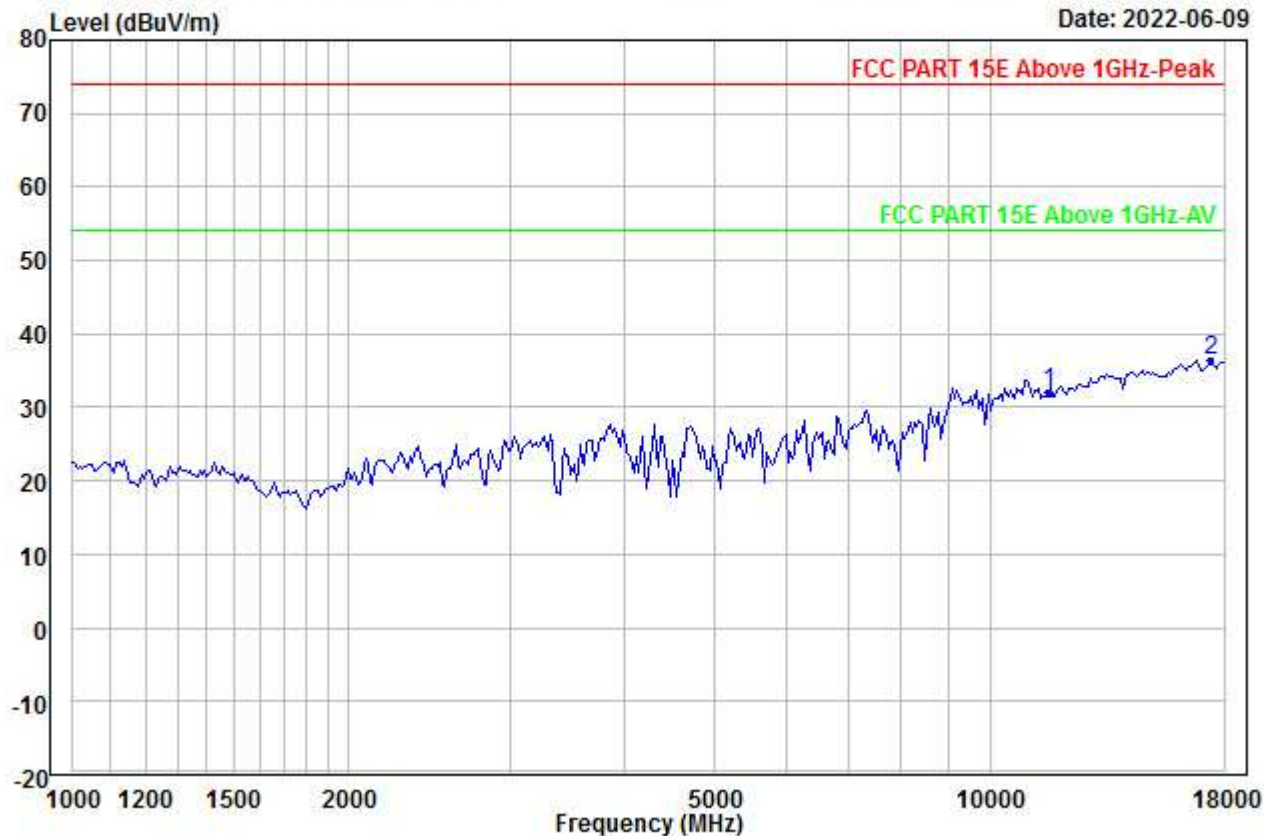


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	24.69	38.95	46.08	0.00	14.35	31.91	54.00	-22.09	---	---	Aver
2	PP17385.000	23.02	42.15	46.74	0.00	17.92	36.35	54.00	-17.65	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00231.EMI

Date: 2022-06-09

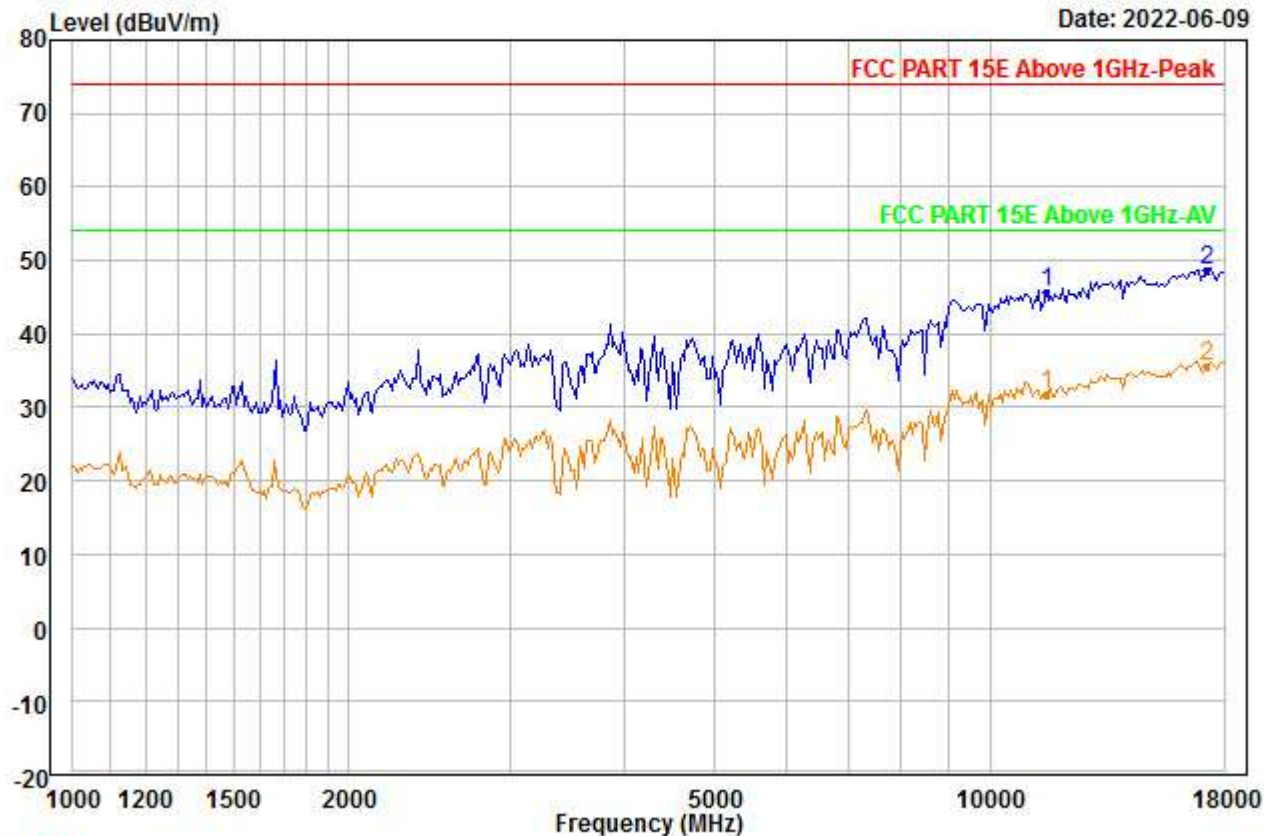


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5795
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	38.54	38.91	46.10	0.00	14.29	45.64	74.00	-28.36	---	---	Peak
2	PP17265.000	35.54	42.19	46.88	0.00	17.85	48.70	74.00	-25.30	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00232.EMI

Date: 2022-06-09

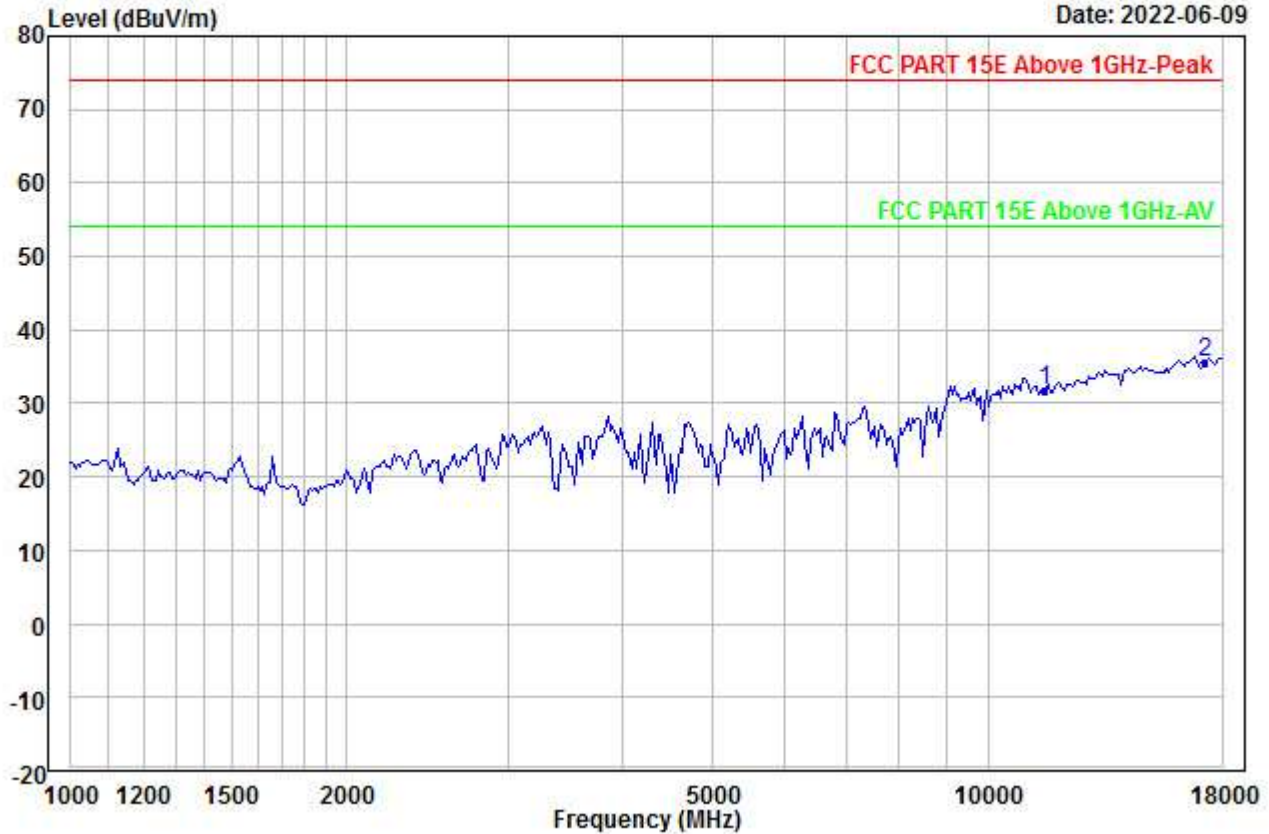


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5795
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	24.54	38.91	46.10	0.00	14.29	31.64	54.00	-22.36	---	---	Aver
2	PP17265.000	22.52	42.19	46.88	0.00	17.85	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00233.EMI

Date: 2022-06-09

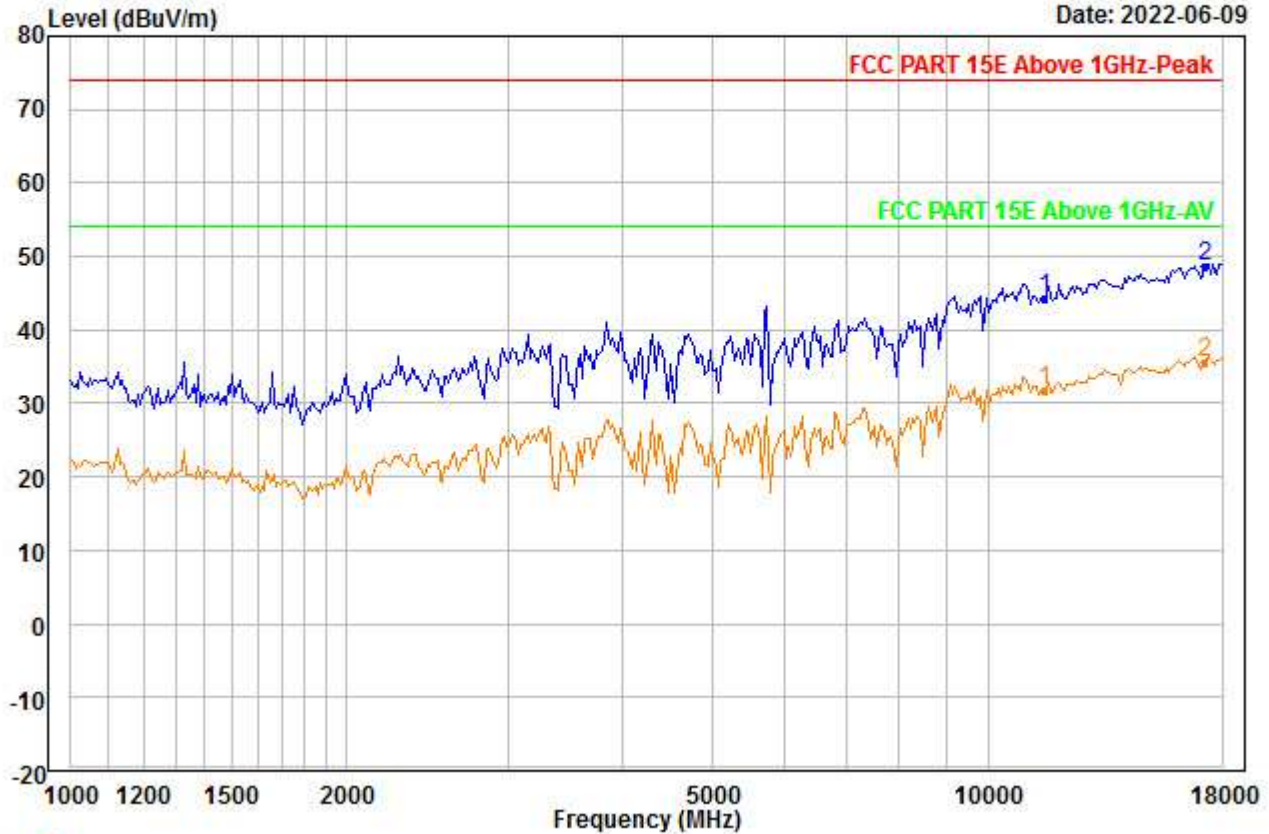


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	37.24	38.91	46.10	0.00	14.29	44.34	74.00	-29.66	---	---	Peak
2	PP17265.000	35.39	42.19	46.88	0.00	17.85	48.55	74.00	-25.45	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00234.EMI

Date: 2022-06-09

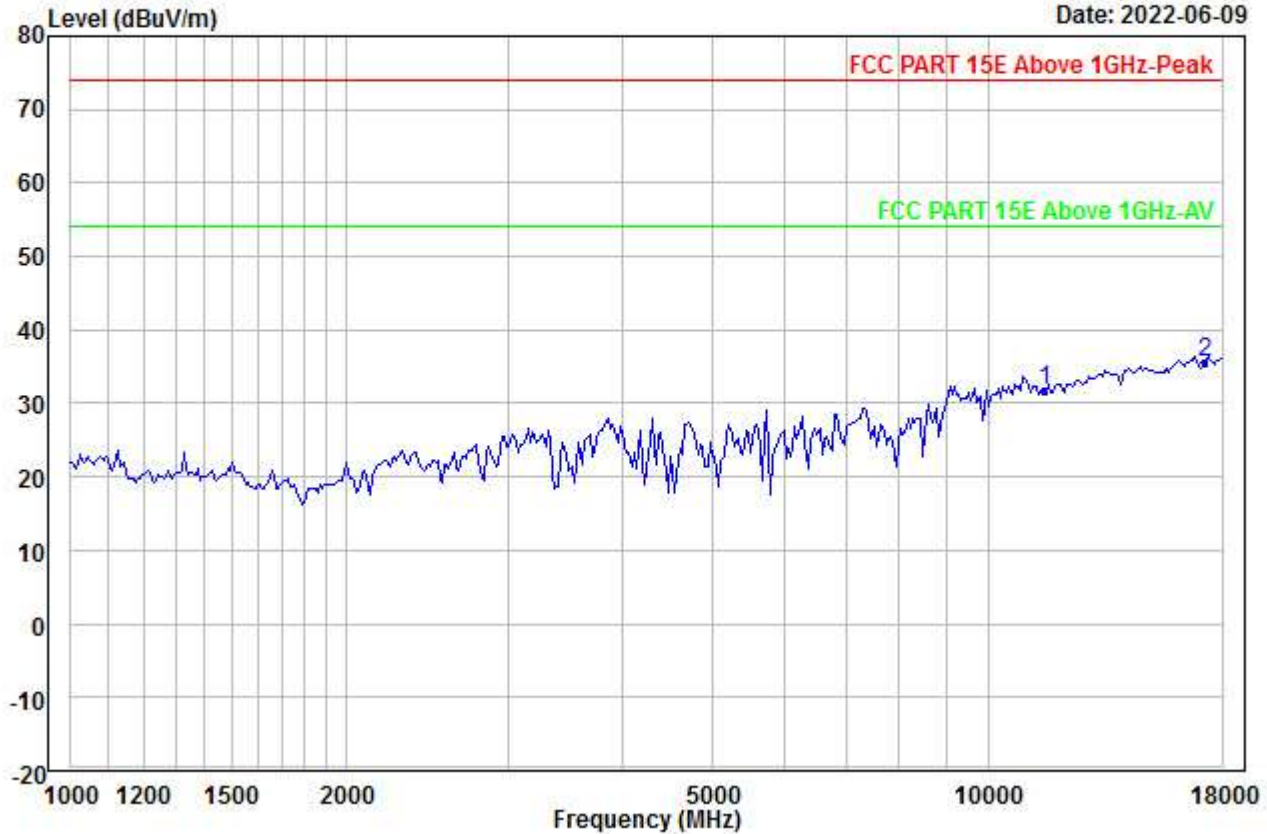


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5755
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	24.63	38.91	46.10	0.00	14.29	31.73	54.00	-22.27	---	---	Aver
2	PP17265.000	22.52	42.19	46.88	0.00	17.85	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00235.EMI

Date: 2022-06-09

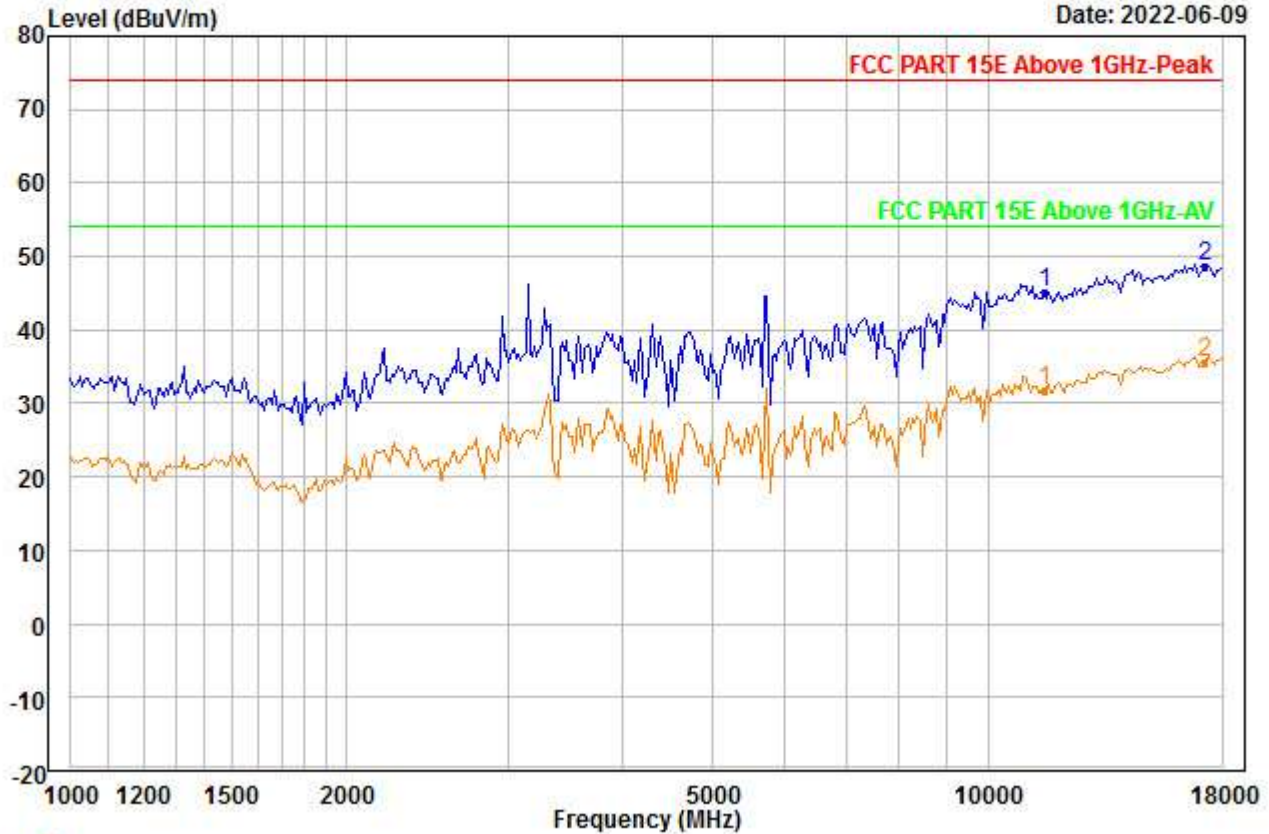


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	38.15	38.91	46.10	0.00	14.29	45.25	74.00	-28.75	---	---	Peak
2	PP17265.000	35.39	42.19	46.88	0.00	17.85	48.55	74.00	-25.45	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00236.EMI

Date: 2022-06-09

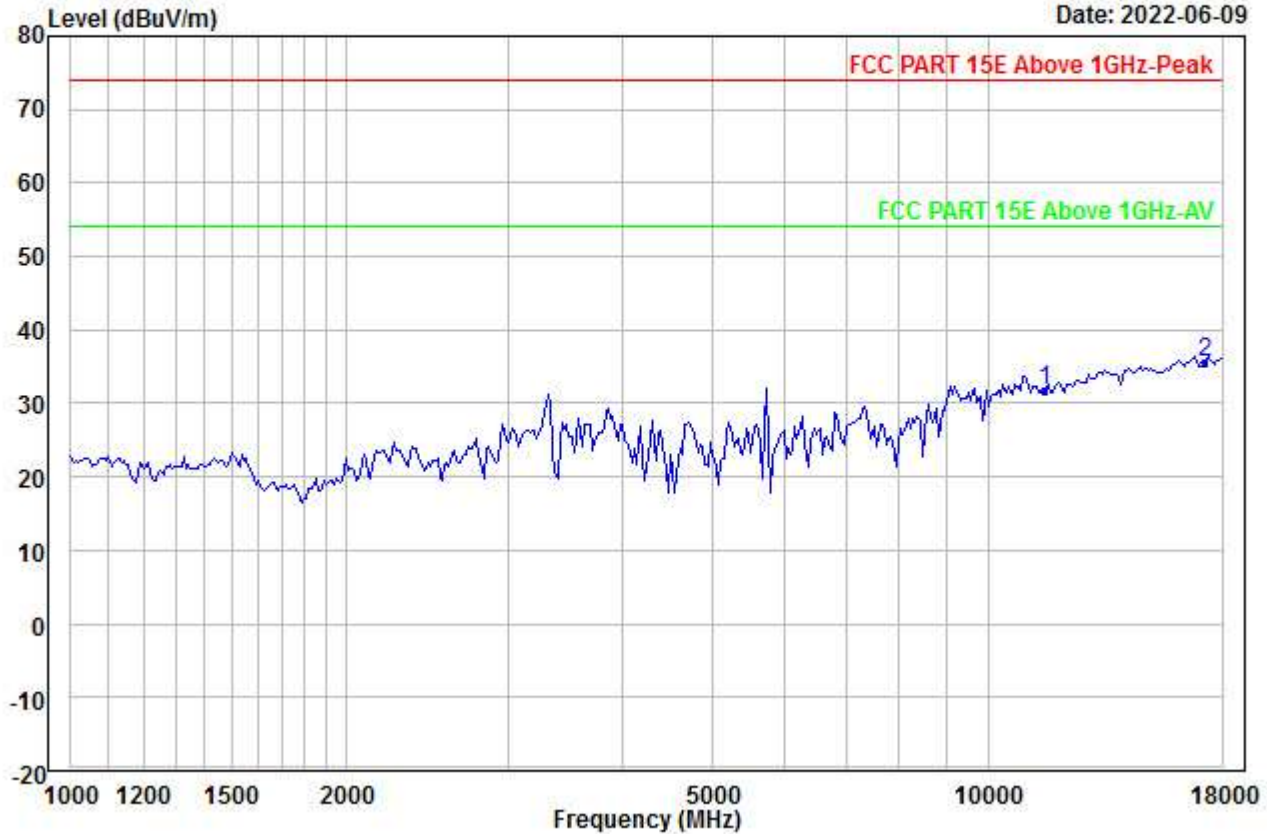


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	24.71	38.91	46.10	0.00	14.29	31.81	54.00	-22.19	---	---	Aver
2	PP17265.000	22.52	42.19	46.88	0.00	17.85	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00237.EMI

Date: 2022-06-09

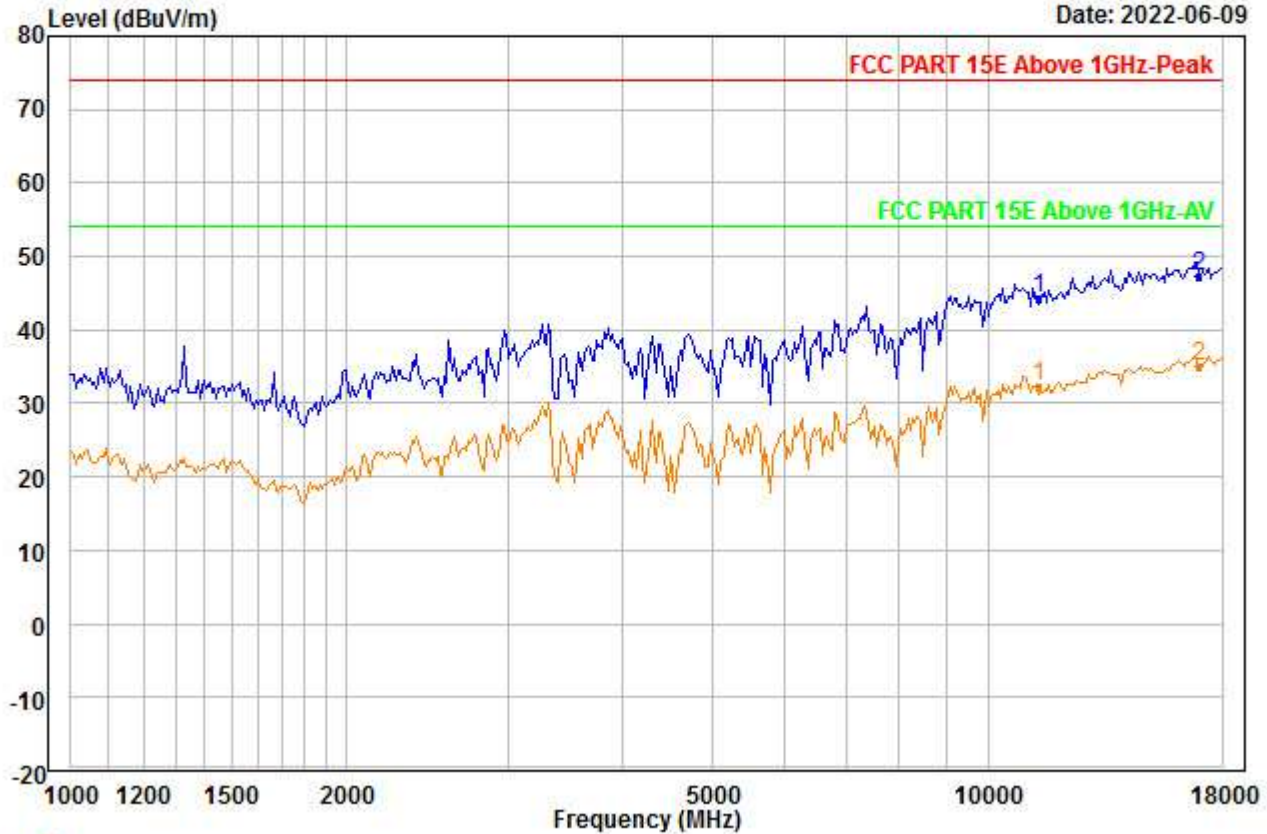


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5670
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11340.000	37.06	38.77	45.75	0.00	14.17	44.25	74.00	-29.75	---	---	Peak
2	PP17010.000	34.59	42.30	47.19	0.00	17.69	47.39	74.00	-26.61	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00238.EMI

Date: 2022-06-09

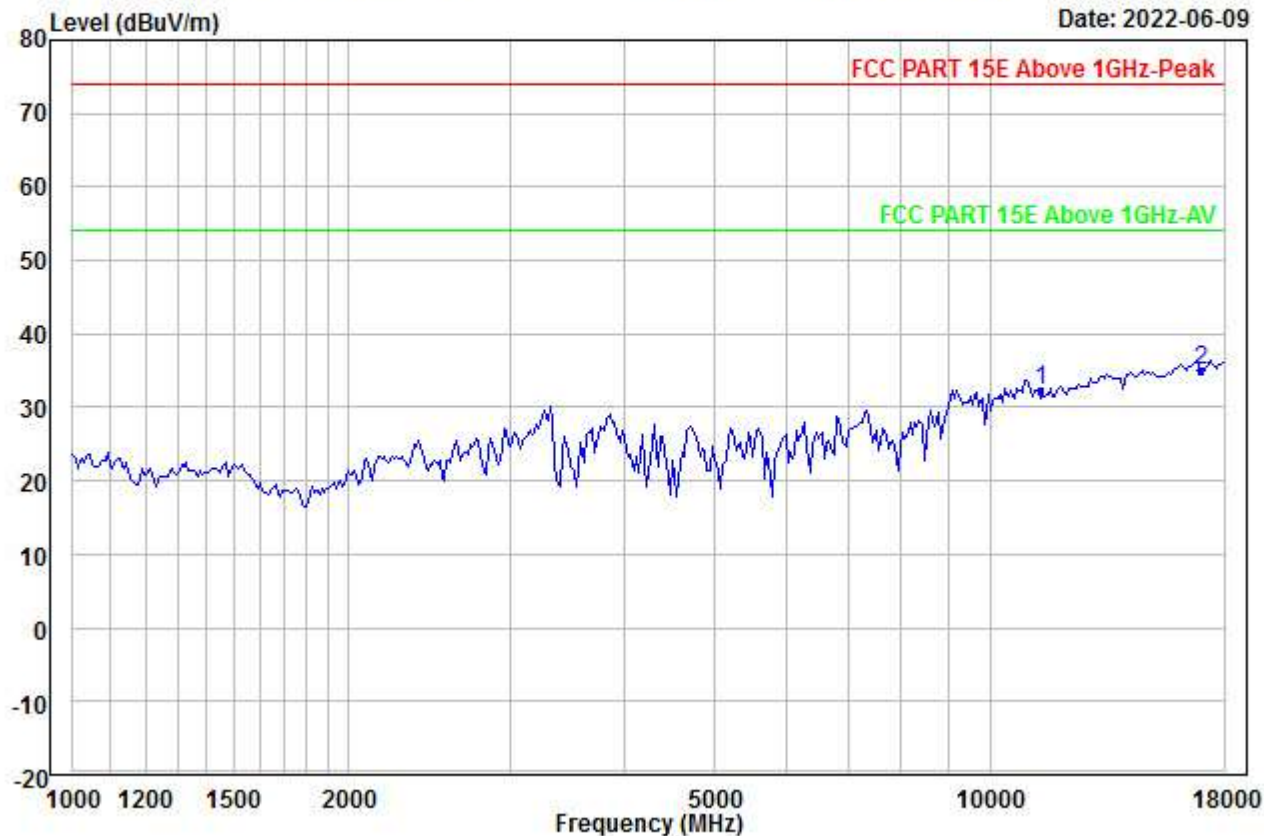


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11340.000	25.03	38.77	45.75	0.00	14.17	32.22	54.00	-21.78	---	---	Aver
2	PP17010.000	22.25	42.30	47.19	0.00	17.69	35.05	54.00	-18.95	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00239.EMI

Date: 2022-06-09

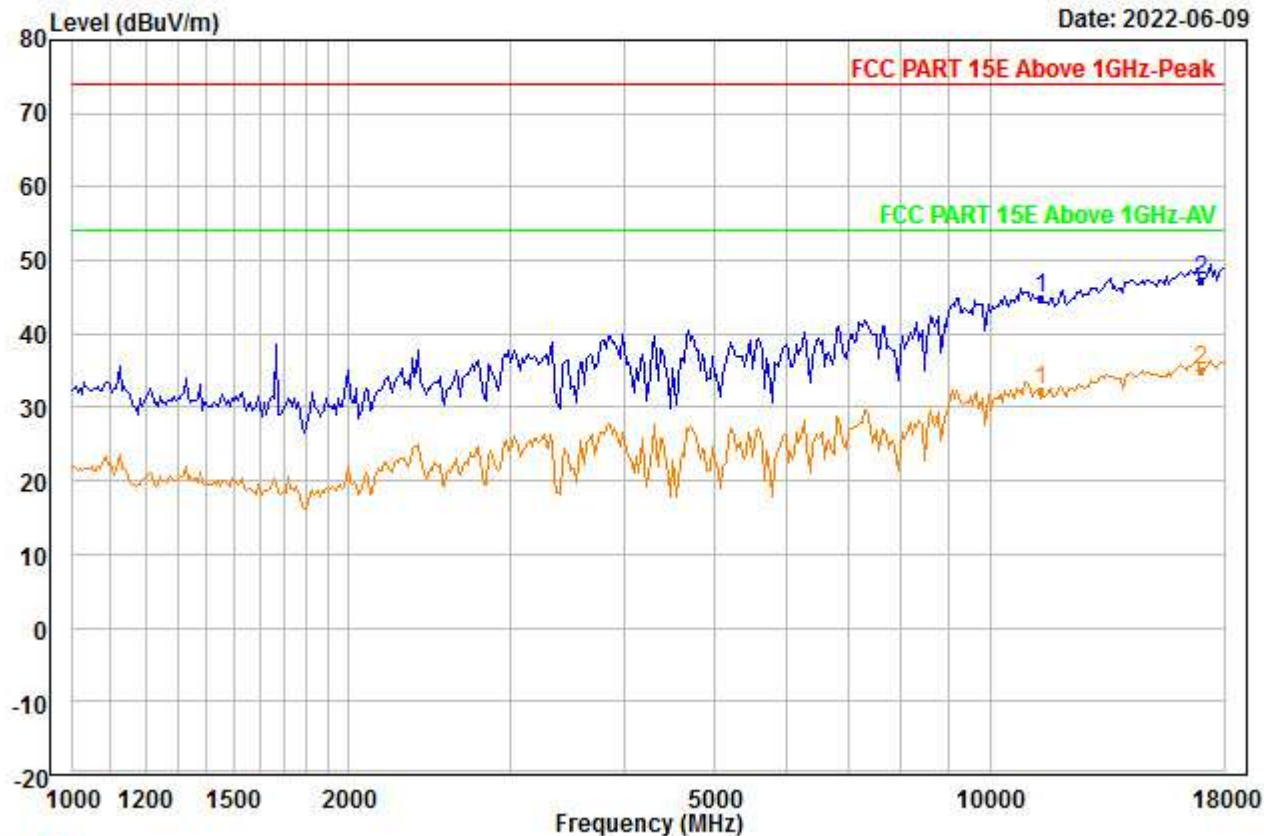


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11340.000	37.65	38.77	45.75	0.00	14.17	44.84	74.00	-29.16	---	---	Peak
2	PP17010.000	34.56	42.30	47.19	0.00	17.69	47.36	74.00	-26.64	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00240.EMI

Date: 2022-06-09

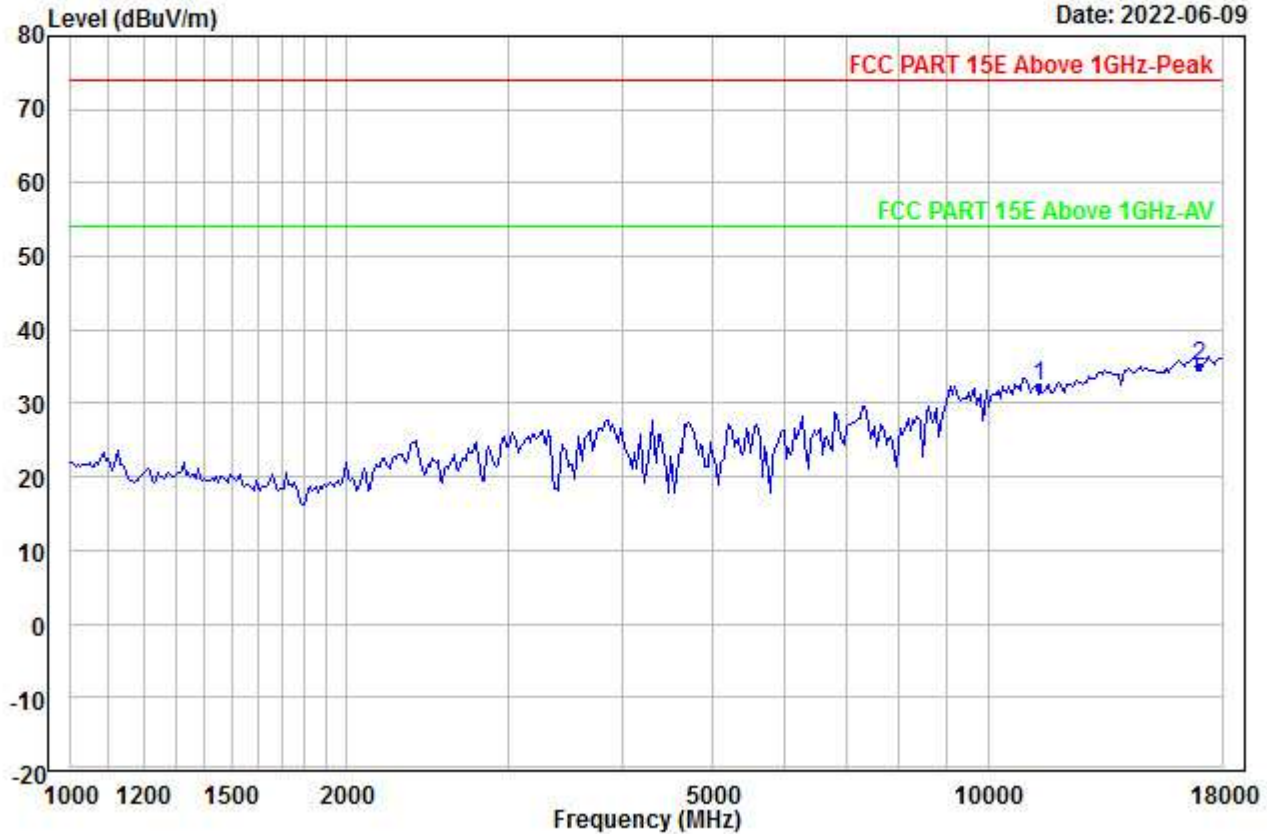


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11340.000	25.20	38.77	45.75	0.00	14.17	32.39	54.00	-21.61	---	---	Aver
2	PP17010.000	22.25	42.30	47.19	0.00	17.69	35.05	54.00	-18.95	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00241.EMI

Date: 2022-06-09

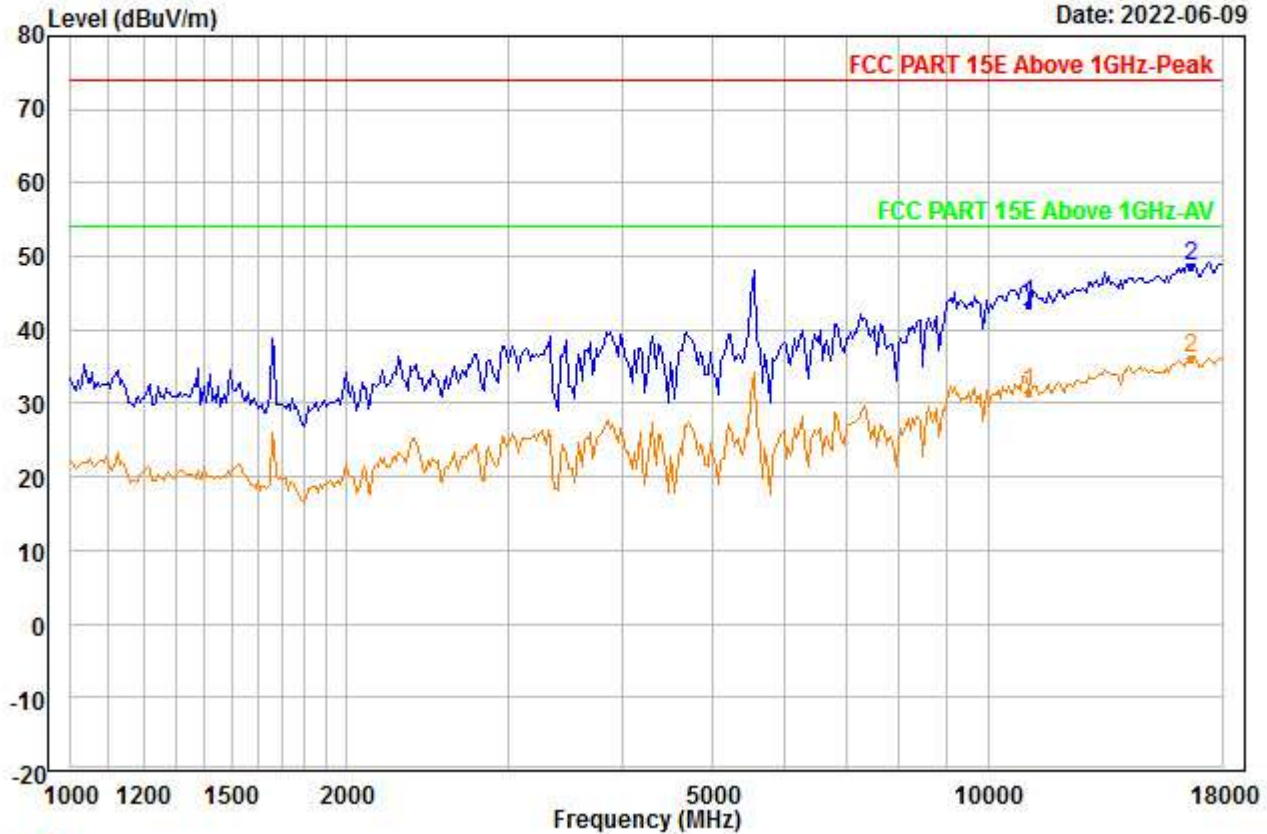


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5550
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	36.22	38.58	45.22	0.00	13.99	43.57	74.00	-30.43	---	---	Peak
2	PP16650.000	36.32	41.74	46.78	0.00	17.52	48.80	74.00	-25.20	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00242.EMI

Date: 2022-06-09

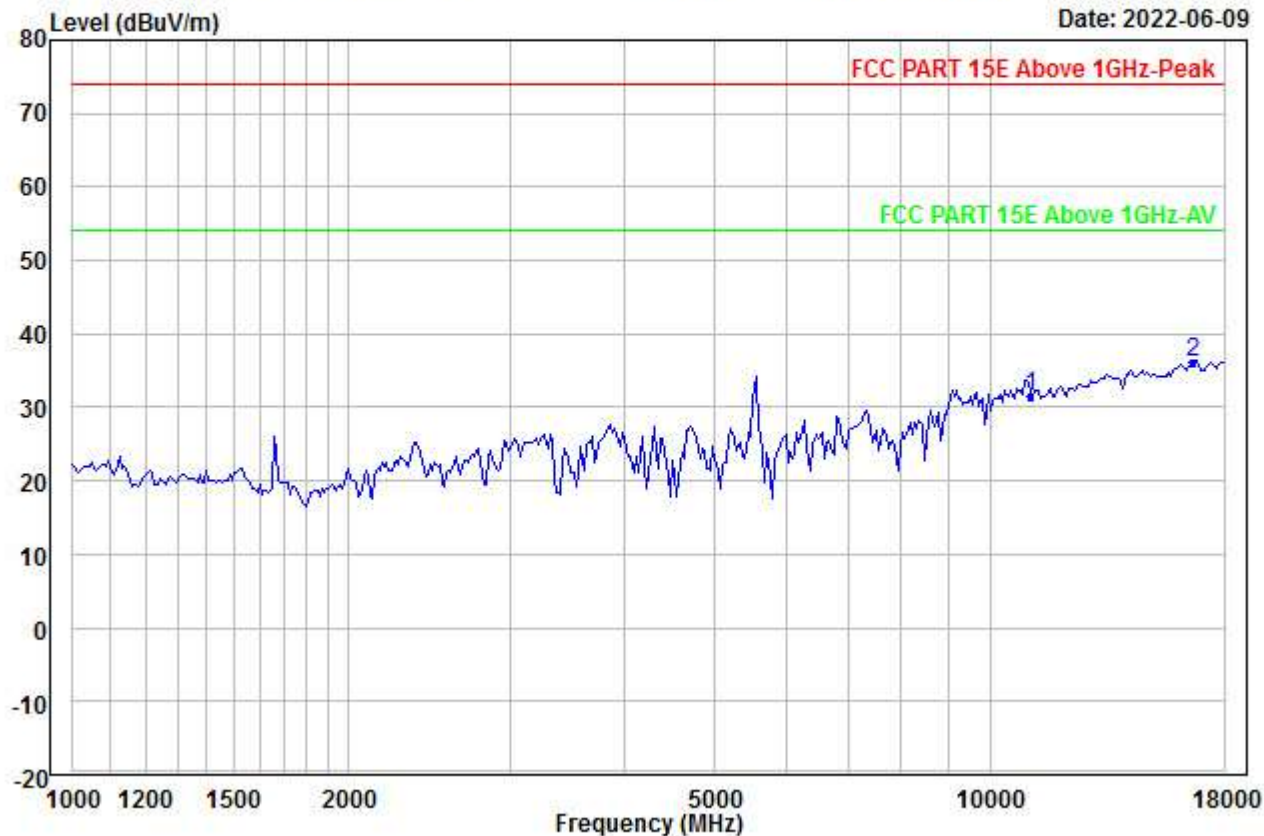


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5550
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	24.15	38.58	45.22	0.00	13.99	31.50	54.00	-22.50	---	---	Aver
2	PP16650.000	23.56	41.74	46.78	0.00	17.52	36.04	54.00	-17.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00243.EMI

Date: 2022-06-09

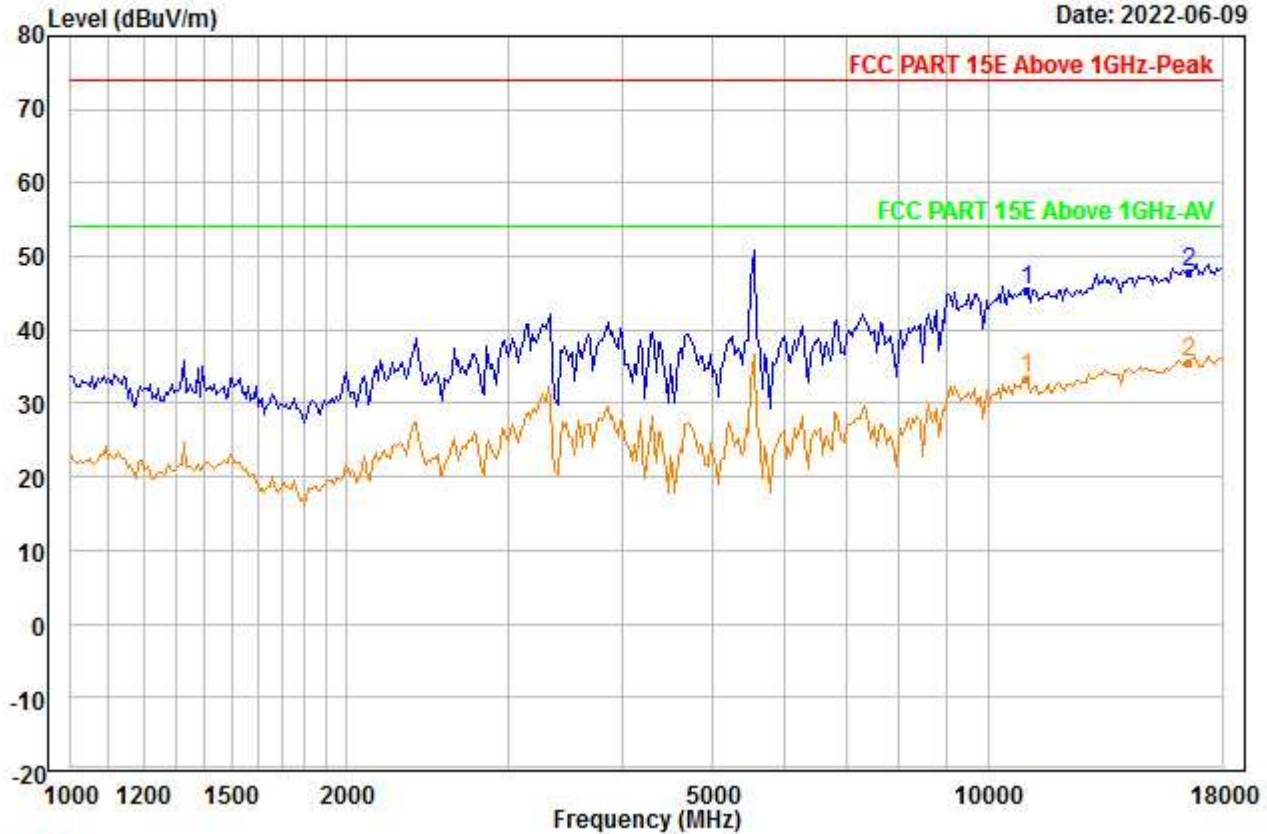


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5550
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	37.89	38.52	45.04	0.00	13.93	45.30	74.00	-28.70	---	---	Peak
2	PP16530.000	35.37	41.55	46.64	0.00	17.47	47.75	74.00	-26.25	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00244.EMI

Date: 2022-06-09

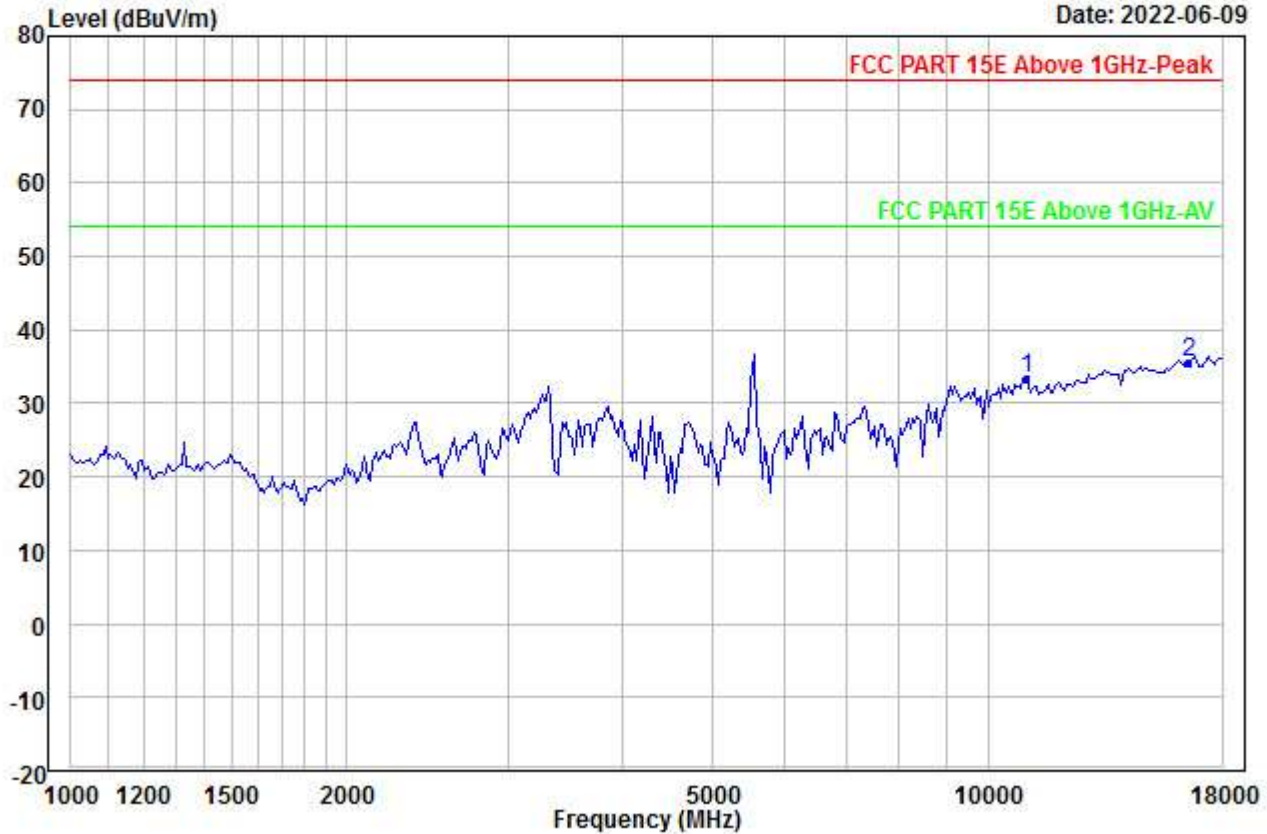


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5550
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	25.88	38.52	45.04	0.00	13.93	33.29	54.00	-20.71	---	---	Aver
2	PP16530.000	23.20	41.55	46.64	0.00	17.47	35.58	54.00	-18.42	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00245.EMI

Date: 2022-06-09

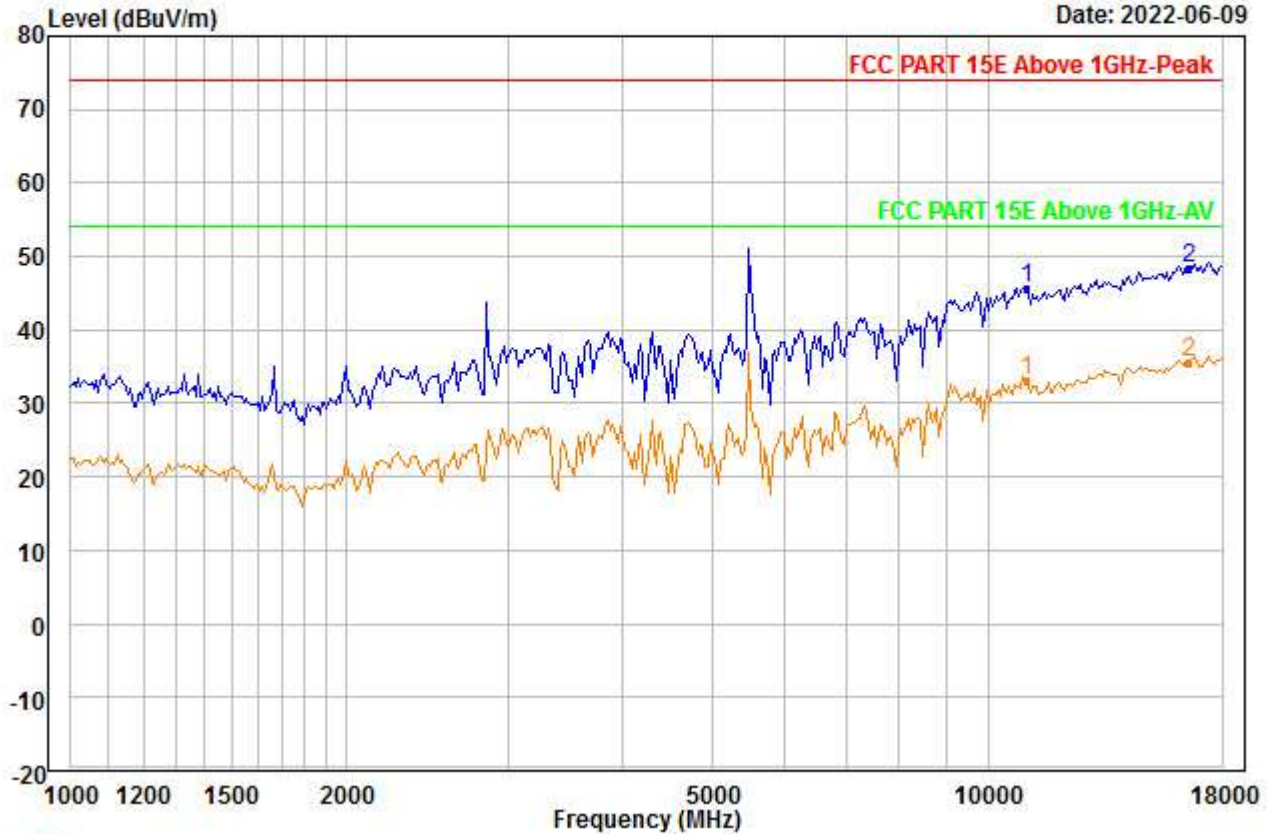


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5510
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	38.32	38.52	45.04	0.00	13.93	45.73	74.00	-28.27	---	---	Peak
2	PP16530.000	36.14	41.55	46.64	0.00	17.47	48.52	74.00	-25.48	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00246.EMI

Date: 2022-06-09

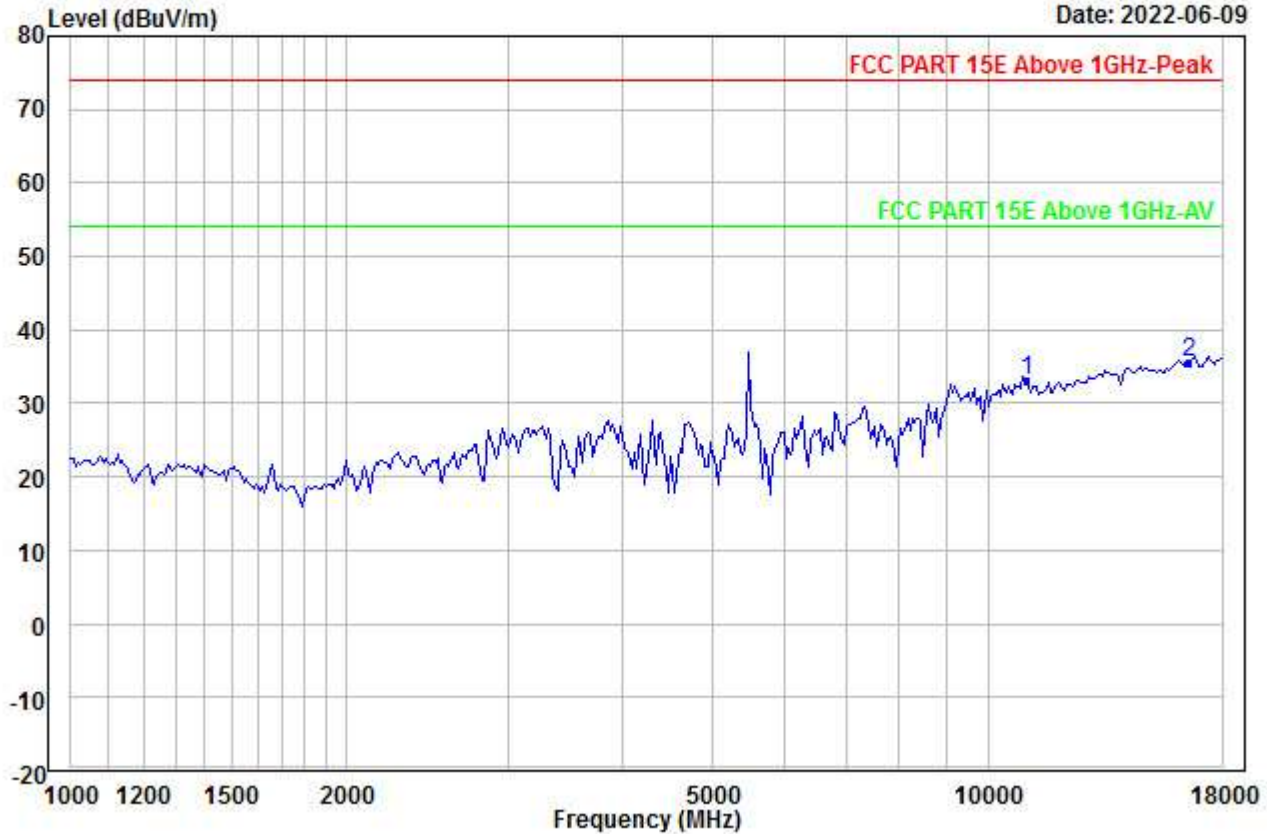


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	25.81	38.52	45.04	0.00	13.93	33.22	54.00	-20.78	---	---	Aver
2	PP16530.000	23.20	41.55	46.64	0.00	17.47	35.58	54.00	-18.42	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00247.EMI

Date: 2022-06-09

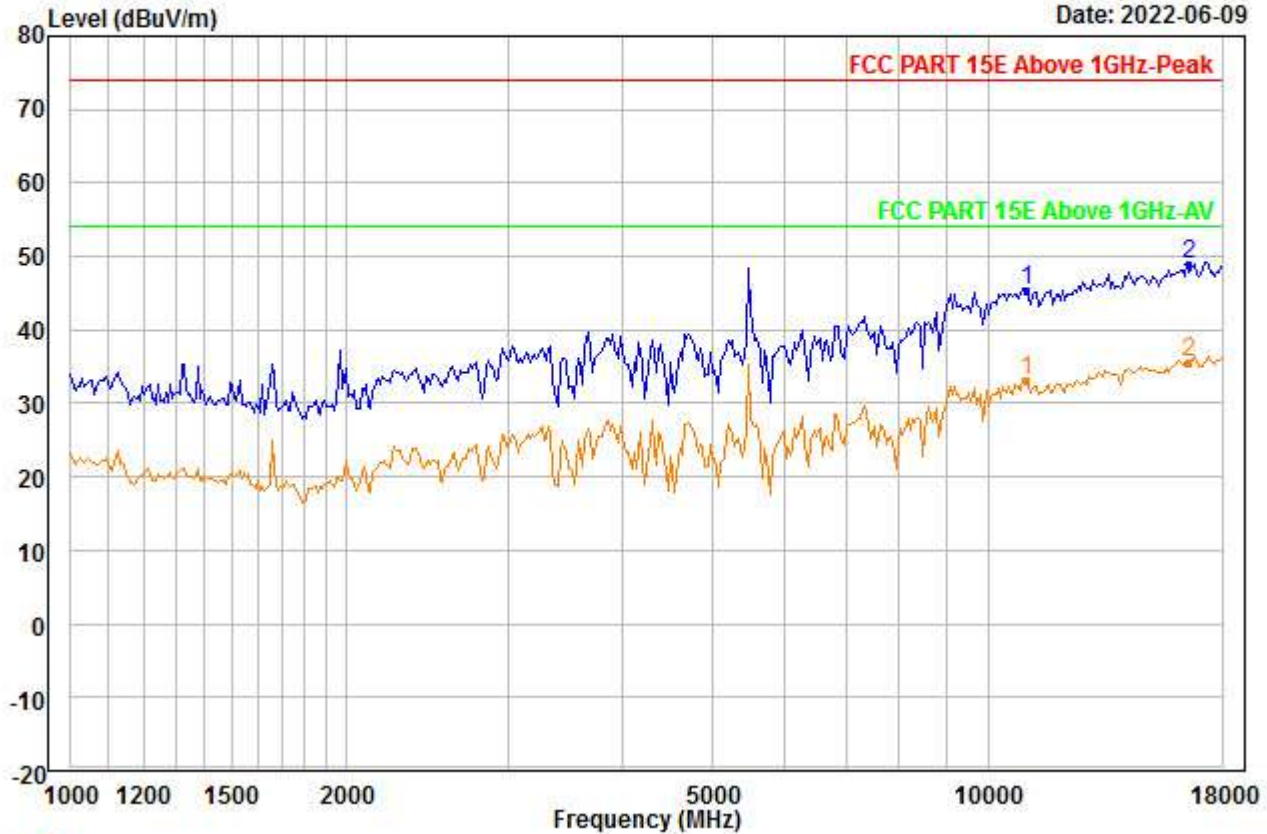


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5510
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	37.98	38.52	45.04	0.00	13.93	45.39	74.00	-28.61	---	---	Peak
2	PP16530.000	36.43	41.55	46.64	0.00	17.47	48.81	74.00	-25.19	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00248.EMI

Date: 2022-06-09

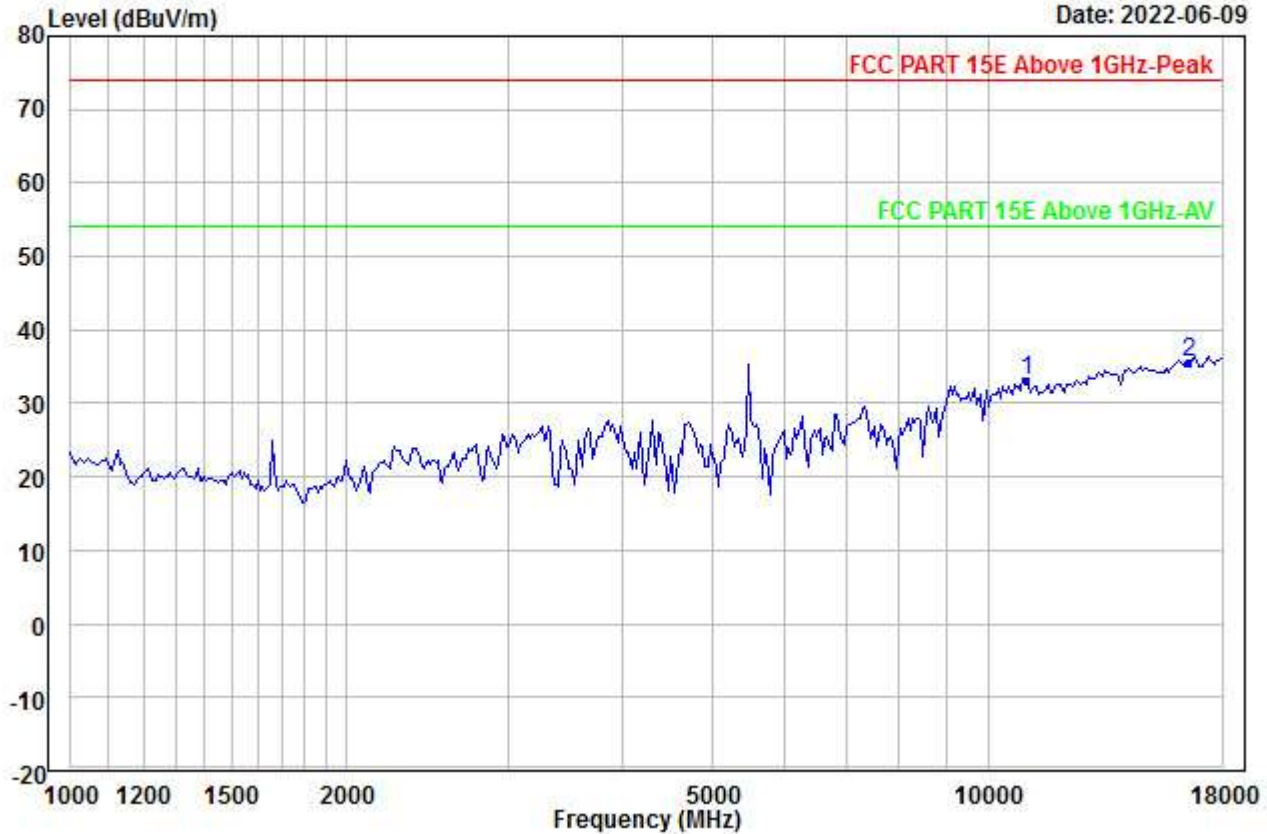


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	25.81	38.52	45.04	0.00	13.93	33.22	54.00	-20.78	---	---	Aver
2	PP16530.000	23.20	41.55	46.64	0.00	17.47	35.58	54.00	-18.42	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00249.EMI

Date: 2022-06-09

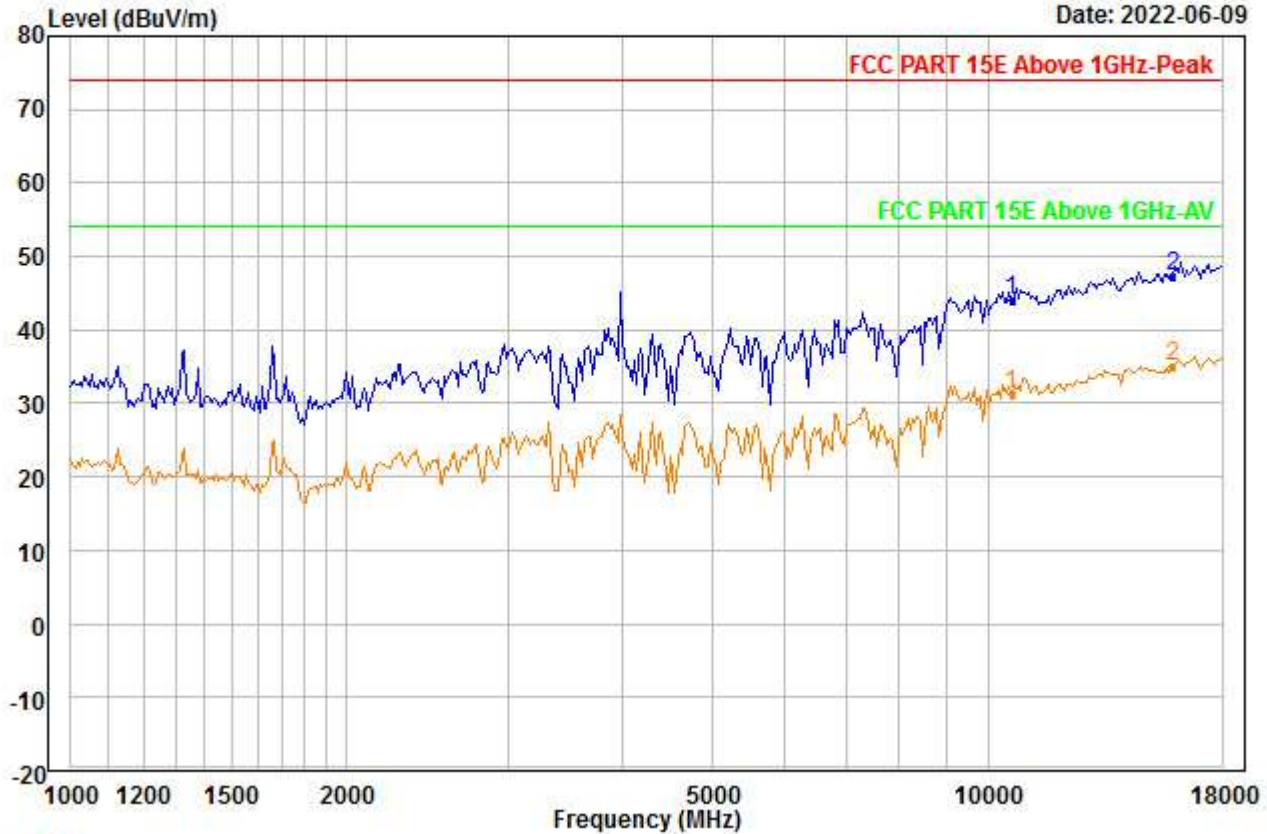


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5310
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10620.000	37.37	38.27	45.68	0.00	14.02	43.98	74.00	-30.02	---	---	Peak
2	PP15930.000	35.52	40.80	46.24	0.00	17.19	47.27	74.00	-26.73	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00250.EMI

Date: 2022-06-09

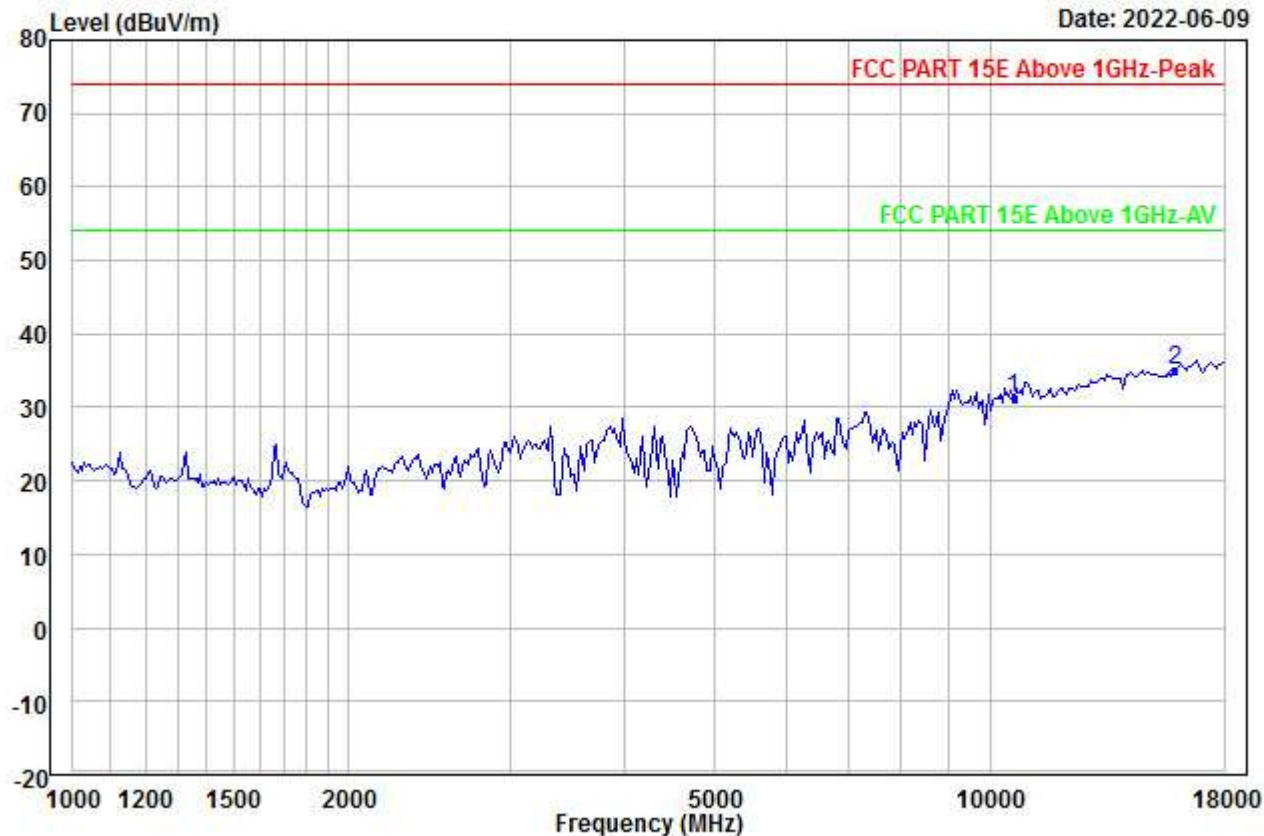


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10620.000	24.61	38.27	45.68	0.00	14.02	31.22	54.00	-22.78	---	---	Aver
2	PP15930.000	23.43	40.80	46.24	0.00	17.19	35.18	54.00	-18.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00251.EMI

Date: 2022-06-09

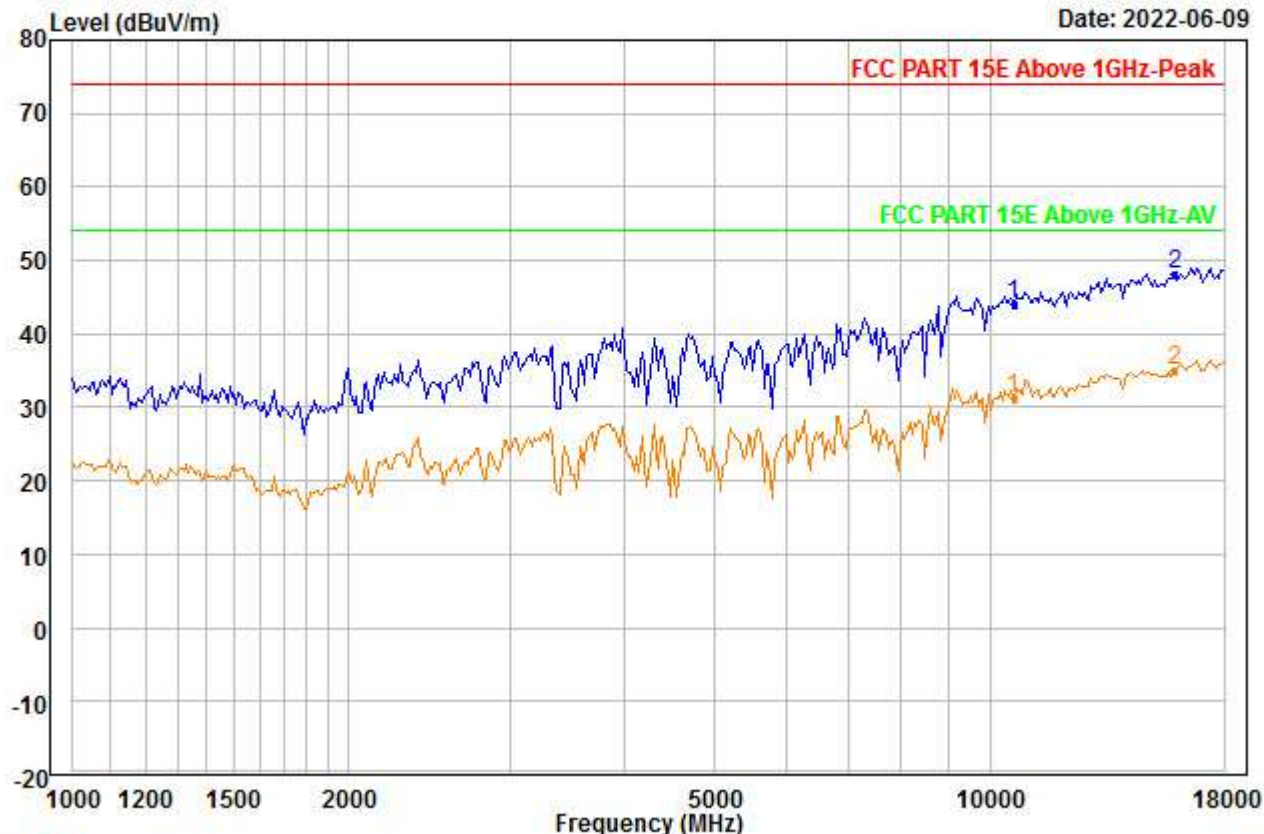


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5310
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10620.000	37.33	38.27	45.68	0.00	14.02	43.94	74.00	-30.06	---	---	Peak
2	PP15930.000	36.26	40.80	46.24	0.00	17.19	48.01	74.00	-25.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00252.EMI

Date: 2022-06-09

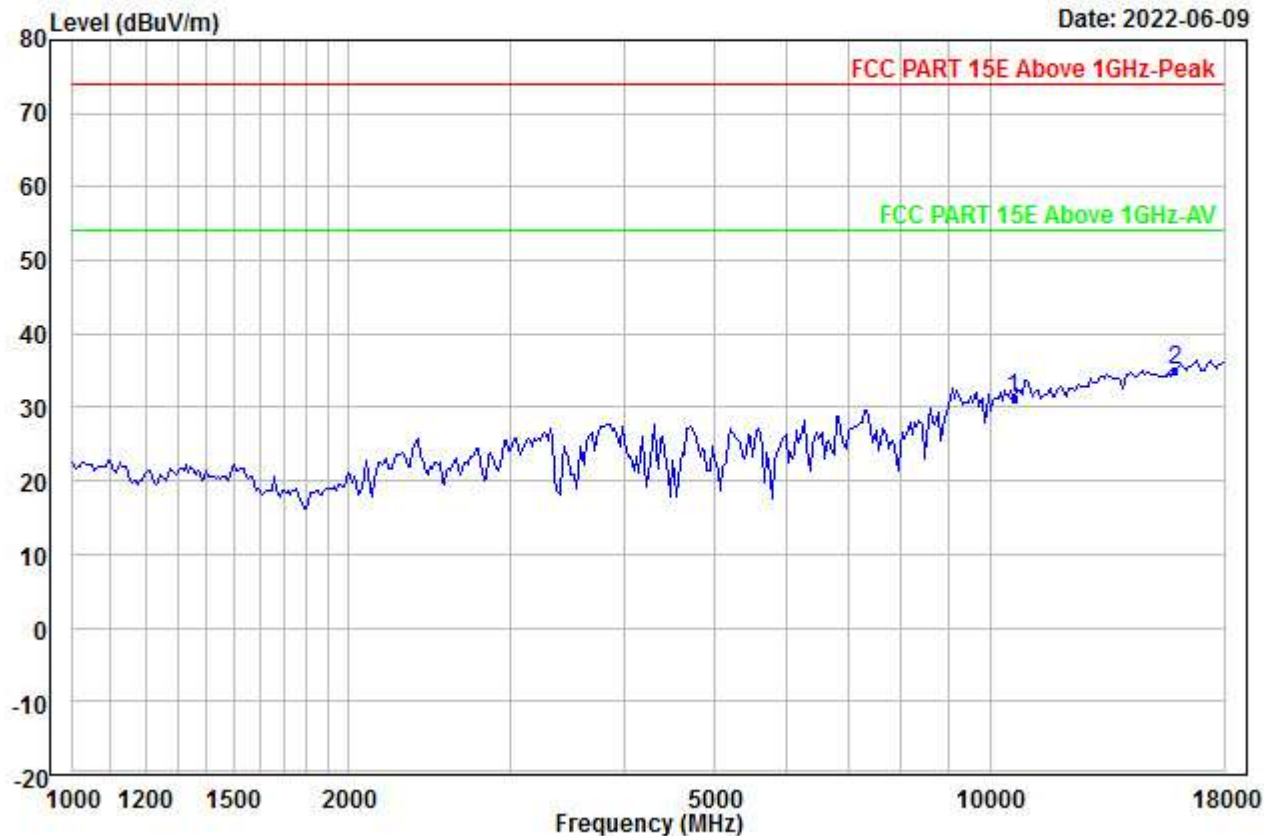


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10620.000	24.70	38.27	45.68	0.00	14.02	31.31	54.00	-22.69	---	---	Aver
2	PP15930.000	23.43	40.80	46.24	0.00	17.19	35.18	54.00	-18.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00253.EMI

Date: 2022-06-09

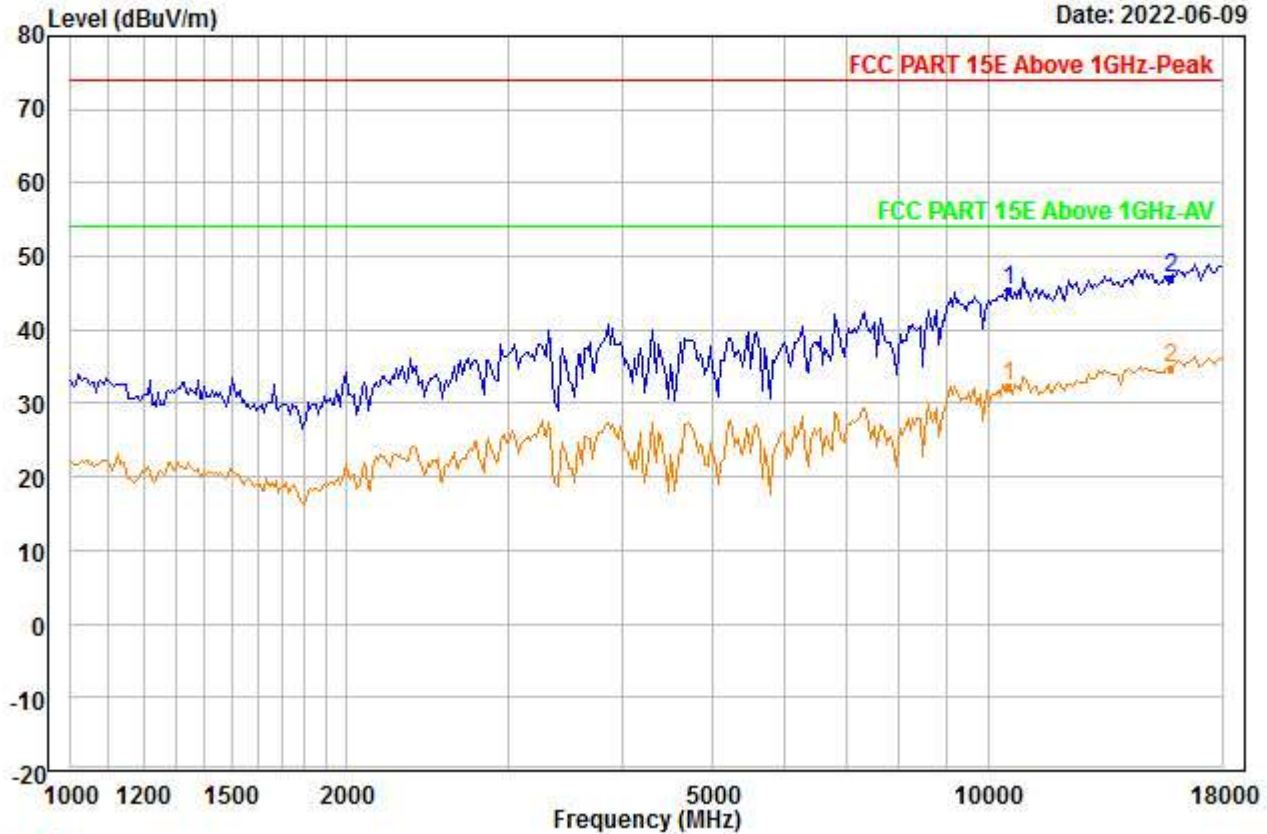


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5270
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10540.000	38.85	38.22	45.83	0.00	14.03	45.27	74.00	-28.73	---	---	Peak
2	PP15810.000	35.42	40.63	46.15	0.00	17.11	47.01	74.00	-26.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00254.EMI

Date: 2022-06-09

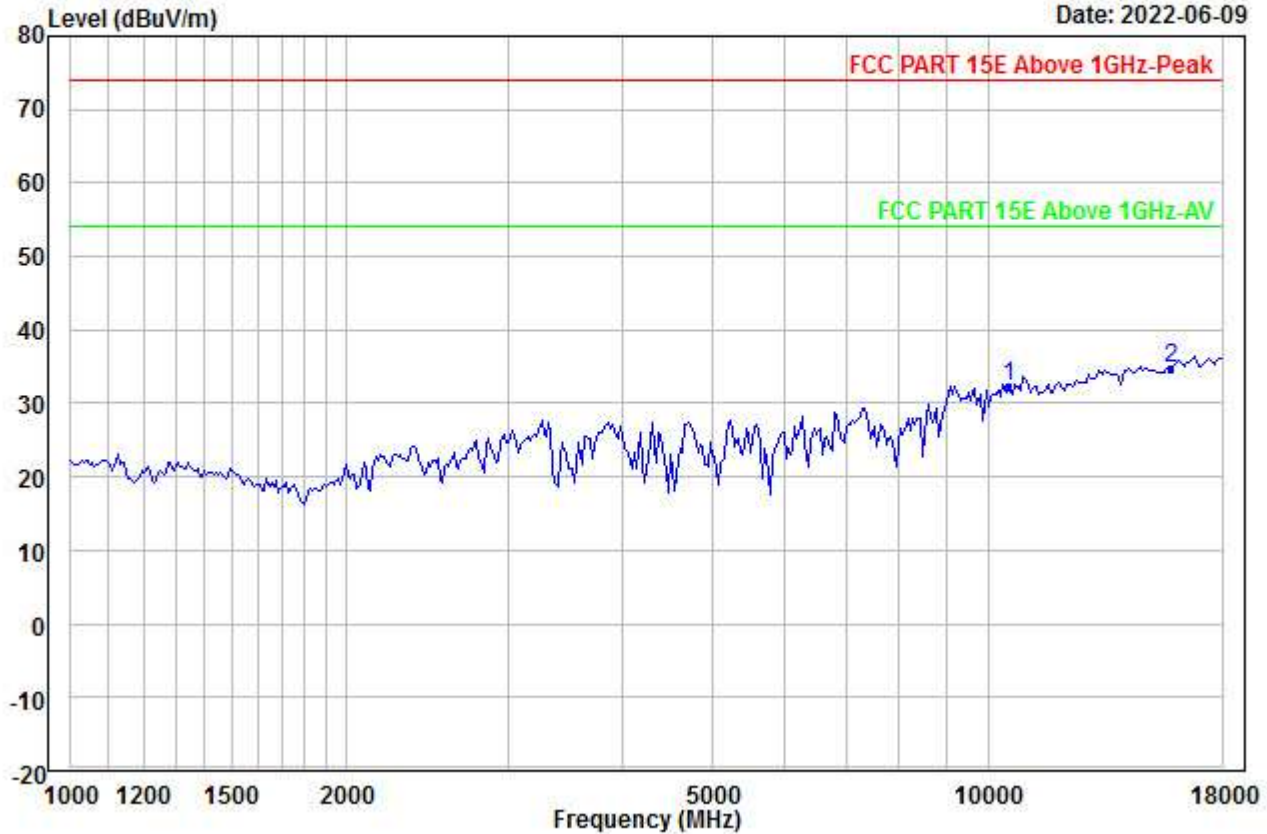


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5270
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10540.000	25.86	38.22	45.83	0.00	14.03	32.28	54.00	-21.72	---	---	Aver
2	PP15810.000	23.27	40.63	46.15	0.00	17.11	34.86	54.00	-19.14	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00255.EMI

Date: 2022-06-09

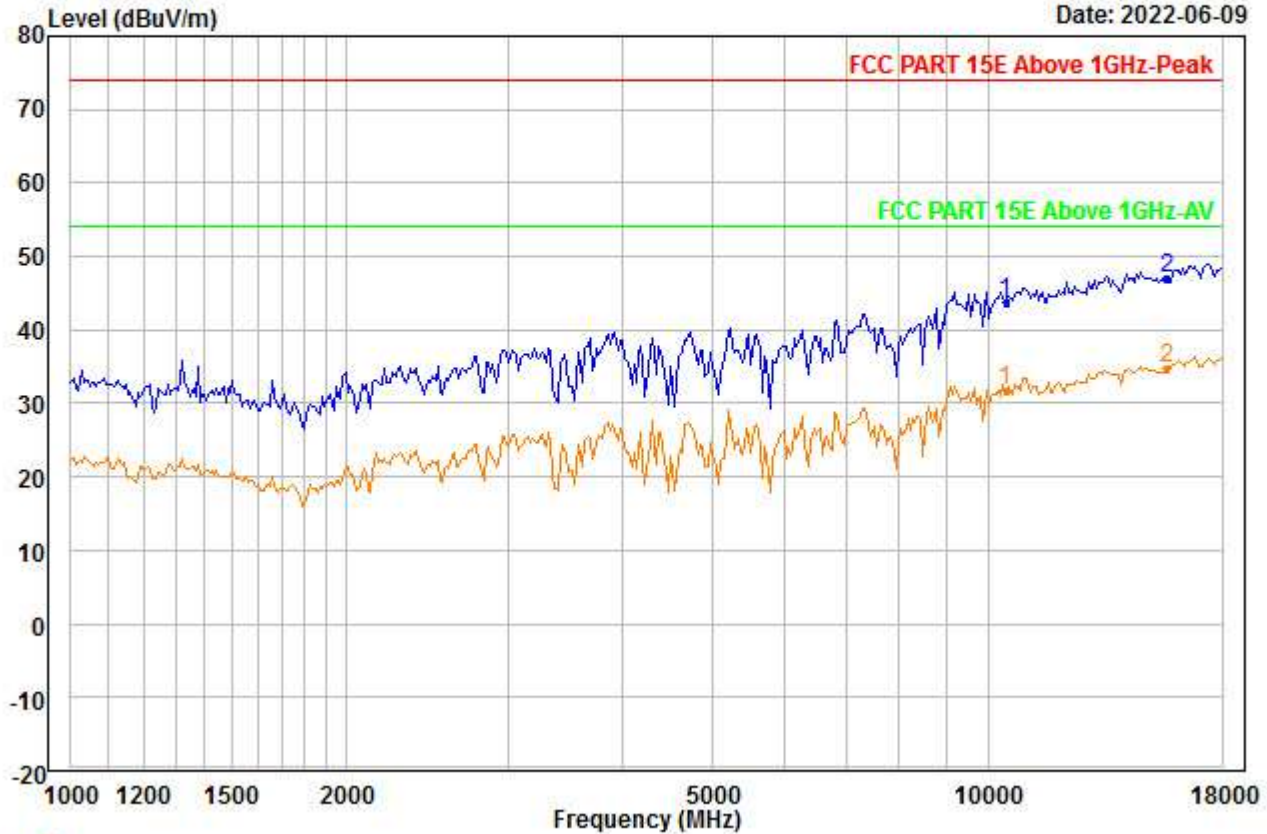


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5230
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10460.000	37.42	38.18	45.92	0.00	14.06	43.74	74.00	-30.26	---	---	Peak
2	PP15690.000	35.52	40.47	46.05	0.00	17.03	46.97	74.00	-27.03	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00256.EMI

Date: 2022-06-09

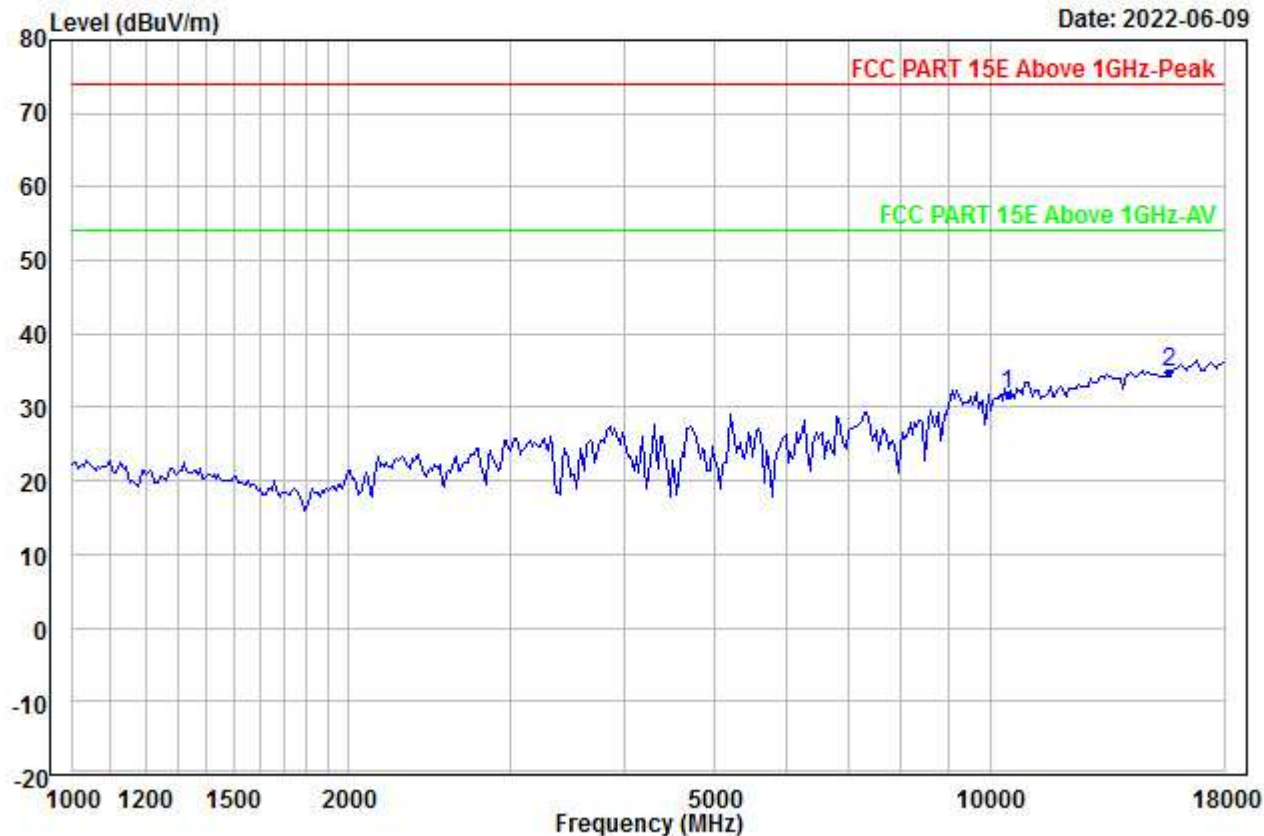


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5230
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10460.000	25.55	38.18	45.92	0.00	14.06	31.87	54.00	-22.13	---	---	Aver
2	PP15690.000	23.39	40.47	46.05	0.00	17.03	34.84	54.00	-19.16	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00257.EMI

Date: 2022-06-09

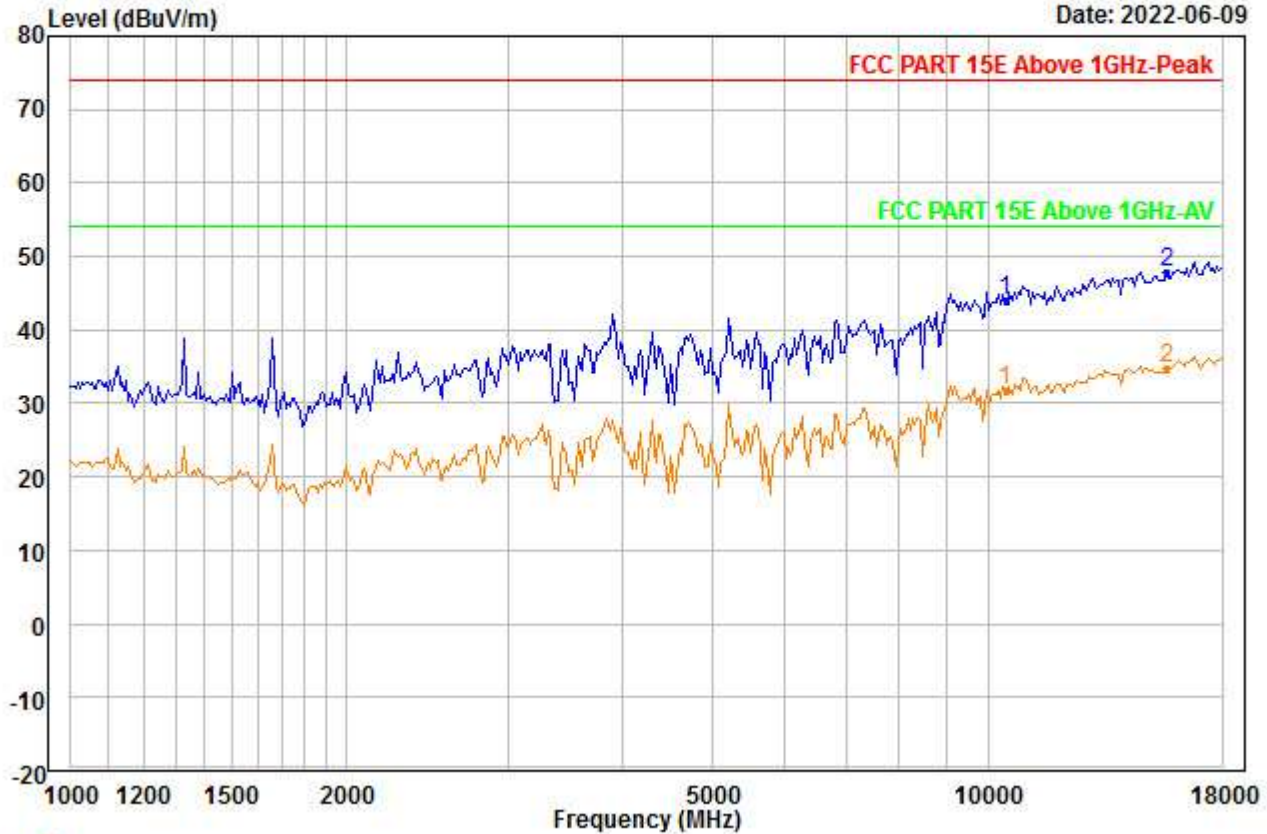


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5230
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10460.000	37.67	38.18	45.92	0.00	14.06	43.99	74.00	-30.01	---	---	Peak
2	PP15690.000	36.37	40.47	46.05	0.00	17.03	47.82	74.00	-26.18	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00258.EMI

Date: 2022-06-09

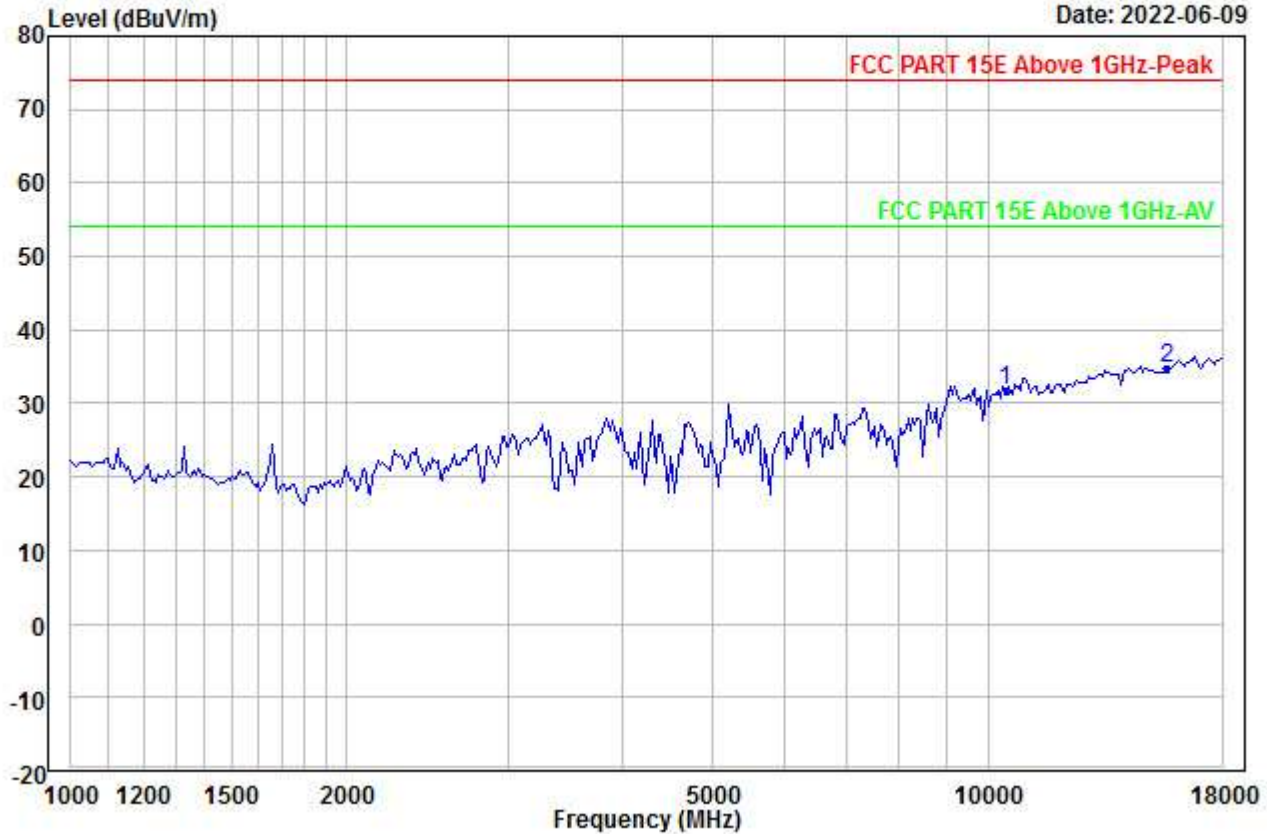


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5230
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10460.000	25.40	38.18	45.92	0.00	14.06	31.72	54.00	-22.28	---	---	Aver
2	PP15690.000	23.19	40.47	46.05	0.00	17.03	34.64	54.00	-19.36	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00259.EMI

Date: 2022-06-09

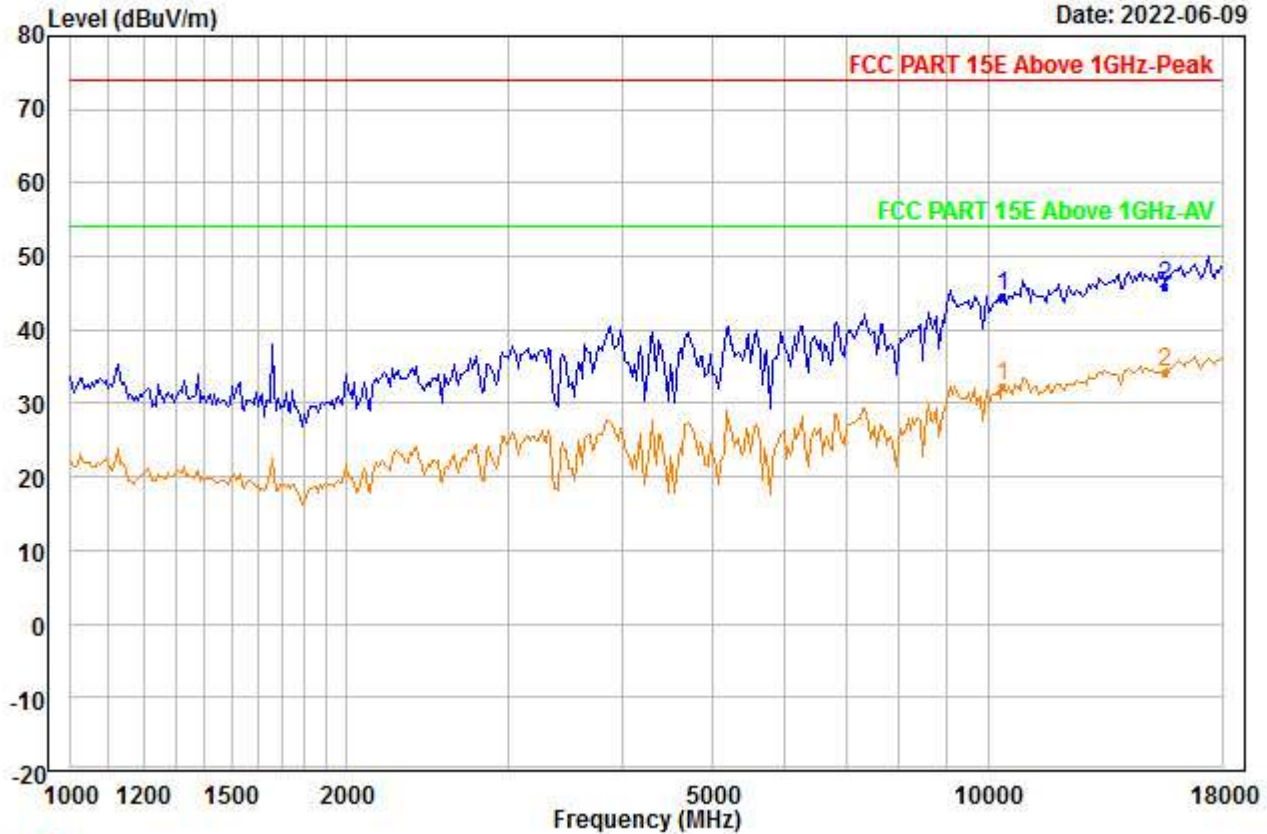


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5190
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10380.000	38.37	38.13	45.95	0.00	14.07	44.62	74.00	-29.38	---	---	Peak
2	PP15570.000	34.68	40.30	45.96	0.00	16.95	45.97	74.00	-28.03	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00260.EMI

Date: 2022-06-09

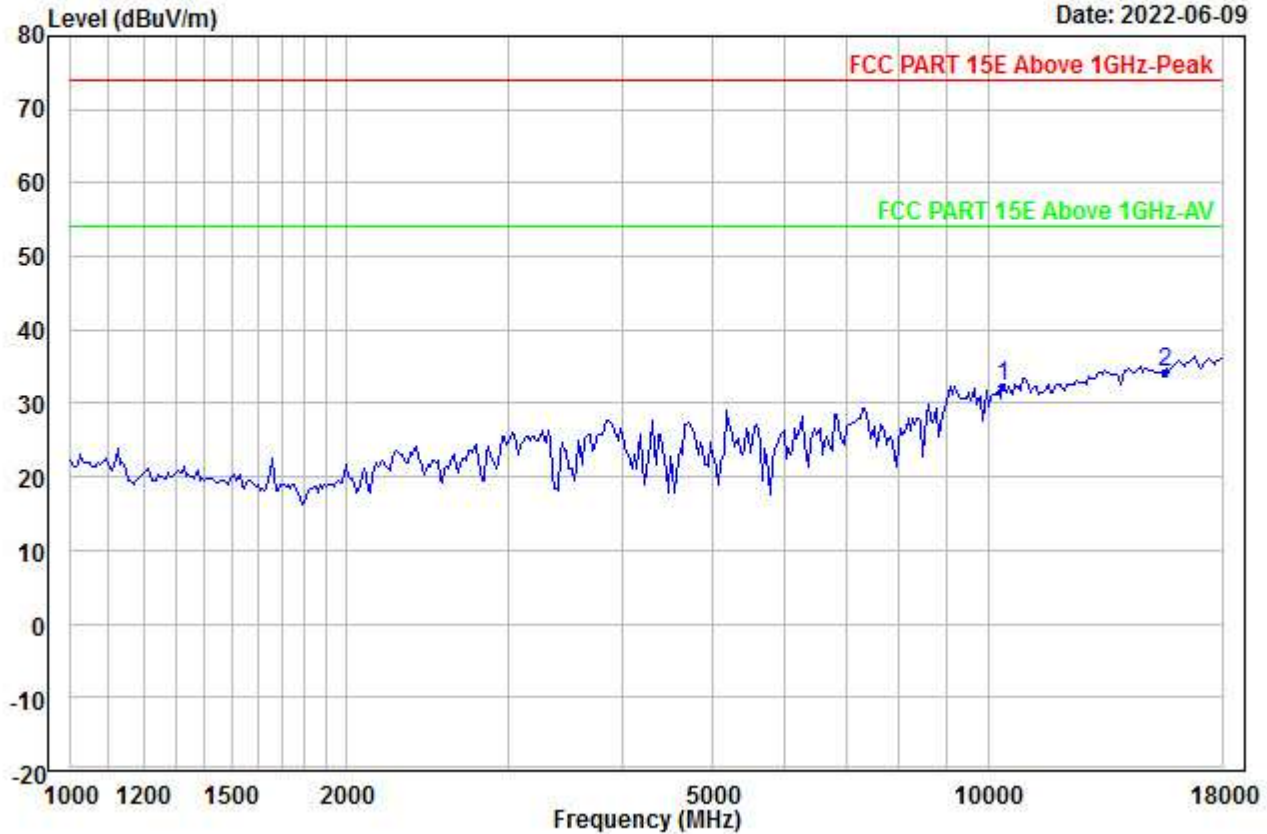


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10380.000	26.10	38.13	45.95	0.00	14.07	32.35	54.00	-21.65	---	---	Aver
2	PP15570.000	23.03	40.30	45.96	0.00	16.95	34.32	54.00	-19.68	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00261.EMI

Date: 2022-06-09

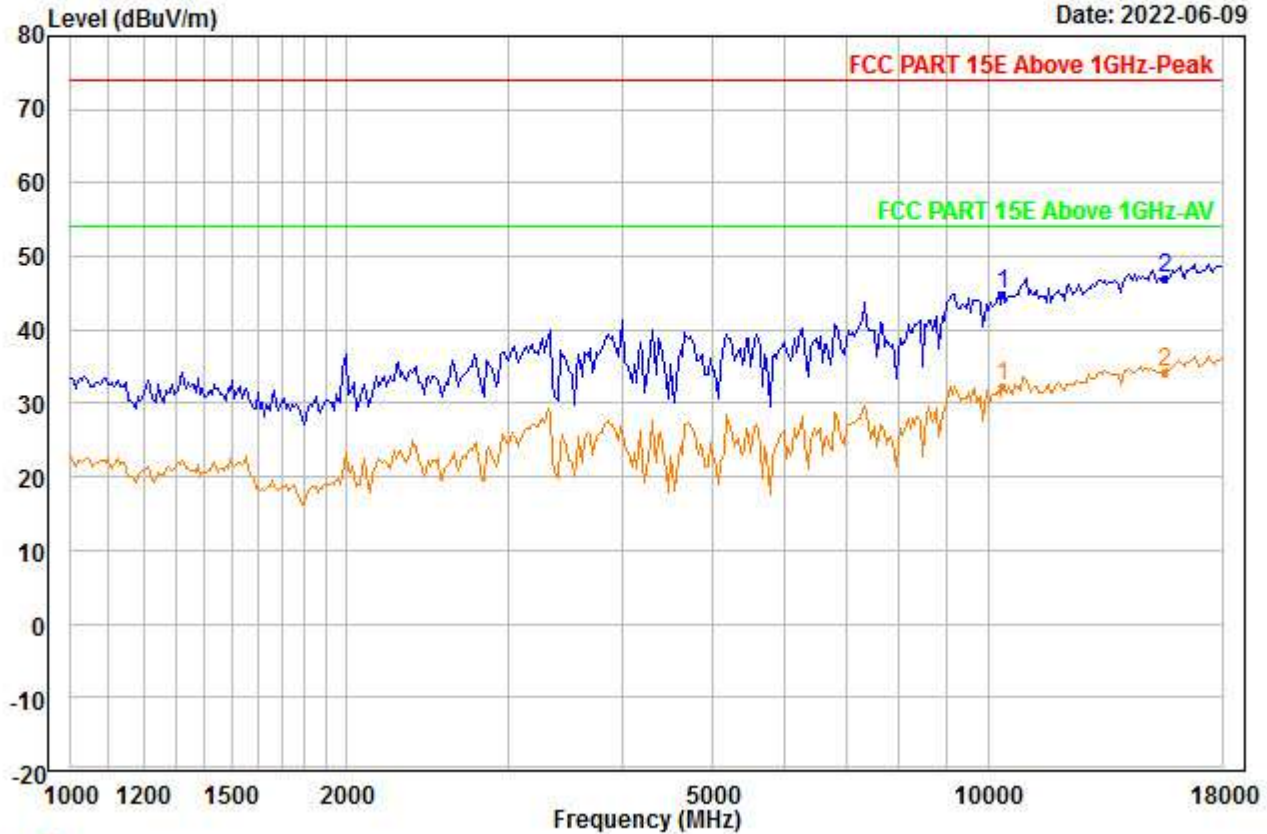


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5190
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10380.000	38.47	38.13	45.95	0.00	14.07	44.72	74.00	-29.28	---	---	Peak
2	PP15570.000	35.64	40.30	45.96	0.00	16.95	46.93	74.00	-27.07	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00262.EMI

Date: 2022-06-09

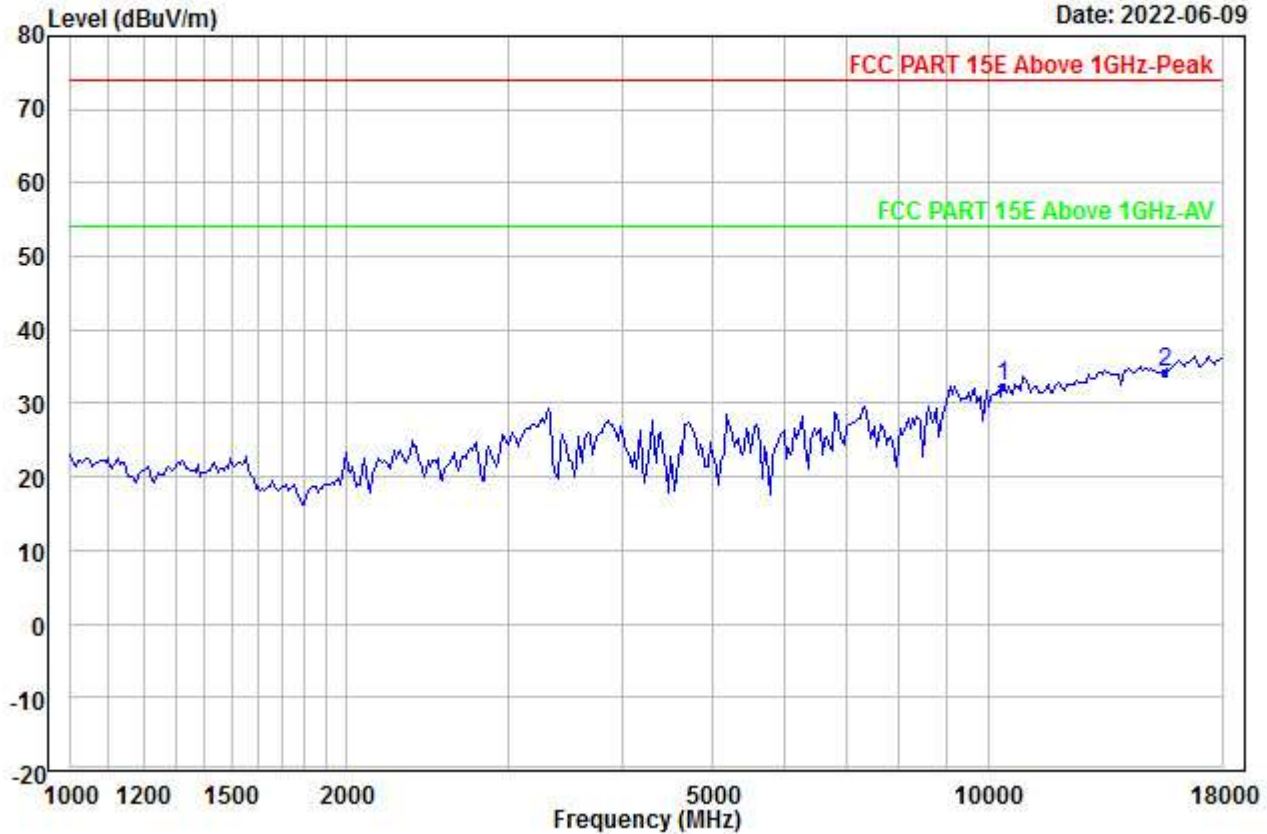


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10380.000	26.17	38.13	45.95	0.00	14.07	32.42	54.00	-21.58	---	---	Aver
2	PP15570.000	23.03	40.30	45.96	0.00	16.95	34.32	54.00	-19.68	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00263.EMI

Date: 2022-06-09

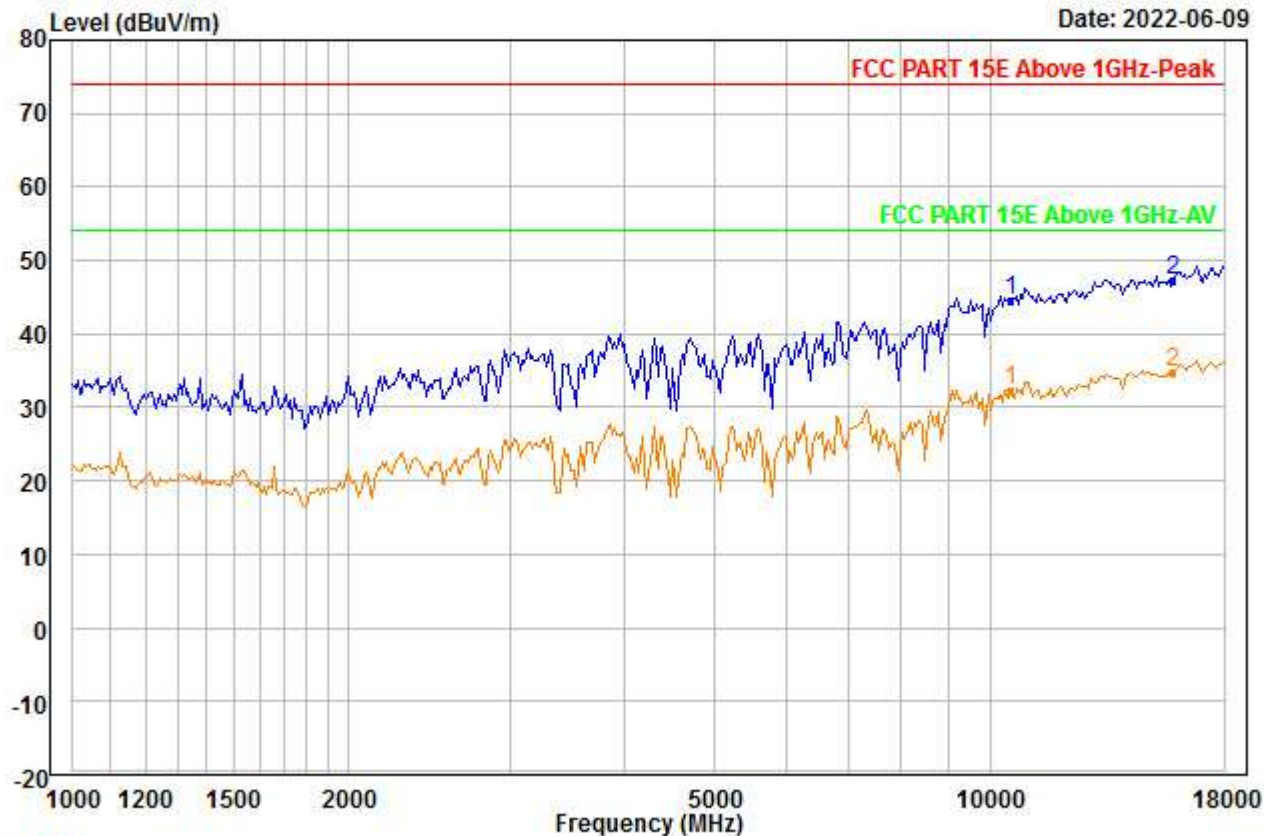


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC40_ANT0+1_5270
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10540.000	38.18	38.22	45.83	0.00	14.03	44.60	74.00	-29.40	---	---	Peak
2	PP15810.000	35.82	40.63	46.15	0.00	17.11	47.41	74.00	-26.59	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00264.EMI

Date: 2022-06-09

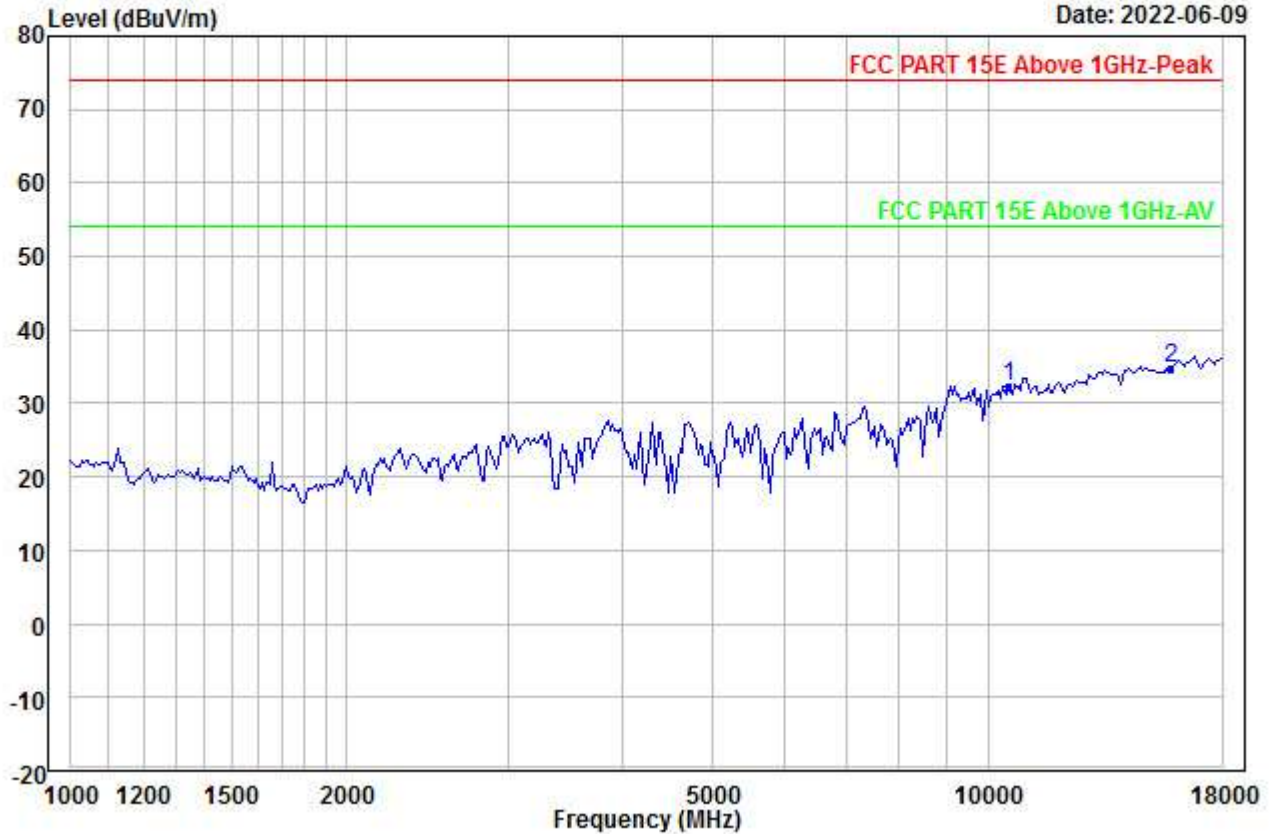


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10540.000	25.86	38.22	45.83	0.00	14.03	32.28	54.00	-21.72	---	---	Aver
2	PP15810.000	23.17	40.63	46.15	0.00	17.11	34.76	54.00	-19.24	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00265.EMI

Date: 2022-06-09

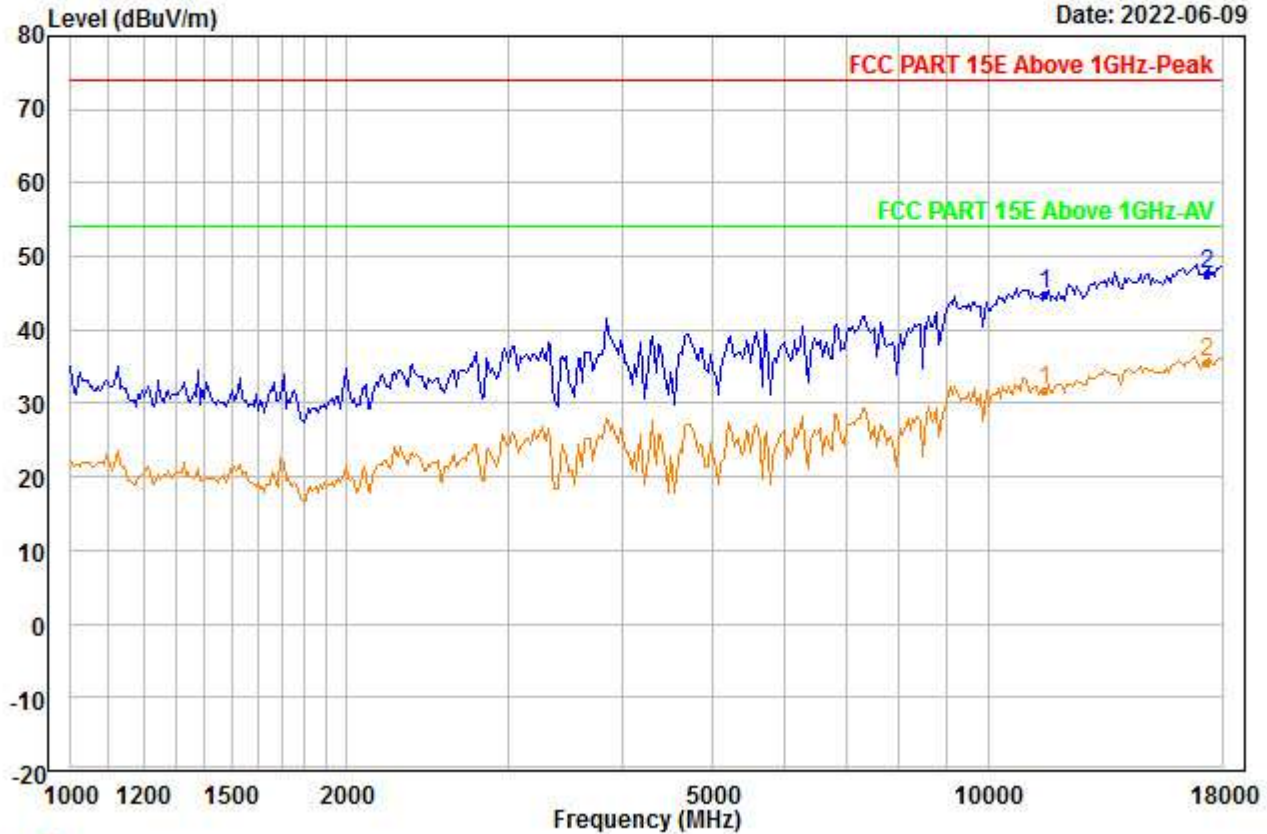


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5775
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11550.000	37.56	38.93	46.09	0.00	14.32	44.72	74.00	-29.28	---	---	Peak
2	PP17325.000	34.40	42.17	46.81	0.00	17.88	47.64	74.00	-26.36	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00266.EMI

Date: 2022-06-09

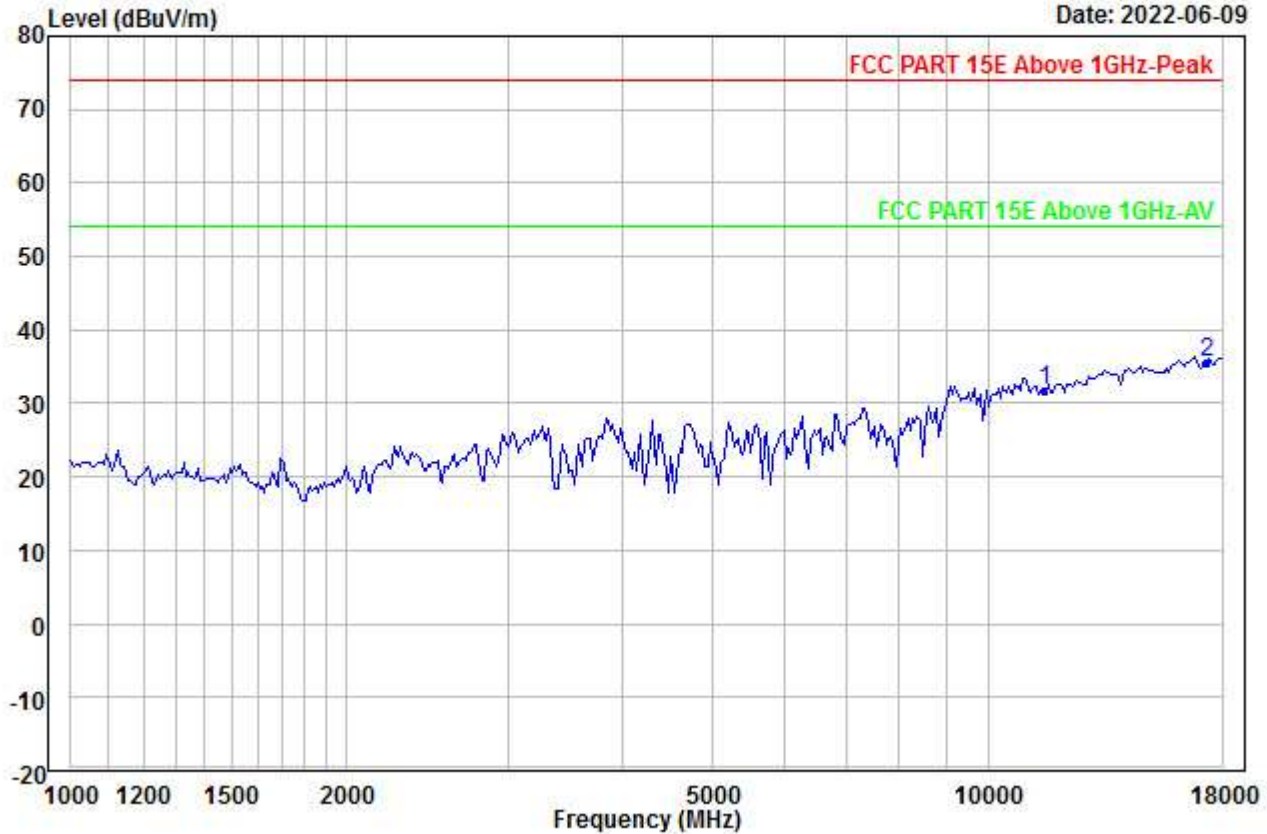


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11550.000	24.48	38.93	46.09	0.00	14.32	31.64	54.00	-22.36	---	---	Aver
2	PP17325.000	22.44	42.17	46.81	0.00	17.88	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00267.EMI

Date: 2022-06-09

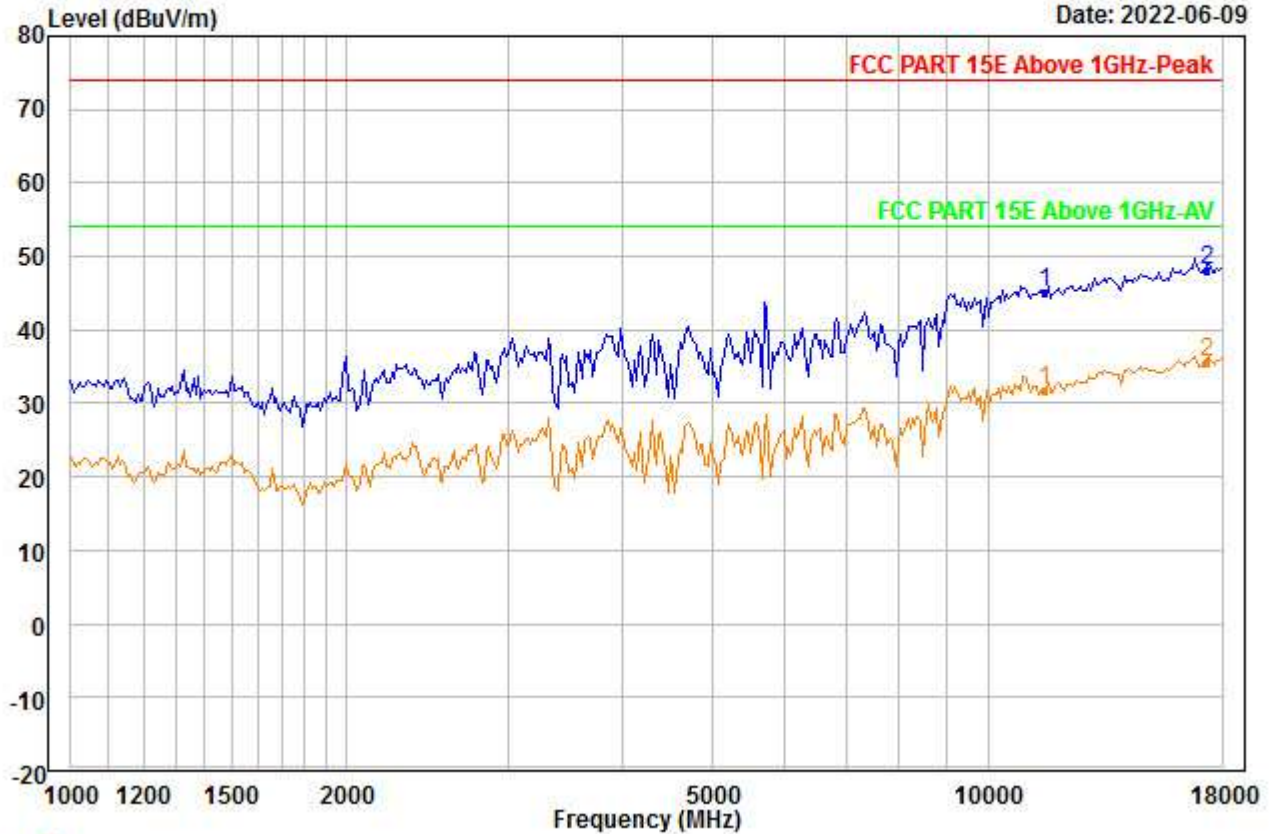


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11550.000	38.04	38.93	46.09	0.00	14.32	45.20	74.00	-28.80	---	---	Peak
2	PP17325.000	34.80	42.17	46.81	0.00	17.88	48.04	74.00	-25.96	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00268.EMI

Date: 2022-06-09

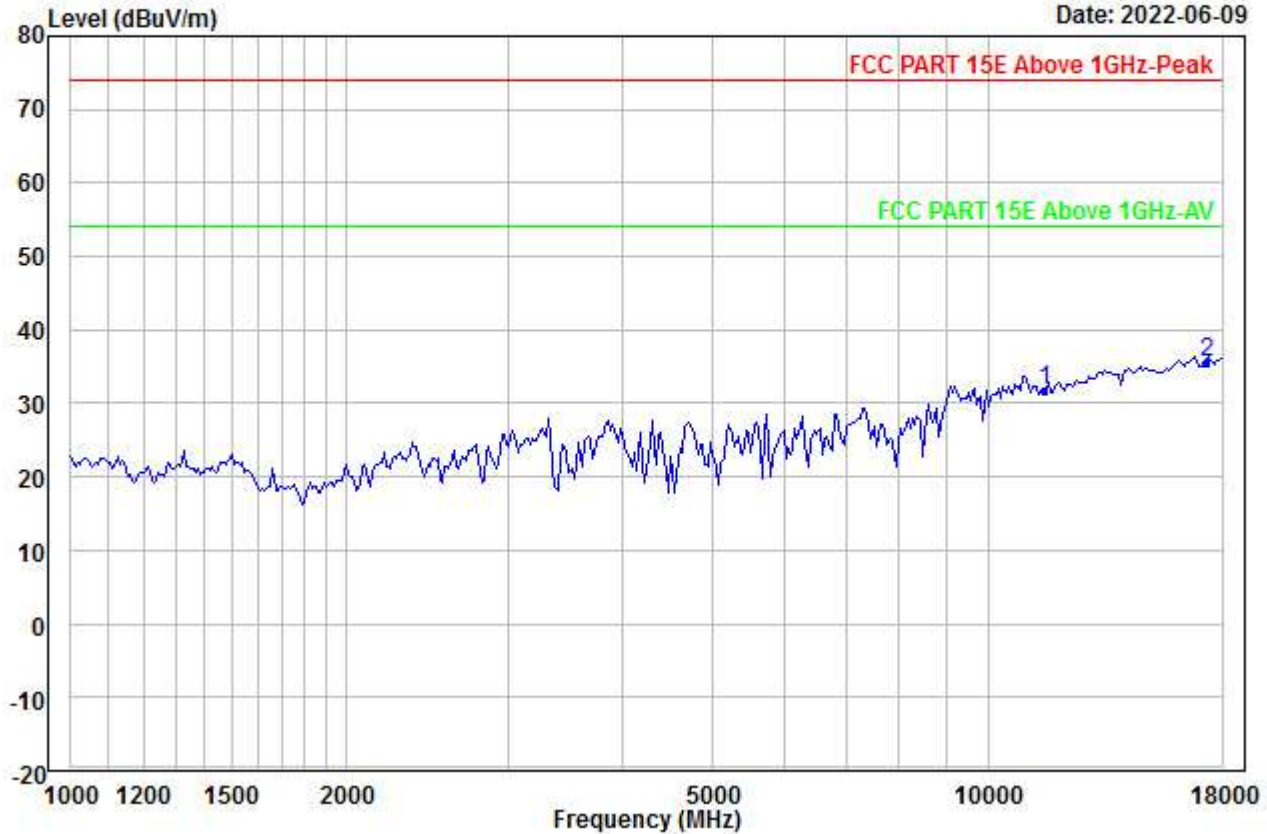


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11550.000	24.57	38.93	46.09	0.00	14.32	31.73	54.00	-22.27	---	---	Aver
2	PP17325.000	22.44	42.17	46.81	0.00	17.88	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00269.EMI

Date: 2022-06-09

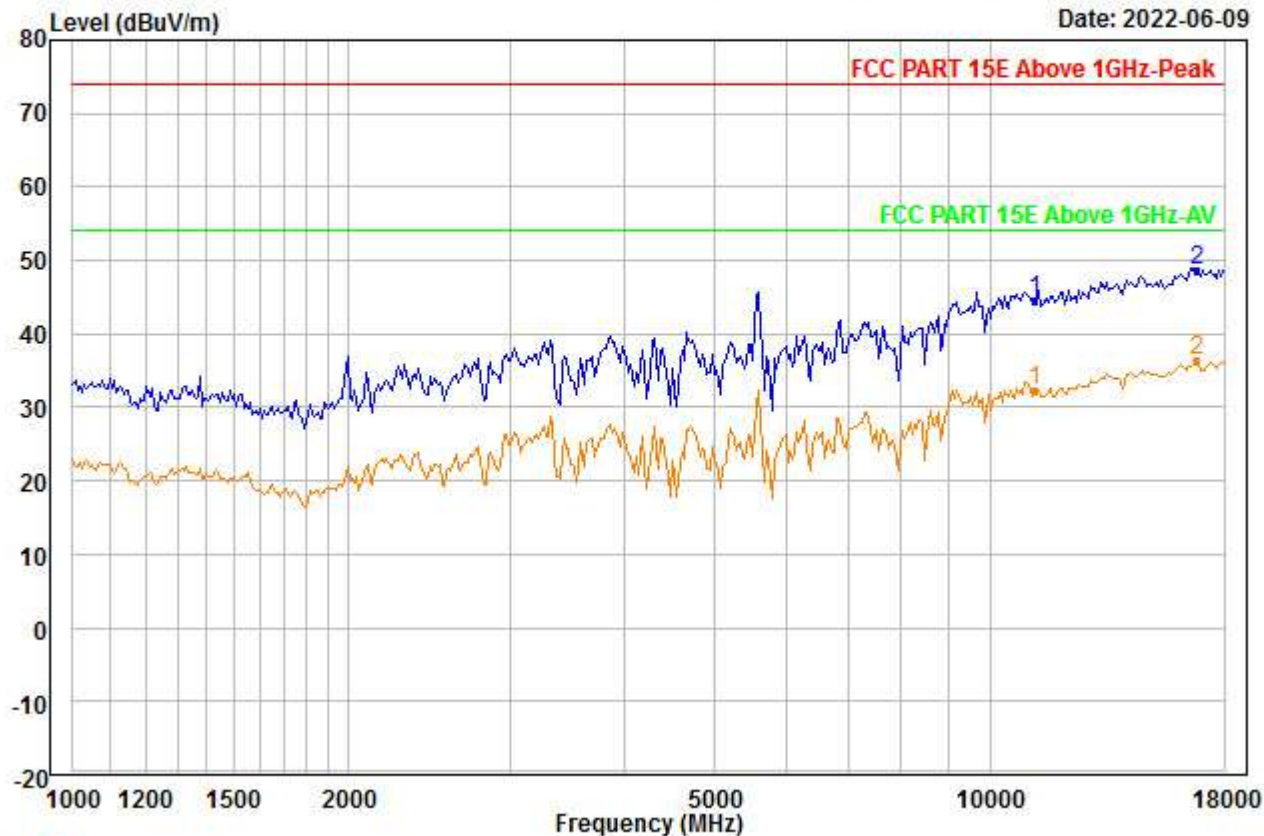


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5610
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11220.000	37.35	38.68	45.48	0.00	14.08	44.63	74.00	-29.37	---	---	Peak
2	PP16830.000	36.00	42.03	47.00	0.00	17.60	48.63	74.00	-25.37	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00270.EMI

Date: 2022-06-09

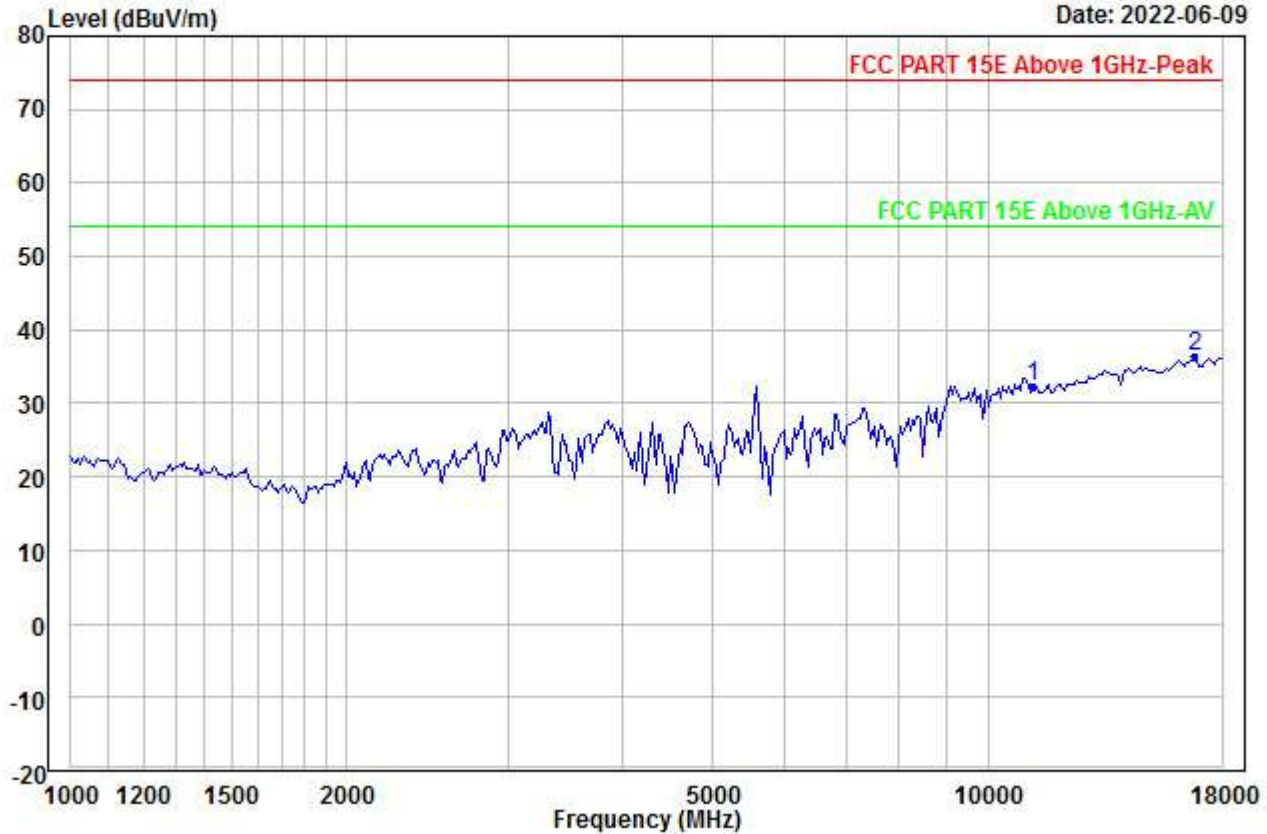


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11220.000	24.95	38.68	45.48	0.00	14.08	32.23	54.00	-21.77	---	---	Aver
2	PP16830.000	23.78	42.03	47.00	0.00	17.60	36.41	54.00	-17.59	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00271.EMI

Date: 2022-06-09

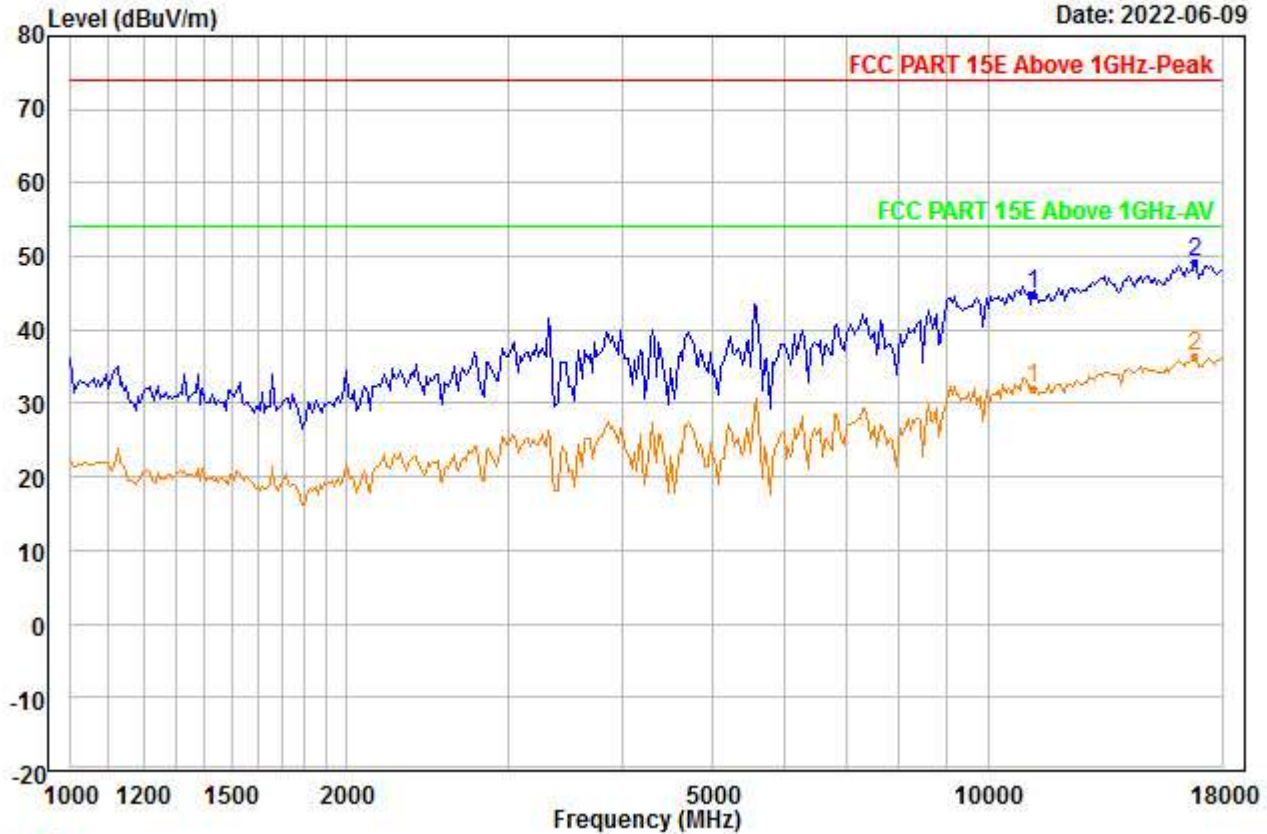


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5610
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11220.000	37.47	38.68	45.48	0.00	14.08	44.75	74.00	-29.25	---	---	Peak
2	PP16830.000	36.60	42.03	47.00	0.00	17.60	49.23	74.00	-24.77	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00272.EMI

Date: 2022-06-09

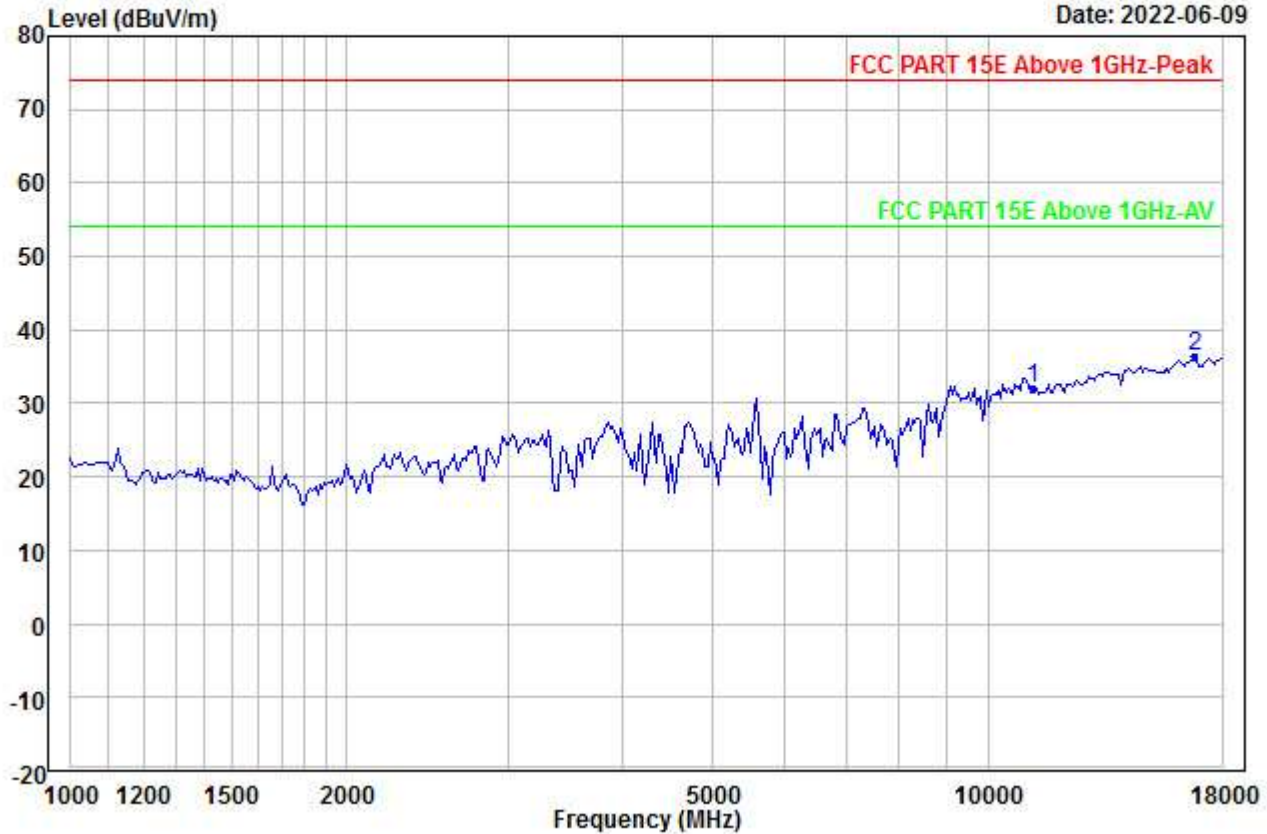


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11220.000	24.87	38.68	45.48	0.00	14.08	32.15	54.00	-21.85	---	---	Aver
2	PP16830.000	23.68	42.03	47.00	0.00	17.60	36.31	54.00	-17.69	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00273.EMI

Date: 2022-06-09

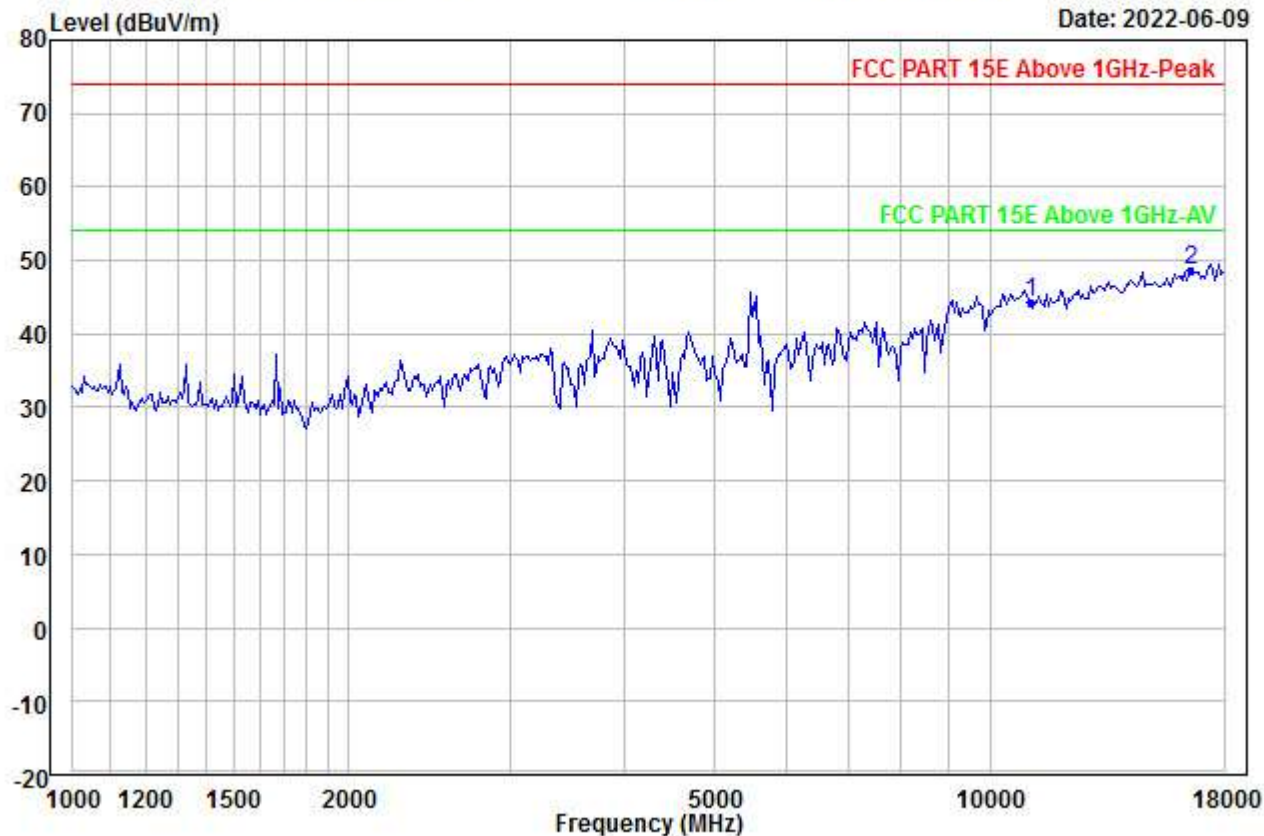


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11060.000	37.06	38.55	45.13	0.00	13.96	44.44	74.00	-29.56	---	---	Peak
2	PP16590.000	36.22	41.64	46.71	0.00	17.50	48.65	74.00	-25.35	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00274.EMI

Date: 2022-06-09

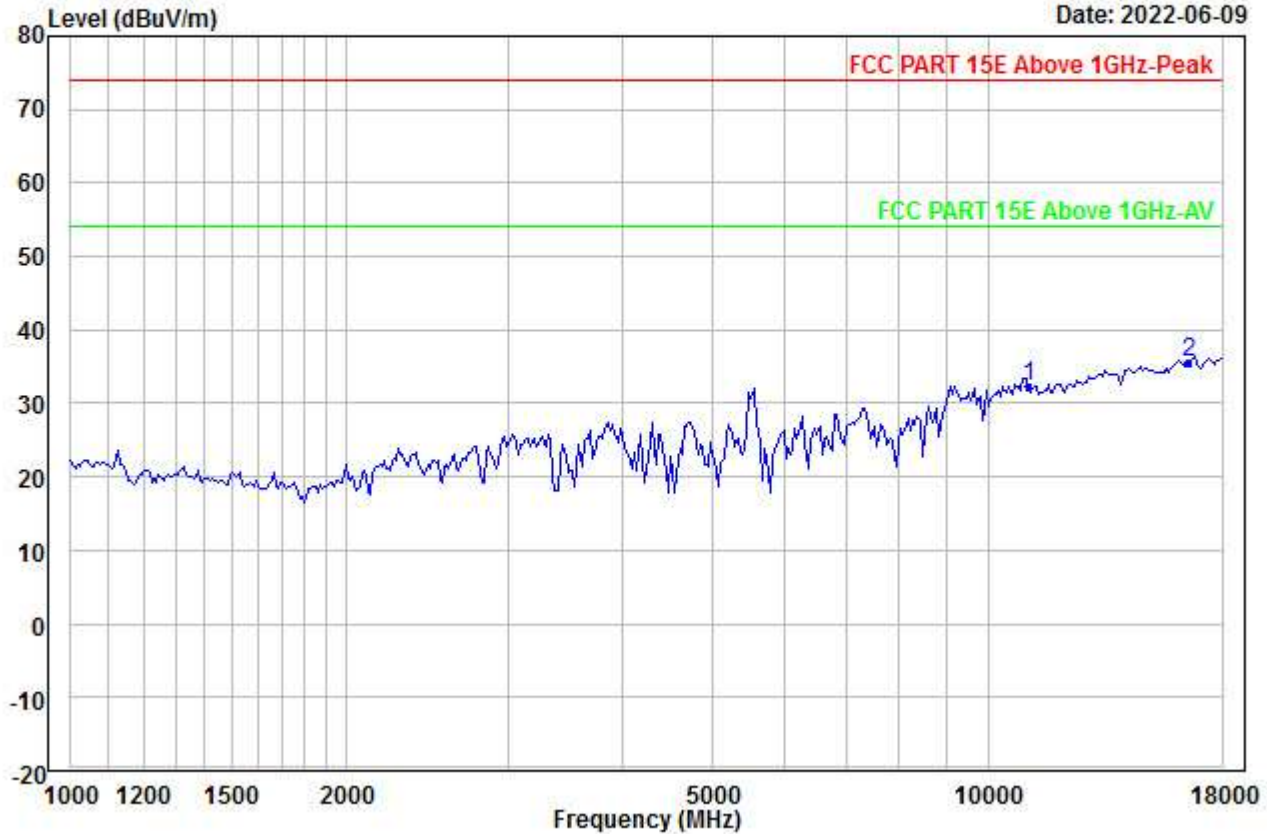


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11060.000	24.85	38.55	45.13	0.00	13.96	32.23	54.00	-21.77	---	---	Aver
2	PP16590.000	23.03	41.64	46.71	0.00	17.50	35.46	54.00	-18.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00275.EMI

Date: 2022-06-09

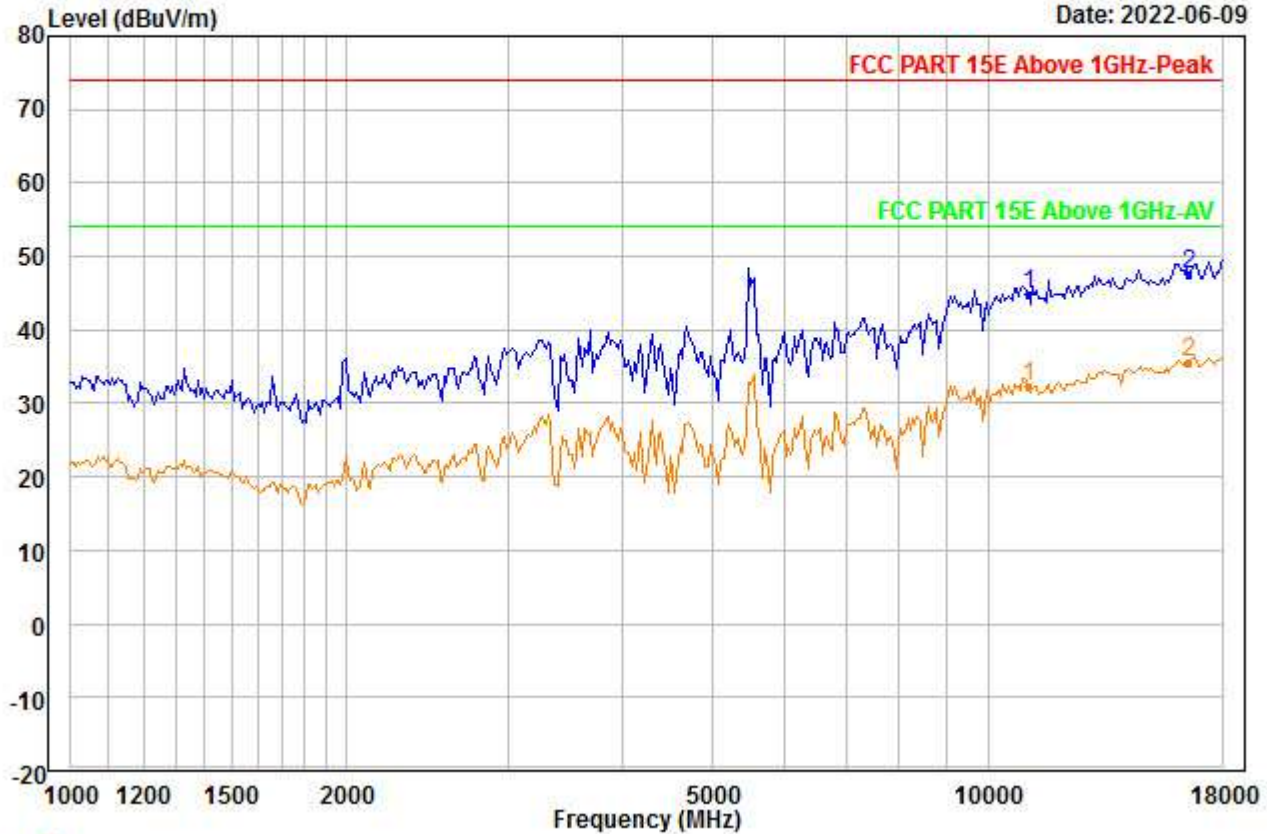


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5530
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11060.000	37.57	38.55	45.13	0.00	13.96	44.95	74.00	-29.05	---	---	Peak
2	PP16590.000	35.25	41.64	46.71	0.00	17.50	47.68	74.00	-26.32	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00276.EMI

Date: 2022-06-09

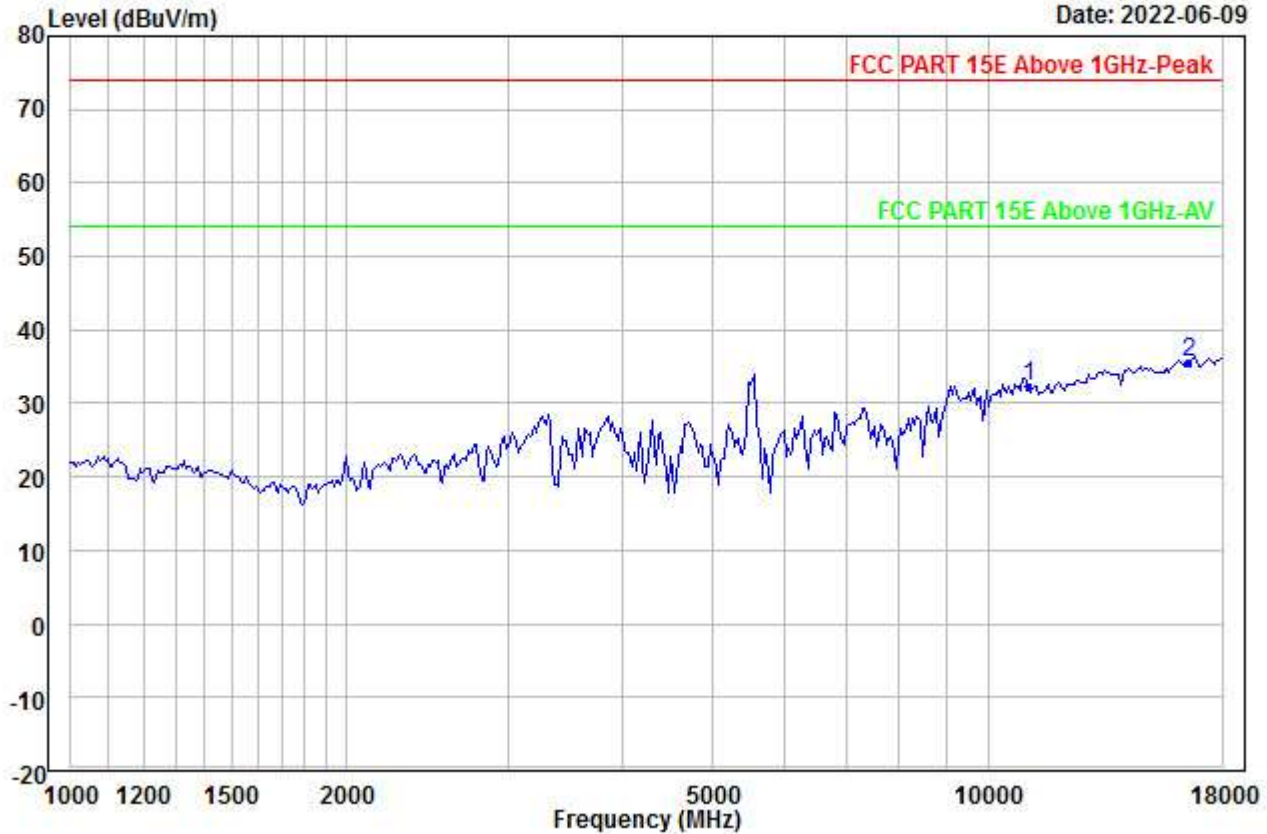


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11060.000	24.94	38.55	45.13	0.00	13.96	32.32	54.00	-21.68	---	---	Aver
2	PP16590.000	23.13	41.64	46.71	0.00	17.50	35.56	54.00	-18.44	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00277.EMI

Date: 2022-06-09

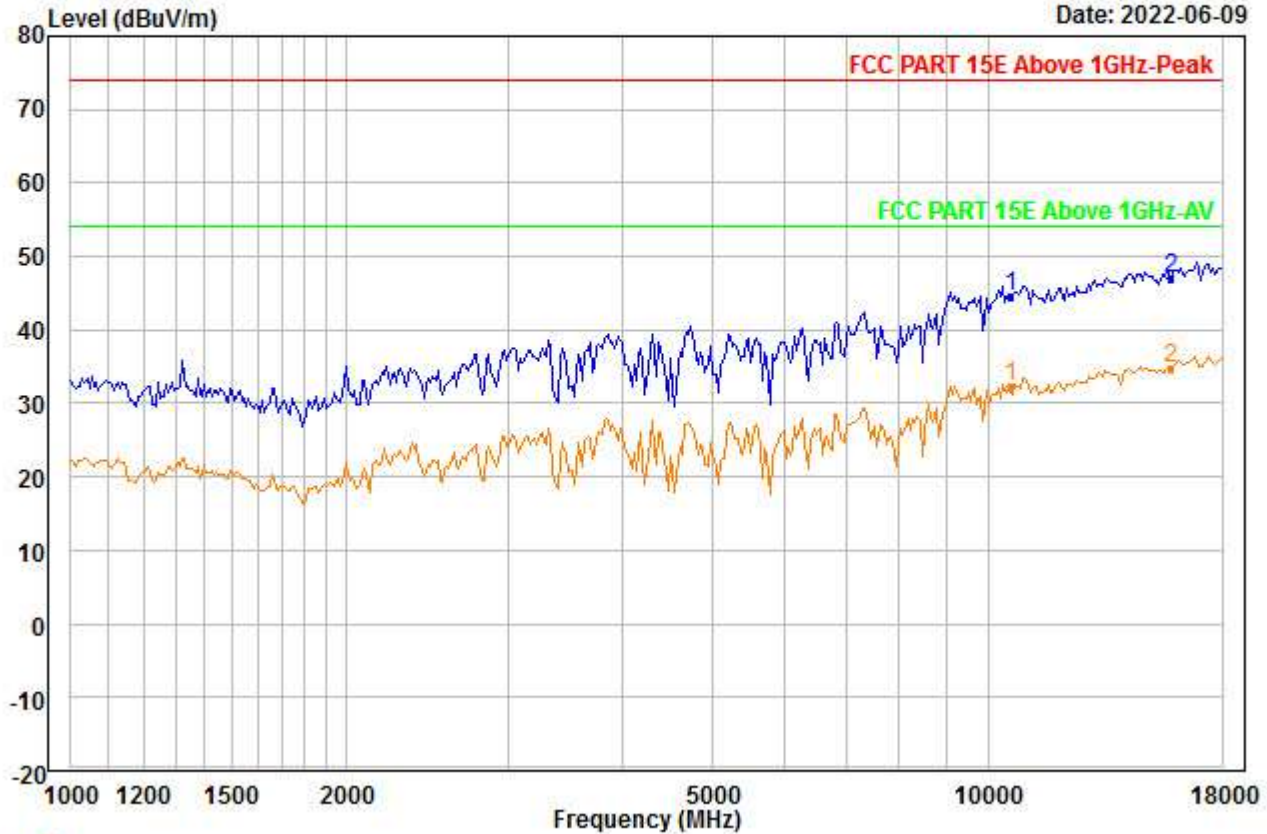


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10580.000	38.16	38.25	45.76	0.00	14.02	44.67	74.00	-29.33	---	---	Peak
2	PP15870.000	35.34	40.72	46.20	0.00	17.15	47.01	74.00	-26.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00278.EMI

Date: 2022-06-09

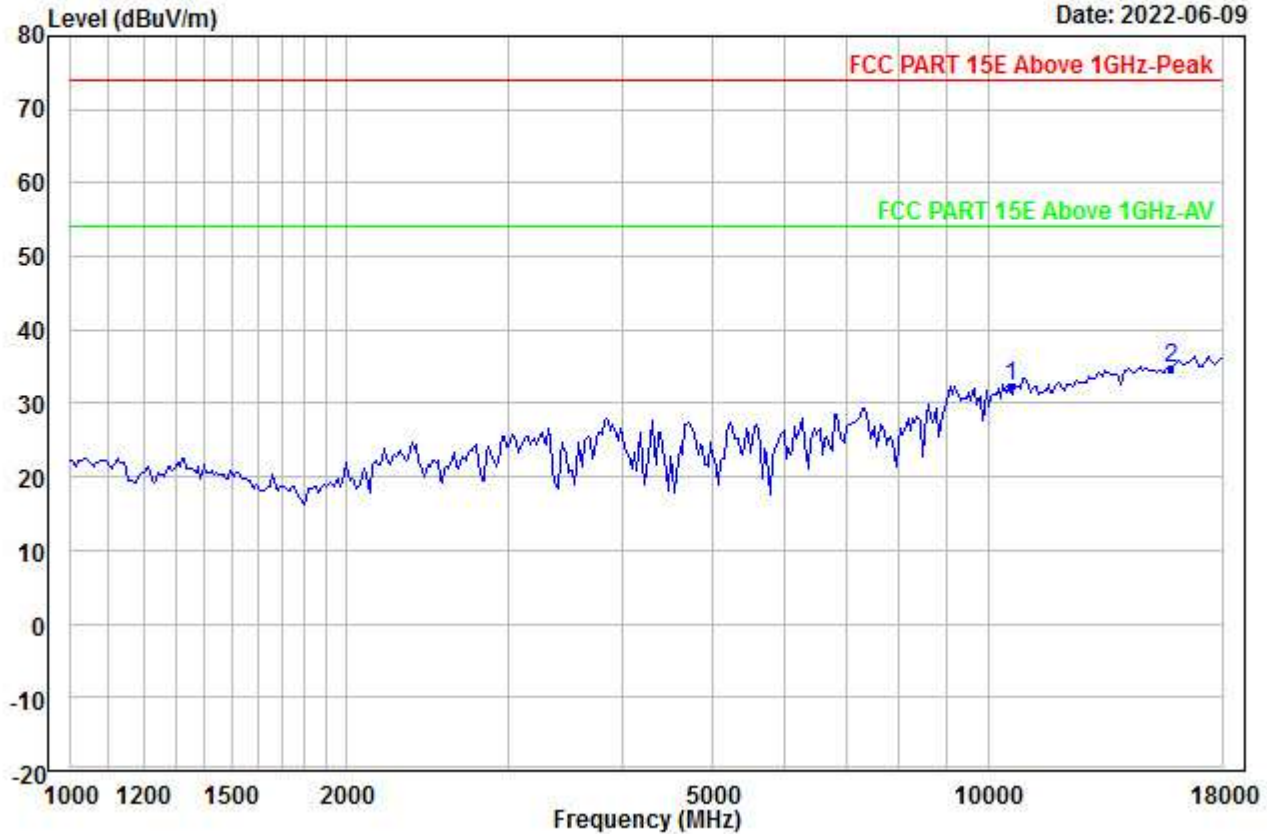


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5290
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10580.000	25.77	38.25	45.76	0.00	14.02	32.28	54.00	-21.72	---	---	Aver
2	PP15870.000	23.09	40.72	46.20	0.00	17.15	34.76	54.00	-19.24	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4_00279.EMI

Date: 2022-06-09

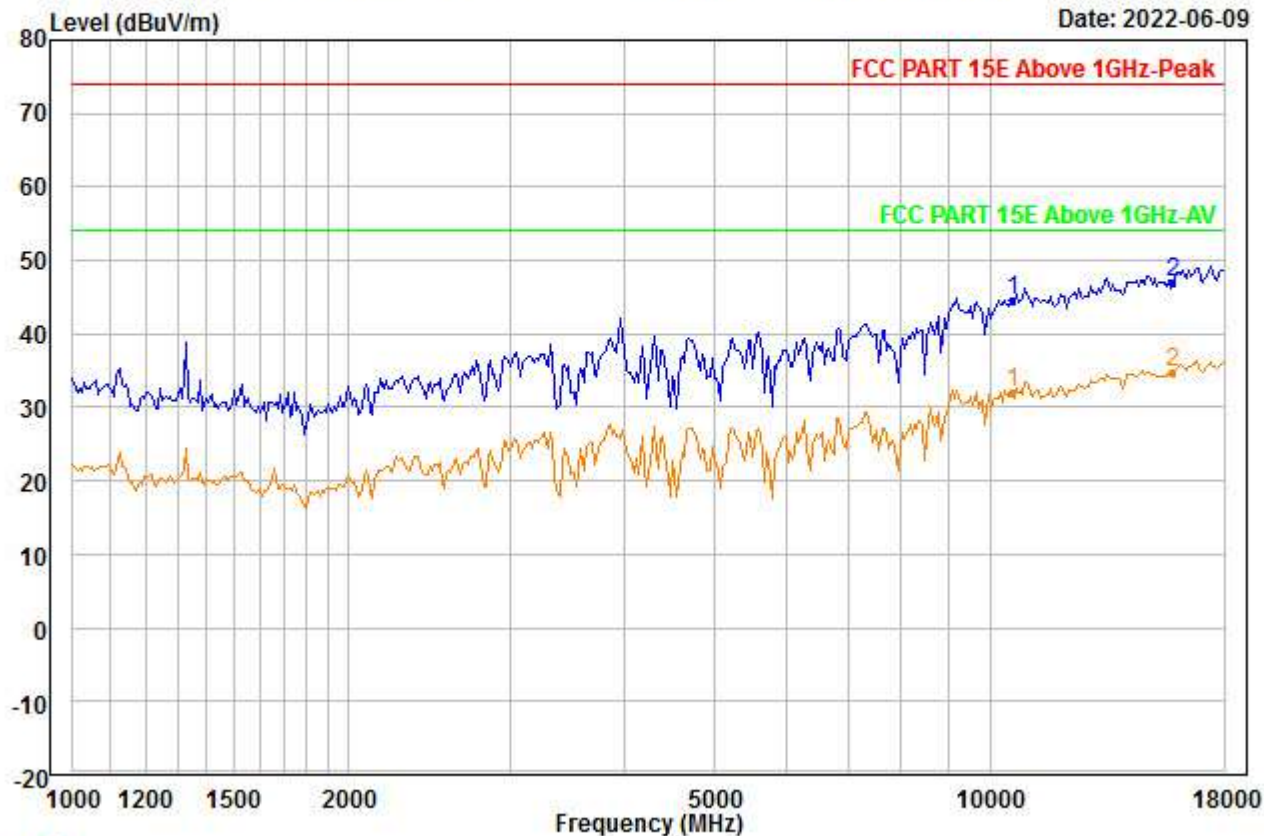


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5290
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10580.000	38.19	38.25	45.76	0.00	14.02	44.70	74.00	-29.30	---	---	Peak
2	PP15870.000	35.26	40.72	46.20	0.00	17.15	46.93	74.00	-27.07	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00280.EMI

Date: 2022-06-09

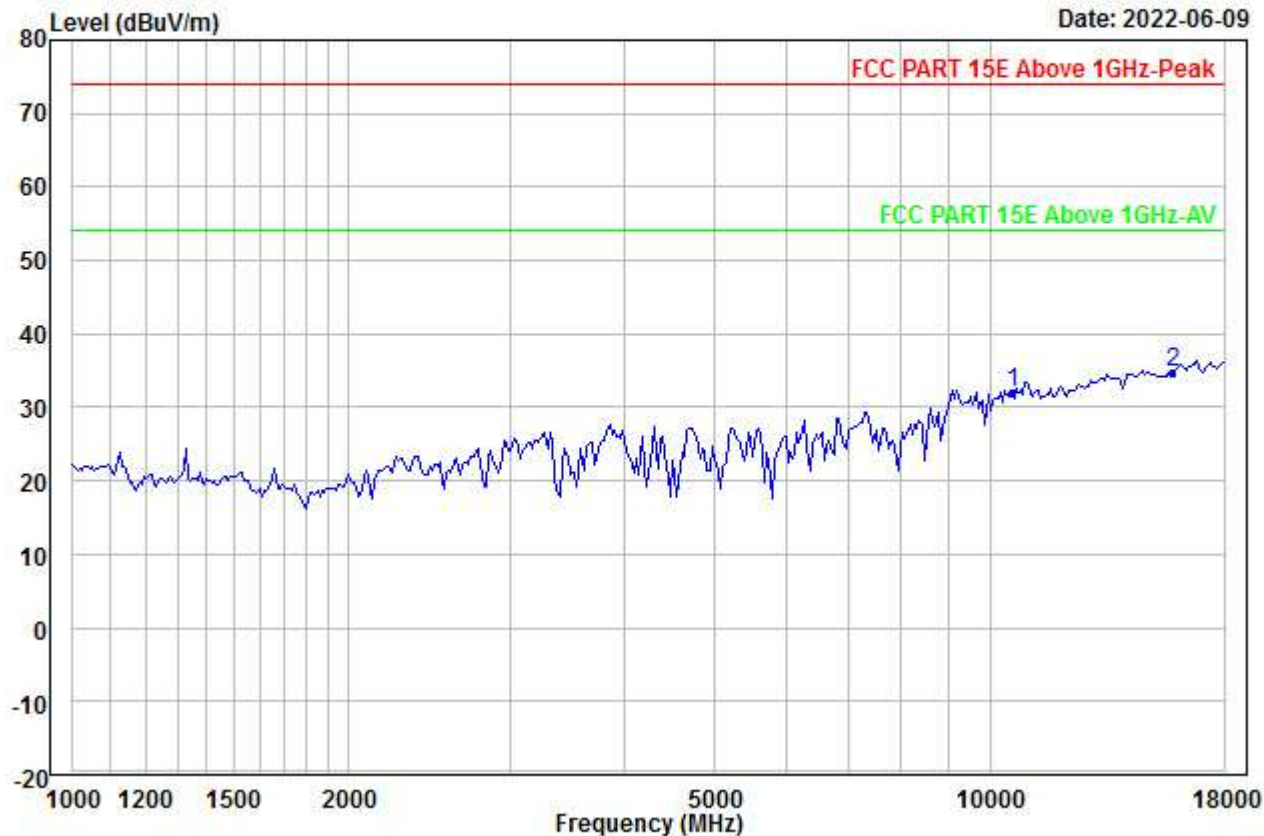


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10580.000	25.62	38.25	45.76	0.00	14.02	32.13	54.00	-21.87	---	---	Aver
2	PP15870.000	22.99	40.72	46.20	0.00	17.15	34.66	54.00	-19.34	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00281.EMI

Date: 2022-06-09

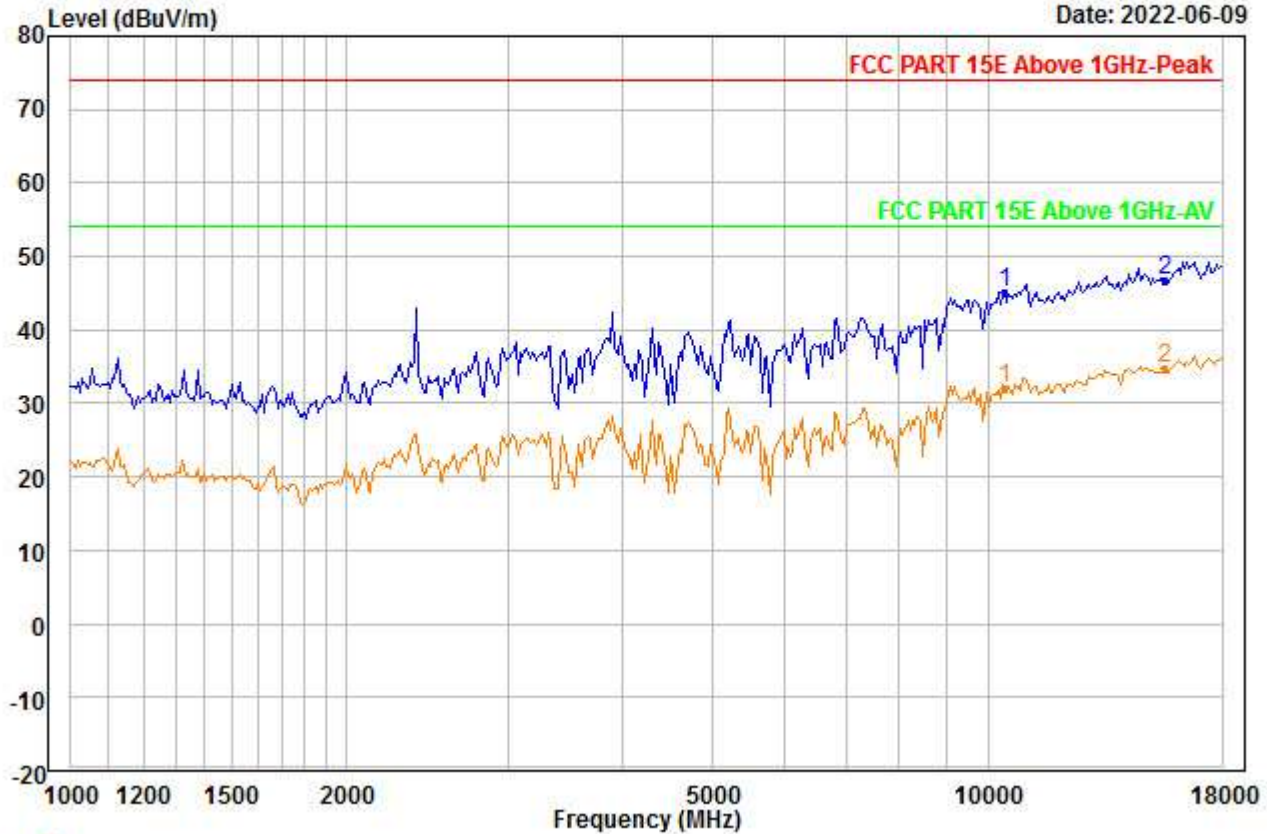


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5210
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10420.000	38.83	38.15	45.93	0.00	14.07	45.12	74.00	-28.88	---	---	Peak
2	PP15630.000	35.48	40.38	46.00	0.00	16.99	46.85	74.00	-27.15	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00282.EMI

Date: 2022-06-09

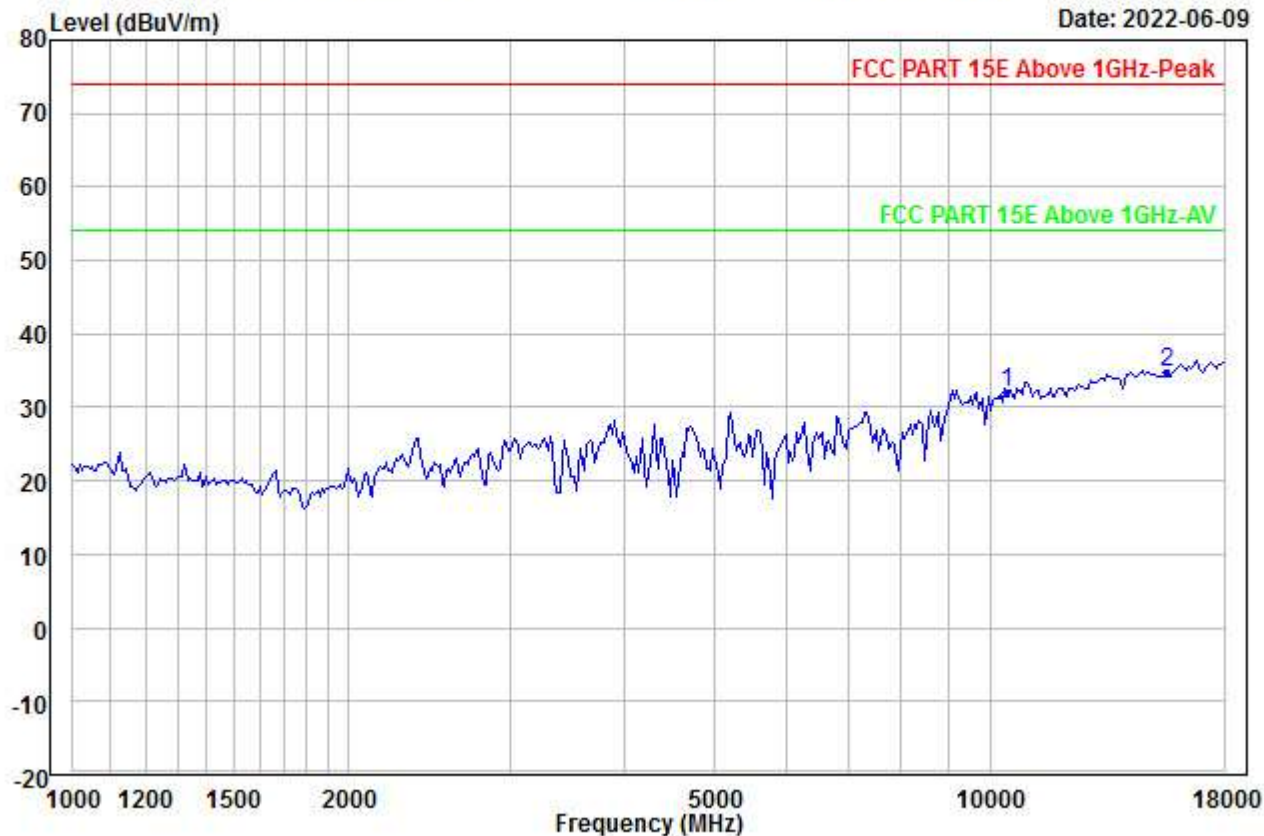


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10420.000	25.66	38.15	45.93	0.00	14.07	31.95	54.00	-22.05	---	---	Aver
2	PP15630.000	23.37	40.38	46.00	0.00	16.99	34.74	54.00	-19.26	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00283.EMI

Date: 2022-06-09

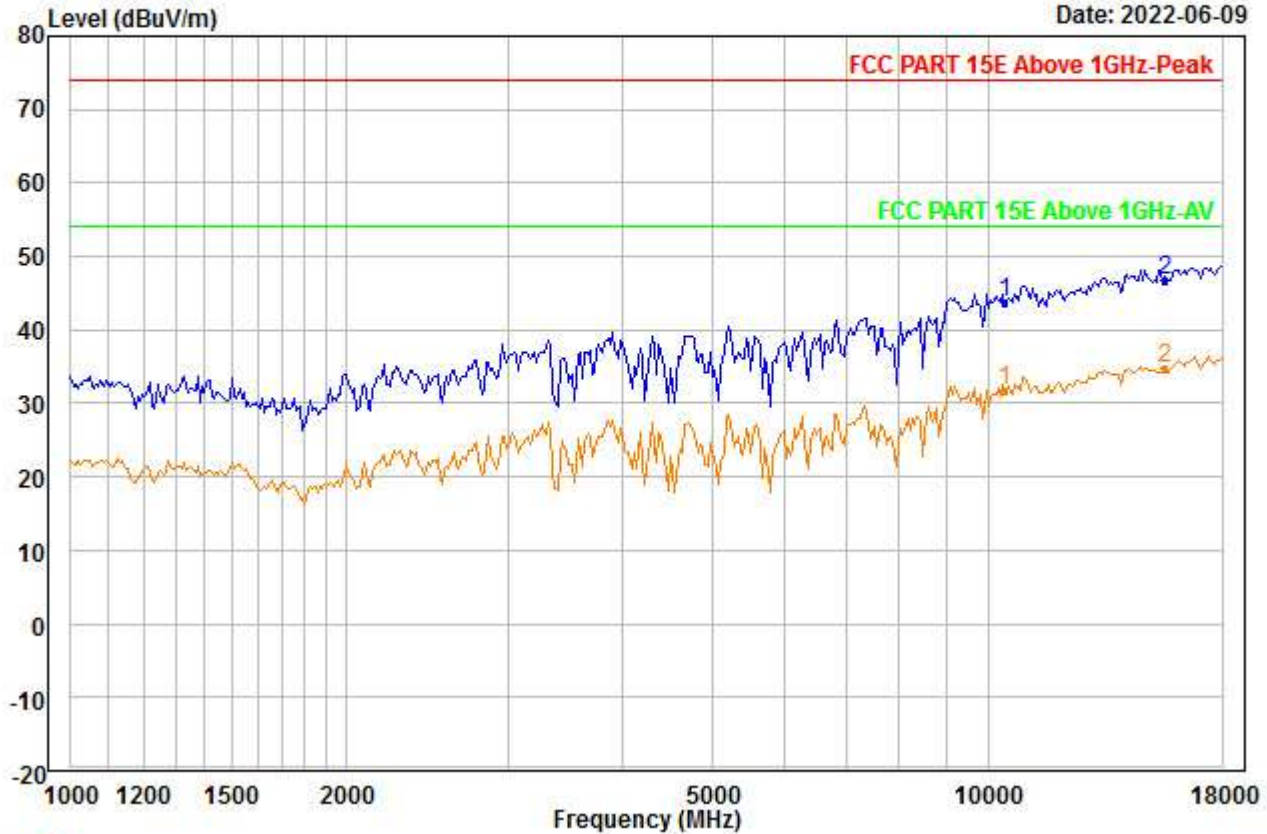


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : AC80_ANT0+1_5210
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10420.000	37.41	38.15	45.93	0.00	14.07	43.70	74.00	-30.30	---	---	Peak
2	PP15630.000	35.43	40.38	46.00	0.00	16.99	46.80	74.00	-27.20	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\I\SE\4_00284.EMI

Date: 2022-06-09

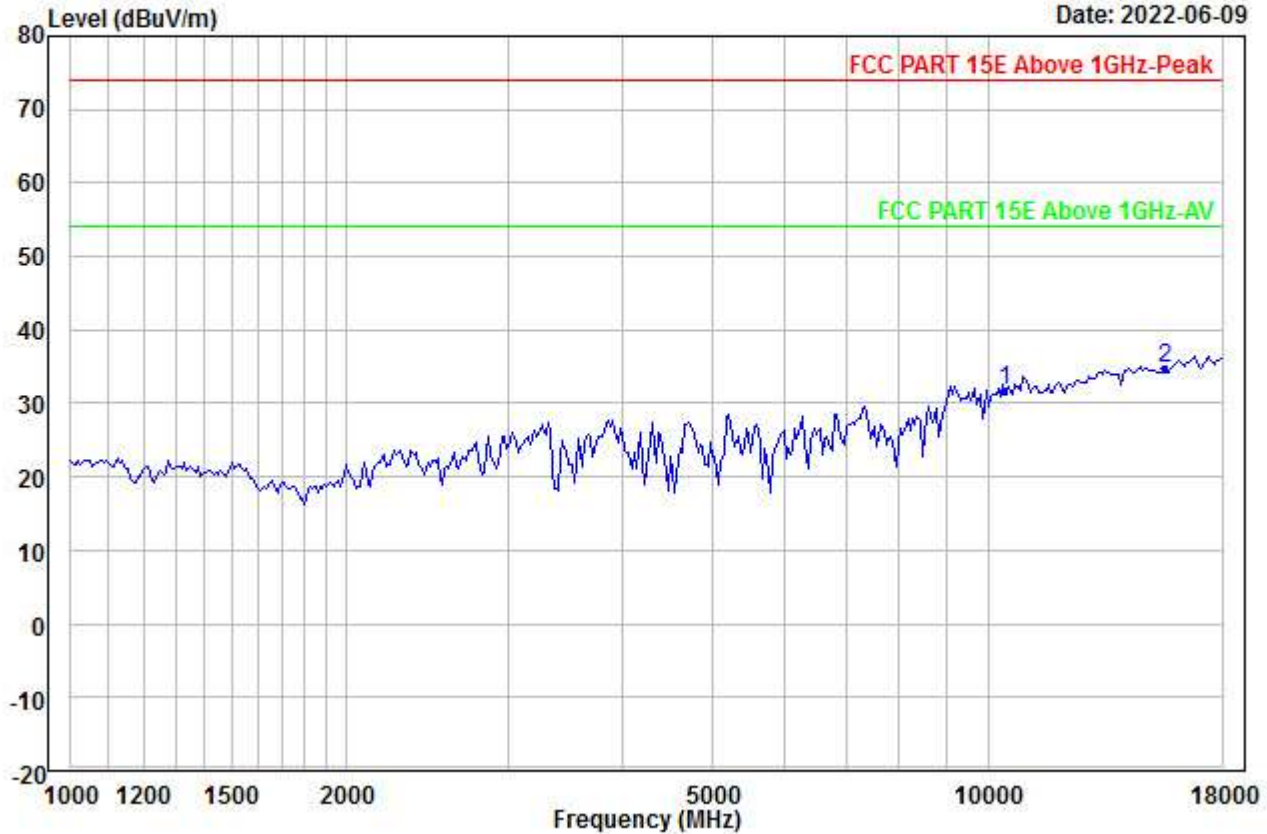

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10420.000	25.58	38.15	45.93	0.00	14.07	31.87	54.00	-22.13	---	---	Aver
2	PP15630.000	23.37	40.38	46.00	0.00	16.99	34.74	54.00	-19.26	---	---	Aver