


File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00001.EMI

Date: 2022-06-09

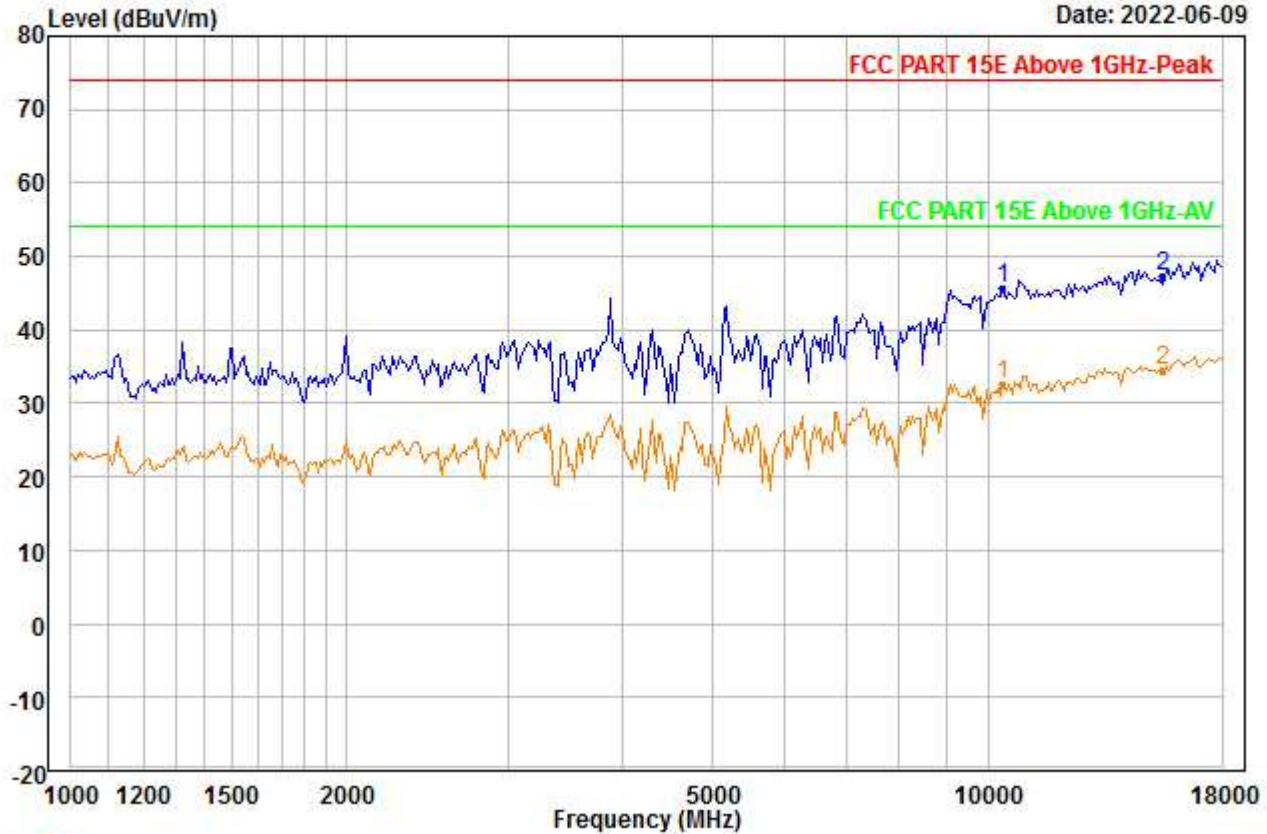


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5180
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	39.38	38.12	45.96	0.00	14.08	45.62	74.00	-28.38	---	---	Peak
2	PP15540.000	36.04	40.26	45.93	0.00	16.94	47.31	74.00	-26.69	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00002.EMI

Date: 2022-06-09

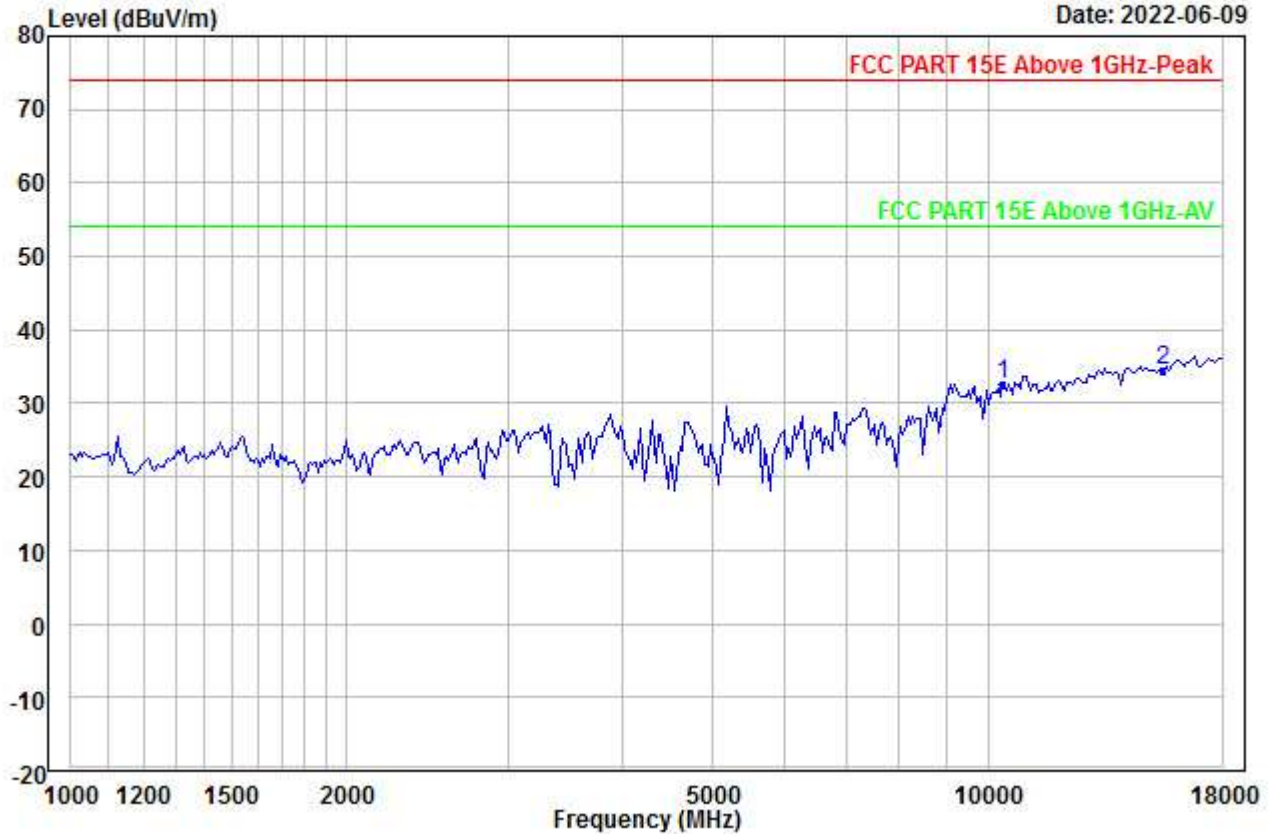


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	26.46	38.12	45.96	0.00	14.08	32.70	54.00	-21.30	---	---	Aver
2	PP15540.000	23.16	40.26	45.93	0.00	16.94	34.43	54.00	-19.57	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00003.EMI

Date: 2022-06-09

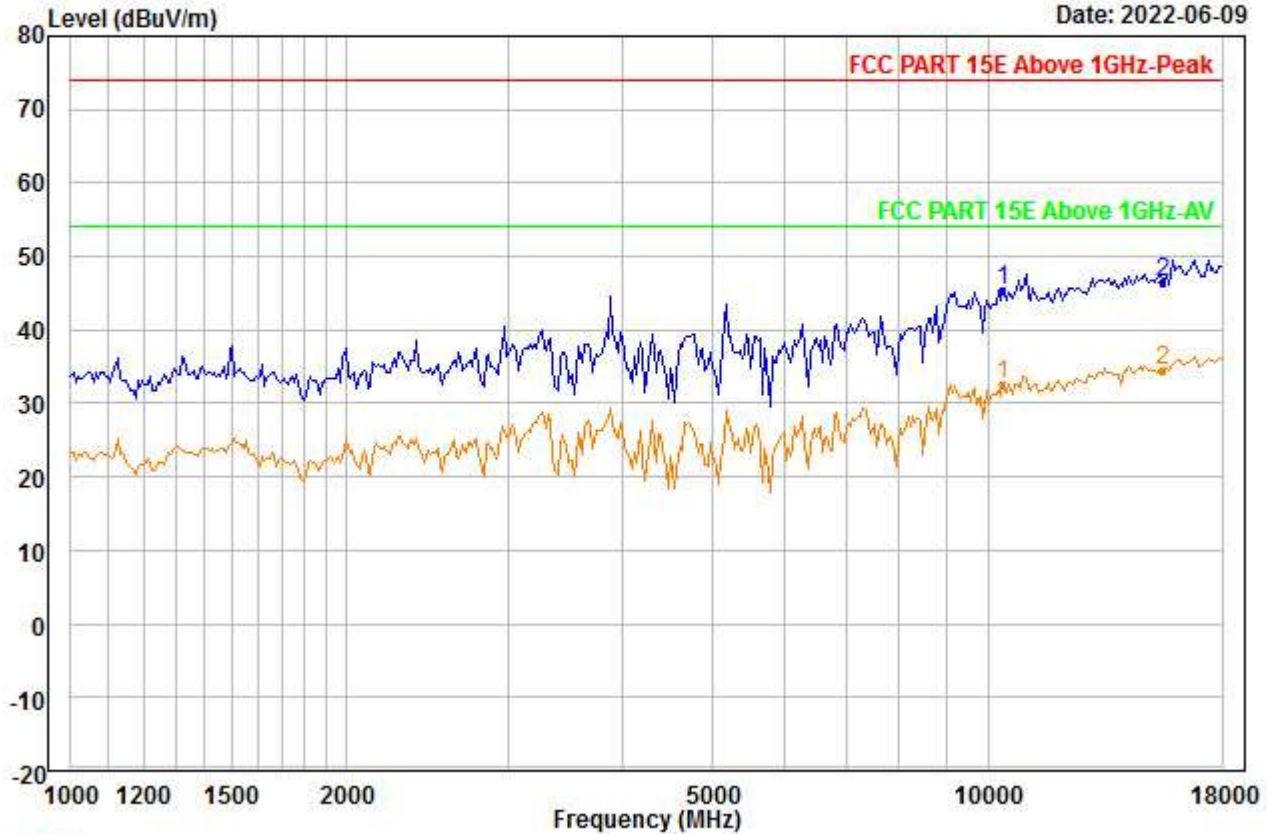


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5180
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	39.23	38.12	45.96	0.00	14.08	45.47	74.00	-28.53	---	---	Peak
2	PP15540.000	35.22	40.26	45.93	0.00	16.94	46.49	74.00	-27.51	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00004.EMI

Date: 2022-06-09

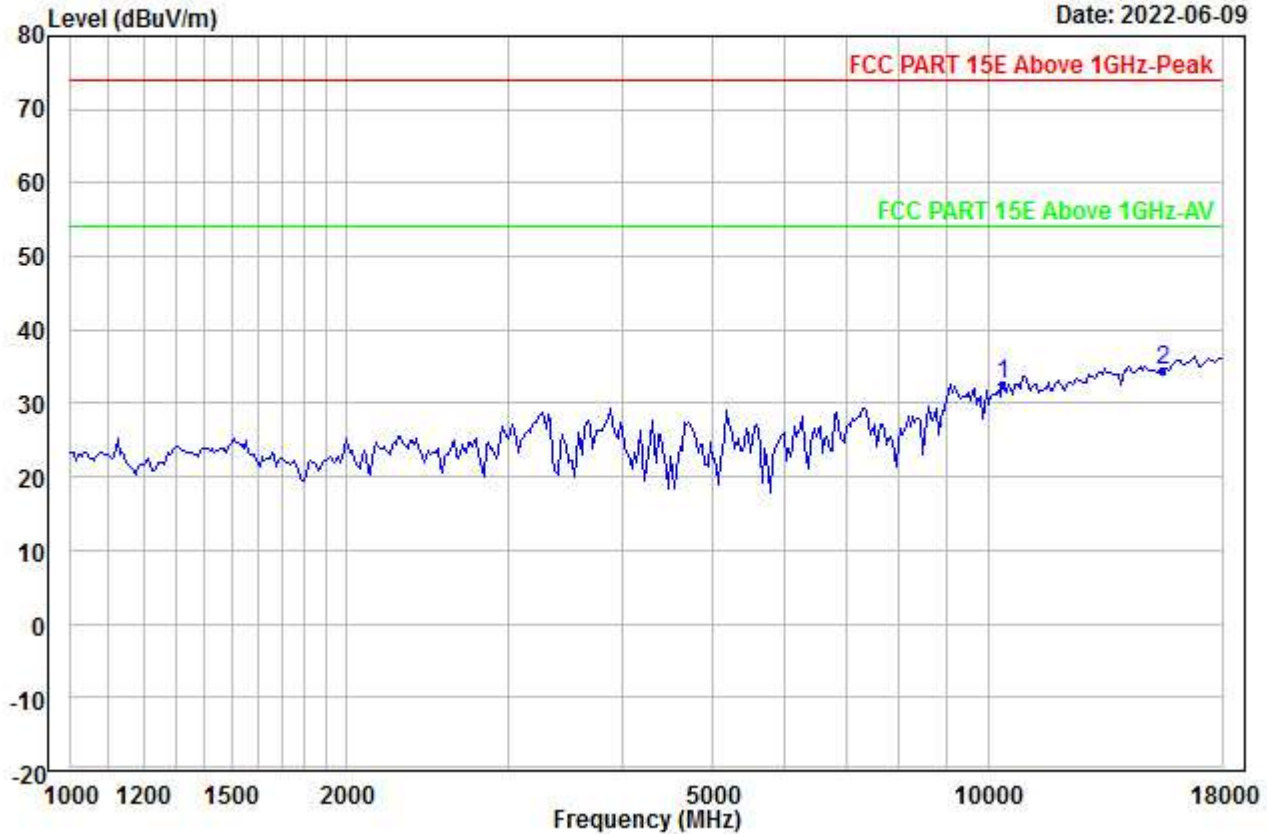


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	26.39	38.12	45.96	0.00	14.08	32.63	54.00	-21.37	---	---	Aver
2	PP15540.000	23.16	40.26	45.93	0.00	16.94	34.43	54.00	-19.57	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00005.EMI

Date: 2022-06-09

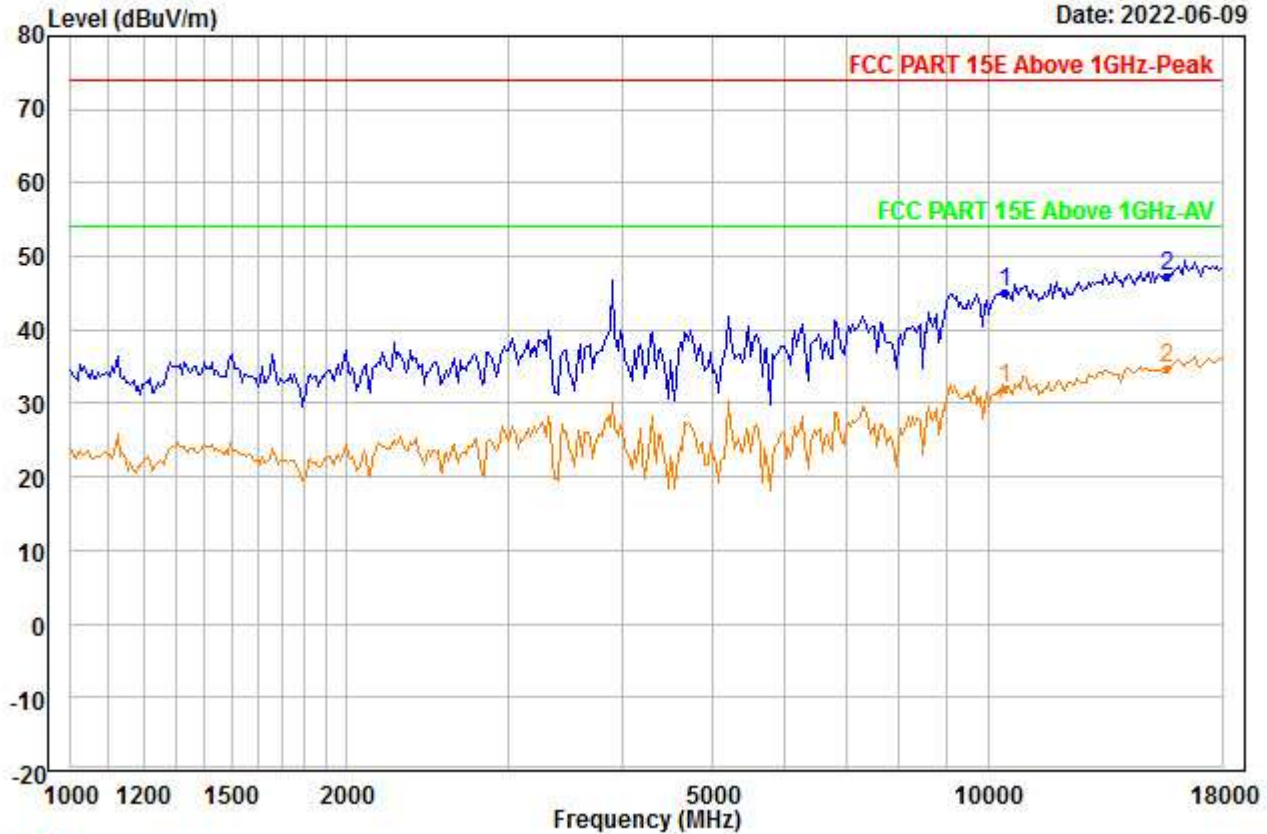


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5220
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	38.81	38.16	45.92	0.00	14.06	45.11	74.00	-28.89	---	---	Peak
2	PP15660.000	35.97	40.42	46.03	0.00	17.01	47.37	74.00	-26.63	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00006.EMI

Date: 2022-06-09

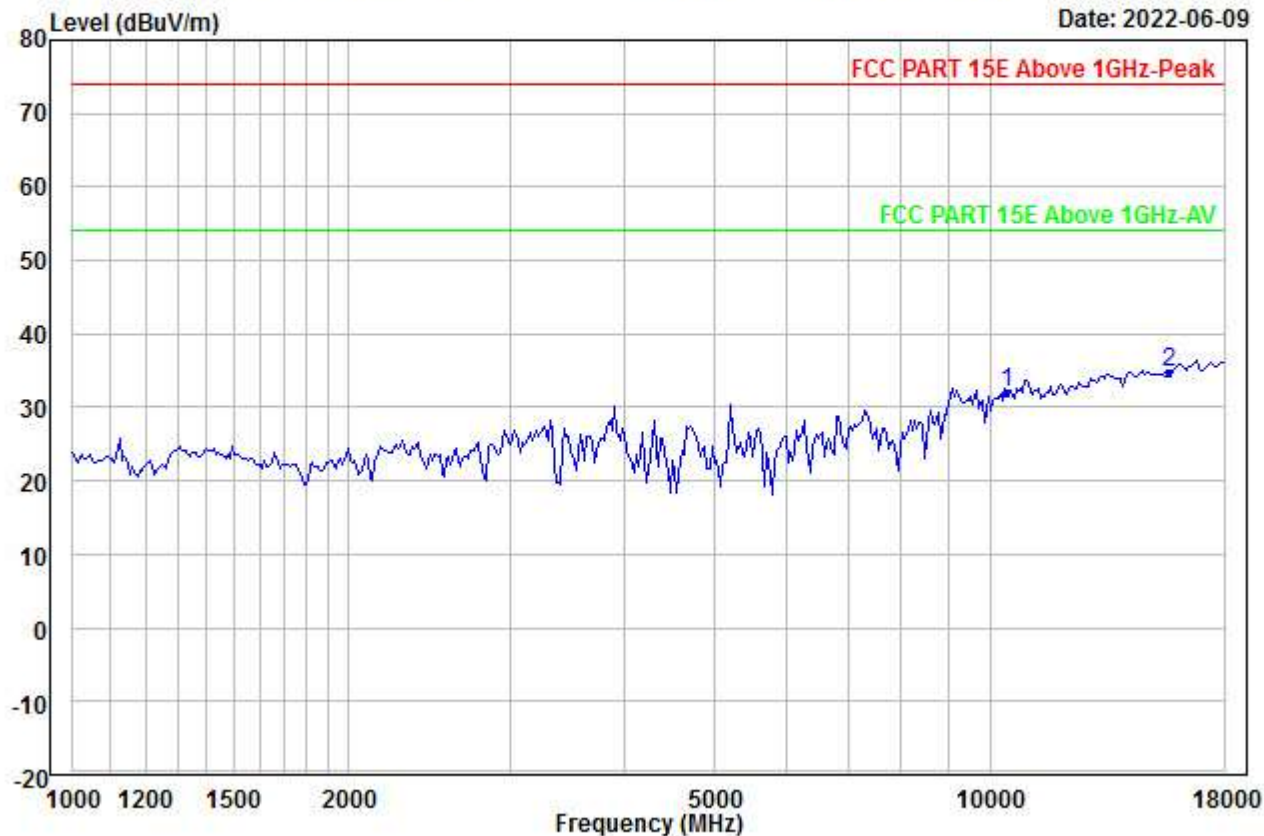


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5220
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	25.87	38.16	45.92	0.00	14.06	32.17	54.00	-21.83	---	---	Aver
2	PP15660.000	23.44	40.42	46.03	0.00	17.01	34.84	54.00	-19.16	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00007.EMI

Date: 2022-06-09

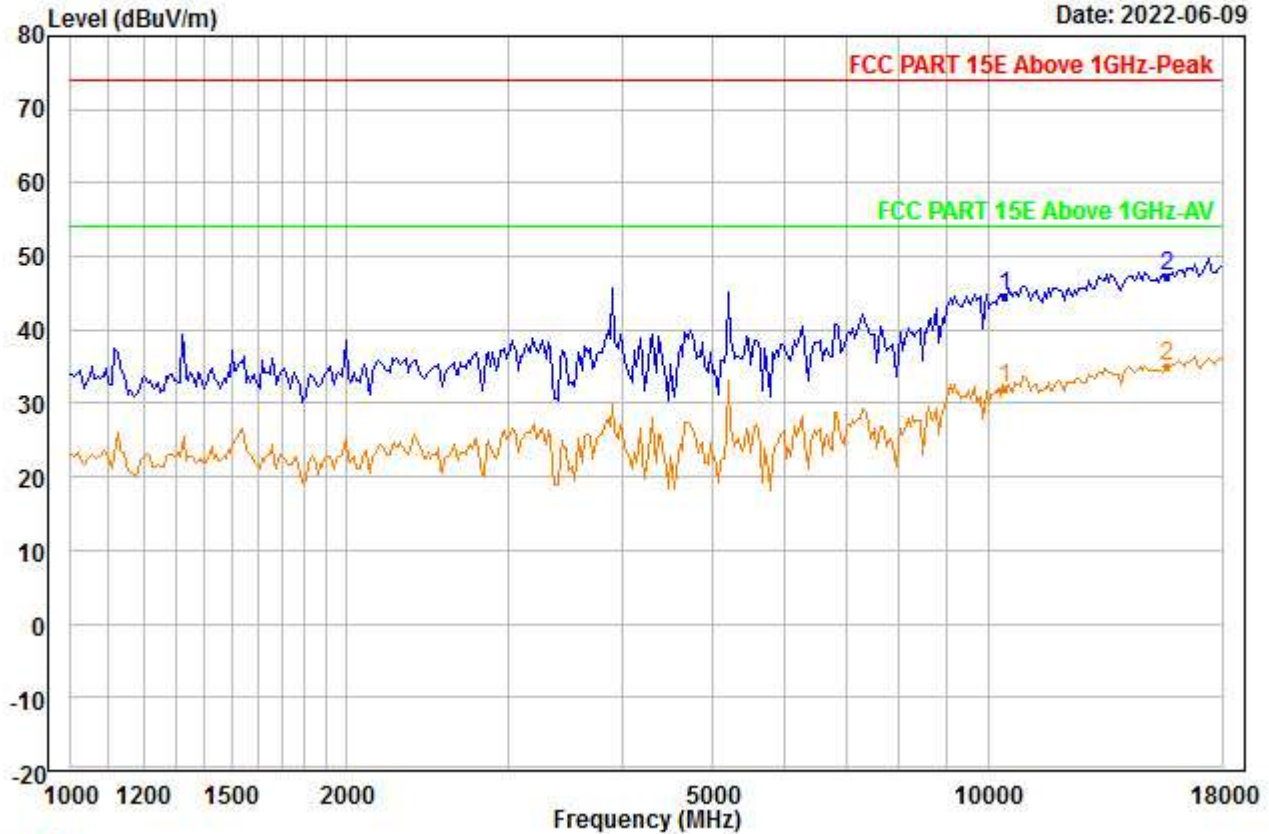


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5220
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	38.15	38.16	45.92	0.00	14.06	44.45	74.00	-29.55	---	---	Peak
2	PP15660.000	35.95	40.42	46.03	0.00	17.01	47.35	74.00	-26.65	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00008.EMI

Date: 2022-06-09

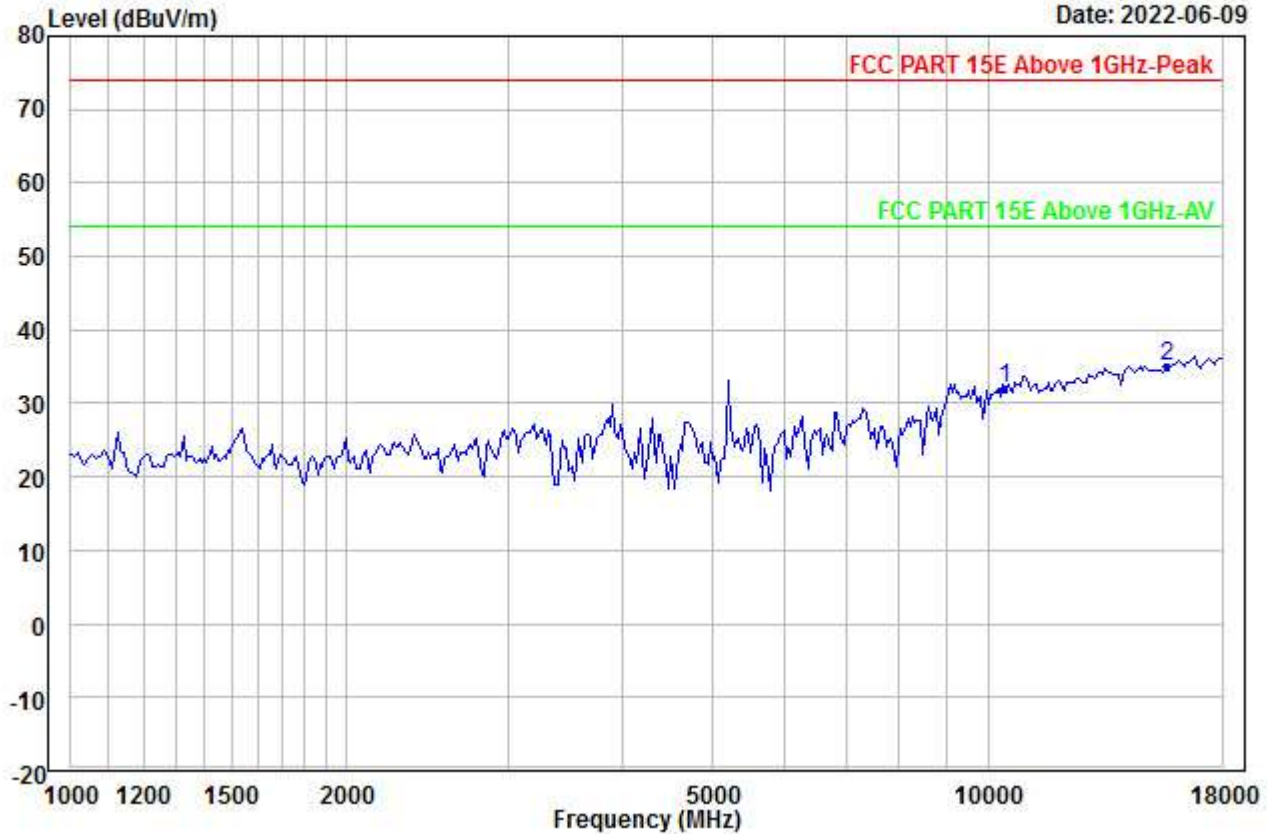


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5220
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	25.87	38.16	45.92	0.00	14.06	32.17	54.00	-21.83	---	---	Aver
2	PP15660.000	23.53	40.42	46.03	0.00	17.01	34.93	54.00	-19.07	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00009.EMI

Date: 2022-06-09

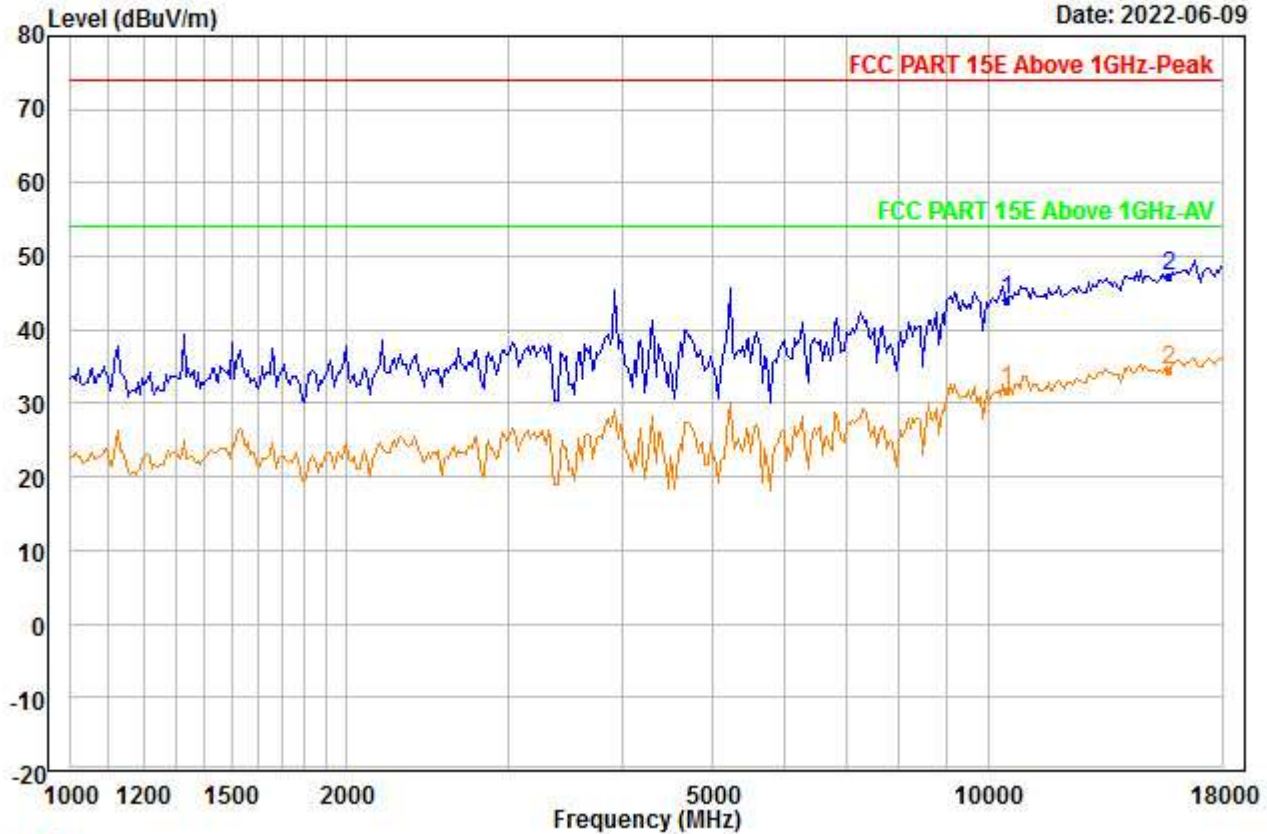


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5240
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	37.67	38.19	45.91	0.00	14.05	44.00	74.00	-30.00	---	---	Peak
2	PP15720.000	35.73	40.51	46.08	0.00	17.05	47.21	74.00	-26.79	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00010.EMI

Date: 2022-06-09

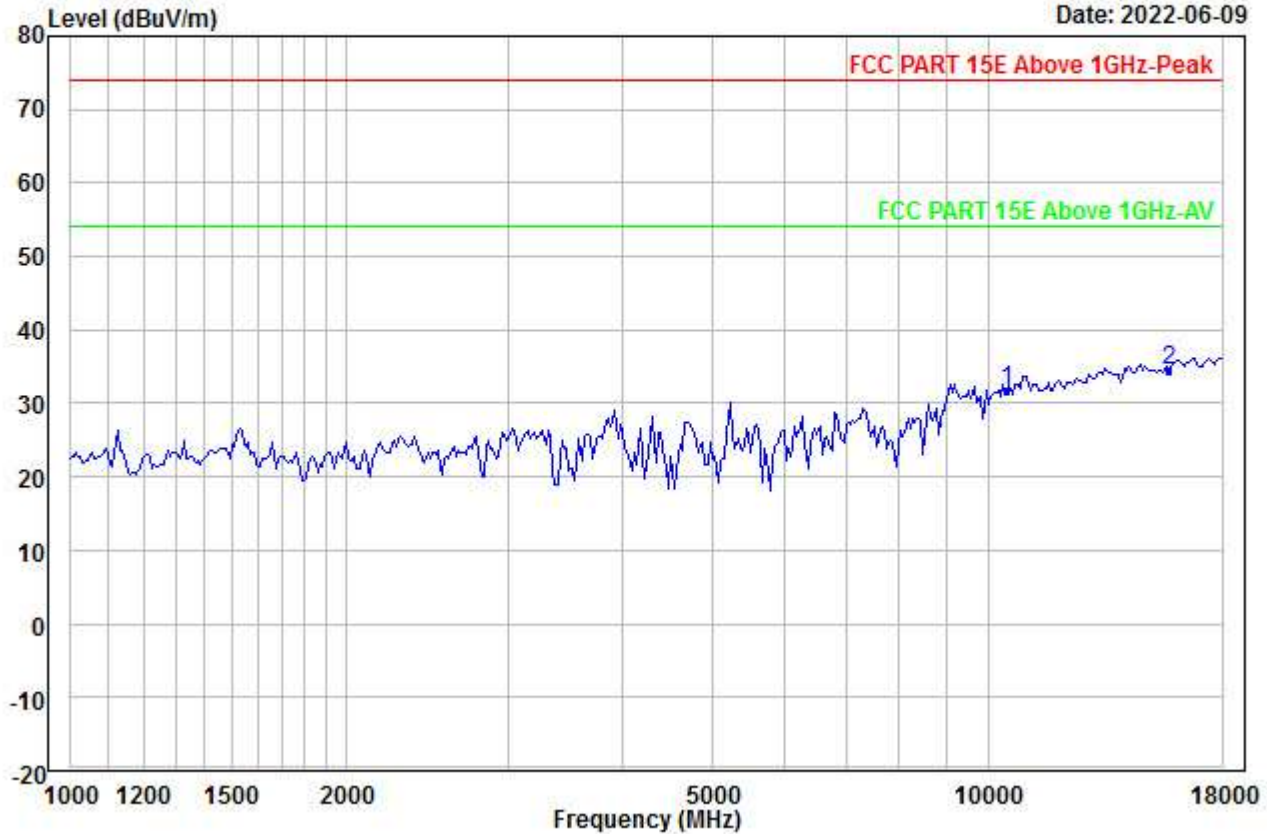


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5240
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	25.44	38.19	45.91	0.00	14.05	31.77	54.00	-22.23	---	---	Aver
2	PP15720.000	23.07	40.51	46.08	0.00	17.05	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00011.EMI

Date: 2022-06-09

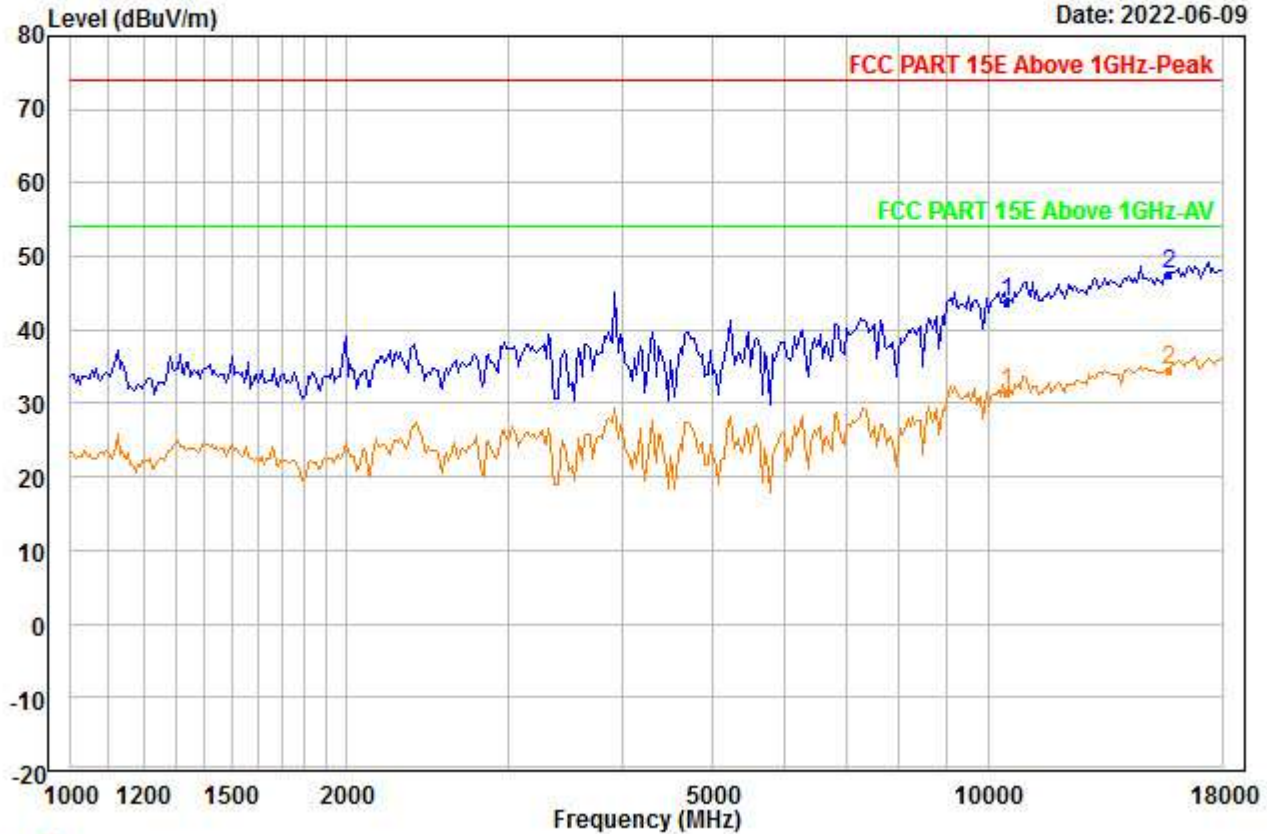


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5240
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	37.54	38.19	45.91	0.00	14.05	43.87	74.00	-30.13	---	---	Peak
2	PP15720.000	36.21	40.51	46.08	0.00	17.05	47.69	74.00	-26.31	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00012.EMI

Date: 2022-06-09

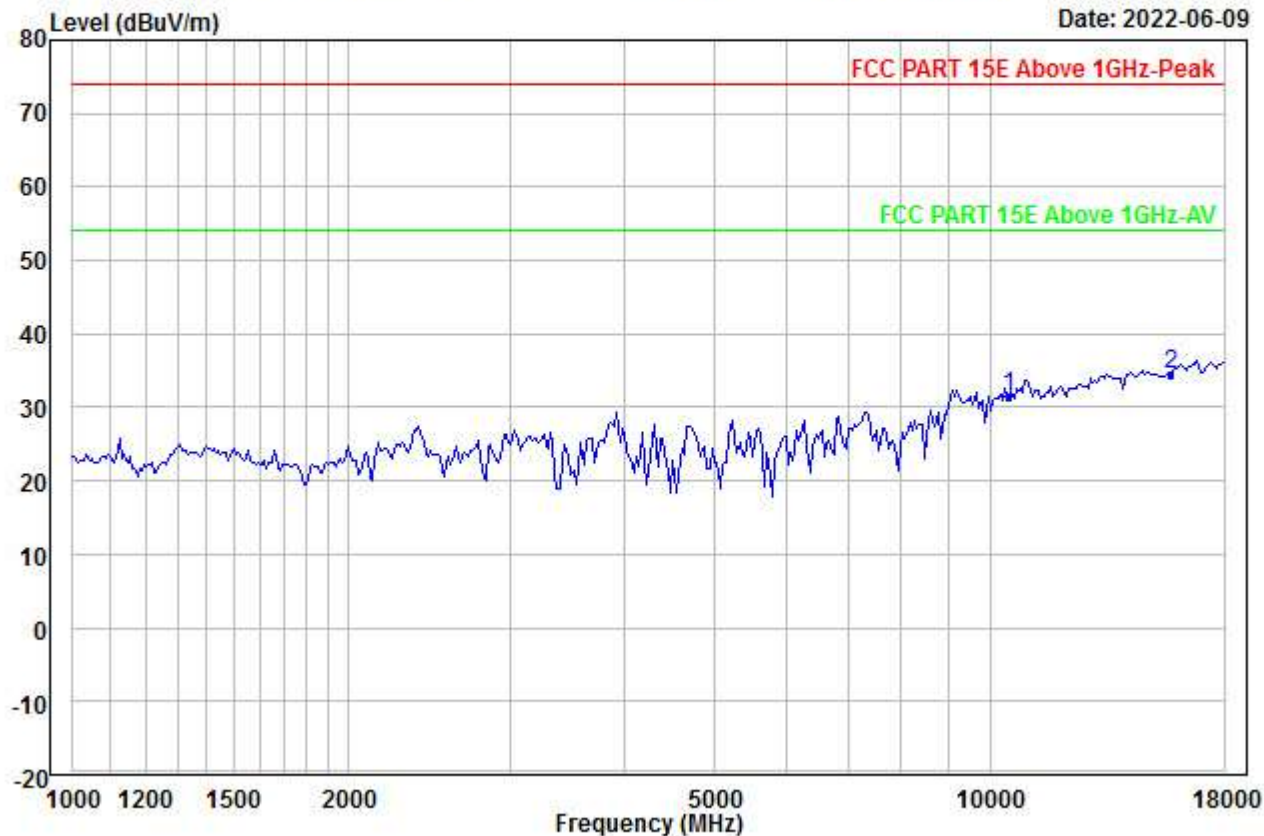


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5240
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	25.13	38.19	45.91	0.00	14.05	31.46	54.00	-22.54	---	---	Aver
2	PP15720.000	23.07	40.51	46.08	0.00	17.05	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00013.EMI

Date: 2022-06-09

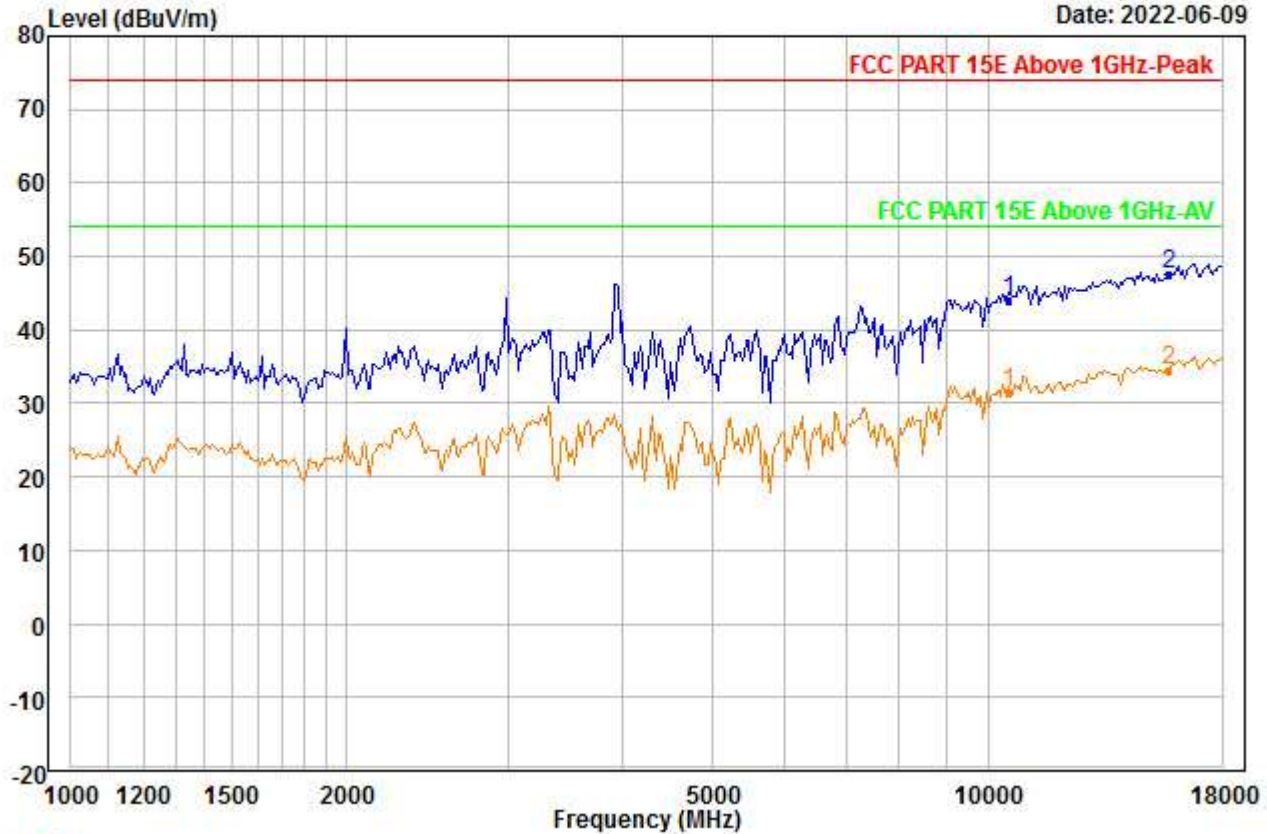


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5260
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	37.54	38.21	45.86	0.00	14.04	43.93	74.00	-30.07	---	---	Peak
2	PP15780.000	35.88	40.59	46.12	0.00	17.09	47.44	74.00	-26.56	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00014.EMI

Date: 2022-06-09

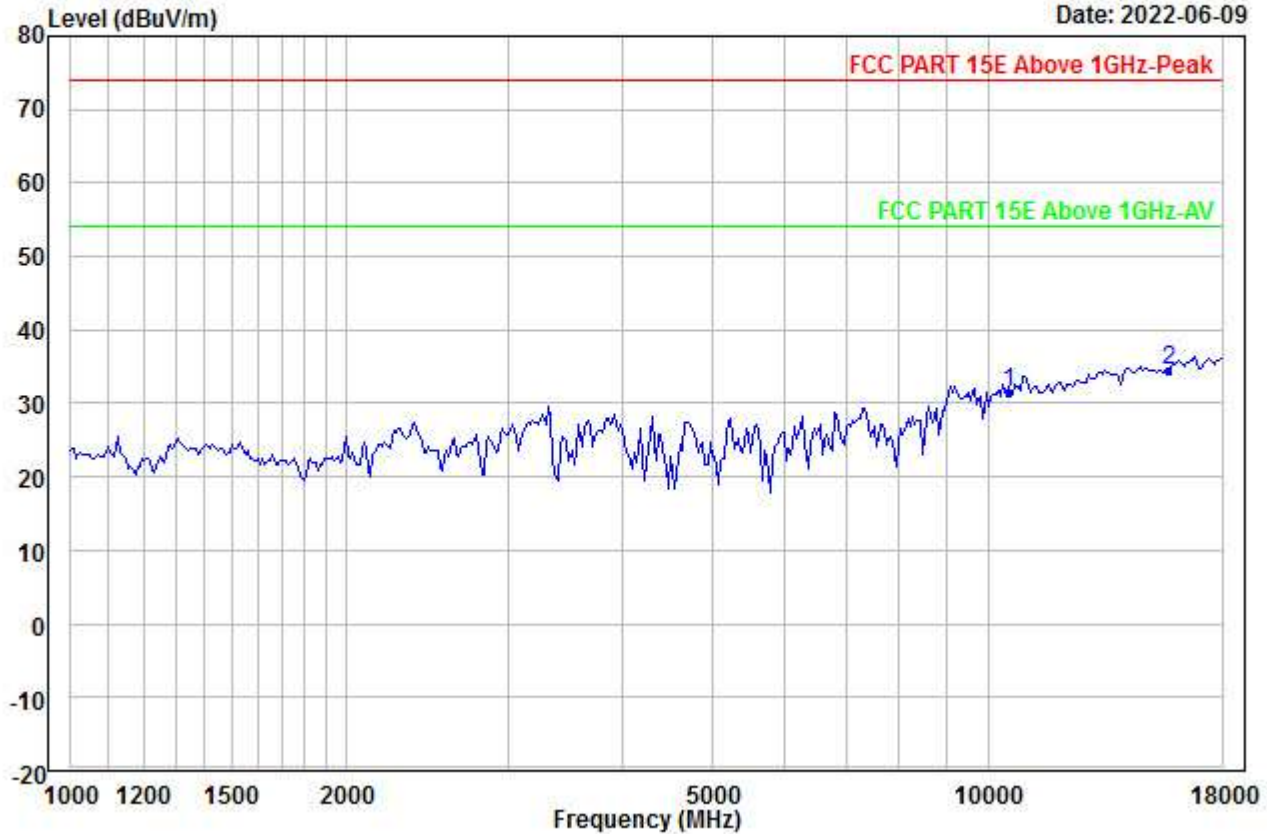


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	25.15	38.21	45.86	0.00	14.04	31.54	54.00	-22.46	---	---	Aver
2	PP15780.000	22.99	40.59	46.12	0.00	17.09	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00015.EMI

Date: 2022-06-09

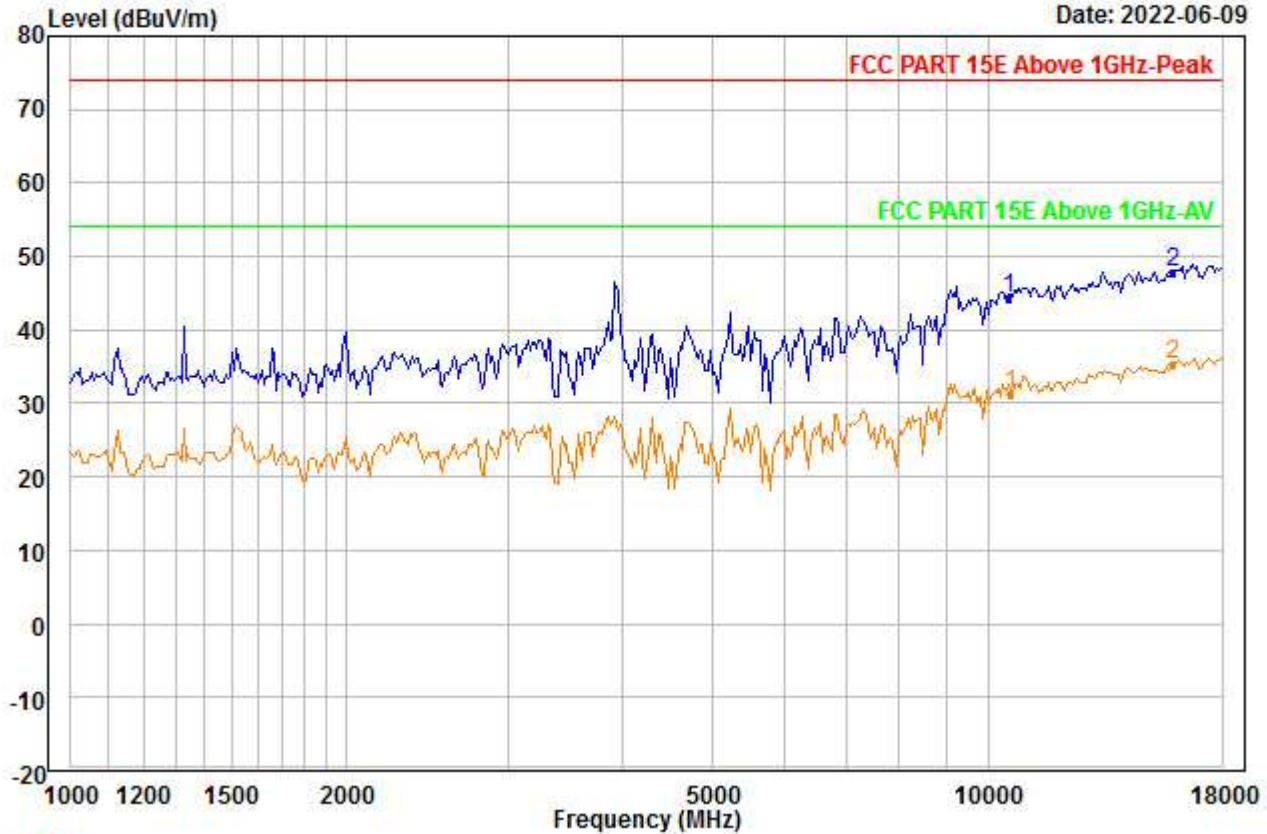


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5260
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	38.00	38.21	45.86	0.00	14.04	44.39	74.00	-29.61	---	---	Peak
2	PP15900.000	36.25	40.76	46.22	0.00	17.17	47.96	74.00	-26.04	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00016.EMI

Date: 2022-06-09

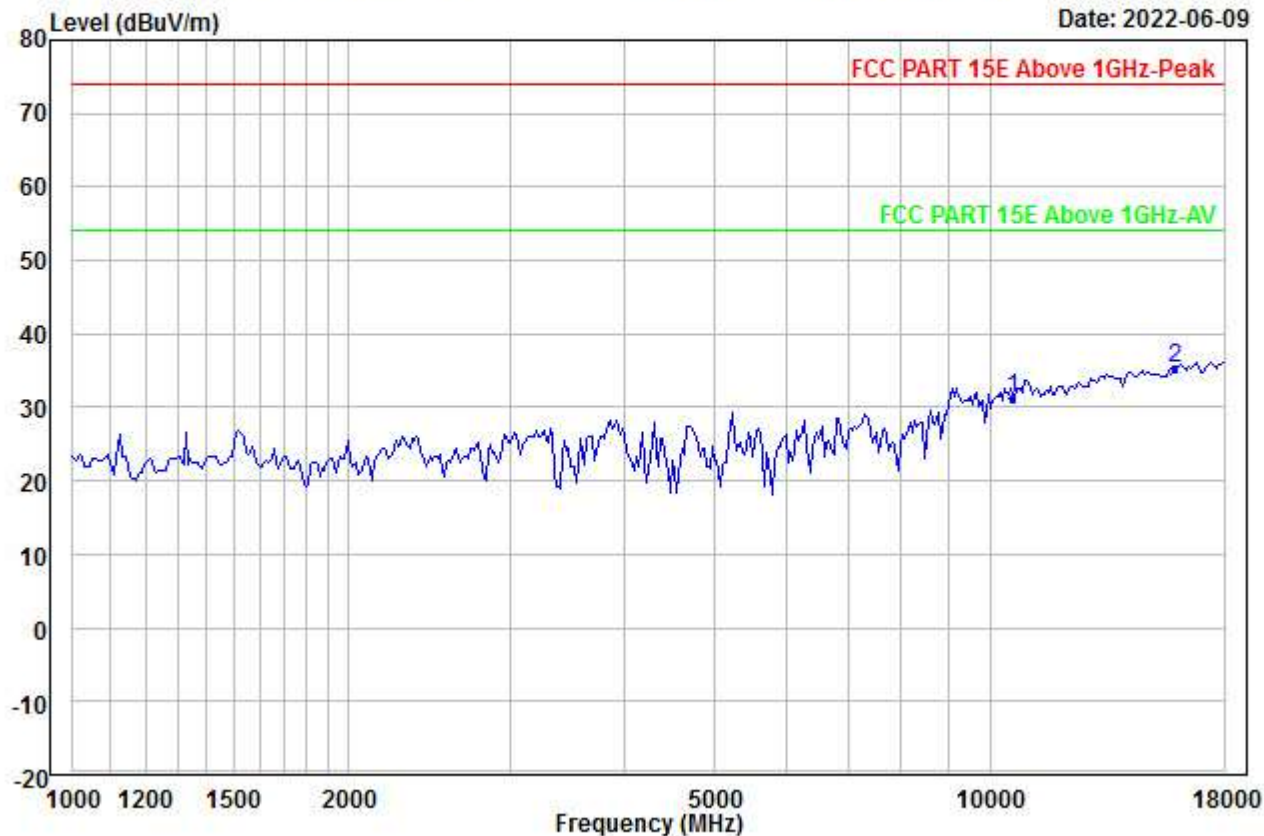


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	24.75	38.26	45.72	0.00	14.02	31.31	54.00	-22.69	---	---	Aver
2	PP15900.000	23.56	40.76	46.22	0.00	17.17	35.27	54.00	-18.73	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00017.EMI

Date: 2022-06-09

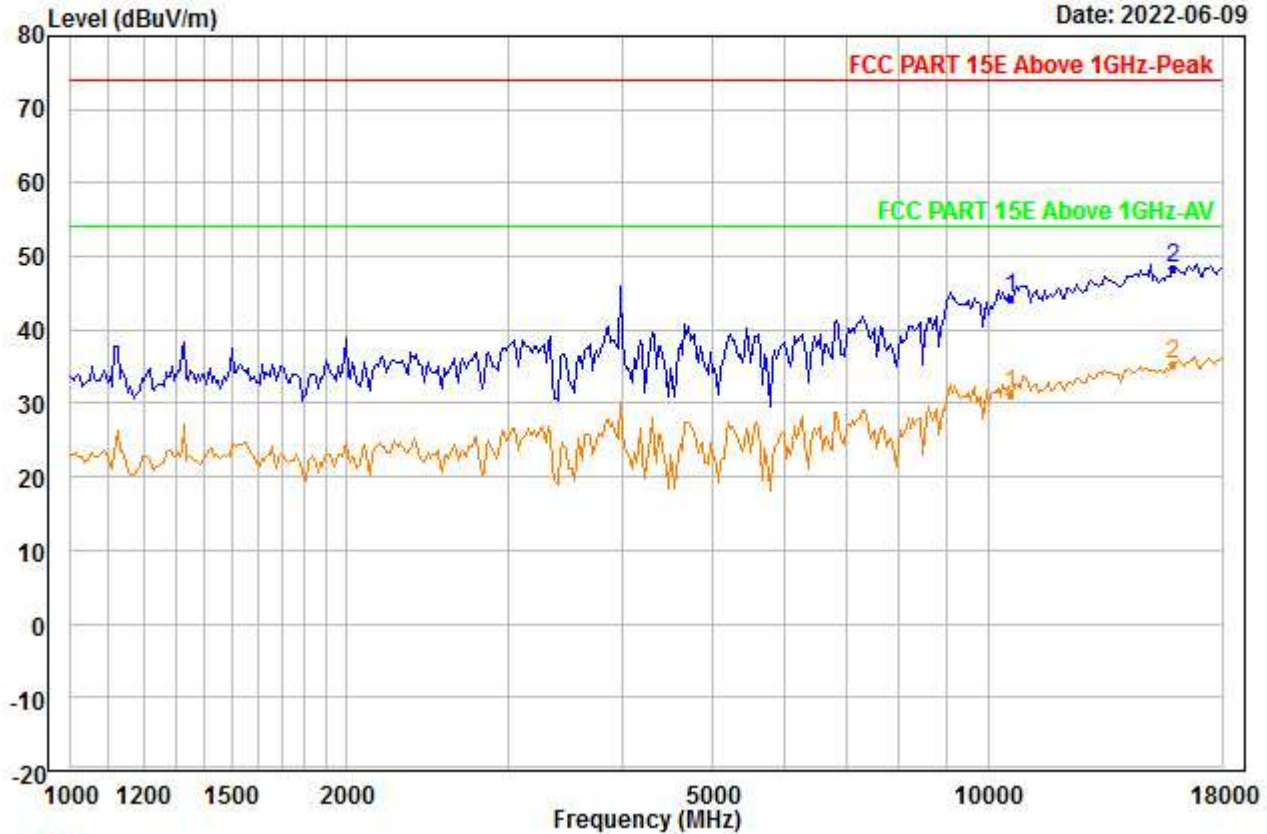


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5300
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	37.61	38.26	45.72	0.00	14.02	44.17	74.00	-29.83	---	---	Peak
2	PP15900.000	36.82	40.76	46.22	0.00	17.17	48.53	74.00	-25.47	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00018.EMI

Date: 2022-06-09

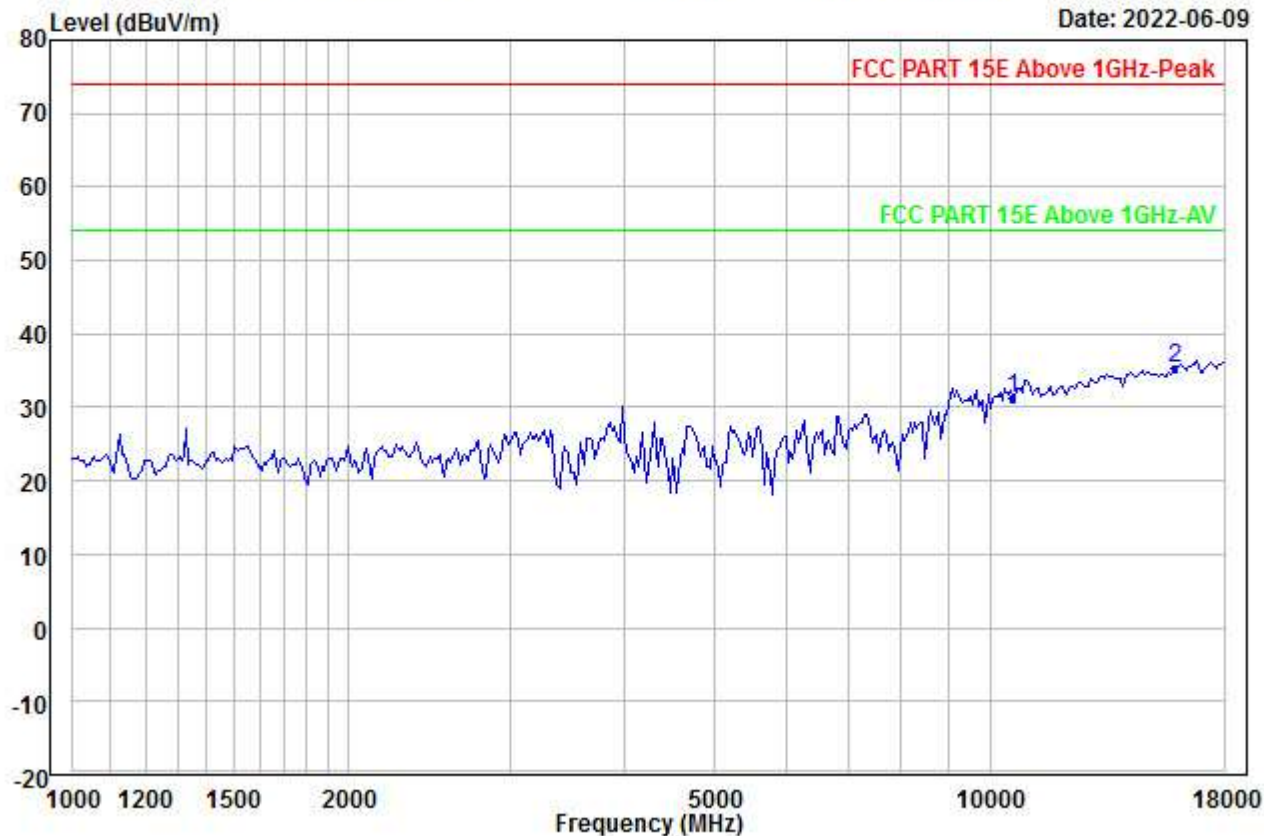


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5300
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	24.75	38.26	45.72	0.00	14.02	31.31	54.00	-22.69	---	---	Aver
2	PP15900.000	23.56	40.76	46.22	0.00	17.17	35.27	54.00	-18.73	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00019.EMI

Date: 2022-06-09

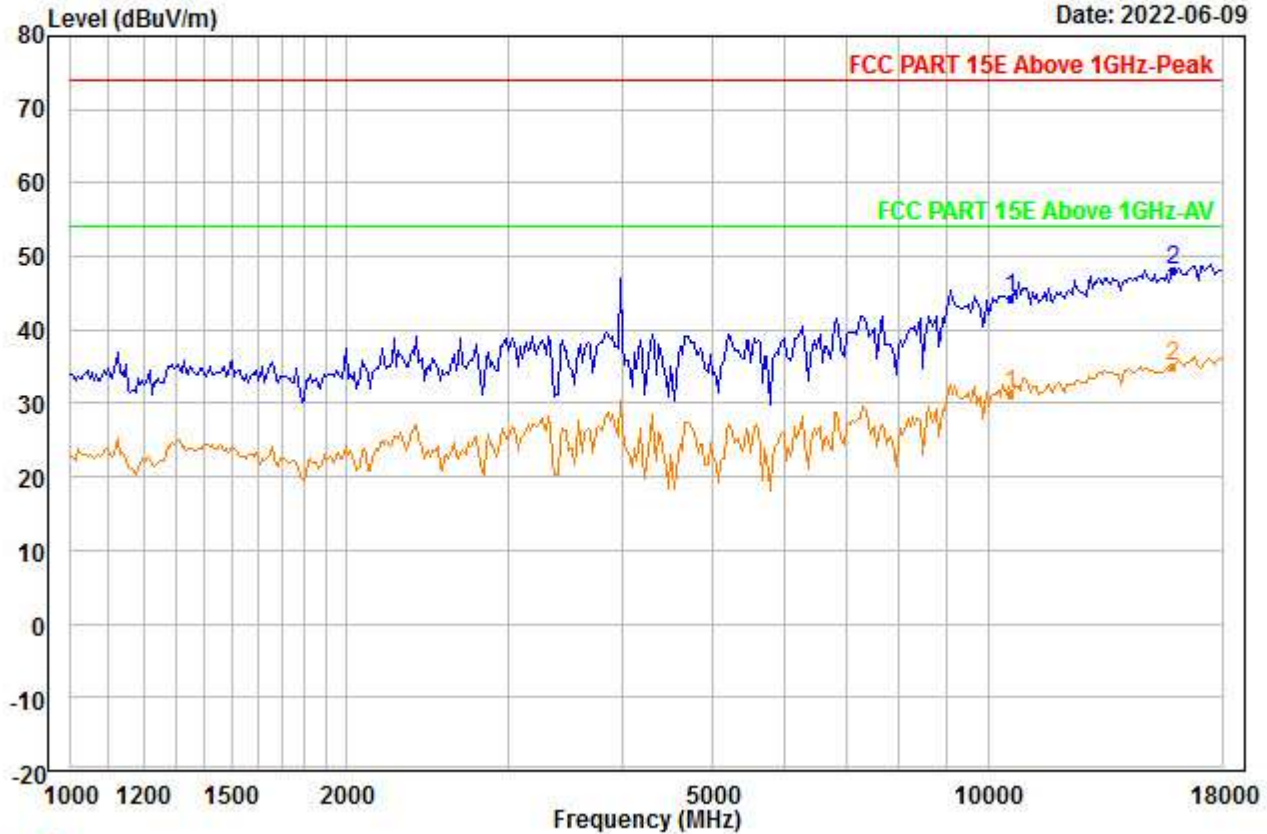


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5300
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	37.74	38.26	45.72	0.00	14.02	44.30	74.00	-29.70	---	---	Peak
2	PP15900.000	36.52	40.76	46.22	0.00	17.17	48.23	74.00	-25.77	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00020.EMI

Date: 2022-06-09

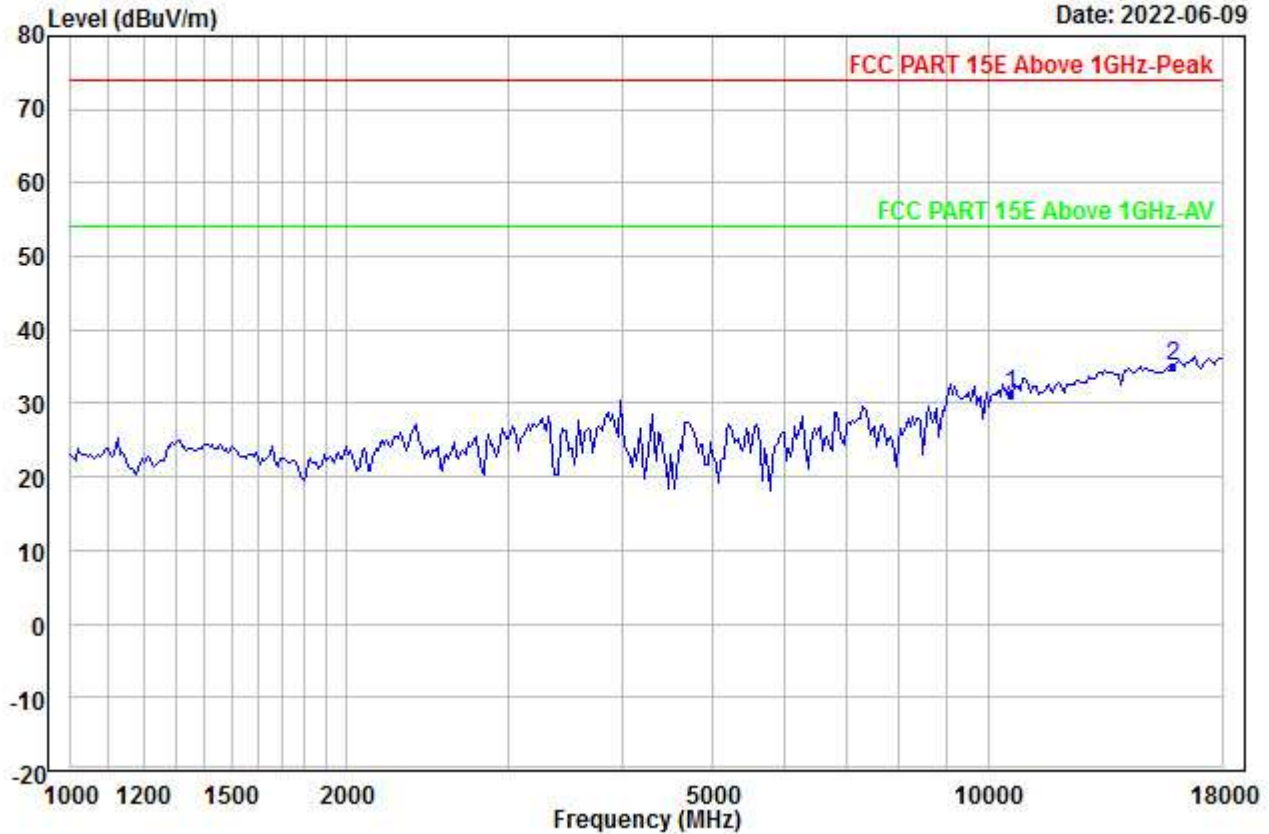


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5300
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	24.58	38.26	45.72	0.00	14.02	31.14	54.00	-22.86	---	---	Aver
2	PP15900.000	23.47	40.76	46.22	0.00	17.17	35.18	54.00	-18.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00021.EMI

Date: 2022-06-09

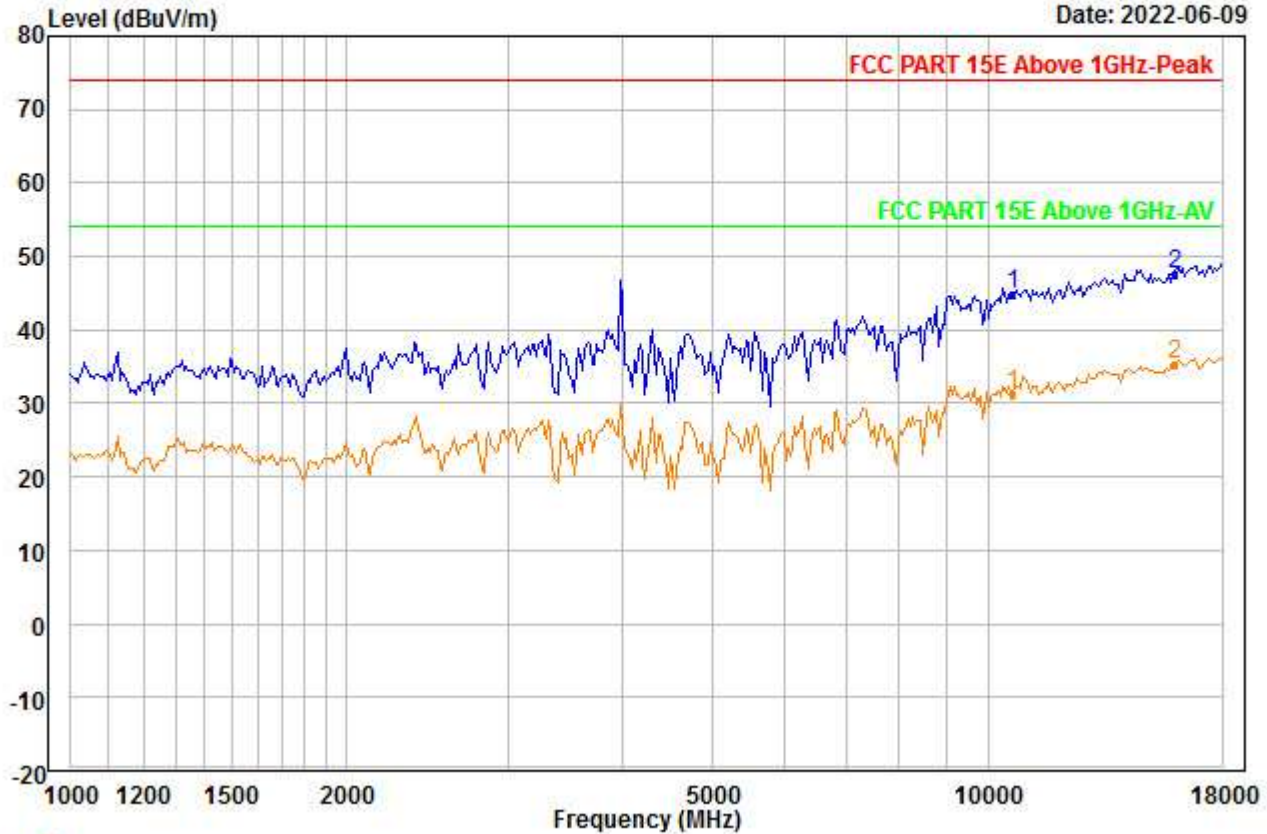


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5320
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	38.28	38.28	45.65	0.00	14.01	44.92	74.00	-29.08	---	---	Peak
2	PP15960.000	35.78	40.84	46.27	0.00	17.20	47.55	74.00	-26.45	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00022.EMI

Date: 2022-06-09

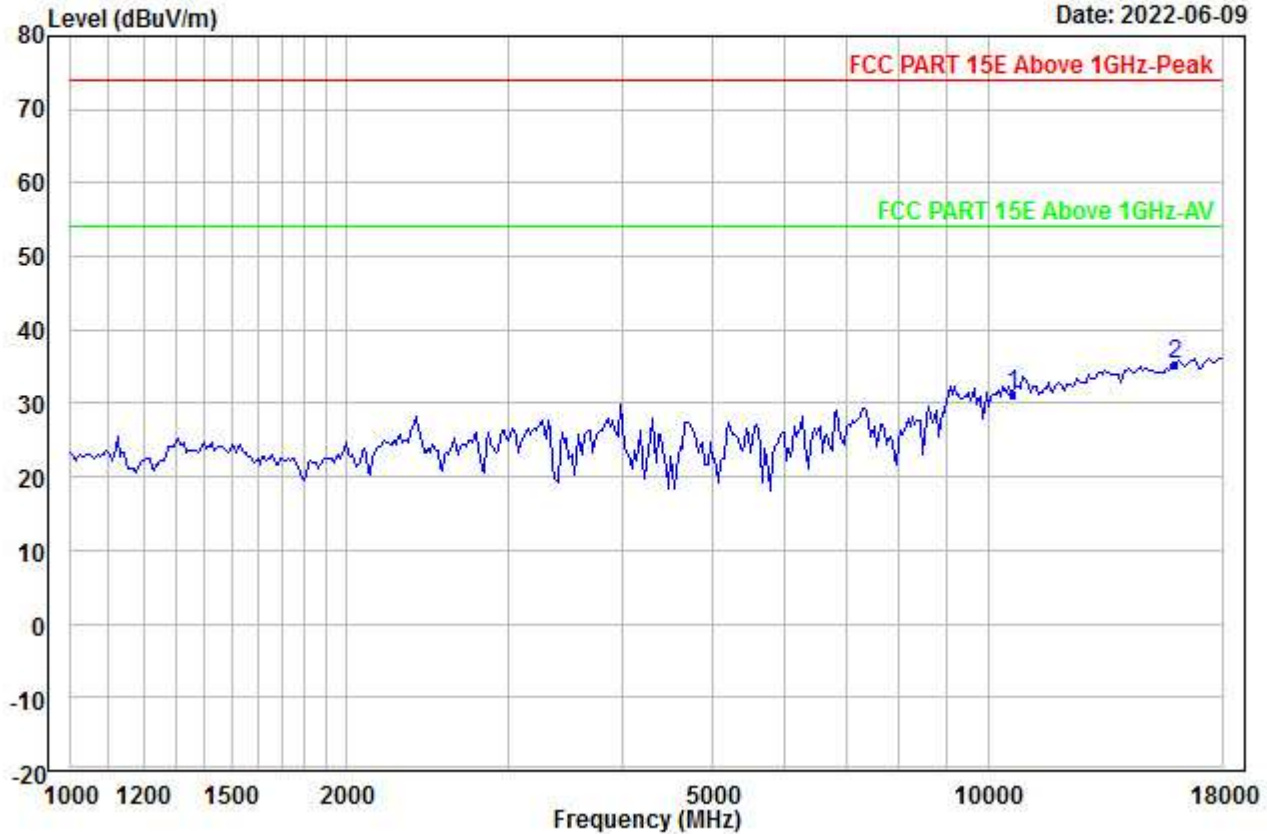


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5320
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.50	38.28	45.65	0.00	14.01	31.14	54.00	-22.86	---	---	Aver
2	PP15960.000	23.50	40.84	46.27	0.00	17.20	35.27	54.00	-18.73	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00023.EMI

Date: 2022-06-09

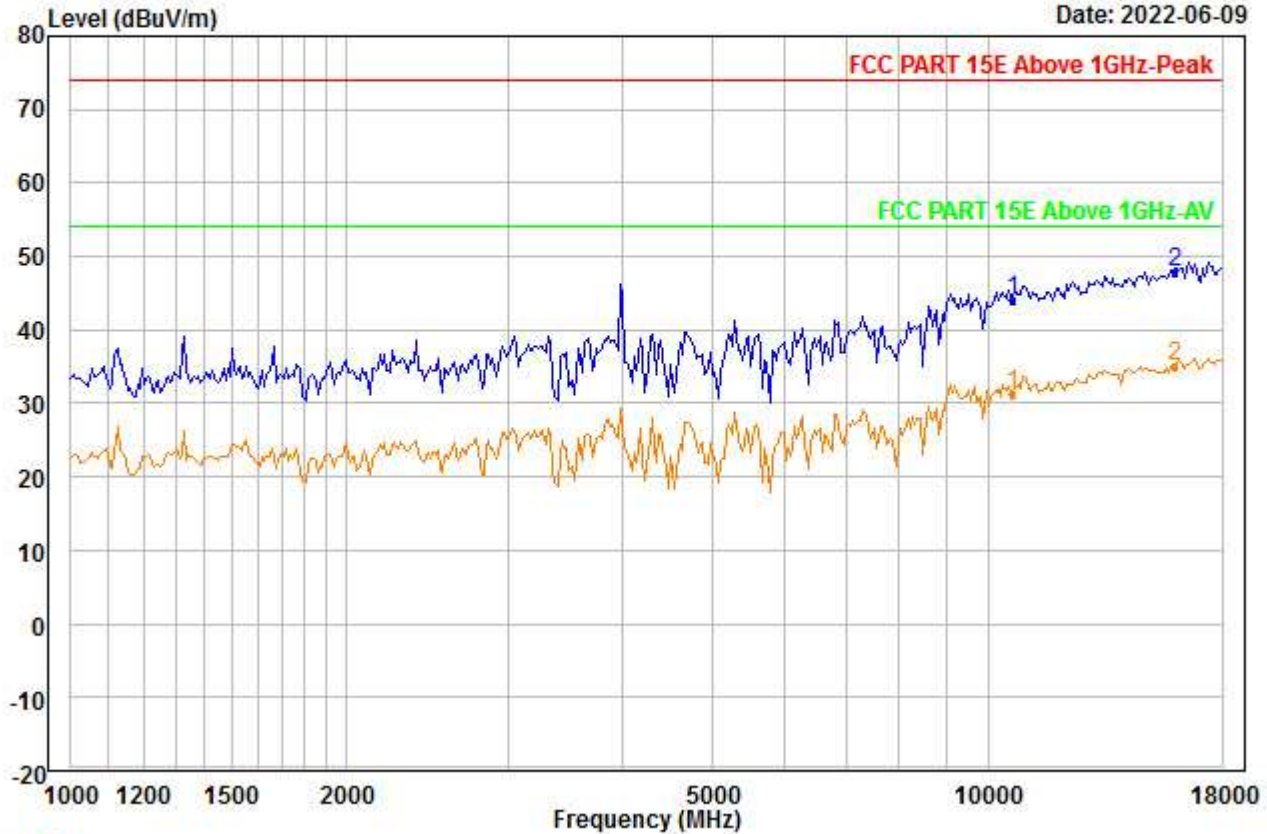


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5320
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	37.38	38.28	45.65	0.00	14.01	44.02	74.00	-29.98	---	---	Peak
2	PP15960.000	35.95	40.84	46.27	0.00	17.20	47.72	74.00	-26.28	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00024.EMI

Date: 2022-06-09

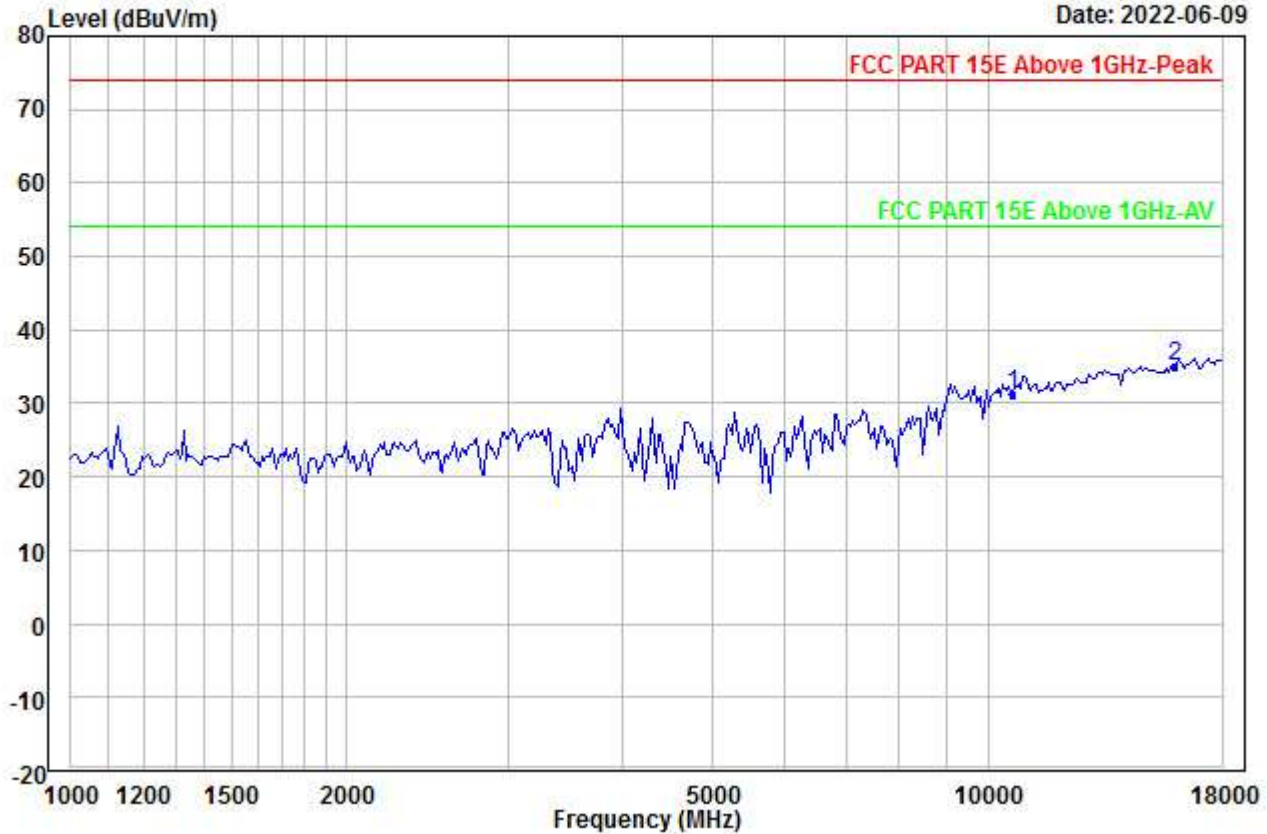


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5320
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.58	38.28	45.65	0.00	14.01	31.22	54.00	-22.78	---	---	Aver
2	PP15960.000	23.41	40.84	46.27	0.00	17.20	35.18	54.00	-18.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00025.EMI

Date: 2022-06-09

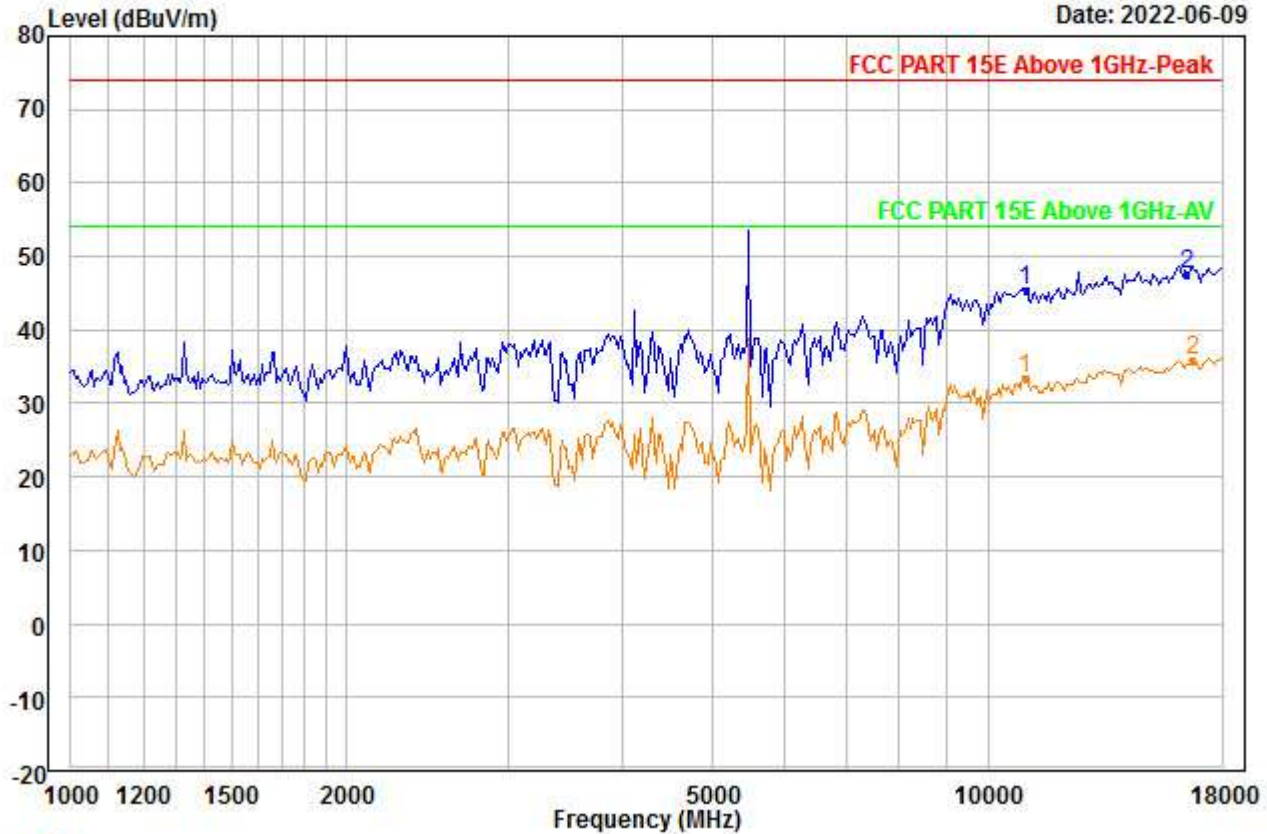


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5500
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	38.00	38.50	45.00	0.00	13.92	45.42	74.00	-28.58	---	---	Peak
2	PP16500.000	35.25	41.50	46.60	0.00	17.45	47.60	74.00	-26.40	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00026.EMI

Date: 2022-06-09

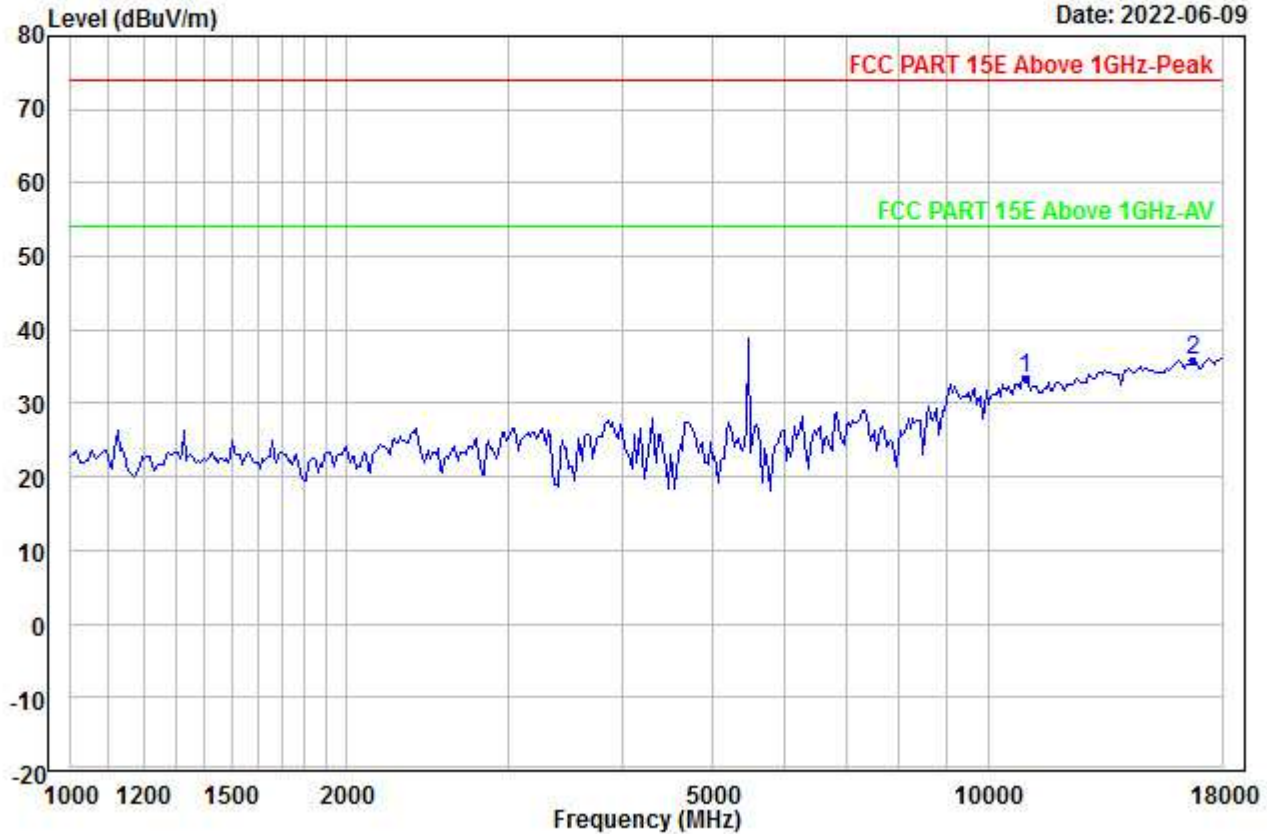


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	25.94	38.50	45.00	0.00	13.92	33.36	54.00	-20.64	---	---	Aver
2	PP16740.000	23.20	41.88	46.89	0.00	17.56	35.75	54.00	-18.25	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00027.EMI

Date: 2022-06-09

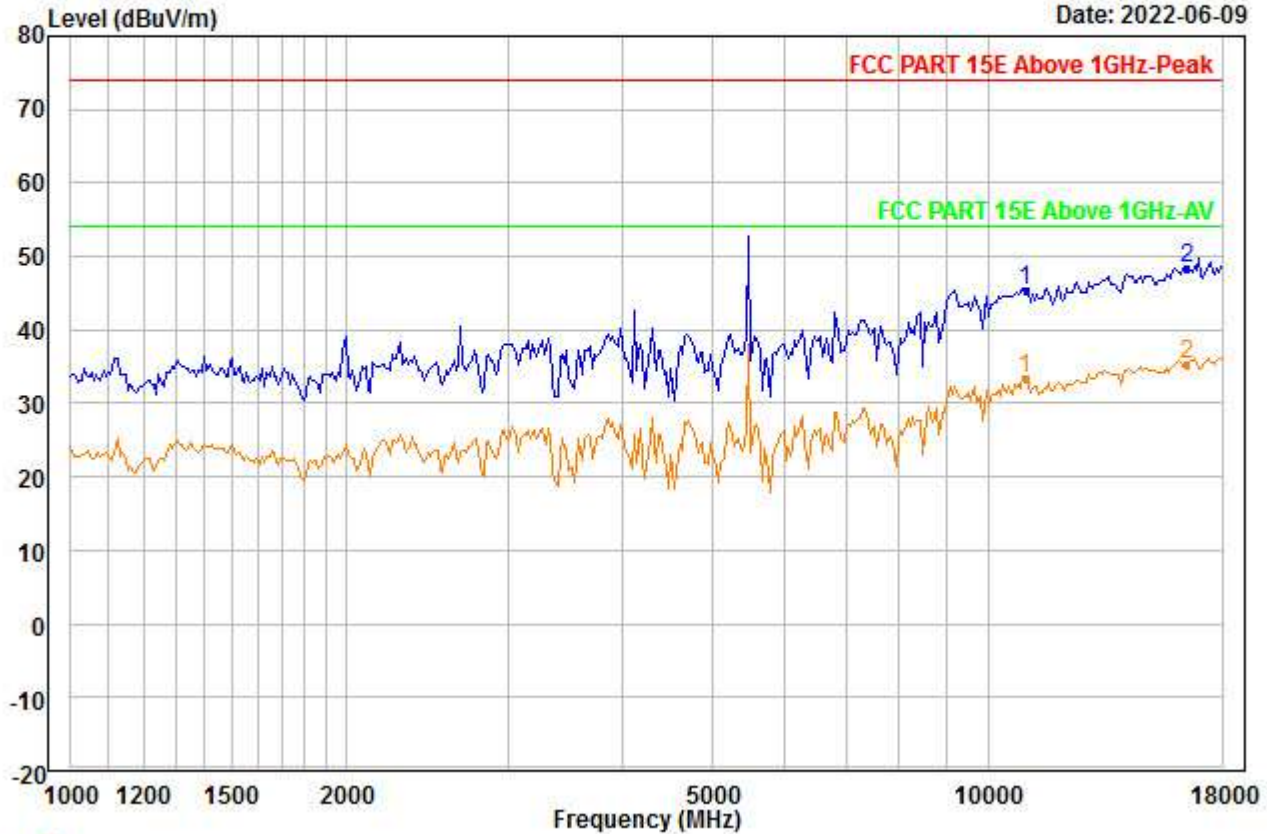


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5500
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	37.99	38.50	45.00	0.00	13.92	45.41	74.00	-28.59	---	---	Peak
2	PP16500.000	35.92	41.50	46.60	0.00	17.45	48.27	74.00	-25.73	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00028.EMI

Date: 2022-06-09

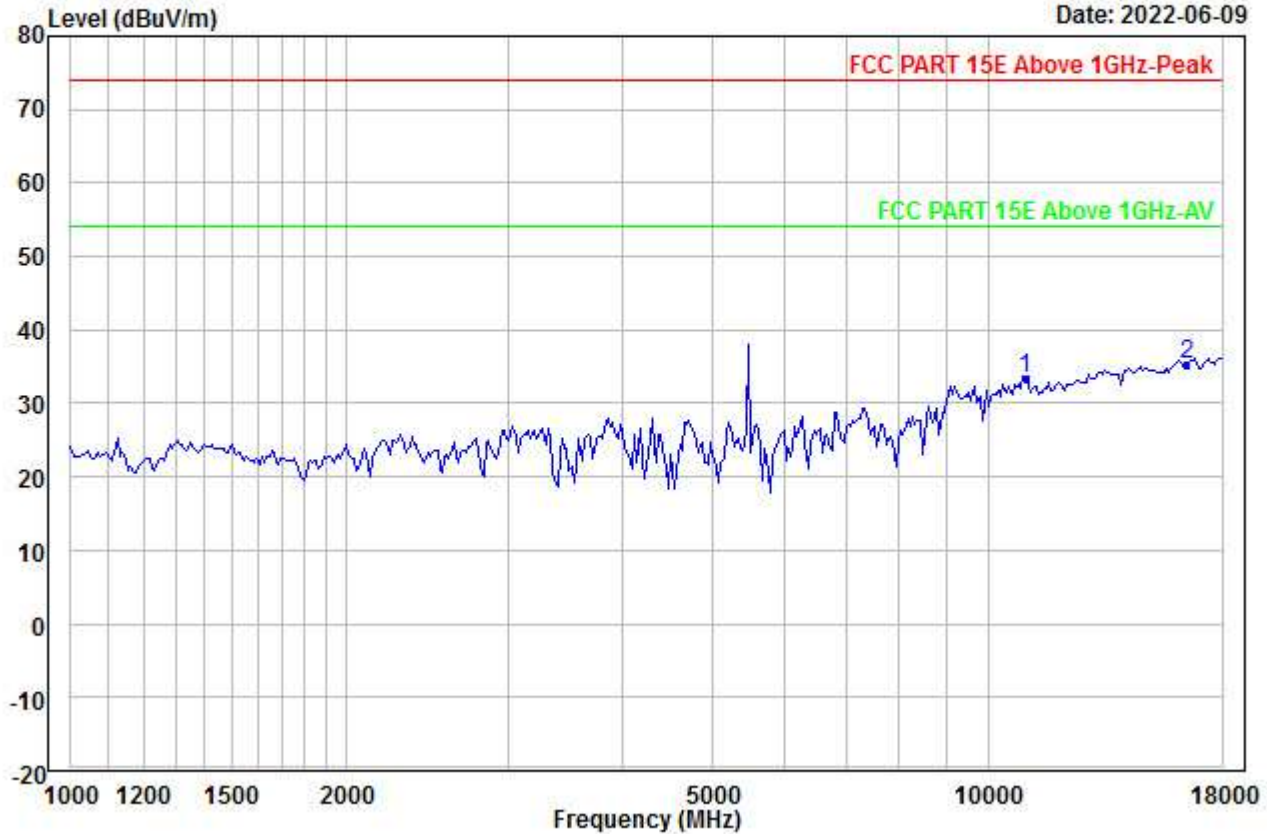


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	26.02	38.50	45.00	0.00	13.92	33.44	54.00	-20.56	---	---	Aver
2	PP16500.000	23.03	41.50	46.60	0.00	17.45	35.38	54.00	-18.62	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00029.EMI

Date: 2022-06-09

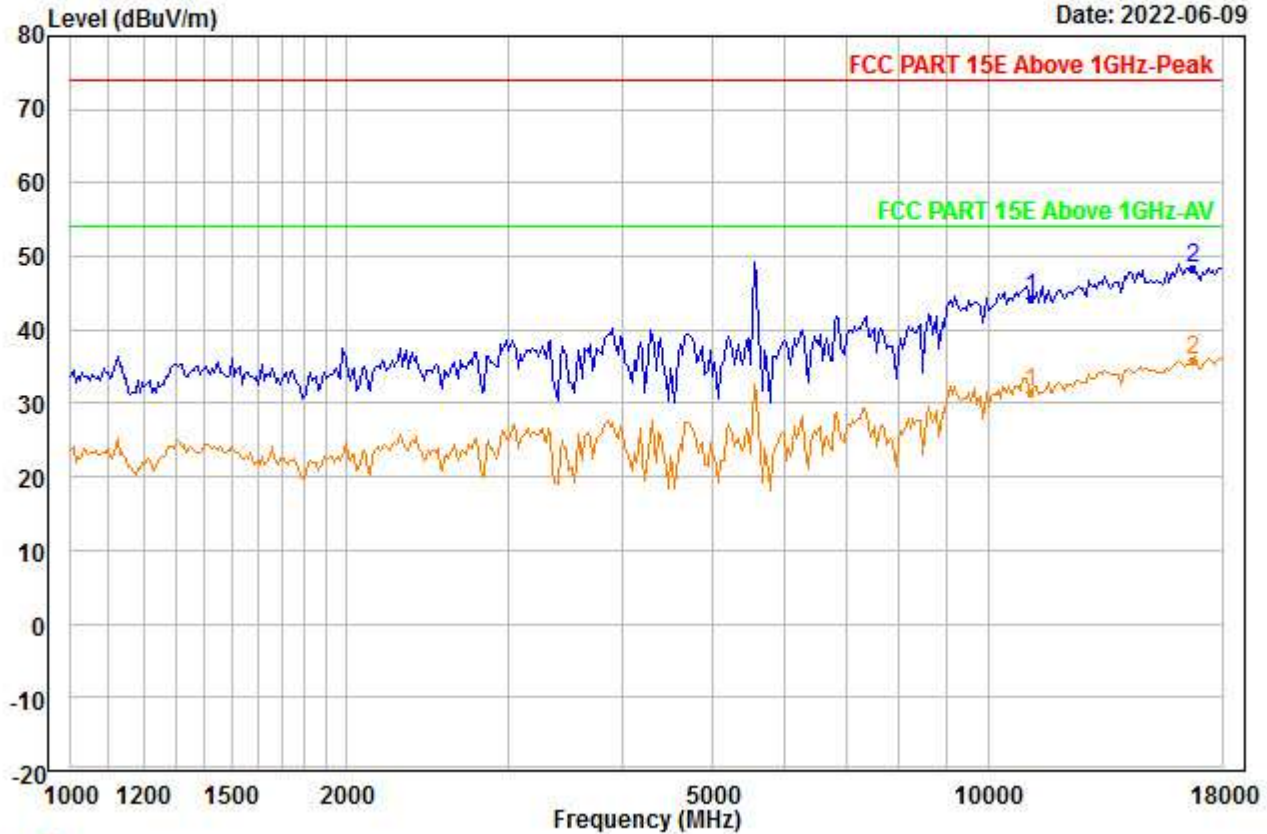


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5580
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	37.07	38.63	45.35	0.00	14.04	44.39	74.00	-29.61	---	---	Peak
2	PP16740.000	35.82	41.88	46.89	0.00	17.56	48.37	74.00	-25.63	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00030.EMI

Date: 2022-06-09

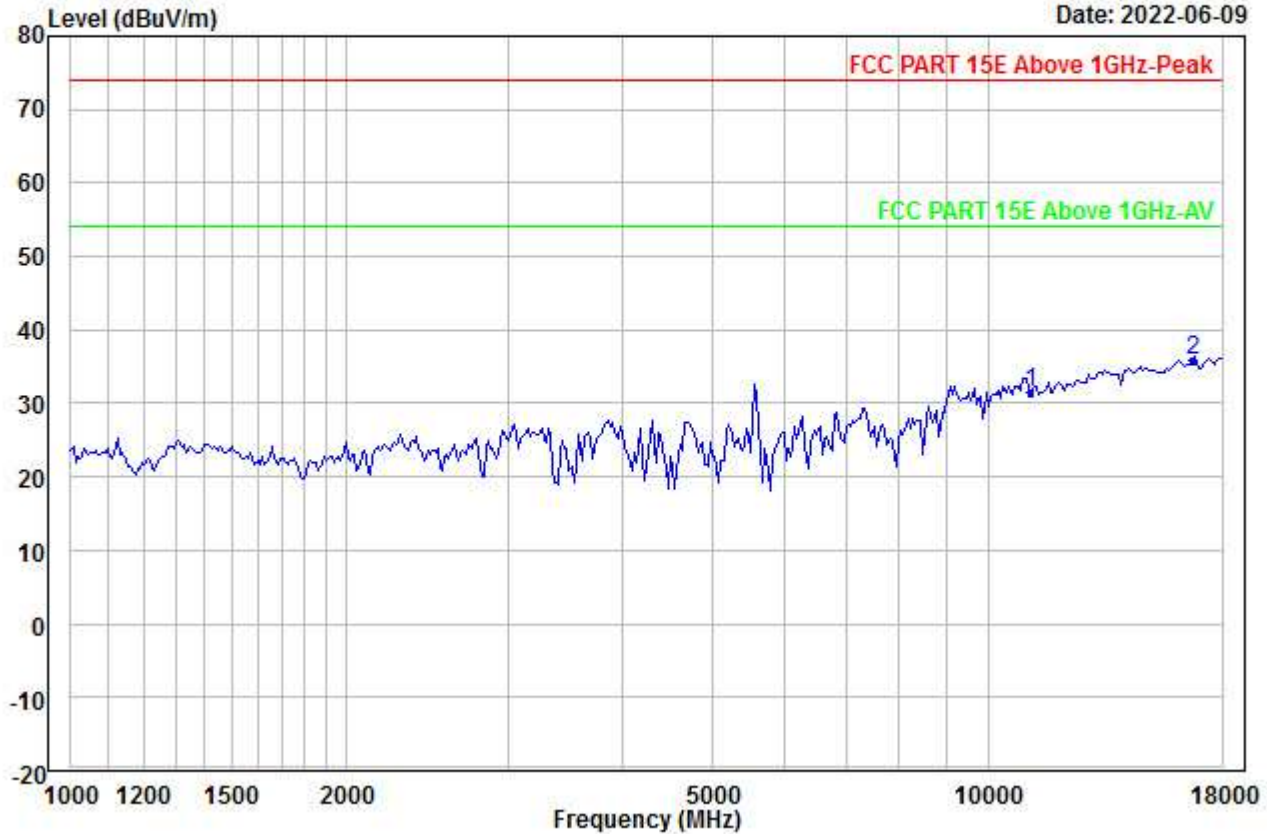


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5580
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	24.18	38.63	45.35	0.00	14.04	31.50	54.00	-22.50	---	---	Aver
2	PP16740.000	23.29	41.88	46.89	0.00	17.56	35.84	54.00	-18.16	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00031.EMI

Date: 2022-06-09

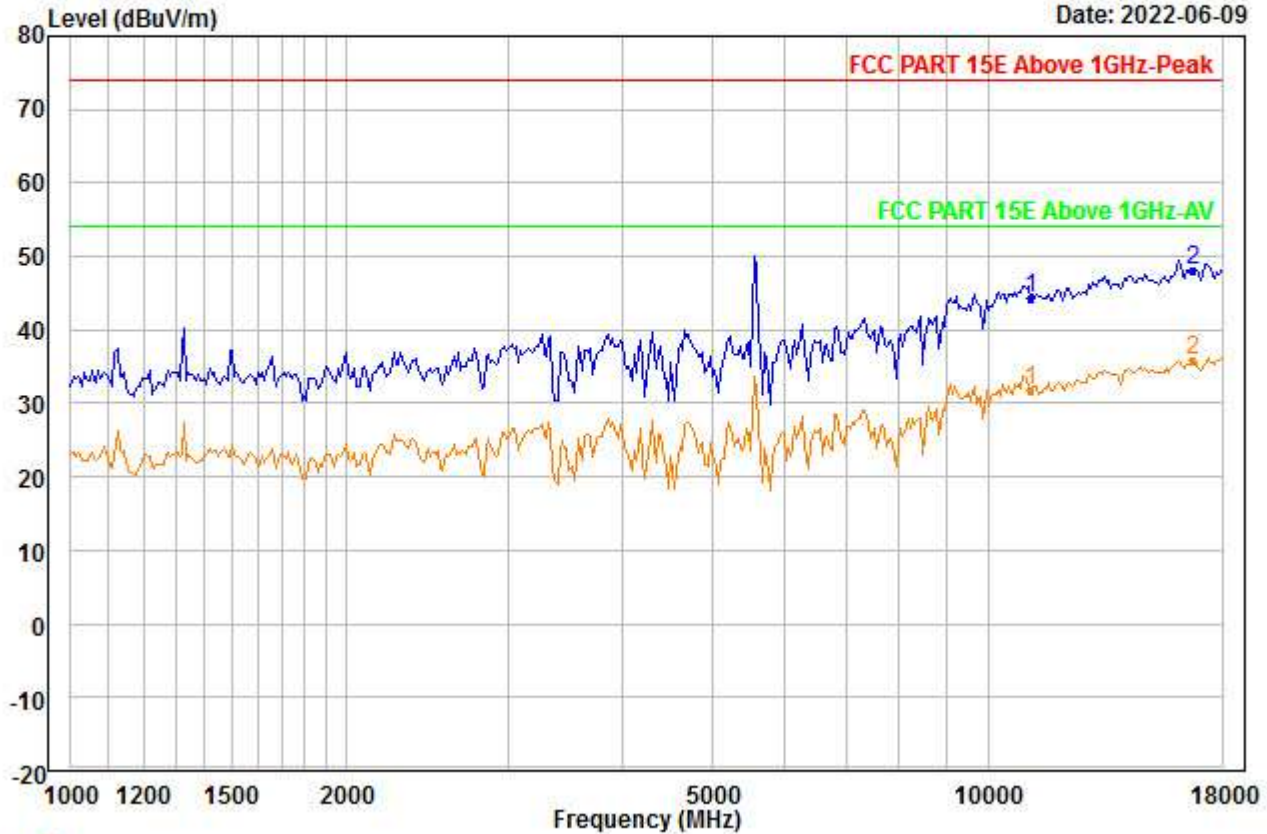


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5580
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	37.12	38.63	45.35	0.00	14.04	44.44	74.00	-29.56	---	---	Peak
2	PP16740.000	35.70	41.88	46.89	0.00	17.56	48.25	74.00	-25.75	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00032.EMI

Date: 2022-06-09

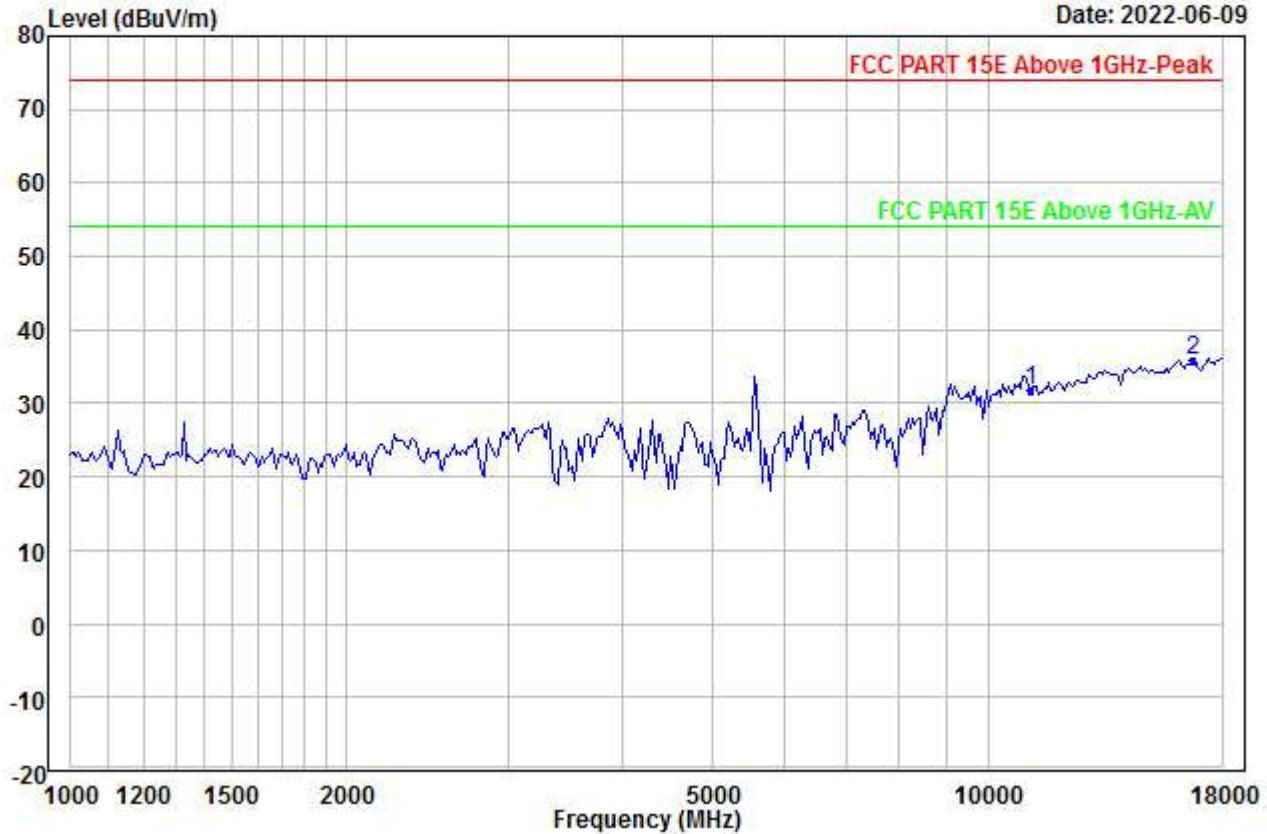


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5580
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	24.36	38.63	45.35	0.00	14.04	31.68	54.00	-22.32	---	---	Aver
2	PP16740.000	23.20	41.88	46.89	0.00	17.56	35.75	54.00	-18.25	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00033.EMI

Date: 2022-06-09

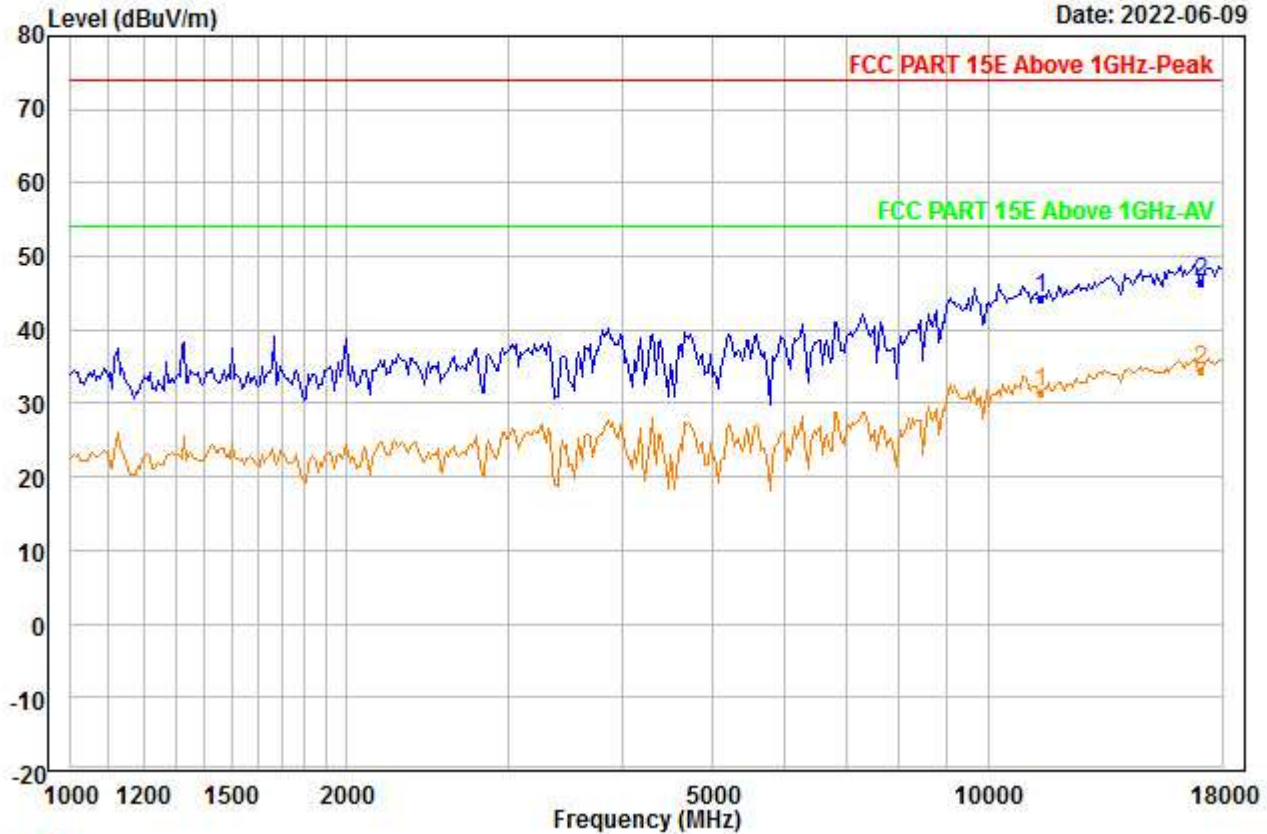


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5700
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	37.13	38.82	45.88	0.00	14.21	44.28	74.00	-29.72	---	---	Peak
2	PP17100.000	33.45	42.26	47.08	0.00	17.74	46.37	74.00	-27.63	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00034.EMI

Date: 2022-06-09

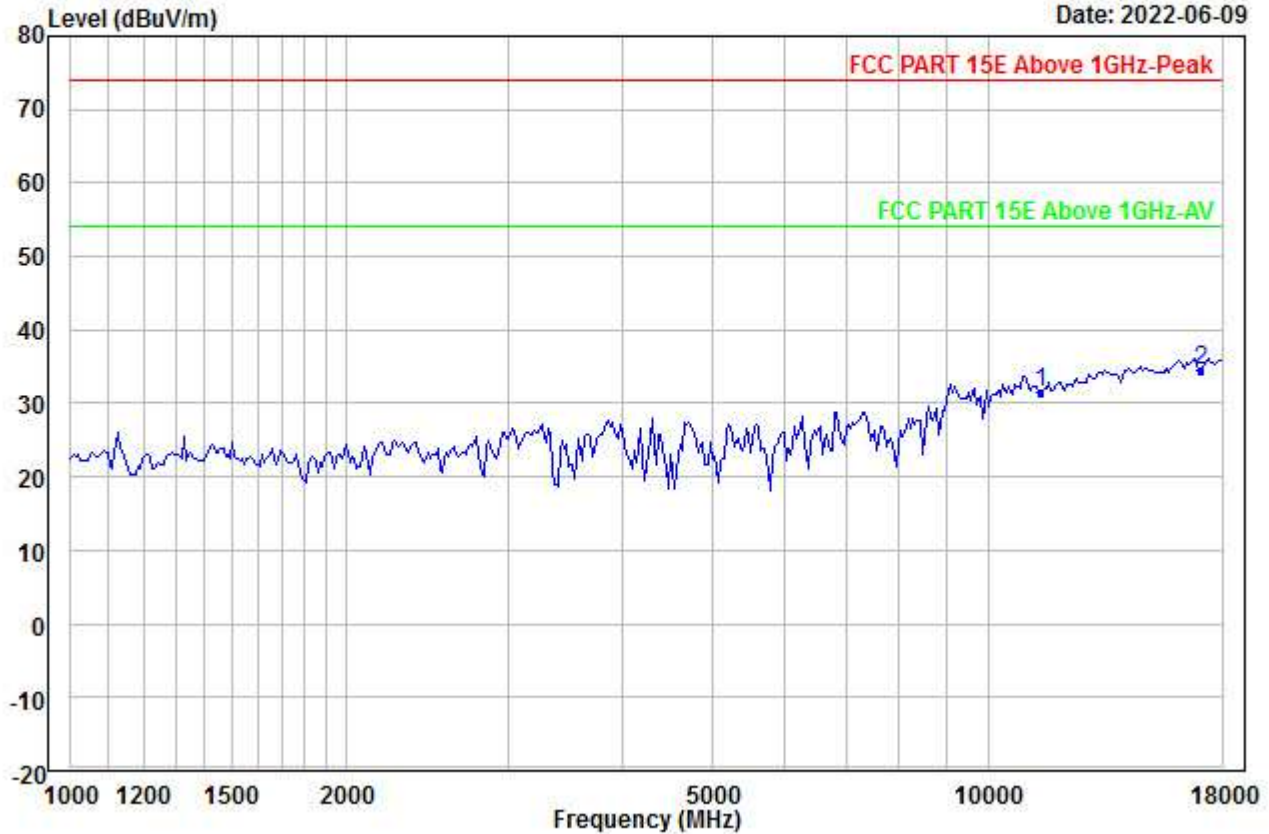


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5700
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.27	38.82	45.88	0.00	14.21	31.42	54.00	-22.58	---	---	Aver
2	PP17100.000	21.68	42.26	47.08	0.00	17.74	34.60	54.00	-19.40	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00035.EMI

Date: 2022-06-09

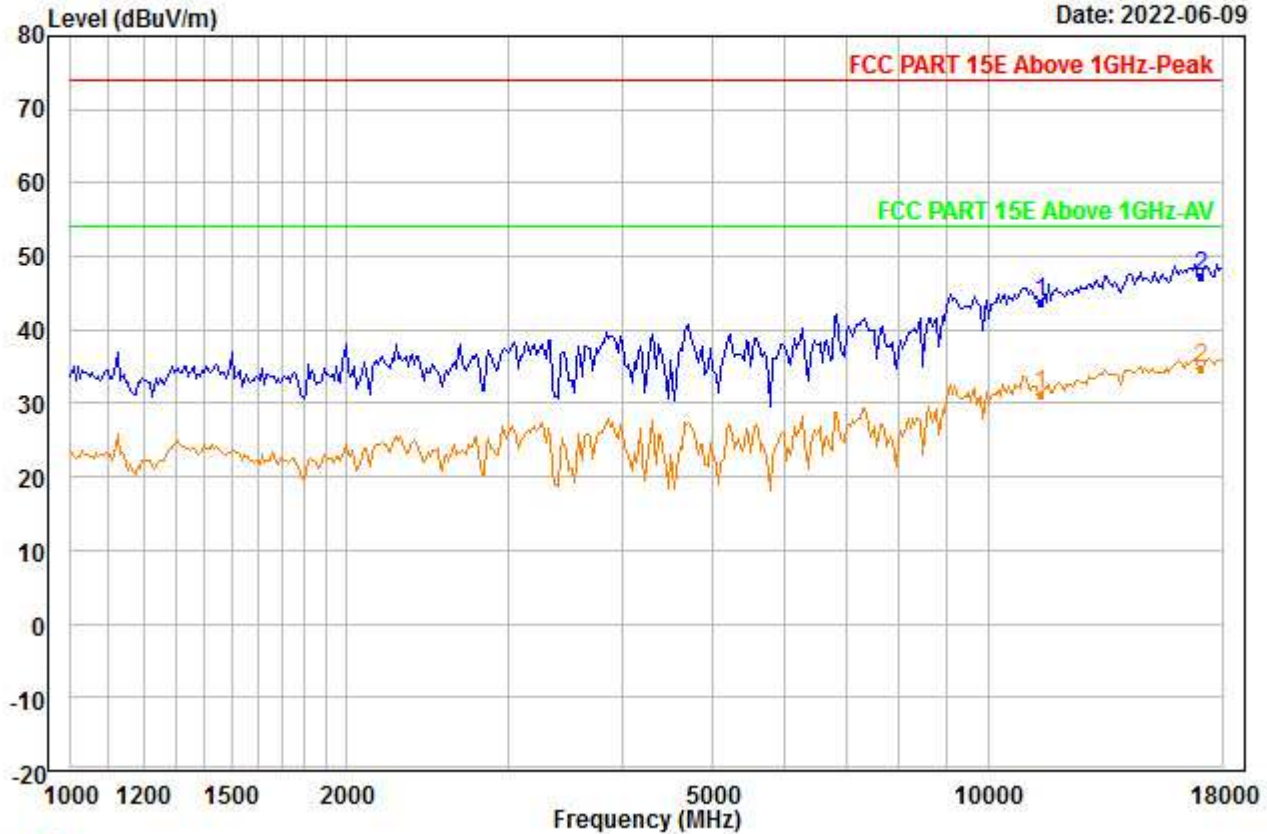


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5700
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	36.70	38.82	45.88	0.00	14.21	43.85	74.00	-30.15	---	---	Peak
2	PP17100.000	34.36	42.26	47.08	0.00	17.74	47.28	74.00	-26.72	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00036.EMI

Date: 2022-06-09

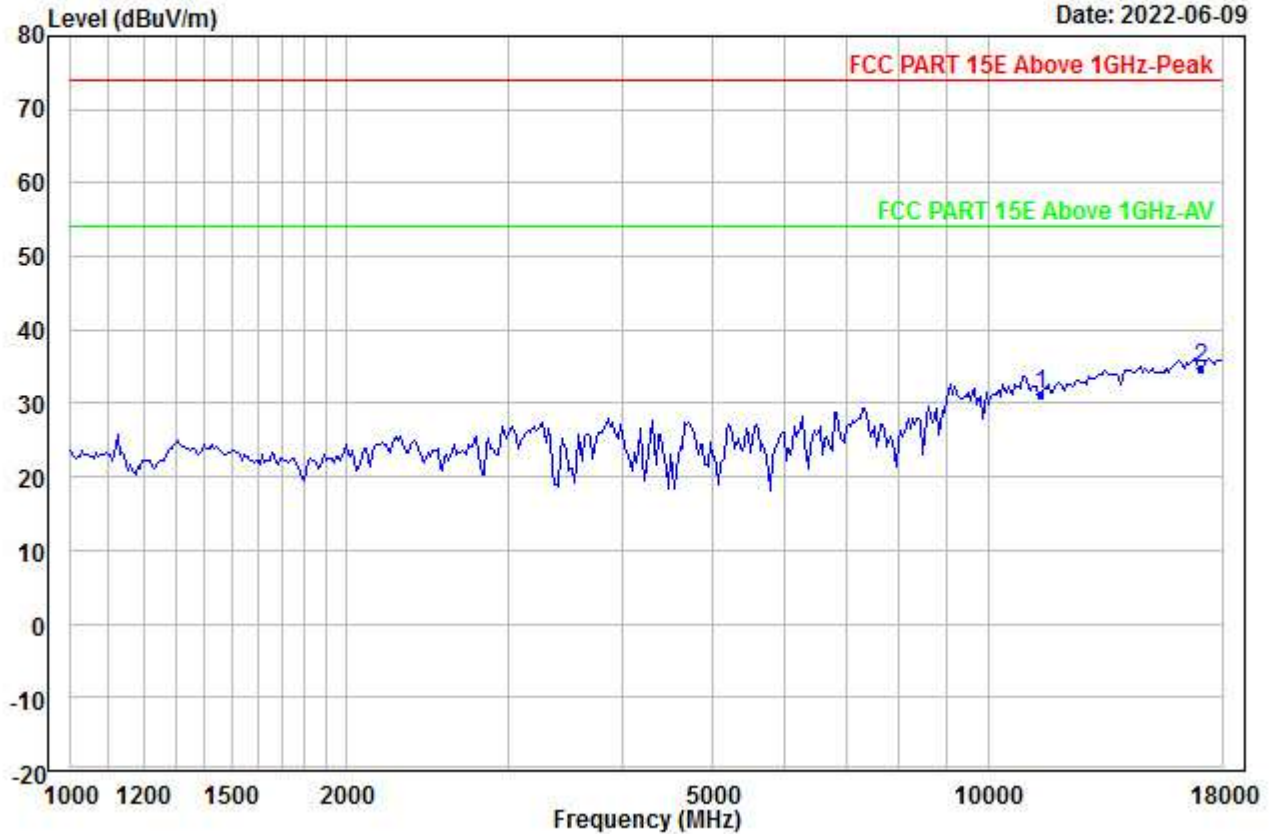


Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5700
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.18	38.82	45.88	0.00	14.21	31.33	54.00	-22.67	---	---	Aver
2	PP17100.000	21.80	42.26	47.08	0.00	17.74	34.72	54.00	-19.28	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00037.EMI

Date: 2022-06-09

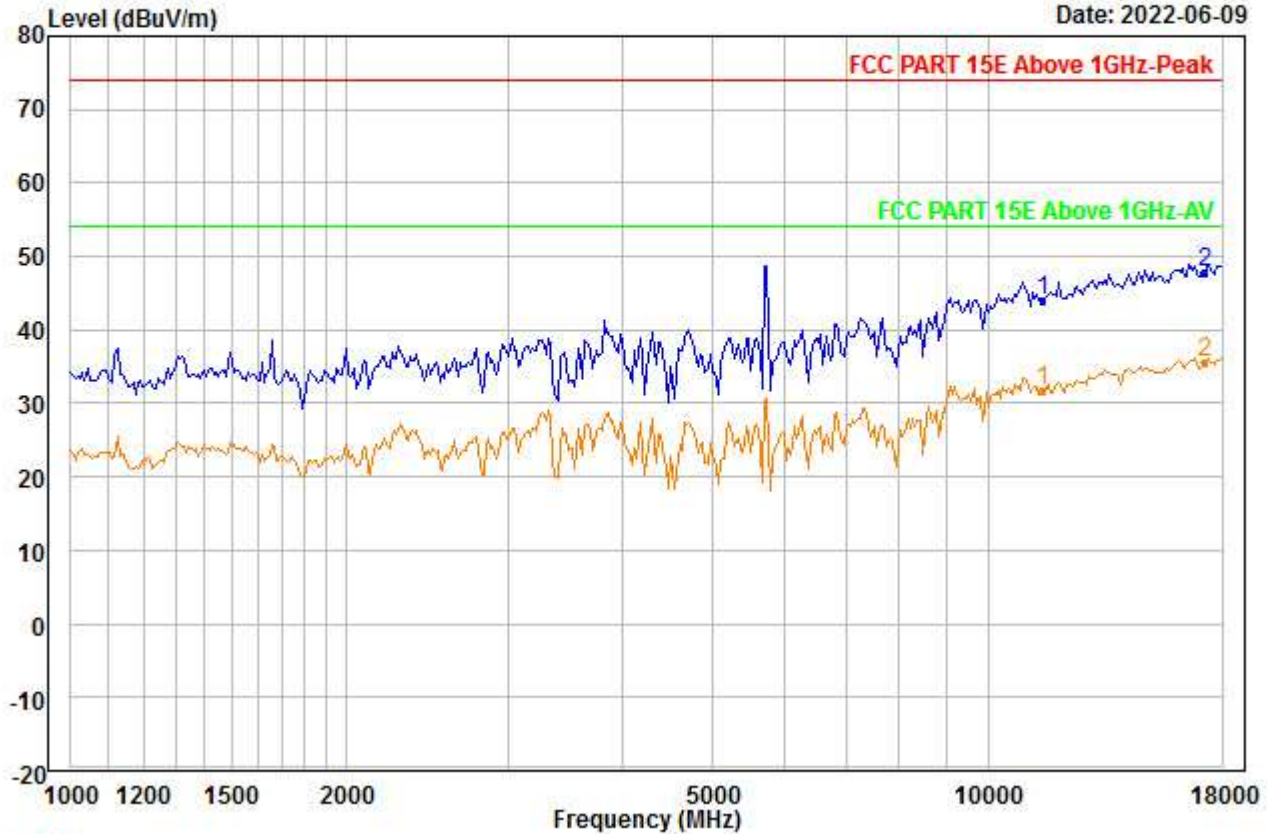


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5745
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	37.01	38.89	46.08	0.00	14.28	44.10	74.00	-29.90	---	---	Peak
2	PP17235.000	34.74	42.21	46.92	0.00	17.83	47.86	74.00	-26.14	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00038.EMI

Date: 2022-06-09

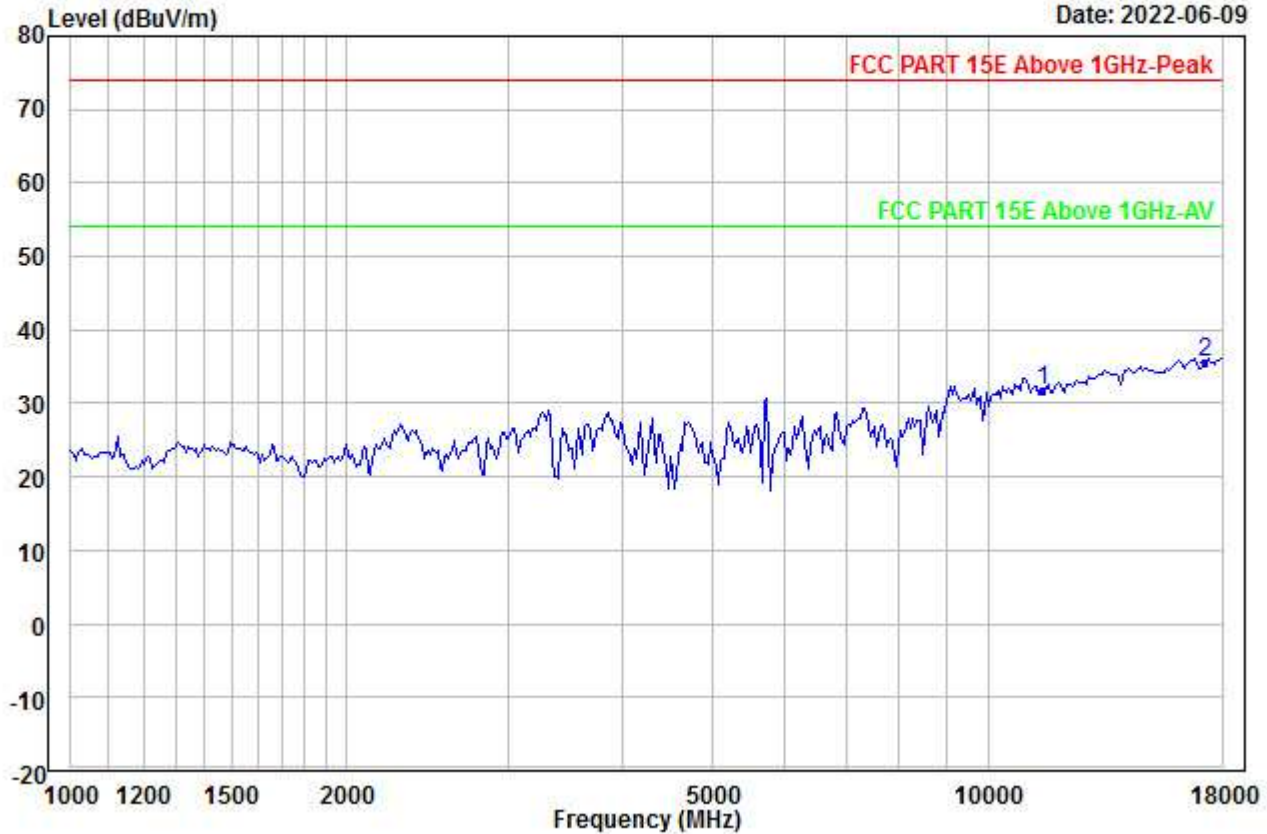


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5745
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	24.72	38.89	46.08	0.00	14.28	31.81	54.00	-22.19	---	---	Aver
2	PP17235.000	22.45	42.21	46.92	0.00	17.83	35.57	54.00	-18.43	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00039.EMI

Date: 2022-06-09

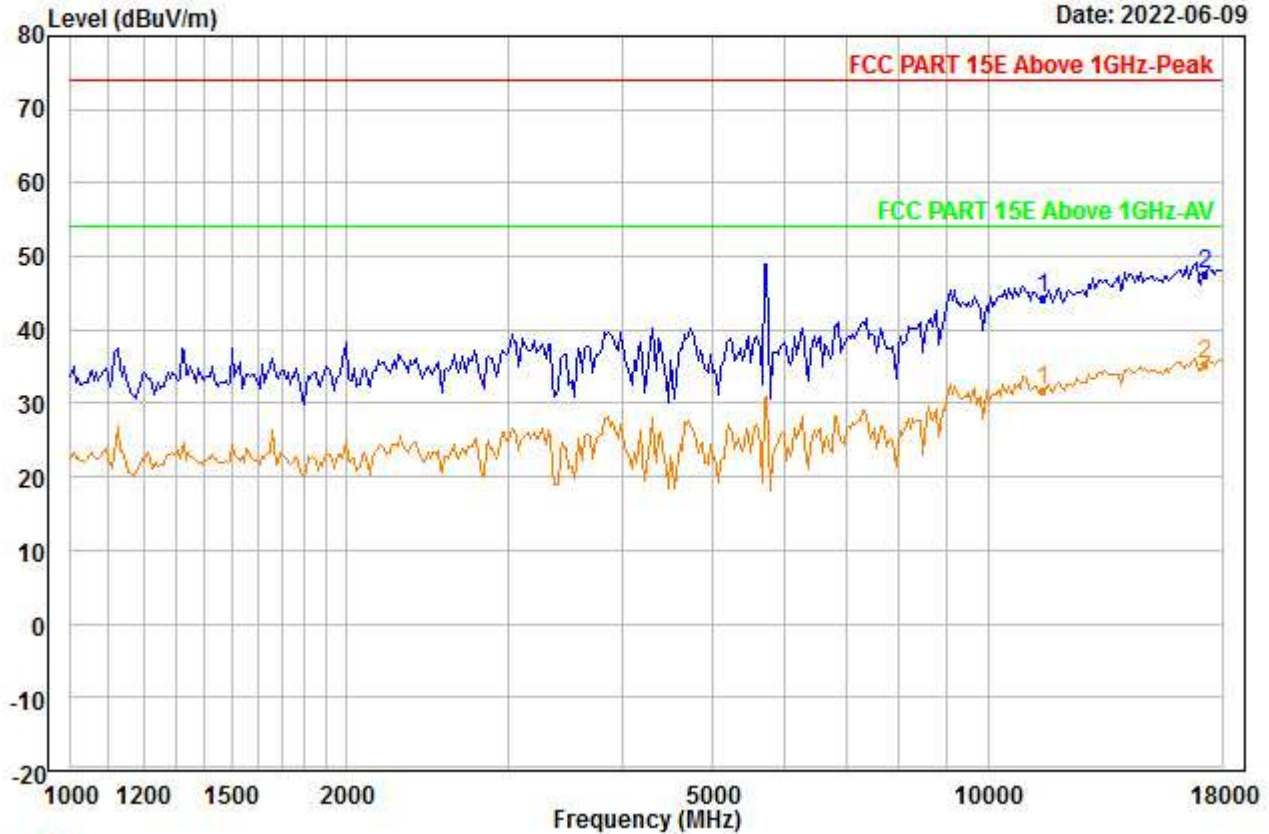


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5745
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	37.29	38.89	46.08	0.00	14.28	44.38	74.00	-29.62	---	---	Peak
2	PP17235.000	34.44	42.21	46.92	0.00	17.83	47.56	74.00	-26.44	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00040.EMI

Date: 2022-06-09

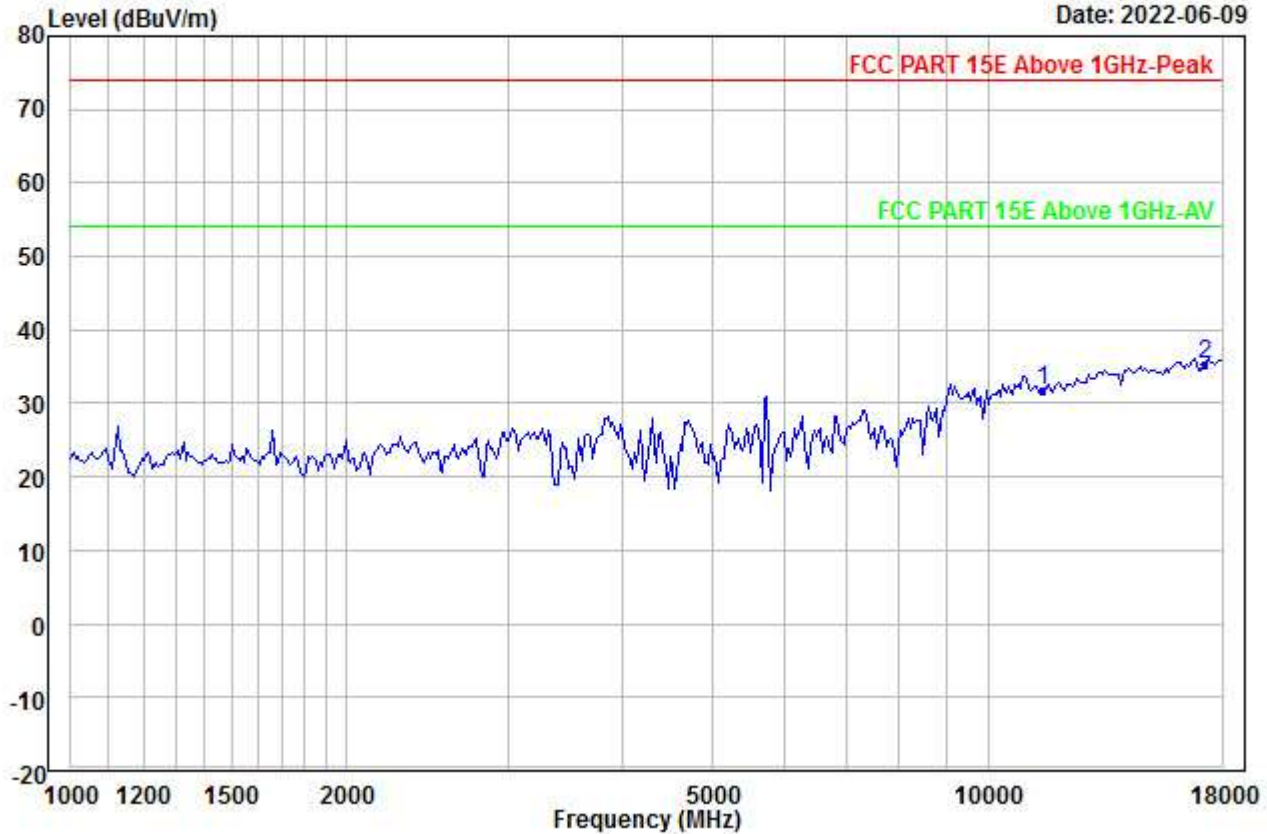


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5745
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	24.81	38.89	46.08	0.00	14.28	31.90	54.00	-22.10	---	---	Aver
2	PP17235.000	22.23	42.21	46.92	0.00	17.83	35.35	54.00	-18.65	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00041.EMI

Date: 2022-06-09

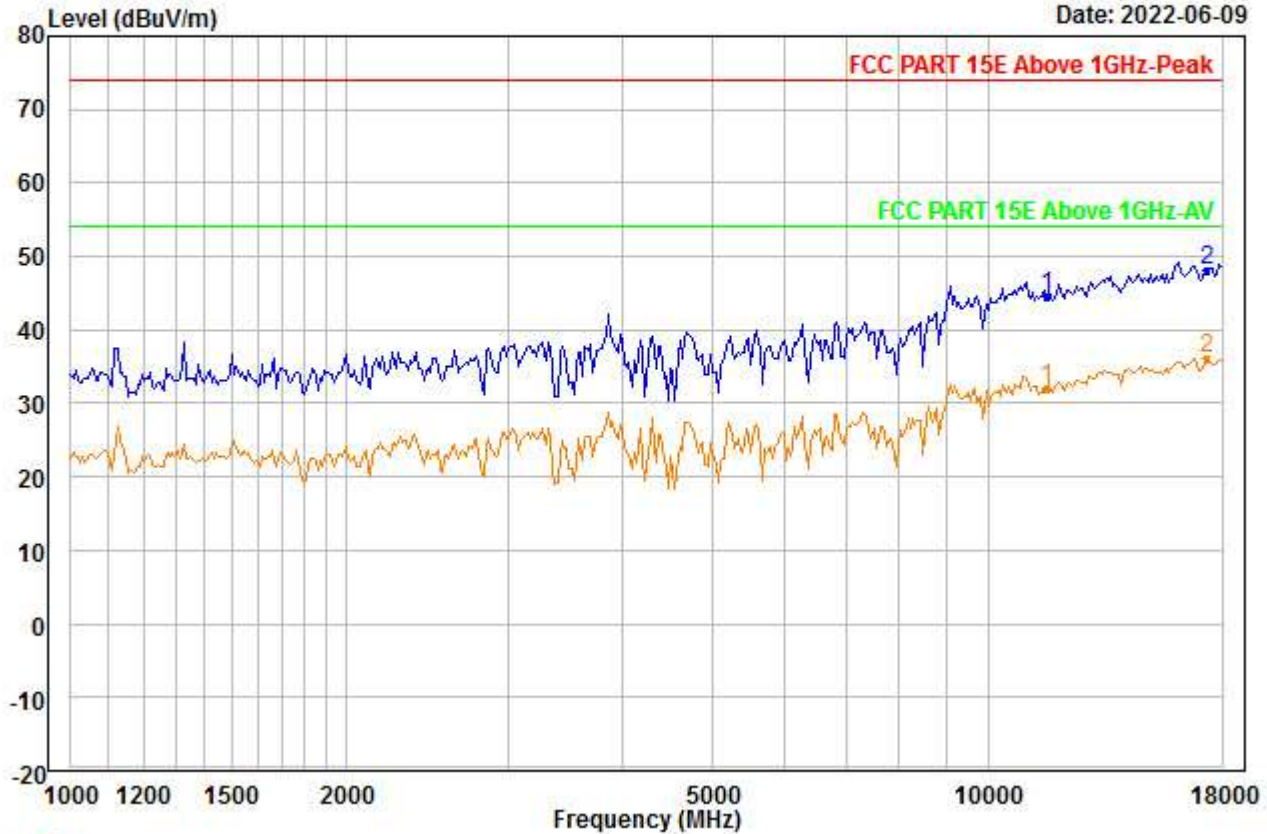


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5785
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	37.32	38.94	46.09	0.00	14.34	44.51	74.00	-29.49	---	---	Peak
2	PP17355.000	34.79	42.16	46.77	0.00	17.90	48.08	74.00	-25.92	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00042.EMI

Date: 2022-06-09

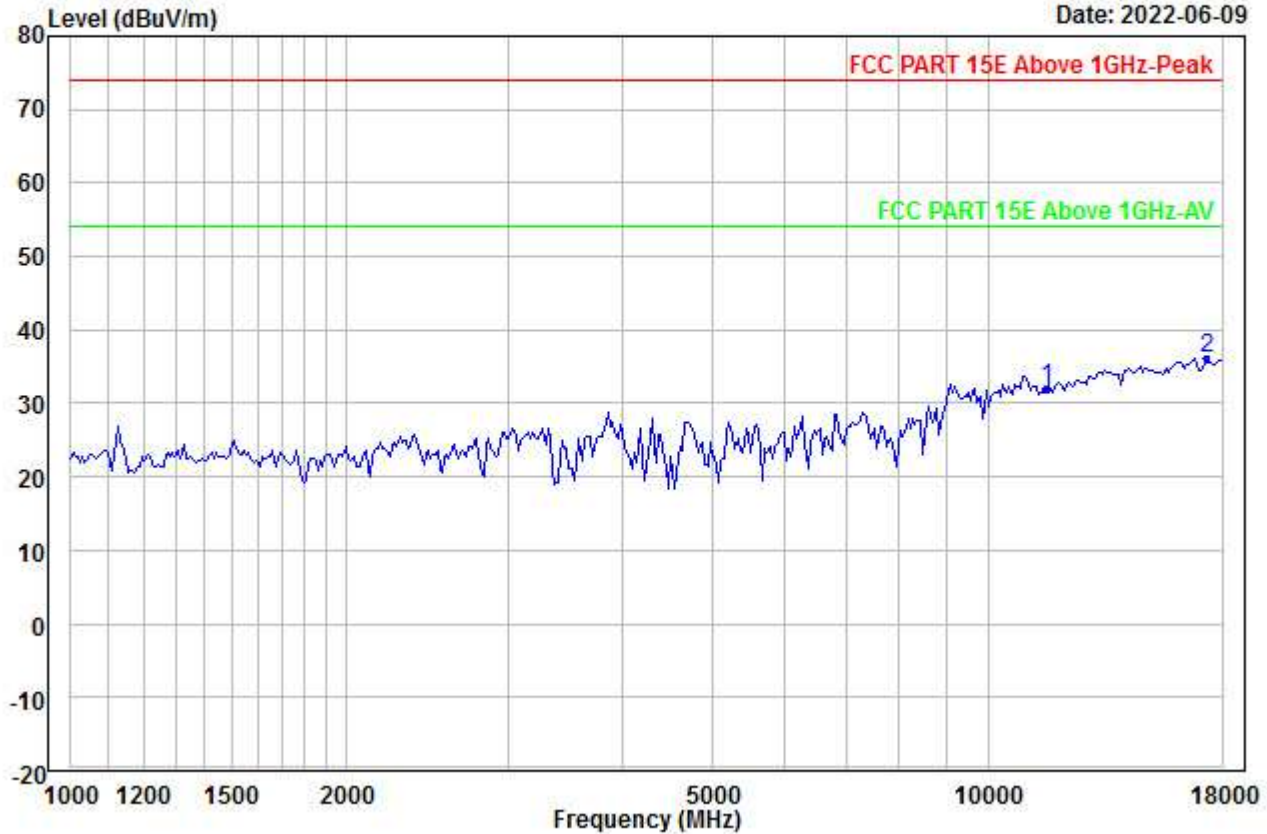


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5785
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	24.81	38.94	46.09	0.00	14.34	32.00	54.00	-22.00	---	---	Aver
2	PP17355.000	22.75	42.16	46.77	0.00	17.90	36.04	54.00	-17.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00043.EMI

Date: 2022-06-09

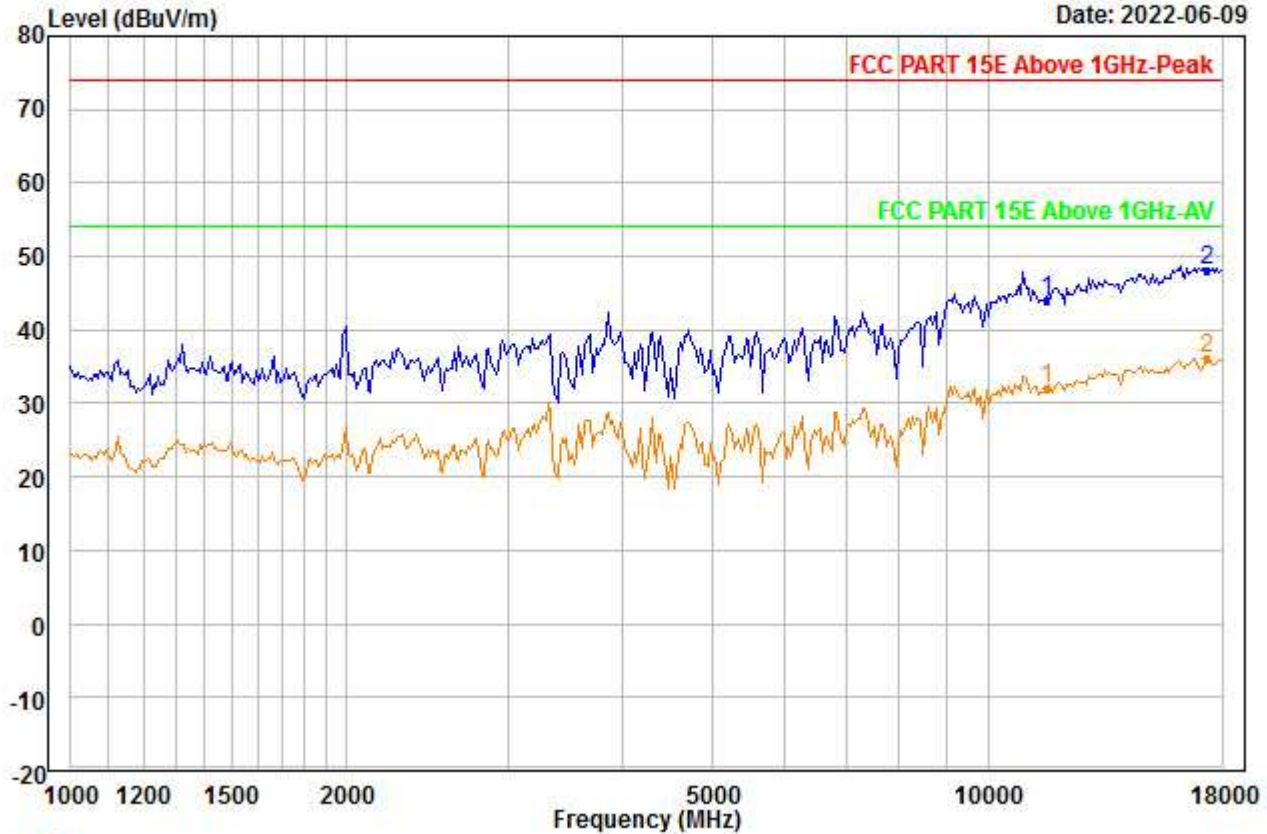


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5785
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	36.74	38.94	46.09	0.00	14.34	43.93	74.00	-30.07	---	---	Peak
2	PP17355.000	34.82	42.16	46.77	0.00	17.90	48.11	74.00	-25.89	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00044.EMI

Date: 2022-06-09

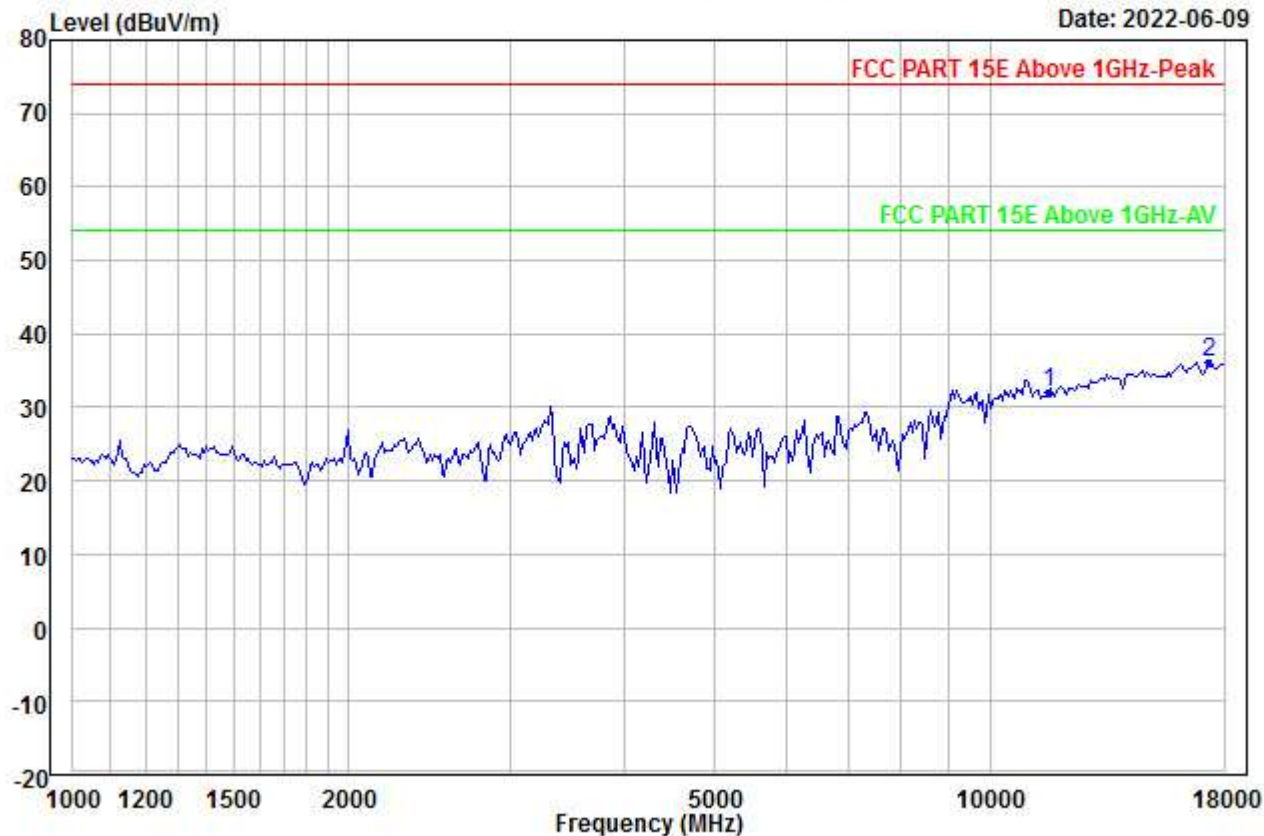


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5785
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	24.81	38.94	46.09	0.00	14.34	32.00	54.00	-22.00	---	---	Aver
2	PP17355.000	22.86	42.16	46.77	0.00	17.90	36.15	54.00	-17.85	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00045.EMI

Date: 2022-06-09

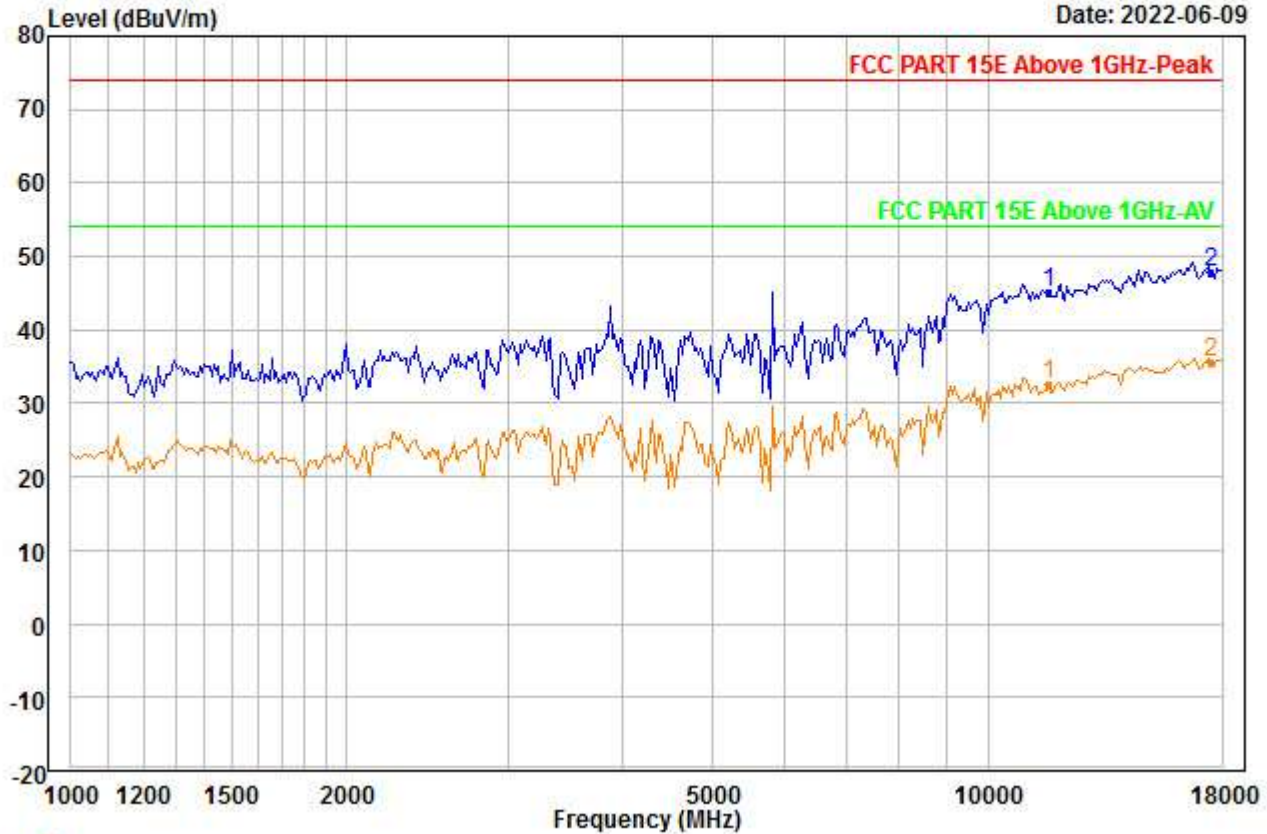


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5825
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	37.69	38.99	46.07	0.00	14.39	45.00	74.00	-29.00	---	---	Peak
2	PP17475.000	34.47	42.11	46.63	0.00	17.98	47.93	74.00	-26.07	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00046.EMI

Date: 2022-06-09

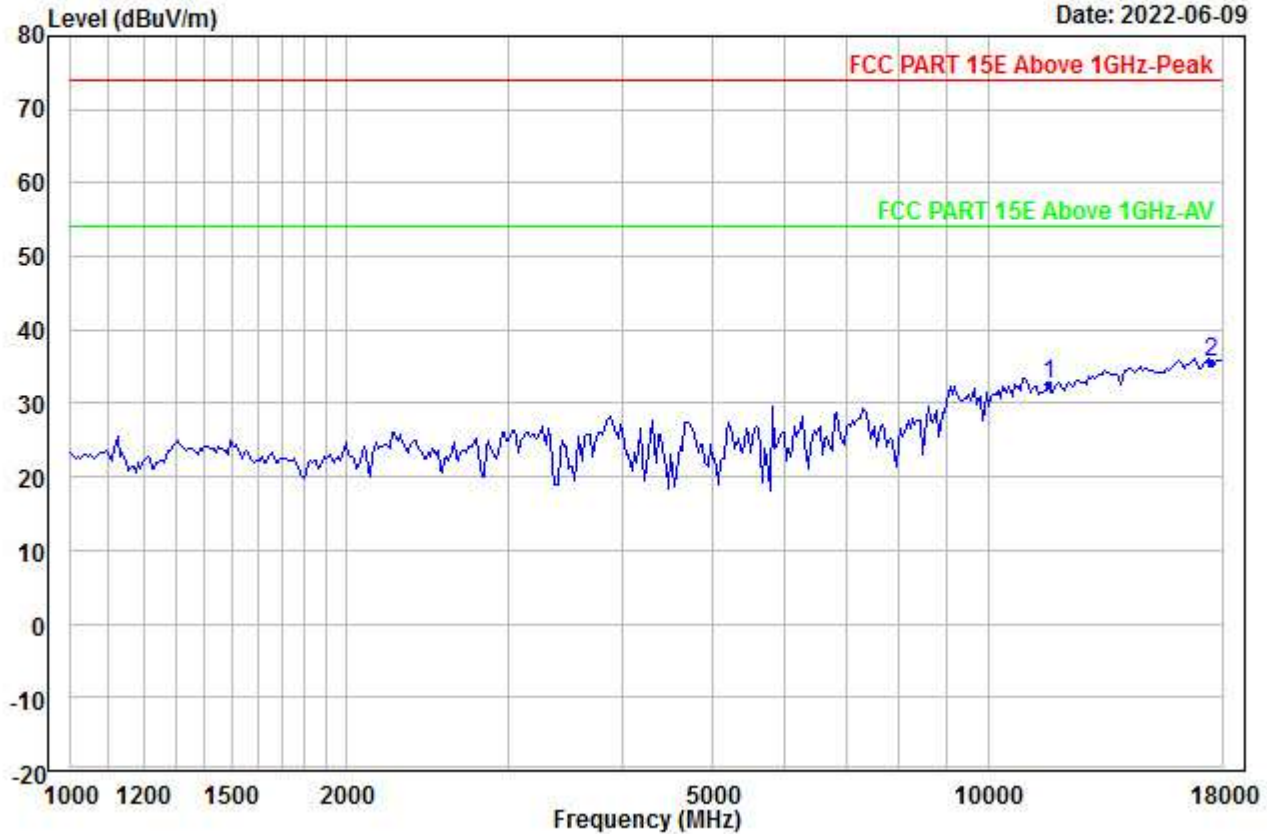


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5825
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	25.28	38.99	46.07	0.00	14.39	32.59	54.00	-21.41	---	---	Aver
2	PP17475.000	22.18	42.11	46.63	0.00	17.98	35.64	54.00	-18.36	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00047.EMI

Date: 2022-06-09

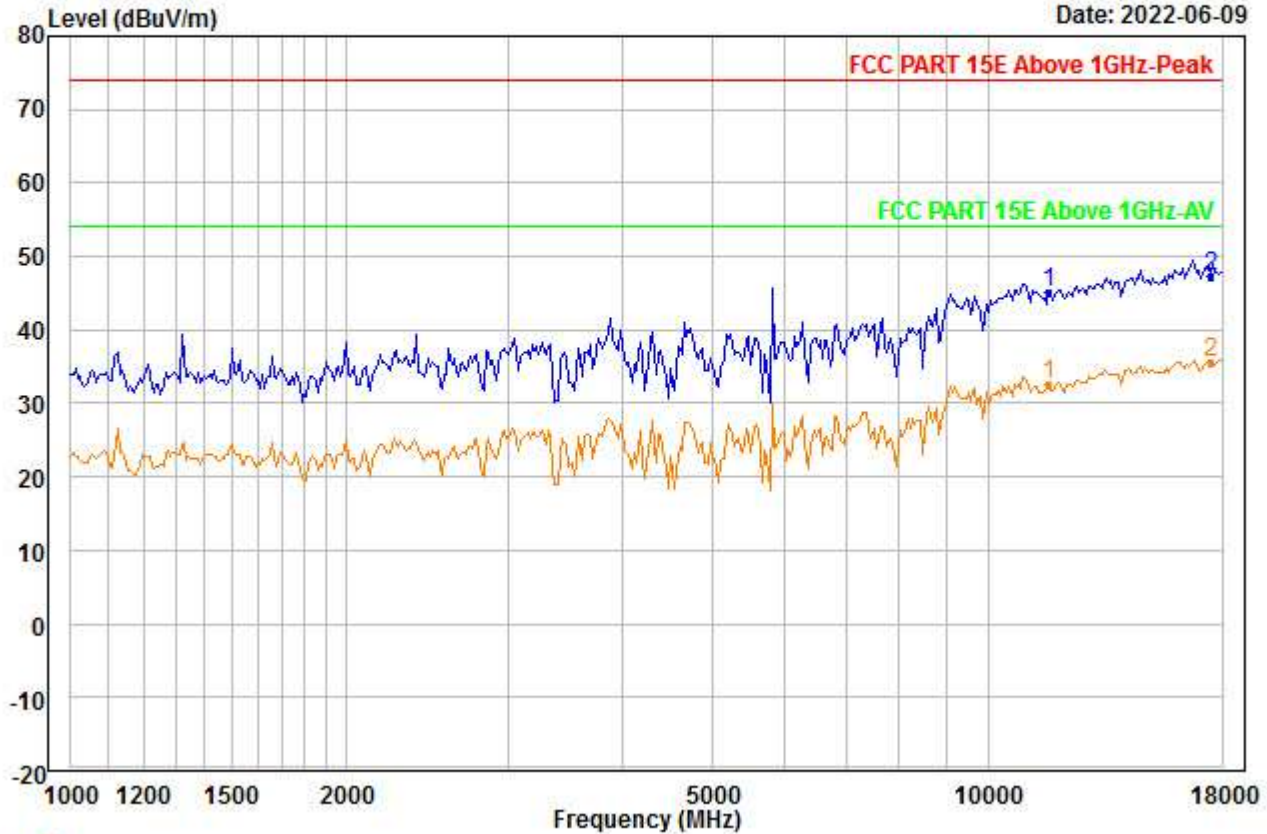


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT0_5825
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	37.95	38.99	46.07	0.00	14.39	45.26	74.00	-28.74	---	---	Peak
2	PP17475.000	33.93	42.11	46.63	0.00	17.98	47.39	74.00	-26.61	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00048.EMI

Date: 2022-06-09

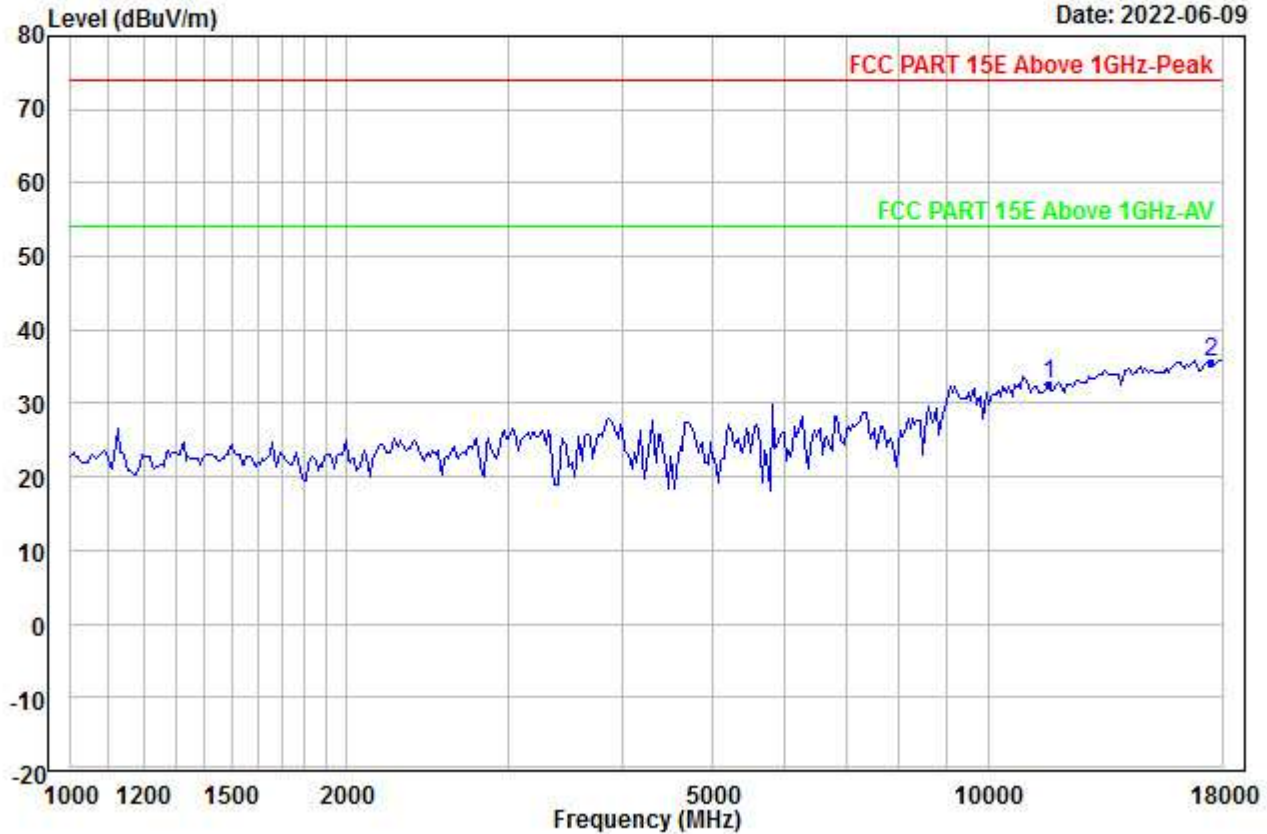


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5825
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	25.36	38.99	46.07	0.00	14.39	32.67	54.00	-21.33	---	---	Aver
2	PP17475.000	22.07	42.11	46.63	0.00	17.98	35.53	54.00	-18.47	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00049.EMI

Date: 2022-06-09

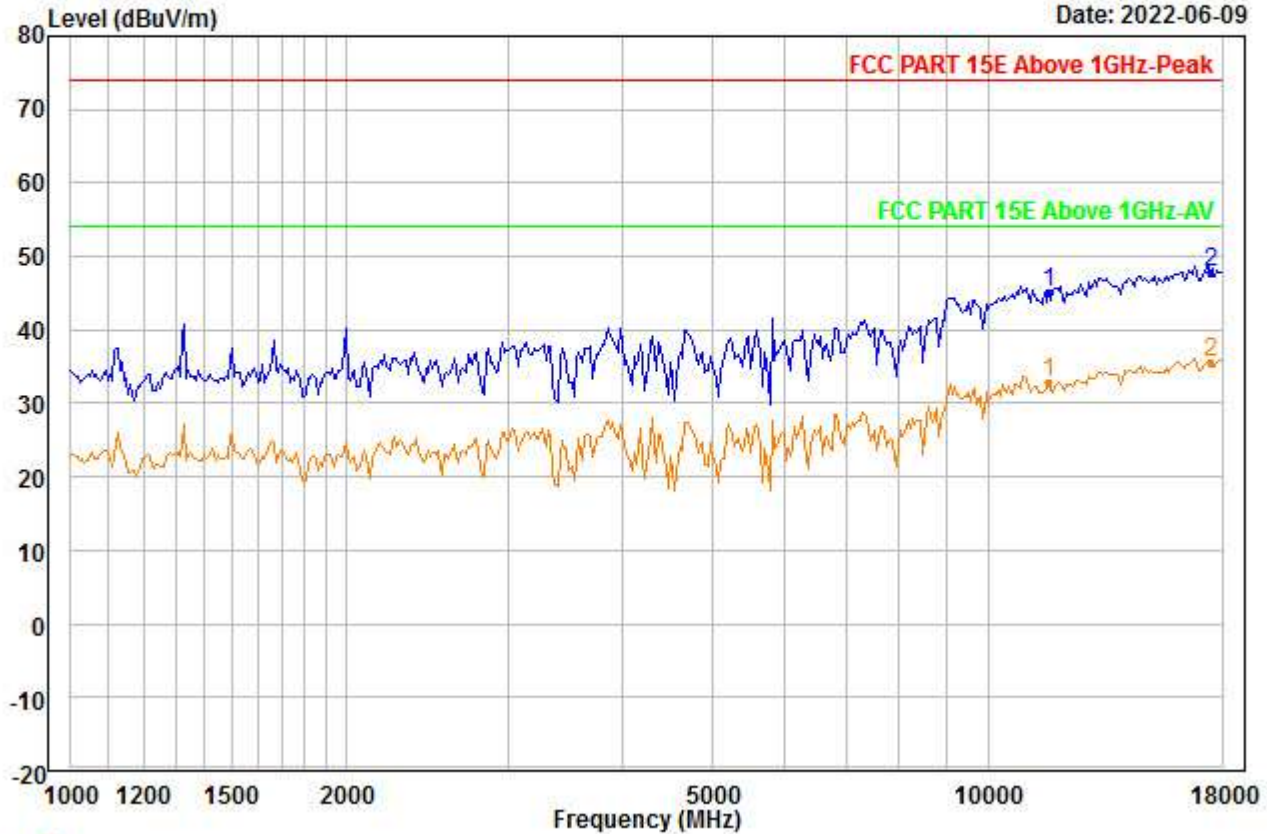


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5825
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	37.84	38.99	46.07	0.00	14.39	45.15	74.00	-28.85	---	---	Peak
2	PP17475.000	34.31	42.11	46.63	0.00	17.98	47.77	74.00	-26.23	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00050.EMI

Date: 2022-06-09

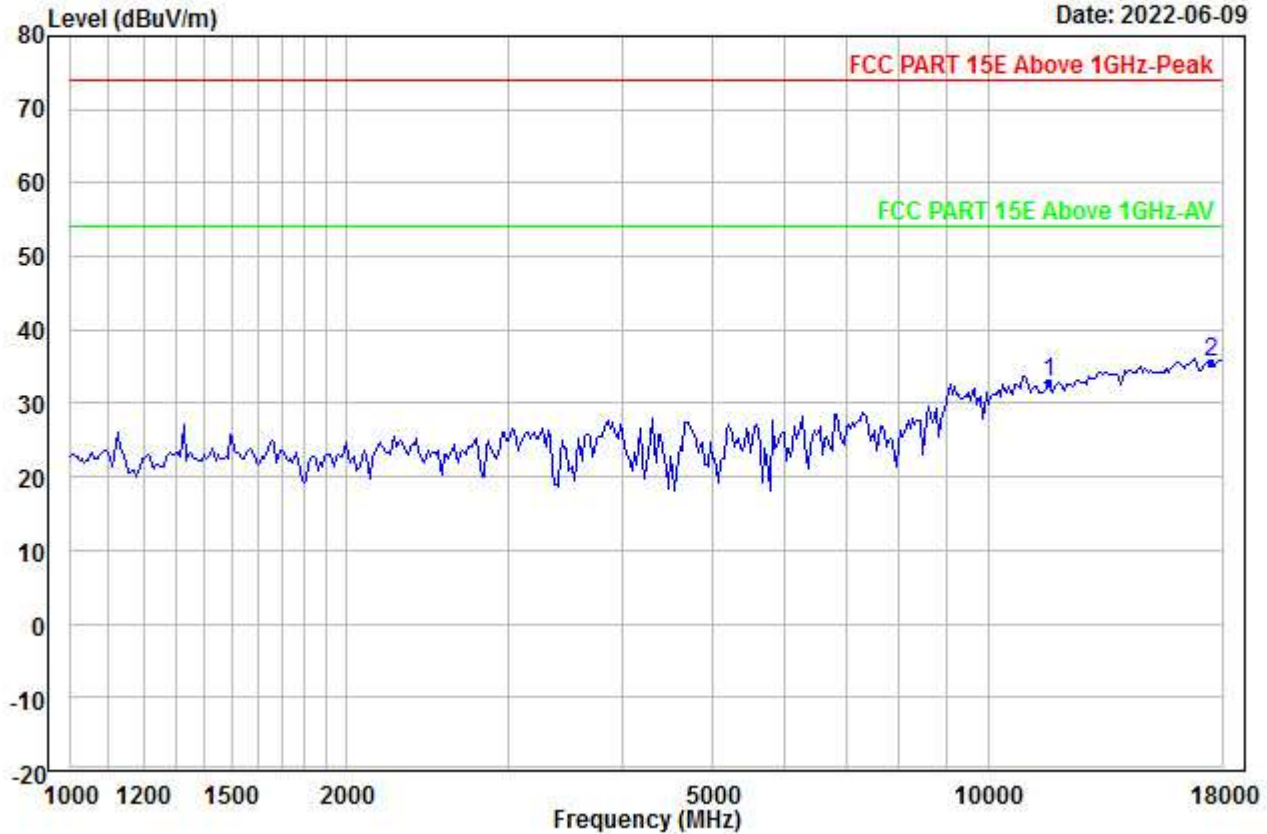


Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5825
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	25.43	38.99	46.07	0.00	14.39	32.74	54.00	-21.26	---	---	Aver
2	PP17475.000	22.07	42.11	46.63	0.00	17.98	35.53	54.00	-18.47	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00051.EMI

Date: 2022-06-09

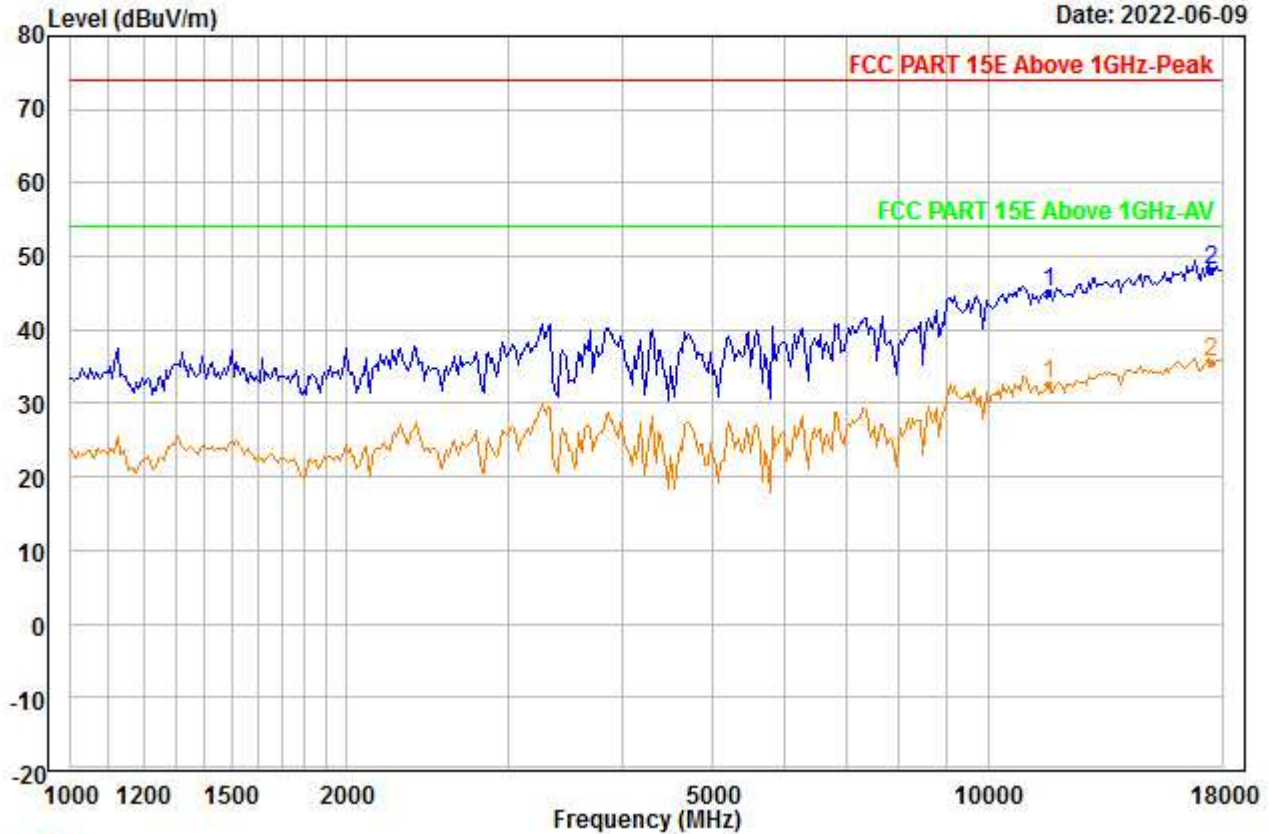


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5825
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	37.78	38.99	46.07	0.00	14.39	45.09	74.00	-28.91	---	---	Peak
2	PP17475.000	34.58	42.11	46.63	0.00	17.98	48.04	74.00	-25.96	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00052.EMI

Date: 2022-06-09

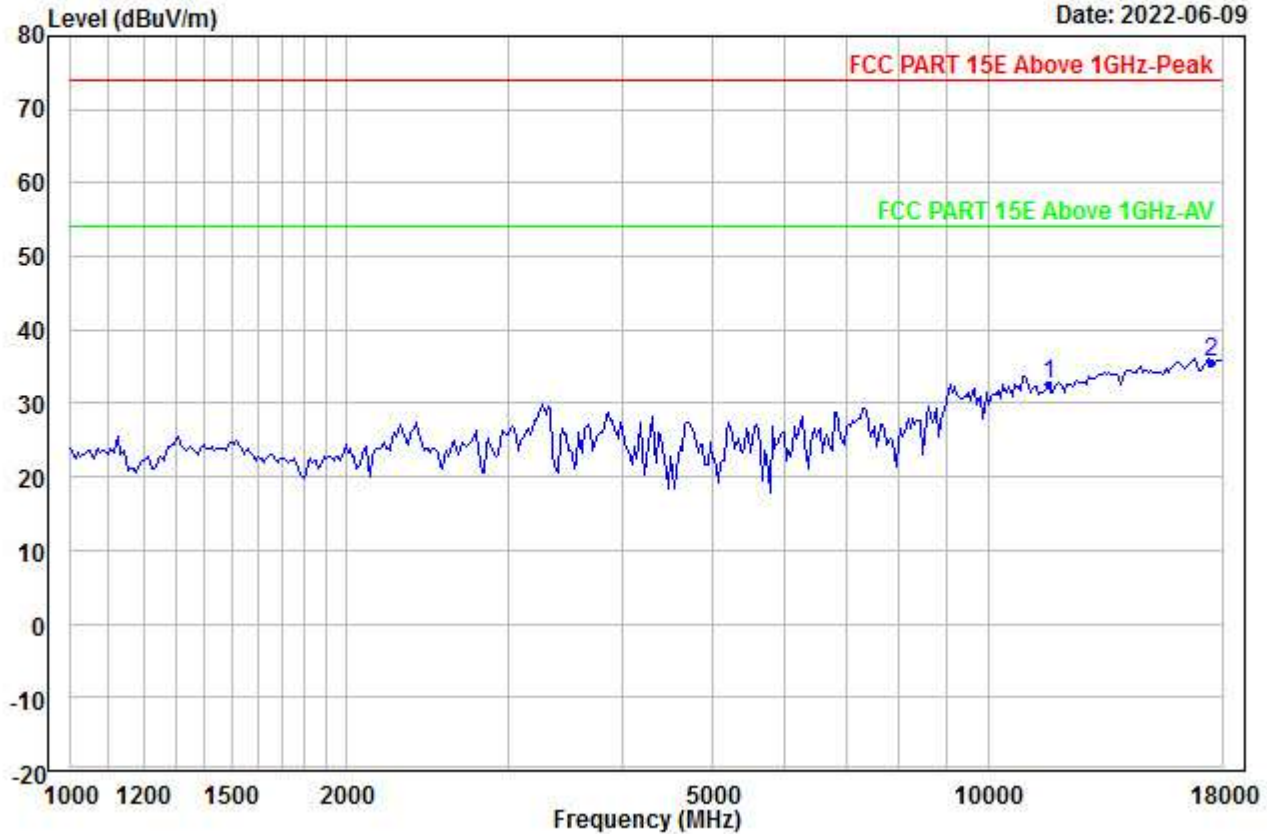


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5825
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	25.28	38.99	46.07	0.00	14.39	32.59	54.00	-21.41	---	---	Aver
2	PP17475.000	22.07	42.11	46.63	0.00	17.98	35.53	54.00	-18.47	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00053.EMI

Date: 2022-06-09

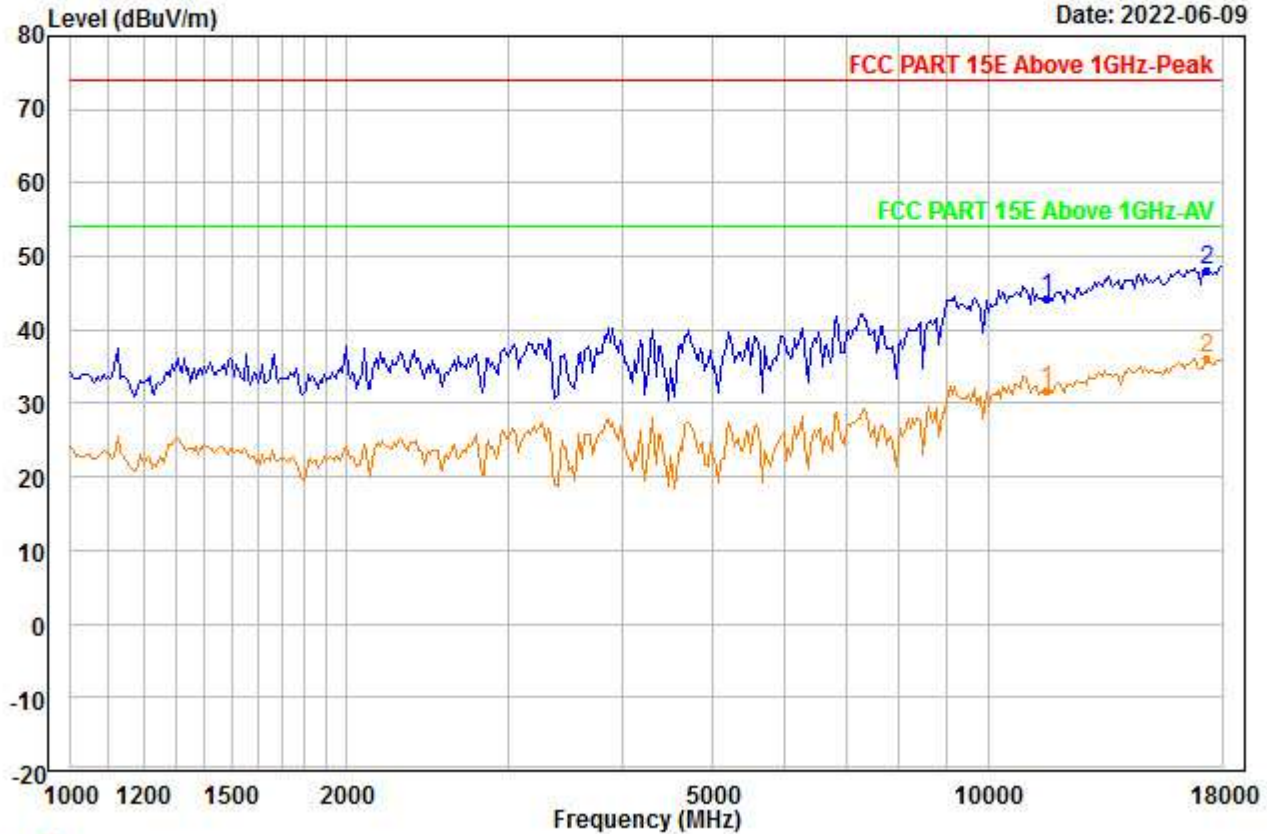


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5785
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	37.18	38.94	46.09	0.00	14.34	44.37	74.00	-29.63	---	---	Peak
2	PP17355.000	34.82	42.16	46.77	0.00	17.90	48.11	74.00	-25.89	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00054.EMI

Date: 2022-06-09

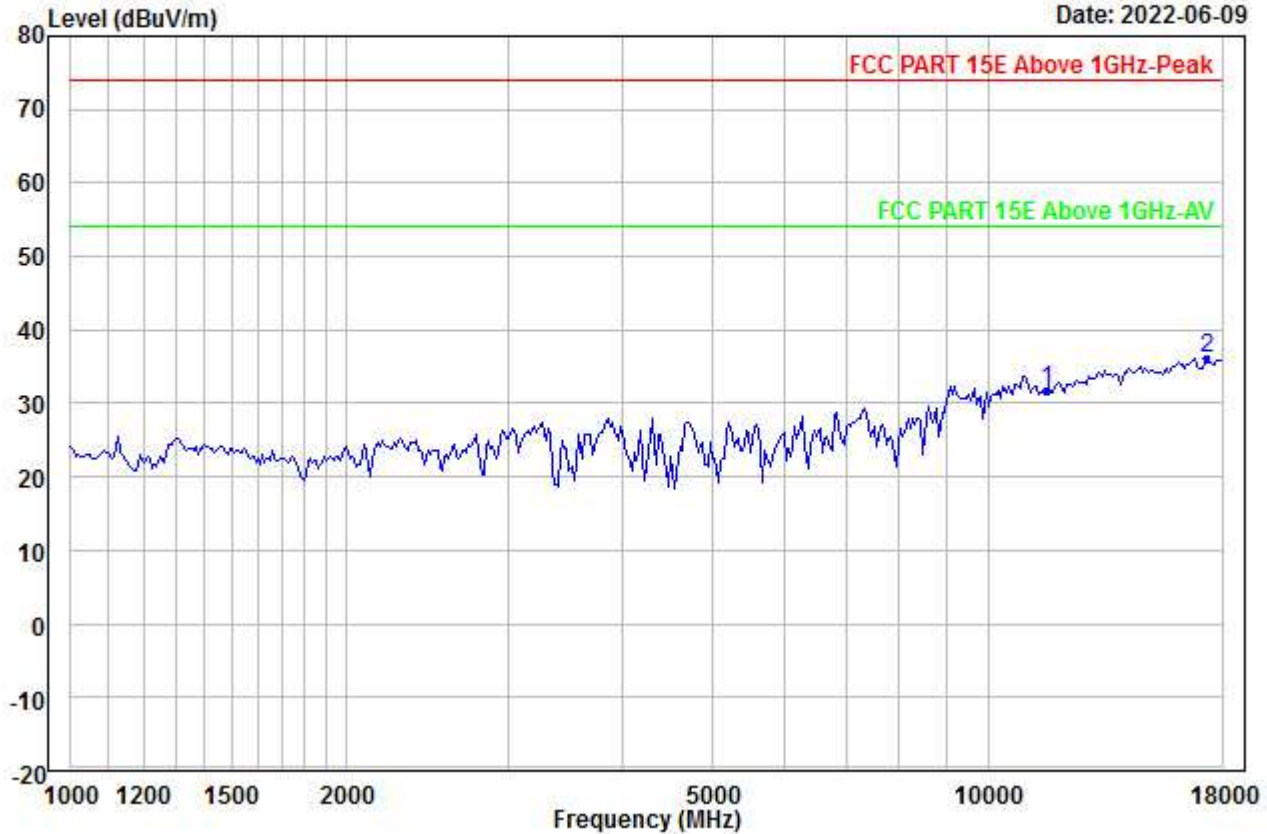


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5785
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	24.64	38.94	46.09	0.00	14.34	31.83	54.00	-22.17	---	---	Aver
2	PP17355.000	22.86	42.16	46.77	0.00	17.90	36.15	54.00	-17.85	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00055.EMI

Date: 2022-06-09

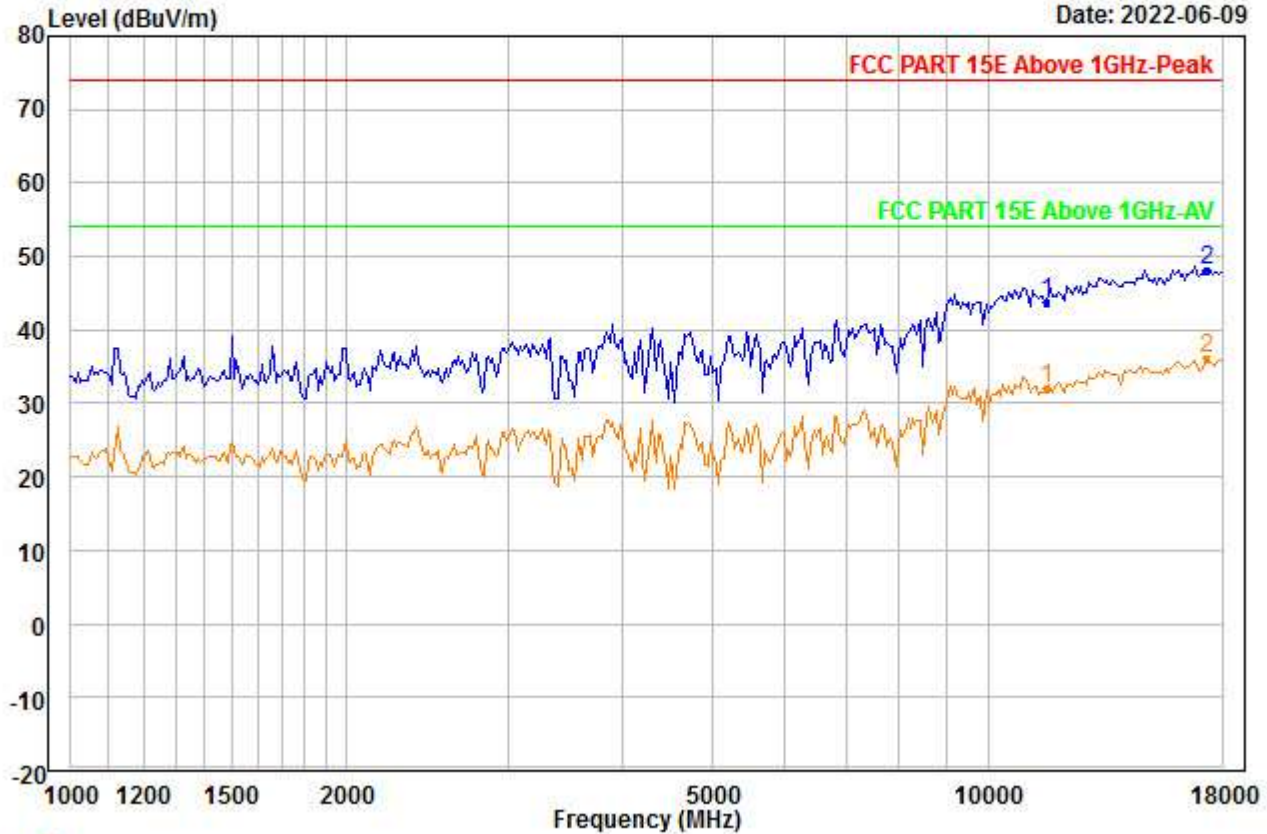


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5785
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	36.55	38.94	46.09	0.00	14.34	43.74	74.00	-30.26	---	---	Peak
2	PP17355.000	34.92	42.16	46.77	0.00	17.90	48.21	74.00	-25.79	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00056.EMI

Date: 2022-06-09

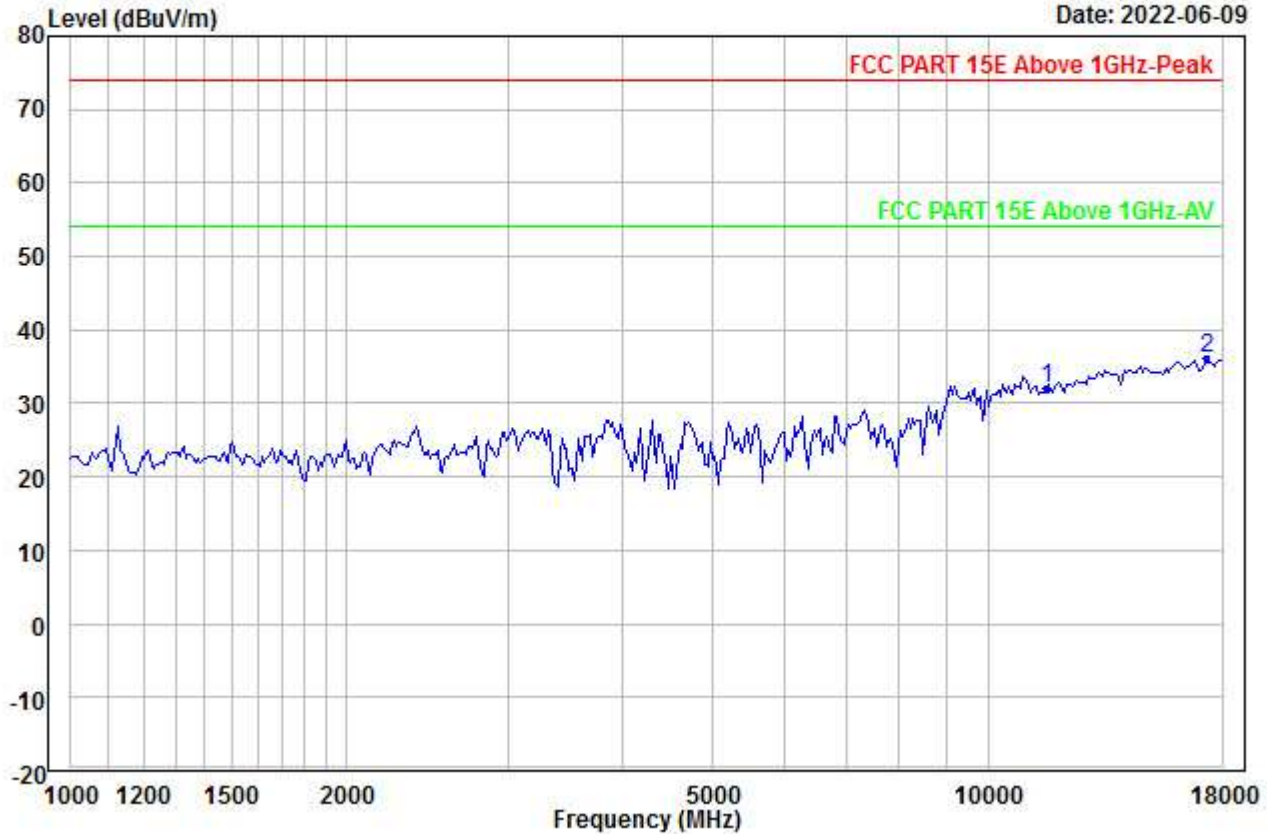


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5785
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	24.72	38.94	46.09	0.00	14.34	31.91	54.00	-22.09	---	---	Aver
2	PP17355.000	22.75	42.16	46.77	0.00	17.90	36.04	54.00	-17.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00057.EMI

Date: 2022-06-09

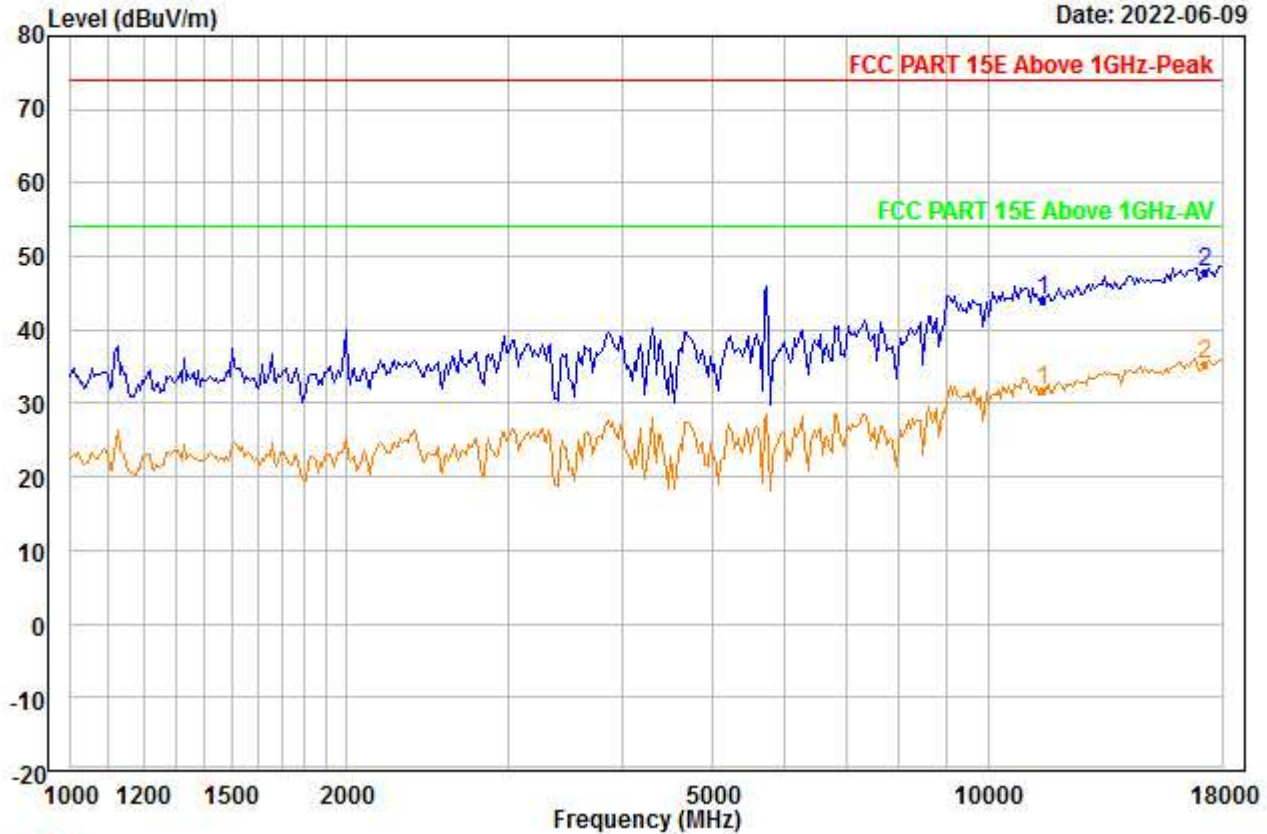


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	37.05	38.89	46.08	0.00	14.28	44.14	74.00	-29.86	---	---	Peak
2	PP17235.000	34.77	42.21	46.92	0.00	17.83	47.89	74.00	-26.11	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00058.EMI

Date: 2022-06-09

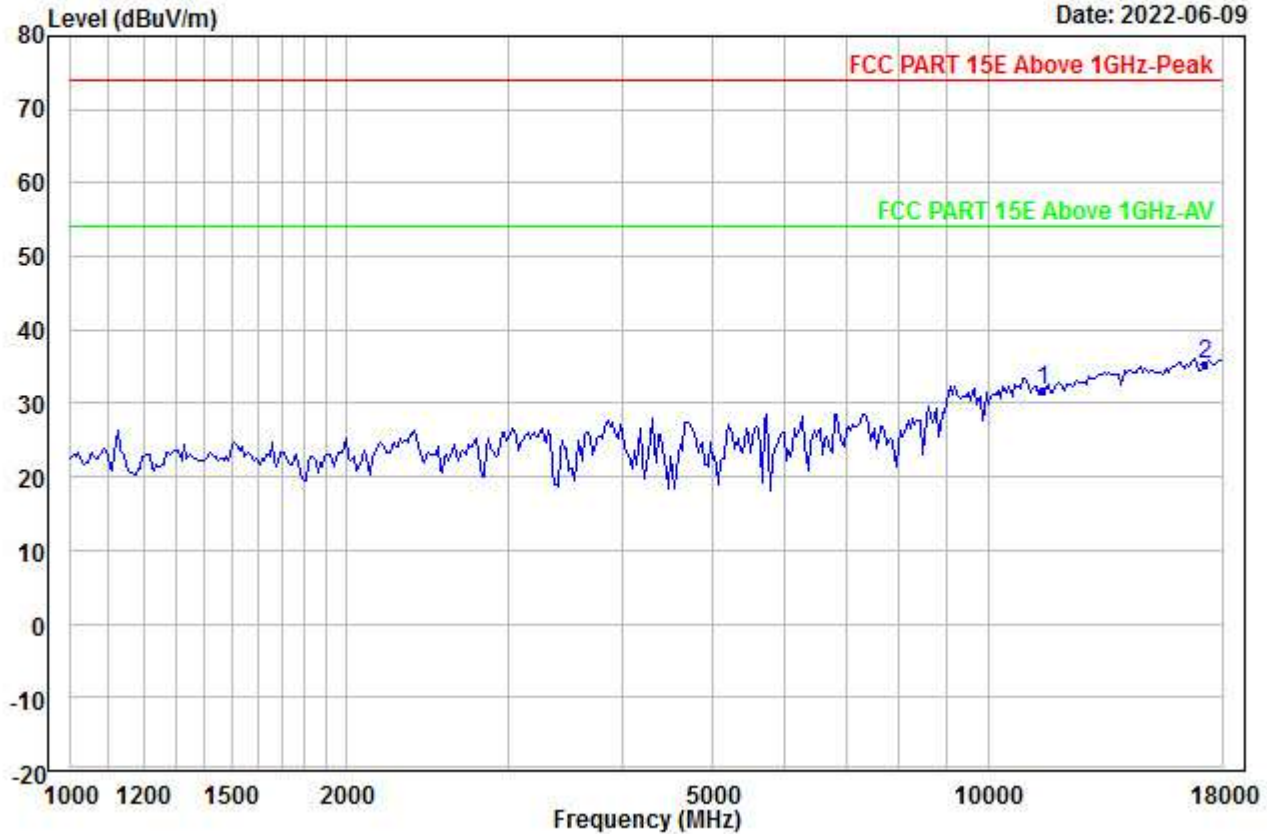


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	24.81	38.89	46.08	0.00	14.28	31.90	54.00	-22.10	---	---	Aver
2	PP17235.000	22.12	42.21	46.92	0.00	17.83	35.24	54.00	-18.76	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00059.EMI

Date: 2022-06-09

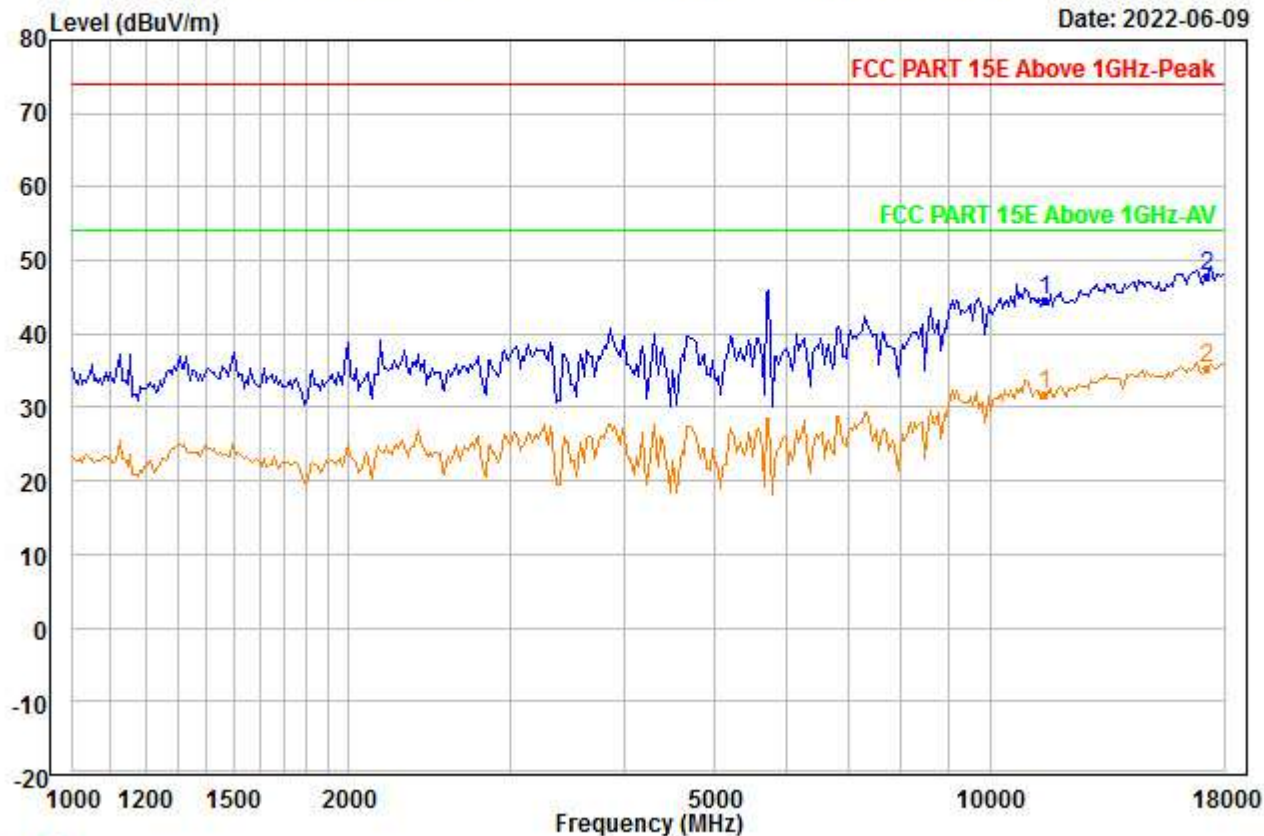


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5745
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	37.35	38.89	46.08	0.00	14.28	44.44	74.00	-29.56	---	---	Peak
2	PP17235.000	34.71	42.21	46.92	0.00	17.83	47.83	74.00	-26.17	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00060.EMI

Date: 2022-06-09

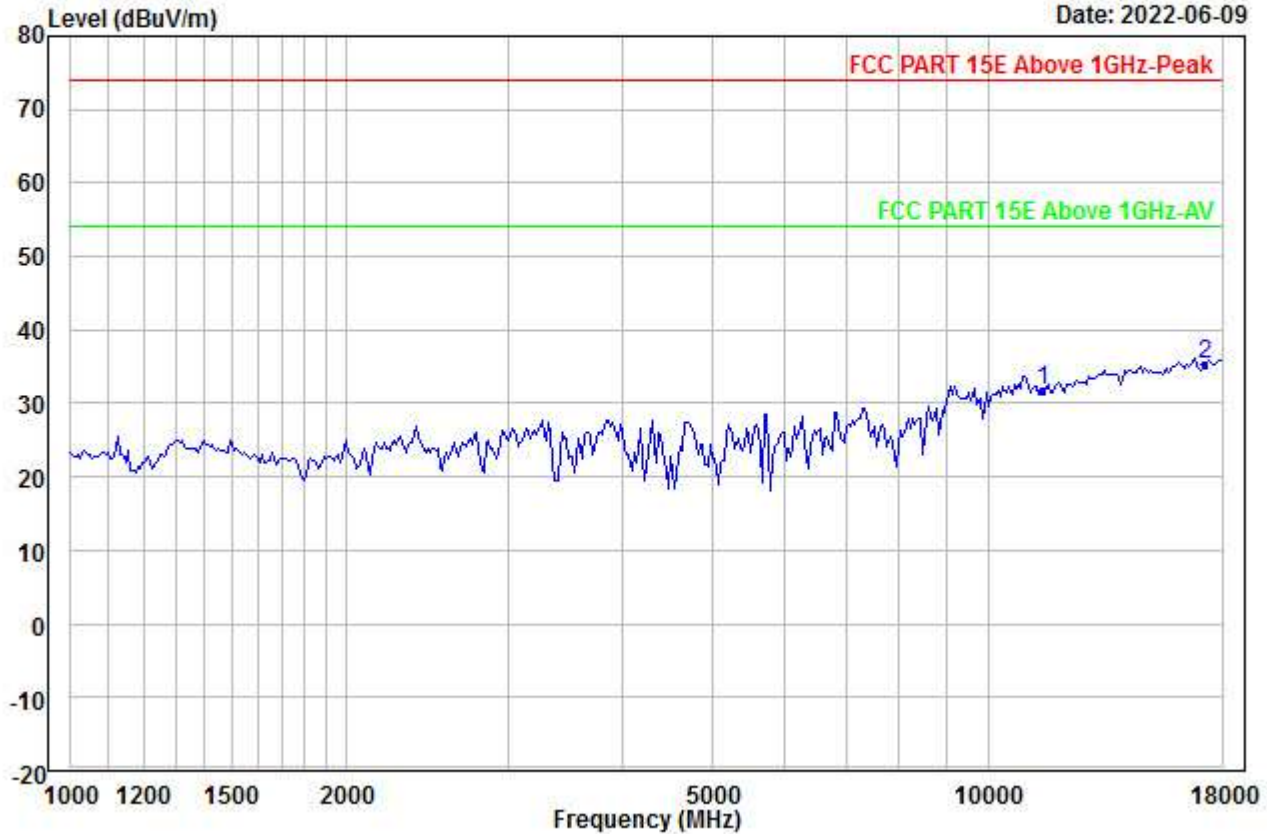


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	24.72	38.89	46.08	0.00	14.28	31.81	54.00	-22.19	---	---	Aver
2	PP17235.000	22.23	42.21	46.92	0.00	17.83	35.35	54.00	-18.65	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00061.EMI

Date: 2022-06-09

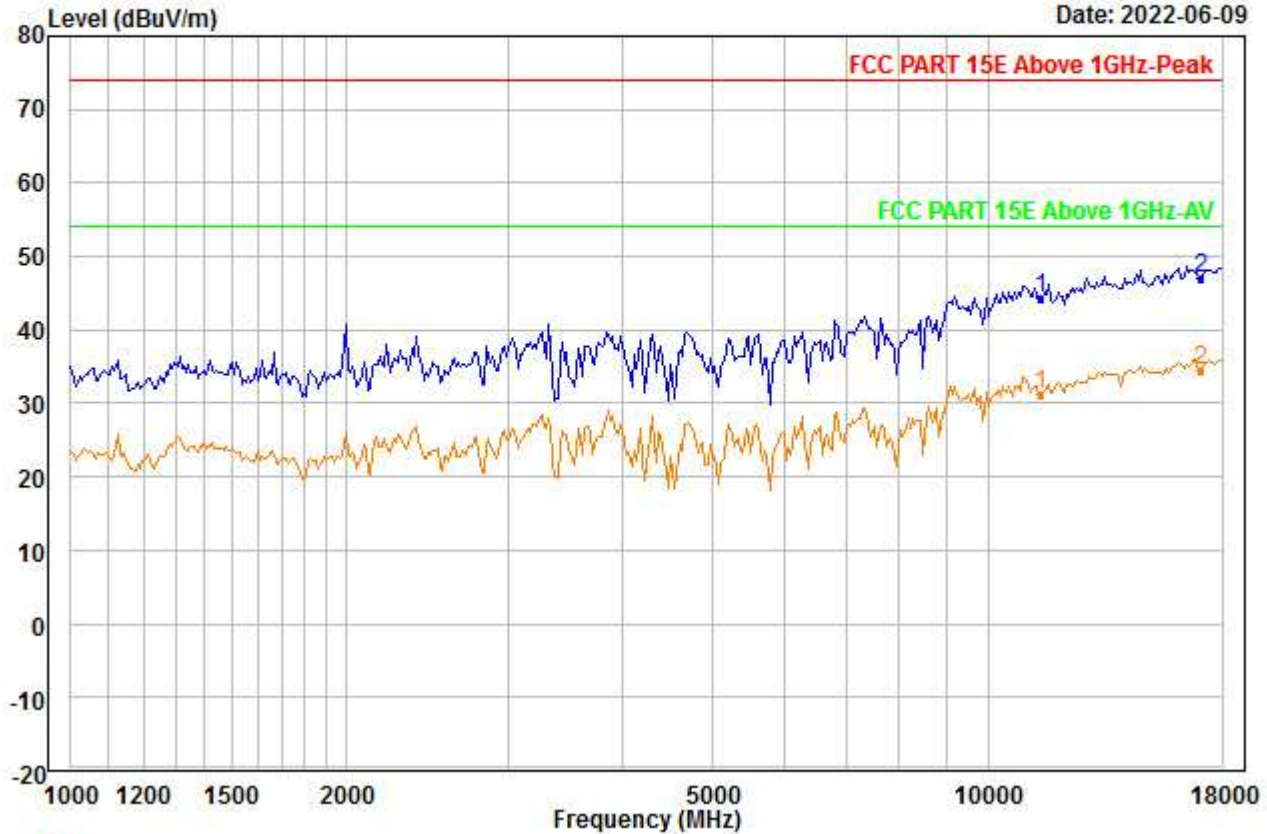


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5700
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	37.15	38.82	45.88	0.00	14.21	44.30	74.00	-29.70	---	---	Peak
2	PP17100.000	34.24	42.26	47.08	0.00	17.74	47.16	74.00	-26.84	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00062.EMI

Date: 2022-06-09

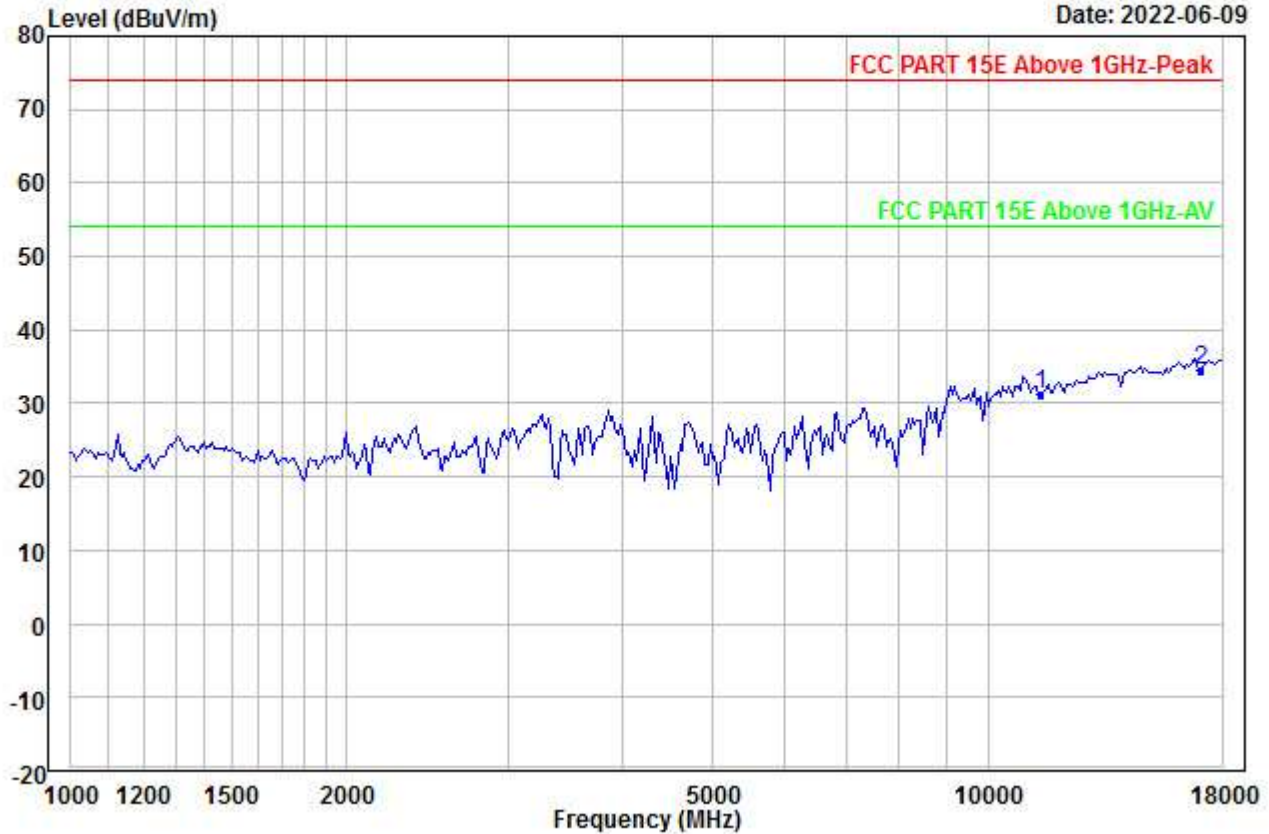


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5700
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.18	38.82	45.88	0.00	14.21	31.33	54.00	-22.67	---	---	Aver
2	PP17100.000	21.68	42.26	47.08	0.00	17.74	34.60	54.00	-19.40	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00063.EMI

Date: 2022-06-09

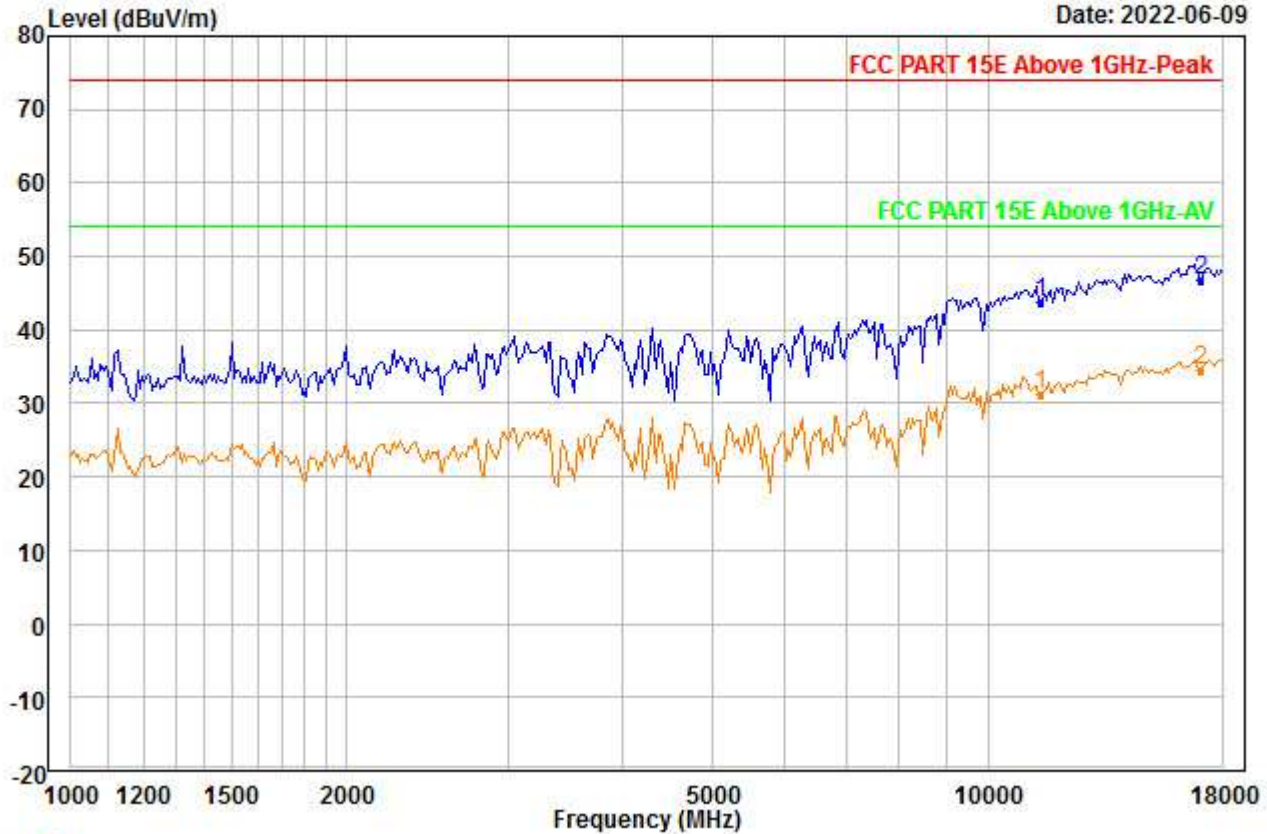


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5700
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	36.61	38.82	45.88	0.00	14.21	43.76	74.00	-30.24	---	---	Peak
2	PP17100.000	33.81	42.26	47.08	0.00	17.74	46.73	74.00	-27.27	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00064.EMI

Date: 2022-06-09

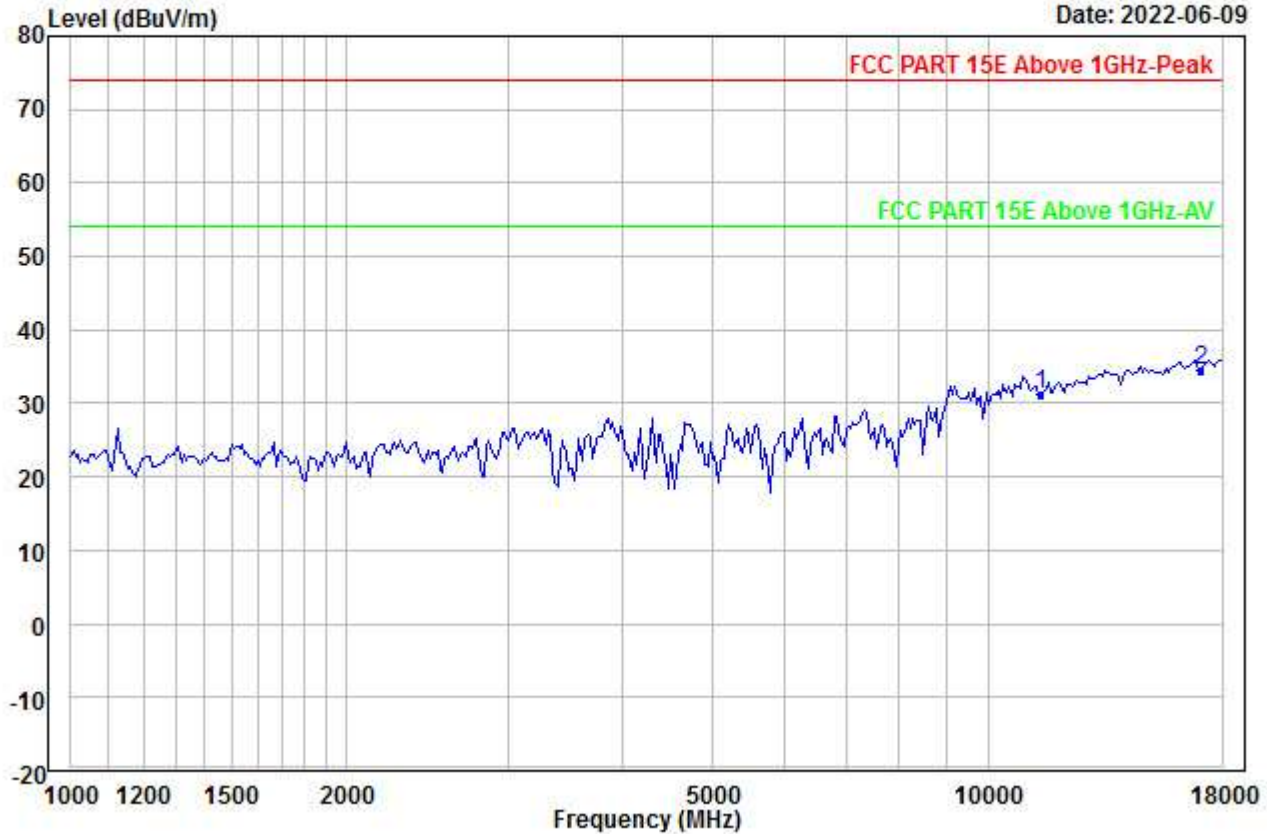


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5700
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.18	38.82	45.88	0.00	14.21	31.33	54.00	-22.67	---	---	Aver
2	PP17100.000	21.68	42.26	47.08	0.00	17.74	34.60	54.00	-19.40	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00065.EMI

Date: 2022-06-09

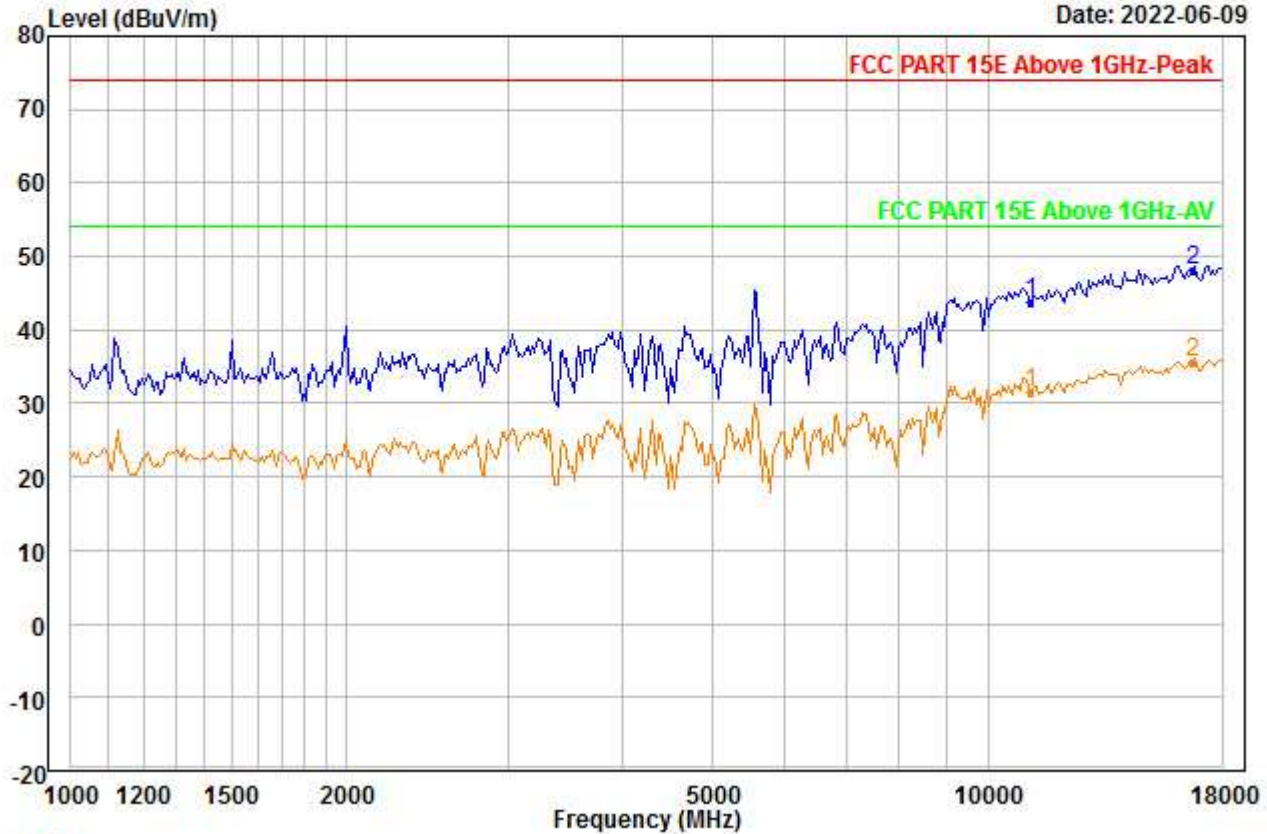


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5580
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	36.58	38.63	45.35	0.00	14.04	43.90	74.00	-30.10	---	---	Peak
2	PP16740.000	35.51	41.88	46.89	0.00	17.56	48.06	74.00	-25.94	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00066.EMI

Date: 2022-06-09

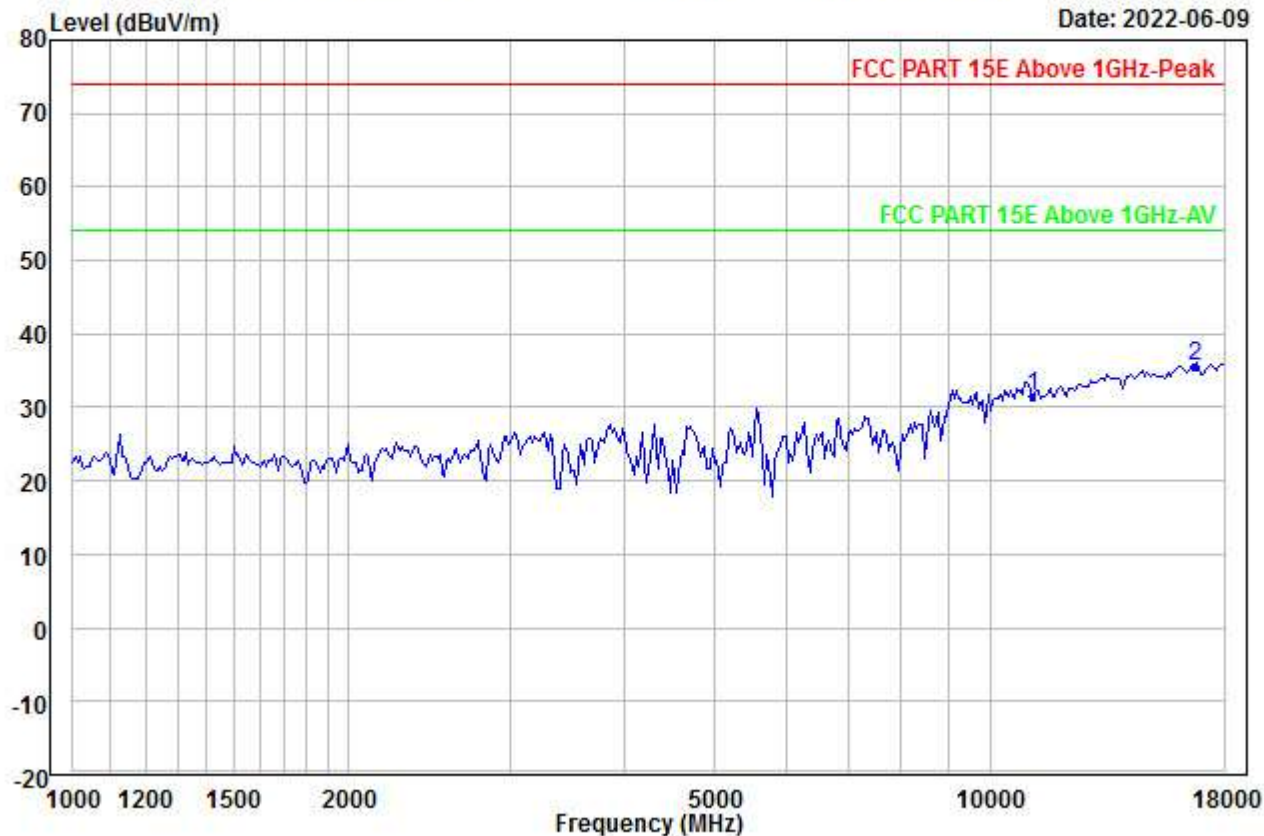


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5580
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	24.18	38.63	45.35	0.00	14.04	31.50	54.00	-22.50	---	---	Aver
2	PP16740.000	23.09	41.88	46.89	0.00	17.56	35.64	54.00	-18.36	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00067.EMI

Date: 2022-06-09

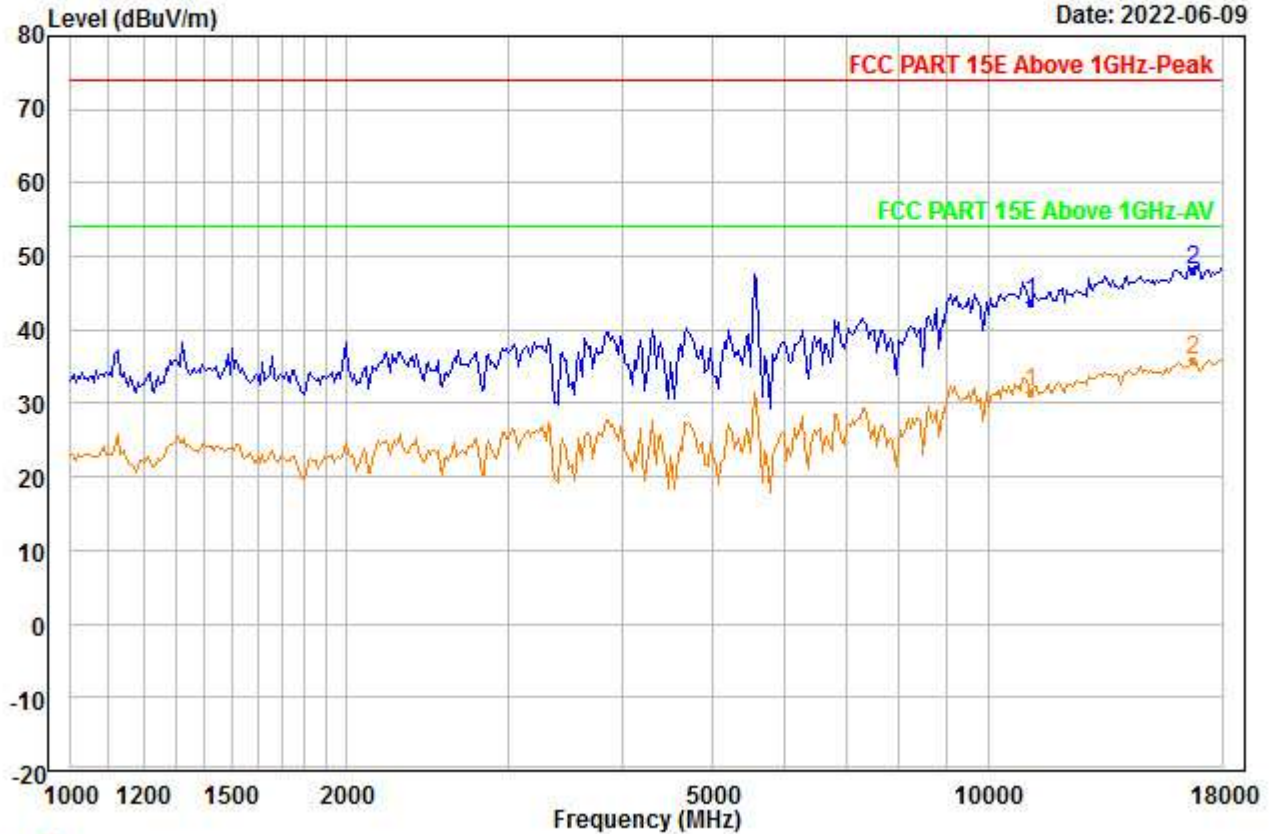


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5580
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	36.51	38.63	45.35	0.00	14.04	43.83	74.00	-30.17	---	---	Peak
2	PP16740.000	35.63	41.88	46.89	0.00	17.56	48.18	74.00	-25.82	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00068.EMI

Date: 2022-06-09

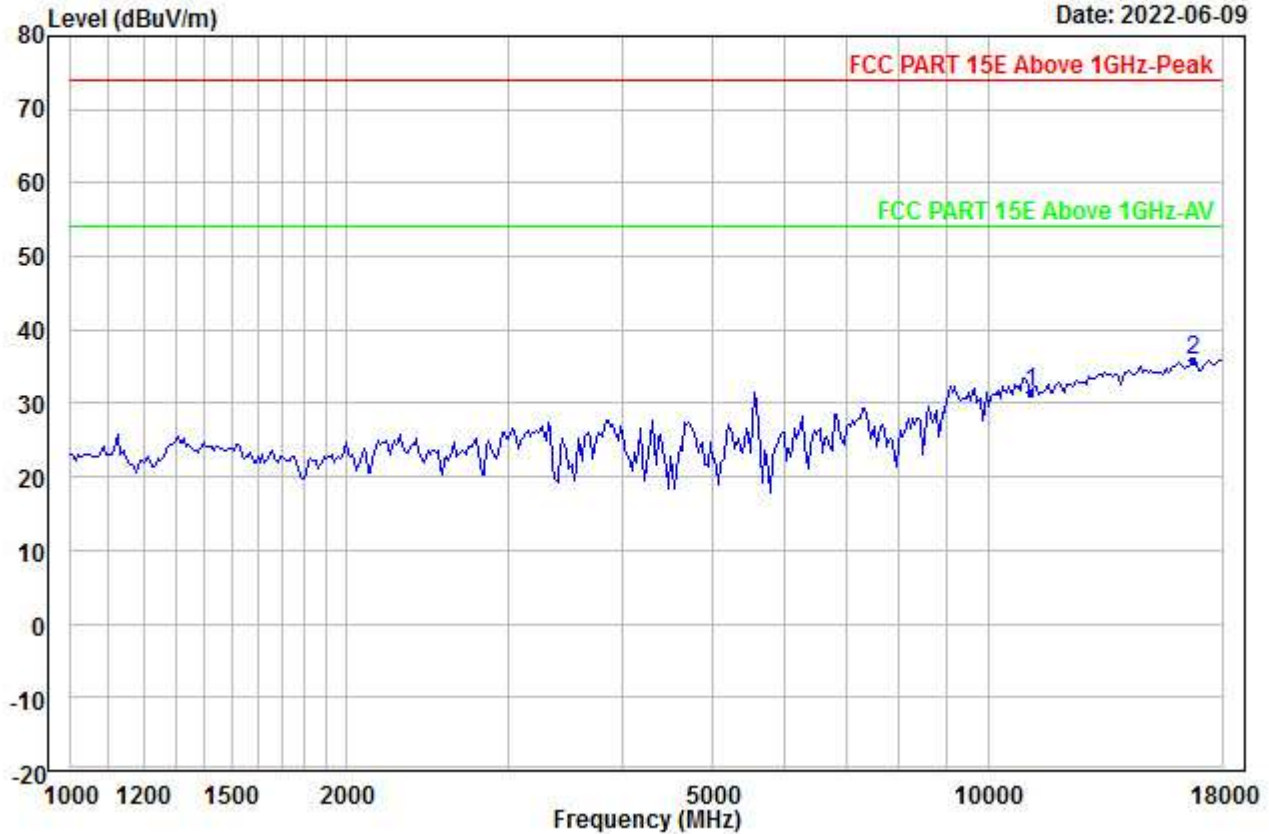


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5580
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	24.18	38.63	45.35	0.00	14.04	31.50	54.00	-22.50	---	---	Aver
2	PP16740.000	23.20	41.88	46.89	0.00	17.56	35.75	54.00	-18.25	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00069.EMI

Date: 2022-06-09

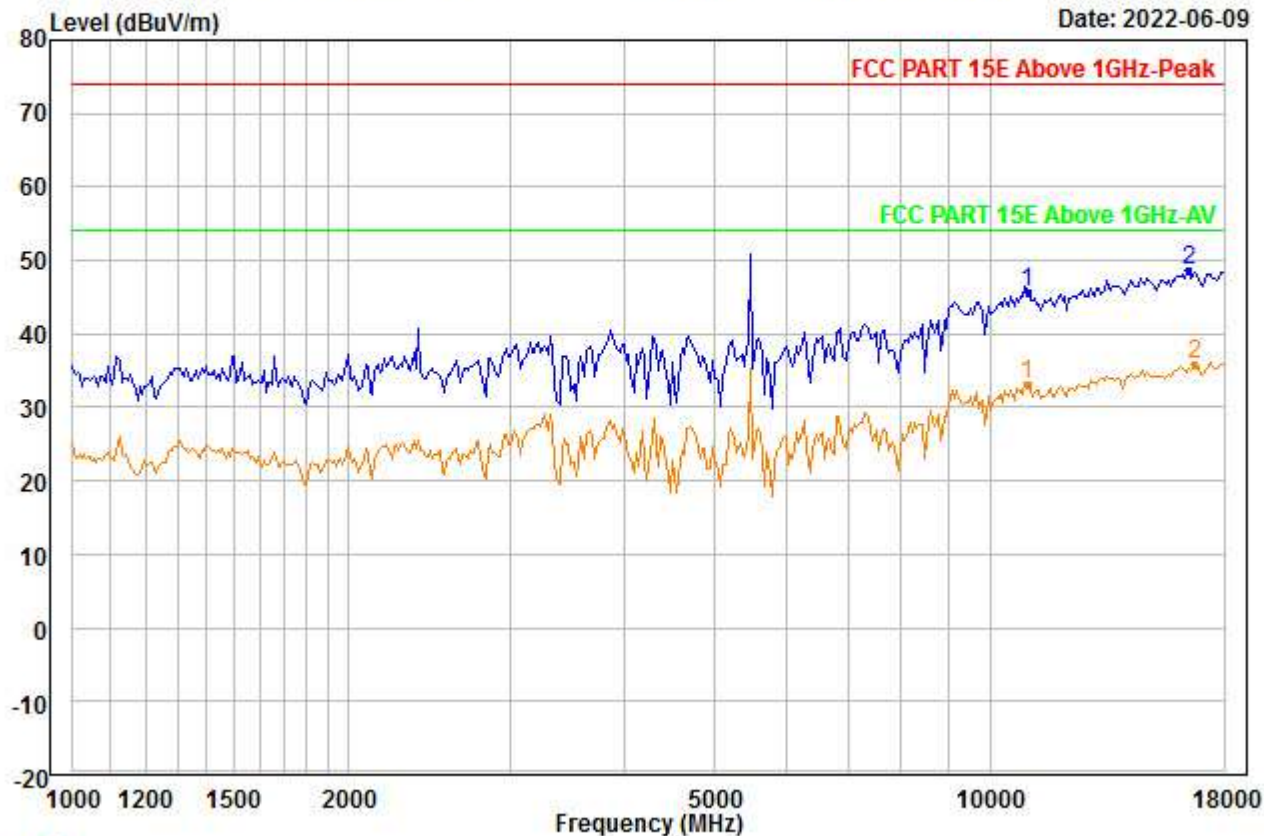


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5500
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	38.18	38.50	45.00	0.00	13.92	45.60	74.00	-28.40	---	---	Peak
2	PP16500.000	36.28	41.50	46.60	0.00	17.45	48.63	74.00	-25.37	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00070.EMI

Date: 2022-06-09

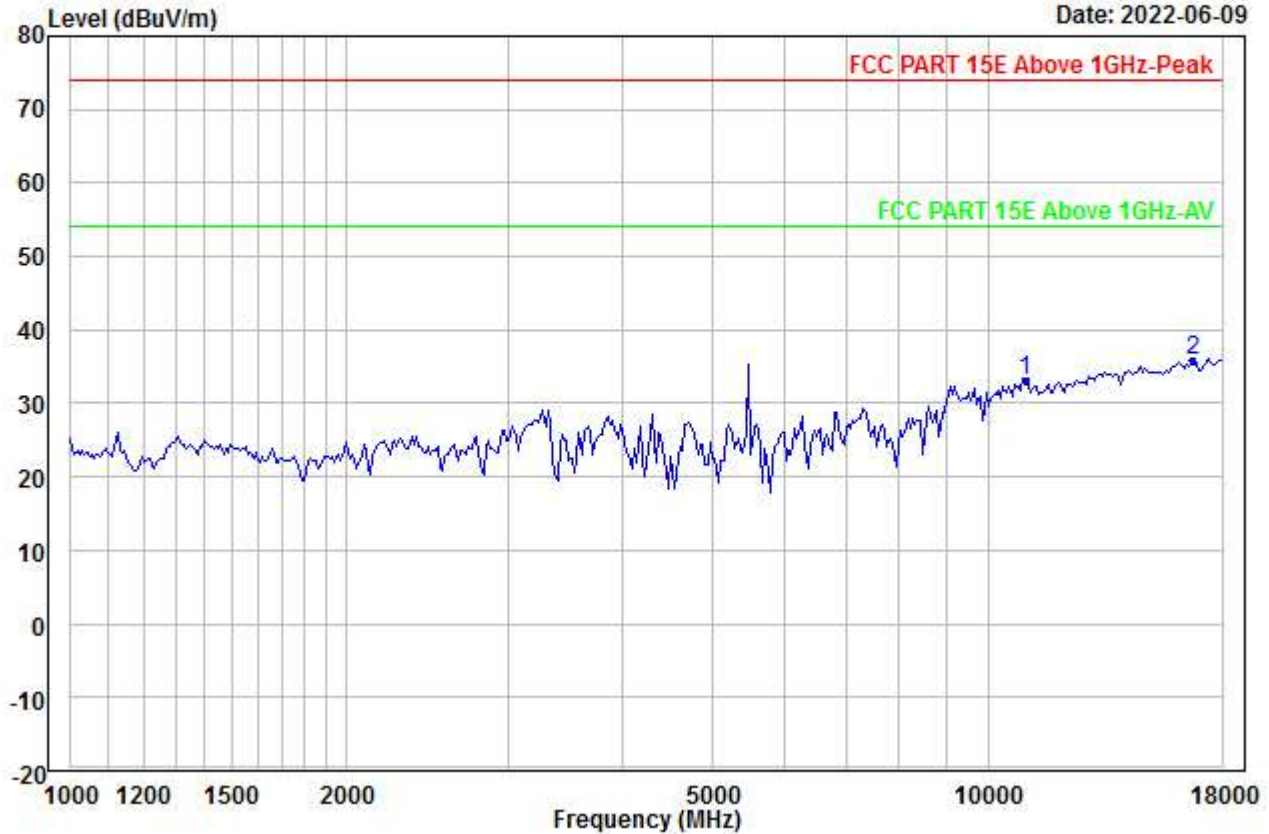


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	25.80	38.50	45.00	0.00	13.92	33.22	54.00	-20.78	---	---	Aver
2	PP16740.000	23.20	41.88	46.89	0.00	17.56	35.75	54.00	-18.25	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00071.EMI

Date: 2022-06-09

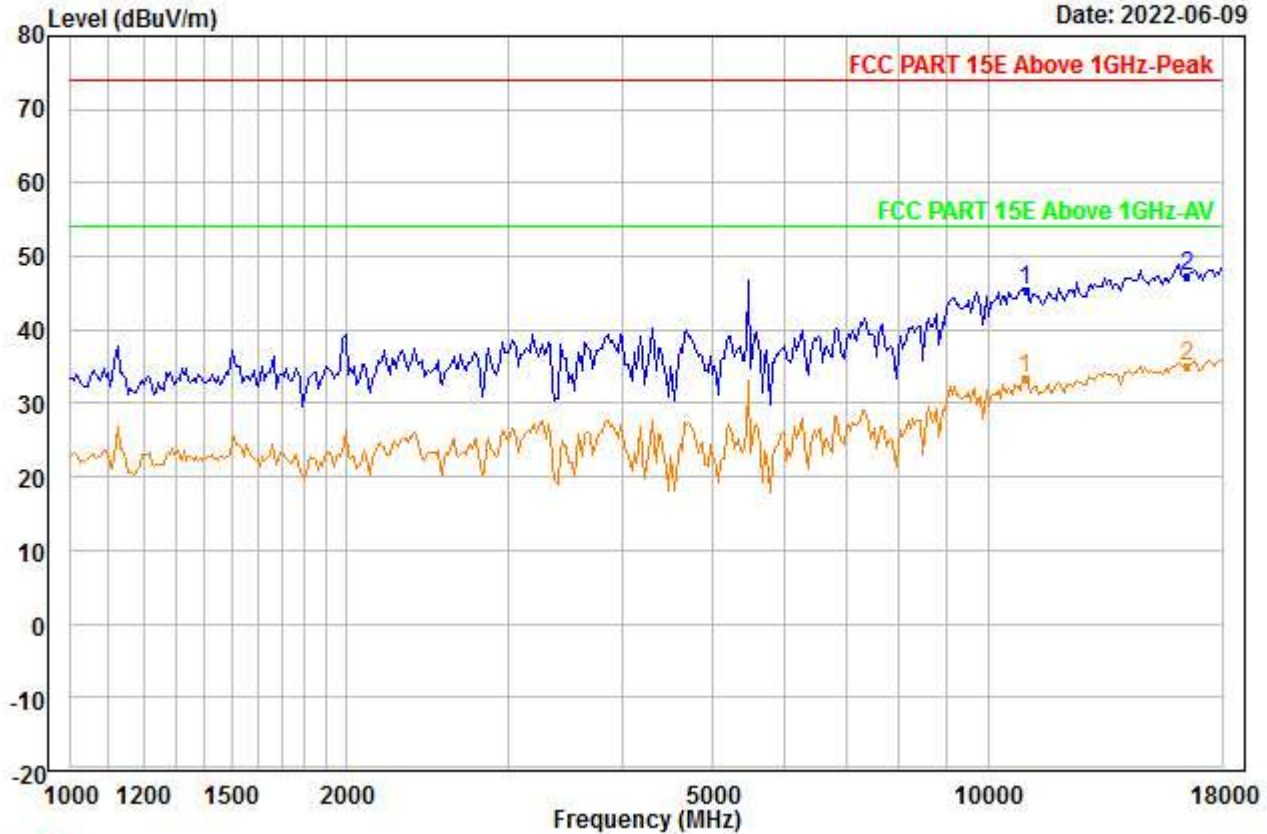


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5500
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	37.95	38.50	45.00	0.00	13.92	45.37	74.00	-28.63	---	---	Peak
2	PP16500.000	34.94	41.50	46.60	0.00	17.45	47.29	74.00	-26.71	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00072.EMI

Date: 2022-06-09

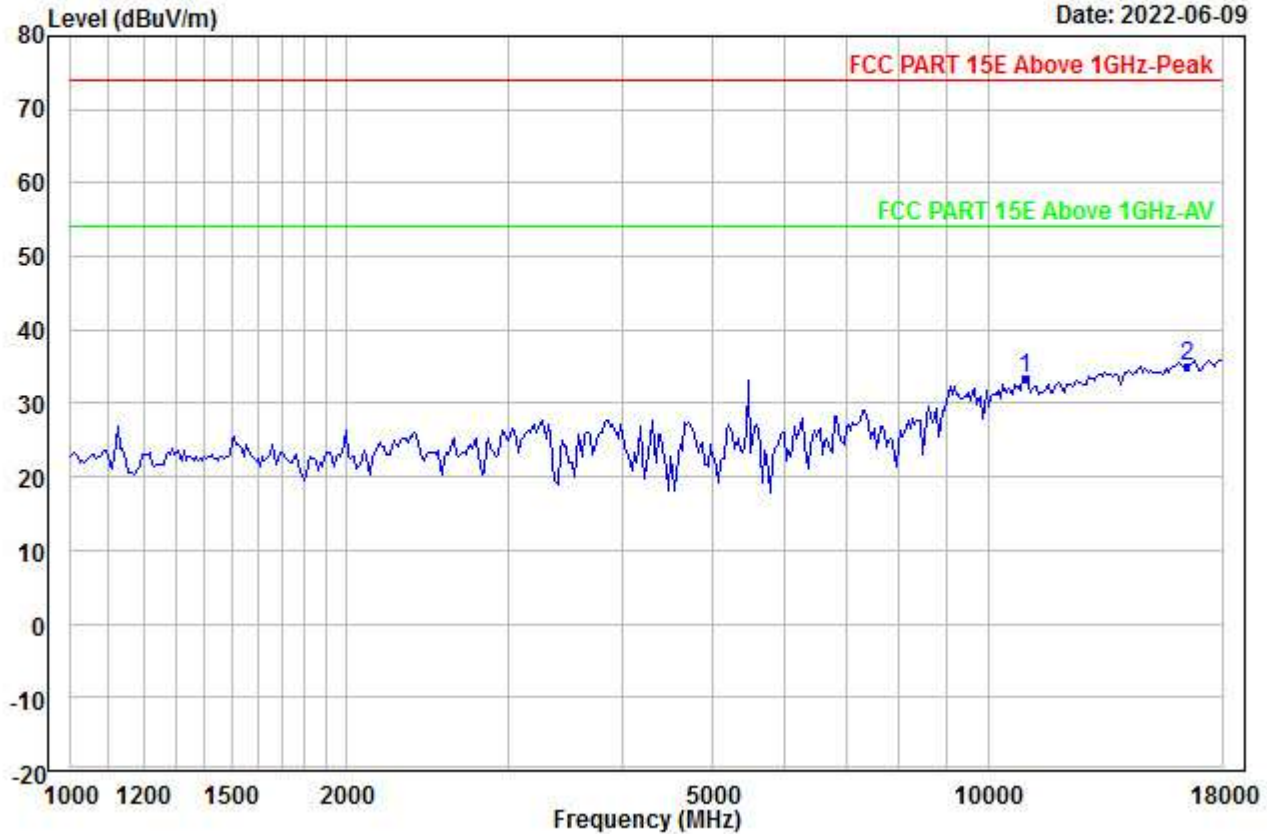


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	25.87	38.50	45.00	0.00	13.92	33.29	54.00	-20.71	---	---	Aver
2	PP16500.000	22.82	41.50	46.60	0.00	17.45	35.17	54.00	-18.83	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00073.EMI

Date: 2022-06-09

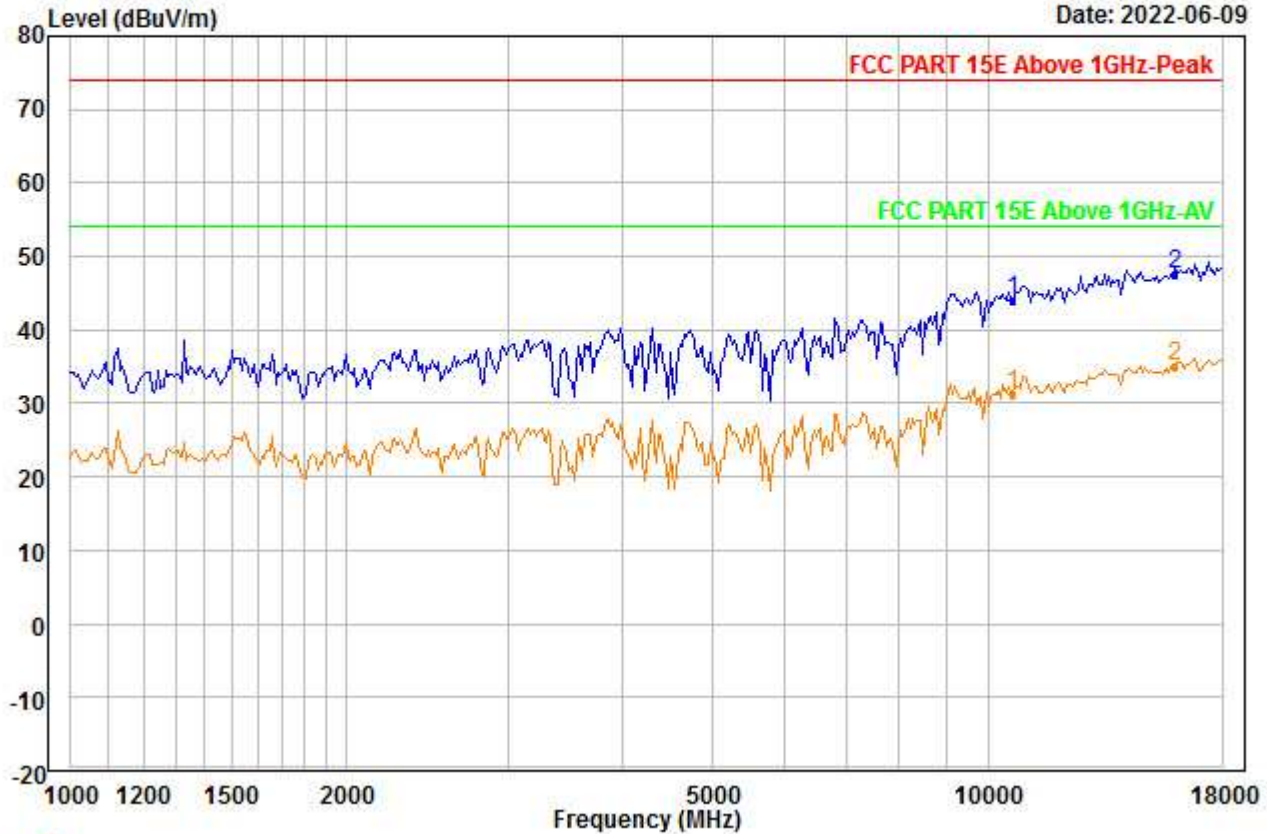


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5320
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	37.44	38.28	45.65	0.00	14.01	44.08	74.00	-29.92	---	---	Peak
2	PP15960.000	35.83	40.84	46.27	0.00	17.20	47.60	74.00	-26.40	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00074.EMI

Date: 2022-06-09

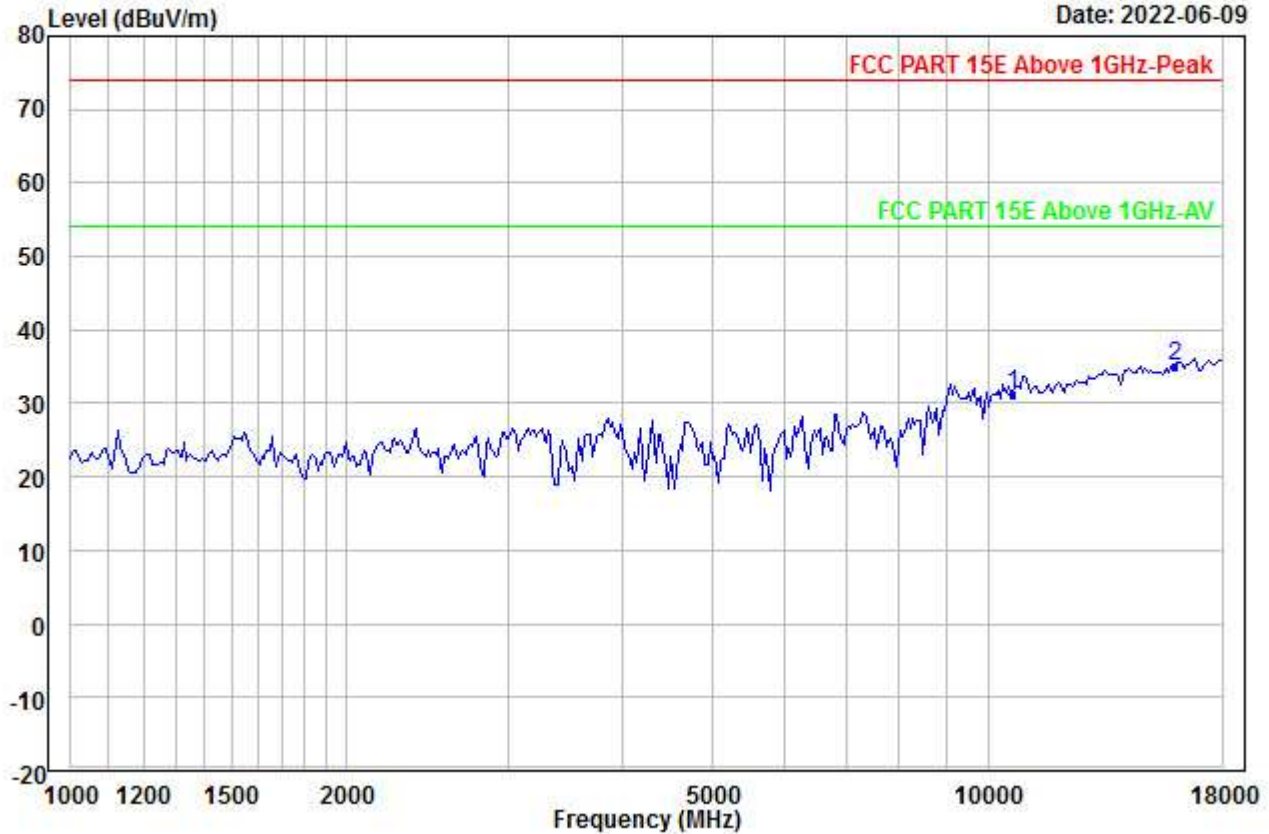


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5320
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.58	38.28	45.65	0.00	14.01	31.22	54.00	-22.78	---	---	Aver
2	PP15960.000	23.31	40.84	46.27	0.00	17.20	35.08	54.00	-18.92	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00075.EMI

Date: 2022-06-09

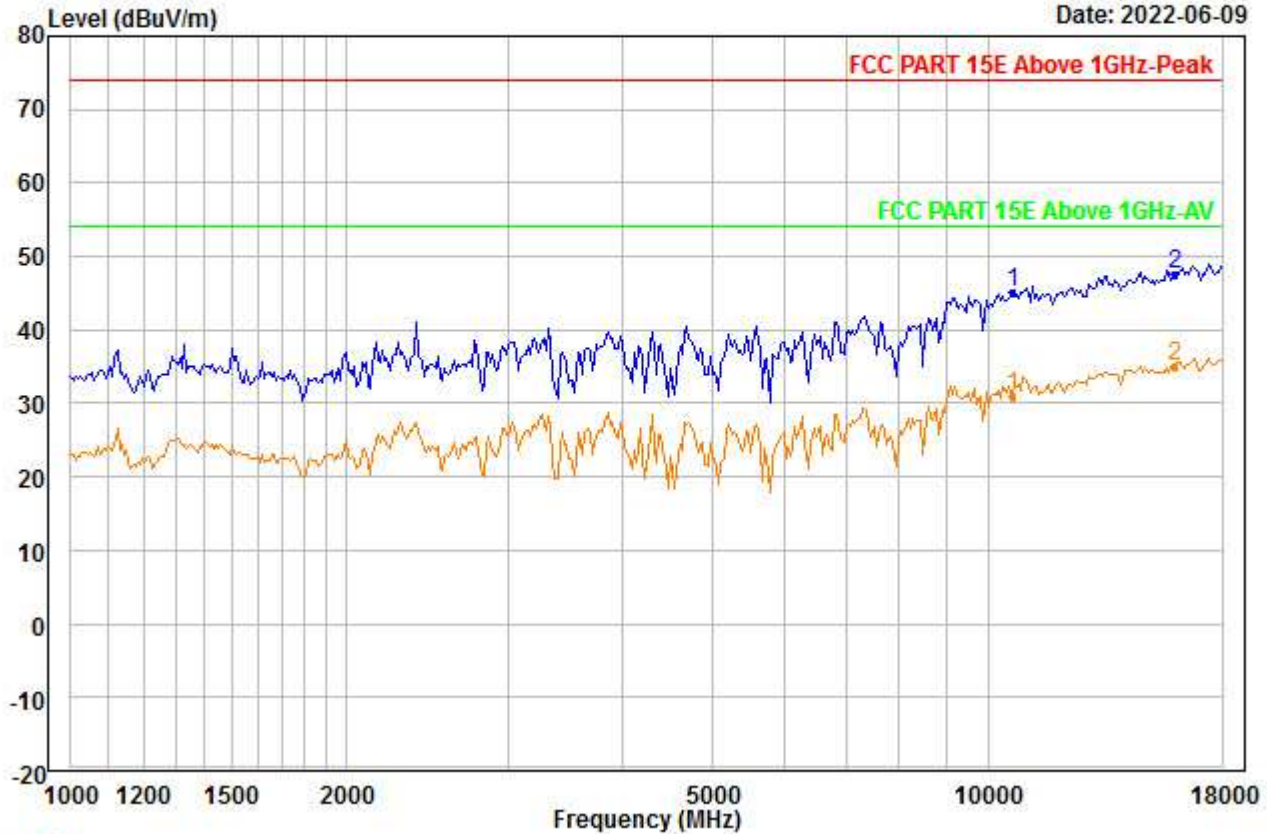


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5320
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	38.41	38.28	45.65	0.00	14.01	45.05	74.00	-28.95	---	---	Peak
2	PP15960.000	35.74	40.84	46.27	0.00	17.20	47.51	74.00	-26.49	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00076.EMI

Date: 2022-06-09

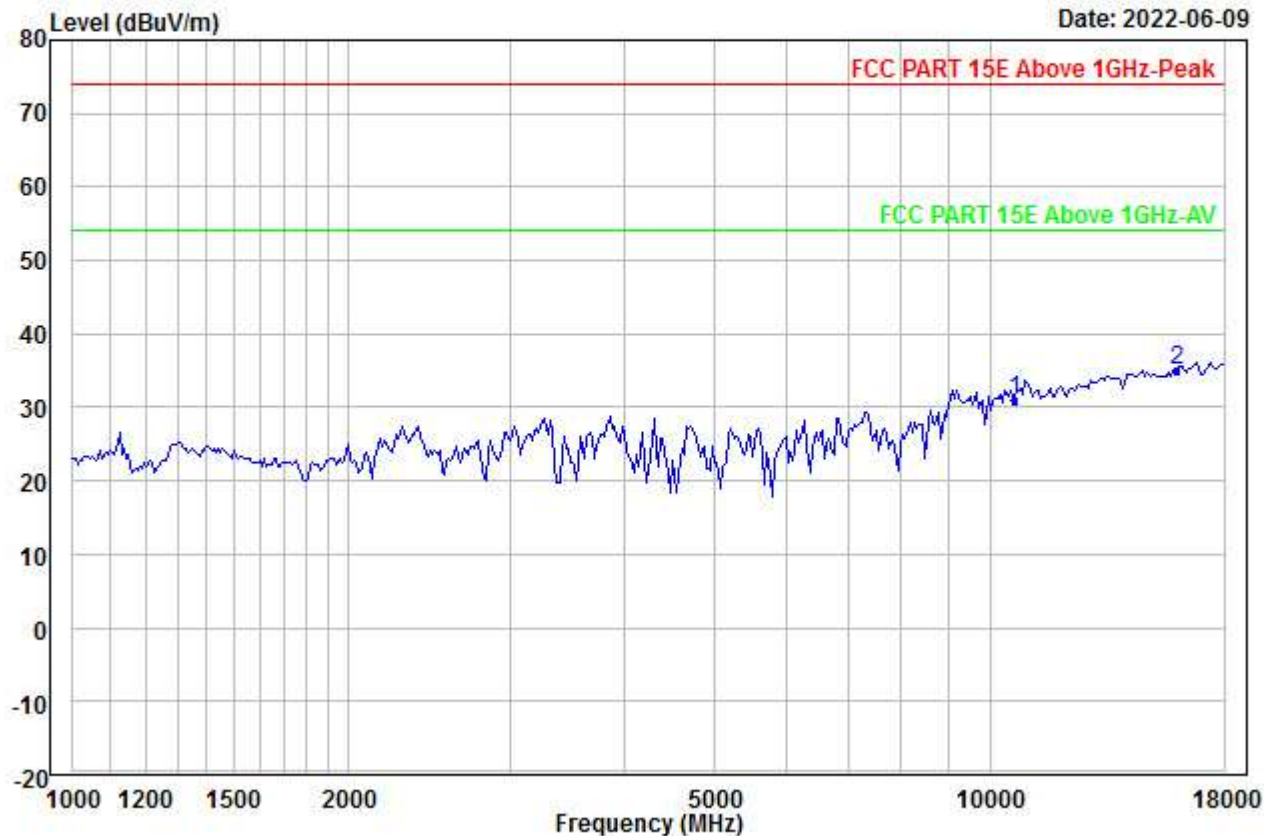


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5320
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.41	38.28	45.65	0.00	14.01	31.05	54.00	-22.95	---	---	Aver
2	PP15960.000	23.31	40.84	46.27	0.00	17.20	35.08	54.00	-18.92	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00077.EMI

Date: 2022-06-09

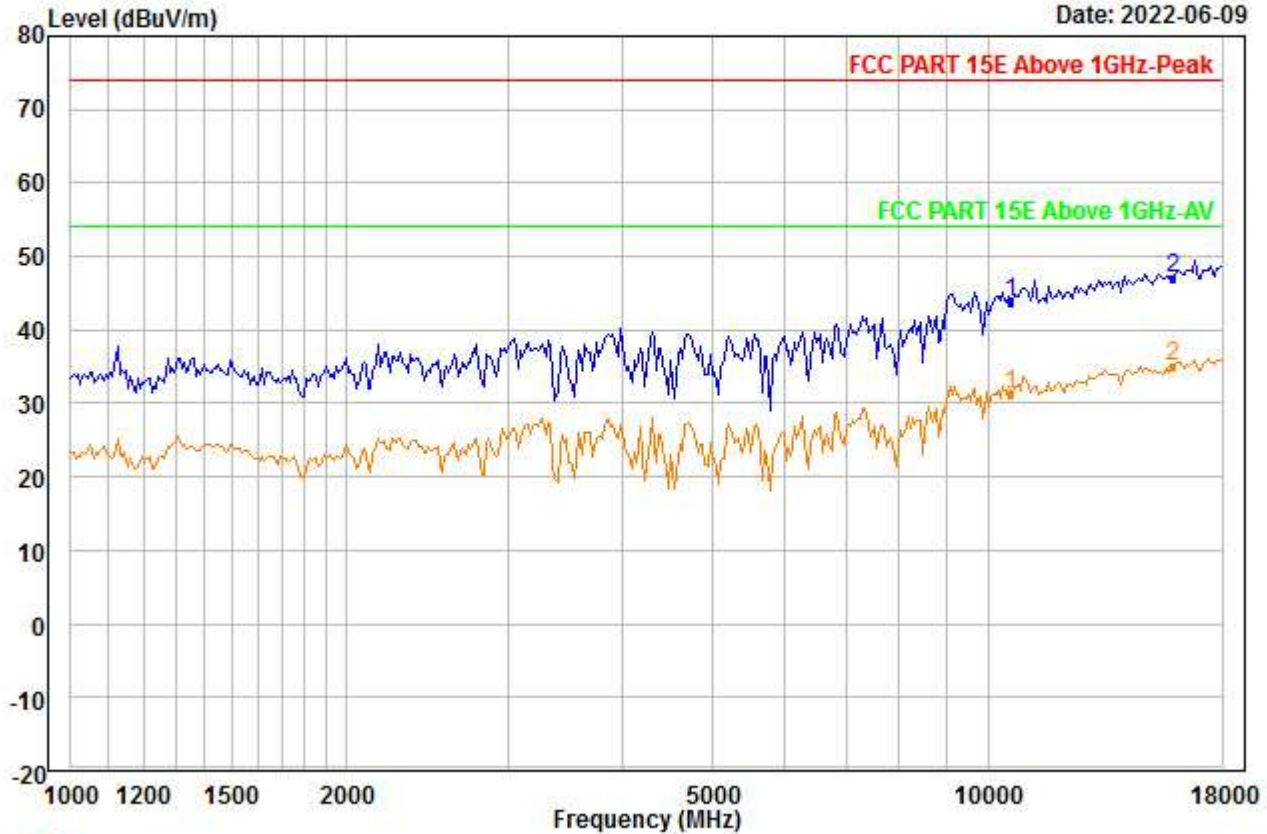


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5300
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	37.24	38.26	45.72	0.00	14.02	43.80	74.00	-30.20	---	---	Peak
2	PP15900.000	35.18	40.76	46.22	0.00	17.17	46.89	74.00	-27.11	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00078.EMI

Date: 2022-06-09

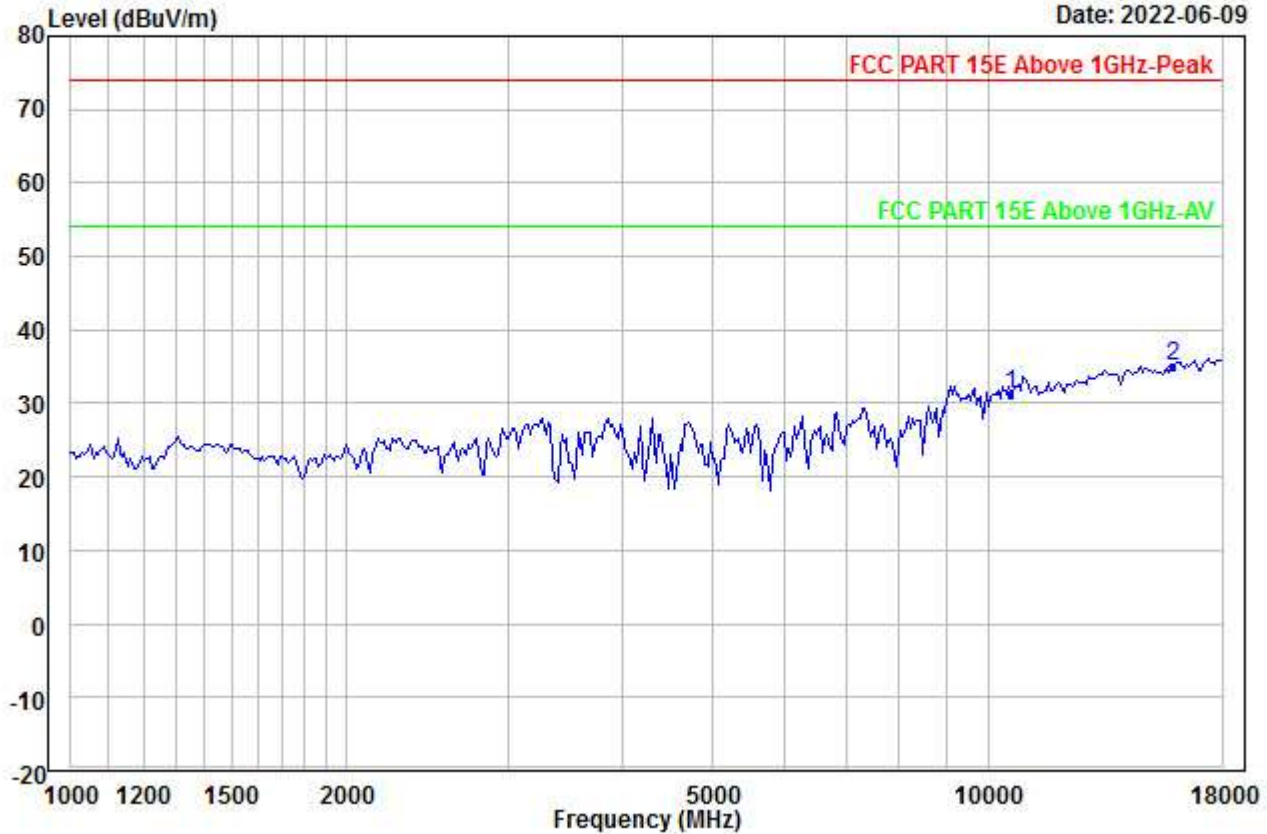


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5300
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	24.58	38.26	45.72	0.00	14.02	31.14	54.00	-22.86	---	---	Aver
2	PP15900.000	23.27	40.76	46.22	0.00	17.17	34.98	54.00	-19.02	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00079.EMI

Date: 2022-06-09

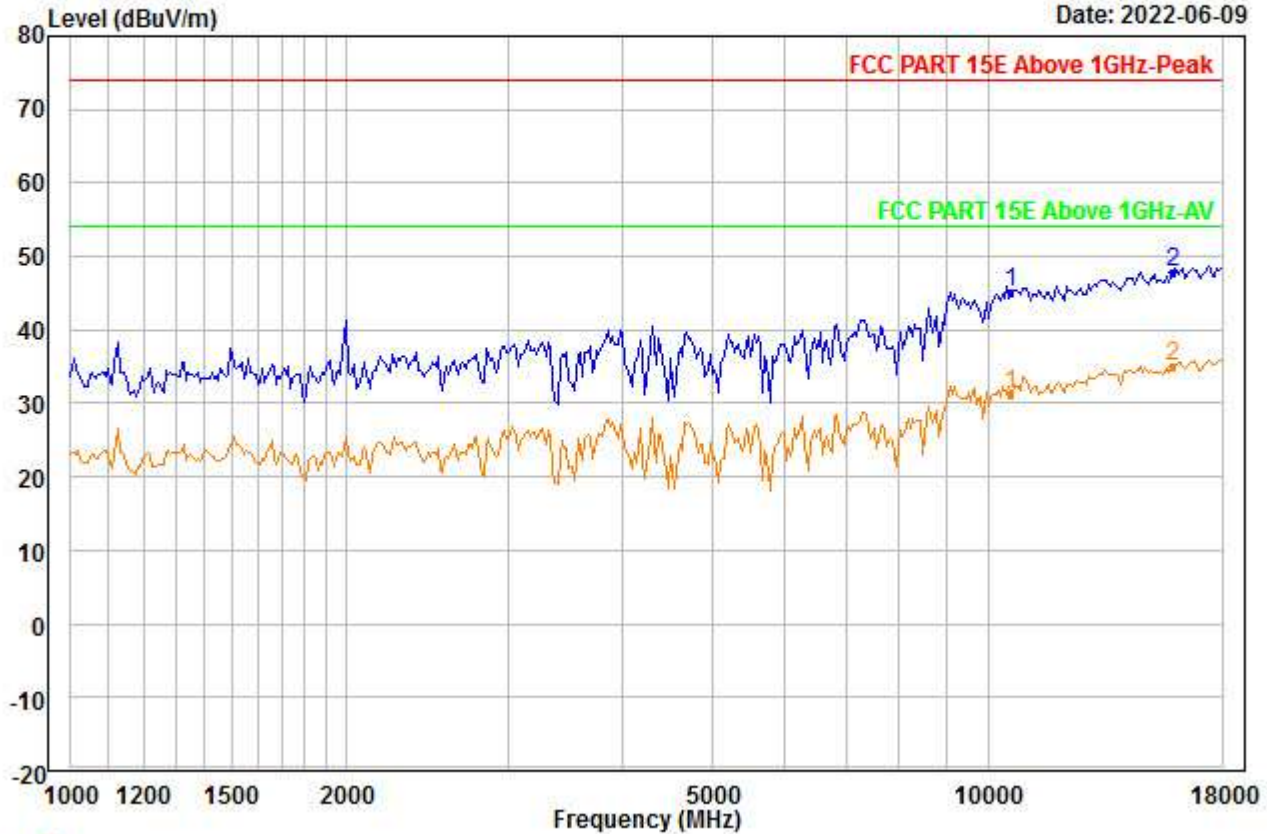


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5300
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	38.56	38.26	45.72	0.00	14.02	45.12	74.00	-28.88	---	---	Peak
2	PP15900.000	36.03	40.76	46.22	0.00	17.17	47.74	74.00	-26.26	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00080.EMI

Date: 2022-06-09

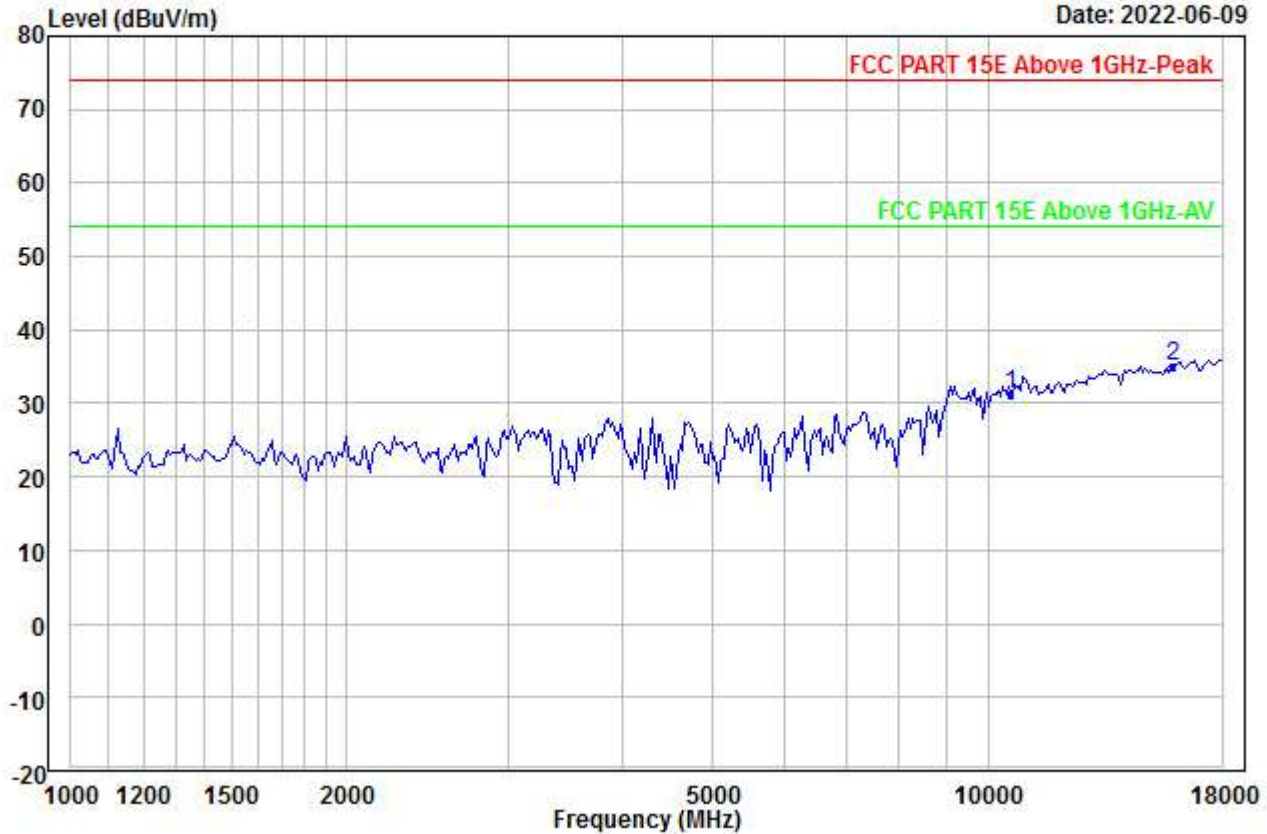


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5300
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	24.66	38.26	45.72	0.00	14.02	31.22	54.00	-22.78	---	---	Aver
2	PP15900.000	23.37	40.76	46.22	0.00	17.17	35.08	54.00	-18.92	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00081.EMI

Date: 2022-06-09

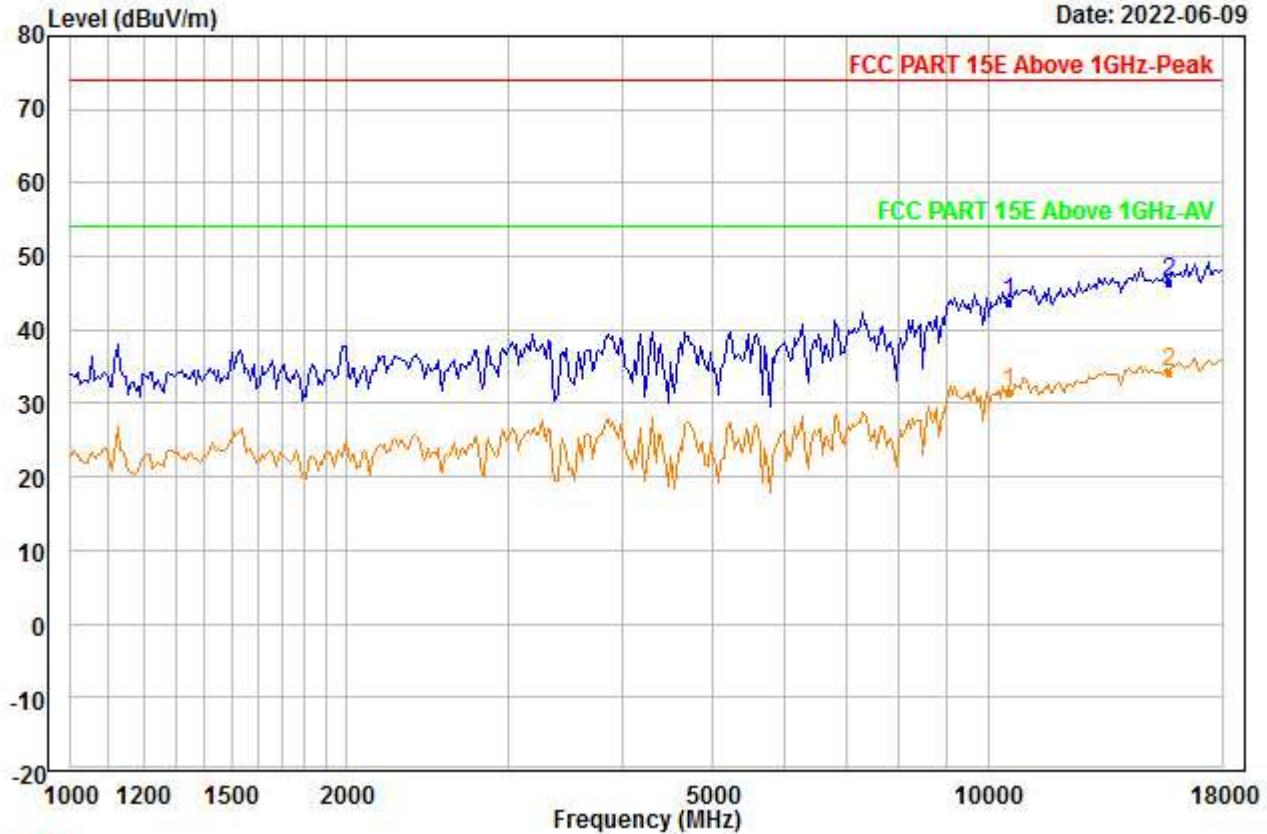


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5260
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	37.29	38.21	45.86	0.00	14.04	43.68	74.00	-30.32	---	---	Peak
2	PP15780.000	34.90	40.59	46.12	0.00	17.09	46.46	74.00	-27.54	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00082.EMI

Date: 2022-06-09

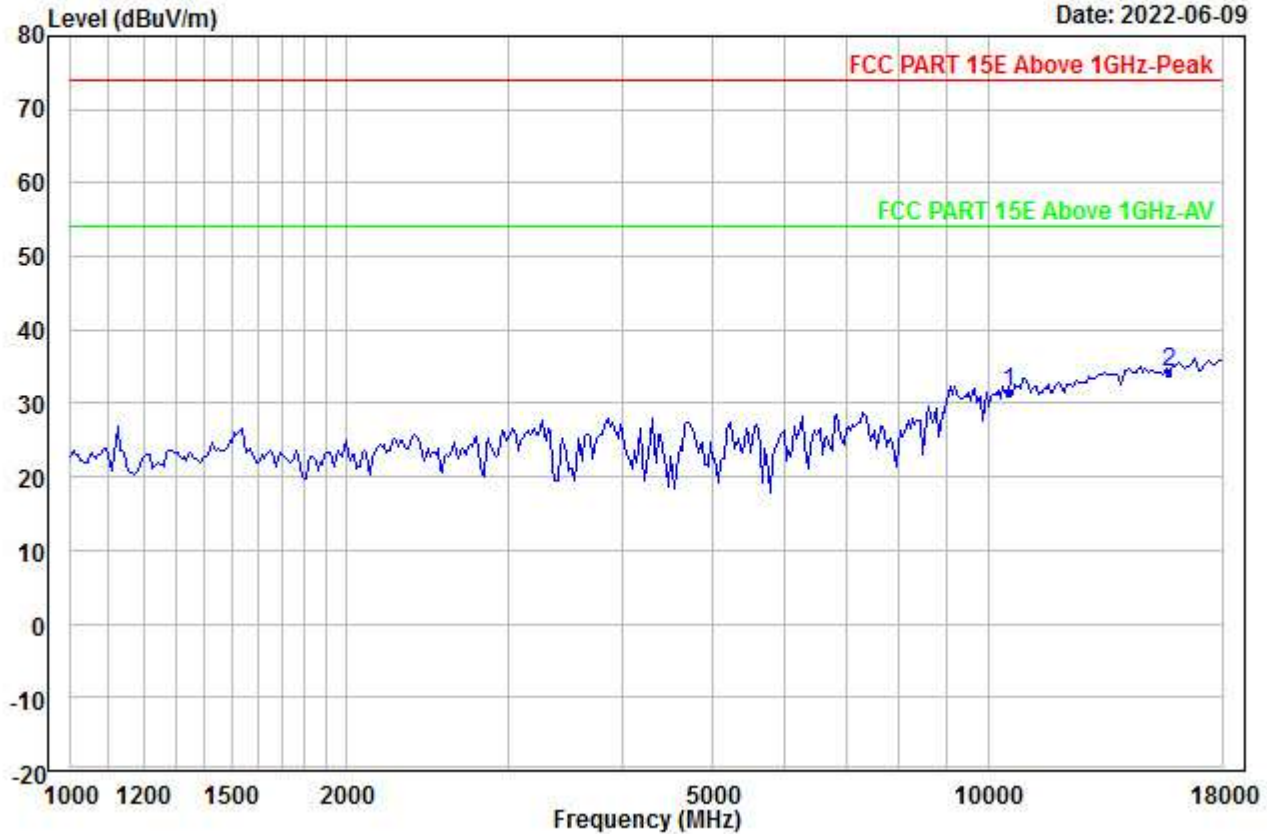


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	25.07	38.21	45.86	0.00	14.04	31.46	54.00	-22.54	---	---	Aver
2	PP15780.000	22.78	40.59	46.12	0.00	17.09	34.34	54.00	-19.66	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00083.EMI

Date: 2022-06-09

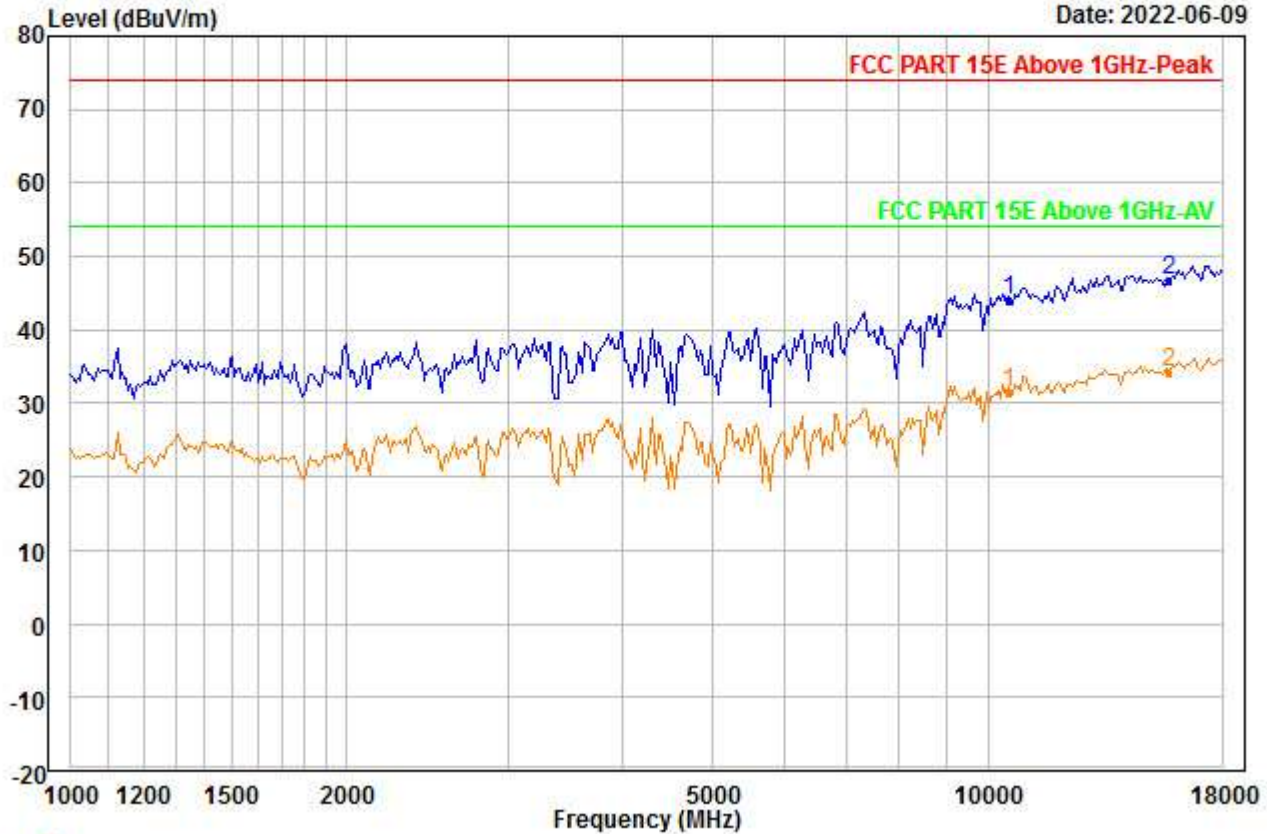


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5260
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	37.73	38.21	45.86	0.00	14.04	44.12	74.00	-29.88	---	---	Peak
2	PP15780.000	35.31	40.59	46.12	0.00	17.09	46.87	74.00	-27.13	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00084.EMI

Date: 2022-06-09

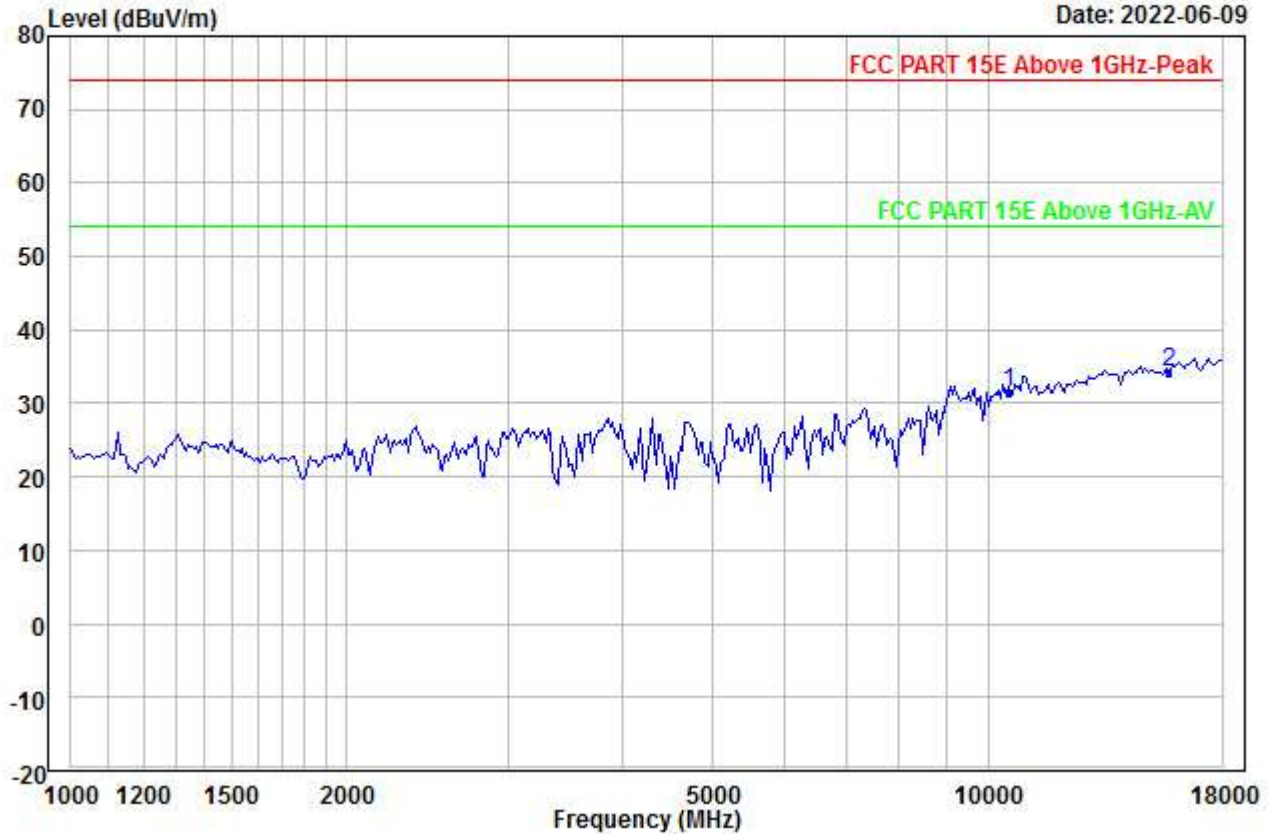


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	25.07	38.21	45.86	0.00	14.04	31.46	54.00	-22.54	---	---	Aver
2	PP15780.000	22.68	40.59	46.12	0.00	17.09	34.24	54.00	-19.76	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00085.EMI

Date: 2022-06-09

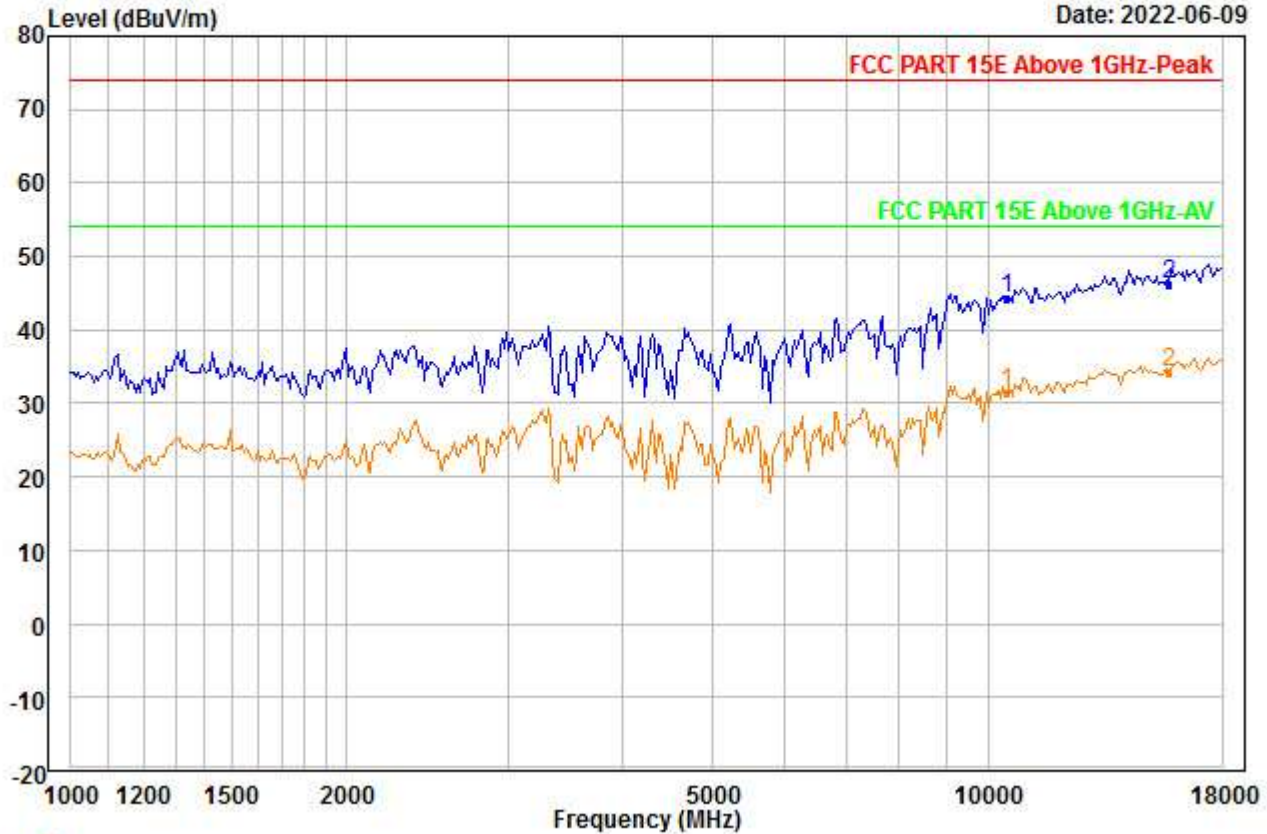


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5240
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	37.94	38.19	45.91	0.00	14.05	44.27	74.00	-29.73	---	---	Peak
2	PP15720.000	34.77	40.51	46.08	0.00	17.05	46.25	74.00	-27.75	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00086.EMI

Date: 2022-06-09

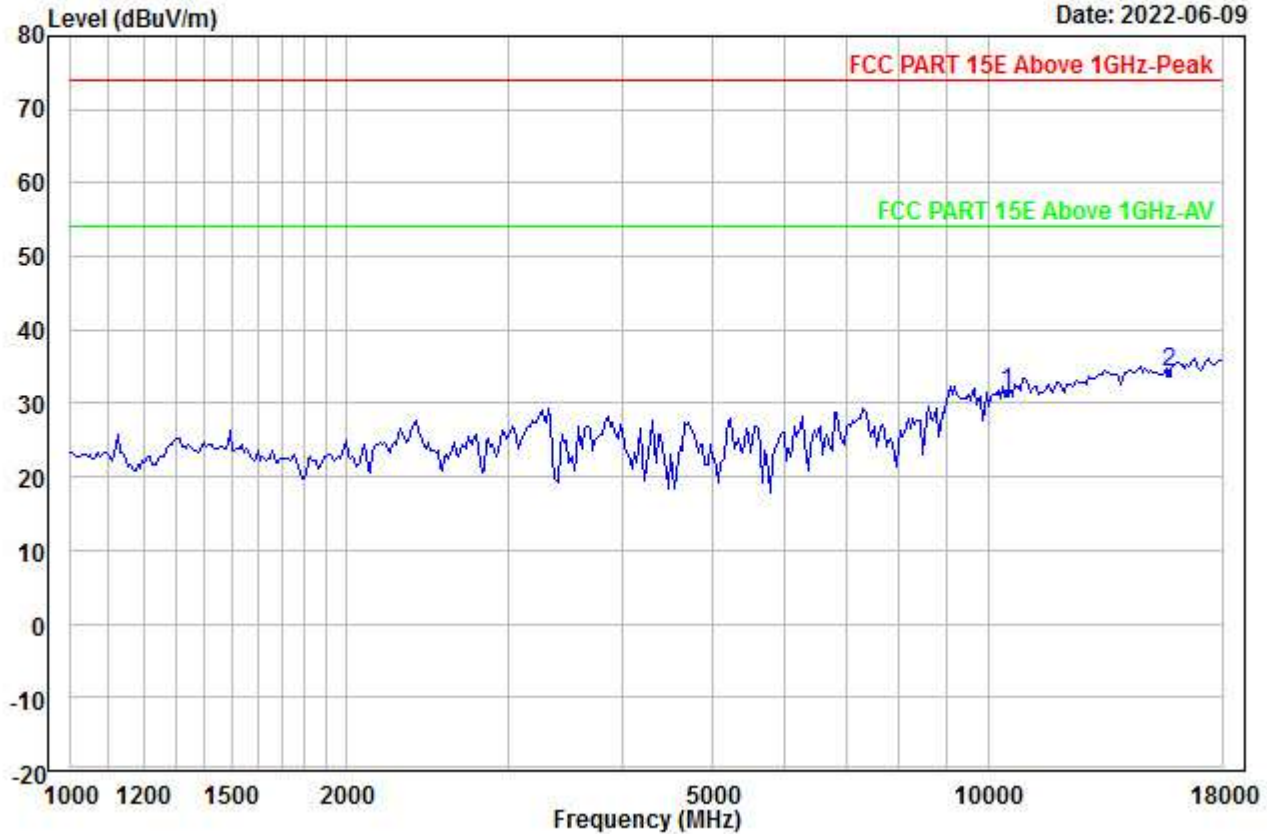


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5240
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	25.04	38.19	45.91	0.00	14.05	31.37	54.00	-22.63	---	---	Aver
2	PP15720.000	22.86	40.51	46.08	0.00	17.05	34.34	54.00	-19.66	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00087.EMI

Date: 2022-06-09

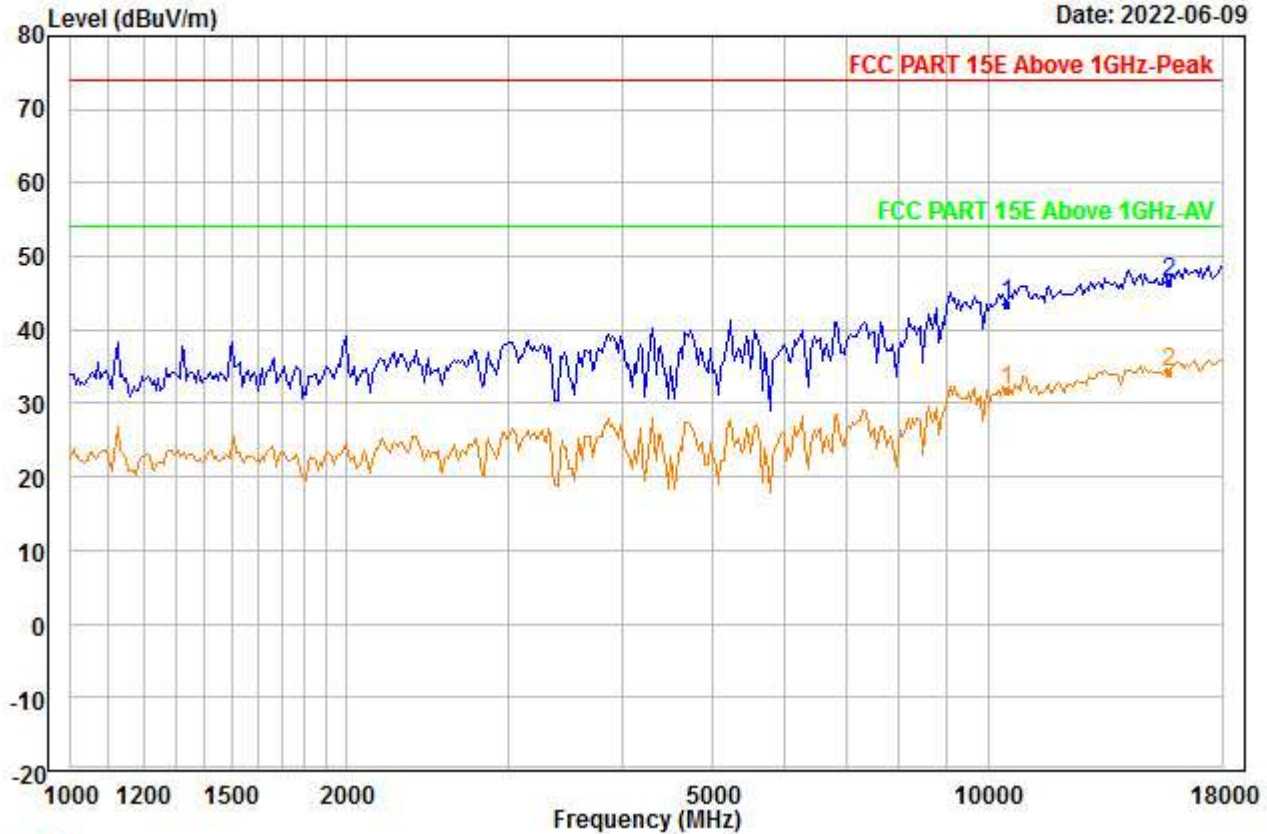


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5240
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	37.15	38.19	45.91	0.00	14.05	43.48	74.00	-30.52	---	---	Peak
2	PP15720.000	34.98	40.51	46.08	0.00	17.05	46.46	74.00	-27.54	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00088.EMI

Date: 2022-06-09

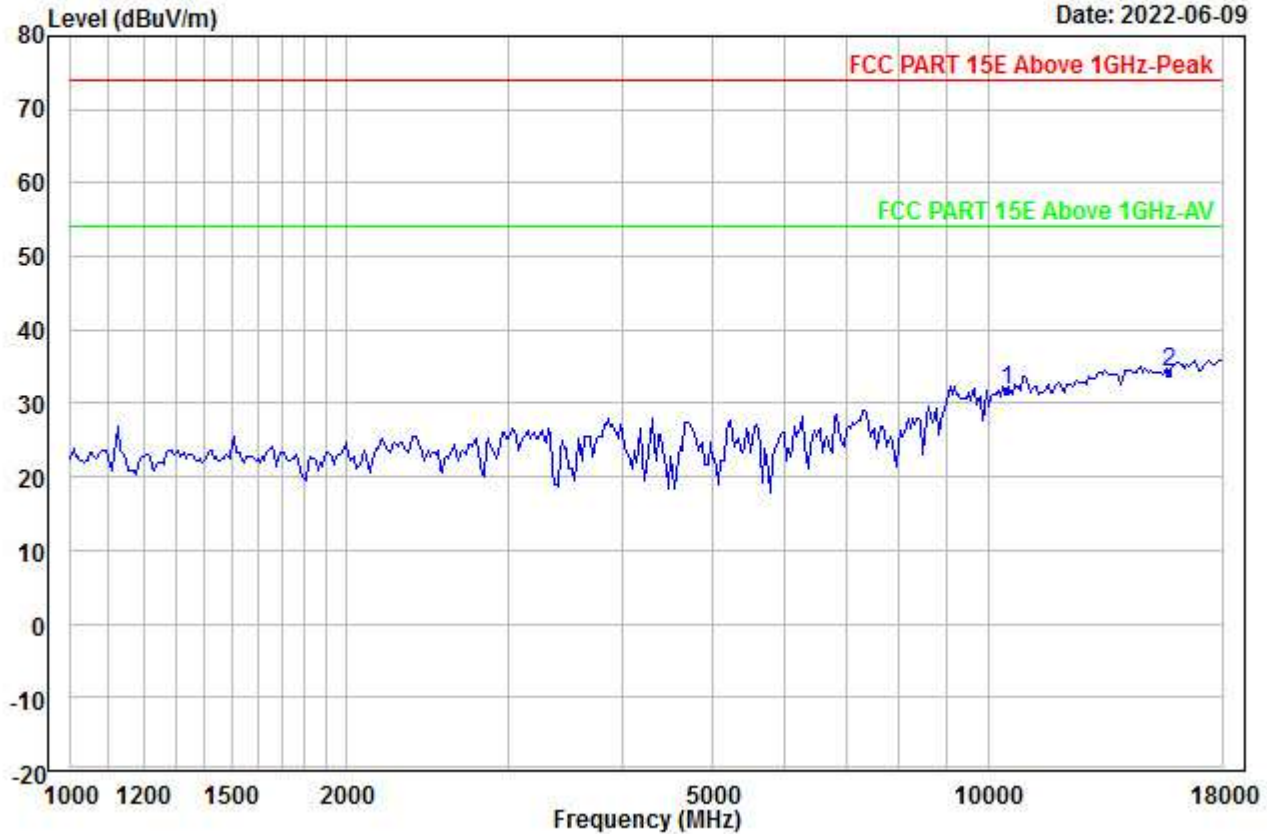


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5240
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	25.36	38.19	45.91	0.00	14.05	31.69	54.00	-22.31	---	---	Aver
2	PP15720.000	22.86	40.51	46.08	0.00	17.05	34.34	54.00	-19.66	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00089.EMI

Date: 2022-06-09

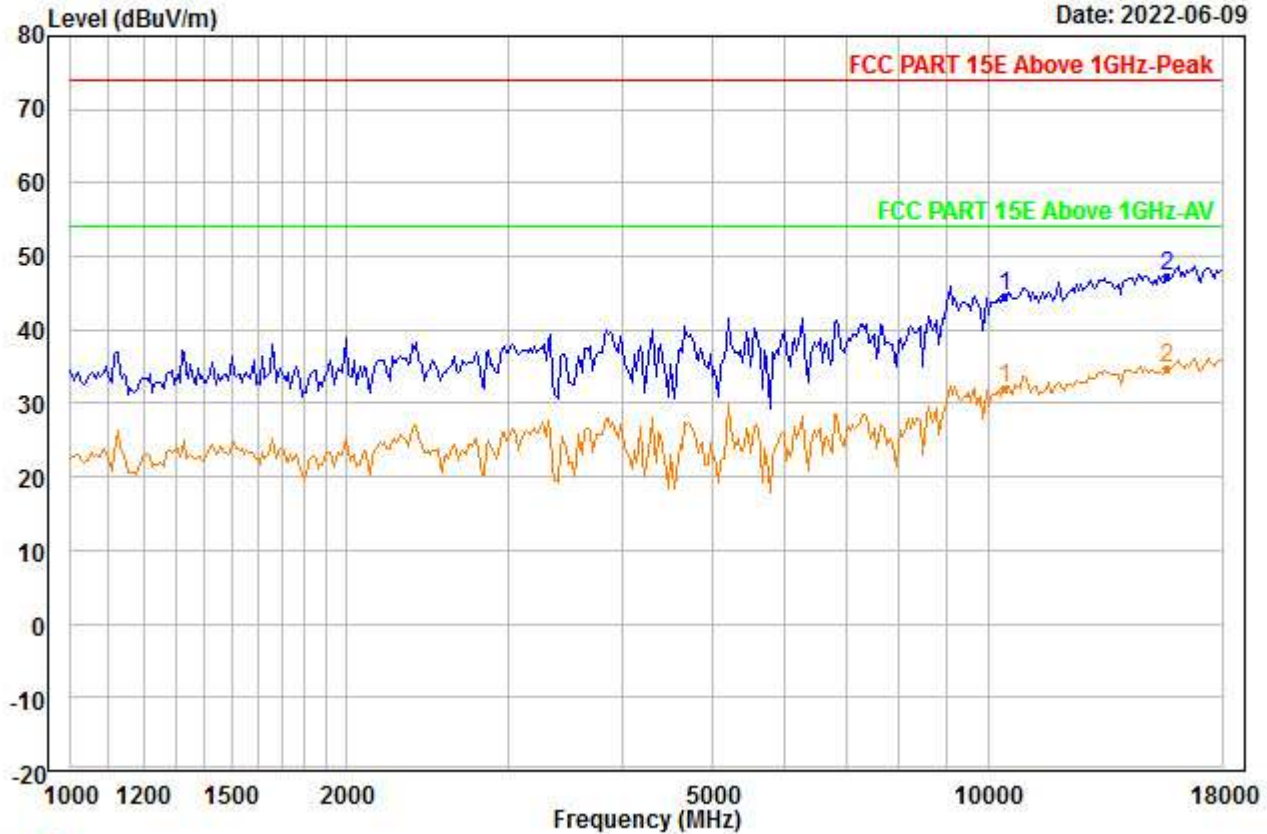


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5220
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	38.17	38.16	45.92	0.00	14.06	44.47	74.00	-29.53	---	---	Peak
2	PP15660.000	35.91	40.42	46.03	0.00	17.01	47.31	74.00	-26.69	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00090.EMI

Date: 2022-06-09

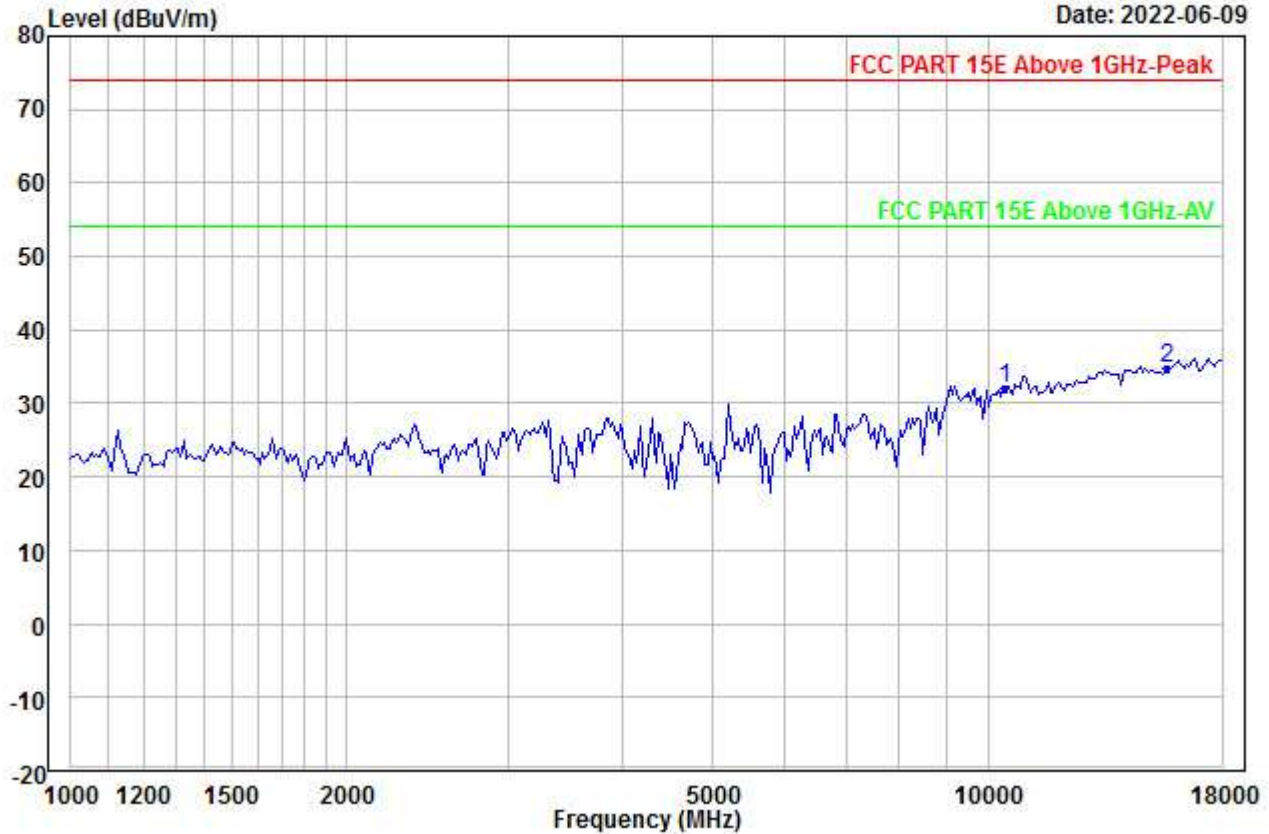


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5220
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	25.65	38.16	45.92	0.00	14.06	31.95	54.00	-22.05	---	---	Aver
2	PP15660.000	23.34	40.42	46.03	0.00	17.01	34.74	54.00	-19.26	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00091.EMI

Date: 2022-06-09

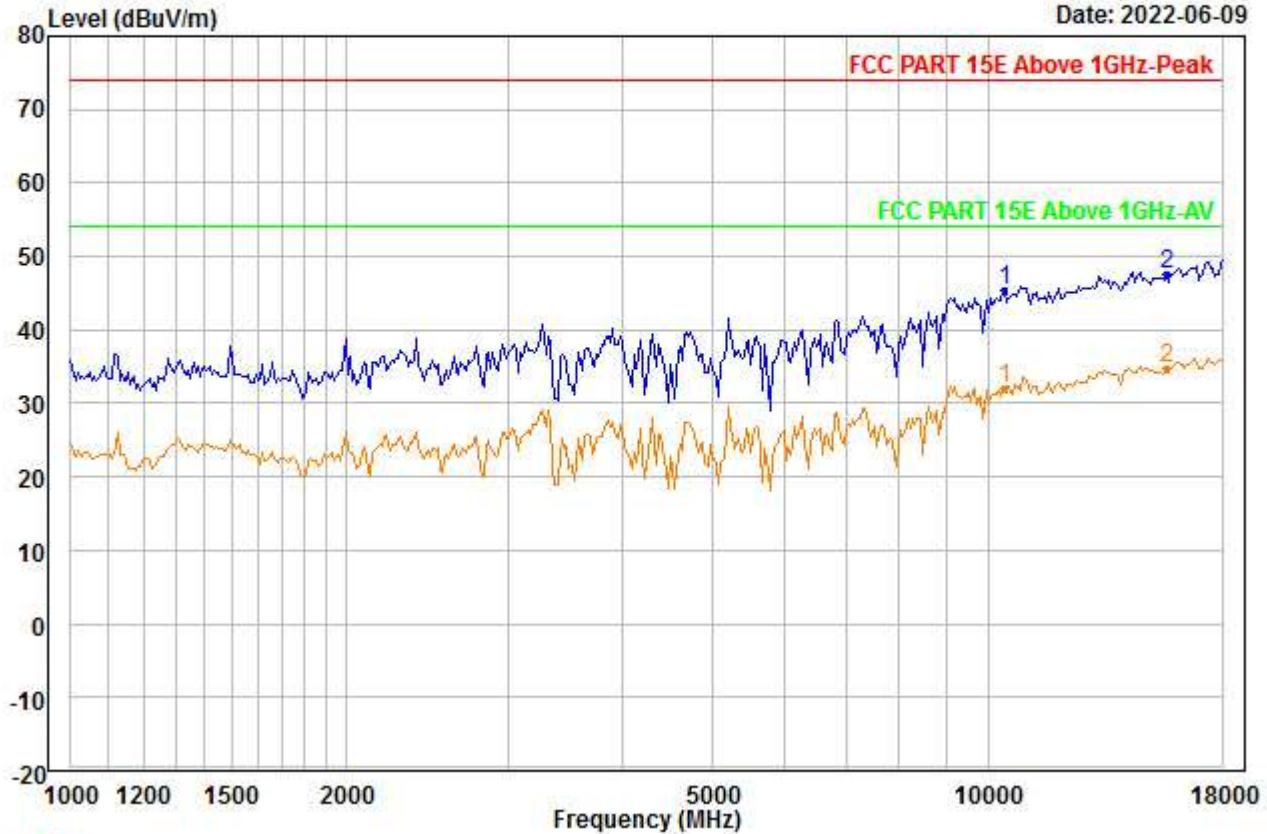


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5220
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	39.20	38.16	45.92	0.00	14.06	45.50	74.00	-28.50	---	---	Peak
2	PP15660.000	36.20	40.42	46.03	0.00	17.01	47.60	74.00	-26.40	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00092.EMI

Date: 2022-06-09

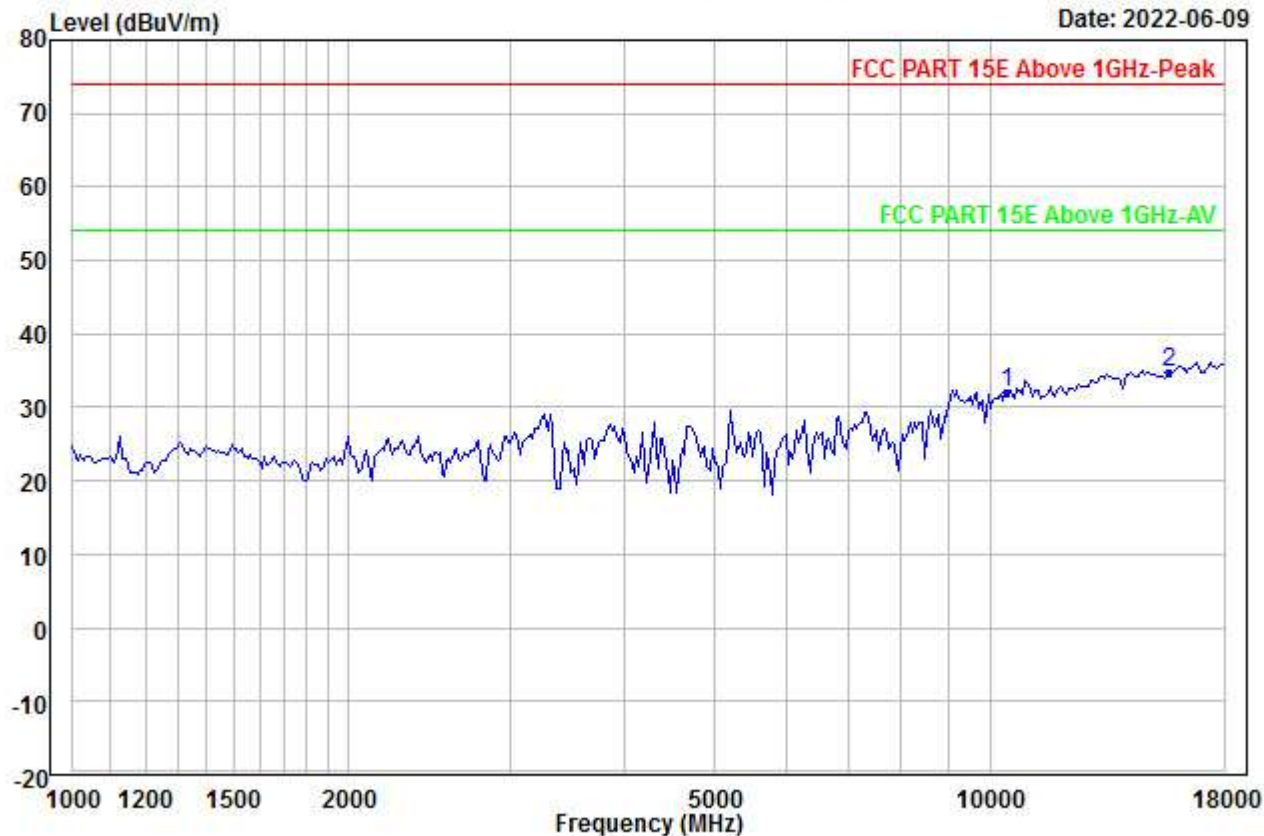


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5220
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	25.65	38.16	45.92	0.00	14.06	31.95	54.00	-22.05	---	---	Aver
2	PP15660.000	23.34	40.42	46.03	0.00	17.01	34.74	54.00	-19.26	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00093.EMI

Date: 2022-06-09

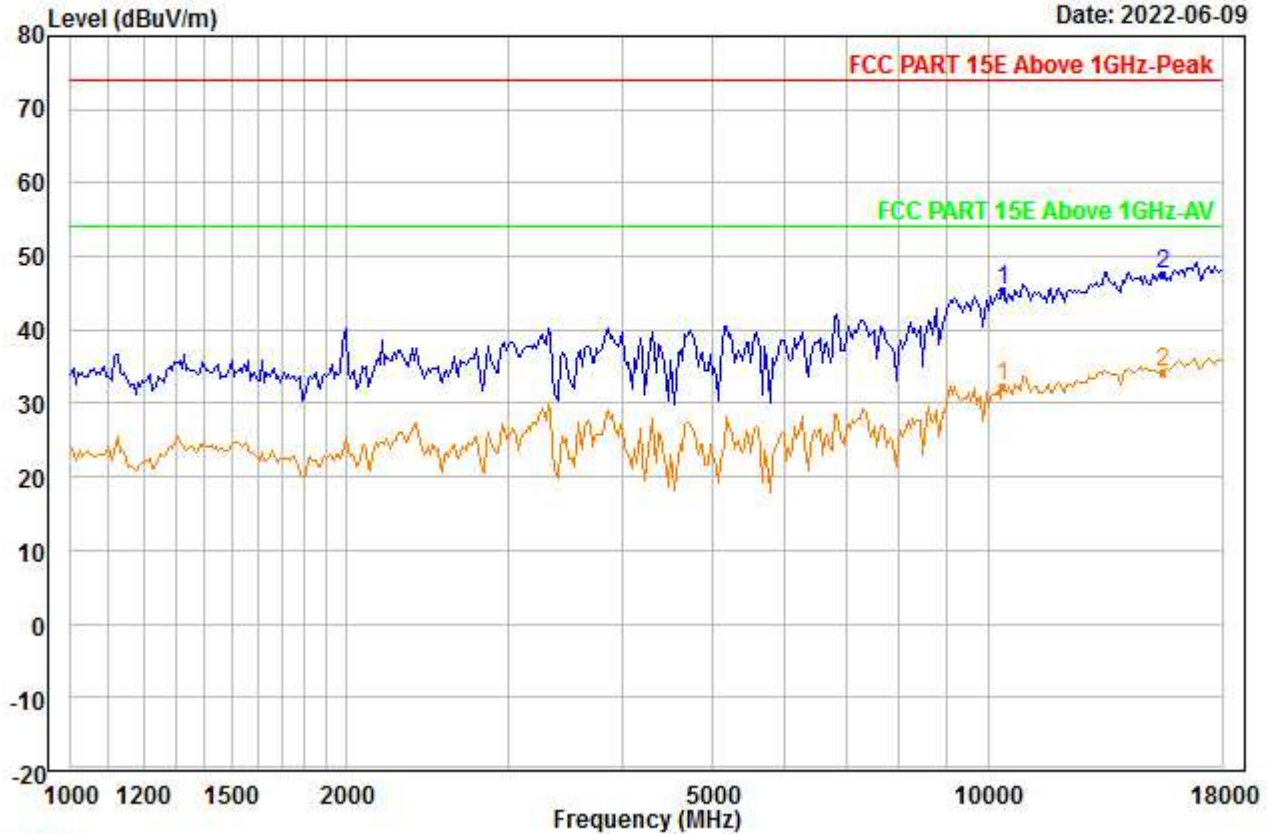


Trace: 1

Condition : Vertical
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5180
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	39.12	38.12	45.96	0.00	14.08	45.36	74.00	-28.64	---	---	Peak
2	PP15540.000	36.20	40.26	45.93	0.00	16.94	47.47	74.00	-26.53	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00094.EMI

Date: 2022-06-09

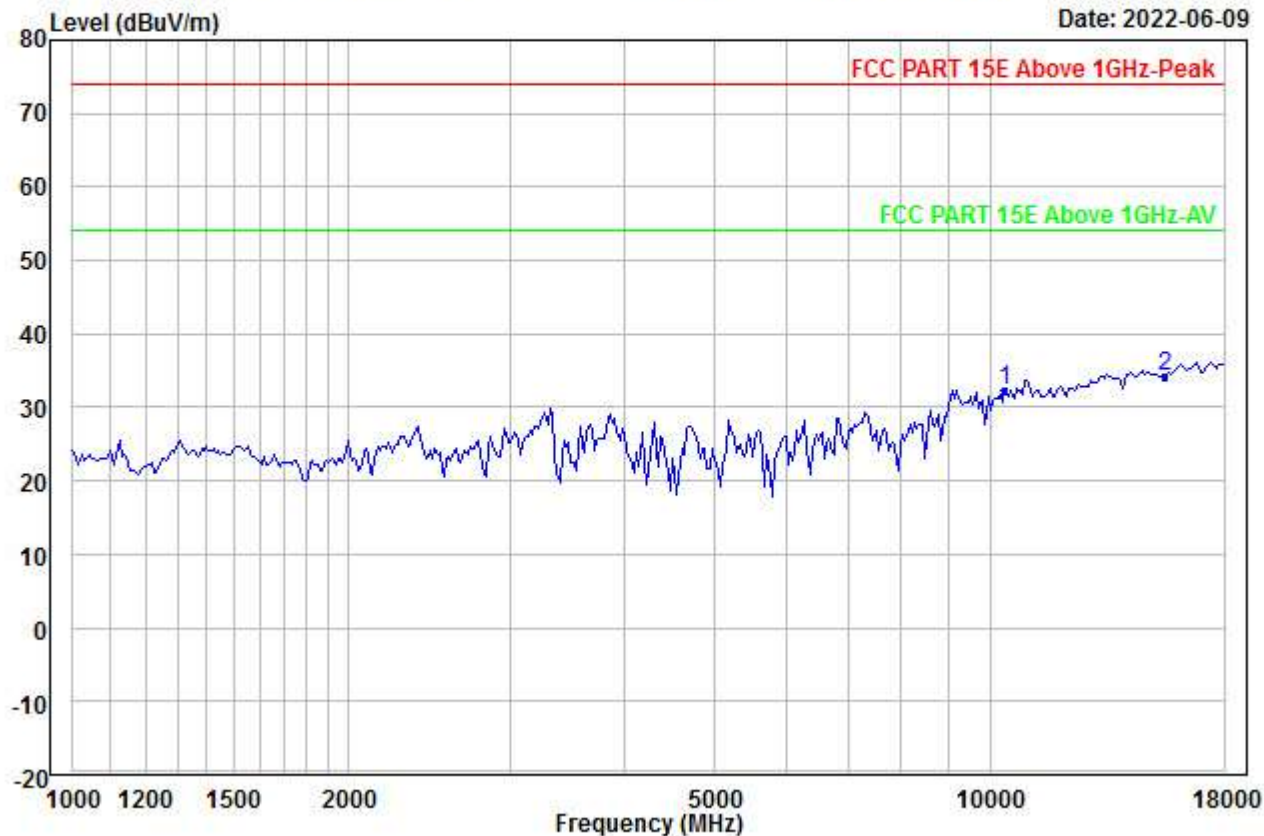


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	26.11	38.12	45.96	0.00	14.08	32.35	54.00	-21.65	---	---	Aver
2	PP15540.000	23.05	40.26	45.93	0.00	16.94	34.32	54.00	-19.68	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00095.EMI

Date: 2022-06-09

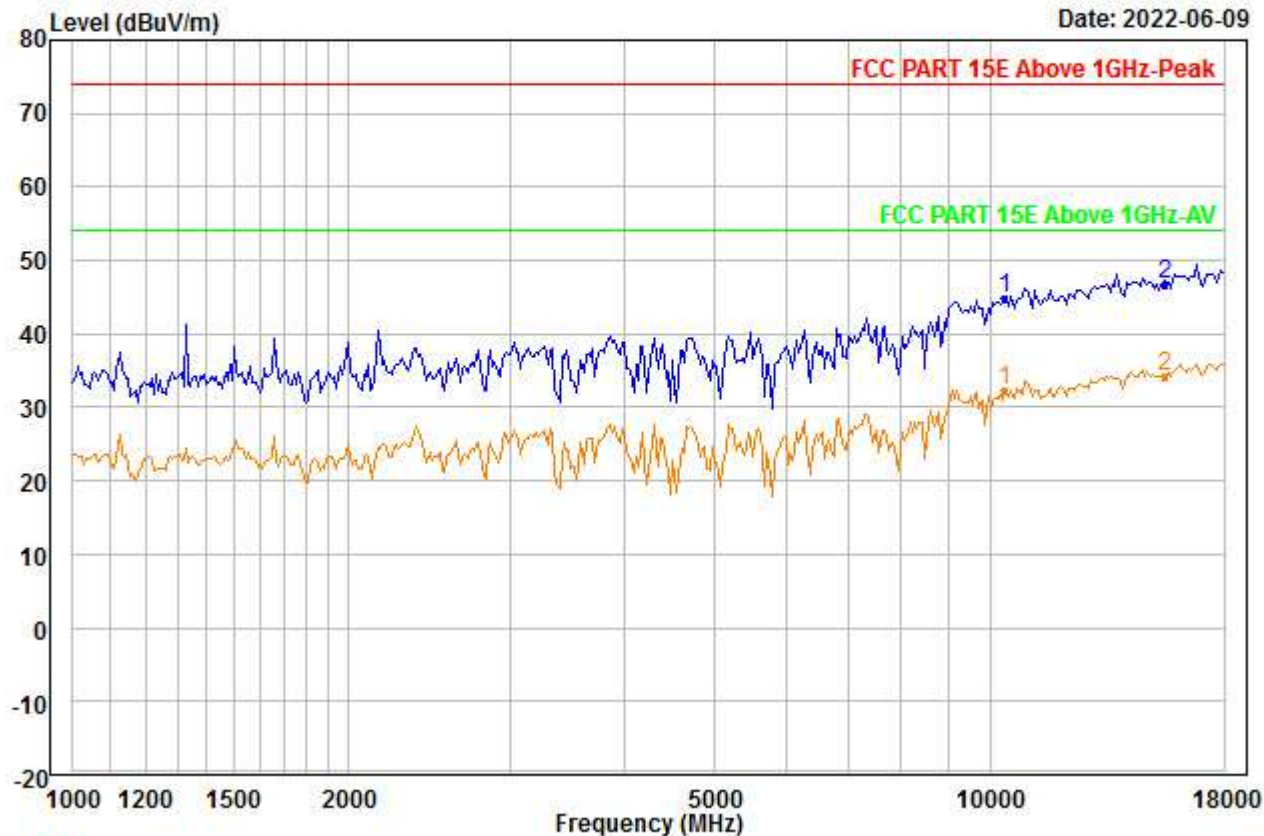


Trace: 1

Condition : Horizontal
Temp.(C)/Hum.(%): 22.3(C) / 51%
Press : 100.4kPa
Product : SA750
Model No. : SA750
Power Rating : AC 120V/60Hz
Test Engineer : Lucas
Test Mode : A_ANT1_5180
Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	38.55	38.12	45.96	0.00	14.08	44.79	74.00	-29.21	---	---	Peak
2	PP15540.000	35.47	40.26	45.93	0.00	16.94	46.74	74.00	-27.26	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00096.EMI

Date: 2022-06-09

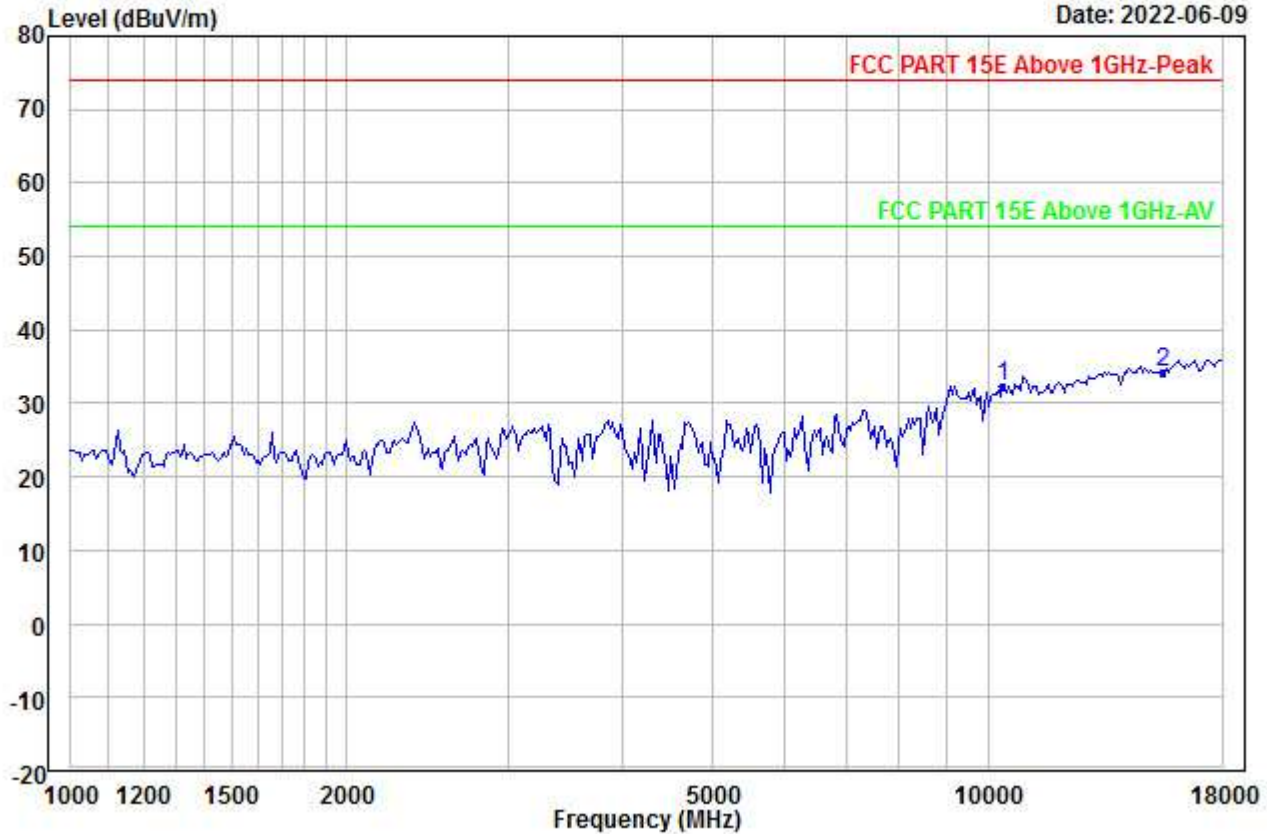

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	26.18	38.12	45.96	0.00	14.08	32.42	54.00	-21.58	---	---	Aver
2	PP15540.000	22.85	40.26	45.93	0.00	16.94	34.12	54.00	-19.88	---	---	Aver