

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\29

Memo:

Sample Number: S26072123-002

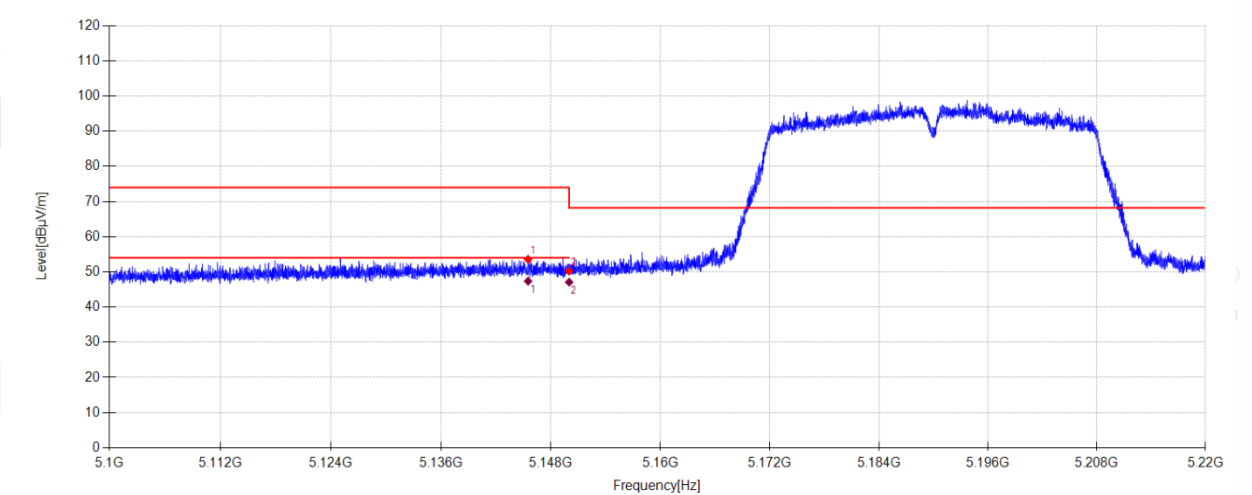

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.516	45.27	33.91	-25.59	53.59	74.00	20.41	PK	Horizontal
2	5150.000	41.90	33.90	-25.59	50.21	68.20	17.99	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.516	39.04	33.91	-25.59	47.36	54.00	6.64	AV	Horizontal
2	5150.000	38.78	33.90	-25.59	47.09	54.00	6.91	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\30

Memo:

Sample Number: S26072123-002

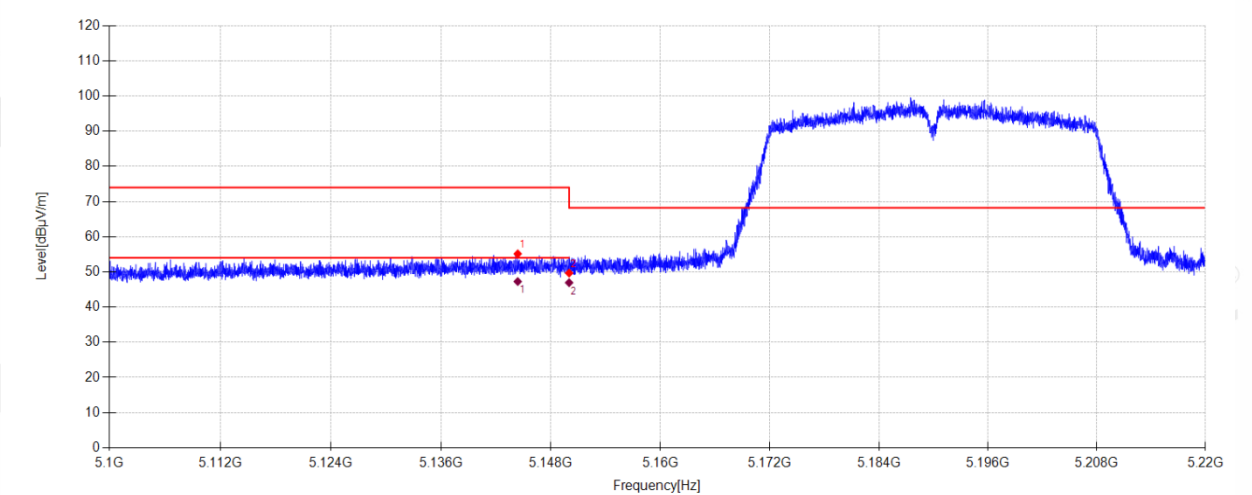

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.388	46.82	33.91	-25.59	55.14	74.00	18.86	PK	Vertical
2	5150.000	41.36	33.90	-25.59	49.67	68.20	18.53	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.388	38.94	33.91	-25.59	47.26	54.00	6.74	AV	Vertical
2	5150.000	38.62	33.90	-25.59	46.93	54.00	7.07	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\31
Memo: Sample Number: S26072123-002

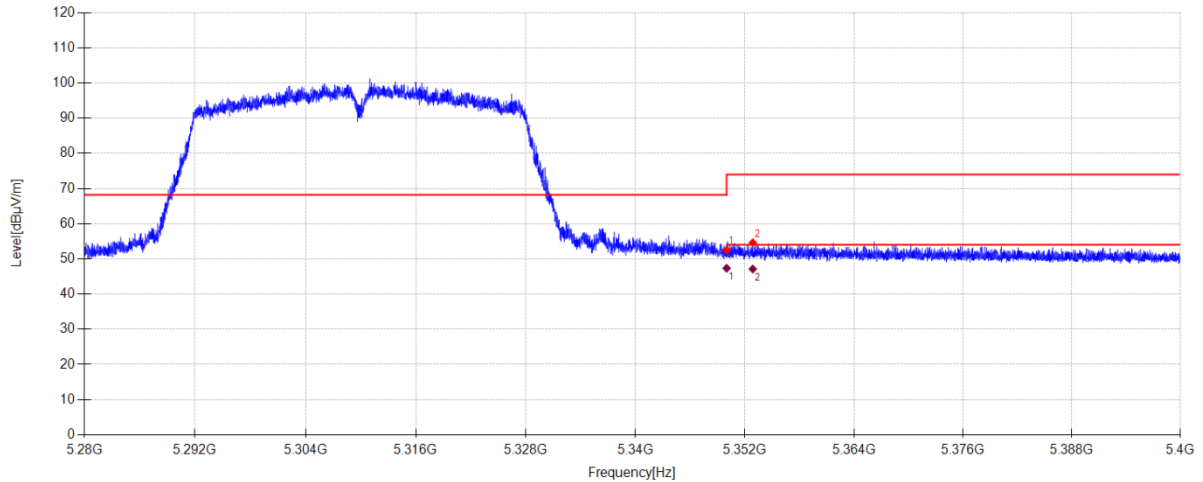**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.11	33.70	-25.31	52.50	68.20	15.70	PK	Horizontal
2	5352.864	46.21	33.70	-25.31	54.60	74.00	19.40	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.95	33.70	-25.31	47.34	54.00	6.66	AV	Horizontal
2	5352.864	38.74	33.70	-25.31	47.13	54.00	6.87	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\32

Memo:

Sample Number: S26072123-002

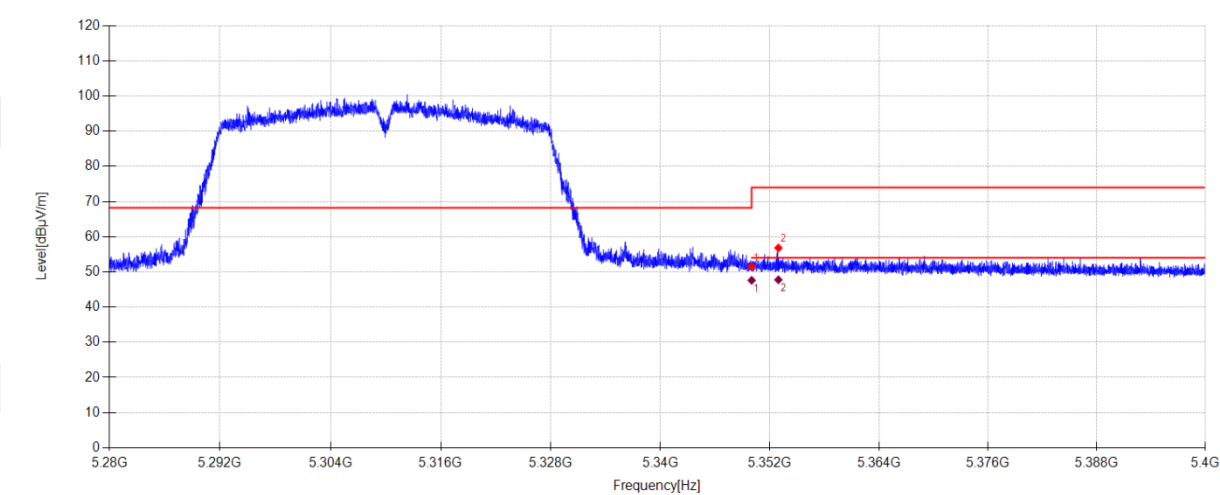

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.07	33.70	-25.31	51.46	68.20	16.74	PK	Vertical
2	5352.936	48.43	33.70	-25.31	56.82	74.00	17.18	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.21	33.70	-25.31	47.60	54.00	6.40	AV	Vertical
2	5352.936	39.36	33.70	-25.31	47.75	54.00	6.25	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\33
Memo: Sample Number: S26072123-002

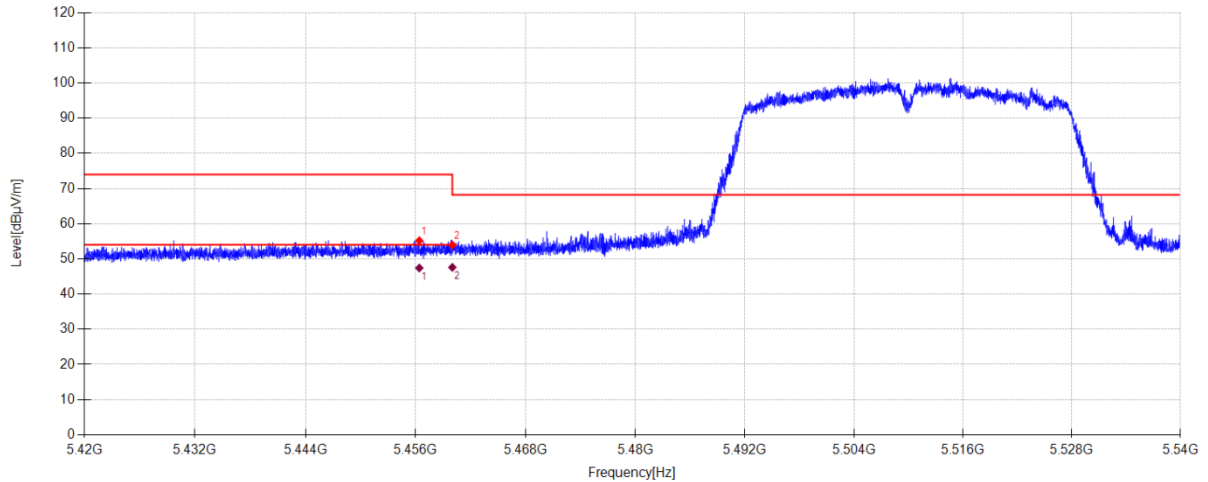

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.396	46.55	33.80	-25.17	55.18	74.00	18.82	PK	Horizontal
2	5460.000	45.30	33.80	-25.15	53.95	68.20	14.25	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.396	38.79	33.80	-25.17	47.42	54.00	6.58	AV	Horizontal
2	5460.000	38.95	33.80	-25.15	47.60	54.00	6.40	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\34
Memo: Sample Number: S26072123-002

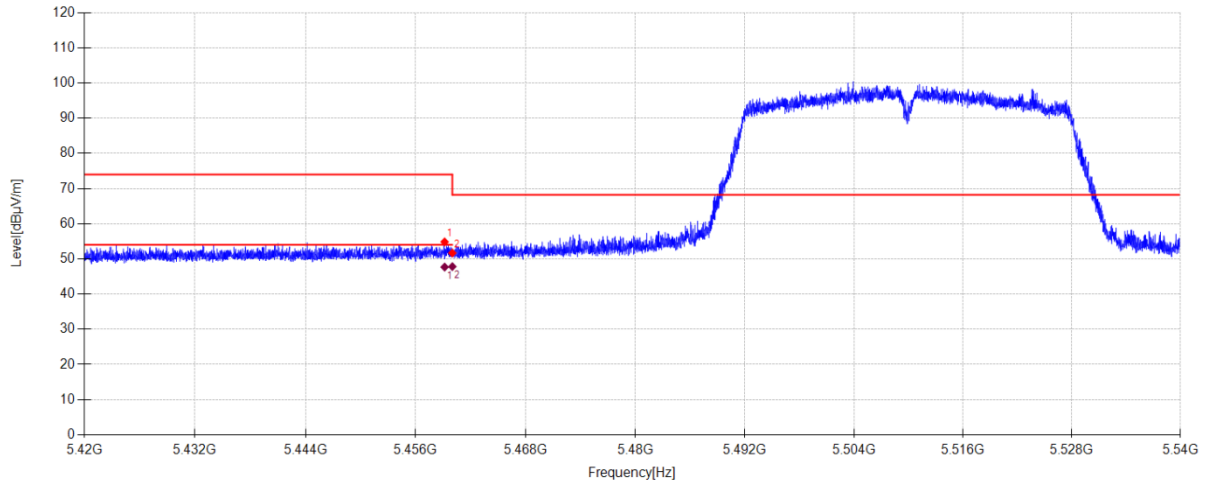**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5459.156	46.18	33.80	-25.15	54.83	74.00	19.17	PK	Vertical
2	5460.000	43.02	33.80	-25.15	51.67	68.20	16.53	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5459.156	39.03	33.80	-25.15	47.68	54.00	6.32	AV	Vertical
2	5460.000	39.16	33.80	-25.15	47.81	54.00	6.19	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\35

Memo:

Sample Number: S26072123-002

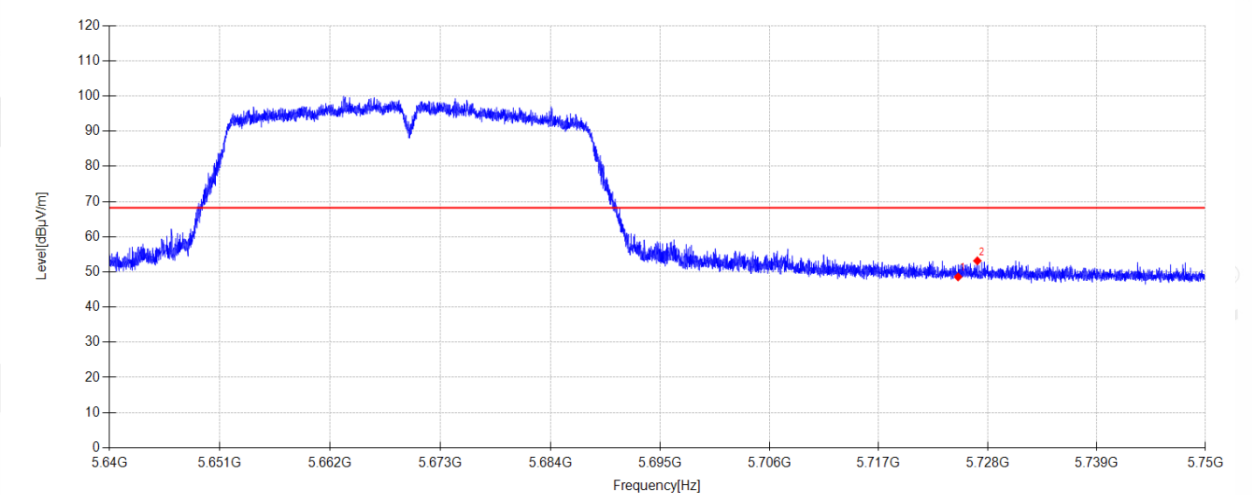

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	39.47	34.30	-25.20	48.57	68.20	19.63	PK	Horizontal
2	5726.944	44.03	34.31	-25.20	53.14	68.20	15.06	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\36

Memo:

Sample Number: S26072123-002

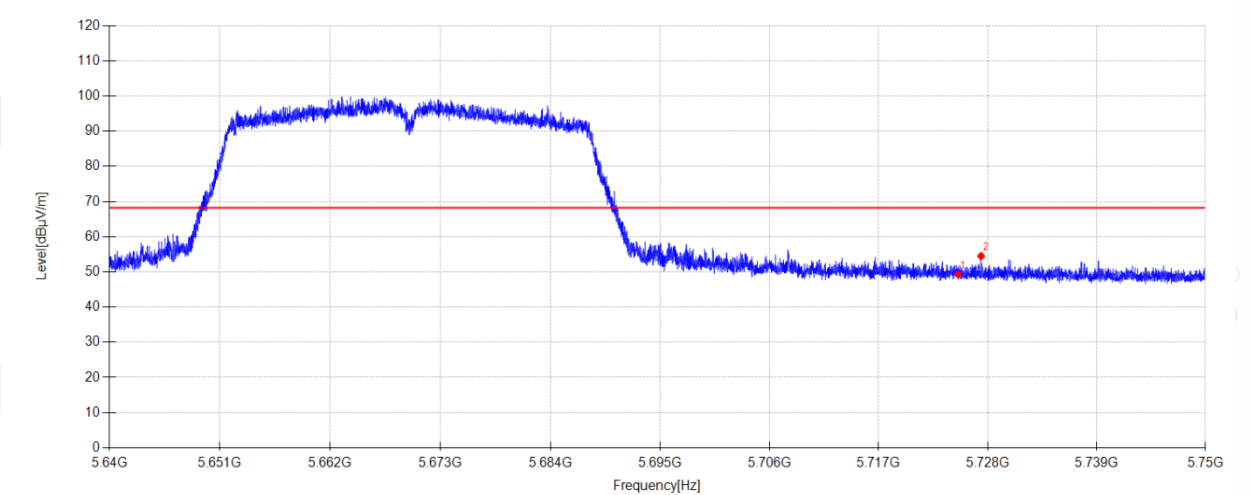

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.15	34.30	-25.20	49.25	68.20	18.95	PK	Vertical
2	5727.318	45.37	34.31	-25.19	54.49	68.20	13.71	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\53

Memo:

Sample Number: S26072123-002

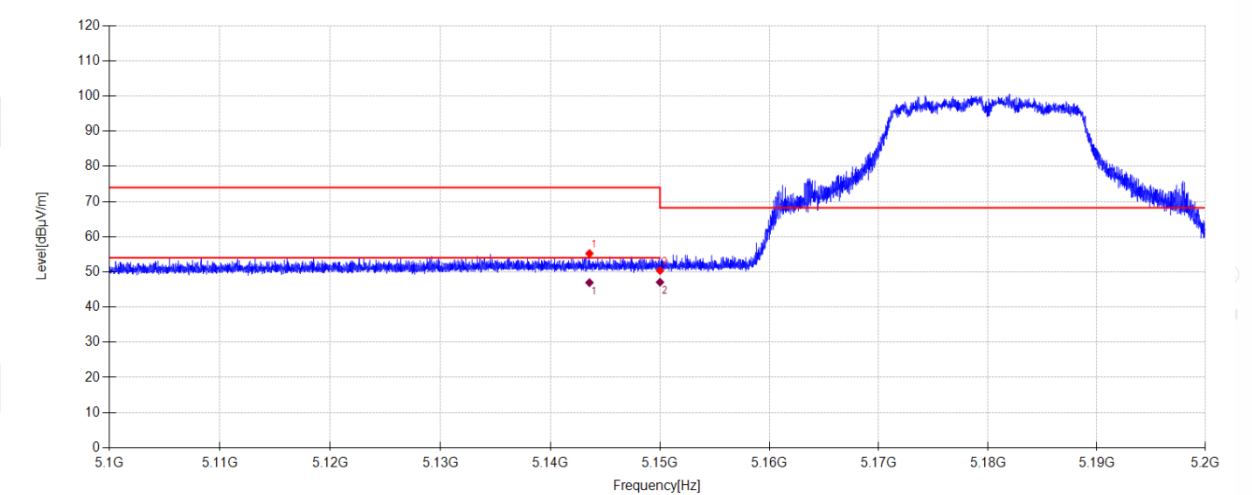

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5143.570	46.91	33.91	-25.59	55.23	74.00	18.77	PK	Horizontal
2	5150.000	42.07	33.90	-25.59	50.38	68.20	17.82	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5143.570	38.63	33.91	-25.59	46.95	54.00	7.05	AV	Horizontal
2	5150.000	38.76	33.90	-25.59	47.07	54.00	6.93	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\54
Memo: Sample Number: S26072123-002

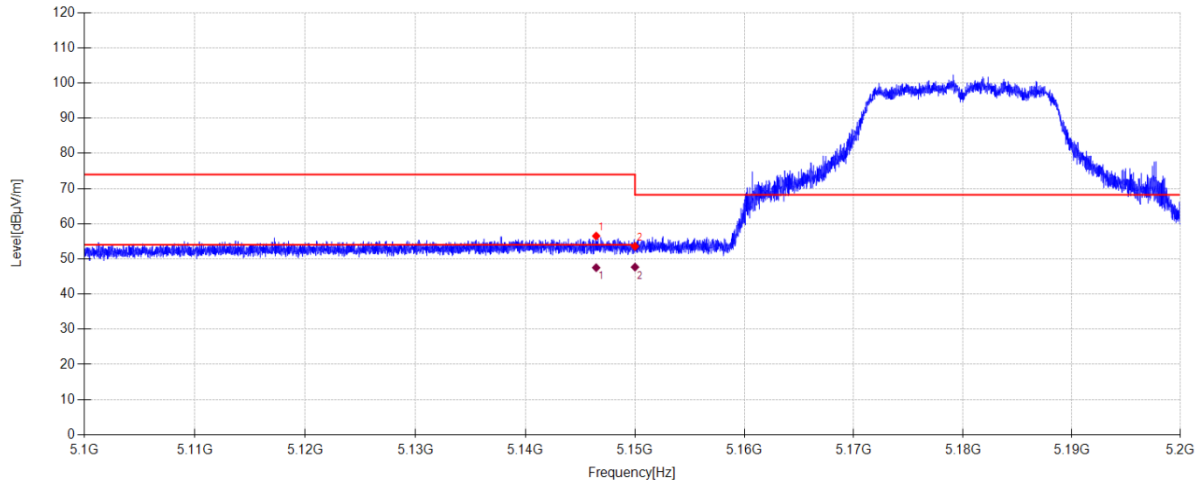**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.460	48.19	33.91	-25.59	56.51	74.00	17.49	PK	Vertical
2	5150.000	45.25	33.90	-25.59	53.56	68.20	14.64	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.460	39.18	33.91	-25.59	47.50	54.00	6.50	AV	Vertical
2	5150.000	39.35	33.90	-25.59	47.66	54.00	6.34	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\55
Memo: Sample Number: S26072123-002

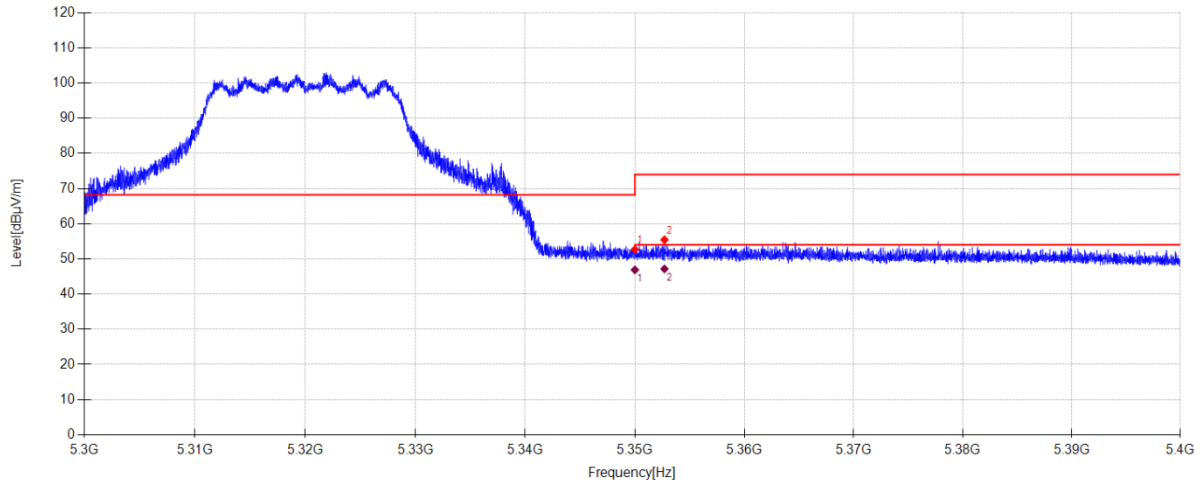**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.30	33.70	-25.31	52.69	68.20	15.51	PK	Horizontal
2	5352.700	47.06	33.70	-25.31	55.45	74.00	18.55	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.49	33.70	-25.31	46.88	54.00	7.12	AV	Horizontal
2	5352.700	38.76	33.70	-25.31	47.15	54.00	6.85	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\56
Memo: Sample Number: S26072123-002

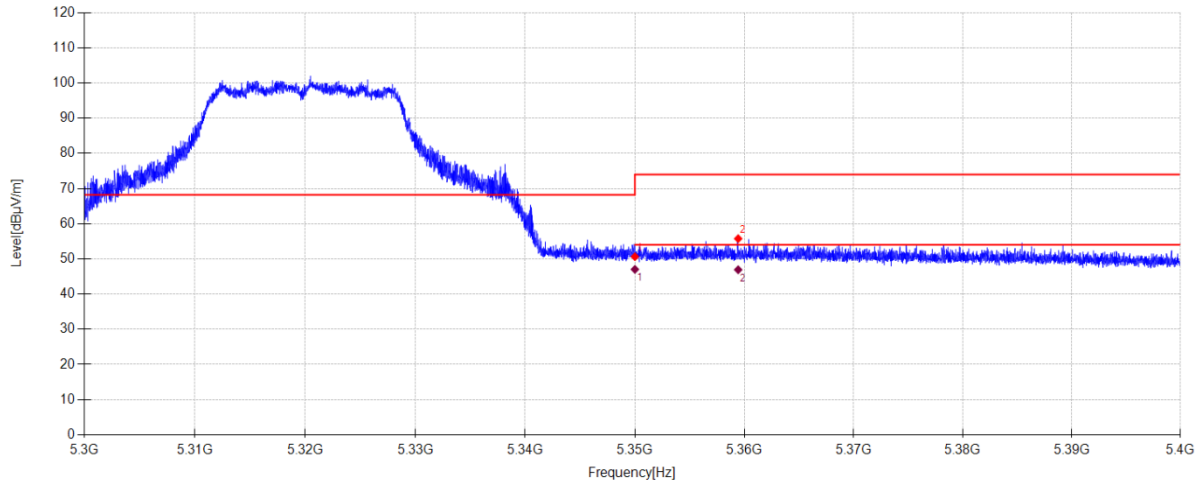**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.23	33.70	-25.31	50.62	68.20	17.58	PK	Vertical
2	5359.430	47.39	33.70	-25.33	55.76	74.00	18.24	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.64	33.70	-25.31	47.03	54.00	6.97	AV	Vertical
2	5359.430	38.55	33.70	-25.33	46.92	54.00	7.08	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\57
Memo: Sample Number: S26072123-002

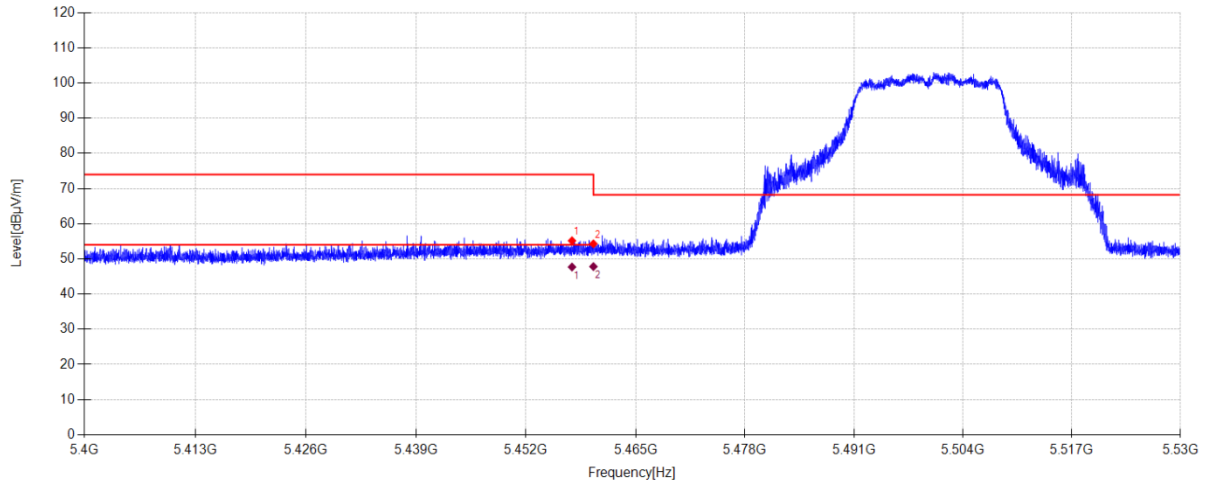**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.460	46.52	33.80	-25.16	55.16	74.00	18.84	PK	Horizontal
2	5460.000	45.63	33.80	-25.15	54.28	68.20	13.92	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.460	39.06	33.80	-25.16	47.70	54.00	6.30	AV	Horizontal
2	5460.000	39.17	33.80	-25.15	47.82	54.00	6.18	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\58
Memo: Sample Number: S26072123-002

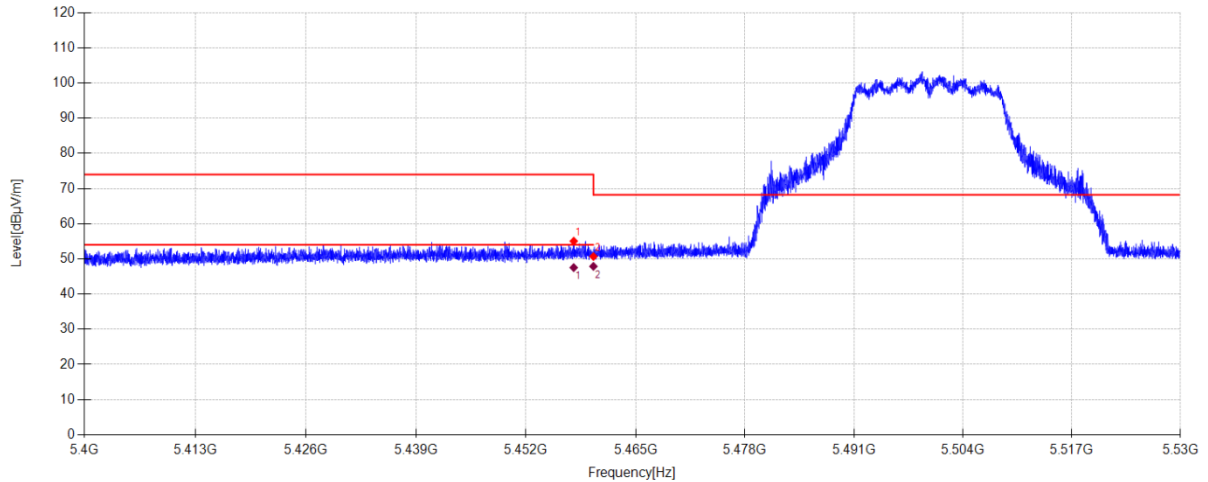**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.668	46.41	33.80	-25.16	55.05	74.00	18.95	PK	Vertical
2	5460.000	42.04	33.80	-25.15	50.69	68.20	17.51	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.668	38.89	33.80	-25.16	47.53	54.00	6.47	AV	Vertical
2	5460.000	39.22	33.80	-25.15	47.87	54.00	6.13	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\59

Memo:

Sample Number: S26072123-002

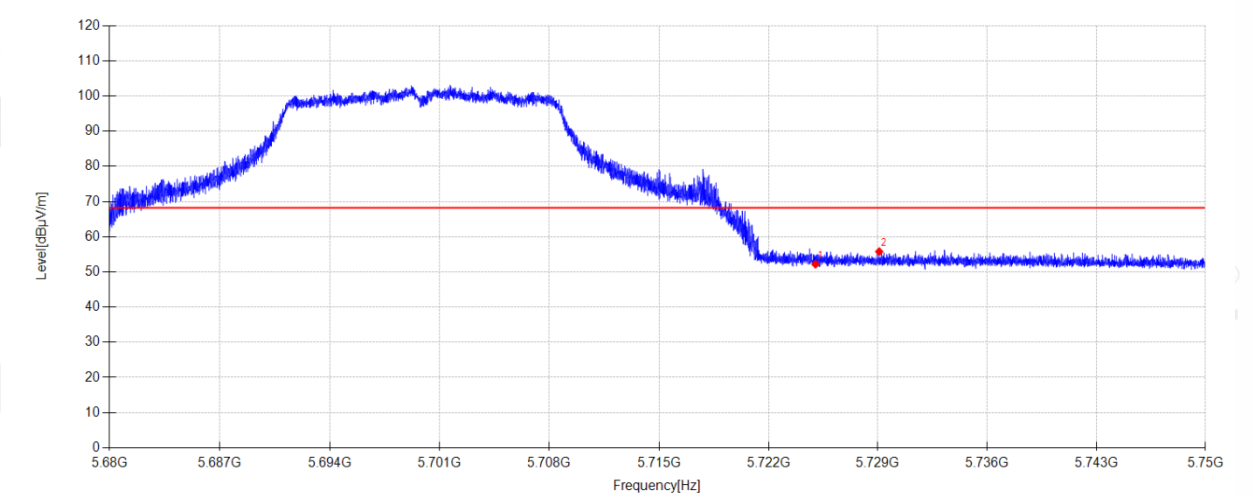

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.06	34.30	-25.20	52.16	68.20	16.04	PK	Horizontal
2	5729.084	46.64	34.32	-25.19	55.77	68.20	12.43	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\60

Memo:

Sample Number: S26072123-002

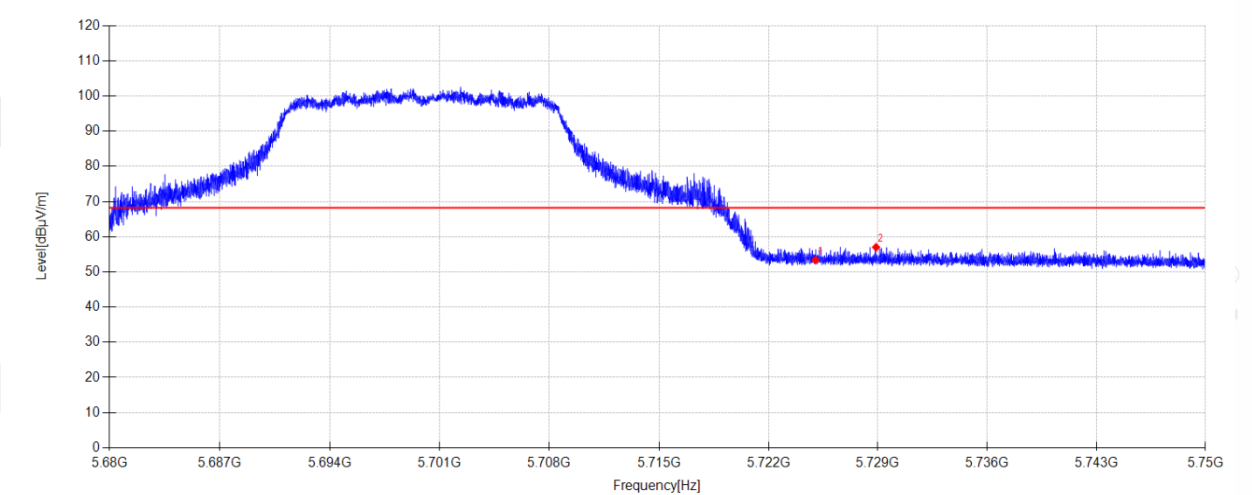

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.26	34.30	-25.20	53.36	68.20	14.84	PK	Vertical
2	5728.881	47.88	34.32	-25.19	57.01	68.20	11.19	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\61

Memo:

Sample Number: S26072123-002

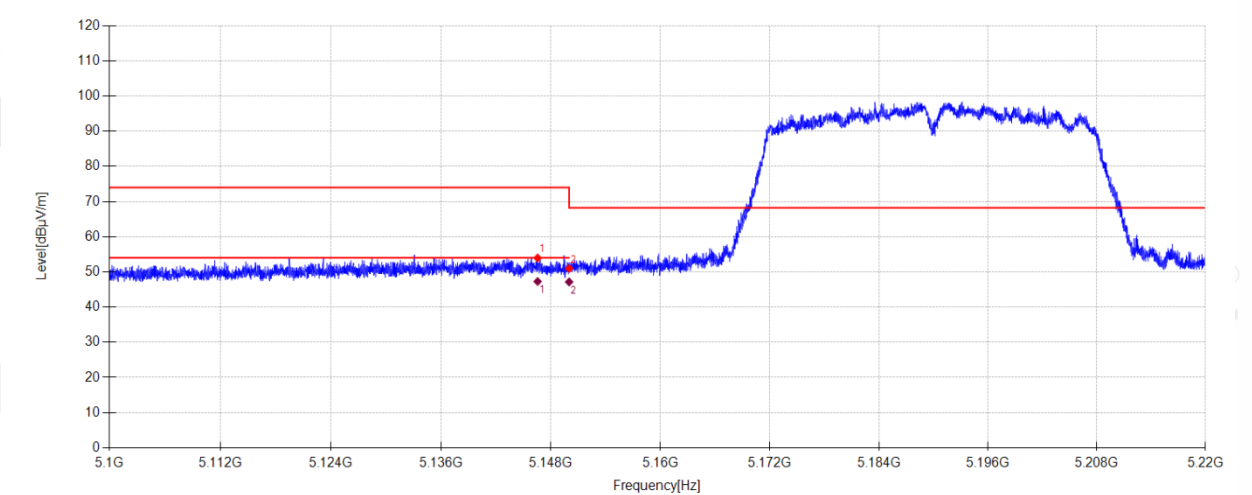

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.560	45.63	33.91	-25.59	53.95	74.00	20.05	PK	Horizontal
2	5150.000	42.67	33.90	-25.59	50.98	68.20	17.22	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.560	38.96	33.91	-25.59	47.28	54.00	6.72	AV	Horizontal
2	5150.000	38.84	33.90	-25.59	47.15	54.00	6.85	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\62

Memo:

Sample Number: S26072123-002

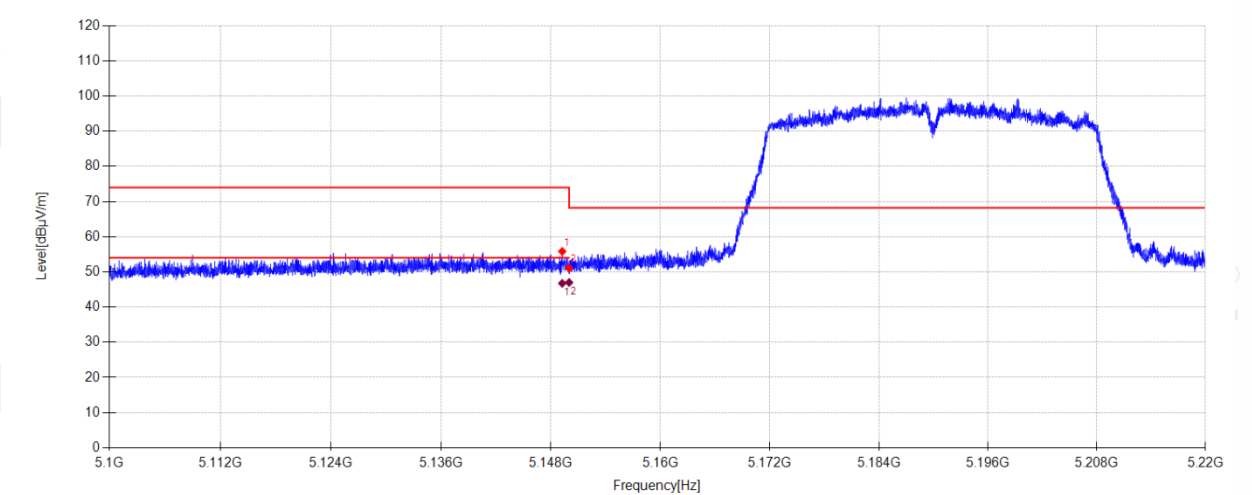

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.248	47.52	33.90	-25.59	55.83	74.00	18.17	PK	Vertical
2	5150.000	42.76	33.90	-25.59	51.07	68.20	17.13	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.248	38.44	33.90	-25.59	46.75	54.00	7.25	AV	Vertical
2	5150.000	38.69	33.90	-25.59	47.00	54.00	7.00	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\63
Memo: Sample Number: S26072123-002

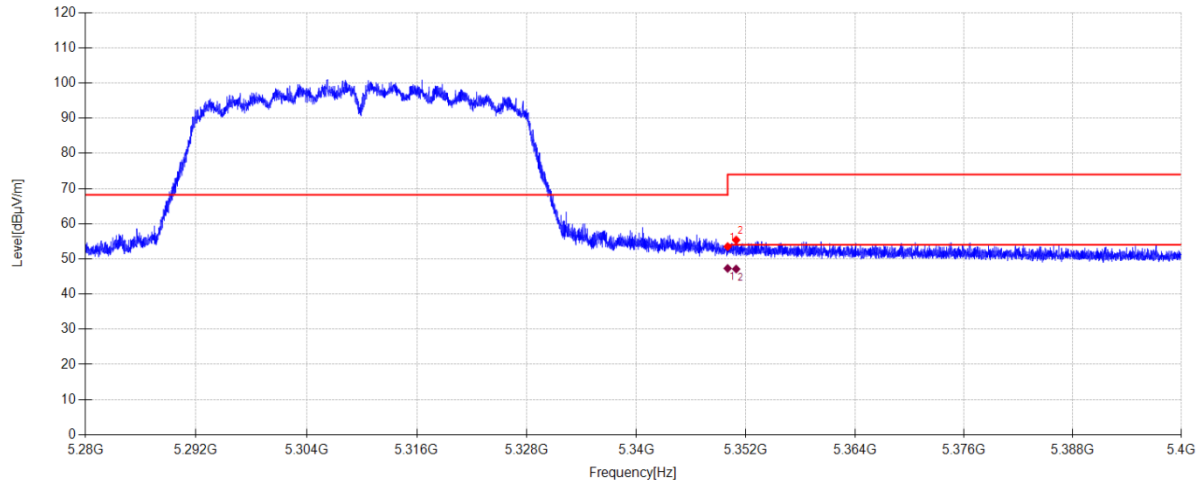

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.11	33.70	-25.31	53.50	68.20	14.70	PK	Horizontal
2	5350.932	46.98	33.70	-25.31	55.37	74.00	18.63	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.91	33.70	-25.31	47.30	54.00	6.70	AV	Horizontal
2	5350.932	38.74	33.70	-25.31	47.13	54.00	6.87	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\64
Memo: Sample Number: S26072123-002

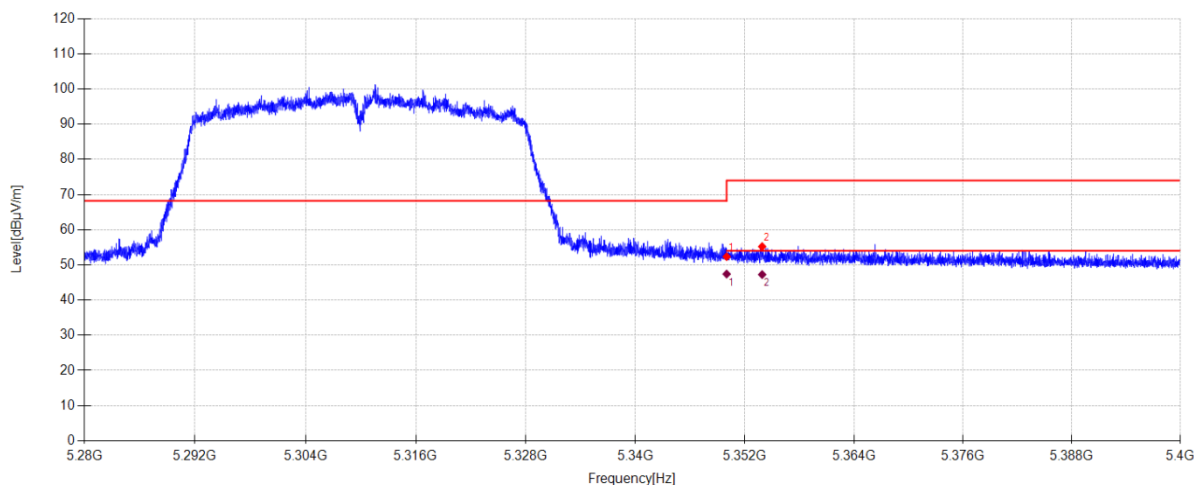**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.95	33.70	-25.31	52.34	68.20	15.86	PK	Vertical
2	5353.896	46.83	33.70	-25.32	55.21	74.00	18.79	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.01	33.70	-25.31	47.40	54.00	6.60	AV	Vertical
2	5353.896	38.87	33.70	-25.32	47.25	54.00	6.75	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\65
Memo: Sample Number: S26072123-002

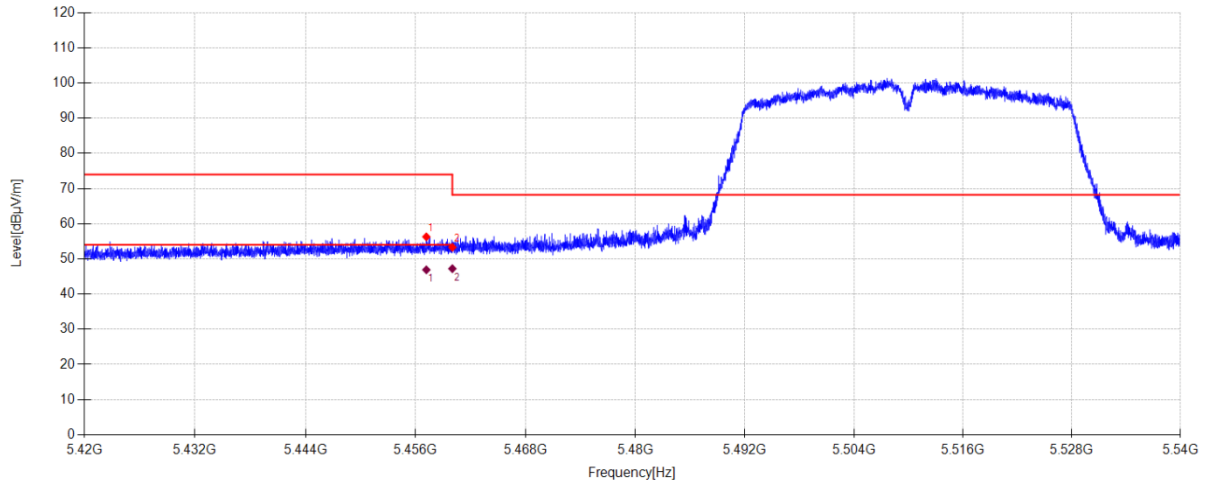**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.164	47.64	33.80	-25.16	56.28	74.00	17.72	PK	Horizontal
2	5460.000	44.65	33.80	-25.15	53.30	68.20	14.90	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.164	38.26	33.80	-25.16	46.90	54.00	7.10	AV	Horizontal
2	5460.000	38.57	33.80	-25.15	47.22	54.00	6.78	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\66
Memo: Sample Number: S26072123-002

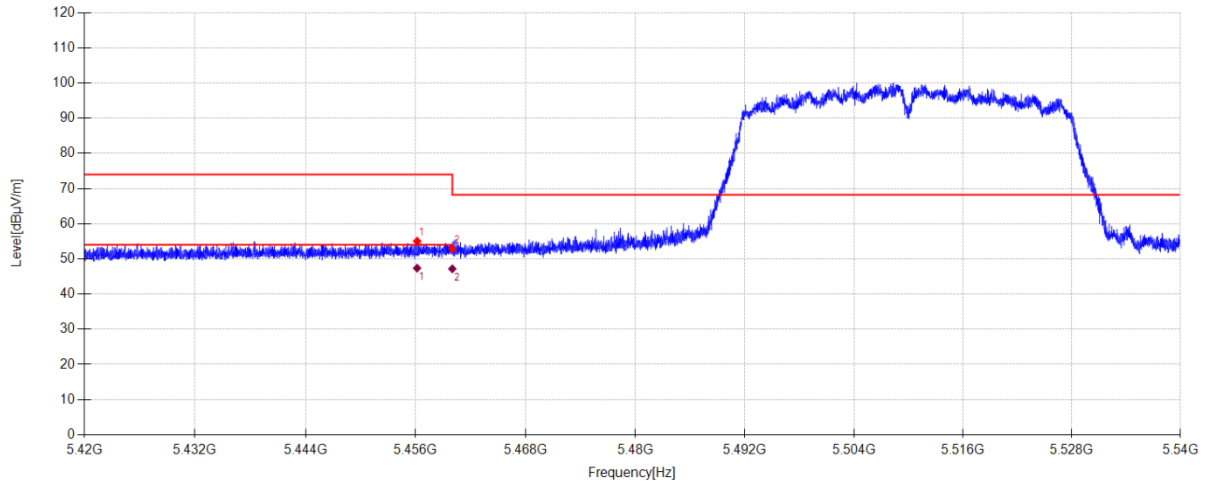**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.156	46.41	33.80	-25.17	55.04	74.00	18.96	PK	Vertical
2	5460.000	44.18	33.80	-25.15	52.83	68.20	15.37	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.156	38.74	33.80	-25.17	47.37	54.00	6.63	AV	Vertical
2	5460.000	38.53	33.80	-25.15	47.18	54.00	6.82	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\67

Memo:

Sample Number: S26072123-002

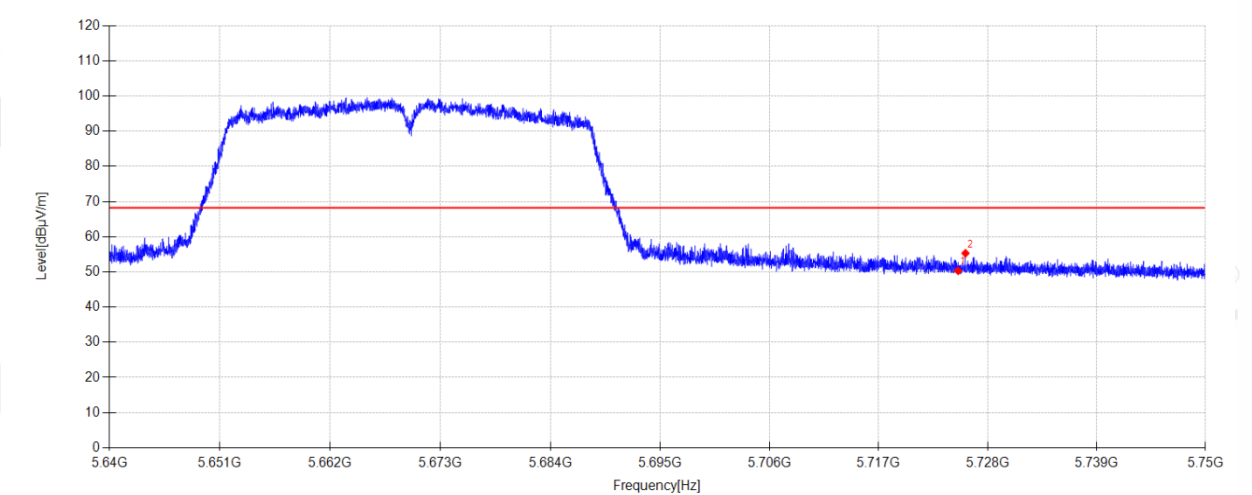

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.22	34.30	-25.20	50.32	68.20	17.88	PK	Horizontal
2	5725.745	46.20	34.30	-25.20	55.30	68.20	12.90	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\68

Memo:

Sample Number: S26072123-002

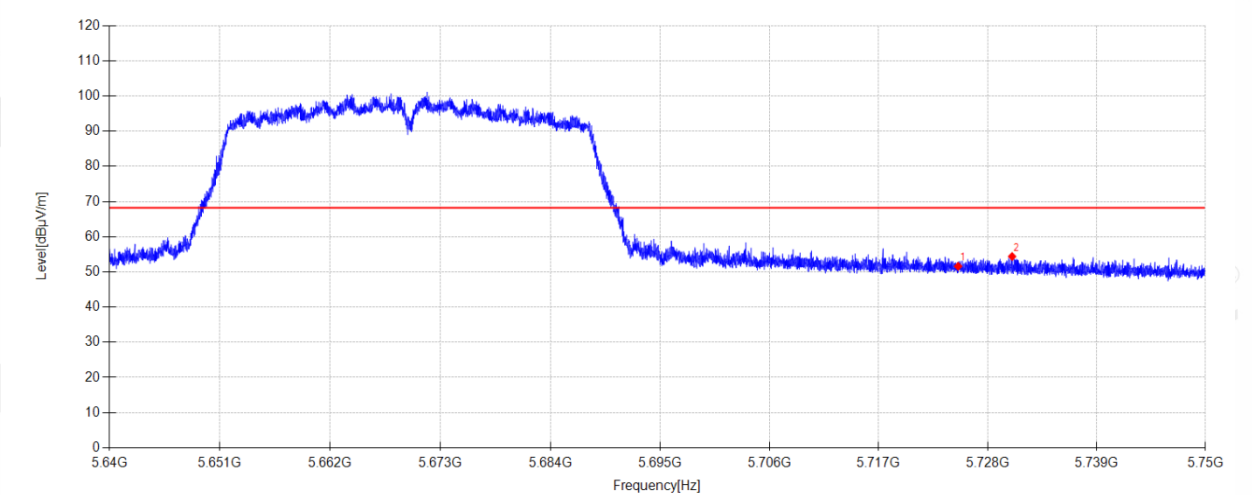

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.49	34.30	-25.20	51.59	68.20	16.61	PK	Vertical
2	5730.453	45.25	34.32	-25.19	54.38	68.20	13.82	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\69
Memo: Sample Number: S26072123-002

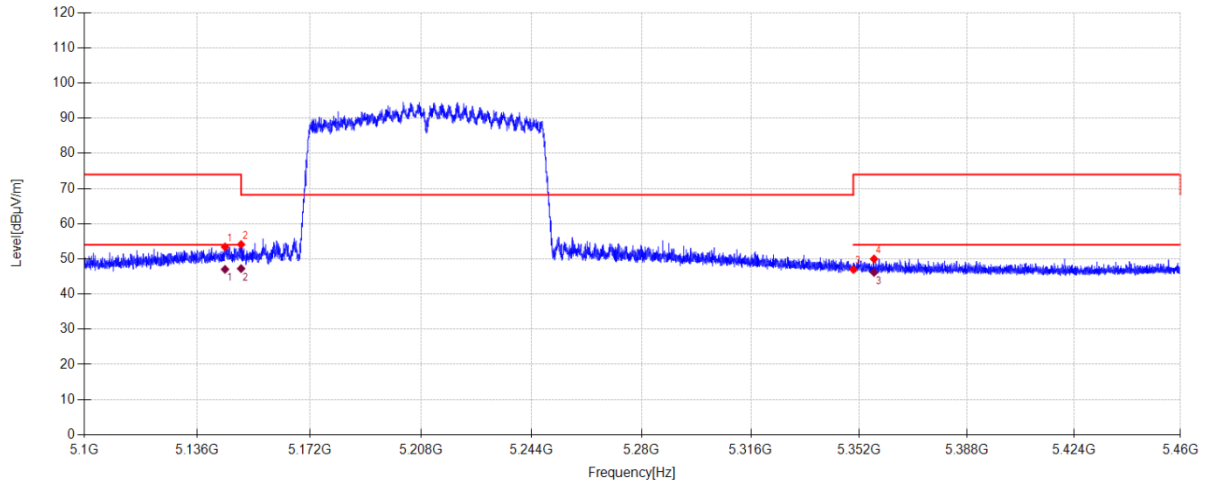**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.856	45.09	33.91	-25.59	53.41	74.00	20.59	PK	Horizontal
2	5150.000	45.80	33.90	-25.59	54.11	68.20	14.09	PK	Horizontal
3	5350.000	38.59	33.70	-25.31	46.98	68.20	21.22	PK	Horizontal
4	5356.896	41.61	33.70	-25.32	49.99	74.00	24.01	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.856	38.72	33.91	-25.59	47.04	54.00	6.96	AV	Horizontal
2	5150.000	38.93	33.90	-25.59	47.24	54.00	6.76	AV	Horizontal
3	5356.896	37.78	33.70	-25.32	46.16	54.00	7.84	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\70
Memo: Sample Number: S26072123-002

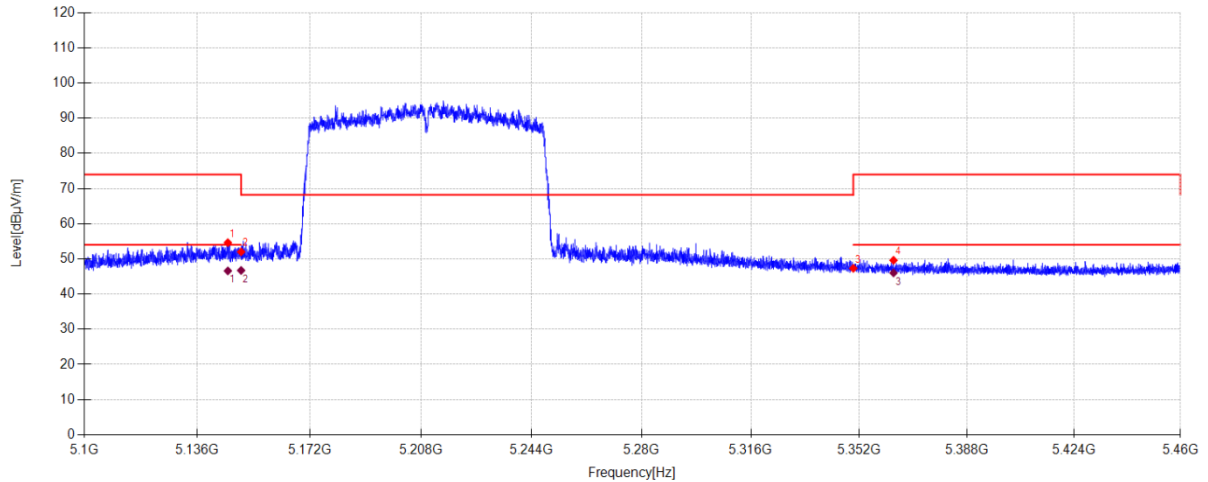**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.756	46.30	33.91	-25.59	54.62	74.00	19.38	PK	Vertical
2	5150.000	43.69	33.90	-25.59	52.00	68.20	16.20	PK	Vertical
3	5350.000	38.94	33.70	-25.31	47.33	68.20	20.87	PK	Vertical
4	5363.412	41.24	33.70	-25.34	49.60	74.00	24.40	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.756	38.27	33.91	-25.59	46.59	54.00	7.41	AV	Vertical
2	5150.000	38.42	33.90	-25.59	46.73	54.00	7.27	AV	Vertical
3	5363.412	37.65	33.70	-25.34	46.01	54.00	7.99	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\71

Memo:

Sample Number: S26072123-002

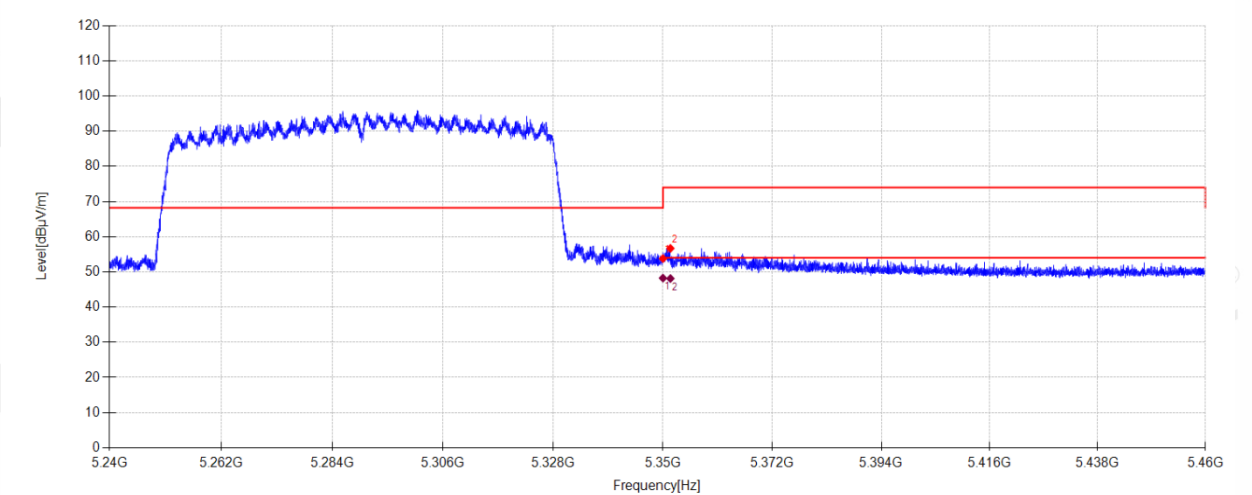

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.41	33.70	-25.31	53.80	68.20	14.40	PK	Horizontal
2	5351.496	48.30	33.70	-25.31	56.69	74.00	17.31	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.84	33.70	-25.31	48.23	54.00	5.77	AV	Horizontal
2	5351.496	39.72	33.70	-25.31	48.11	54.00	5.89	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\72

Memo:

Sample Number: S26072123-002

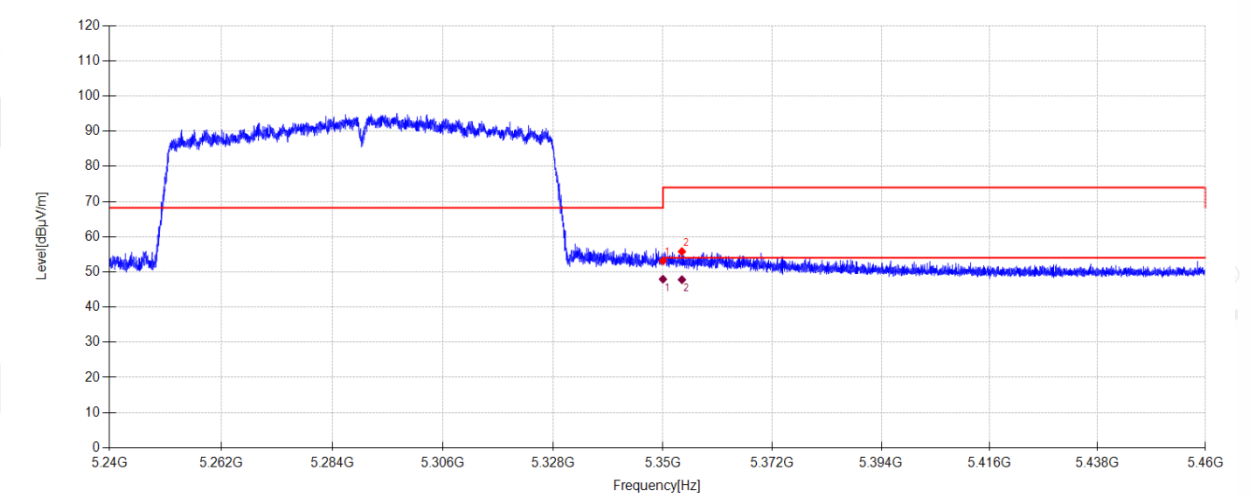

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.75	33.70	-25.31	53.14	68.20	15.06	PK	Vertical
2	5353.806	47.40	33.70	-25.32	55.78	74.00	18.22	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.54	33.70	-25.31	47.93	54.00	6.07	AV	Vertical
2	5353.806	39.41	33.70	-25.32	47.79	54.00	6.21	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\73

Memo:

Sample Number: S26072123-002

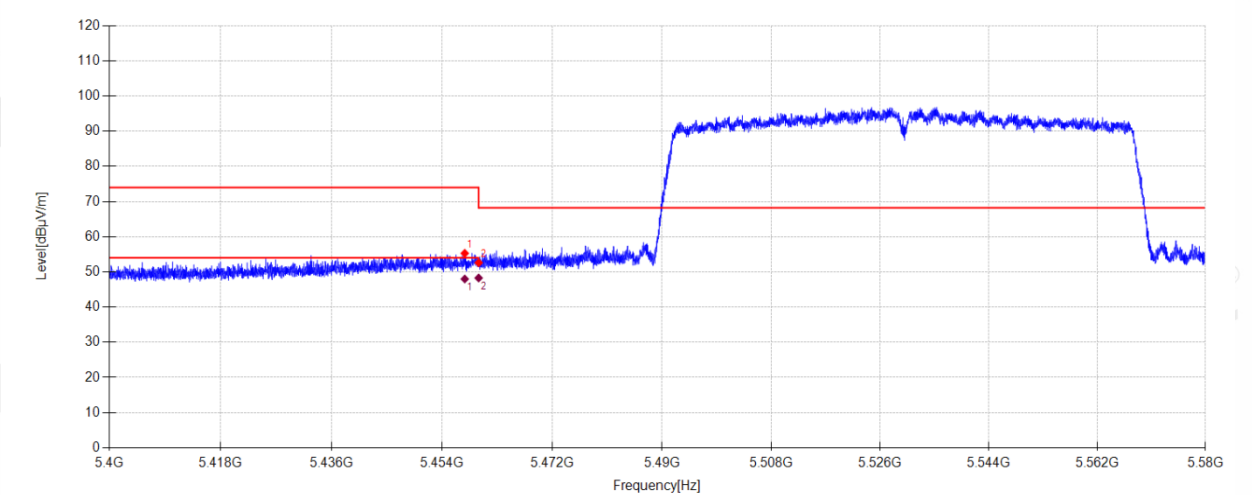

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.726	46.65	33.80	-25.16	55.29	74.00	18.71	PK	Horizontal
2	5460.000	43.94	33.80	-25.15	52.59	68.20	15.61	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.726	39.35	33.80	-25.16	47.99	54.00	6.01	AV	Horizontal
2	5460.000	39.62	33.80	-25.15	48.27	54.00	5.73	AV	Horizontal


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\74
Memo: Sample Number: S26072123-002

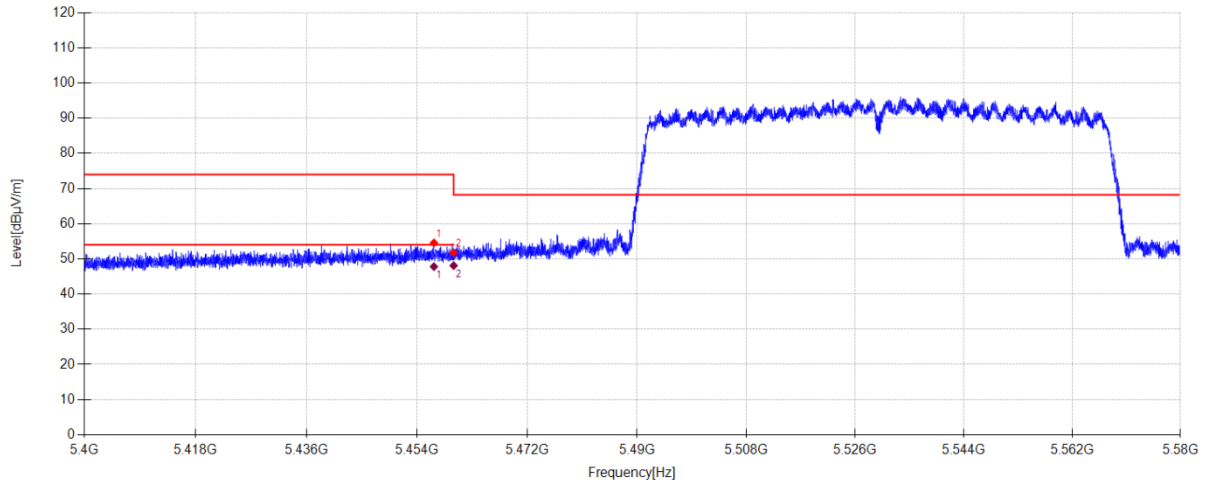

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.772	45.92	33.80	-25.17	54.55	74.00	19.45	PK	Vertical
2	5460.000	43.11	33.80	-25.15	51.76	68.20	16.44	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.772	39.16	33.80	-25.17	47.79	54.00	6.21	AV	Vertical
2	5460.000	39.44	33.80	-25.15	48.09	54.00	5.91	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\75

Memo:

Sample Number: S26072123-002

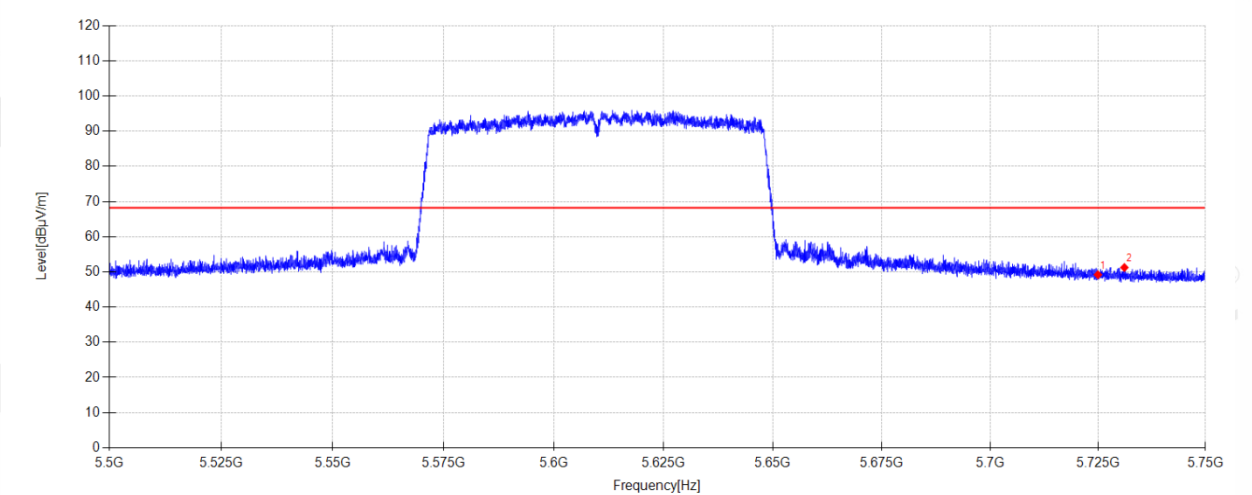

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.11	34.30	-25.20	49.21	68.20	18.99	PK	Horizontal
2	5731.150	42.12	34.32	-25.19	51.25	68.20	16.95	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\76

Memo:

Sample Number: S26072123-002

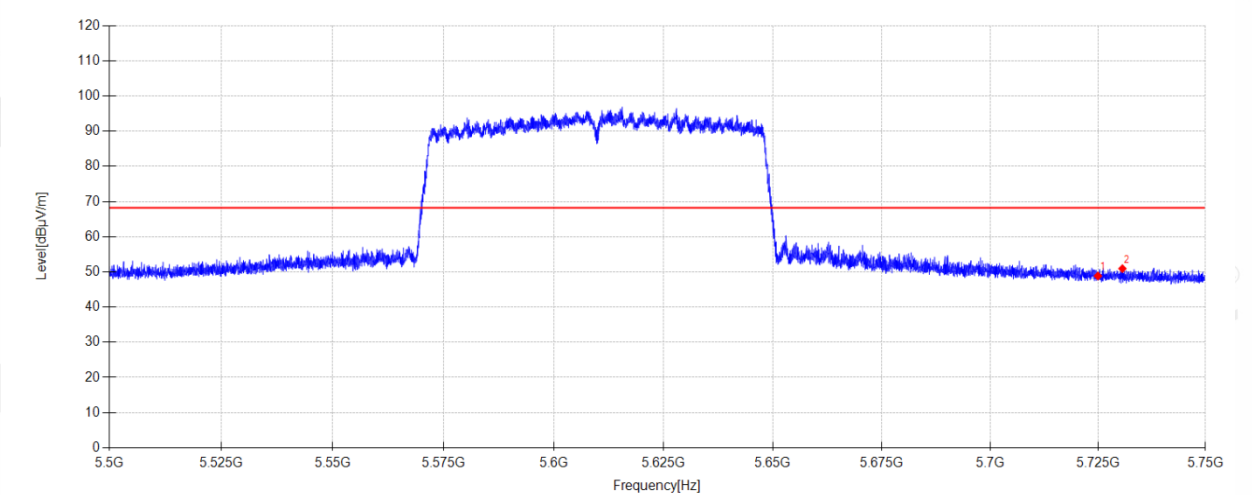

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	39.75	34.30	-25.20	48.85	68.20	19.35	PK	Vertical
2	5730.700	41.80	34.32	-25.19	50.93	68.20	17.27	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\77

Memo:

Sample Number: S26072123-002

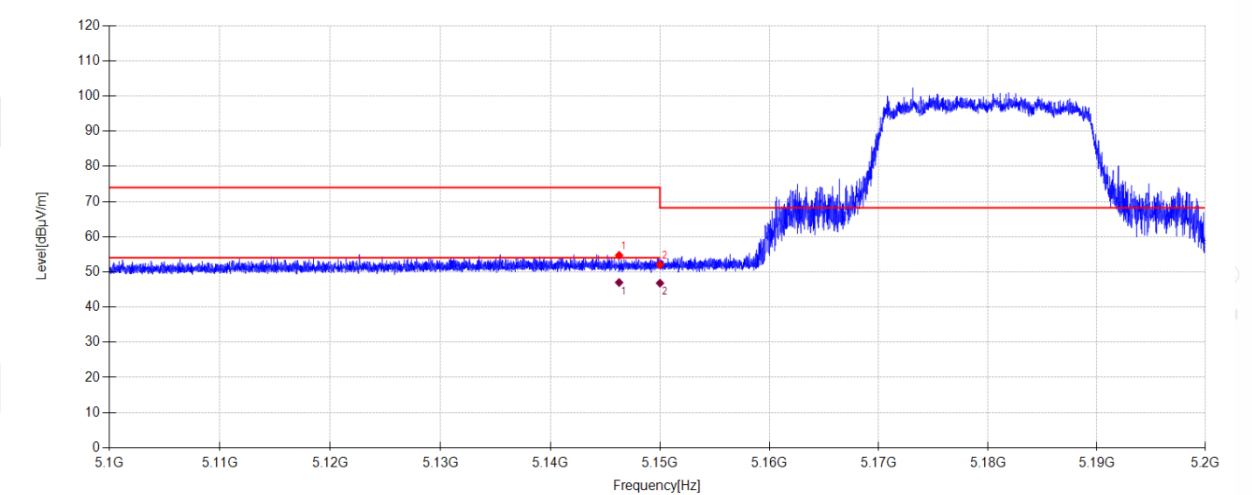

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.270	46.39	33.91	-25.59	54.71	74.00	19.29	PK	Horizontal
2	5150.000	43.76	33.90	-25.59	52.07	68.20	16.13	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.270	38.67	33.91	-25.59	46.99	54.00	7.01	AV	Horizontal
2	5150.000	38.49	33.90	-25.59	46.80	54.00	7.20	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\78
Memo: Sample Number: S26072123-002

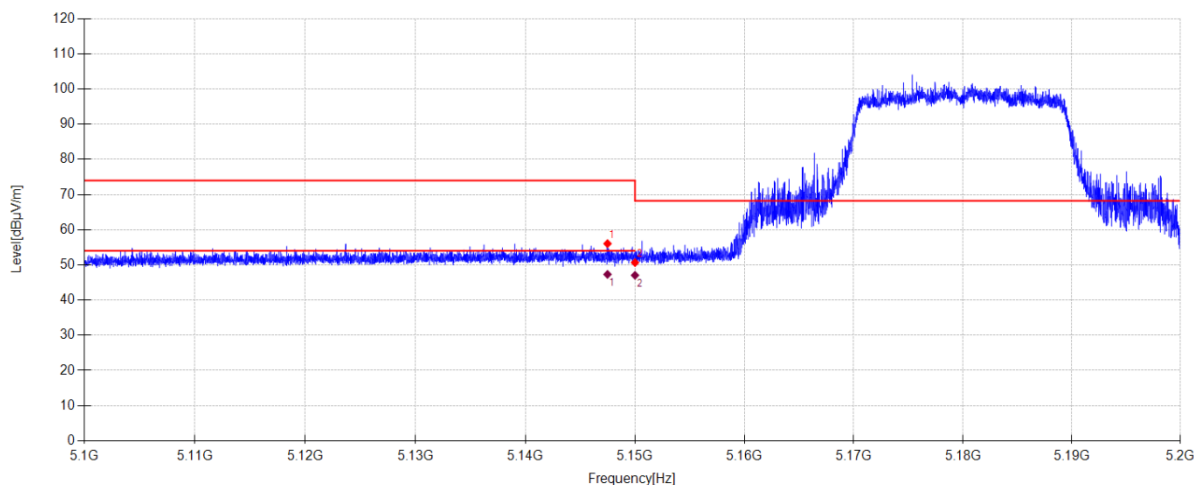**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.490	47.72	33.91	-25.59	56.04	74.00	17.96	PK	Vertical
2	5150.000	42.34	33.90	-25.59	50.65	68.20	17.55	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.490	38.99	33.91	-25.59	47.31	54.00	6.69	AV	Vertical
2	5150.000	38.74	33.90	-25.59	47.05	54.00	6.95	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\79

Memo:

Sample Number: S26072123-002

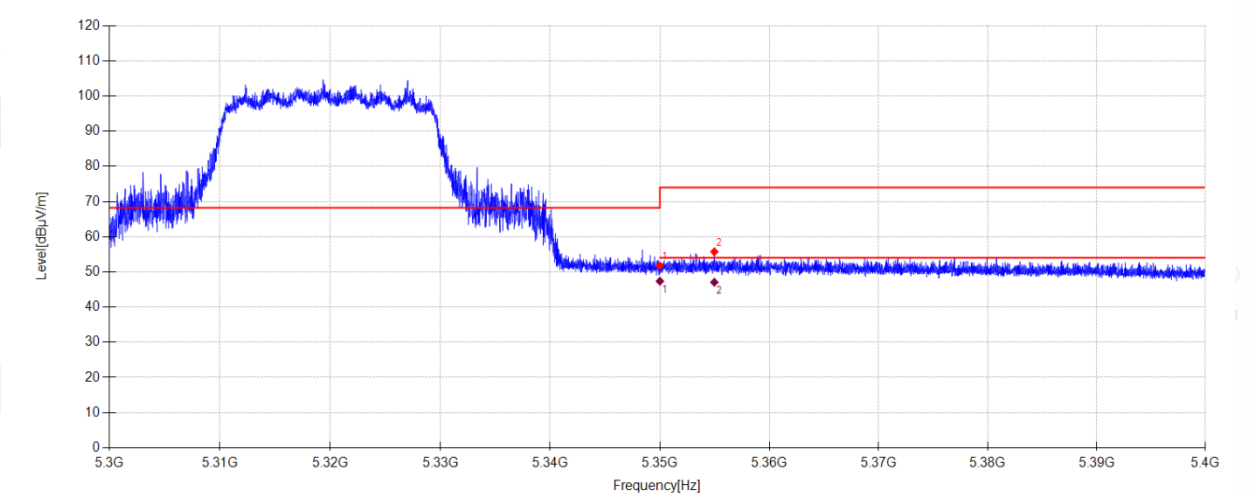

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.36	33.70	-25.31	51.75	68.20	16.45	PK	Horizontal
2	5354.970	47.34	33.70	-25.32	55.72	74.00	18.28	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.97	33.70	-25.31	47.36	54.00	6.64	AV	Horizontal
2	5354.970	38.68	33.70	-25.32	47.06	54.00	6.94	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\80
Memo: Sample Number: S26072123-002

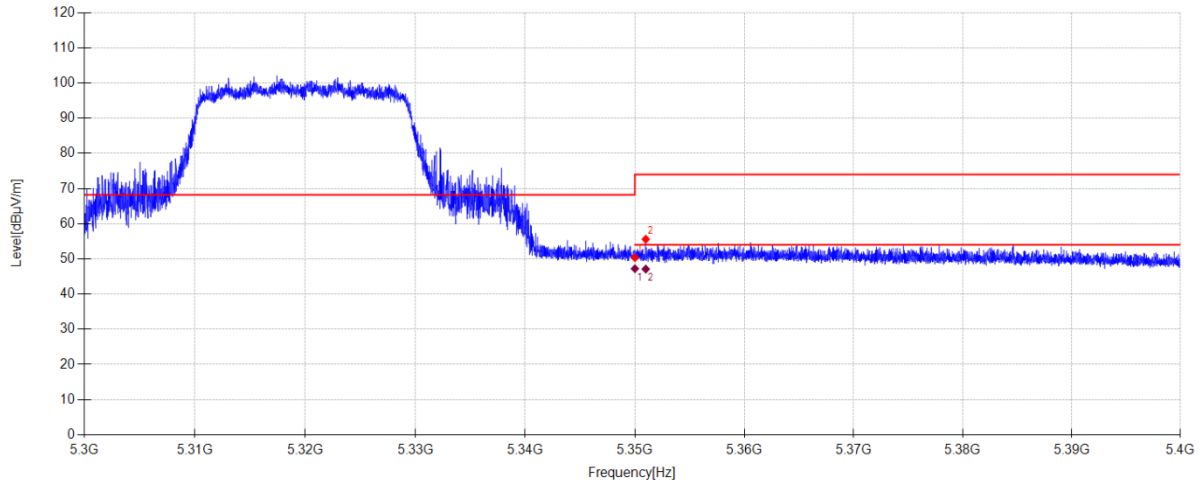**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.96	33.70	-25.31	50.35	68.20	17.85	PK	Vertical
2	5350.990	47.21	33.70	-25.31	55.60	74.00	18.40	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.84	33.70	-25.31	47.23	54.00	6.77	AV	Vertical
2	5350.990	38.72	33.70	-25.31	47.11	54.00	6.89	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\81
Memo: Sample Number: S26072123-002

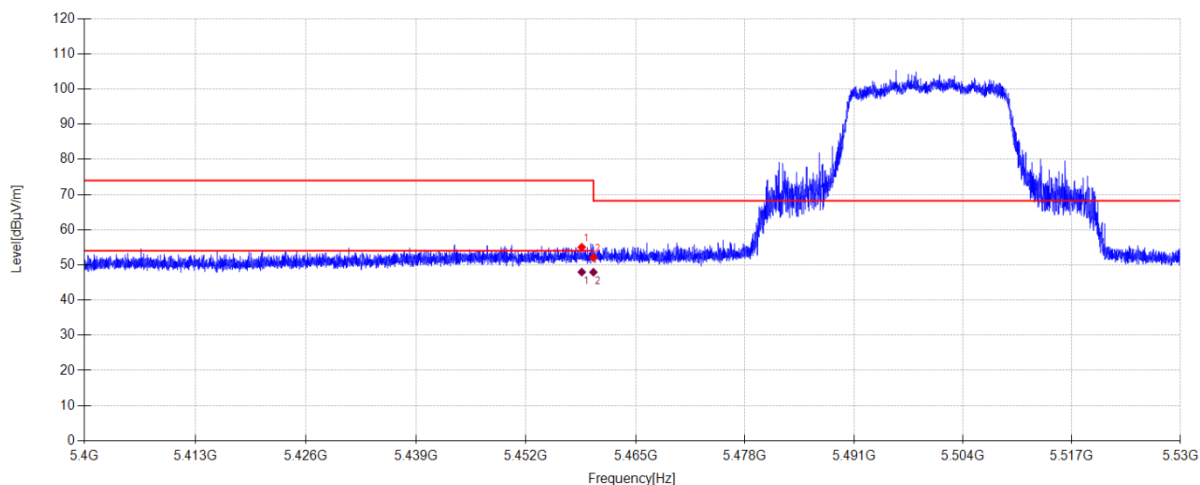

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.617	46.39	33.80	-25.16	55.03	74.00	18.97	PK	Horizontal
2	5460.000	43.43	33.80	-25.15	52.08	68.20	16.12	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.617	39.32	33.80	-25.16	47.96	54.00	6.04	AV	Horizontal
2	5460.000	39.27	33.80	-25.15	47.92	54.00	6.08	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\82
Memo: Sample Number: S26072123-002

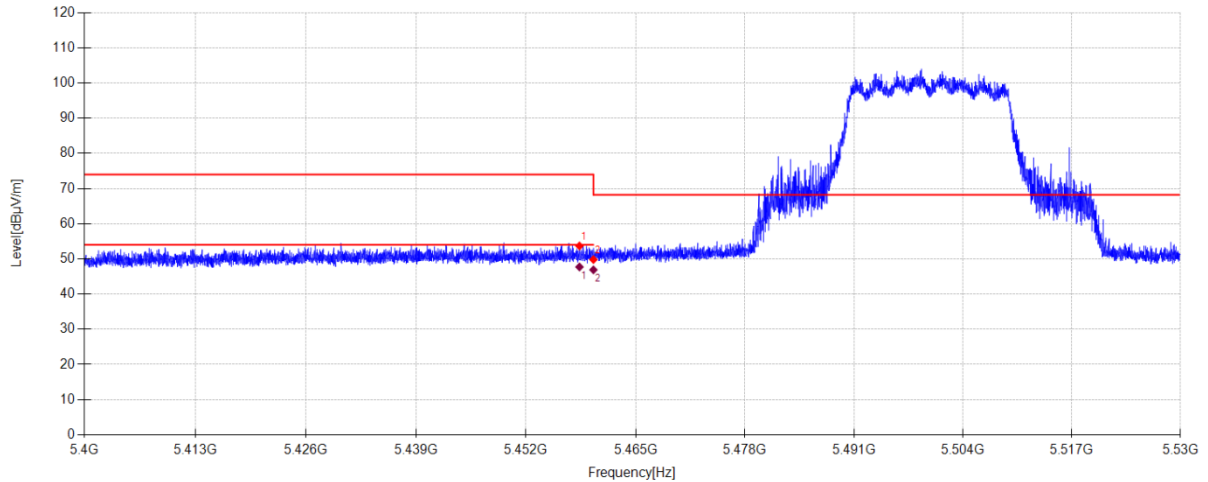**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.344	45.04	33.80	-25.16	53.68	74.00	20.32	PK	Vertical
2	5460.000	41.16	33.80	-25.15	49.81	68.20	18.39	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.344	39.07	33.80	-25.16	47.71	54.00	6.29	AV	Vertical
2	5460.000	38.24	33.80	-25.15	46.89	54.00	7.11	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\83

Memo:

Sample Number: S26072123-002

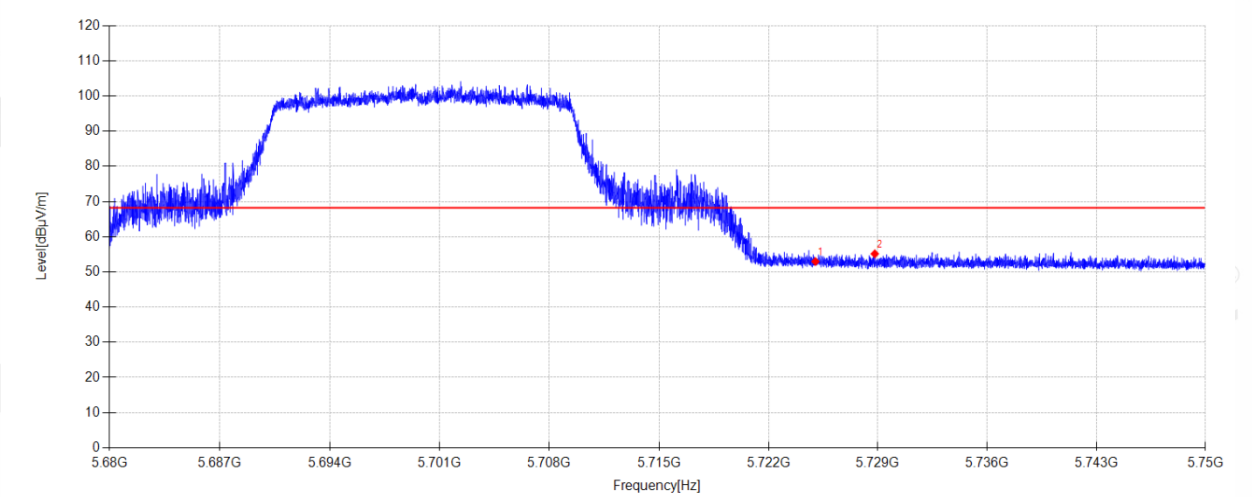

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.85	34.30	-25.20	52.95	68.20	15.25	PK	Horizontal
2	5728.797	46.01	34.32	-25.19	55.14	68.20	13.06	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\84

Memo:

Sample Number: S26072123-002

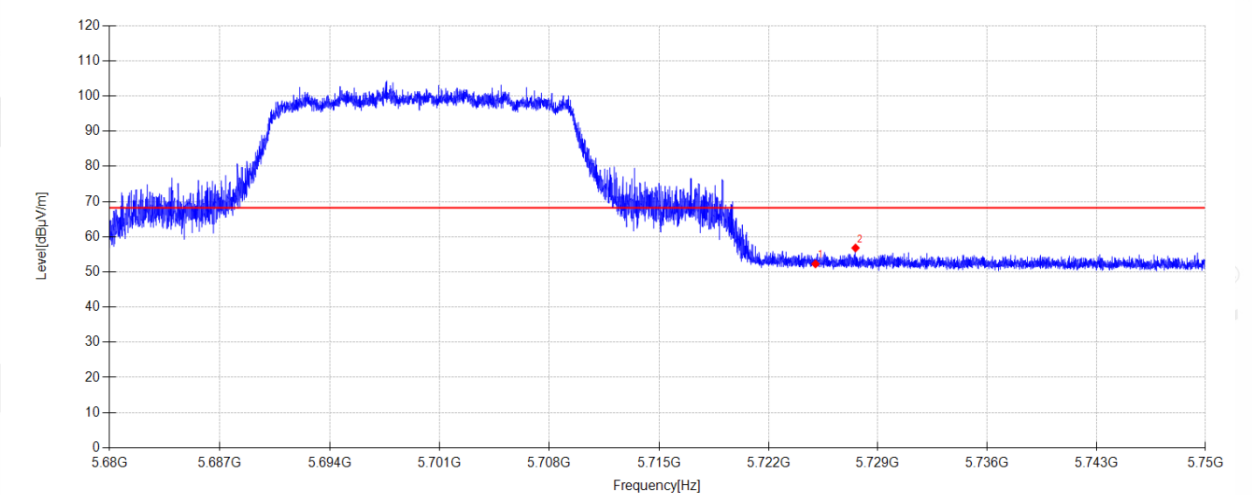

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.17	34.30	-25.20	52.27	68.20	15.93	PK	Vertical
2	5727.565	47.69	34.31	-25.19	56.81	68.20	11.39	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\85

Memo:

Sample Number: S26072123-002

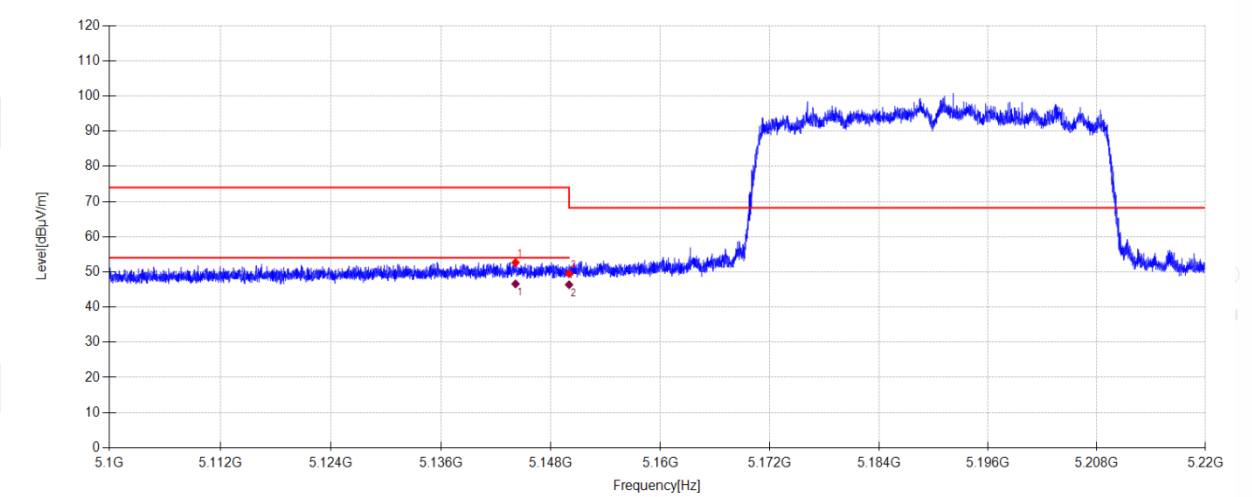

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.148	44.32	33.91	-25.59	52.64	74.00	21.36	PK	Horizontal
2	5150.000	41.19	33.90	-25.59	49.50	68.20	18.70	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.148	38.27	33.91	-25.59	46.59	54.00	7.41	AV	Horizontal
2	5150.000	38.04	33.90	-25.59	46.35	54.00	7.65	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\86
Memo: Sample Number: S26072123-002

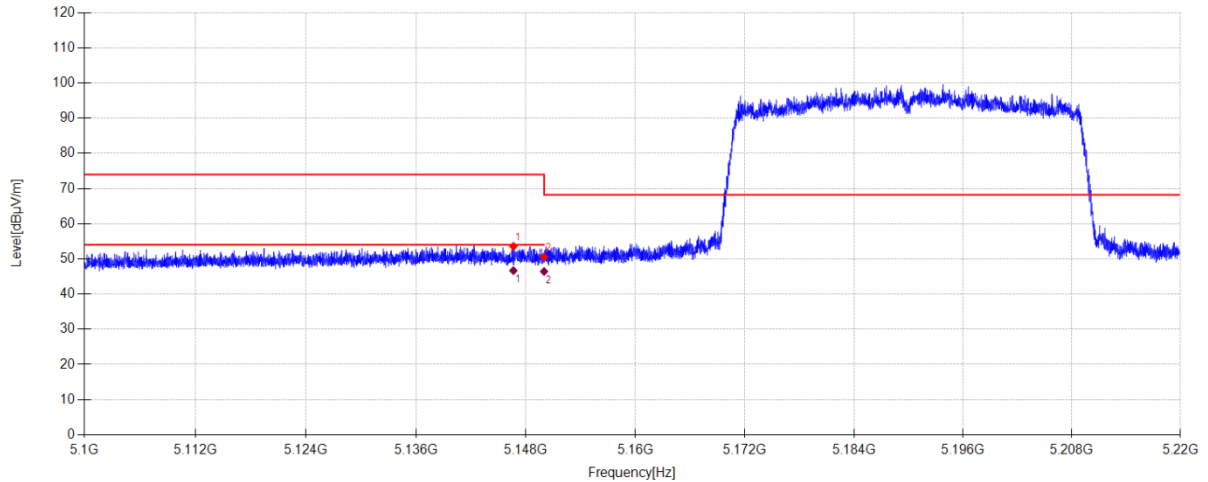**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.644	45.25	33.91	-25.59	53.57	74.00	20.43	PK	Vertical
2	5150.000	42.23	33.90	-25.59	50.54	68.20	17.66	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.644	38.36	33.91	-25.59	46.68	54.00	7.32	AV	Vertical
2	5150.000	38.12	33.90	-25.59	46.43	54.00	7.57	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\87
Memo: Sample Number: S26072123-002

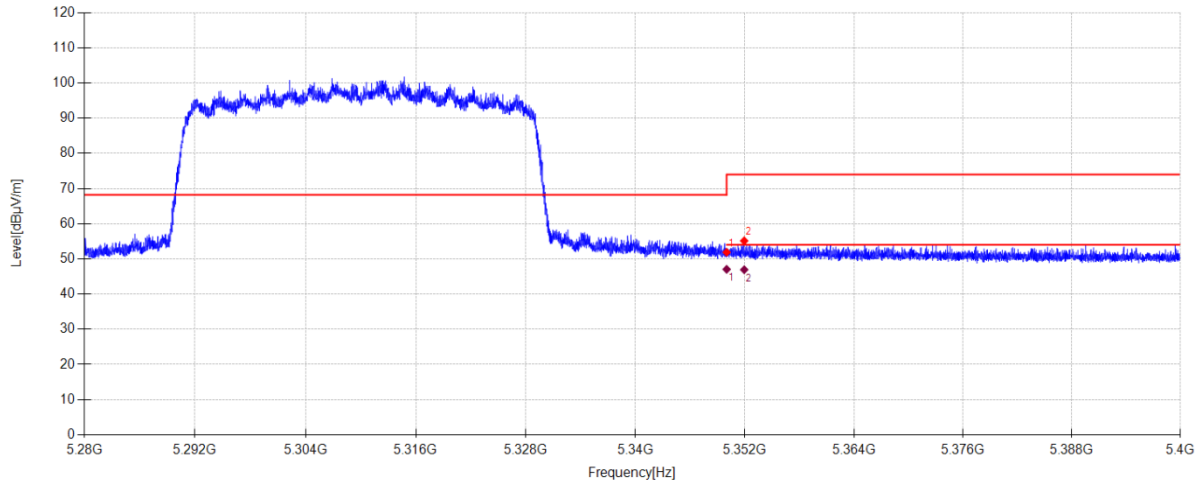**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.50	33.70	-25.31	51.89	68.20	16.31	PK	Horizontal
2	5351.928	46.74	33.70	-25.31	55.13	74.00	18.87	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.66	33.70	-25.31	47.05	54.00	6.95	AV	Horizontal
2	5351.928	38.54	33.70	-25.31	46.93	54.00	7.07	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.