


TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\88
Memo: Sample Number: S26072123-002

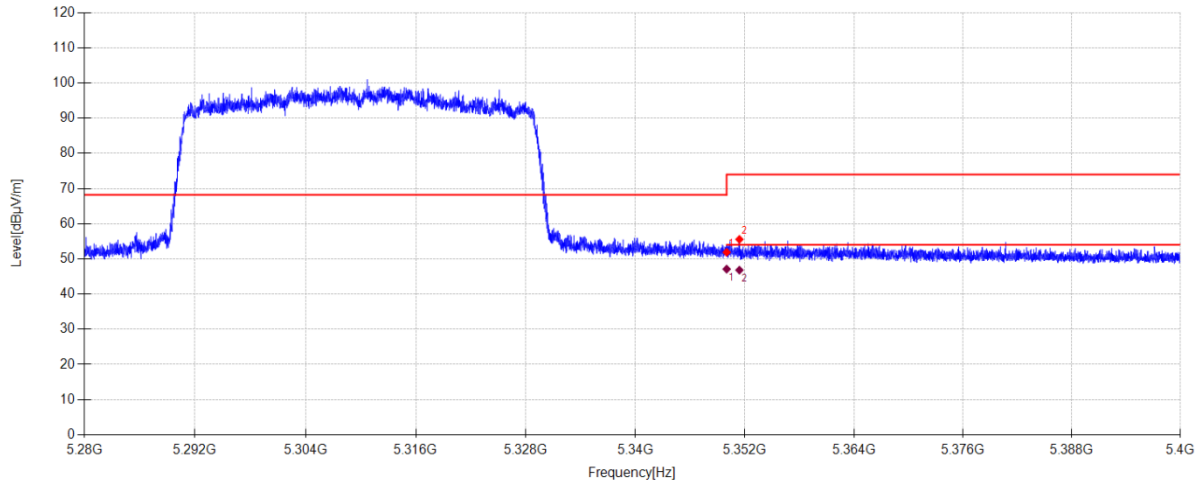

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.50	33.70	-25.31	51.89	68.20	16.31	PK	Vertical
2	5351.400	47.17	33.70	-25.31	55.56	74.00	18.44	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.71	33.70	-25.31	47.10	54.00	6.90	AV	Vertical
2	5351.400	38.43	33.70	-25.31	46.82	54.00	7.18	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\89
Memo: Sample Number: S26072123-002

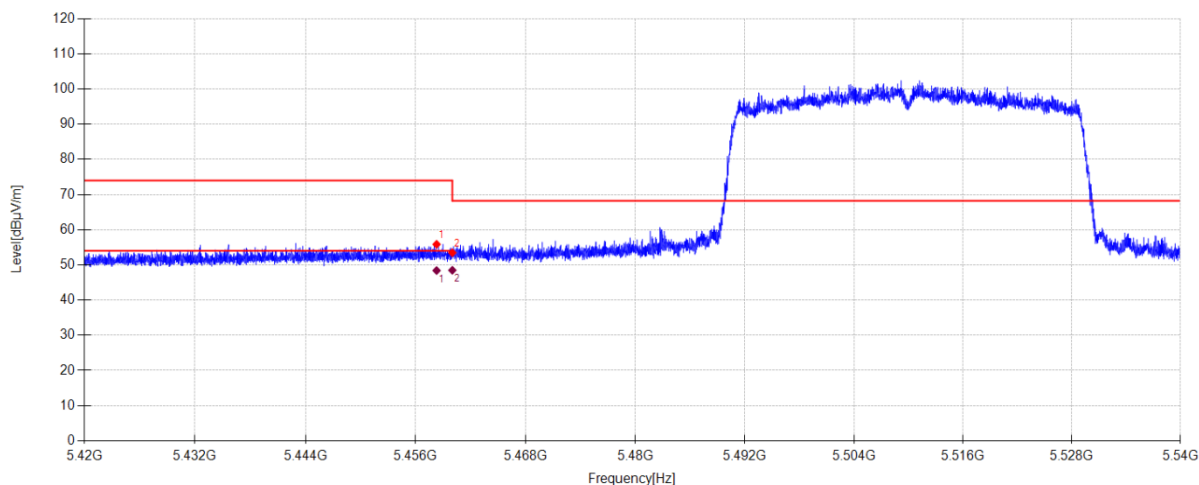**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.280	47.21	33.80	-25.16	55.85	74.00	18.15	PK	Horizontal
2	5460.000	44.81	33.80	-25.15	53.46	68.20	14.74	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.280	39.76	33.80	-25.16	48.40	54.00	5.60	AV	Horizontal
2	5460.000	39.83	33.80	-25.15	48.48	54.00	5.52	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\90
Memo: Sample Number: S26072123-002

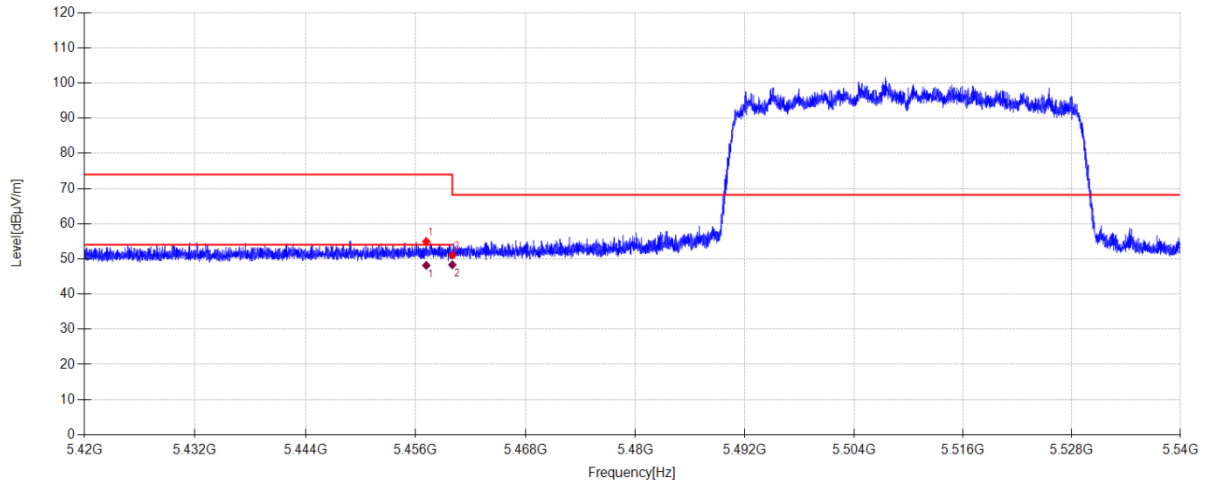**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.152	46.32	33.80	-25.16	54.96	74.00	19.04	PK	Vertical
2	5460.000	42.41	33.80	-25.15	51.06	68.20	17.14	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.152	39.51	33.80	-25.16	48.15	54.00	5.85	AV	Vertical
2	5460.000	39.67	33.80	-25.15	48.32	54.00	5.68	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\91

Memo:

Sample Number: S26072123-002

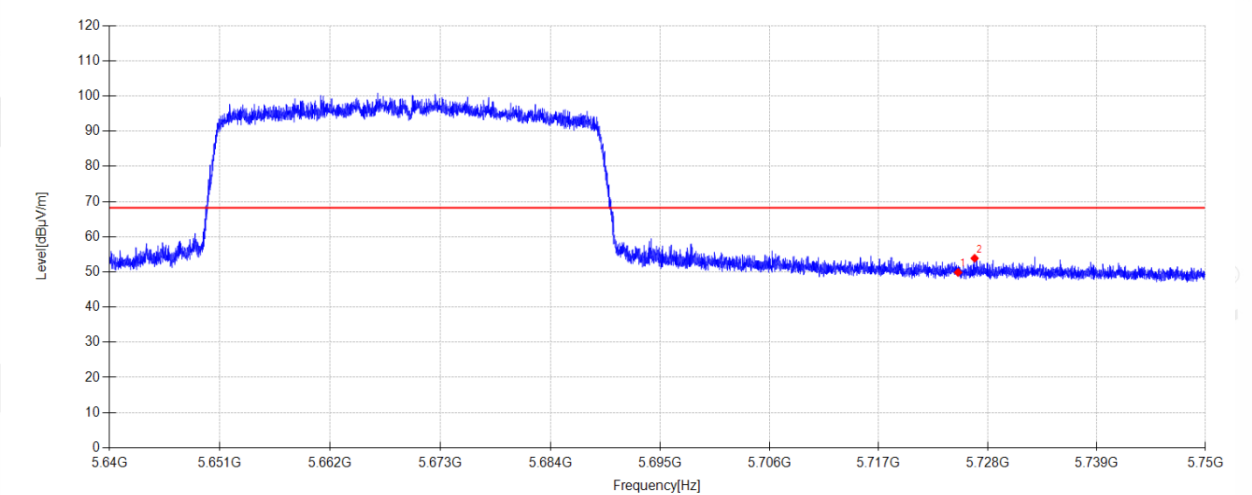

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.75	34.30	-25.20	49.85	68.20	18.35	PK	Horizontal
2	5726.669	44.76	34.31	-25.20	53.87	68.20	14.33	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\92

Memo:

Sample Number: S26072123-002

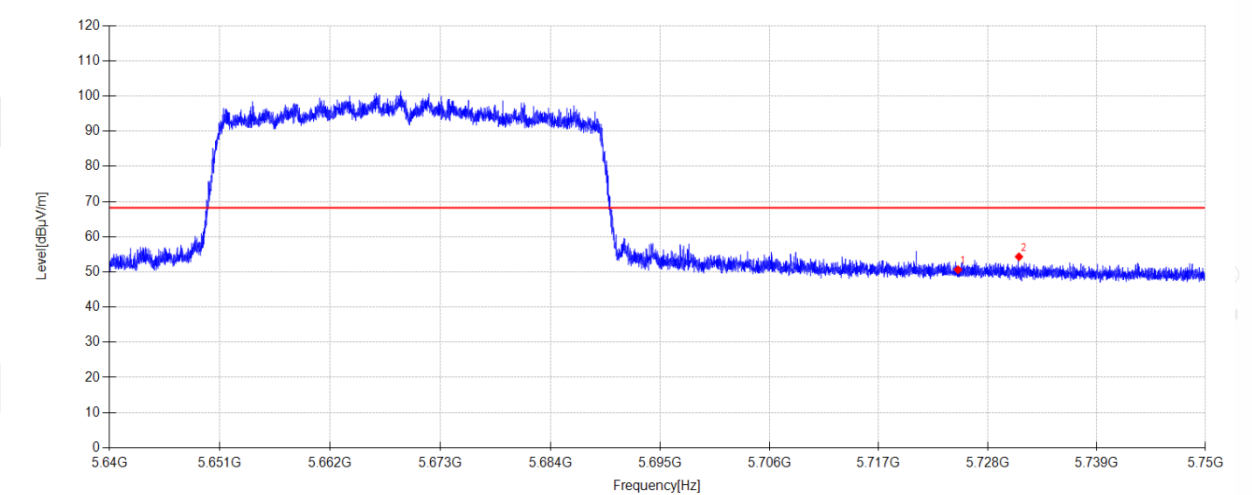

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.51	34.30	-25.20	50.61	68.20	17.59	PK	Vertical
2	5731.146	45.17	34.32	-25.19	54.30	68.20	13.90	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\93
Memo: Sample Number: S26072123-002

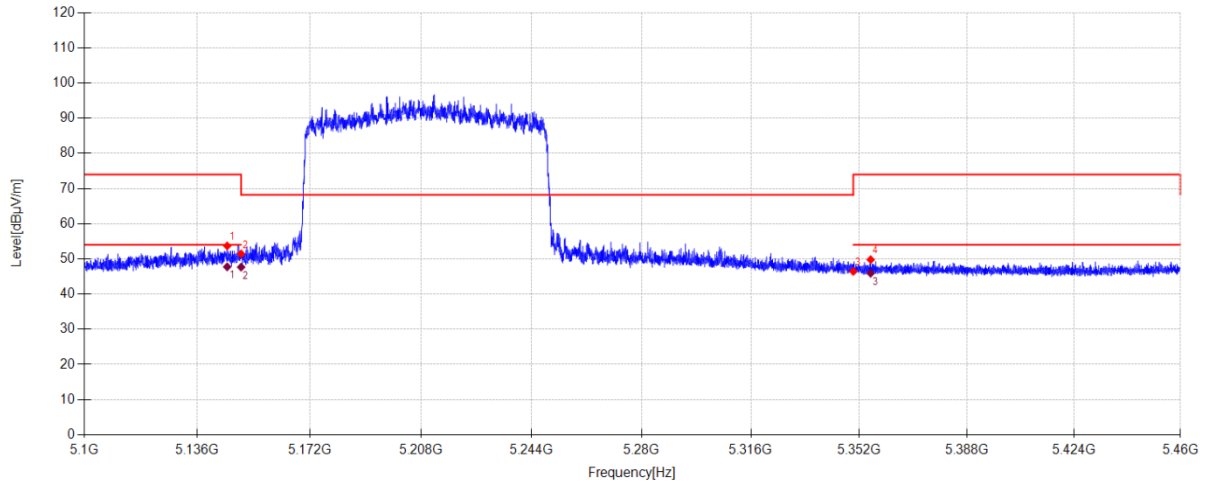**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.540	45.38	33.91	-25.59	53.70	74.00	20.30	PK	Horizontal
2	5150.000	43.13	33.90	-25.59	51.44	68.20	16.76	PK	Horizontal
3	5350.000	38.05	33.70	-25.31	46.44	68.20	21.76	PK	Horizontal
4	5355.780	41.40	33.70	-25.32	49.78	74.00	24.22	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.540	39.42	33.91	-25.59	47.74	54.00	6.26	AV	Horizontal
2	5150.000	39.35	33.90	-25.59	47.66	54.00	6.34	AV	Horizontal
3	5355.780	37.54	33.70	-25.32	45.92	54.00	8.08	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5210MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\94

Memo:

Sample Number: S26072123-002

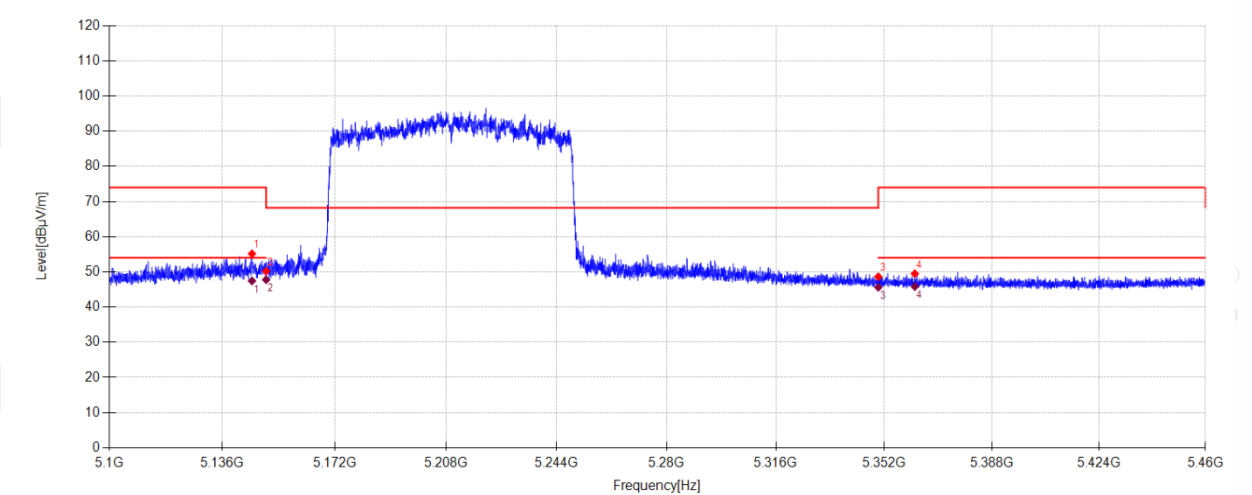

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.468	46.84	33.91	-25.59	55.16	74.00	18.84	PK	Vertical
2	5150.000	41.89	33.90	-25.59	50.20	68.20	18.00	PK	Vertical
3	5350.000	40.22	33.70	-25.31	48.61	68.20	19.59	PK	Vertical
4	5362.188	41.13	33.70	-25.34	49.49	74.00	24.51	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.468	39.12	33.91	-25.59	47.44	54.00	6.56	AV	Vertical
2	5150.000	39.46	33.90	-25.59	47.77	54.00	6.23	AV	Vertical
3	5350.000	37.23	33.70	-25.31	45.62	54.00	8.38	AV	Vertical
4	5362.188	37.48	33.70	-25.34	45.84	54.00	8.16	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\95

Memo:

Sample Number: S26072123-002

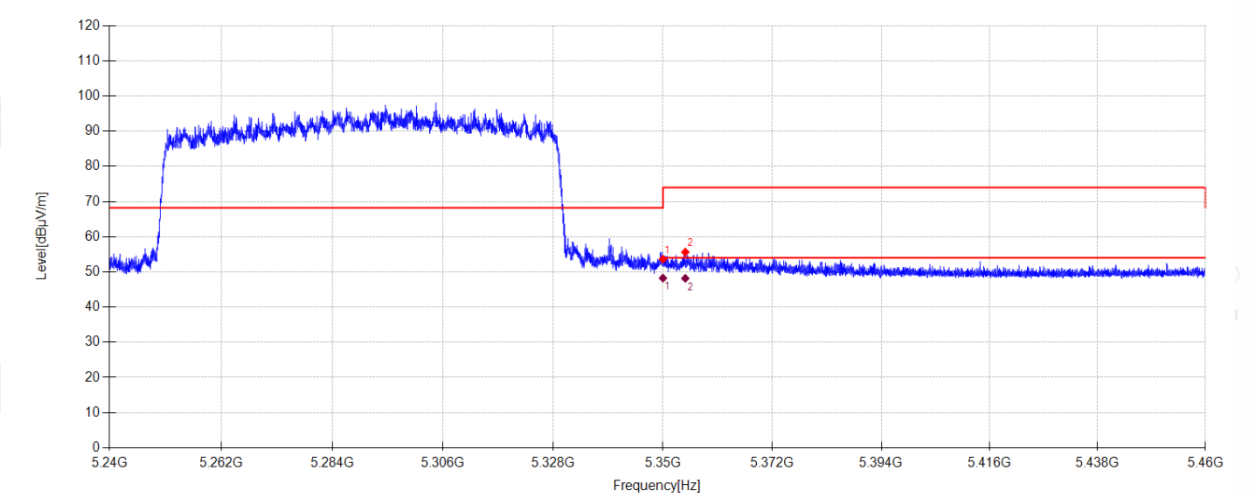

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.23	33.70	-25.31	53.62	68.20	14.58	PK	Horizontal
2	5354.488	47.24	33.70	-25.32	55.62	74.00	18.38	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.84	33.70	-25.31	48.23	54.00	5.77	AV	Horizontal
2	5354.488	39.78	33.70	-25.32	48.16	54.00	5.84	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5290MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\96
Memo: Sample Number: S26072123-002

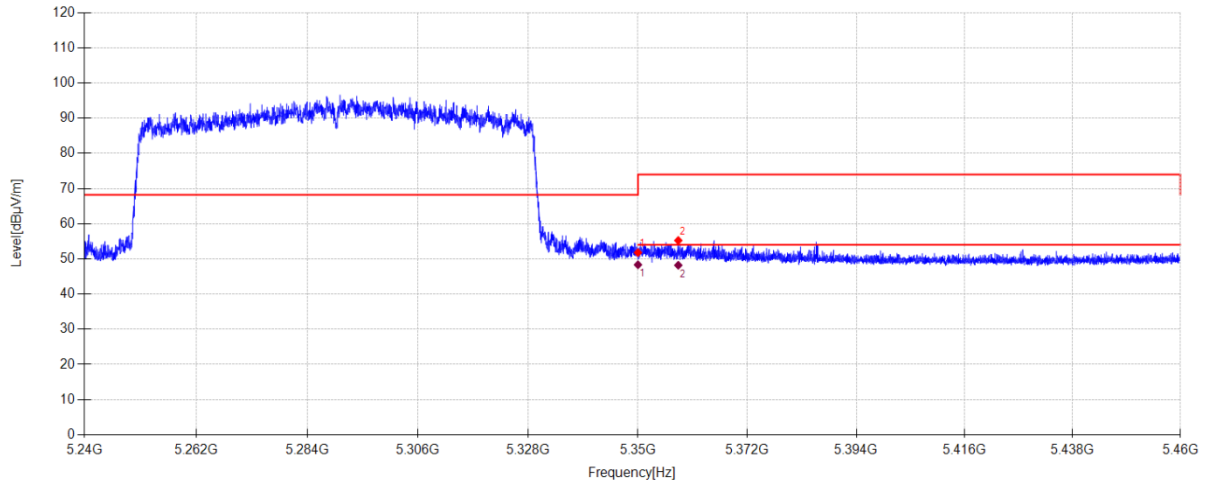**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.40	33.70	-25.31	51.79	68.20	16.41	PK	Vertical
2	5358.096	46.87	33.70	-25.33	55.24	74.00	18.76	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.94	33.70	-25.31	48.33	54.00	5.67	AV	Vertical
2	5358.096	39.83	33.70	-25.33	48.20	54.00	5.80	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\97
Memo: Sample Number: S26072123-002

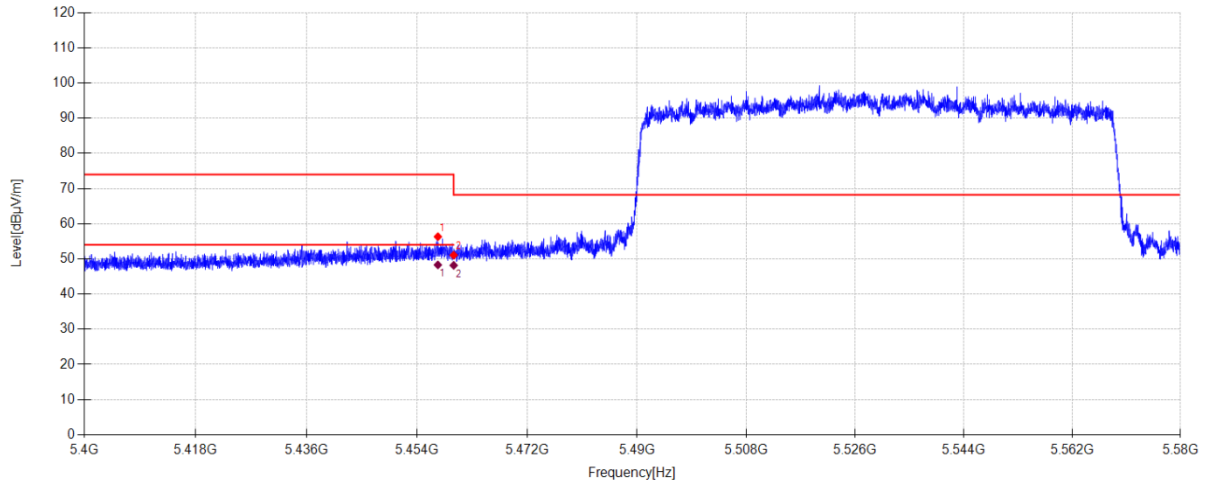**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.420	47.67	33.80	-25.16	56.31	74.00	17.69	PK	Horizontal
2	5460.000	42.41	33.80	-25.15	51.06	68.20	17.14	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.420	39.65	33.80	-25.16	48.29	54.00	5.71	AV	Horizontal
2	5460.000	39.52	33.80	-25.15	48.17	54.00	5.83	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\98
Memo: Sample Number: S26072123-002

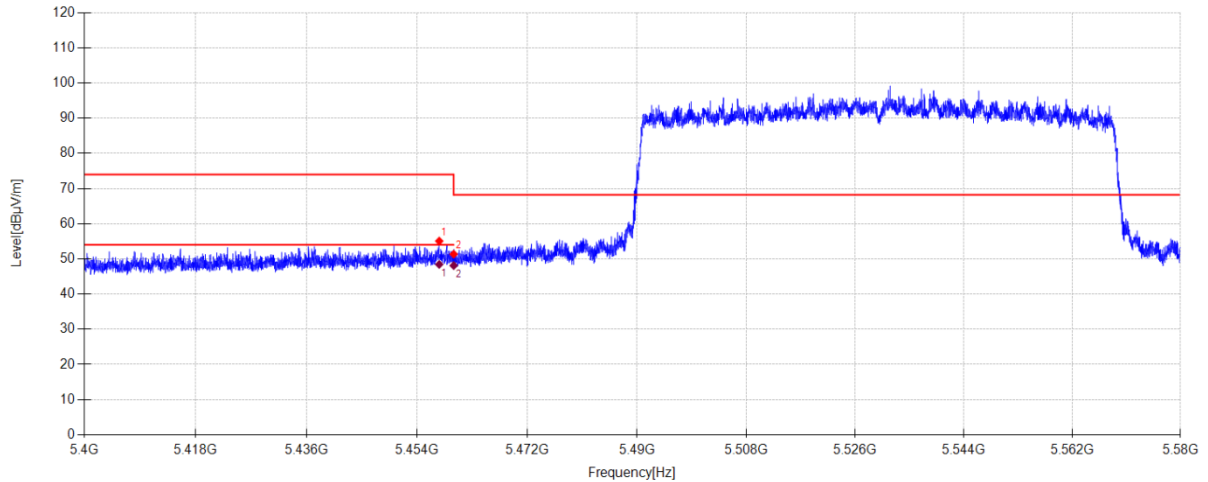**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.636	46.43	33.80	-25.16	55.07	74.00	18.93	PK	Vertical
2	5460.000	42.70	33.80	-25.15	51.35	68.20	16.85	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.636	39.79	33.80	-25.16	48.43	54.00	5.57	AV	Vertical
2	5460.000	39.45	33.80	-25.15	48.10	54.00	5.90	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\99

Memo:

Sample Number: S26072123-002

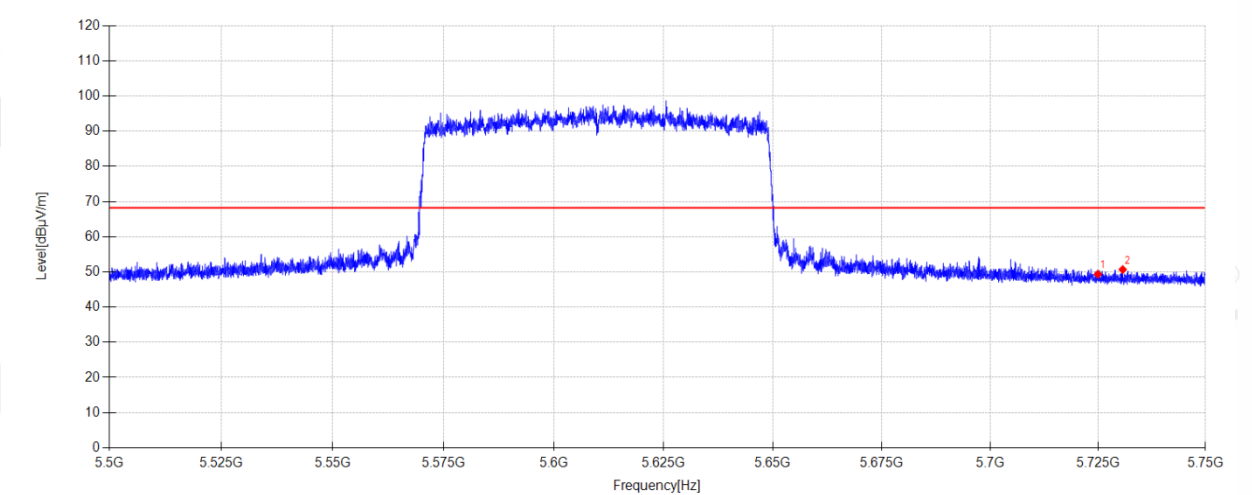

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	40.26	34.30	-25.20	49.36	68.20	18.84	PK	Horizontal
2	5730.775	41.54	34.32	-25.19	50.67	68.20	17.53	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G\100

Memo:

Sample Number: S26072123-002

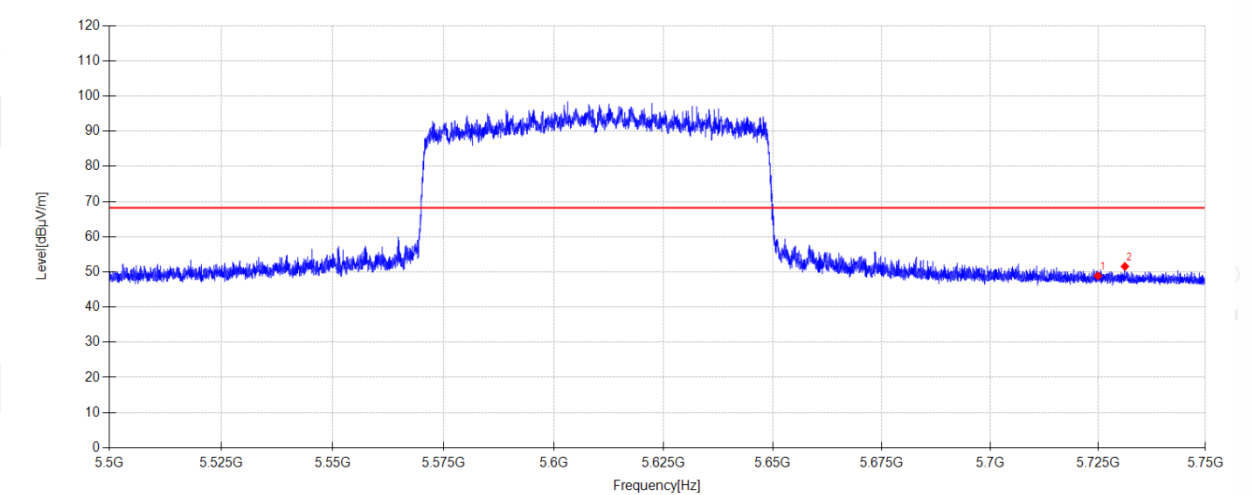

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	39.78	34.30	-25.20	48.88	68.20	19.32	PK	Vertical
2	5731.275	42.40	34.33	-25.18	51.55	68.20	16.65	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G RU\25

Memo:

Sample Number: S26072123-002

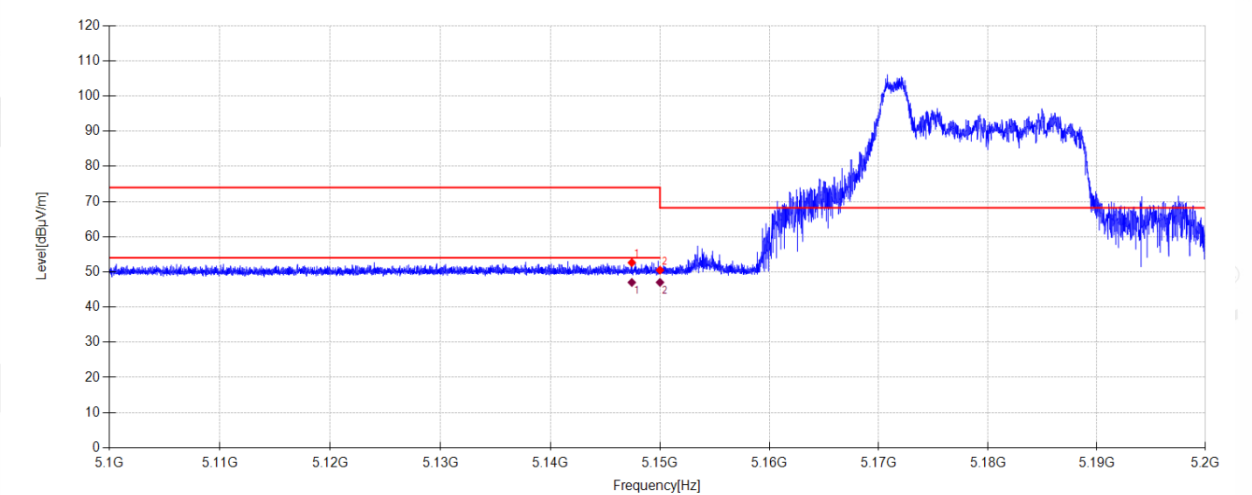

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.430	44.31	33.91	-25.59	52.63	74.00	21.37	PK	Horizontal
2	5150.000	42.17	33.90	-25.59	50.48	68.20	17.72	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.430	38.69	33.91	-25.59	47.01	54.00	6.99	AV	Horizontal
2	5150.000	38.71	33.90	-25.59	47.02	54.00	6.98	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G RU\26

Memo:

Sample Number: S26072123-002

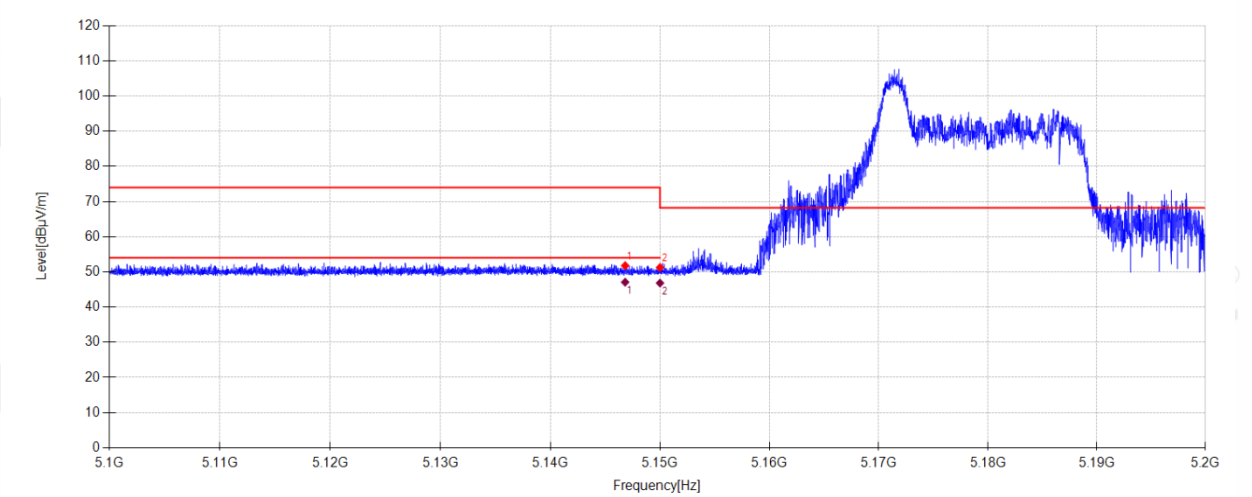

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.820	43.47	33.91	-25.59	51.79	74.00	22.21	PK	Vertical
2	5150.000	42.93	33.90	-25.59	51.24	68.20	16.96	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.820	38.76	33.91	-25.59	47.08	54.00	6.92	AV	Vertical
2	5150.000	38.52	33.90	-25.59	46.83	54.00	7.17	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G RU\23

Memo:

Sample Number: S26072123-002

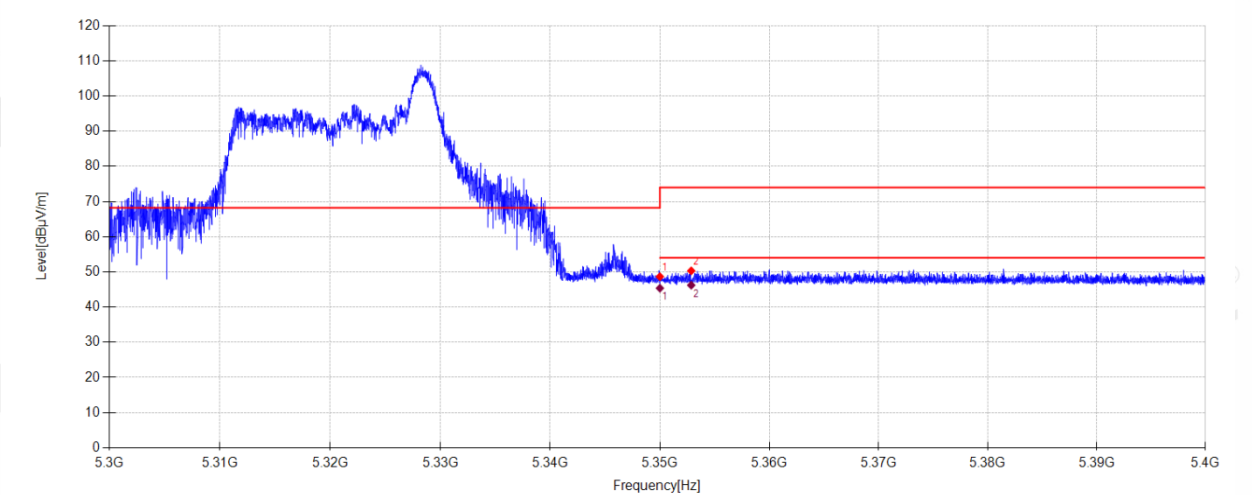

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.26	33.70	-25.31	48.65	68.20	19.55	PK	Horizontal
2	5352.860	41.91	33.70	-25.31	50.30	74.00	23.70	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	36.98	33.70	-25.31	45.37	54.00	8.63	AV	Horizontal
2	5352.860	37.83	33.70	-25.31	46.22	54.00	7.78	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G RU\24

Memo:

Sample Number: S26072123-002

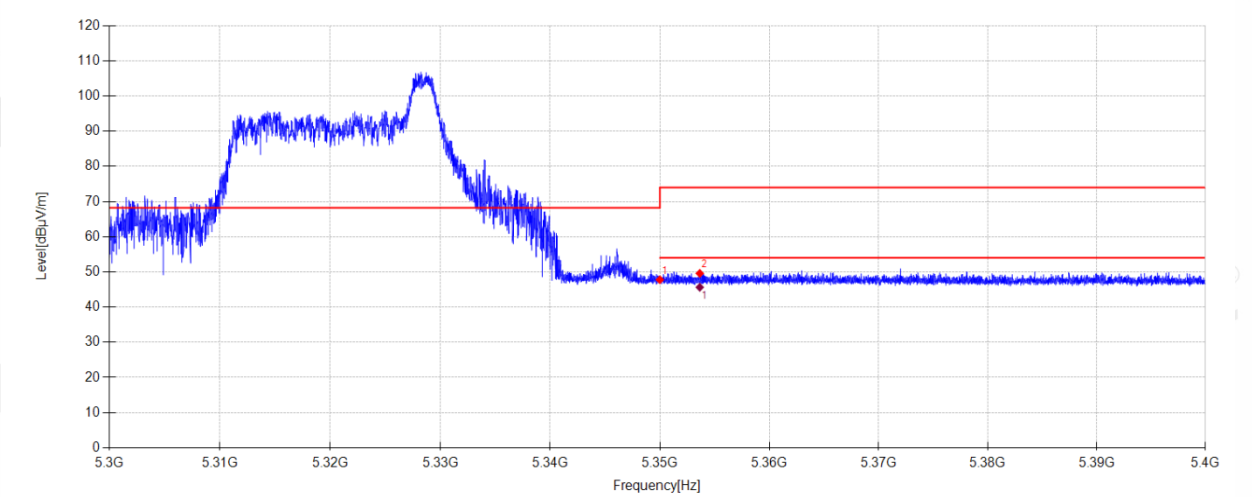

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.38	33.70	-25.31	47.77	68.20	20.43	PK	Vertical
2	5353.640	41.19	33.70	-25.32	49.57	74.00	24.43	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5353.640	37.25	33.70	-25.32	45.63	54.00	8.37	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-30 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU0 5500MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G RU\21
Memo: Sample Number: S26072123-002

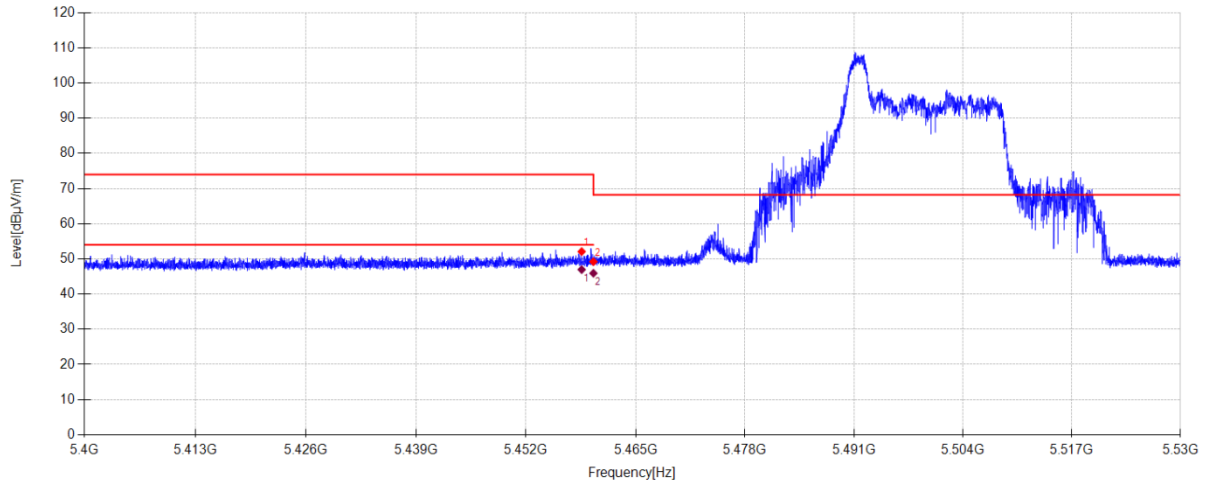

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.604	43.43	33.80	-25.16	52.07	74.00	21.93	PK	Horizontal
2	5460.000	40.57	33.80	-25.15	49.22	68.20	18.98	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.604	38.32	33.80	-25.16	46.96	54.00	7.04	AV	Horizontal
2	5460.000	37.27	33.80	-25.15	45.92	54.00	8.08	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-30 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU0 5500MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G RU\22
Memo: Sample Number: S26072123-002

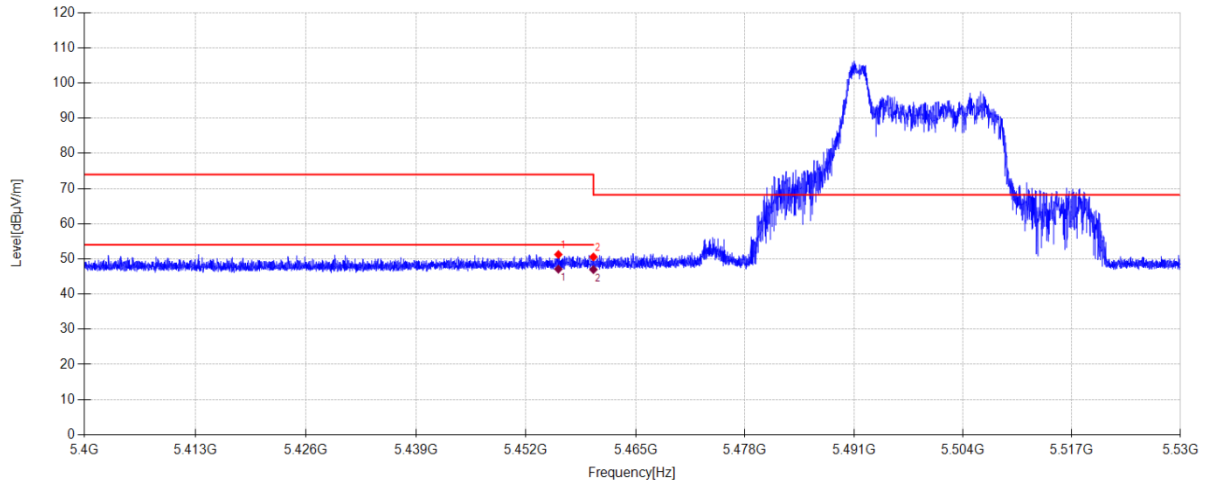**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.848	42.62	33.80	-25.17	51.25	74.00	22.75	PK	Vertical
2	5460.000	41.92	33.80	-25.15	50.57	68.20	17.63	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.848	38.47	33.80	-25.17	47.10	54.00	6.90	AV	Vertical
2	5460.000	38.31	33.80	-25.15	46.96	54.00	7.04	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G RU\19

Memo:

Sample Number: S26072123-002

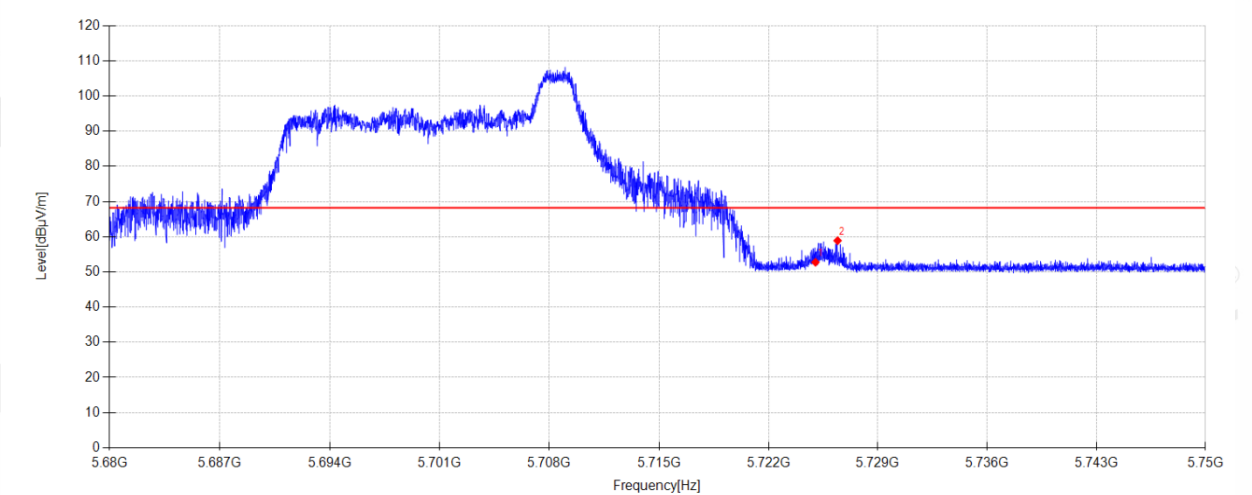

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.64	34.30	-25.20	52.74	68.20	15.46	PK	Horizontal
2	5726.417	49.77	34.31	-25.20	58.88	68.20	9.32	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G RU\20

Memo:

Sample Number: S26072123-002

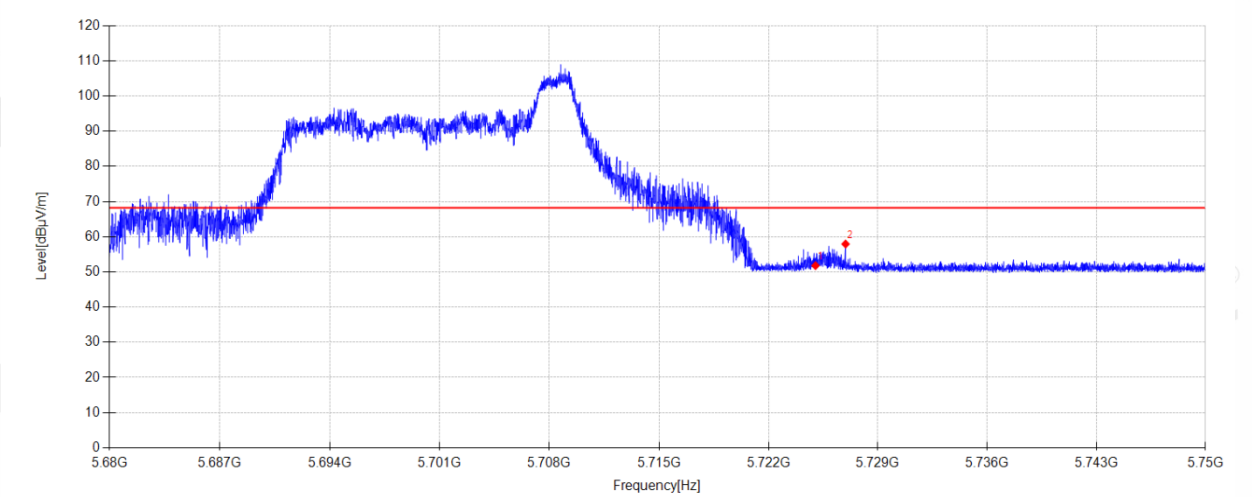

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.67	34.30	-25.20	51.77	68.20	16.43	PK	Vertical
2	5726.928	48.82	34.31	-25.20	57.93	68.20	10.27	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\5

Memo:

Sample Number: S26072123-002

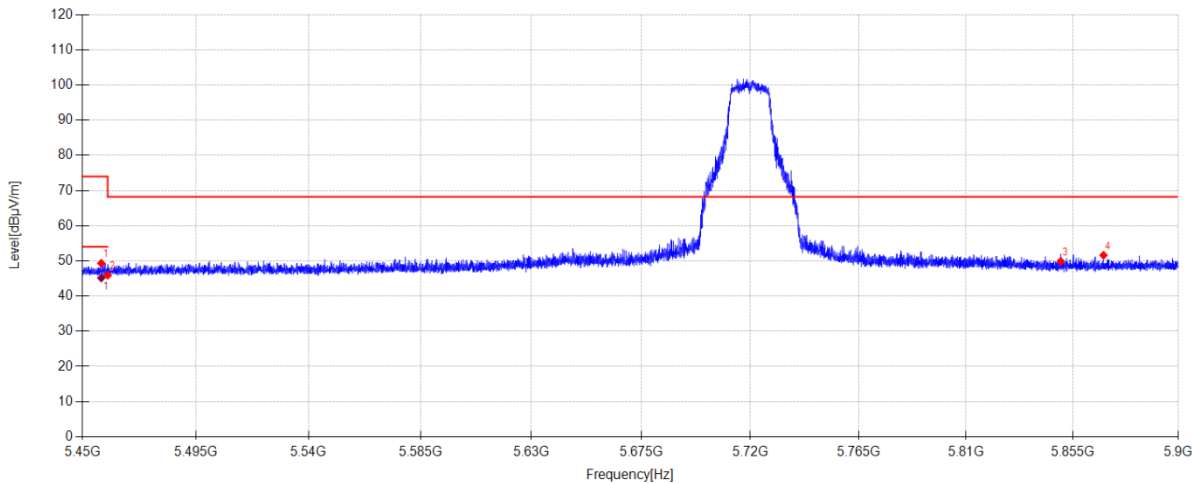

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.470	40.69	33.80	-25.16	49.33	74.00	24.67	PK	Horizontal
2	5460.000	37.25	33.80	-25.15	45.90	68.20	22.30	PK	Horizontal
3	5850.000	40.04	34.80	-24.95	49.89	68.20	18.31	PK	Horizontal
4	5868.140	41.68	34.84	-24.92	51.60	68.20	16.60	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.470	36.51	33.80	-25.16	45.15	54.00	8.85	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\6

Memo:

Sample Number: S26072123-002

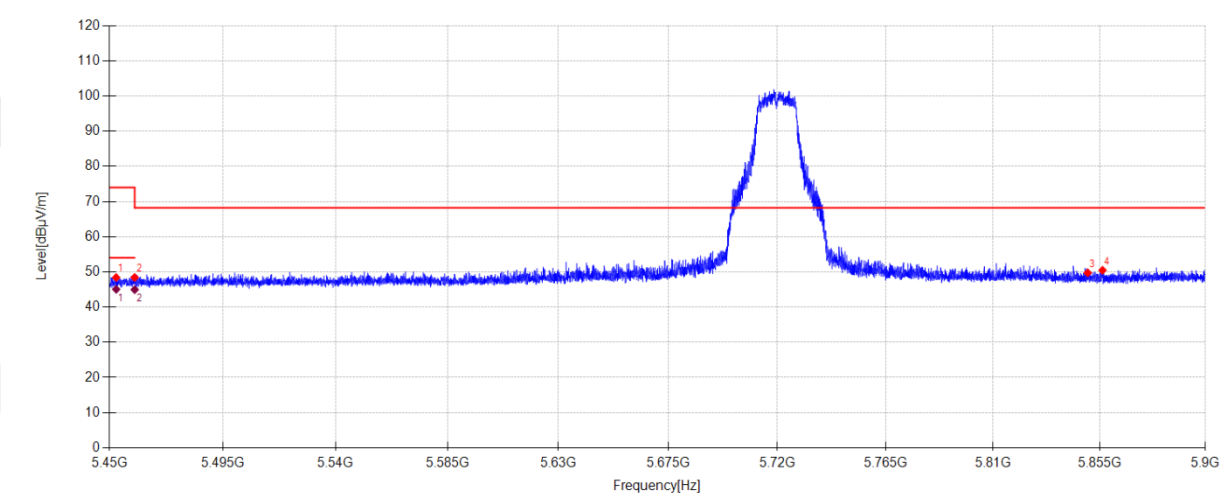

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.700	39.79	33.80	-25.19	48.40	74.00	25.60	PK	Vertical
2	5460.000	39.76	33.80	-25.15	48.41	68.20	19.79	PK	Vertical
3	5850.000	39.89	34.80	-24.95	49.74	68.20	18.46	PK	Vertical
4	5856.260	40.59	34.81	-24.94	50.46	68.20	17.74	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.700	36.45	33.80	-25.19	45.06	54.00	8.94	AV	Vertical
2	5460.000	36.31	33.80	-25.15	44.96	54.00	9.04	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\7

Memo:

Sample Number: S26072123-002

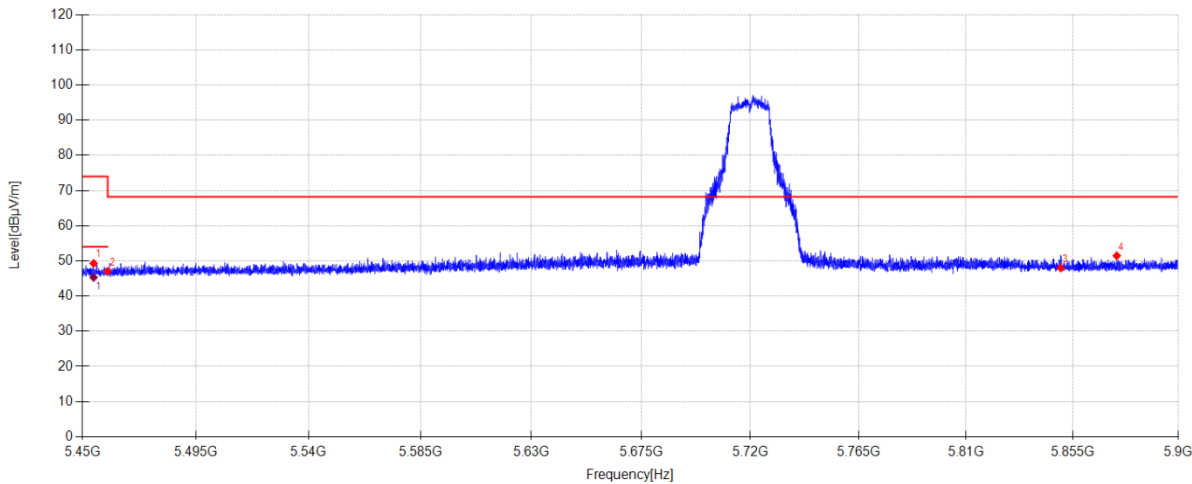

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.455	40.67	33.80	-25.18	49.29	74.00	24.71	PK	Horizontal
2	5460.000	38.41	33.80	-25.15	47.06	68.20	21.14	PK	Horizontal
3	5850.000	38.13	34.80	-24.95	47.98	68.20	20.22	PK	Horizontal
4	5873.765	41.53	34.85	-24.92	51.46	68.20	16.74	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.455	36.68	33.80	-25.18	45.30	54.00	8.70	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\8

Memo:

Sample Number: S26072123-002

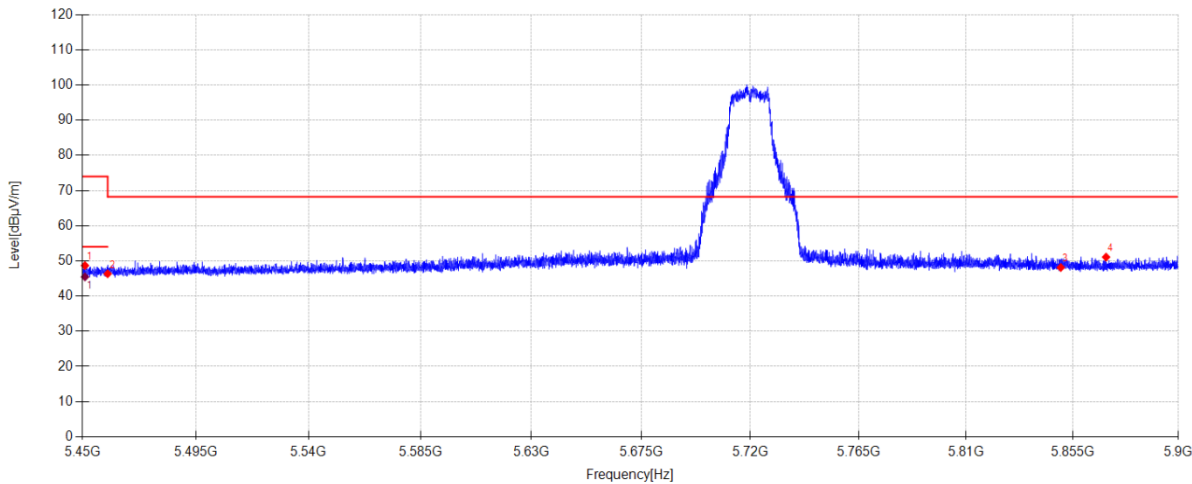

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.035	40.06	33.80	-25.19	48.67	74.00	25.33	PK	Vertical
2	5460.000	37.69	33.80	-25.15	46.34	68.20	21.86	PK	Vertical
3	5850.000	38.26	34.80	-24.95	48.11	68.20	20.09	PK	Vertical
4	5869.220	41.16	34.84	-24.92	51.08	68.20	17.12	PK	Vertical


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.035	36.85	33.80	-25.19	45.46	54.00	8.54	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 5720MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\1
Memo: Sample Number: S26072123-002

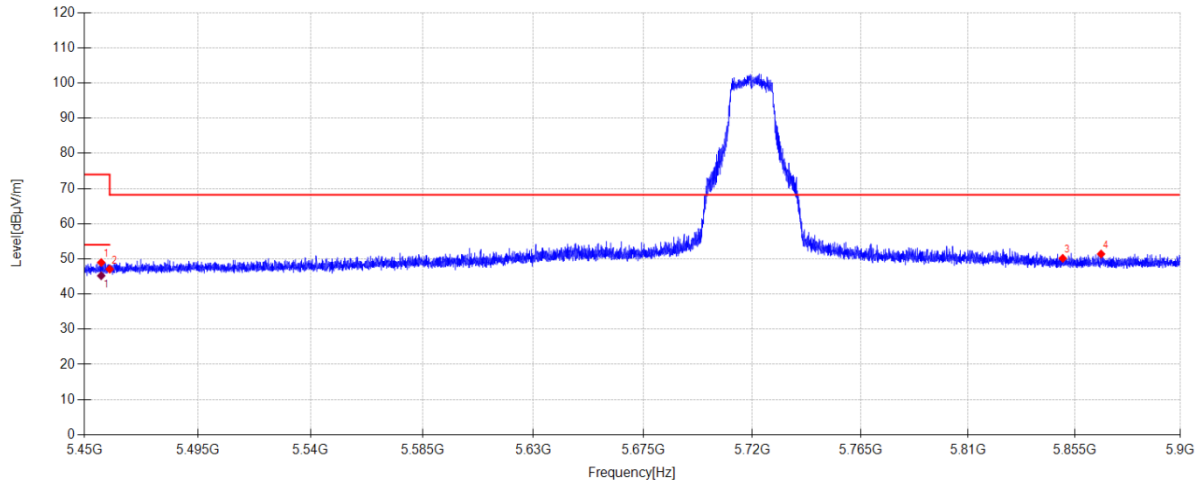**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.660	40.33	33.80	-25.17	48.96	74.00	25.04	PK	Horizontal
2	5460.000	38.44	33.80	-25.15	47.09	68.20	21.11	PK	Horizontal
3	5850.000	40.31	34.80	-24.95	50.16	68.20	18.04	PK	Horizontal
4	5866.250	41.50	34.83	-24.93	51.40	68.20	16.80	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.660	36.58	33.80	-25.17	45.21	54.00	8.79	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\2

Memo:

Sample Number: S26072123-002

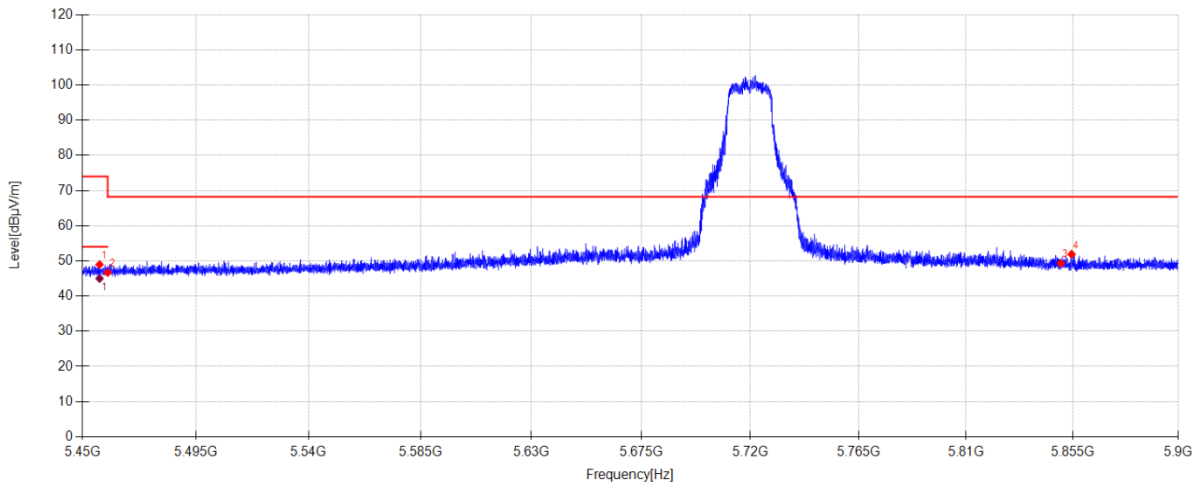

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.795	40.34	33.80	-25.17	48.97	74.00	25.03	PK	Vertical
2	5460.000	38.05	33.80	-25.15	46.70	68.20	21.50	PK	Vertical
3	5850.000	39.47	34.80	-24.95	49.32	68.20	18.88	PK	Vertical
4	5854.595	42.03	34.81	-24.94	51.90	68.20	16.30	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.795	36.37	33.80	-25.17	45.00	54.00	9.00	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\3

Memo:

Sample Number: S26072123-002

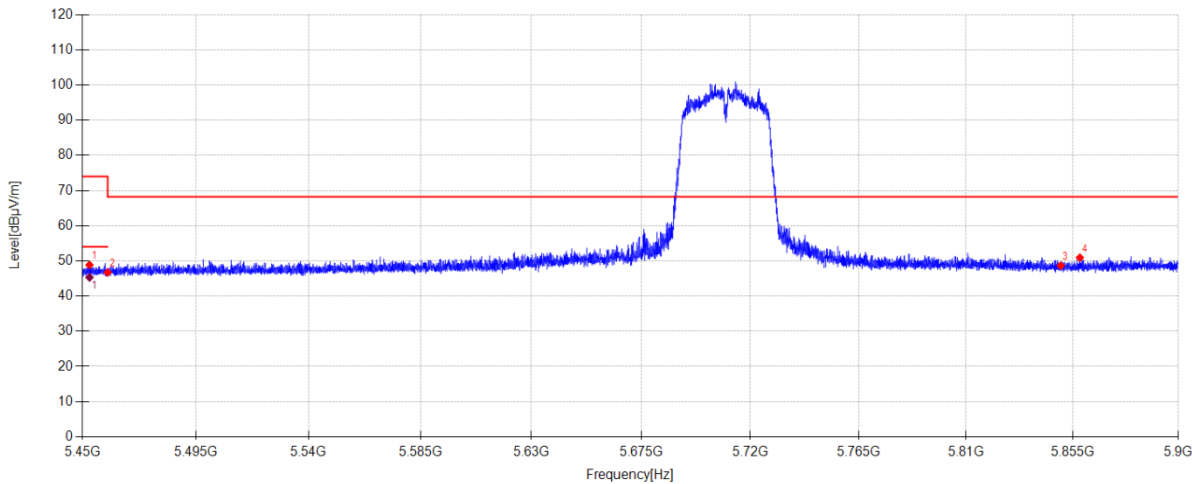

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.835	40.24	33.80	-25.19	48.85	74.00	25.15	PK	Horizontal
2	5460.000	38.08	33.80	-25.15	46.73	68.20	21.47	PK	Horizontal
3	5850.000	38.81	34.80	-24.95	48.66	68.20	19.54	PK	Horizontal
4	5858.105	41.05	34.82	-24.94	50.93	68.20	17.27	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.835	36.71	33.80	-25.19	45.32	54.00	8.68	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\4

Memo:

Sample Number: S26072123-002

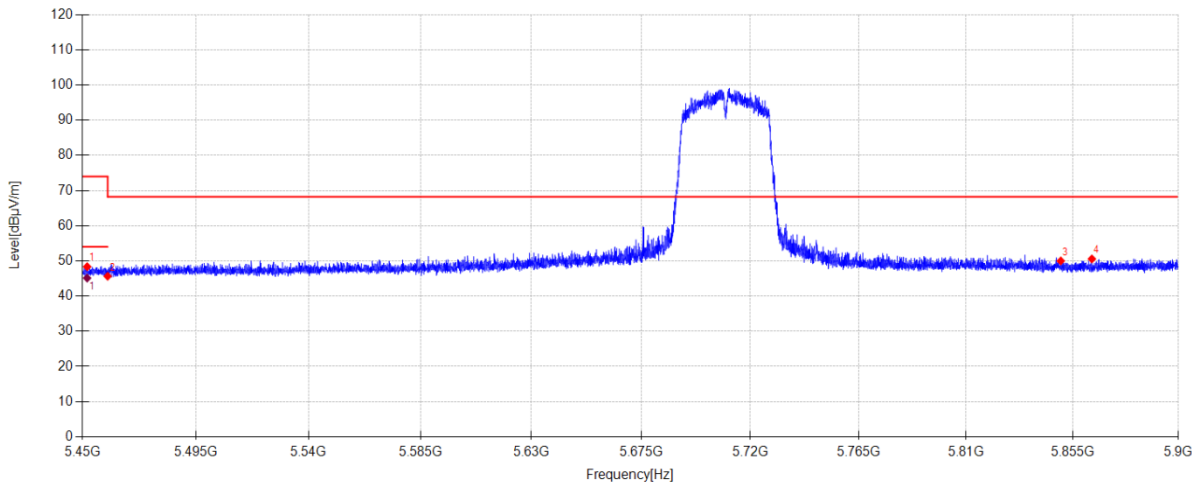

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.890	39.74	33.80	-25.19	48.35	74.00	25.65	PK	Vertical
2	5460.000	36.99	33.80	-25.15	45.64	68.20	22.56	PK	Vertical
3	5850.000	40.14	34.80	-24.95	49.99	68.20	18.21	PK	Vertical
4	5863.190	40.66	34.83	-24.93	50.56	68.20	17.64	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.890	36.51	33.80	-25.19	45.12	54.00	8.88	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5720MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\9
Memo: Sample Number: S26072123-002

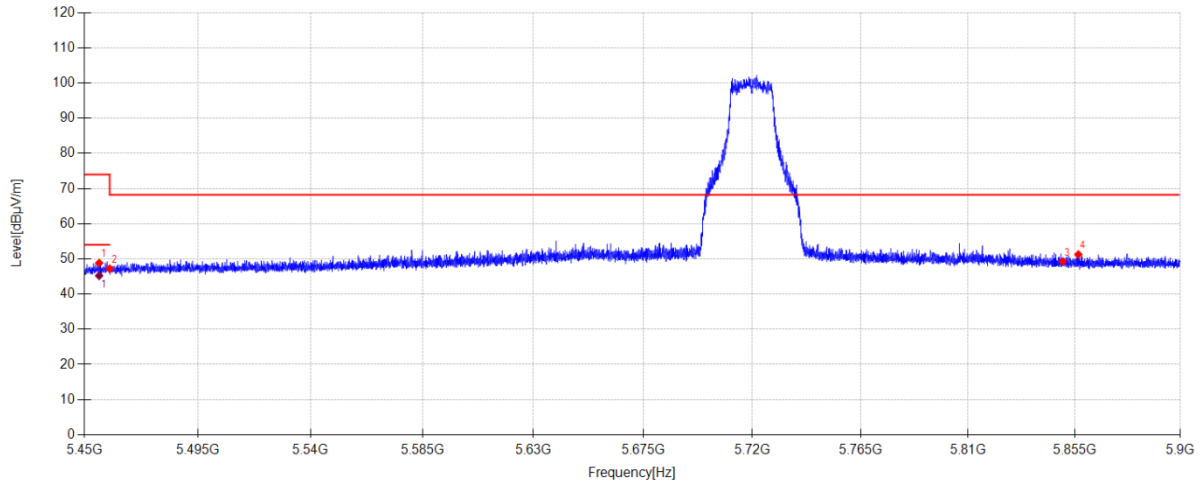**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.850	40.19	33.80	-25.17	48.82	74.00	25.18	PK	Horizontal
2	5460.000	38.56	33.80	-25.15	47.21	68.20	20.99	PK	Horizontal
3	5850.000	39.41	34.80	-24.95	49.26	68.20	18.94	PK	Horizontal
4	5856.620	41.38	34.81	-24.94	51.25	68.20	16.95	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.850	36.59	33.80	-25.17	45.22	54.00	8.78	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\10

Memo:

Sample Number: S26072123-002

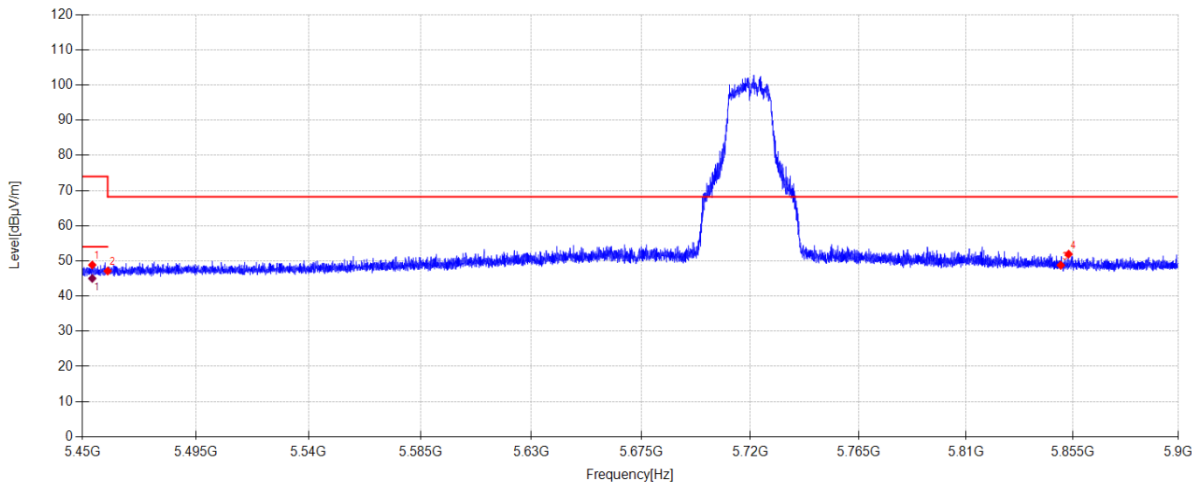

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.915	40.22	33.80	-25.18	48.84	74.00	25.16	PK	Vertical
2	5460.000	38.47	33.80	-25.15	47.12	68.20	21.08	PK	Vertical
3	5850.000	38.91	34.80	-24.95	48.76	68.20	19.44	PK	Vertical
4	5853.335	42.06	34.81	-24.95	51.92	68.20	16.28	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.915	36.40	33.80	-25.18	45.02	54.00	8.98	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5710MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\11
Memo: Sample Number: S26072123-002

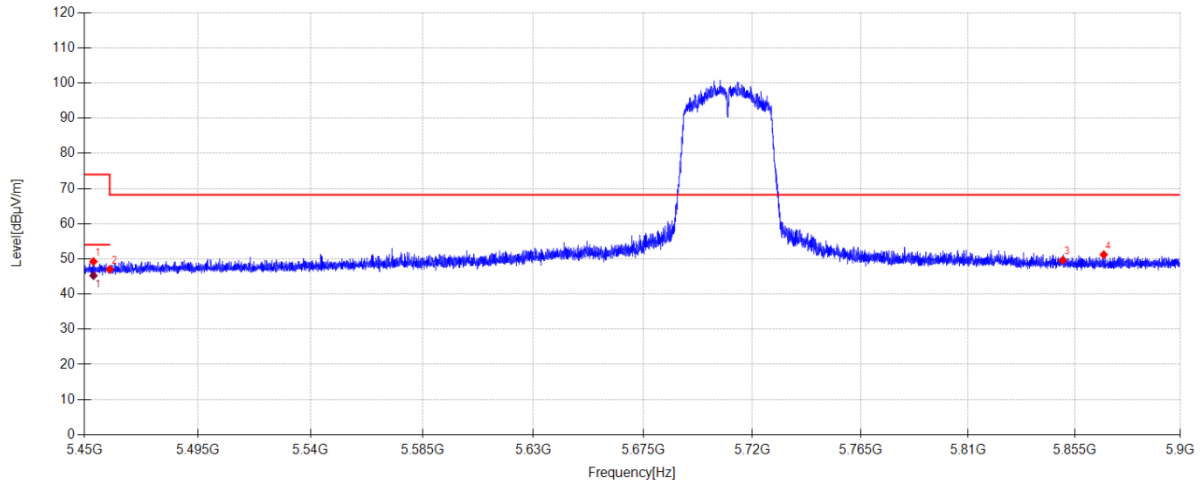**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.600	40.64	33.80	-25.18	49.26	74.00	24.74	PK	Horizontal
2	5460.000	38.39	33.80	-25.15	47.04	68.20	21.16	PK	Horizontal
3	5850.000	39.75	34.80	-24.95	49.60	68.20	18.60	PK	Horizontal
4	5867.375	41.31	34.83	-24.93	51.21	68.20	16.99	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.600	36.63	33.80	-25.18	45.25	54.00	8.75	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5710MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\12
Memo: Sample Number: S26072123-002

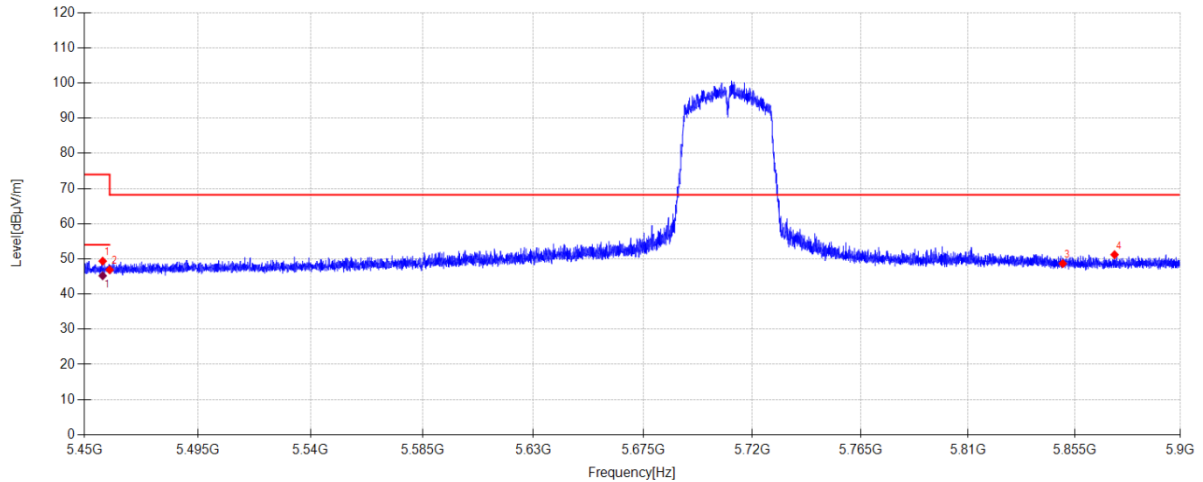**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.245	40.73	33.80	-25.16	49.37	74.00	24.63	PK	Vertical
2	5460.000	38.24	33.80	-25.15	46.89	68.20	21.31	PK	Vertical
3	5850.000	38.82	34.80	-24.95	48.67	68.20	19.53	PK	Vertical
4	5871.965	41.28	34.84	-24.92	51.20	68.20	17.00	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.245	36.57	33.80	-25.16	45.21	54.00	8.79	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5690MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\13

Memo:

Sample Number: S26072123-002

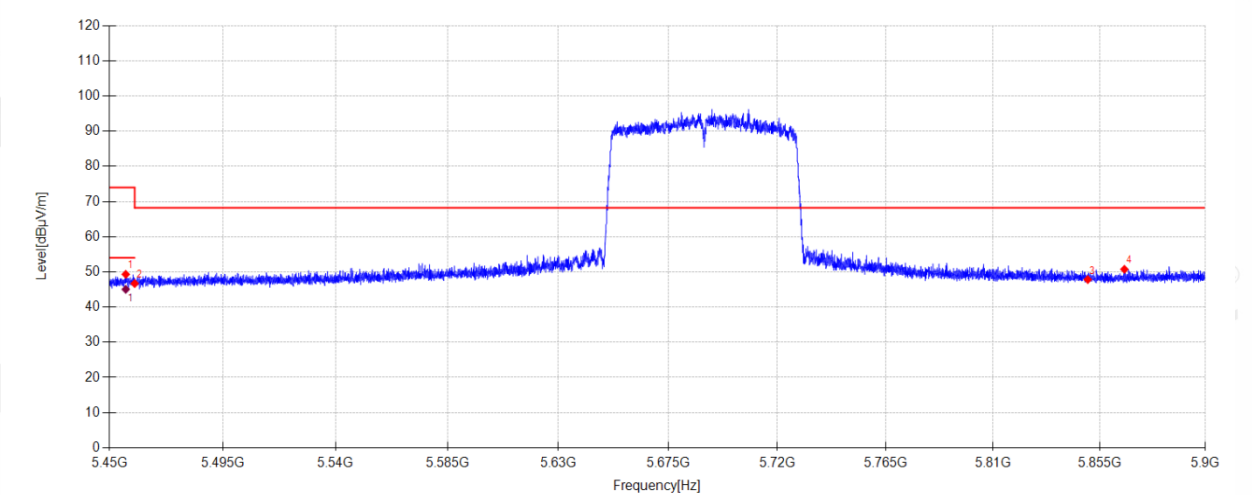

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.480	40.68	33.80	-25.17	49.31	74.00	24.69	PK	Horizontal
2	5460.000	38.04	33.80	-25.15	46.69	68.20	21.51	PK	Horizontal
3	5850.000	37.97	34.80	-24.95	47.82	68.20	20.38	PK	Horizontal
4	5865.530	40.85	34.83	-24.93	50.75	68.20	17.45	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.480	36.42	33.80	-25.17	45.05	54.00	8.95	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5690MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\14

Memo:

Sample Number: S26072123-002

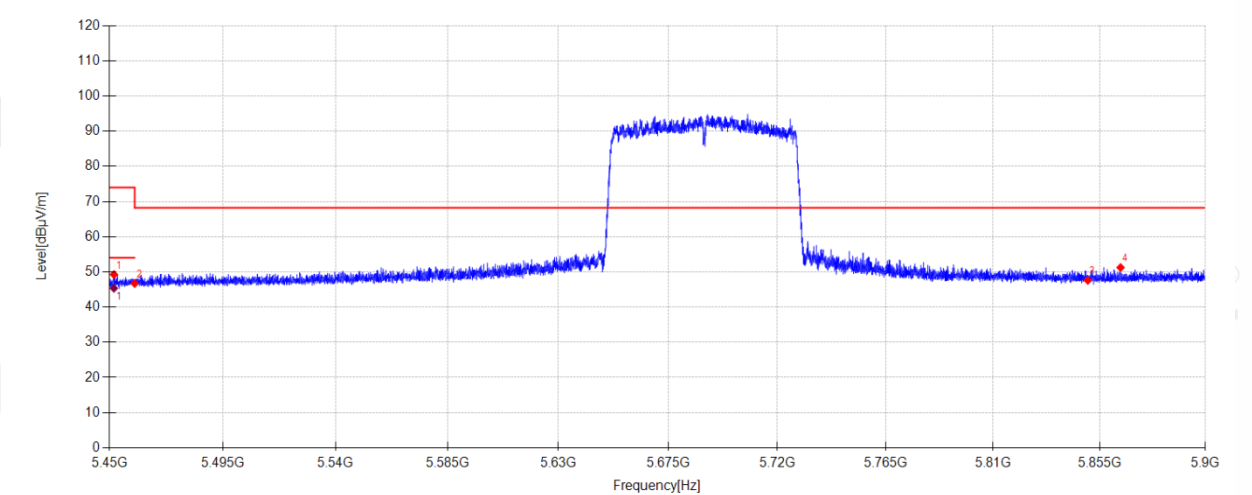

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.800	40.64	33.80	-25.19	49.25	74.00	24.75	PK	Vertical
2	5460.000	38.05	33.80	-25.15	46.70	68.20	21.50	PK	Vertical
3	5850.000	37.74	34.80	-24.95	47.59	68.20	20.61	PK	Vertical
4	5863.910	41.34	34.83	-24.93	51.24	68.20	16.96	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.800	36.75	33.80	-25.19	45.36	54.00	8.64	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5720MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\15
Memo: Sample Number: S26072123-002

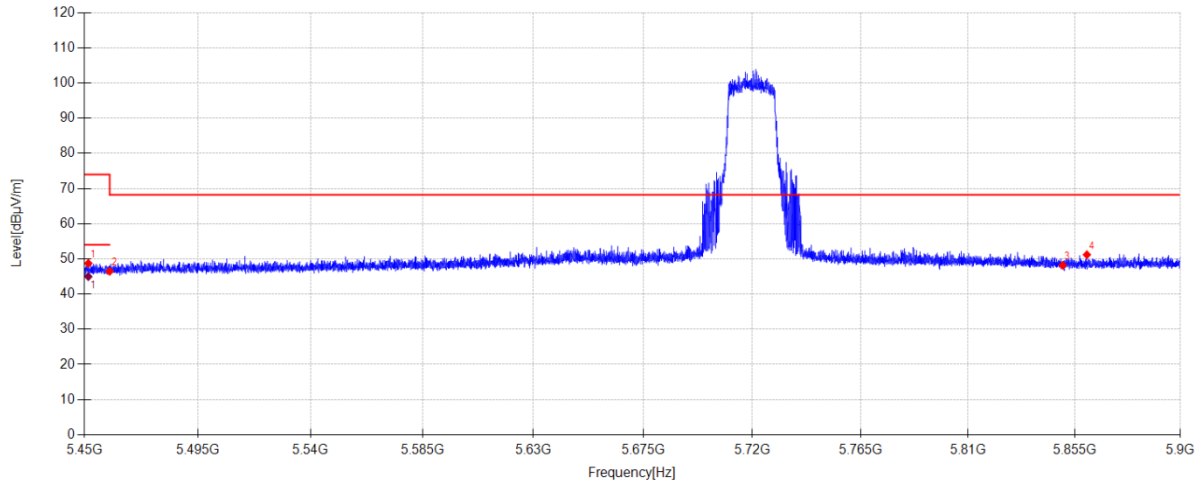**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.575	40.11	33.80	-25.19	48.72	74.00	25.28	PK	Horizontal
2	5460.000	37.81	33.80	-25.15	46.46	68.20	21.74	PK	Horizontal
3	5850.000	38.33	34.80	-24.95	48.18	68.20	20.02	PK	Horizontal
4	5860.220	41.30	34.82	-24.94	51.18	68.20	17.02	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.575	36.35	33.80	-25.19	44.96	54.00	9.04	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5720MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\16
Memo: Sample Number: S26072123-002

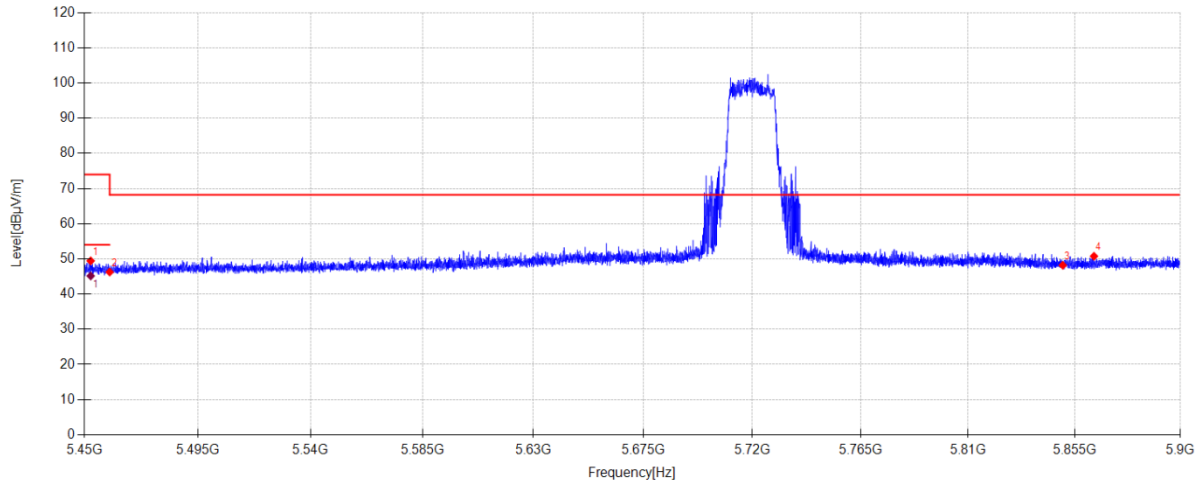**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.520	40.83	33.80	-25.19	49.44	74.00	24.56	PK	Vertical
2	5460.000	37.61	33.80	-25.15	46.26	68.20	21.94	PK	Vertical
3	5850.000	38.34	34.80	-24.95	48.19	68.20	20.01	PK	Vertical
4	5863.235	40.86	34.83	-24.93	50.76	68.20	17.44	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.520	36.55	33.80	-25.19	45.16	54.00	8.84	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\17

Memo:

Sample Number: S26072123-002

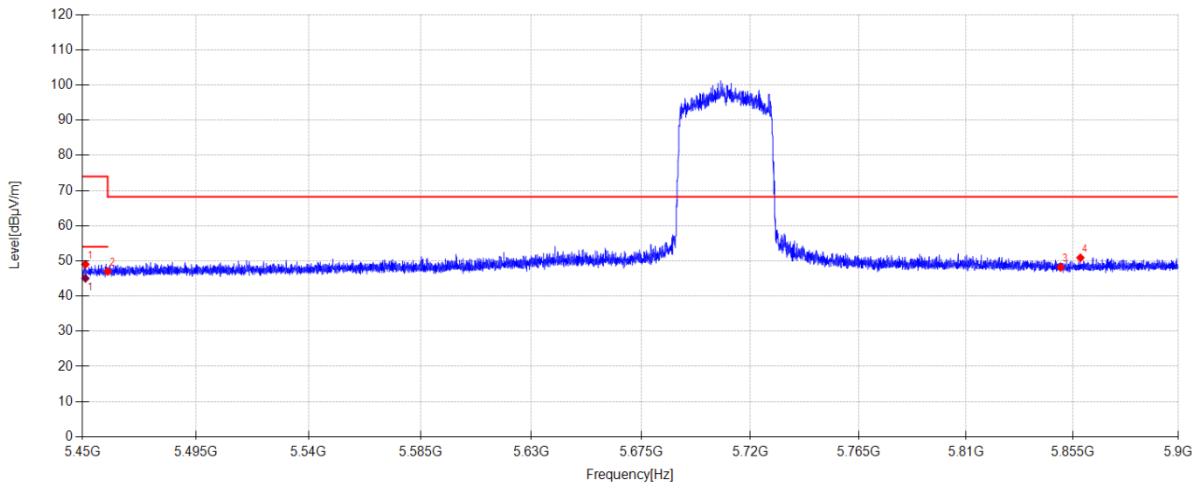

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.215	40.41	33.80	-25.19	49.02	74.00	24.98	PK	Horizontal
2	5460.000	38.33	33.80	-25.15	46.98	68.20	21.22	PK	Horizontal
3	5850.000	38.36	34.80	-24.95	48.21	68.20	19.99	PK	Horizontal
4	5858.330	41.01	34.82	-24.94	50.89	68.20	17.31	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.215	36.44	33.80	-25.19	45.05	54.00	8.95	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\18

Memo:

Sample Number: S26072123-002

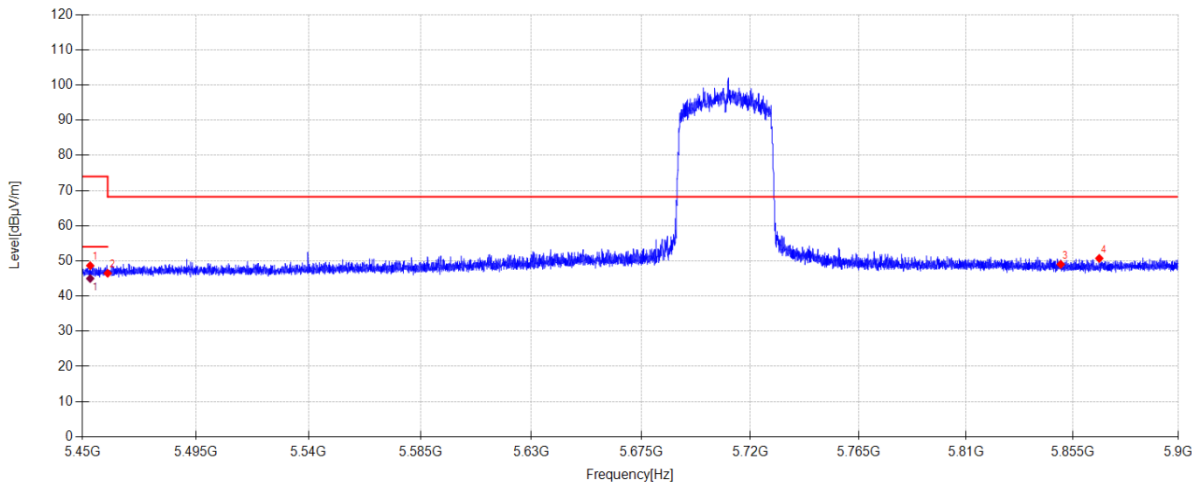

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.105	40.02	33.80	-25.18	48.64	74.00	25.36	PK	Vertical
2	5460.000	37.83	33.80	-25.15	46.48	68.20	21.72	PK	Vertical
3	5850.000	39.18	34.80	-24.95	49.03	68.20	19.17	PK	Vertical
4	5866.340	40.81	34.83	-24.93	50.71	68.20	17.49	PK	Vertical


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.105	36.37	33.80	-25.18	44.99	54.00	9.01	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5690MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\19
Memo: Sample Number: S26072123-002

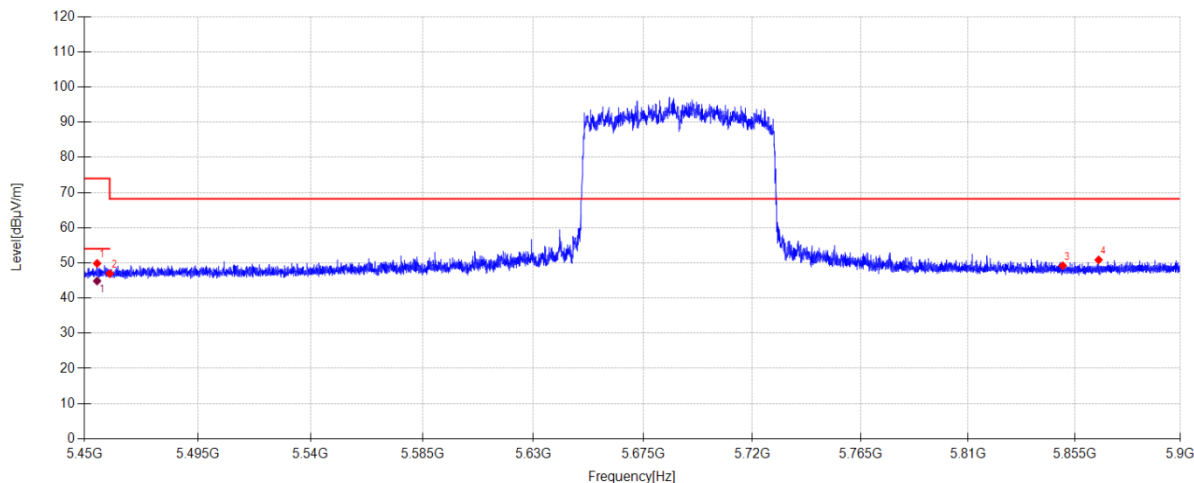**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.040	41.22	33.80	-25.17	49.85	74.00	24.15	PK	Horizontal
2	5460.000	38.32	33.80	-25.15	46.97	68.20	21.23	PK	Horizontal
3	5850.000	39.36	34.80	-24.95	49.21	68.20	18.99	PK	Horizontal
4	5865.215	40.96	34.83	-24.93	50.86	68.20	17.34	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.040	36.22	33.80	-25.17	44.85	54.00	9.15	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-29

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5690MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5G KUAYUE\20

Memo:

Sample Number: S26072123-002

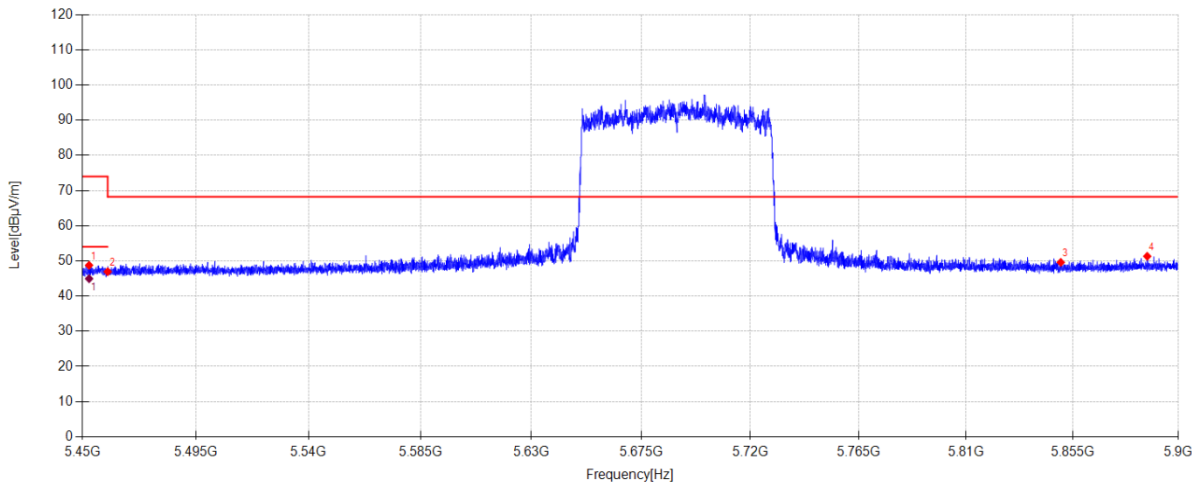

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.655	40.14	33.80	-25.19	48.75	74.00	25.25	PK	Vertical
2	5460.000	38.28	33.80	-25.15	46.93	68.20	21.27	PK	Vertical
3	5850.000	39.73	34.80	-24.95	49.58	68.20	18.62	PK	Vertical
4	5886.725	41.35	34.87	-24.90	51.32	68.20	16.88	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.655	36.34	33.80	-25.19	44.95	54.00	9.05	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\8

Memo:

Sample Number: S26072123-002

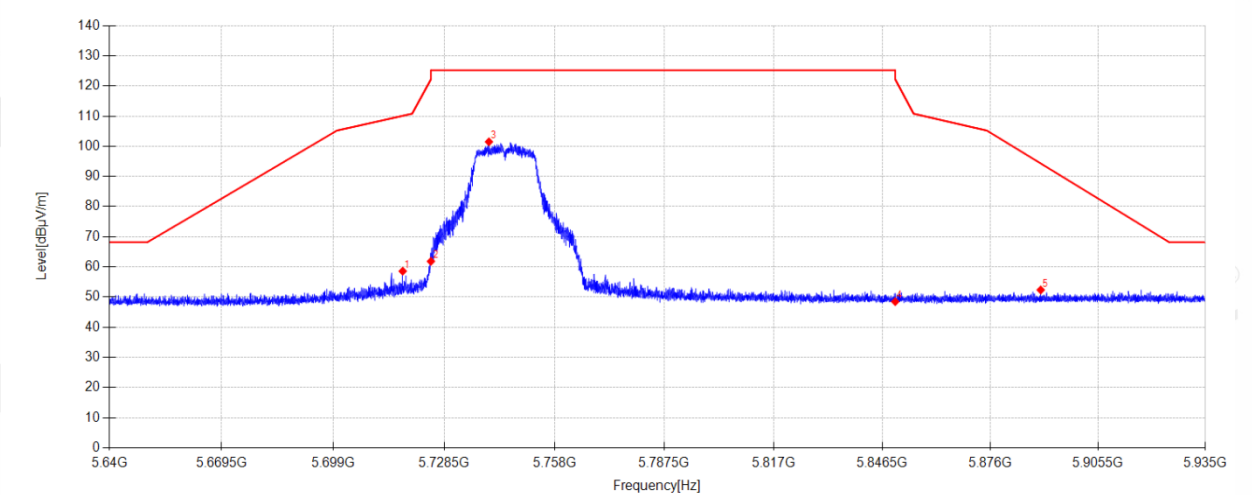

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5717.497	49.52	34.27	-25.22	58.57	110.10	51.53	PK	Horizontal
2	5725.000	52.73	34.30	-25.20	61.83	122.20	60.37	PK	Horizontal
3	5740.477	92.28	34.36	-25.16	101.48	125.20	23.72	PK	Horizontal
4	5850.000	38.60	34.80	-24.95	48.45	122.20	73.75	PK	Horizontal
5	5889.718	42.36	34.88	-24.89	52.35	94.31	41.96	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\9

Memo:

Sample Number: S26072123-002

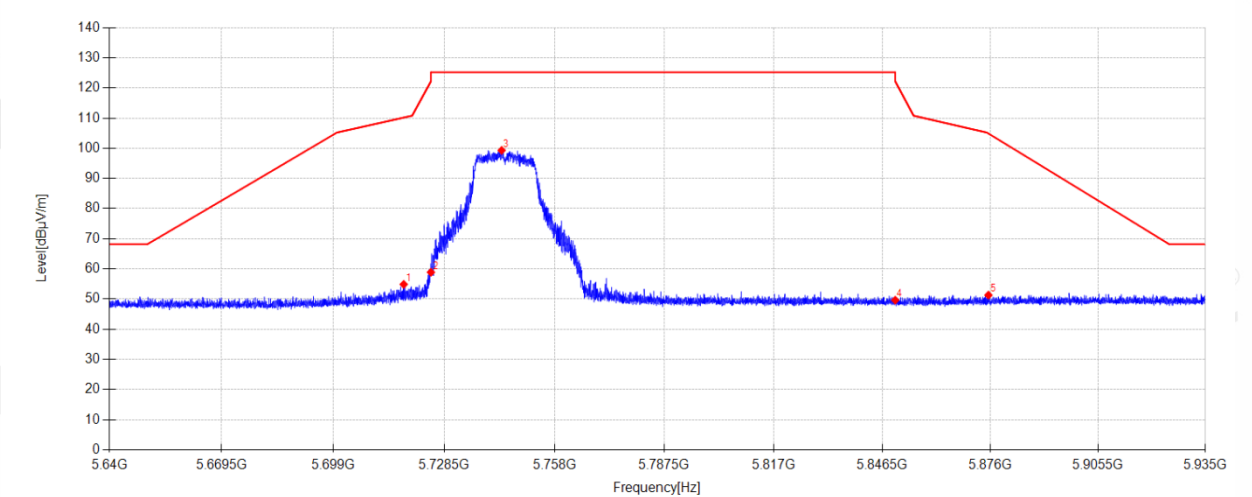

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5717.762	45.81	34.27	-25.22	54.86	110.17	55.31	PK	Vertical
2	5725.000	49.78	34.30	-25.20	58.88	122.20	63.32	PK	Vertical
3	5743.870	90.08	34.38	-25.15	99.31	125.20	25.89	PK	Vertical
4	5850.000	39.77	34.80	-24.95	49.62	122.20	72.58	PK	Vertical
5	5875.410	41.35	34.85	-24.91	51.29	104.90	53.61	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.