

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\10

Memo:

Sample Number: S26072123-002

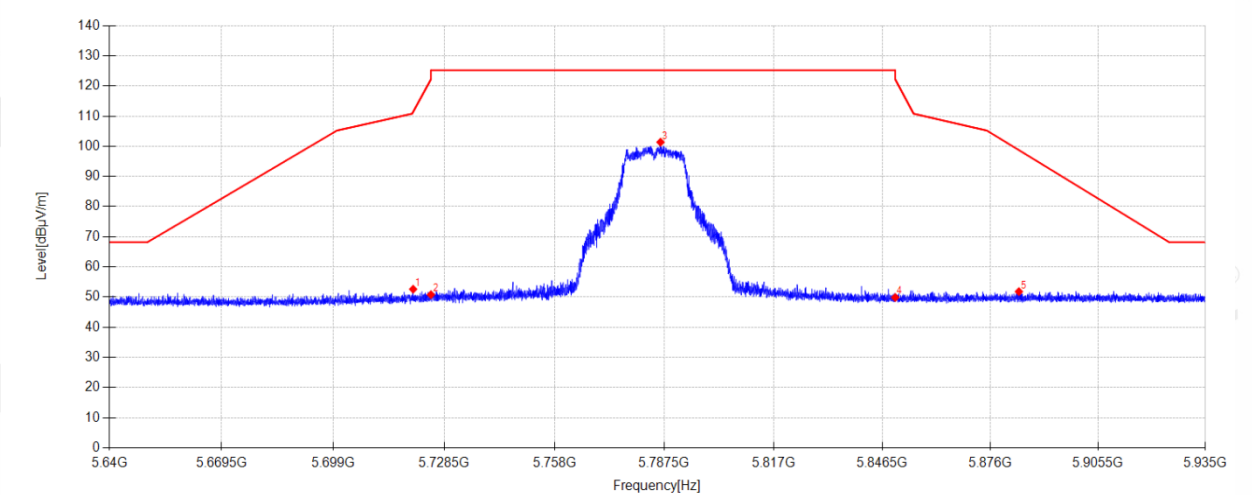

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.270	43.53	34.28	-25.21	52.60	111.41	58.81	PK	Horizontal
2	5725.000	41.68	34.30	-25.20	50.78	122.20	71.42	PK	Horizontal
3	5786.468	91.86	34.55	-25.05	101.36	125.20	23.84	PK	Horizontal
4	5850.000	40.00	34.80	-24.95	49.85	122.20	72.35	PK	Horizontal
5	5883.759	41.82	34.87	-24.90	51.79	98.72	46.93	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\11

Memo:

Sample Number: S26072123-002

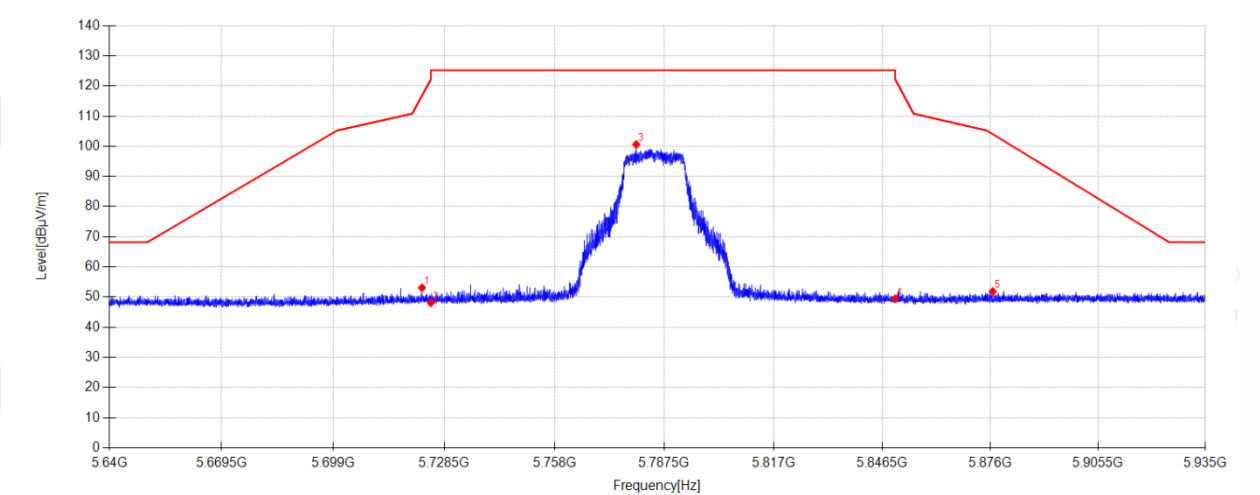

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.630	43.99	34.29	-25.21	53.07	116.80	63.73	PK	Vertical
2	5725.000	38.99	34.30	-25.20	48.09	122.20	74.11	PK	Vertical
3	5779.948	91.14	34.52	-25.07	100.59	125.20	24.61	PK	Vertical
4	5850.000	39.58	34.80	-24.95	49.43	122.20	72.77	PK	Vertical
5	5876.620	41.90	34.85	-24.91	51.84	104.00	52.16	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\12

Memo:

Sample Number: S26072123-002

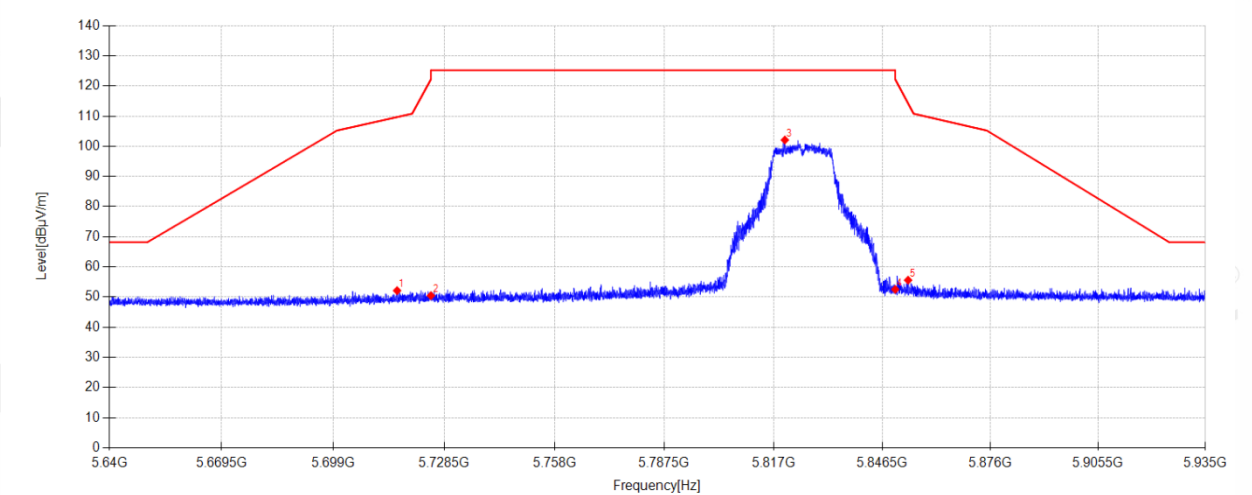

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.992	43.08	34.26	-25.22	52.12	109.68	57.56	PK	Horizontal
2	5725.000	41.36	34.30	-25.20	50.46	122.20	71.74	PK	Horizontal
3	5820.039	92.39	34.68	-24.99	102.08	125.20	23.12	PK	Horizontal
4	5850.000	42.68	34.80	-24.95	52.53	122.20	69.67	PK	Horizontal
5	5853.492	45.73	34.81	-24.95	55.59	114.24	58.65	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\13

Memo:

Sample Number: S26072123-002

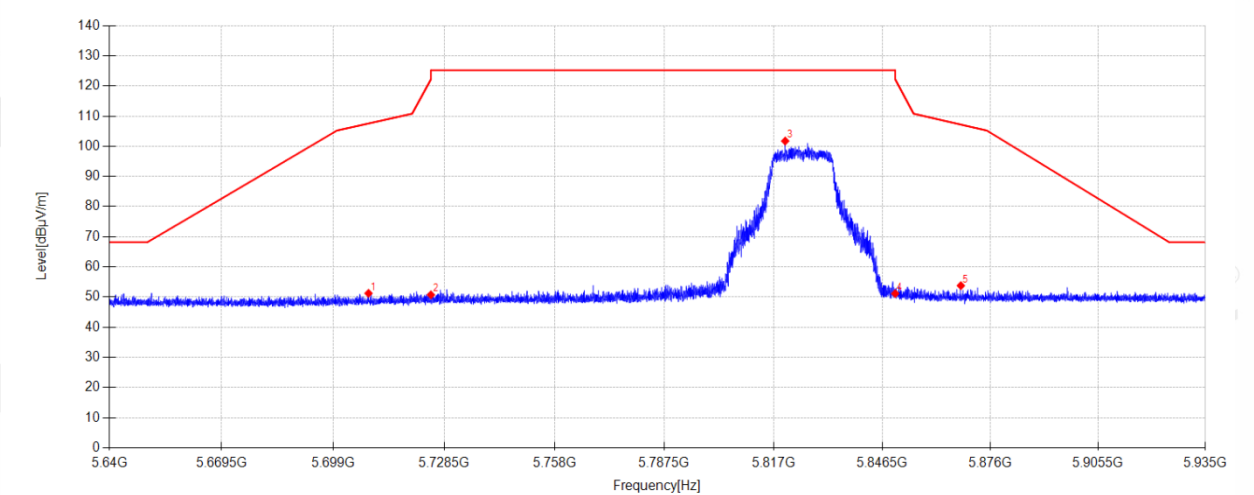

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5708.411	42.25	34.23	-25.24	51.24	107.55	56.31	PK	Vertical
2	5725.000	41.63	34.30	-25.20	50.73	122.20	71.47	PK	Vertical
3	5820.127	92.05	34.68	-24.99	101.74	125.20	23.46	PK	Vertical
4	5850.000	41.30	34.80	-24.95	51.15	122.20	71.05	PK	Vertical
5	5867.888	43.85	34.84	-24.92	53.77	107.19	53.42	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\18

Memo:

Sample Number: S26072123-002

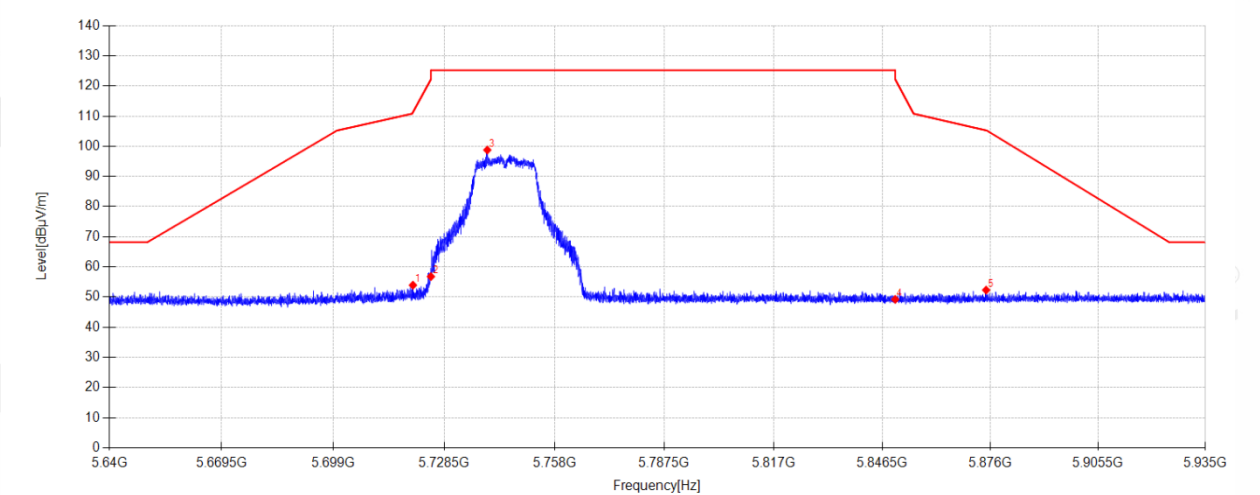

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.211	44.86	34.28	-25.21	53.93	111.28	57.35	PK	Horizontal
2	5725.000	47.69	34.30	-25.20	56.79	122.20	65.41	PK	Horizontal
3	5740.035	89.55	34.36	-25.16	98.75	125.20	26.45	PK	Horizontal
4	5850.000	39.37	34.80	-24.95	49.22	122.20	72.98	PK	Horizontal
5	5874.791	42.38	34.85	-24.92	52.31	105.26	52.95	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\19

Memo:

Sample Number: S26072123-002

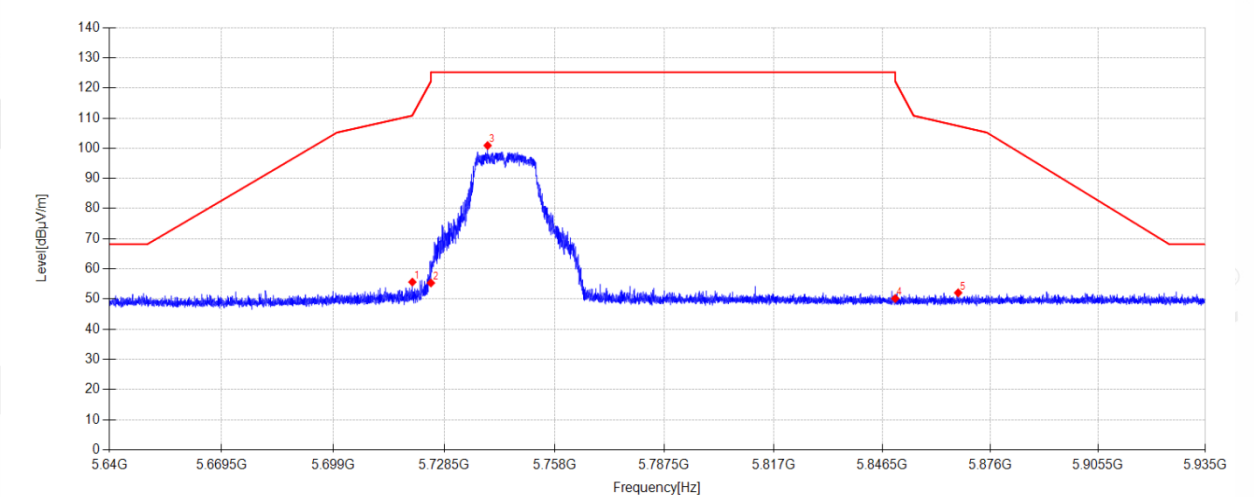

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.063	46.56	34.28	-25.21	55.63	110.94	55.31	PK	Vertical
2	5725.000	46.23	34.30	-25.20	55.33	122.20	66.87	PK	Vertical
3	5740.123	91.71	34.36	-25.16	100.91	125.20	24.29	PK	Vertical
4	5850.000	40.32	34.80	-24.95	50.17	122.20	72.03	PK	Vertical
5	5867.150	42.16	34.83	-24.93	52.06	107.40	55.34	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\16

Memo:

Sample Number: S26072123-002

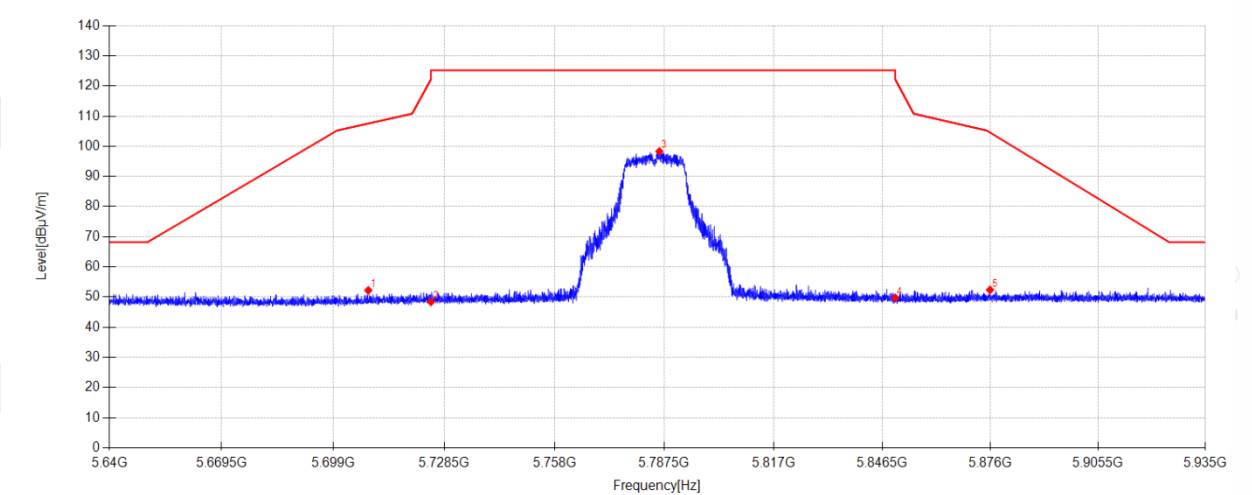

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5708.352	43.23	34.23	-25.24	52.22	107.54	55.32	PK	Horizontal
2	5725.000	39.29	34.30	-25.20	48.39	122.20	73.81	PK	Horizontal
3	5786.173	88.80	34.54	-25.05	98.29	125.20	26.91	PK	Horizontal
4	5850.000	39.85	34.80	-24.95	49.70	122.20	72.50	PK	Horizontal
5	5875.853	42.43	34.85	-24.91	52.37	104.57	52.20	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\17

Memo:

Sample Number: S26072123-002

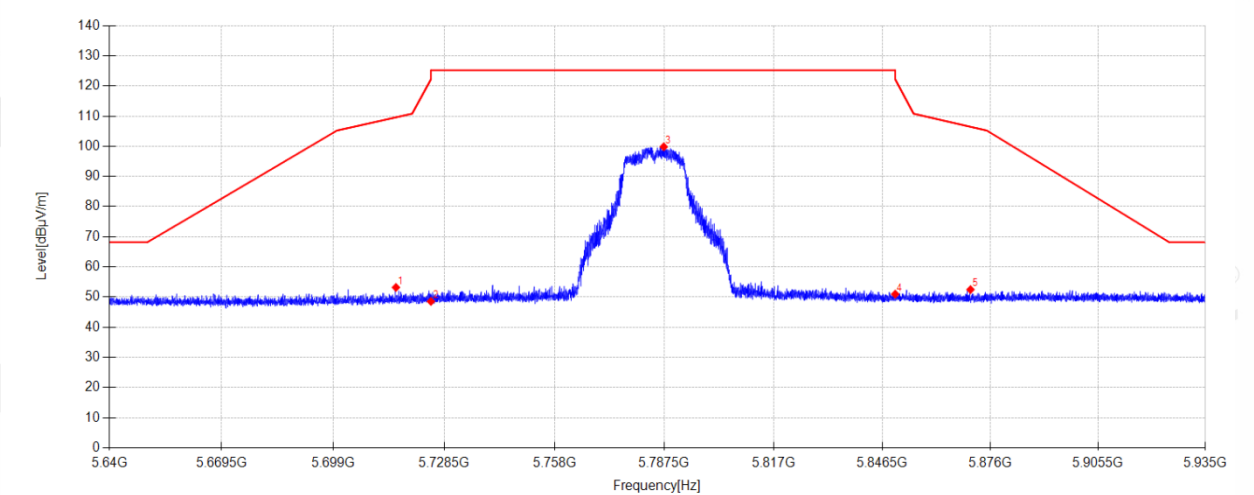

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.697	44.14	34.26	-25.22	53.18	109.60	56.42	PK	Vertical
2	5725.000	39.43	34.30	-25.20	48.53	122.20	73.67	PK	Vertical
3	5787.353	90.32	34.55	-25.05	99.82	125.20	25.38	PK	Vertical
4	5850.000	41.10	34.80	-24.95	50.95	122.20	71.25	PK	Vertical
5	5870.513	42.55	34.84	-24.92	52.47	106.46	53.99	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\14

Memo:

Sample Number: S26072123-002

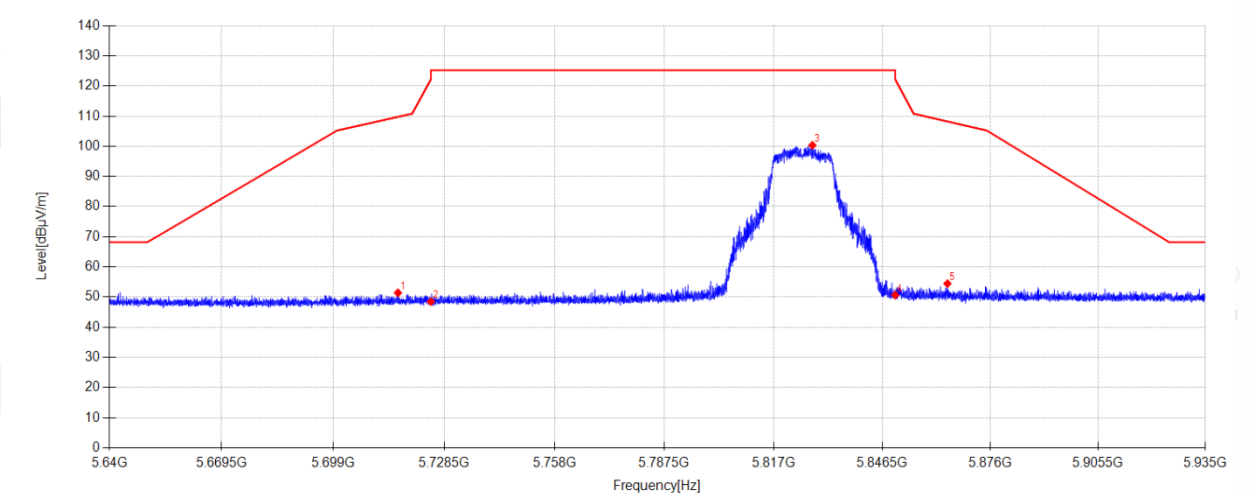

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.228	42.35	34.26	-25.22	51.39	109.74	58.35	PK	Horizontal
2	5725.000	39.35	34.30	-25.20	48.45	122.20	73.75	PK	Horizontal
3	5827.502	90.59	34.71	-24.98	100.32	125.20	24.88	PK	Horizontal
4	5850.000	40.80	34.80	-24.95	50.65	122.20	71.55	PK	Horizontal
5	5864.230	44.56	34.83	-24.93	54.46	108.22	53.76	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\15

Memo:

Sample Number: S26072123-002

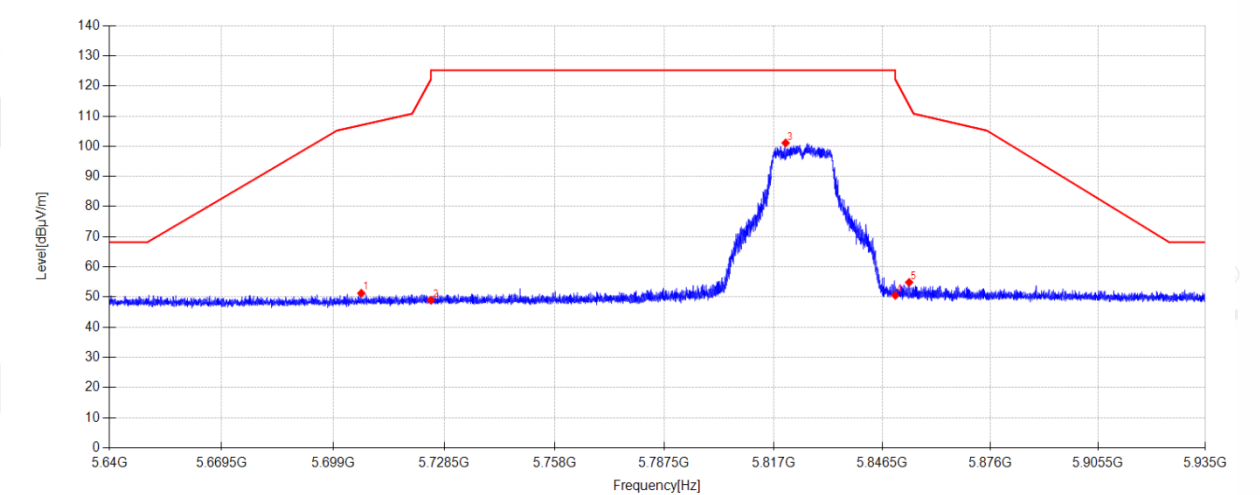

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5706.493	42.27	34.23	-25.24	51.26	107.02	55.76	PK	Vertical
2	5725.000	39.82	34.30	-25.20	48.92	122.20	73.28	PK	Vertical
3	5820.245	91.41	34.68	-24.99	101.10	125.20	24.10	PK	Vertical
4	5850.000	40.69	34.80	-24.95	50.54	122.20	71.66	PK	Vertical
5	5853.787	45.01	34.81	-24.94	54.88	113.57	58.69	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\20

Memo:

Sample Number: S26072123-002

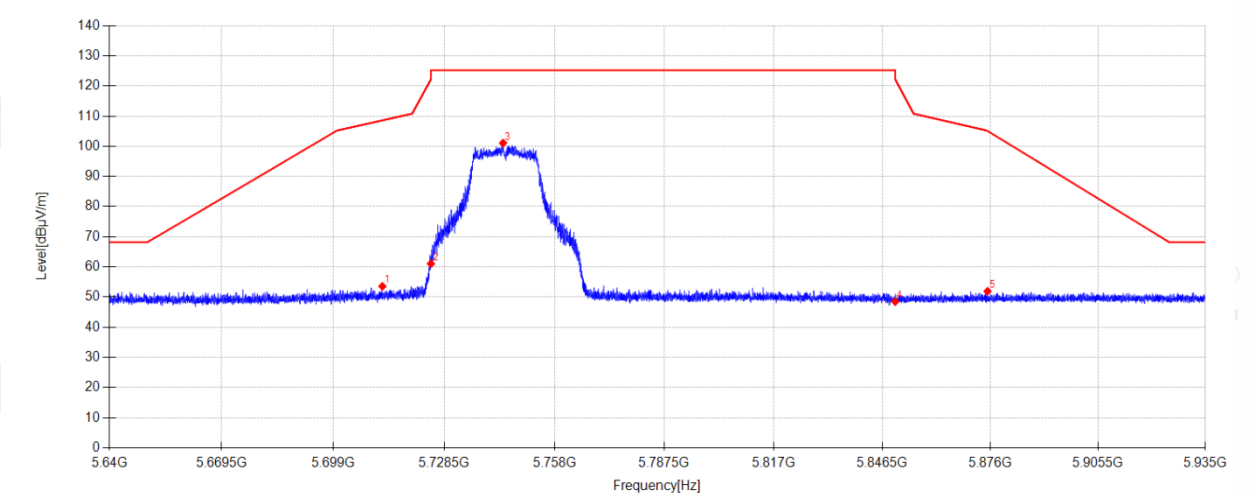

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5712.098	44.52	34.25	-25.23	53.54	108.59	55.05	PK	Horizontal
2	5725.000	51.93	34.30	-25.20	61.03	122.20	61.17	PK	Horizontal
3	5744.253	91.84	34.38	-25.15	101.07	125.20	24.13	PK	Horizontal
4	5850.000	38.63	34.80	-24.95	48.48	122.20	73.72	PK	Horizontal
5	5875.174	41.98	34.85	-24.91	51.92	105.07	53.15	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\21

Memo:

Sample Number: S26072123-002

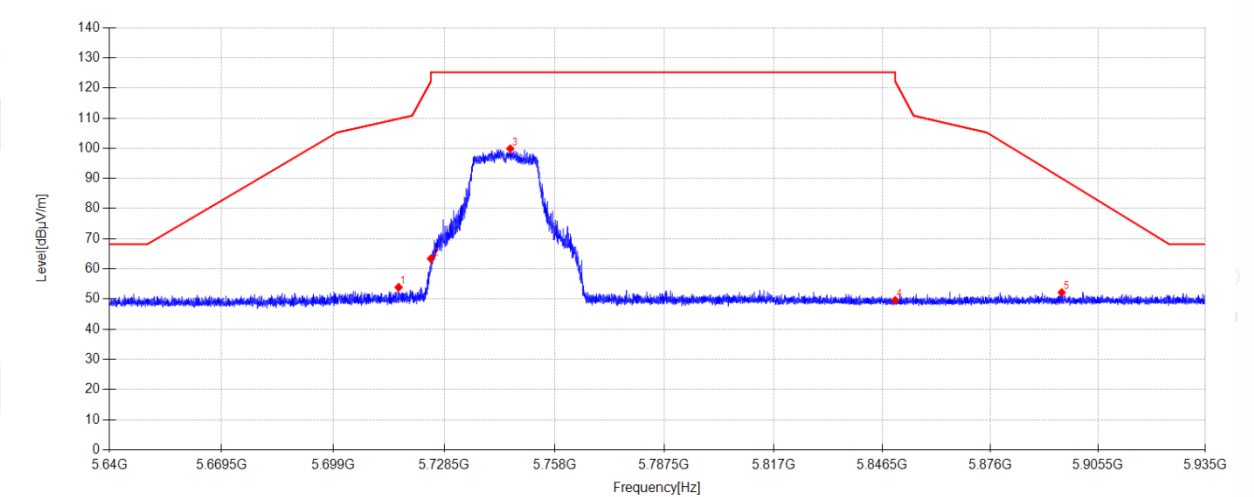

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.405	44.84	34.27	-25.22	53.89	109.79	55.90	PK	Vertical
2	5725.000	54.28	34.30	-25.20	63.38	122.20	58.82	PK	Vertical
3	5746.171	90.63	34.38	-25.15	99.86	125.20	25.34	PK	Vertical
4	5850.000	39.74	34.80	-24.95	49.59	122.20	72.61	PK	Vertical
5	5895.470	42.16	34.89	-24.89	52.16	90.05	37.89	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\22

Memo:

Sample Number: S26072123-002

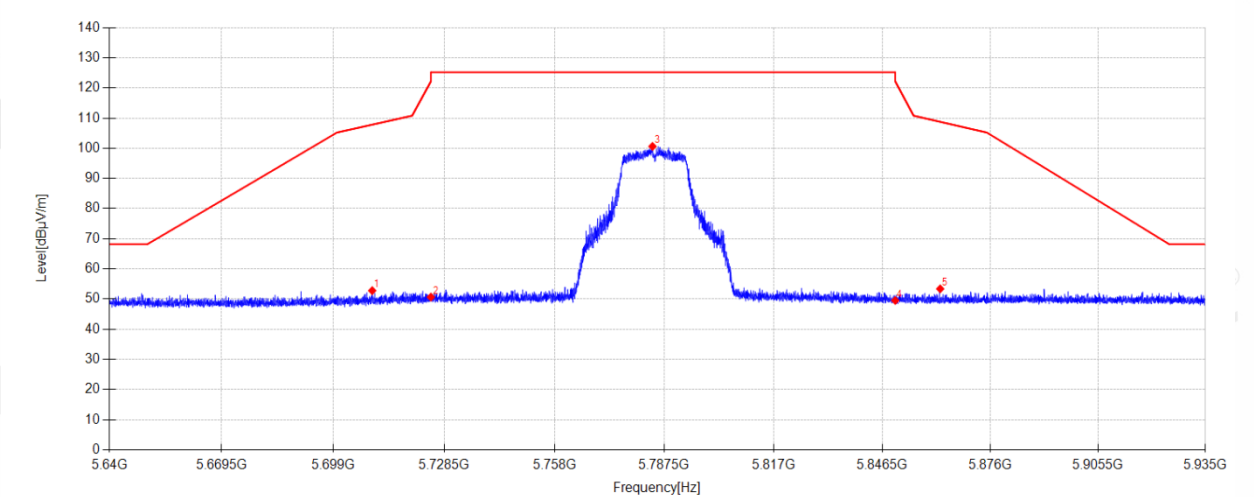

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5709.384	43.78	34.24	-25.24	52.78	107.83	55.05	PK	Horizontal
2	5725.000	41.55	34.30	-25.20	50.65	122.20	71.55	PK	Horizontal
3	5784.314	91.14	34.54	-25.06	100.62	125.20	24.58	PK	Horizontal
4	5850.000	39.66	34.80	-24.95	49.51	122.20	72.69	PK	Horizontal
5	5862.253	43.48	34.82	-24.93	53.37	108.77	55.40	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\23

Memo:

Sample Number: S26072123-002

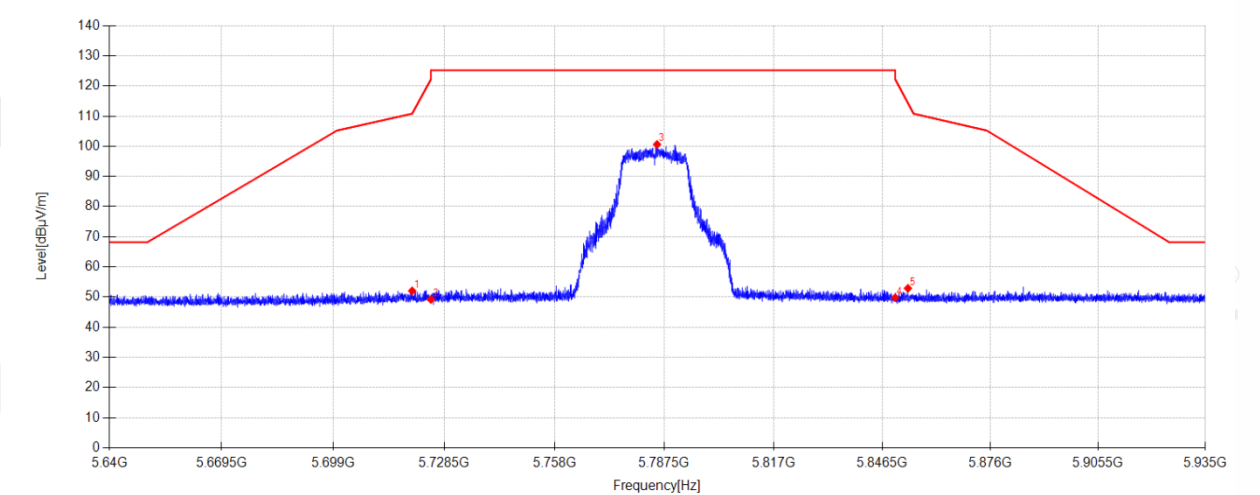

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.004	42.97	34.28	-25.21	52.04	110.81	58.77	PK	Vertical
2	5725.000	40.10	34.30	-25.20	49.20	122.20	73.00	PK	Vertical
3	5785.553	91.11	34.54	-25.05	100.60	125.20	24.60	PK	Vertical
4	5850.000	39.96	34.80	-24.95	49.81	122.20	72.39	PK	Vertical
5	5853.462	43.03	34.81	-24.95	52.89	114.31	61.42	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\24

Memo:

Sample Number: S26072123-002

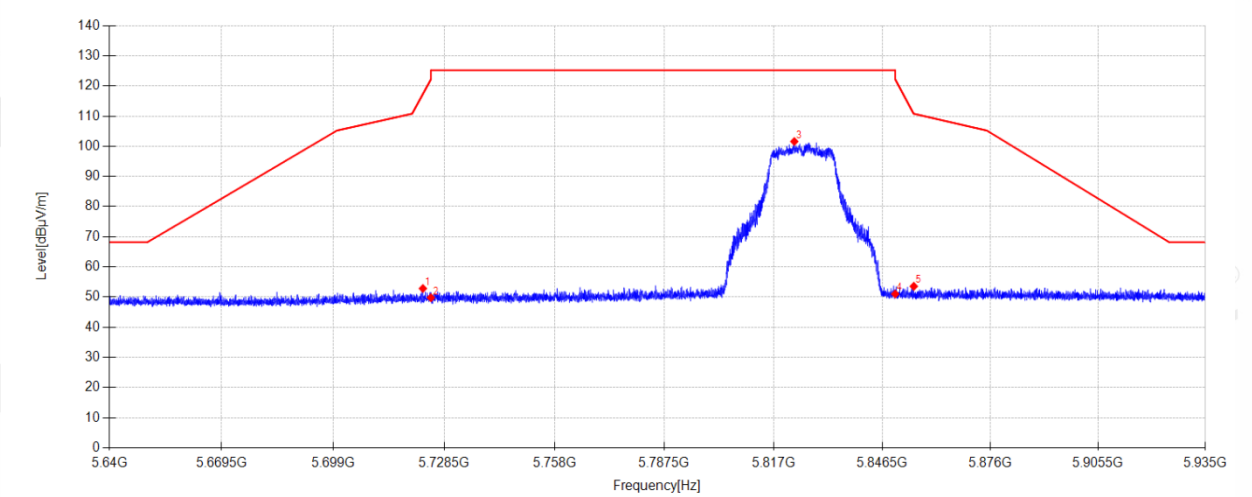

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.866	43.75	34.29	-25.21	52.83	117.33	64.50	PK	Horizontal
2	5725.000	40.68	34.30	-25.20	49.78	122.20	72.42	PK	Horizontal
3	5822.605	91.88	34.69	-24.99	101.58	125.20	23.62	PK	Horizontal
4	5850.000	41.15	34.80	-24.95	51.00	122.20	71.20	PK	Horizontal
5	5855.055	43.69	34.81	-24.94	53.56	110.78	57.22	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\25

Memo:

Sample Number: S26072123-002

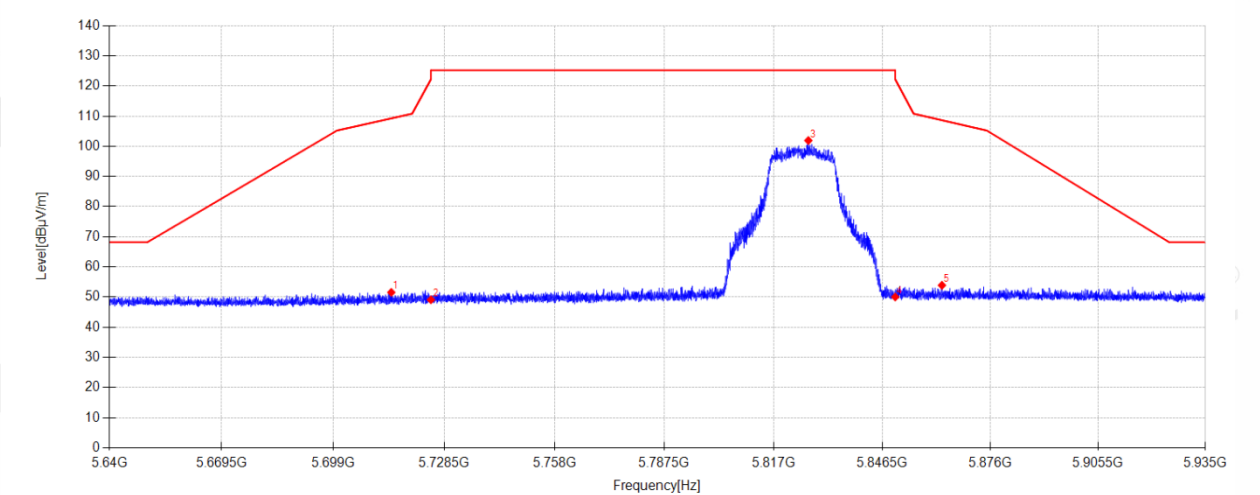

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5714.458	42.51	34.26	-25.23	51.54	109.25	57.71	PK	Vertical
2	5725.000	39.98	34.30	-25.20	49.08	122.20	73.12	PK	Vertical
3	5826.411	92.17	34.71	-24.98	101.90	125.20	23.30	PK	Vertical
4	5850.000	40.16	34.80	-24.95	50.01	122.20	72.19	PK	Vertical
5	5862.725	44.00	34.83	-24.93	53.90	108.64	54.74	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\28

Memo:

Sample Number: S26072123-002

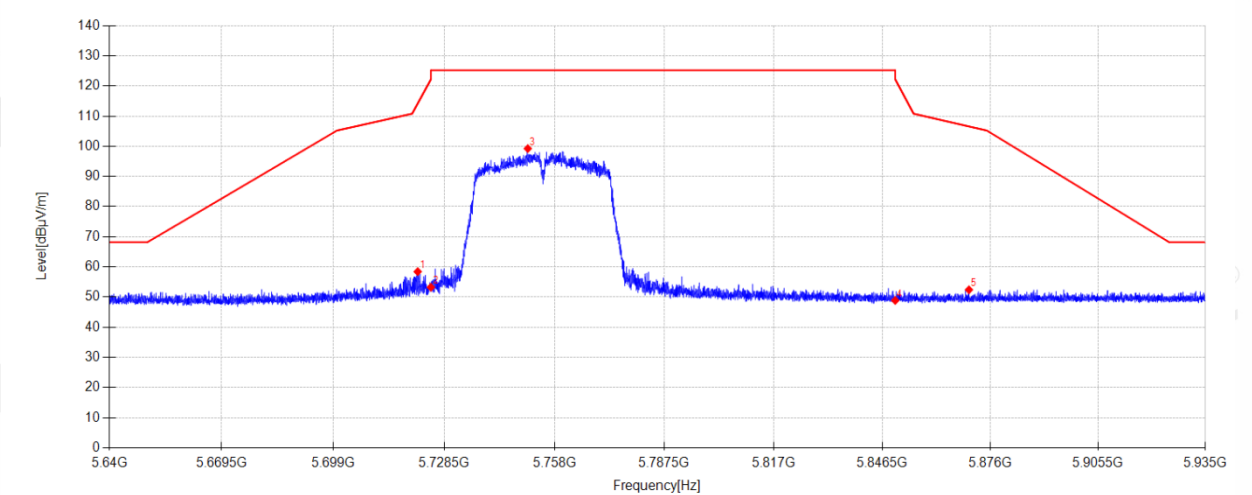

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.479	49.33	34.29	-25.21	58.41	114.17	55.76	PK	Horizontal
2	5725.000	44.15	34.30	-25.20	53.25	122.20	68.95	PK	Horizontal
3	5750.861	89.97	34.40	-25.14	99.23	125.20	25.97	PK	Horizontal
4	5850.000	39.02	34.80	-24.95	48.87	122.20	73.33	PK	Horizontal
5	5870.100	42.48	34.84	-24.92	52.40	106.57	54.17	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\29

Memo:

Sample Number: S26072123-002

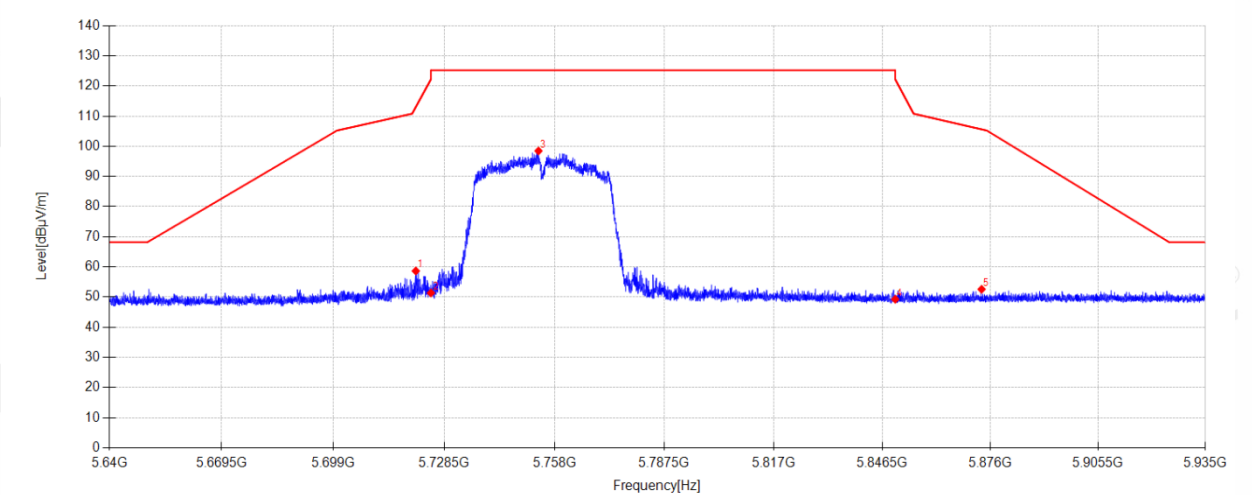

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.978	49.58	34.28	-25.21	58.65	113.03	54.38	PK	Vertical
2	5725.000	42.25	34.30	-25.20	51.35	122.20	70.85	PK	Vertical
3	5753.723	89.18	34.41	-25.13	98.46	125.20	26.74	PK	Vertical
4	5850.000	39.40	34.80	-24.95	49.25	122.20	72.95	PK	Vertical
5	5873.552	42.64	34.85	-24.92	52.57	105.61	53.04	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\26

Memo:

Sample Number: S26072123-002

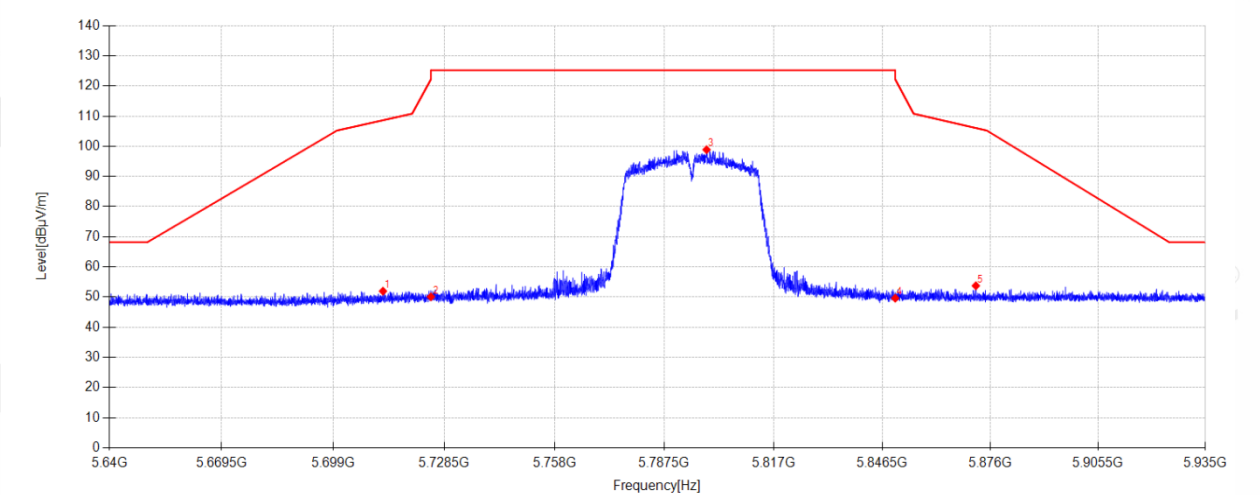

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5712.246	42.93	34.25	-25.23	51.95	108.63	56.68	PK	Horizontal
2	5725.000	40.97	34.30	-25.20	50.07	122.20	72.13	PK	Horizontal
3	5798.887	89.28	34.60	-25.02	98.86	125.20	26.34	PK	Horizontal
4	5850.000	39.76	34.80	-24.95	49.61	122.20	72.59	PK	Horizontal
5	5871.988	43.82	34.84	-24.92	53.74	106.04	52.30	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\27

Memo:

Sample Number: S26072123-002

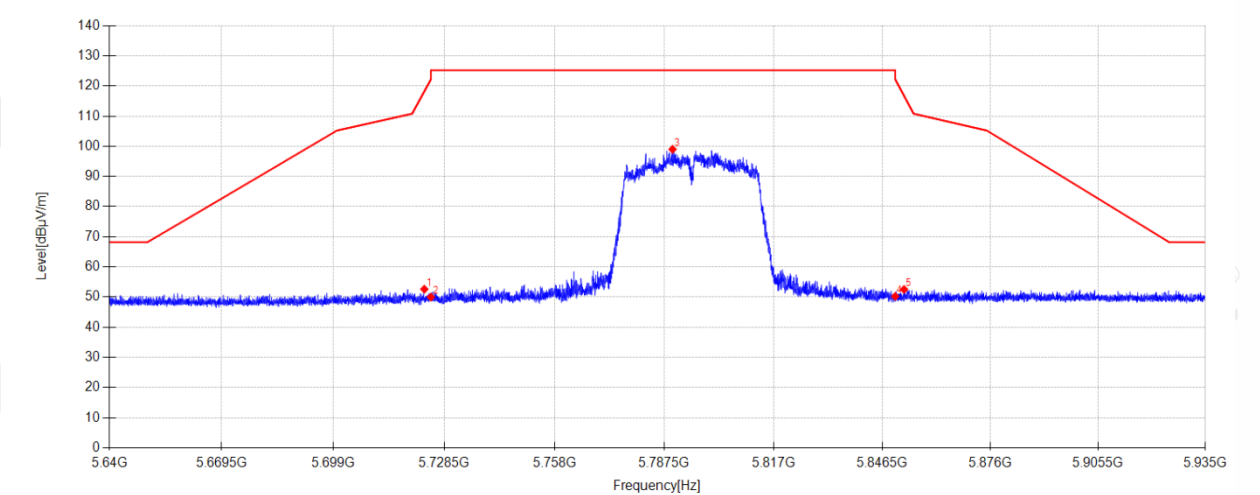

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.249	43.52	34.29	-25.20	52.61	118.21	65.60	PK	Vertical
2	5725.000	40.89	34.30	-25.20	49.99	122.20	72.21	PK	Vertical
3	5789.713	89.46	34.56	-25.04	98.98	125.20	26.22	PK	Vertical
4	5850.000	40.38	34.80	-24.95	50.23	122.20	71.97	PK	Vertical
5	5852.400	42.67	34.80	-24.95	52.52	116.73	64.21	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\30

Memo:

Sample Number: S26072123-002

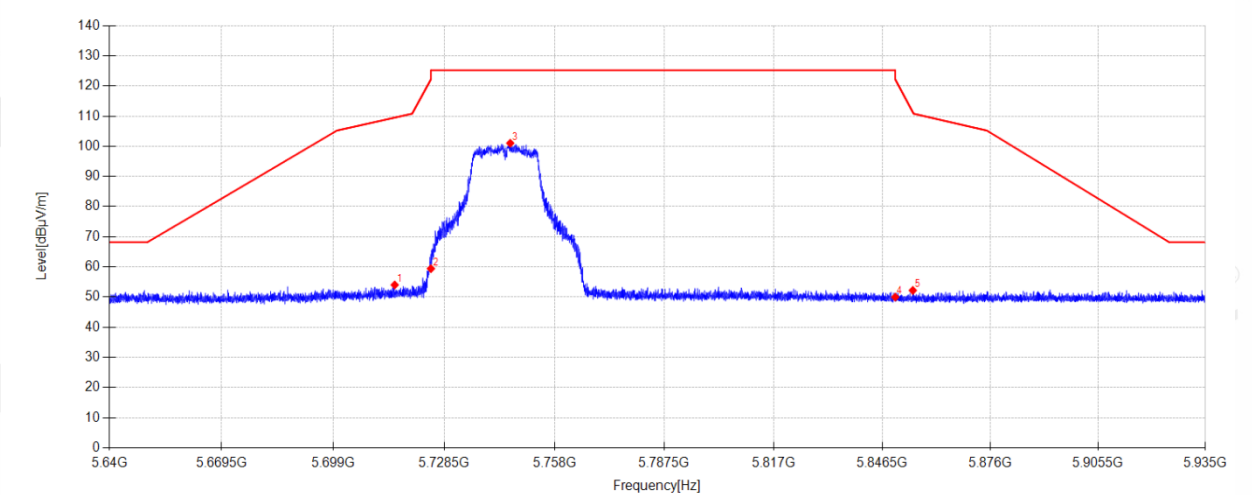

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.373	44.98	34.26	-25.22	54.02	109.50	55.48	PK	Horizontal
2	5725.000	50.30	34.30	-25.20	59.40	122.20	62.80	PK	Horizontal
3	5746.171	91.79	34.38	-25.15	101.02	125.20	24.18	PK	Horizontal
4	5850.000	40.12	34.80	-24.95	49.97	122.20	72.23	PK	Horizontal
5	5854.790	42.32	34.81	-24.94	52.19	111.28	59.09	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\31

Memo:

Sample Number: S26072123-002

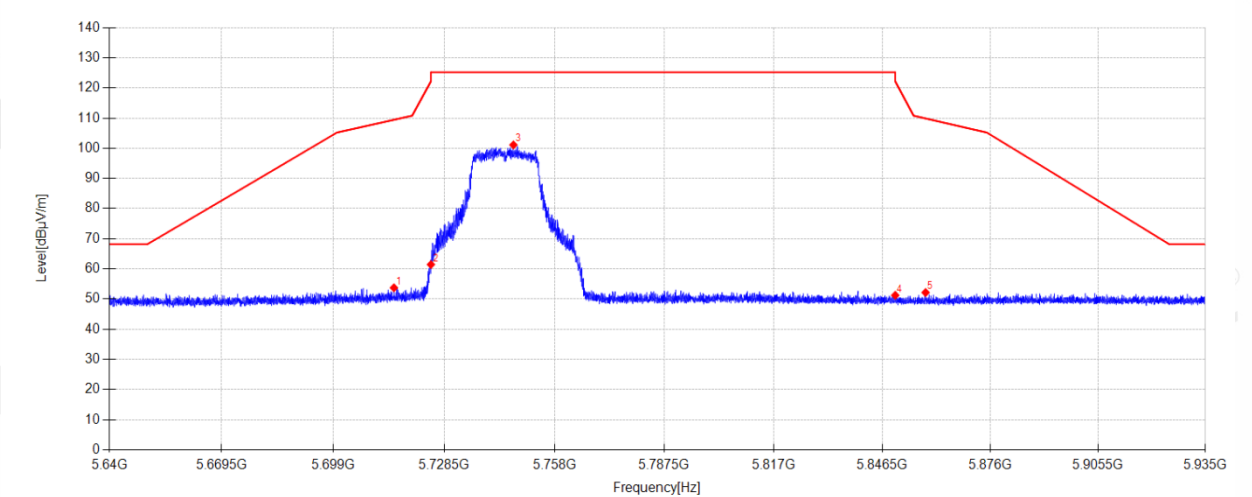

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.166	44.70	34.26	-25.22	53.74	109.45	55.71	PK	Vertical
2	5725.000	52.34	34.30	-25.20	61.44	122.20	60.76	PK	Vertical
3	5747.026	91.87	34.39	-25.15	101.11	125.20	24.09	PK	Vertical
4	5850.000	41.38	34.80	-24.95	51.23	122.20	70.97	PK	Vertical
5	5858.271	42.27	34.82	-24.94	52.15	109.88	57.73	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\32

Memo:

Sample Number: S26072123-002

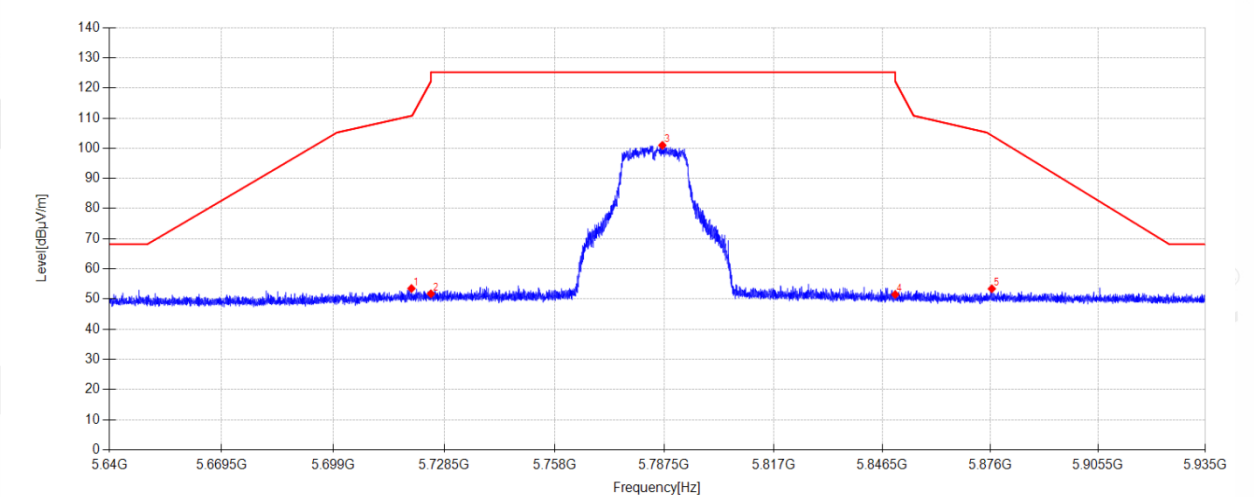

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.827	44.42	34.28	-25.21	53.49	110.75	57.26	PK	Horizontal
2	5725.000	42.66	34.30	-25.20	51.76	122.20	70.44	PK	Horizontal
3	5786.969	91.46	34.55	-25.05	100.96	125.20	24.24	PK	Horizontal
4	5850.000	41.66	34.80	-24.95	51.51	122.20	70.69	PK	Horizontal
5	5876.354	43.47	34.85	-24.91	53.41	104.20	50.79	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\33

Memo:

Sample Number: S26072123-002

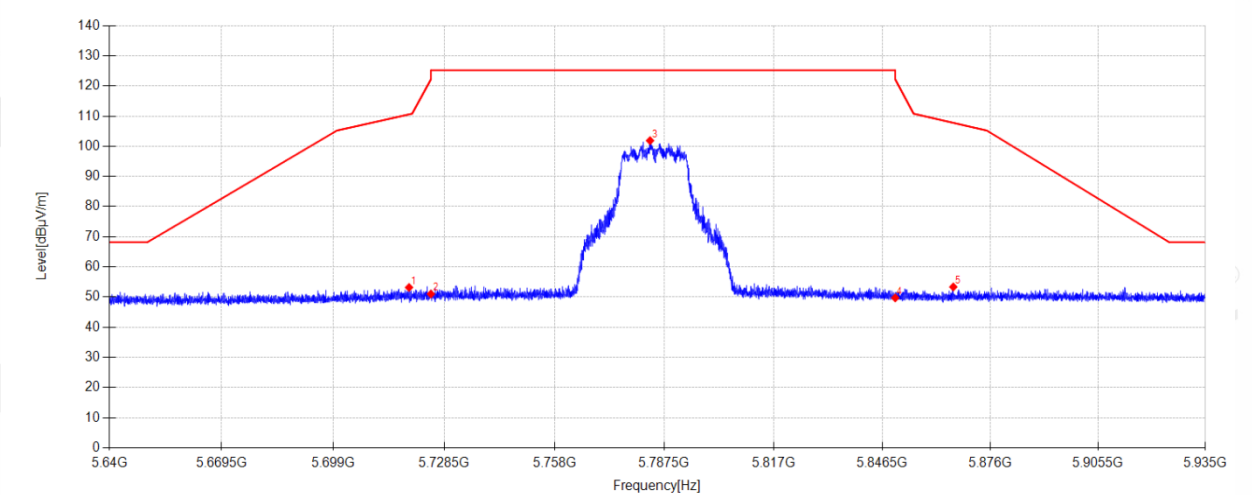

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.178	44.10	34.28	-25.21	53.17	110.57	57.40	PK	Vertical
2	5725.000	41.91	34.30	-25.20	51.01	122.20	71.19	PK	Vertical
3	5783.665	92.41	34.53	-25.06	101.88	125.20	23.32	PK	Vertical
4	5850.000	39.87	34.80	-24.95	49.72	122.20	72.48	PK	Vertical
5	5865.823	43.45	34.83	-24.93	53.35	107.77	54.42	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\34

Memo:

Sample Number: S26072123-002

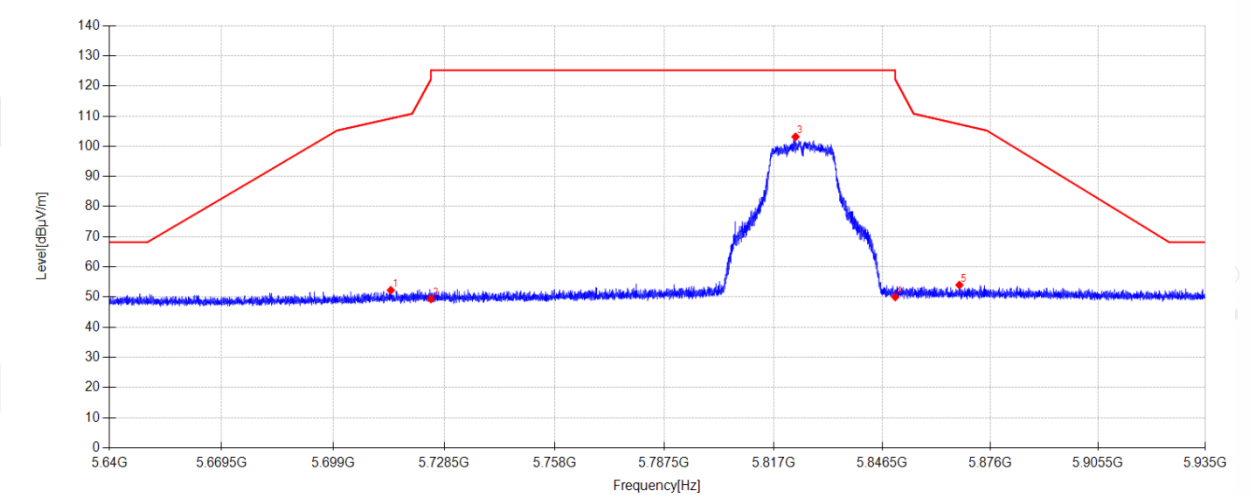

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5714.340	43.20	34.26	-25.23	52.23	109.22	56.99	PK	Horizontal
2	5725.000	40.25	34.30	-25.20	49.35	122.20	72.85	PK	Horizontal
3	5822.930	93.43	34.69	-24.99	103.13	125.20	22.07	PK	Horizontal
4	5850.000	40.17	34.80	-24.95	50.02	122.20	72.18	PK	Horizontal
5	5867.504	44.07	34.84	-24.93	53.98	107.30	53.32	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\35

Memo:

Sample Number: S26072123-002

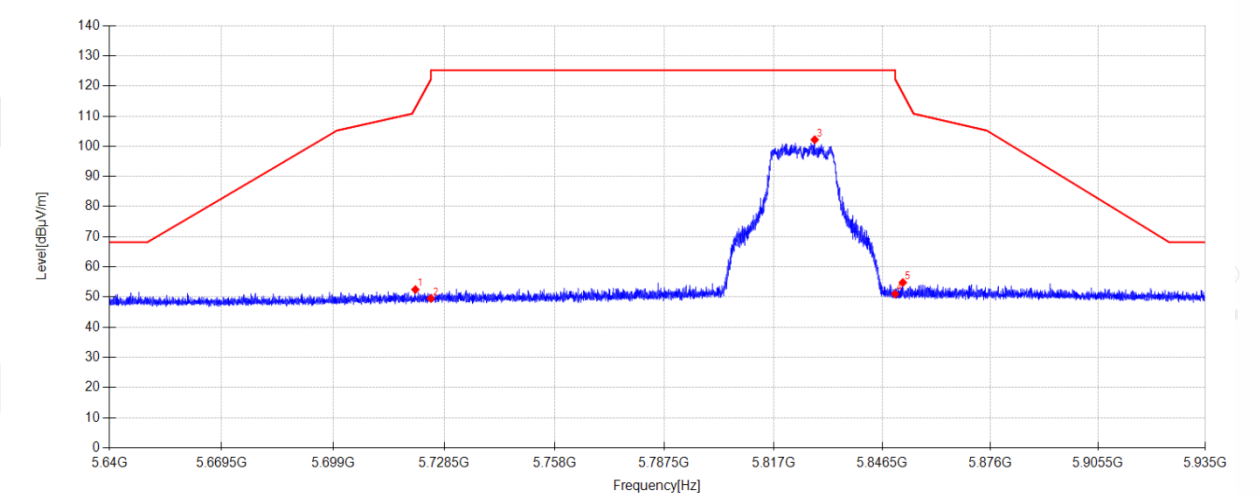

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.860	43.40	34.28	-25.21	52.47	112.76	60.29	PK	Vertical
2	5725.000	40.40	34.30	-25.20	49.50	122.20	72.70	PK	Vertical
3	5828.122	92.45	34.71	-24.98	102.18	125.20	23.02	PK	Vertical
4	5850.000	41.15	34.80	-24.95	51.00	122.20	71.20	PK	Vertical
5	5852.076	44.96	34.80	-24.95	54.81	117.47	62.66	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\38

Memo:

Sample Number: S26072123-002

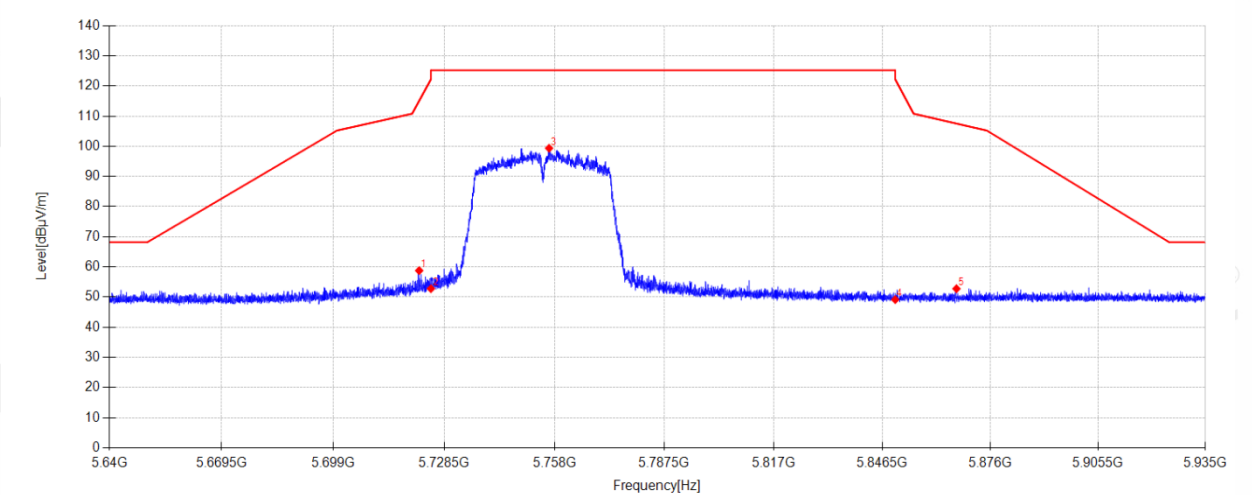

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.863	49.68	34.29	-25.21	58.76	115.05	56.29	PK	Horizontal
2	5725.000	43.67	34.30	-25.20	52.77	122.20	69.43	PK	Horizontal
3	5756.555	90.04	34.43	-25.12	99.35	125.20	25.85	PK	Horizontal
4	5850.000	39.28	34.80	-24.95	49.13	122.20	73.07	PK	Horizontal
5	5866.678	42.86	34.83	-24.93	52.76	107.53	54.77	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\39

Memo:

Sample Number: S26072123-002

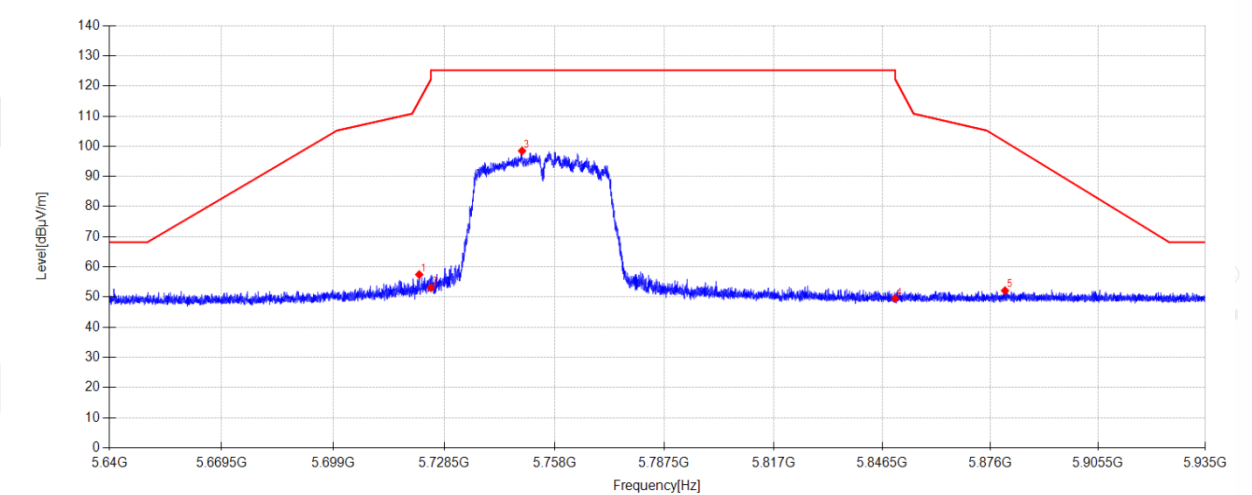

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.892	48.36	34.29	-25.21	57.44	115.11	57.67	PK	Vertical
2	5725.000	43.95	34.30	-25.20	53.05	122.20	69.15	PK	Vertical
3	5749.327	89.20	34.40	-25.14	98.46	125.20	26.74	PK	Vertical
4	5850.000	39.66	34.80	-24.95	49.51	122.20	72.69	PK	Vertical
5	5879.953	42.16	34.86	-24.91	52.11	101.53	49.42	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\36

Memo:

Sample Number: S26072123-002

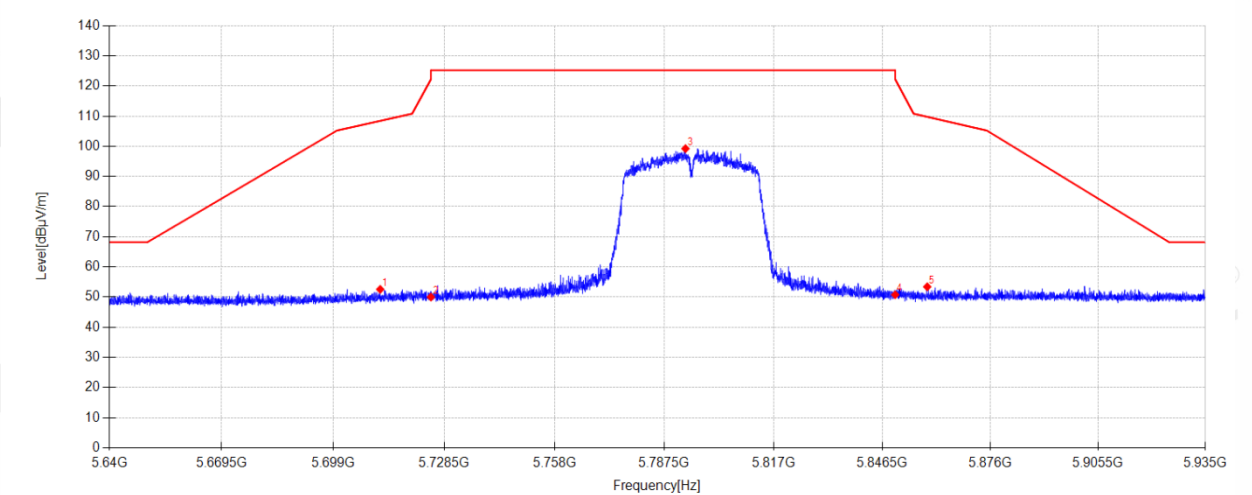

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.508	43.53	34.25	-25.23	52.55	108.42	55.87	PK	Horizontal
2	5725.000	40.89	34.30	-25.20	49.99	122.20	72.21	PK	Horizontal
3	5793.194	89.68	34.57	-25.04	99.21	125.20	25.99	PK	Horizontal
4	5850.000	40.90	34.80	-24.95	50.75	122.20	71.45	PK	Horizontal
5	5858.713	43.51	34.82	-24.94	53.39	109.76	56.37	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\37

Memo:

Sample Number: S26072123-002

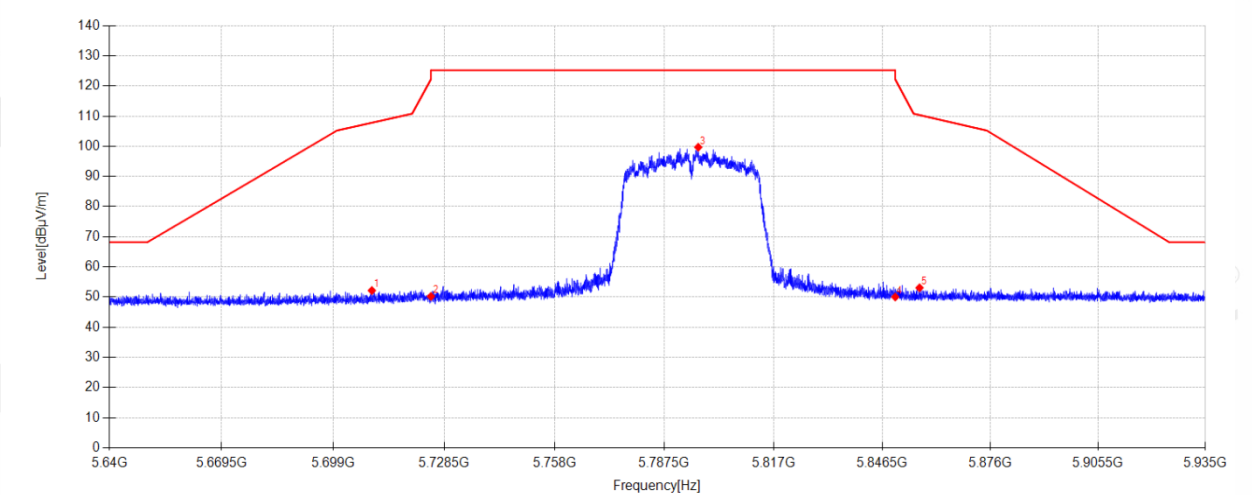

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5709.296	43.16	34.24	-25.24	52.16	107.80	55.64	PK	Vertical
2	5725.000	41.11	34.30	-25.20	50.21	122.20	71.99	PK	Vertical
3	5796.645	90.13	34.59	-25.03	99.69	125.20	25.51	PK	Vertical
4	5850.000	40.17	34.80	-24.95	50.02	122.20	72.18	PK	Vertical
5	5856.619	43.20	34.81	-24.94	53.07	110.35	57.28	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5775MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\40

Memo:

Sample Number: S26072123-002

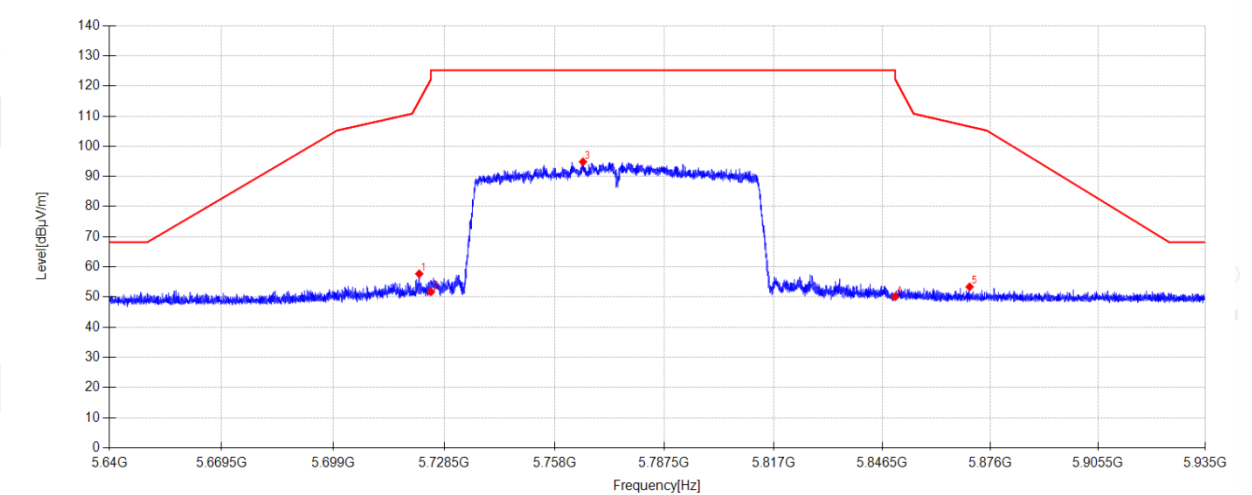

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.892	48.62	34.29	-25.21	57.70	115.11	57.41	PK	Horizontal
2	5725.000	42.59	34.30	-25.20	51.69	122.20	70.51	PK	Horizontal
3	5765.641	85.48	34.46	-25.10	94.84	125.20	30.36	PK	Horizontal
4	5850.000	40.25	34.80	-24.95	50.10	122.20	72.10	PK	Horizontal
5	5870.277	43.45	34.84	-24.92	53.37	106.52	53.15	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5775MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\41

Memo:

Sample Number: S26072123-002

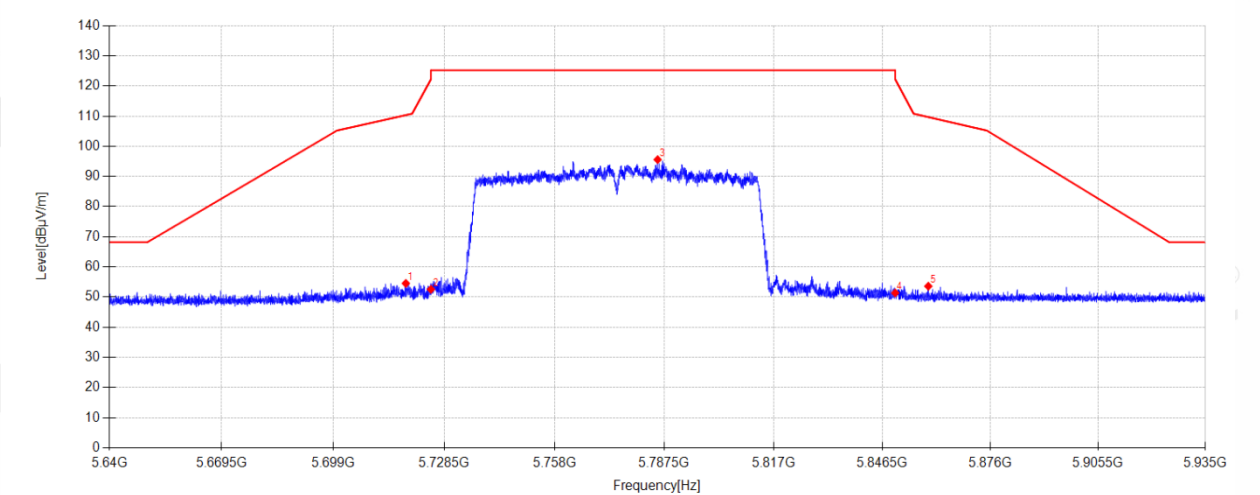

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5718.323	45.48	34.27	-25.22	54.53	110.33	55.80	PK	Vertical
2	5725.000	43.45	34.30	-25.20	52.55	122.20	69.65	PK	Vertical
3	5785.701	86.07	34.54	-25.05	95.56	125.20	29.64	PK	Vertical
4	5850.000	41.51	34.80	-24.95	51.36	122.20	70.84	PK	Vertical
5	5859.008	43.71	34.82	-24.94	53.59	109.68	56.09	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\42

Memo:

Sample Number: S26072123-002

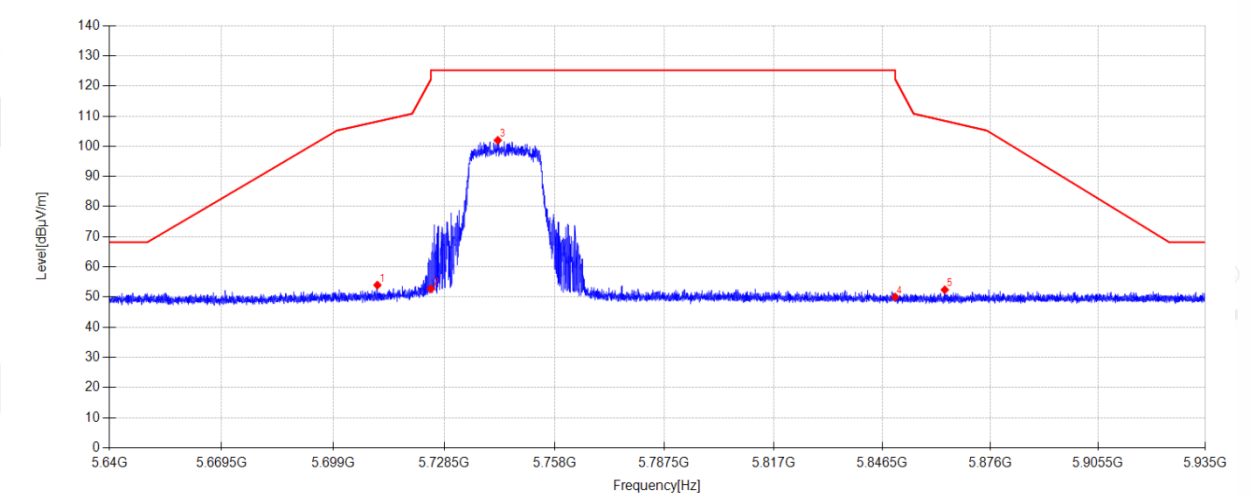

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5710.771	44.94	34.24	-25.23	53.95	108.22	54.27	PK	Horizontal
2	5725.000	43.63	34.30	-25.20	52.73	122.20	69.47	PK	Horizontal
3	5742.837	92.75	34.37	-25.16	101.96	125.20	23.24	PK	Horizontal
4	5850.000	40.16	34.80	-24.95	50.01	122.20	72.19	PK	Horizontal
5	5863.492	42.49	34.83	-24.93	52.39	108.42	56.03	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\43

Memo:

Sample Number: S26072123-002

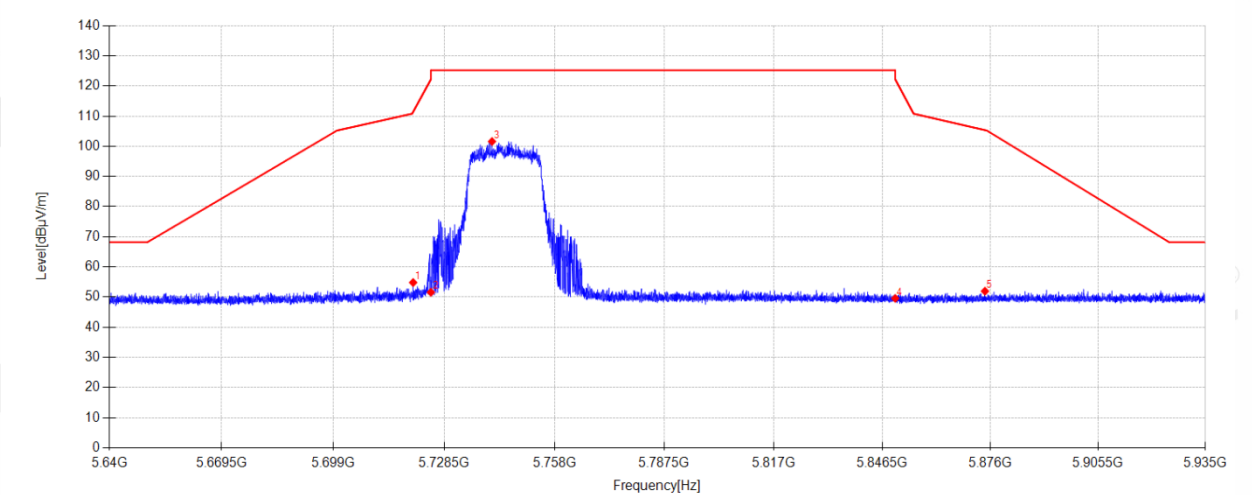

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.270	45.74	34.28	-25.21	54.81	111.41	56.60	PK	Vertical
2	5725.000	42.47	34.30	-25.20	51.57	122.20	70.63	PK	Vertical
3	5741.303	92.37	34.37	-25.16	101.58	125.20	23.62	PK	Vertical
4	5850.000	39.70	34.80	-24.95	49.55	122.20	72.65	PK	Vertical
5	5874.466	42.00	34.85	-24.92	51.93	105.35	53.42	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\44

Memo:

Sample Number: S26072123-002

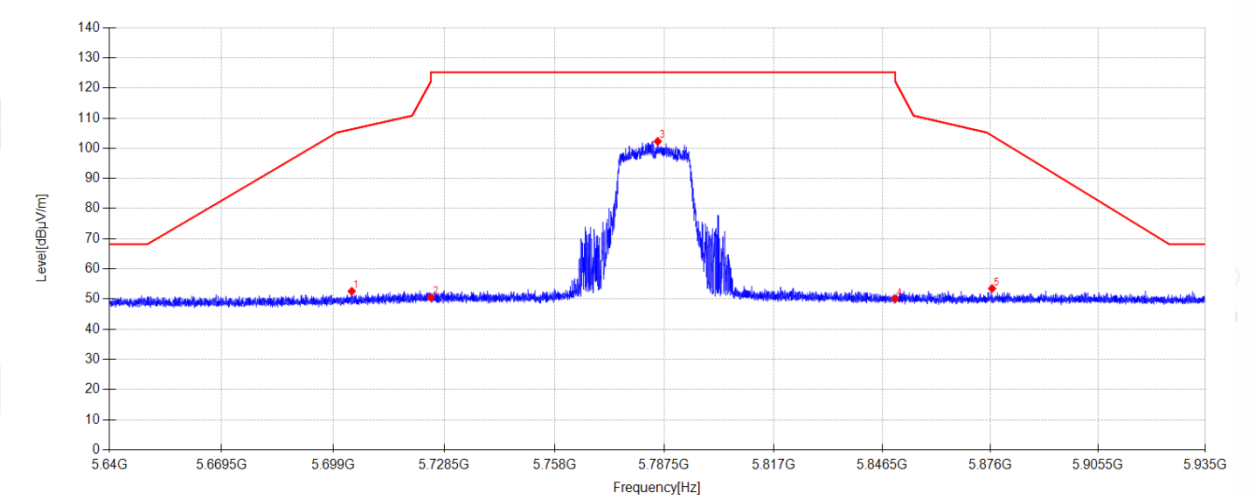

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5703.956	43.62	34.22	-25.25	52.59	106.31	53.72	PK	Horizontal
2	5725.000	41.38	34.30	-25.20	50.48	122.20	71.72	PK	Horizontal
3	5785.730	92.80	34.54	-25.05	102.29	125.20	22.91	PK	Horizontal
4	5850.000	40.24	34.80	-24.95	50.09	122.20	72.11	PK	Horizontal
5	5876.413	43.54	34.85	-24.91	53.48	104.15	50.67	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\45

Memo:

Sample Number: S26072123-002

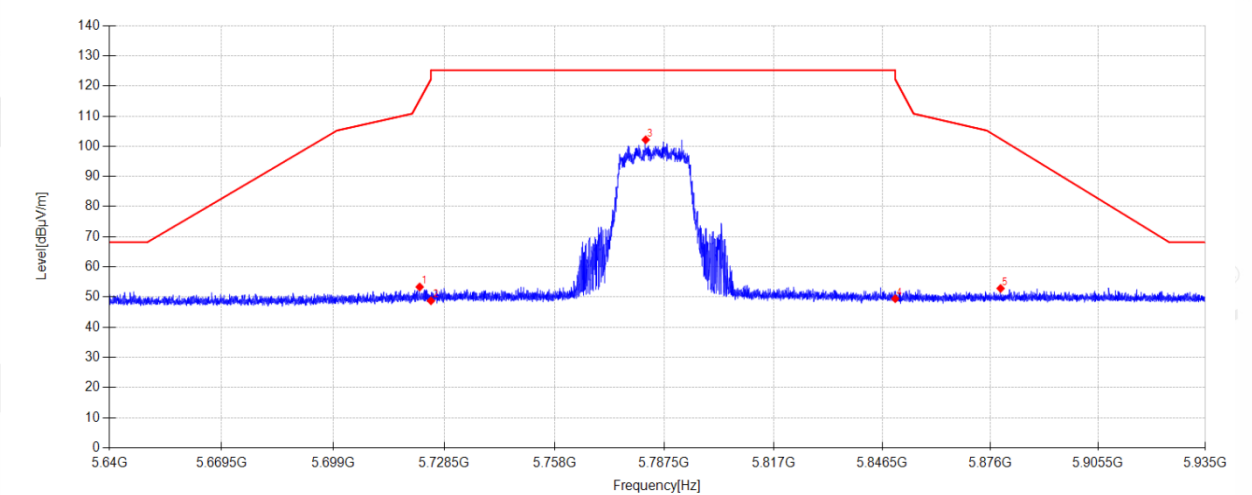

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.010	44.26	34.29	-25.21	53.34	115.38	62.04	PK	Vertical
2	5725.000	39.65	34.30	-25.20	48.75	122.20	73.45	PK	Vertical
3	5782.485	92.69	34.53	-25.06	102.16	125.20	23.04	PK	Vertical
4	5850.000	39.59	34.80	-24.95	49.44	122.20	72.76	PK	Vertical
5	5878.744	42.91	34.86	-24.91	52.86	102.43	49.57	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\46

Memo:

Sample Number: S26072123-002

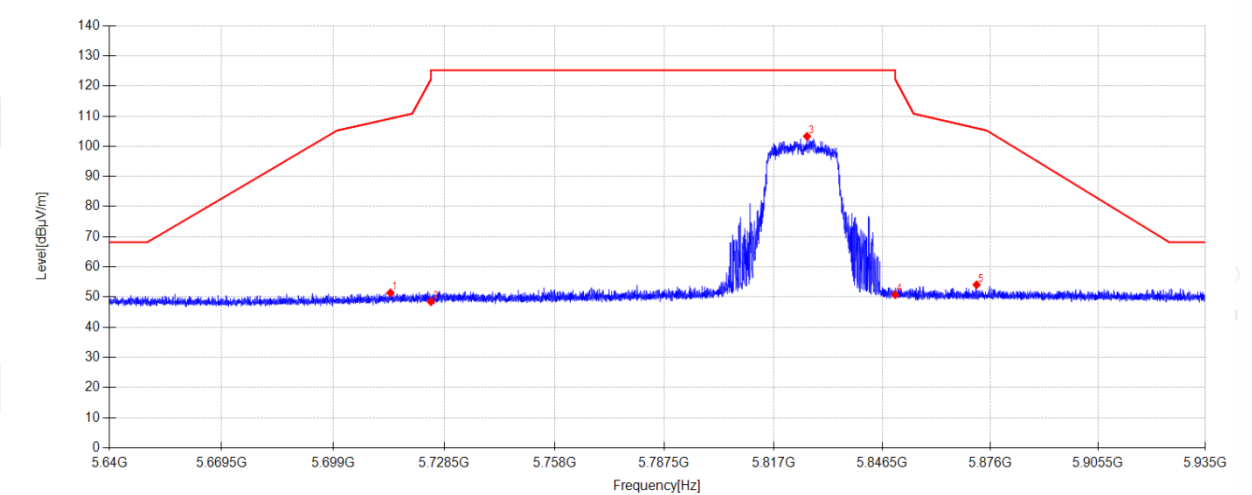

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5714.222	42.34	34.26	-25.23	51.37	109.18	57.81	PK	Horizontal
2	5725.000	39.32	34.30	-25.20	48.42	122.20	73.78	PK	Horizontal
3	5826.057	93.57	34.70	-24.98	103.29	125.20	21.91	PK	Horizontal
4	5850.000	40.93	34.80	-24.95	50.78	122.20	71.42	PK	Horizontal
5	5872.195	44.16	34.84	-24.92	54.08	105.99	51.91	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\47

Memo:

Sample Number: S26072123-002

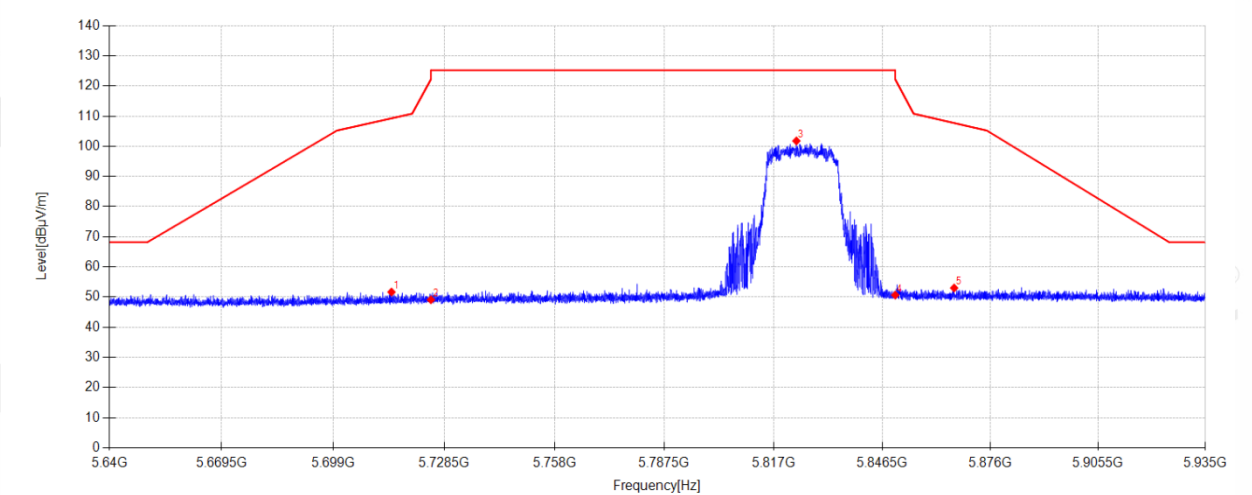

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5714.517	42.62	34.26	-25.23	51.65	109.26	57.61	PK	Vertical
2	5725.000	39.98	34.30	-25.20	49.08	122.20	73.12	PK	Vertical
3	5823.166	92.08	34.69	-24.99	101.78	125.20	23.42	PK	Vertical
4	5850.000	40.81	34.80	-24.95	50.66	122.20	71.54	PK	Vertical
5	5866.059	43.10	34.83	-24.93	53.00	107.70	54.70	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\50

Memo:

Sample Number: S26072123-002

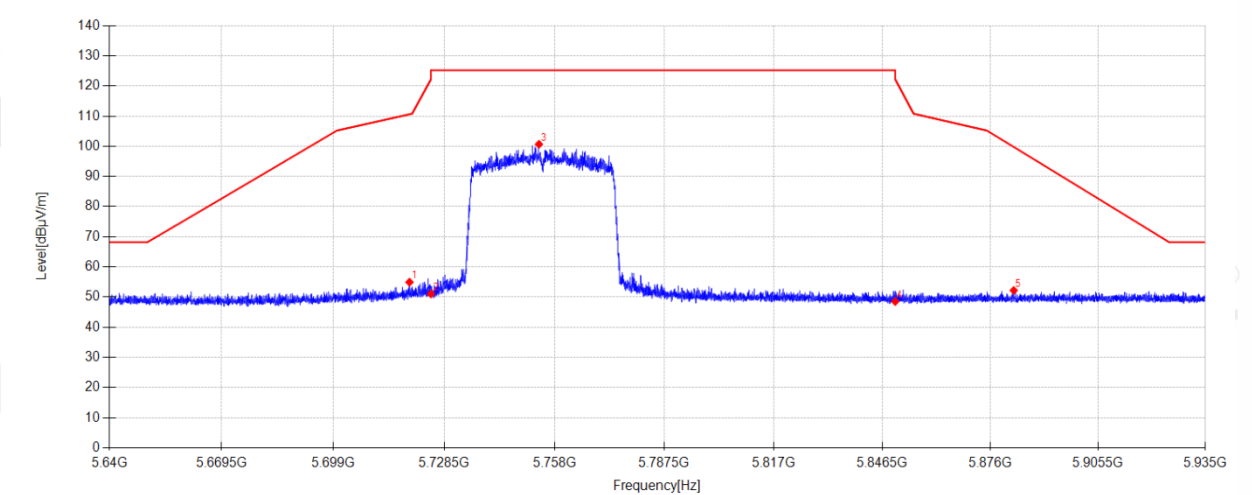

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.296	45.87	34.28	-25.21	54.94	110.60	55.66	PK	Horizontal
2	5725.000	41.93	34.30	-25.20	51.03	122.20	71.17	PK	Horizontal
3	5753.841	91.37	34.42	-25.13	100.66	125.20	24.54	PK	Horizontal
4	5850.000	38.66	34.80	-24.95	48.51	122.20	73.69	PK	Horizontal
5	5882.343	42.23	34.86	-24.90	52.19	99.77	47.58	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\51

Memo:

Sample Number: S26072123-002

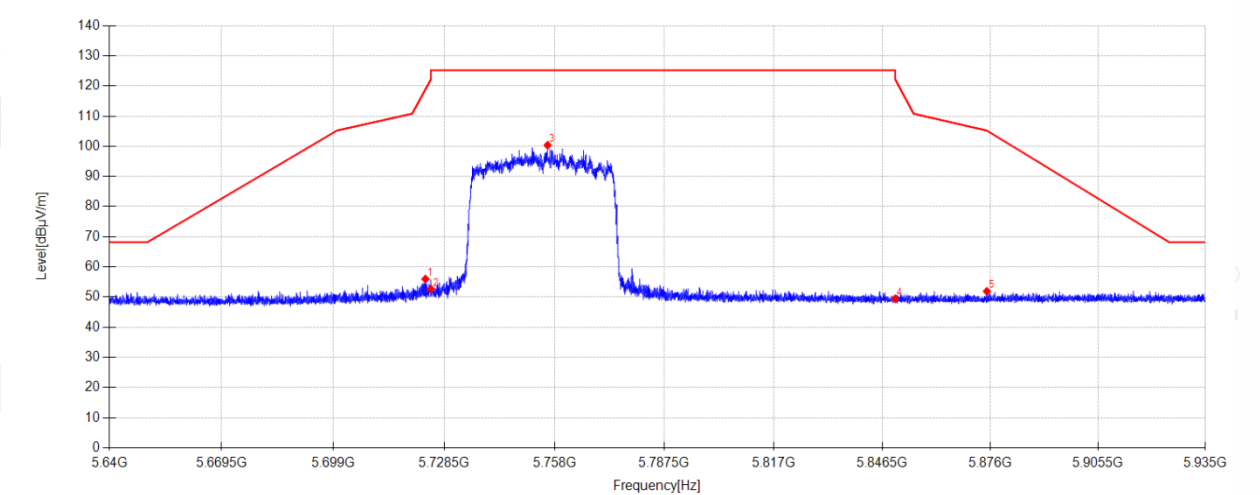

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.544	46.88	34.29	-25.20	55.97	118.88	62.91	PK	Vertical
2	5725.000	43.56	34.30	-25.20	52.66	122.20	69.54	PK	Vertical
3	5756.171	91.06	34.42	-25.13	100.35	125.20	24.85	PK	Vertical
4	5850.000	39.54	34.80	-24.95	49.39	122.20	72.81	PK	Vertical
5	5874.997	41.98	34.85	-24.92	51.91	105.20	53.29	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-30

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 5.8G\48

Memo:

Sample Number: S26072123-002

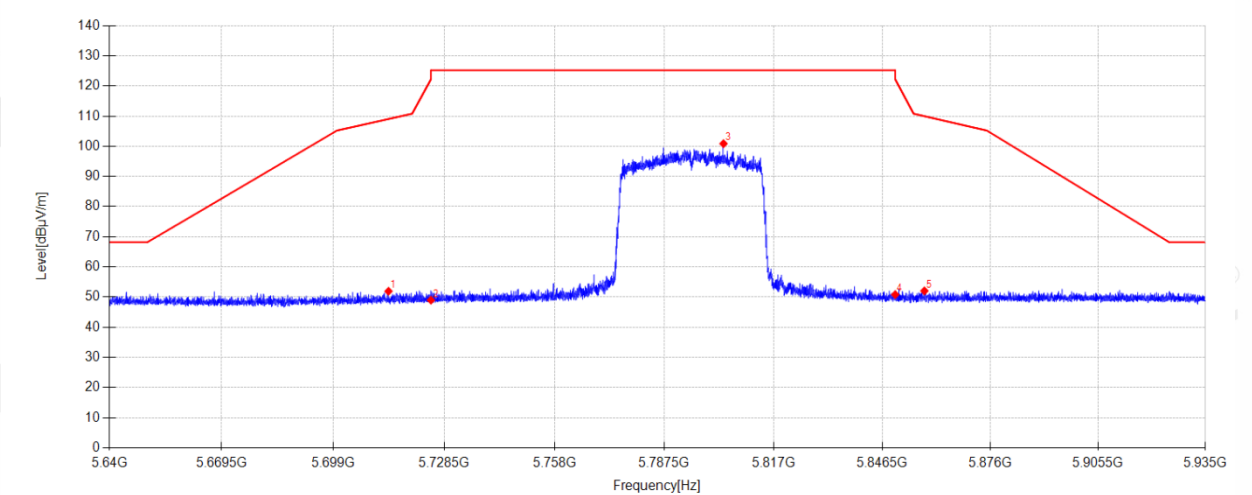

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5713.721	42.90	34.25	-25.23	51.92	109.04	57.12	PK	Horizontal
2	5725.000	39.86	34.30	-25.20	48.96	122.20	73.24	PK	Horizontal
3	5803.460	91.27	34.61	-25.02	100.86	125.20	24.34	PK	Horizontal
4	5850.000	40.96	34.80	-24.95	50.81	122.20	71.39	PK	Horizontal
5	5857.946	42.16	34.82	-24.94	52.04	109.98	57.94	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.