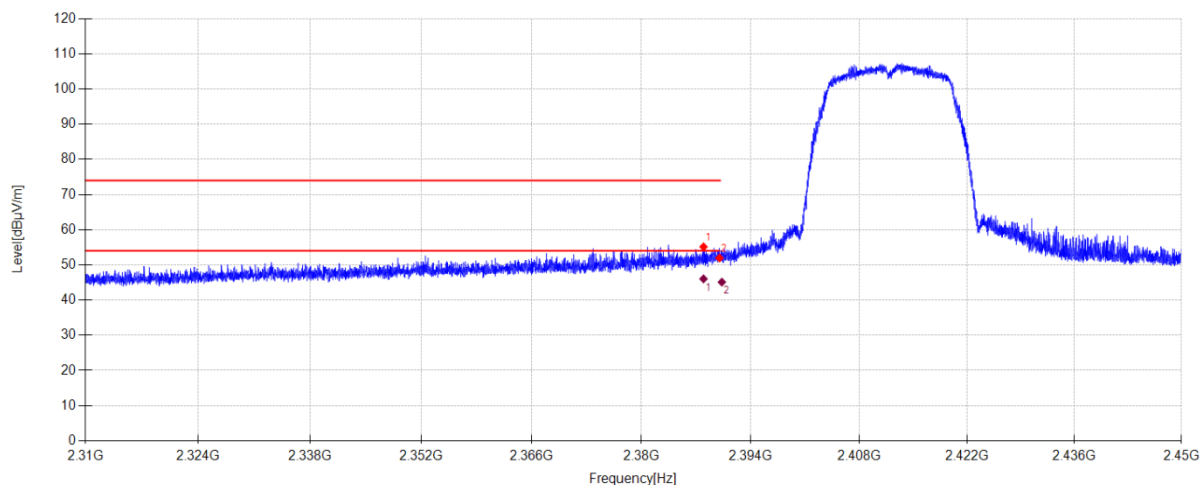


TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11G 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\47
Memo: Sample Number: S26072123-002

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.952	55.08	28.18	-28.12	55.14	74.00	18.86	PK	Horizontal
2	2390.000	51.90	28.18	-28.12	51.96	74.00	22.04	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.949	45.96	28.18	-28.12	46.02	54.00	7.98	AV	Horizontal
2	2390.305	45.05	28.18	-28.12	45.11	51.97	6.86	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-28

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11G 2412MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\48

Memo:

Sample Number: S26072123-002

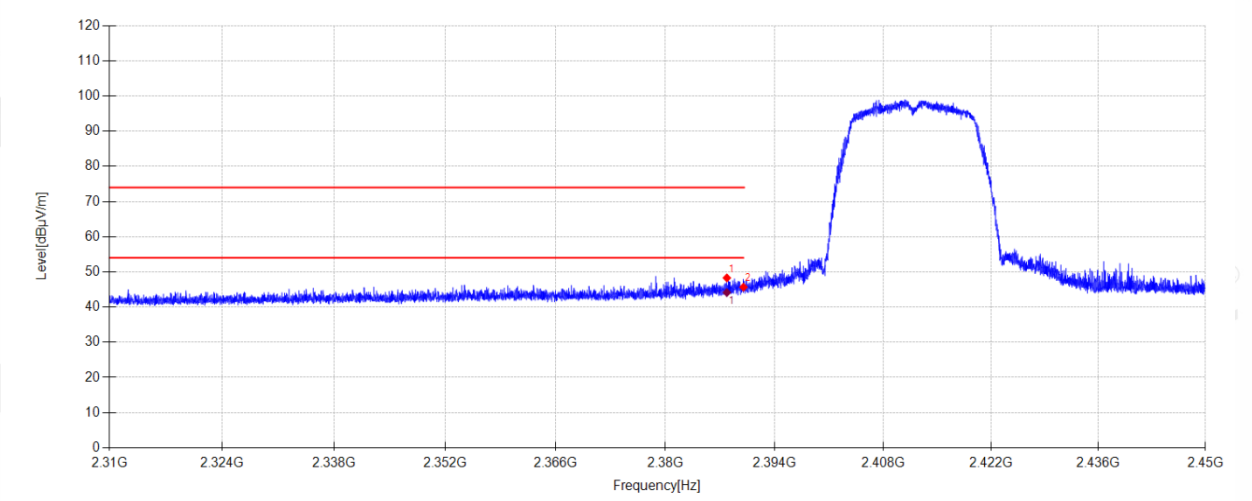

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.868	48.23	28.18	-28.12	48.29	74.00	25.71	PK	Vertical
2	2390.000	45.61	28.18	-28.12	45.67	74.00	28.33	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.868	44.07	28.18	-28.12	44.13	54.00	9.87	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11G 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\49
Memo: Sample Number: S26072123-002

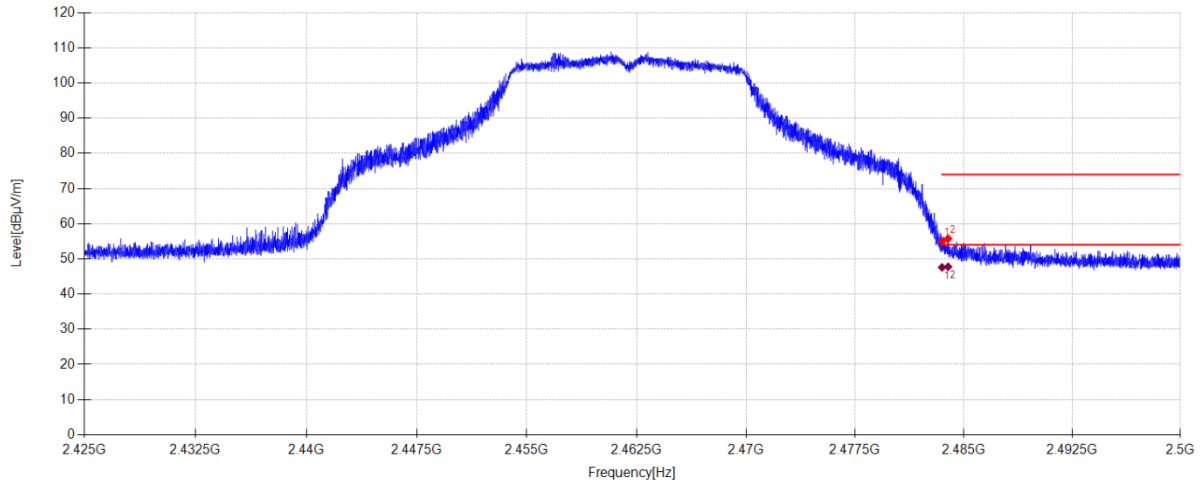

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	54.34	28.60	-27.99	54.95	74.00	19.05	PK	Horizontal
2	2483.920	55.15	28.60	-27.99	55.76	74.00	18.24	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.498	46.97	28.60	-27.99	47.58	54.00	6.42	AV	Horizontal
2	2483.920	47.14	28.60	-27.99	47.75	54.00	6.25	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-28

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11G 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.7°C;Humi:54.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\50

Memo:

Sample Number: S26072123-002

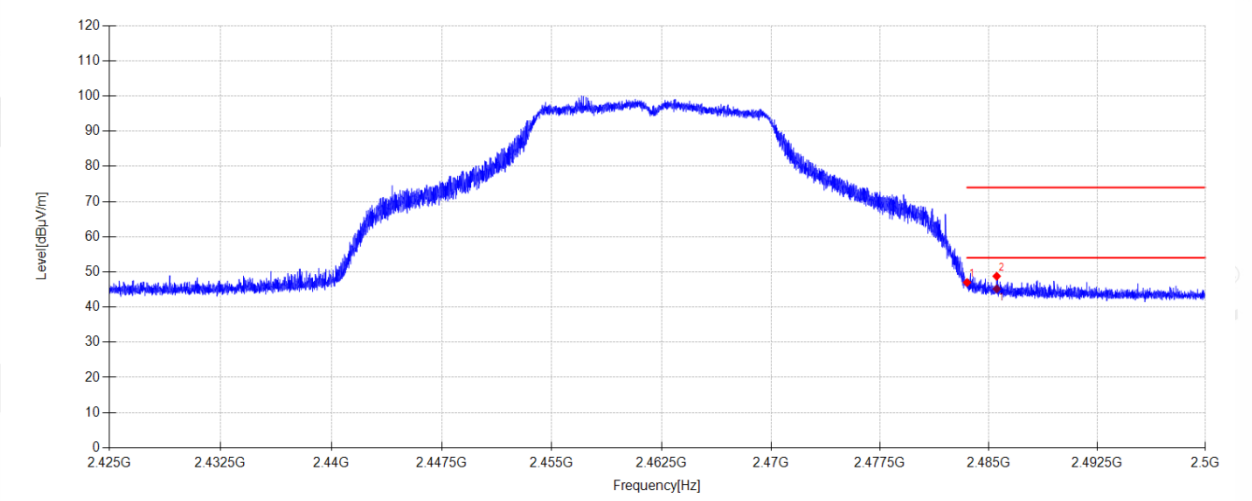

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.39	28.60	-27.99	47.00	74.00	27.00	PK	Vertical
2	2485.548	48.15	28.61	-27.99	48.77	74.00	25.23	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2485.548	44.55	28.61	-27.99	45.17	54.00	8.83	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\37
Memo: Sample Number: S26072123-002

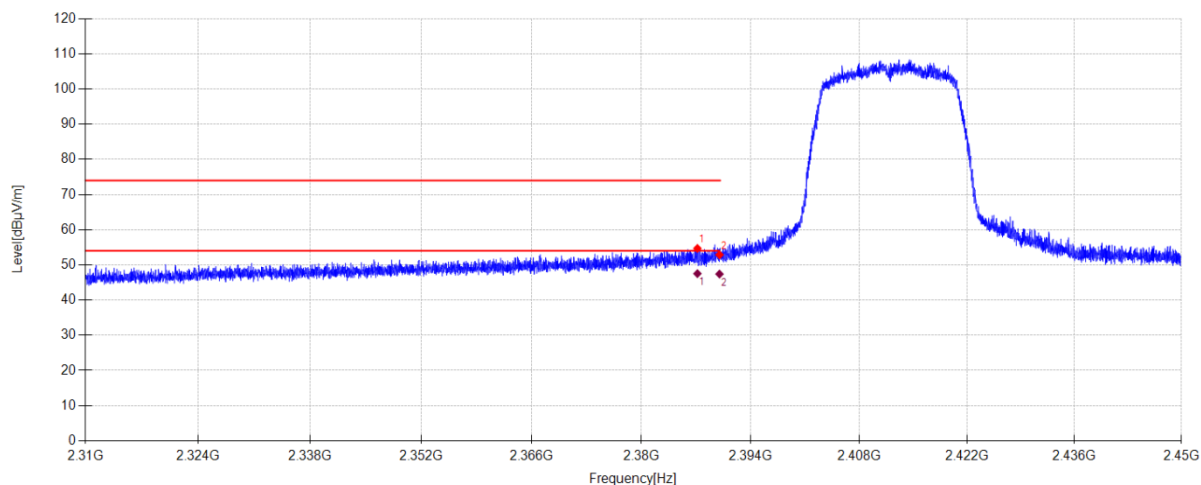**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.168	54.65	28.17	-28.13	54.69	74.00	19.31	PK	Horizontal
2	2390.000	52.81	28.18	-28.12	52.87	74.00	21.13	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.168	47.48	28.17	-28.13	47.52	54.00	6.48	AV	Horizontal
2	2390.000	47.34	28.18	-28.12	47.40	54.00	6.60	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\38
Memo: Sample Number: S26072123-002

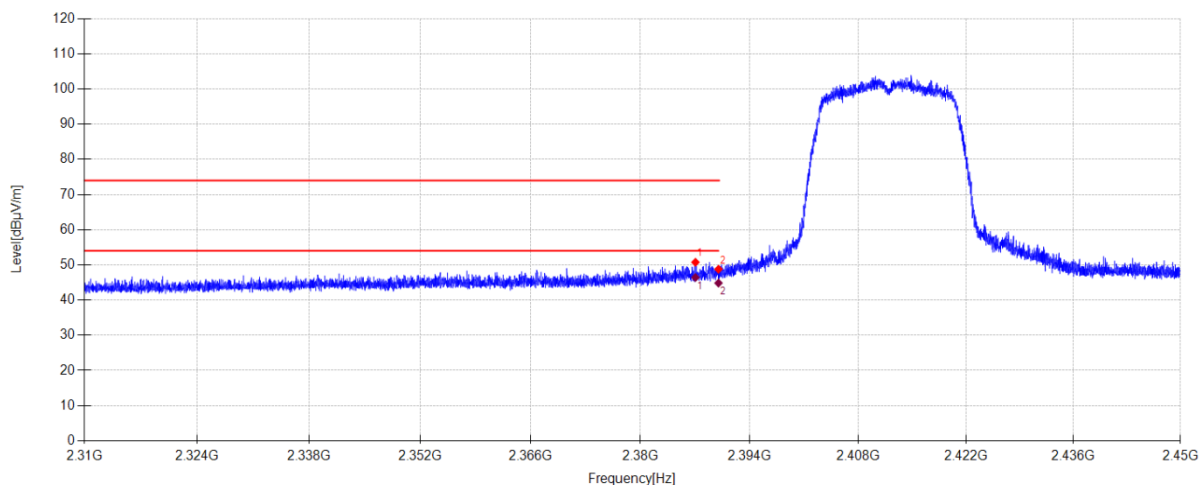

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.042	50.71	28.17	-28.13	50.75	74.00	23.25	PK	Vertical
2	2390.000	48.72	28.18	-28.12	48.78	74.00	25.22	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.042	46.38	28.17	-28.13	46.42	54.00	7.58	AV	Vertical
2	2390.000	44.78	28.18	-28.12	44.84	54.00	9.16	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\35
Memo: Sample Number: S26072123-002

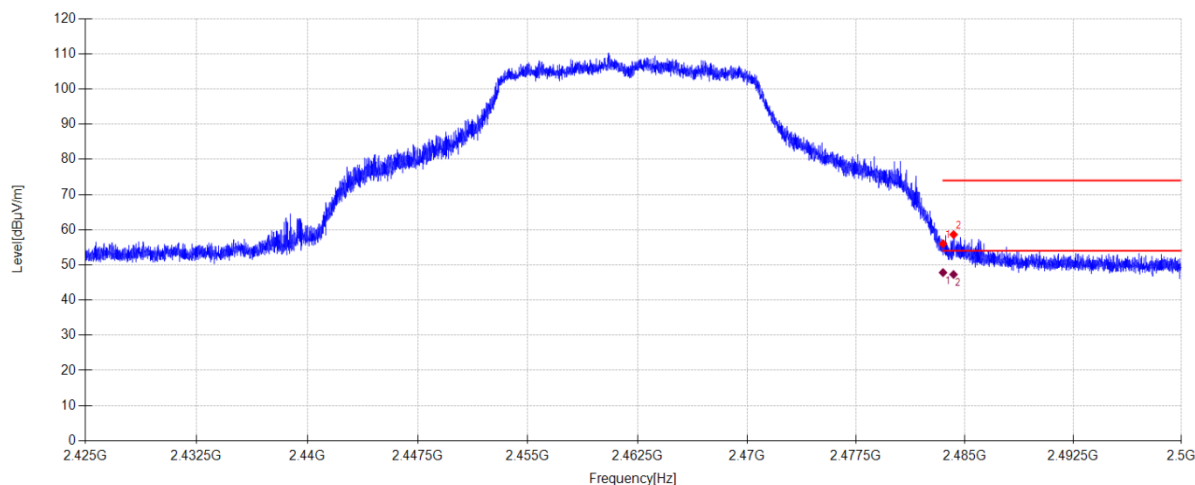

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	55.38	28.60	-27.99	55.99	74.00	18.01	PK	Horizontal
2	2484.228	58.00	28.61	-27.99	58.62	74.00	15.38	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.496	47.21	28.60	-27.99	47.82	54.00	6.18	AV	Horizontal
2	2484.223	46.66	28.61	-27.99	47.28	54.00	6.72	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\36
Memo: Sample Number: S26072123-002

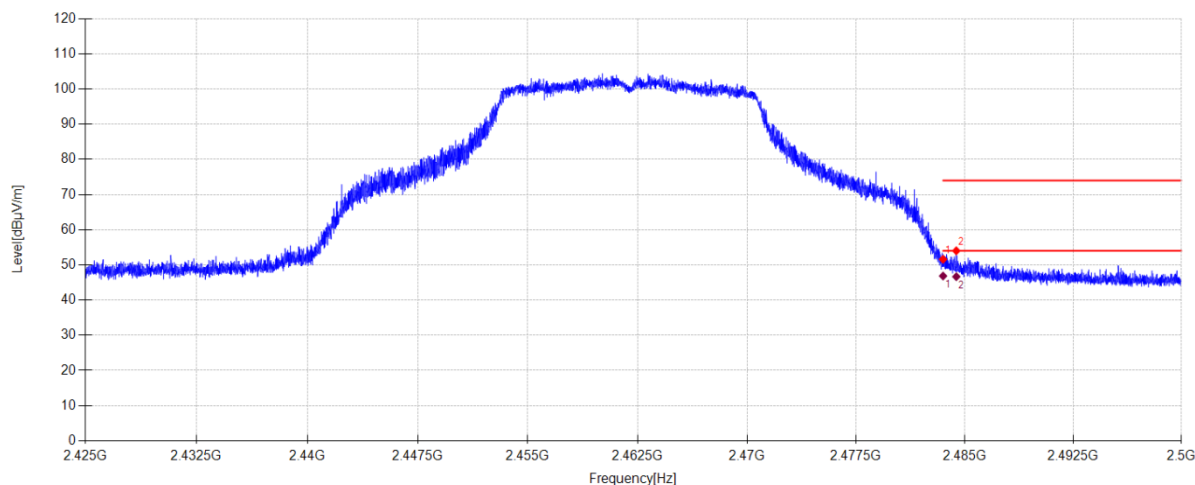**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	50.98	28.60	-27.99	51.59	74.00	22.41	PK	Vertical
2	2484.415	53.39	28.61	-27.99	54.01	74.00	19.99	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.24	28.60	-27.99	46.85	54.00	7.15	AV	Vertical
2	2484.415	46.03	28.61	-27.99	46.65	54.00	7.35	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\33
Memo: Sample Number: S26072123-002

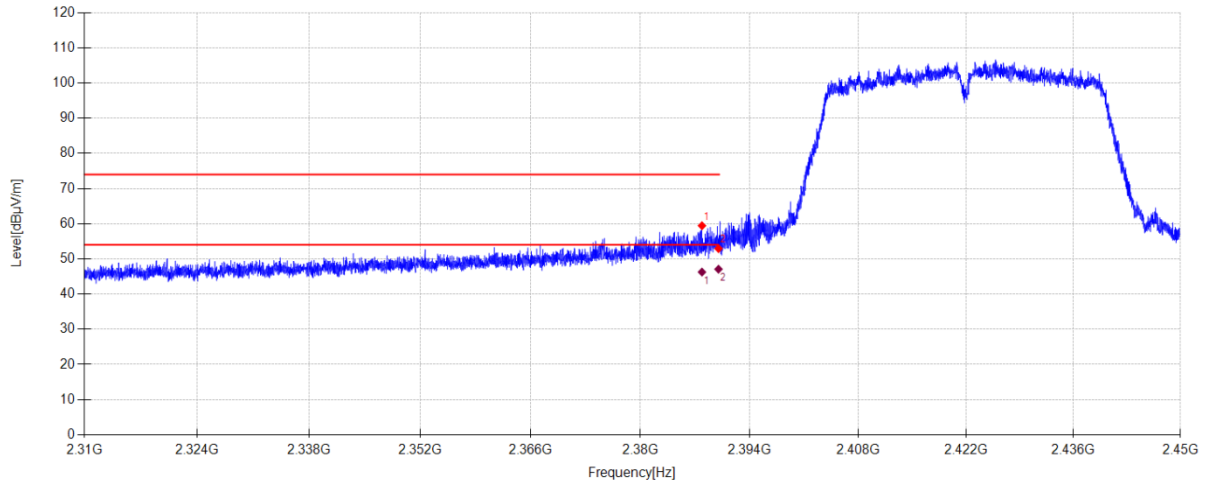**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.882	59.37	28.18	-28.12	59.43	74.00	14.57	PK	Horizontal
2	2390.000	52.87	28.18	-28.12	52.93	74.00	21.07	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.882	46.20	28.18	-28.12	46.26	54.00	7.74	AV	Horizontal
2	2389.999	47.02	28.18	-28.12	47.08	54.00	6.92	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\34
Memo: Sample Number: S26072123-002

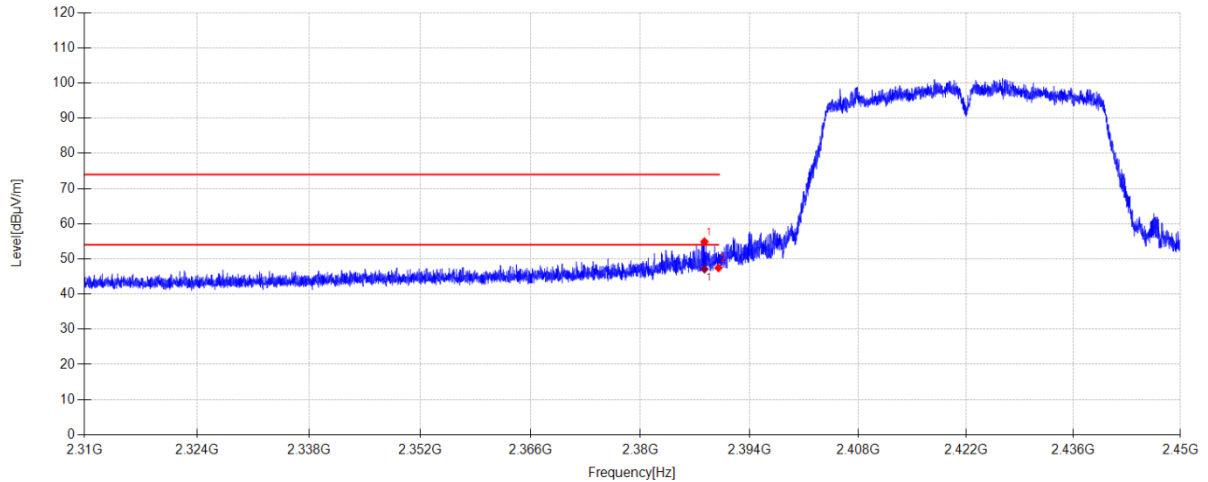**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.204	54.83	28.18	-28.12	54.89	74.00	19.11	PK	Vertical
2	2390.000	47.39	28.18	-28.12	47.45	74.00	26.55	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.204	47.05	28.18	-28.12	47.11	54.00	6.89	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\31
Memo: Sample Number: S26072123-002

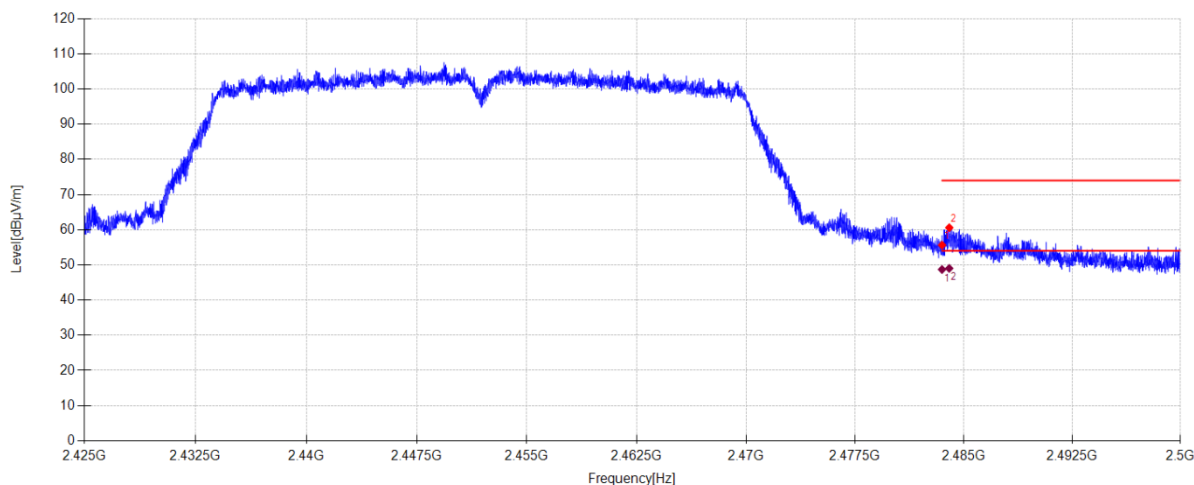

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	55.02	28.60	-27.99	55.63	74.00	18.37	PK	Horizontal
2	2483.995	59.97	28.60	-27.99	60.58	74.00	13.42	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.497	48.09	28.60	-27.99	48.70	54.00	5.30	AV	Horizontal
2	2483.993	48.40	28.60	-27.99	49.01	54.00	4.99	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\32
Memo: Sample Number: S26072123-002

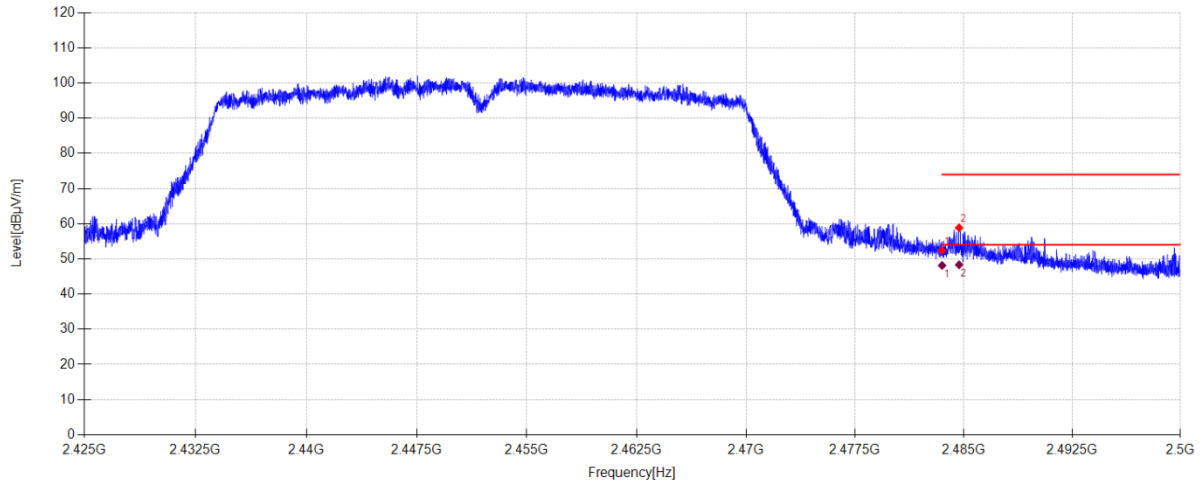

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	51.79	28.60	-27.99	52.40	74.00	21.60	PK	Vertical
2	2484.678	58.22	28.61	-27.99	58.84	74.00	15.16	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	47.53	28.60	-27.99	48.14	54.00	5.86	AV	Vertical
2	2484.678	47.71	28.61	-27.99	48.33	54.00	5.67	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\55
Memo: Sample Number: S26072123-002

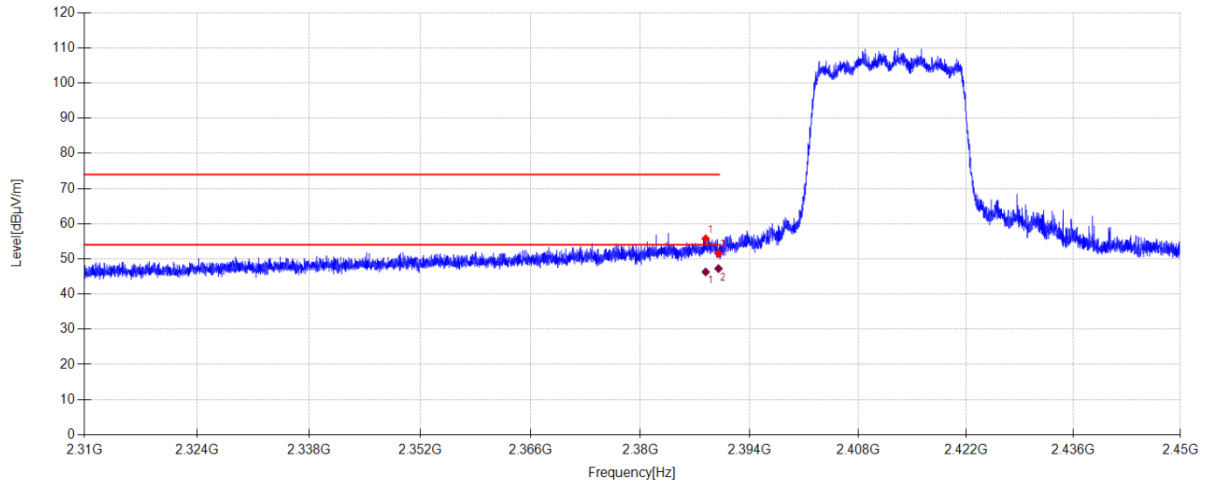**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.358	55.67	28.18	-28.12	55.73	74.00	18.27	PK	Horizontal
2	2390.000	51.47	28.18	-28.12	51.53	74.00	22.47	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.358	46.23	28.18	-28.12	46.29	54.00	7.71	AV	Horizontal
2	2390.000	47.18	28.18	-28.12	47.24	54.00	6.76	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\56
Memo: Sample Number: S26072123-002

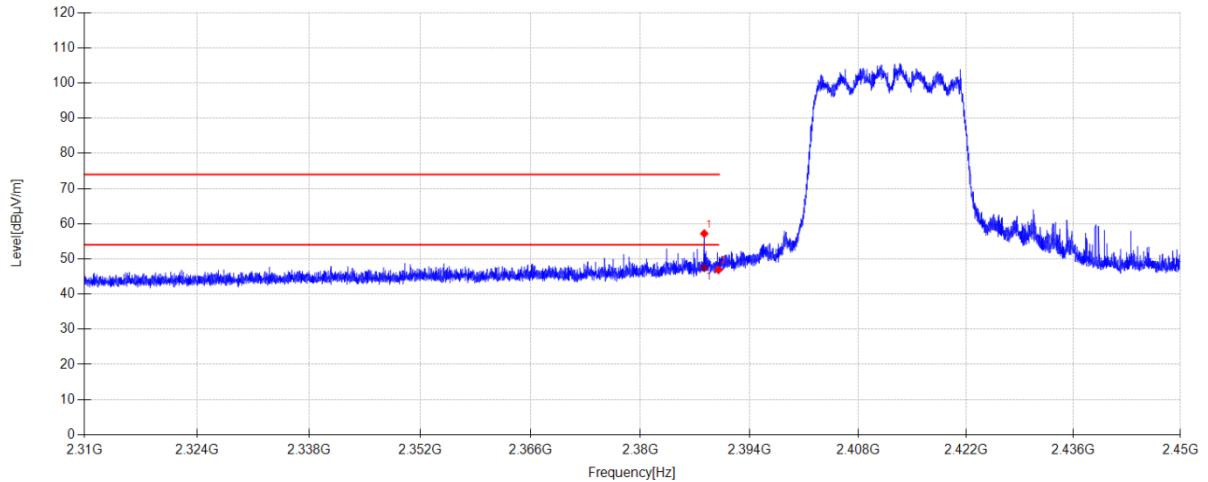**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.176	57.13	28.18	-28.12	57.19	74.00	16.81	PK	Vertical
2	2390.000	46.84	28.18	-28.12	46.90	74.00	27.10	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.176	47.42	28.18	-28.12	47.48	54.00	6.52	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\57
Memo: Sample Number: S26072123-002

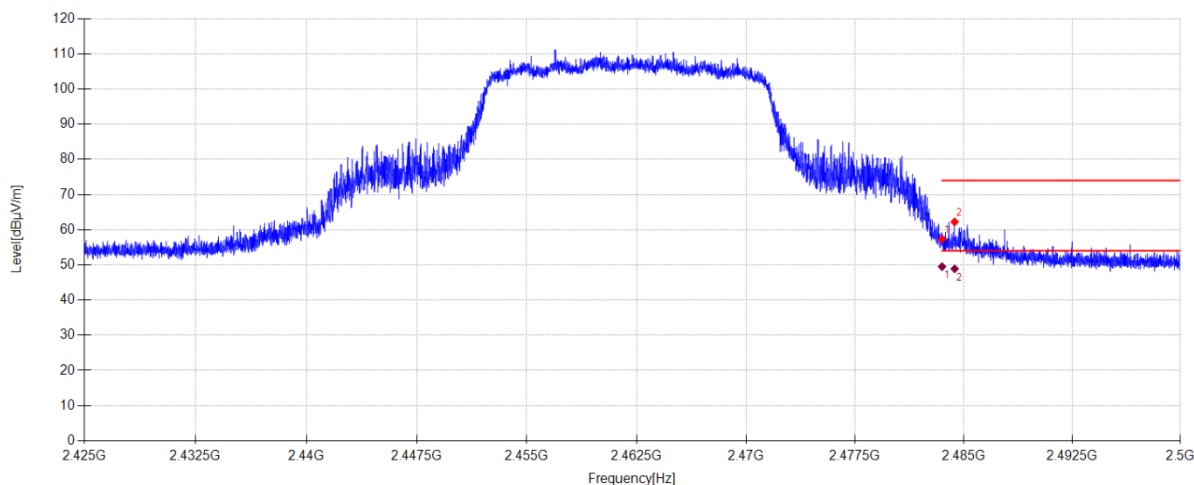**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	56.70	28.60	-27.99	57.31	74.00	16.69	PK	Horizontal
2	2484.370	61.60	28.61	-27.99	62.22	74.00	11.78	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.498	48.89	28.60	-27.99	49.50	54.00	4.50	AV	Horizontal
2	2484.368	48.27	28.61	-27.99	48.89	54.00	5.11	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\58
Memo: Sample Number: S26072123-002

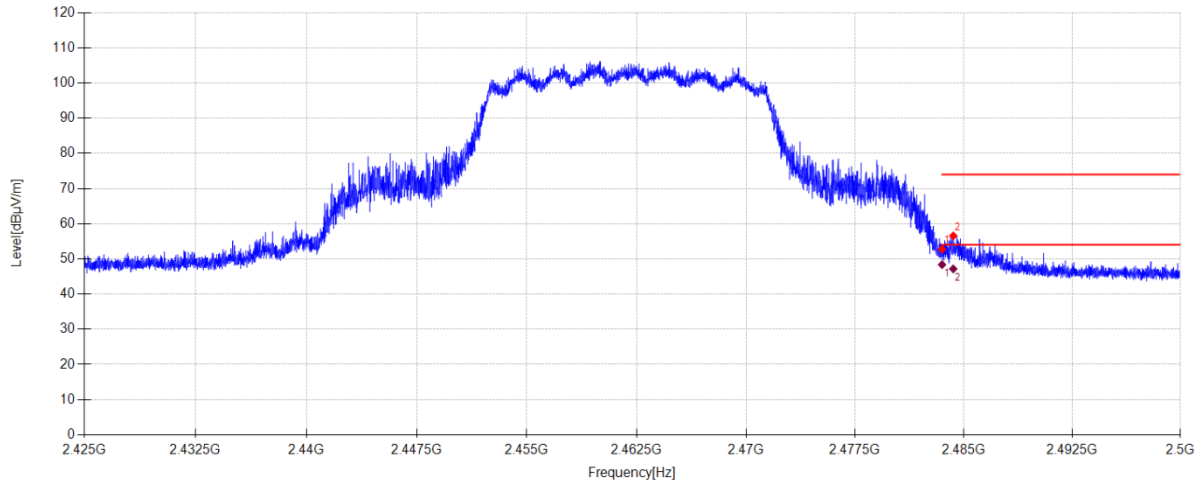

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	52.16	28.60	-27.99	52.77	74.00	21.23	PK	Vertical
2	2484.273	55.93	28.61	-27.99	56.55	74.00	17.45	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	47.75	28.60	-27.99	48.36	54.00	5.64	AV	Vertical
2	2484.273	46.54	28.61	-27.99	47.16	54.00	6.84	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\61
Memo: Sample Number: S26072123-002

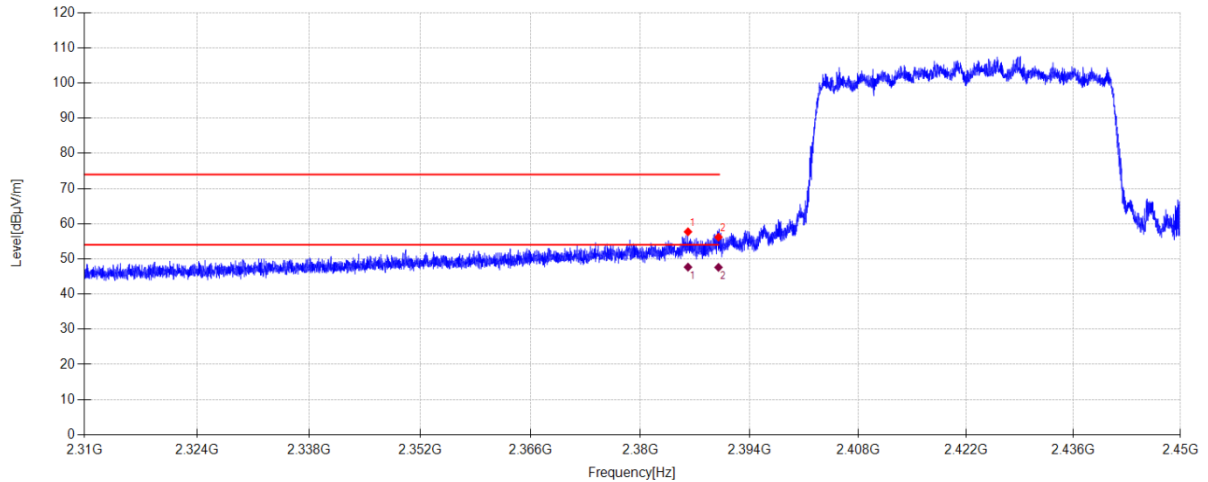

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.090	57.67	28.17	-28.13	57.71	74.00	16.29	PK	Horizontal
2	2390.000	56.13	28.18	-28.12	56.19	74.00	17.81	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.090	47.63	28.17	-28.13	47.67	54.00	6.33	AV	Horizontal
2	2390.000	47.54	28.18	-28.12	47.60	54.00	6.40	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\62
Memo: Sample Number: S26072123-002

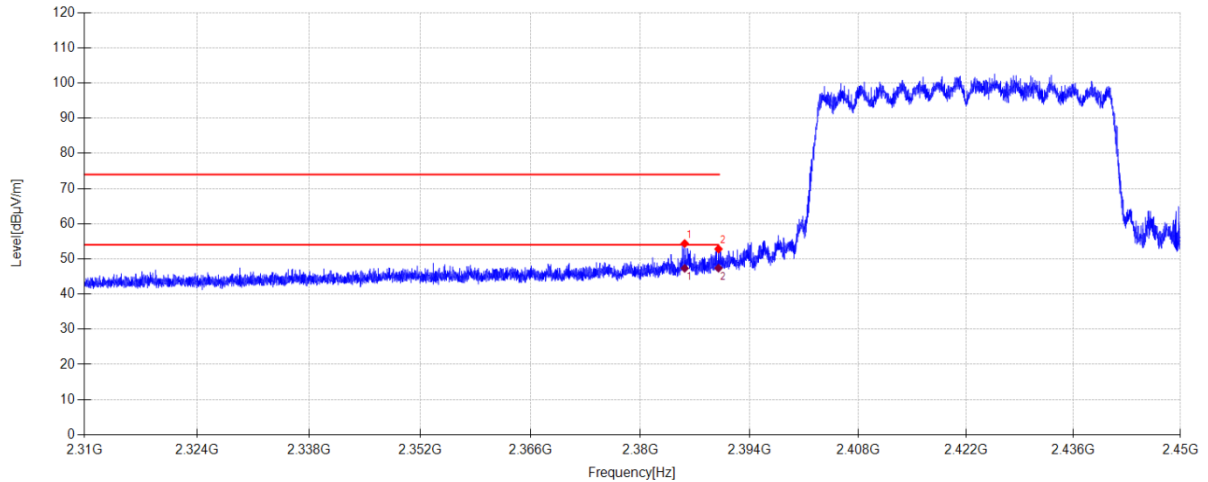**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.670	54.33	28.17	-28.13	54.37	74.00	19.63	PK	Vertical
2	2390.000	52.75	28.18	-28.12	52.81	74.00	21.19	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.670	47.28	28.17	-28.13	47.32	54.00	6.68	AV	Vertical
2	2390.000	47.31	28.18	-28.12	47.37	54.00	6.63	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\59
Memo: Sample Number: S26072123-002

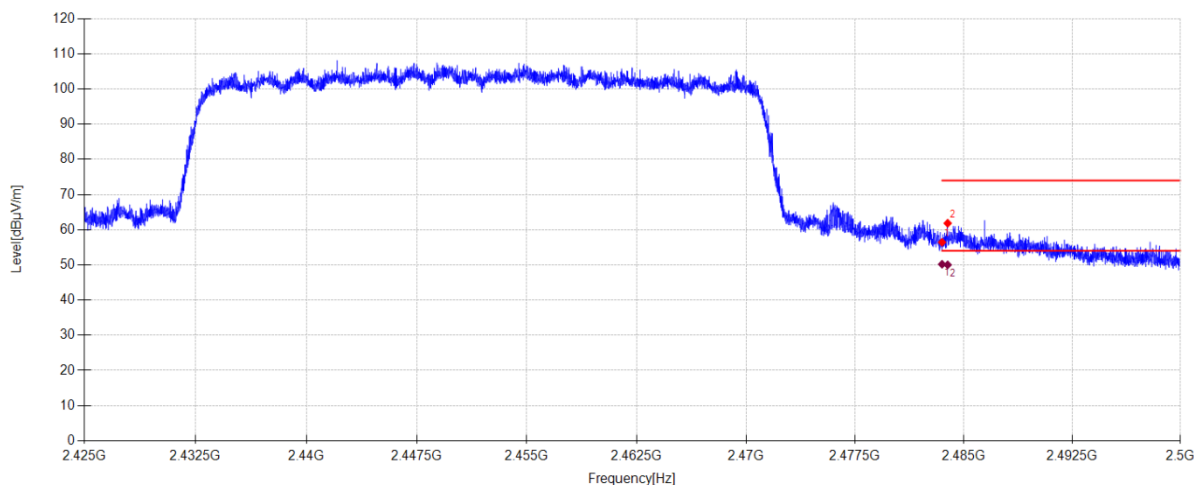**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	55.82	28.60	-27.99	56.43	74.00	17.57	PK	Horizontal
2	2483.890	61.23	28.60	-27.99	61.84	74.00	12.16	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	49.57	28.60	-27.99	50.18	54.00	3.82	AV	Horizontal
2	2483.888	49.41	28.60	-27.99	50.02	54.00	3.98	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-28 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G\60
Memo: Sample Number: S26072123-002

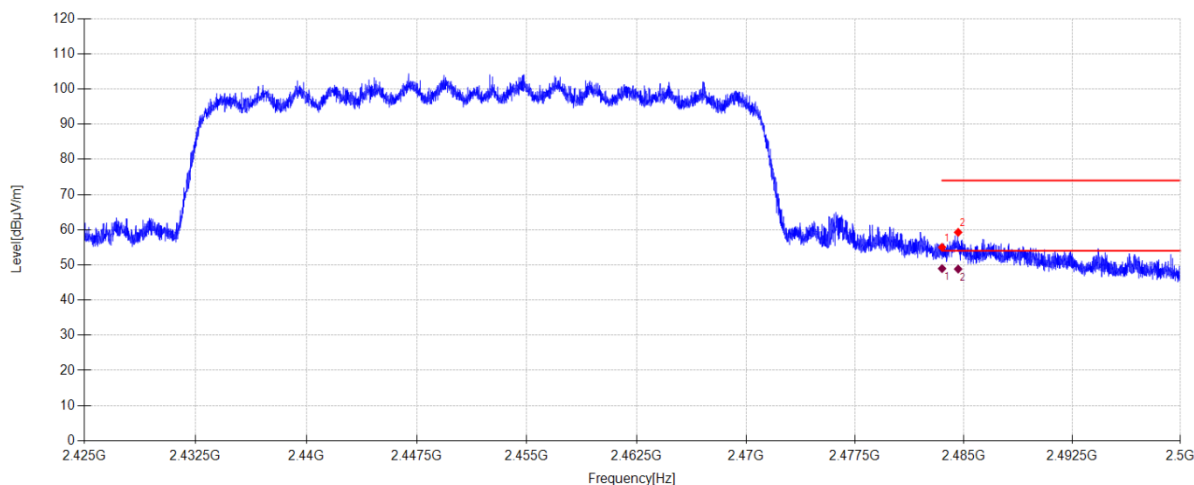

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	54.40	28.60	-27.99	55.01	74.00	18.99	PK	Vertical
2	2484.610	58.64	28.61	-27.99	59.26	74.00	14.74	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	48.35	28.60	-27.99	48.96	54.00	5.04	AV	Vertical
2	2484.610	48.20	28.61	-27.99	48.82	54.00	5.18	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX RU0 11AX20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G RU\10
Memo: Sample Number: S26072123-002

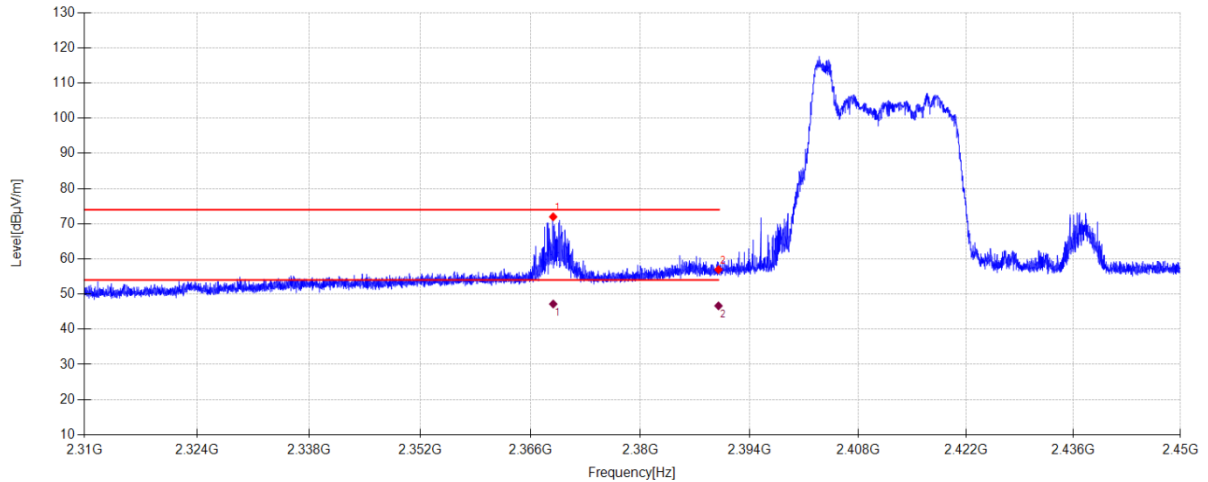**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2368.884	72.01	28.14	-28.19	71.96	74.00	2.04	PK	Horizontal
2	2390.000	56.90	28.18	-28.12	56.96	74.00	17.04	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2368.883	47.23	28.14	-28.19	47.18	54.00	6.82	AV	Horizontal
2	2390.000	46.59	28.18	-28.12	46.65	51.97	5.32	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX RU0 11AX20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G RU\11
Memo: Sample Number: S26072123-002

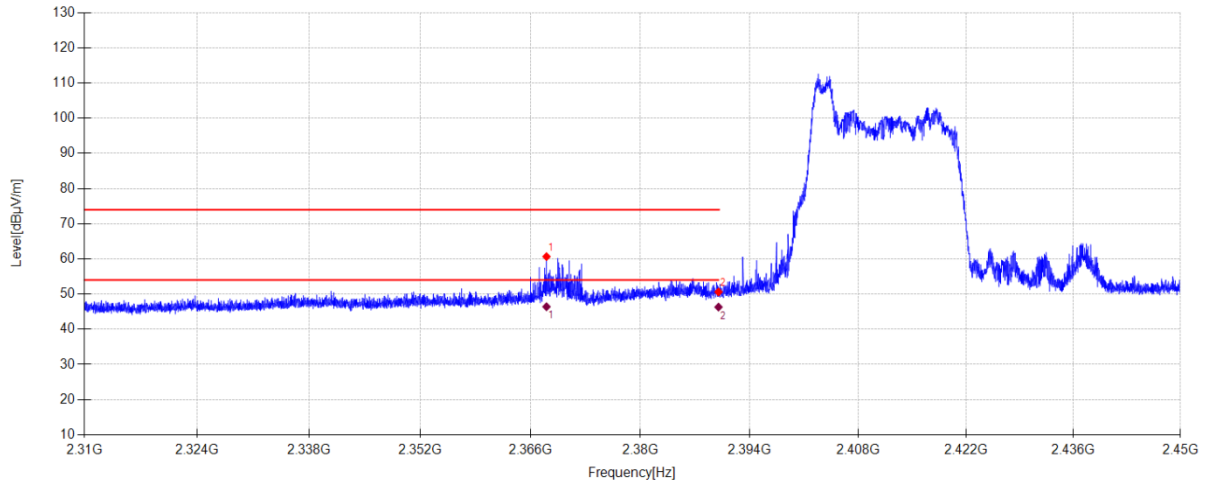

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2368.030	60.72	28.14	-28.20	60.66	74.00	13.34	PK	Vertical
2	2390.000	50.55	28.18	-28.12	50.61	74.00	23.39	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2368.030	46.47	28.14	-28.20	46.41	54.00	7.59	AV	Vertical
2	2390.000	46.25	28.18	-28.12	46.31	54.00	7.69	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX RU8 11AX20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G RU\8
Memo: Sample Number: S26072123-002

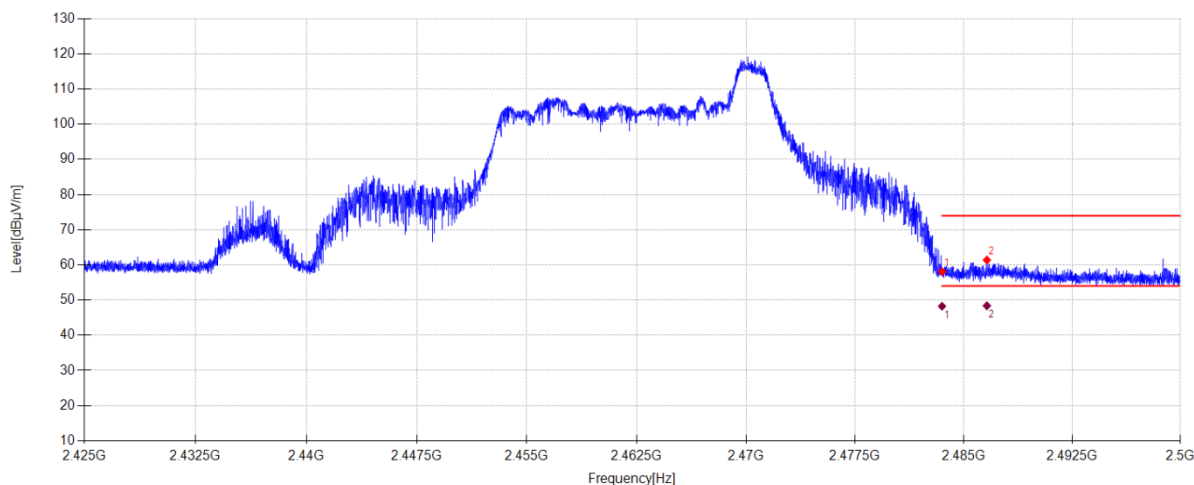

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	57.46	28.60	-27.99	58.07	74.00	15.93	PK	Horizontal
2	2486.598	60.75	28.62	-27.98	61.39	74.00	12.61	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.497	47.63	28.60	-27.99	48.24	54.00	5.76	AV	Horizontal
2	2486.595	47.74	28.62	-27.98	48.38	54.00	5.62	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-29 **Tested By:** Cao Jie
Test Mode: MIMO TX RU8 11AX20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.7°C;Humi:54.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q20260720 COVE A1\FCC ABOVE 1G 2.4G RU\9
Memo: Sample Number: S26072123-002

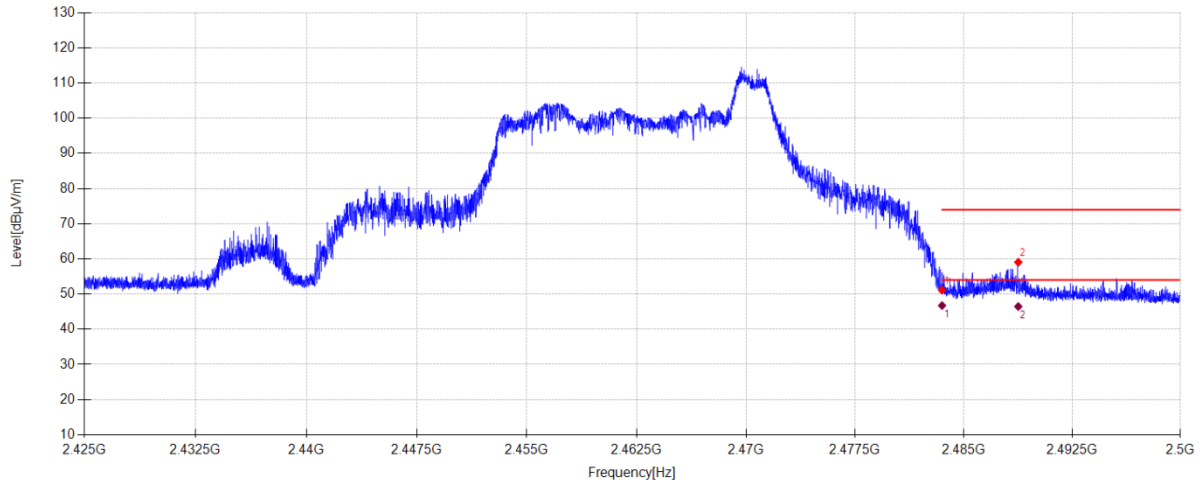

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	50.51	28.60	-27.99	51.12	74.00	22.88	PK	Vertical
2	2488.765	58.41	28.63	-27.98	59.06	74.00	14.94	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.13	28.60	-27.99	46.74	54.00	7.26	AV	Vertical
2	2488.765	45.81	28.63	-27.98	46.46	54.00	7.54	AV	Vertical

Note:


1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI 3	DDT-ZC00235	2027/06/10
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2027/06/14
Pulse Limiter	SCHWARZBECK	ESH3-Z2	DDT-ZC00539	2027/06/10
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2027/06/21
Conducted & Radiated Software	Audix	e3	DDT-ZC00562	/
Two-line V-shaped artificial network	ROHDE&SCHWARZ	ENV216	DDT-ZC05693	2026/11/04
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2027/06/09

14.2. Block diagram of test setup

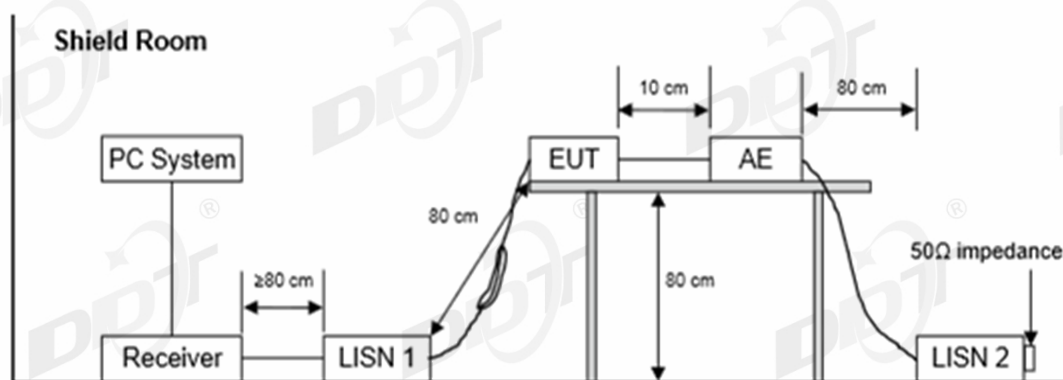

14.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means Peak detection; "----" means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.


14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
 Test Date : 2026-09-04
 Power Supply : AC 120V/60Hz
 Condition : TEMP:21.2°C, RH:51.4%
 Memo : Sample Number: S26072123-013

D:\2026 CE Report Data\Q26072123-2E\0904 CE\0904
 CE.EM6
 Tested By : Zhang Yibo
 Test Mode : Tx mode
 LISN : 2026 1# ENV 216/LINE

Data: 14

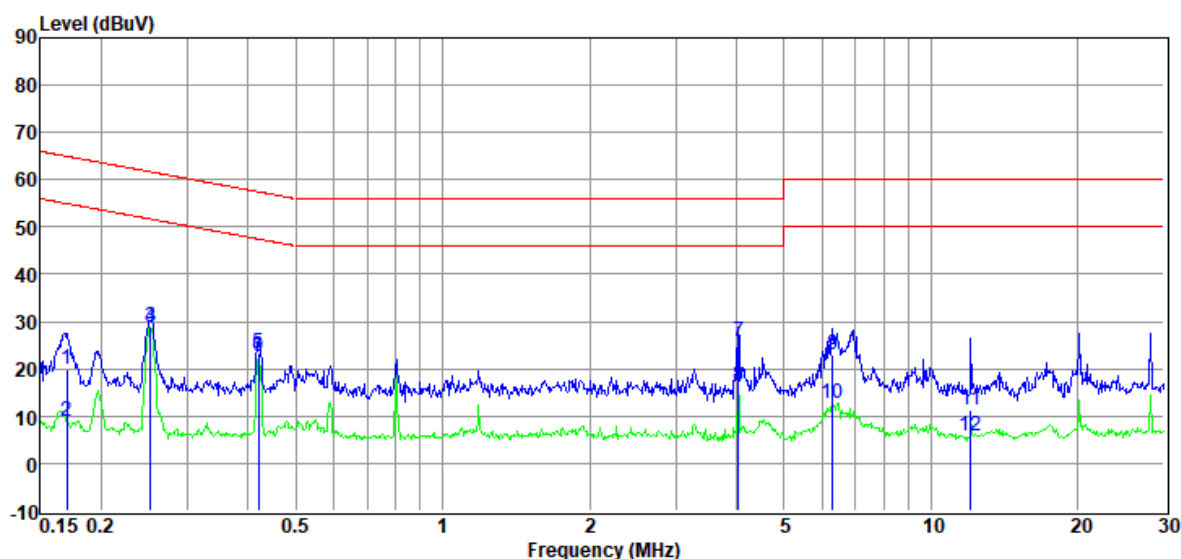

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	0.59	9.58	0.00	9.86	20.03	64.94	44.91	QP	LINE
2	0.17	-10.65	9.58	0.00	9.86	8.79	54.94	46.15	Average	LINE
3	0.25	9.41	9.57	0.00	9.87	28.85	61.69	32.84	QP	LINE
4	0.25	9.44	9.57	0.00	9.87	28.88	51.69	22.81	Average	LINE
5	0.42	3.73	9.57	0.00	9.87	23.17	57.46	34.29	QP	LINE
6	0.42	3.36	9.57	0.00	9.87	22.80	47.46	24.66	Average	LINE
7	4.03	6.38	9.61	0.01	9.88	25.88	56.00	30.12	QP	LINE
8	4.03	-3.10	9.61	0.01	9.88	16.40	46.00	29.60	Average	LINE
9	6.29	3.40	9.63	0.03	9.88	22.94	60.00	37.06	QP	LINE
10	6.29	-6.98	9.63	0.03	9.88	12.56	50.00	37.44	Average	LINE
11	12.06	-8.44	9.78	0.07	9.91	11.32	60.00	48.68	QP	LINE
12	12.06	-13.91	9.78	0.07	9.91	5.85	50.00	44.15	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2026-09-04
Power Supply : AC 120V/60Hz
Condition : TEMP:21.2°C, RH:51.4%
Memo : Sample Number: S26072123-013

D:\2026 CE Report Data\Q26072123-2E\0904 CE\0904
CE.EM6
Tested By : Zhang Yibo
Test Mode : Tx mode
LISN : 2026 1# ENV 216/NEUTRAL

Data: 16

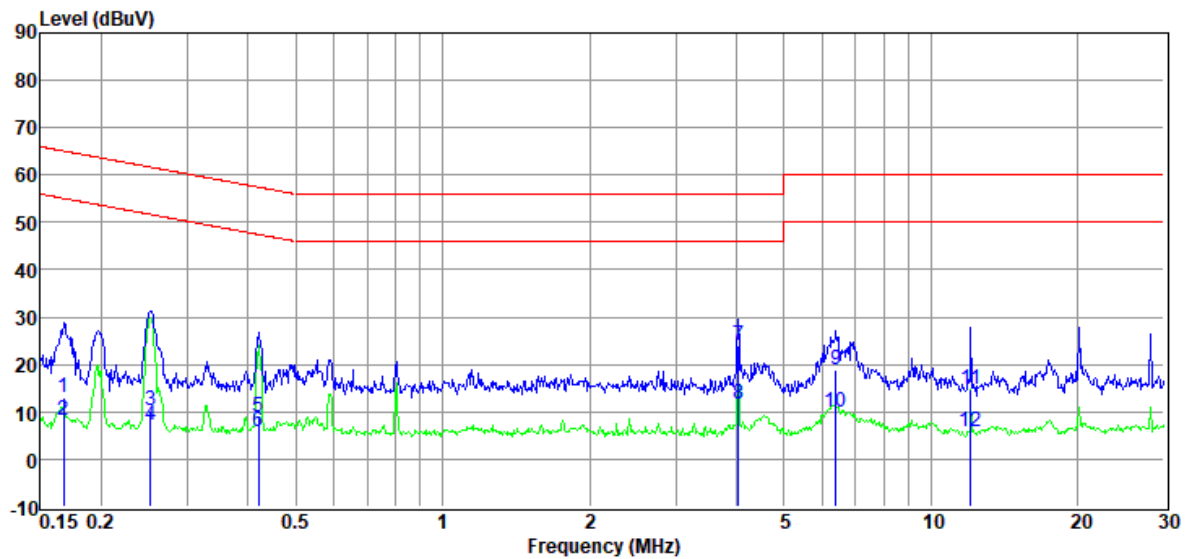

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.17	-6.47	9.60	0.00	9.86	12.99	65.08	52.09	QP	NEUTRAL
2	0.17	-11.20	9.60	0.00	9.86	8.26	55.08	46.82	Average	NEUTRAL
3	0.25	-9.29	9.60	0.00	9.87	10.18	61.69	51.51	QP	NEUTRAL
4	0.25	-12.41	9.60	0.00	9.87	7.06	51.69	44.63	Average	NEUTRAL
5	0.42	-10.60	9.58	0.00	9.87	8.85	57.46	48.61	QP	NEUTRAL
6	0.42	-13.71	9.58	0.00	9.87	5.74	47.46	41.72	Average	NEUTRAL
7	4.03	4.31	9.65	0.01	9.88	23.85	56.00	32.15	QP	NEUTRAL
8	4.03	-7.75	9.65	0.01	9.88	11.79	46.00	34.21	Average	NEUTRAL
9	6.39	-0.84	9.68	0.03	9.88	18.75	60.00	41.25	QP	NEUTRAL
10	6.39	-9.73	9.68	0.03	9.88	9.86	50.00	40.14	Average	NEUTRAL
11	12.06	-5.17	9.84	0.07	9.91	14.65	60.00	45.35	QP	NEUTRAL
12	12.06	-14.14	9.84	0.07	9.91	5.68	50.00	44.32	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q26072123-1E appendix I

-----End Report-----