

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-13Tested By:Cao Jie

Test Mode:MIMO TX 11AC20 5320MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:23.6°C;Humi:55.1%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\60

Memo:Sample Number: S26030303-004

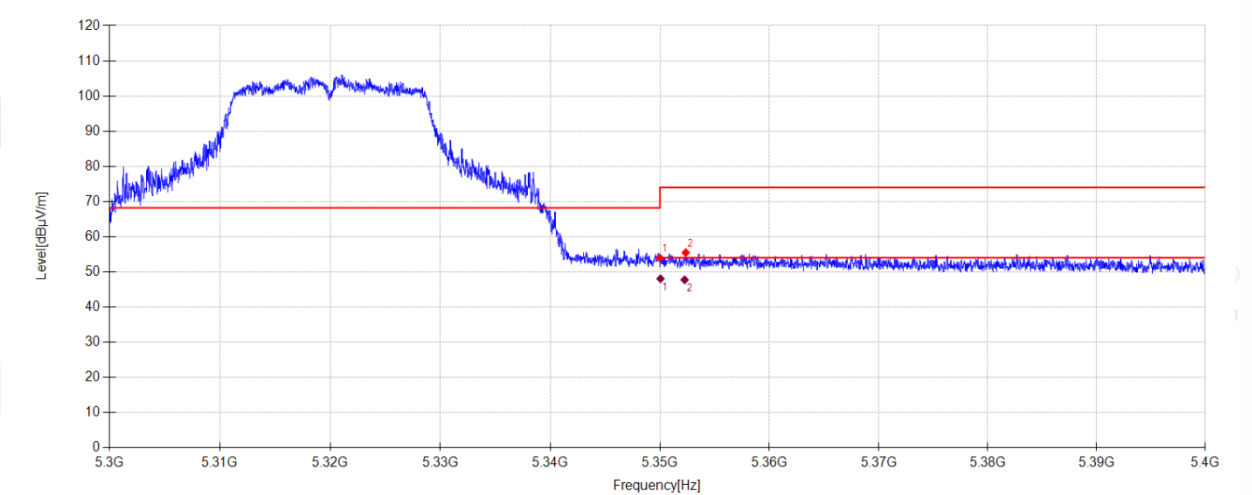

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	46.05	32.50	5.14	-29.73	53.96	68.20	14.24	PK	Vertical
2	5352.360	47.56	32.52	5.14	-29.73	55.49	74.00	18.51	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.054	40.14	32.50	5.14	48.05	54.00	5.95	AV	Vertical	
2	5352.257	39.81	32.52	5.14	47.74	54.00	6.26	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\61

Memo:

Sample Number: S26030303-004

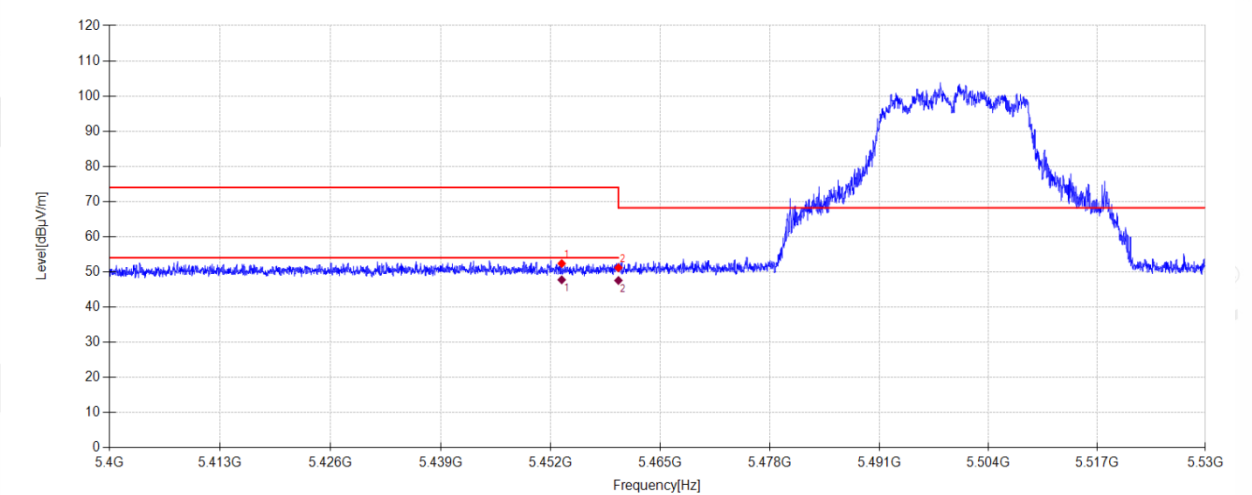

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.287	44.07	32.83	5.19	-29.71	52.38	74.00	21.62	PK	Horizontal
2	5460.000	42.80	32.90	5.19	-29.71	51.18	68.20	17.02	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5453.287	39.44	32.83	5.19	47.75	54.00	6.25	AV	Horizontal	
2	5460.000	39.18	32.90	5.19	47.56	54.00	6.44	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-13Tested By:Cao Jie

Test Mode:MIMO TX 11AC20 5500MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:23.6°C;Humi:55.1%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\62

Memo:Sample Number: S26030303-004

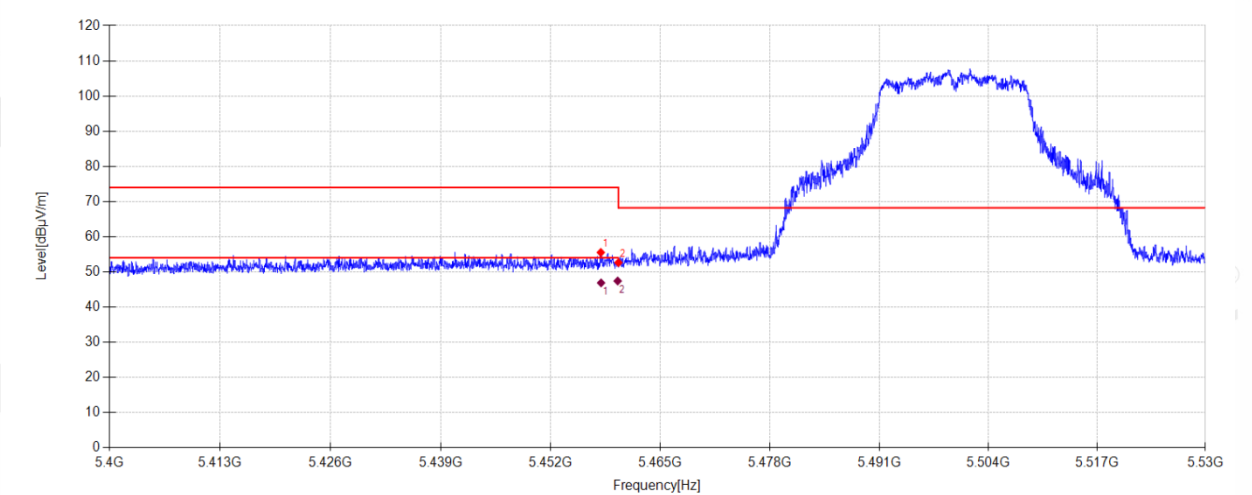

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.915	47.17	32.88	5.19	-29.71	55.53	74.00	18.47	PK	Vertical
2	5460.000	44.25	32.90	5.19	-29.71	52.63	68.20	15.57	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.946	38.52	32.88	5.19	46.88	54.00	7.12	AV	Vertical	
2	5459.911	39.03	32.90	5.19	47.41	54.00	6.59	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\63

Memo:

Sample Number: S26030303-004

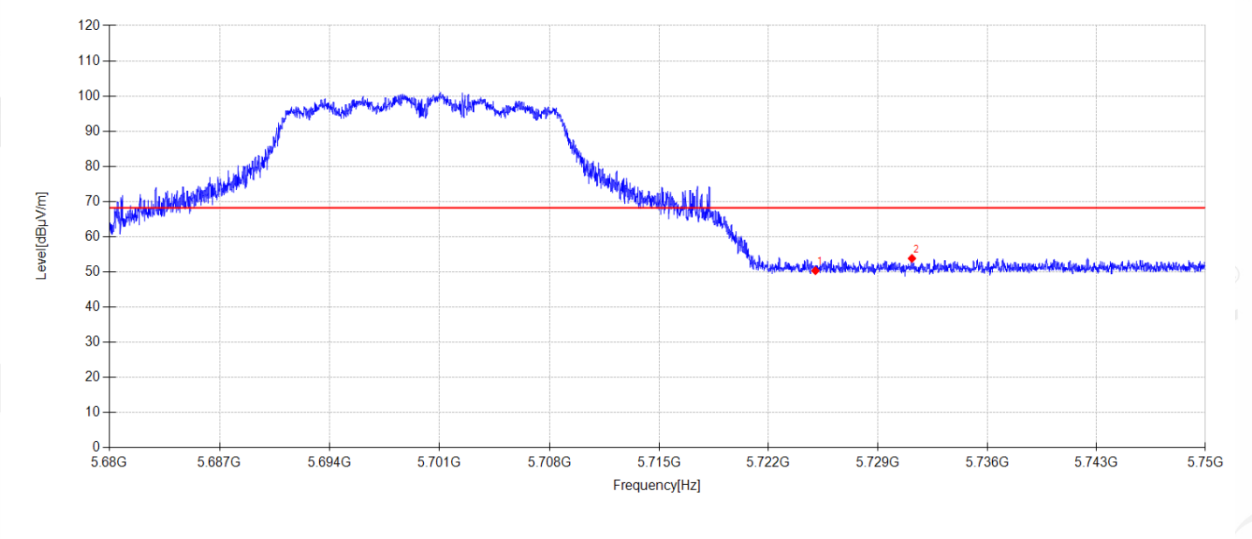

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.22	33.45	5.32	-29.65	50.34	68.20	17.86	PK	Horizontal
2	5731.177	44.61	33.54	5.33	-29.65	53.83	68.20	14.37	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\64

Memo:

Sample Number: S26030303-004

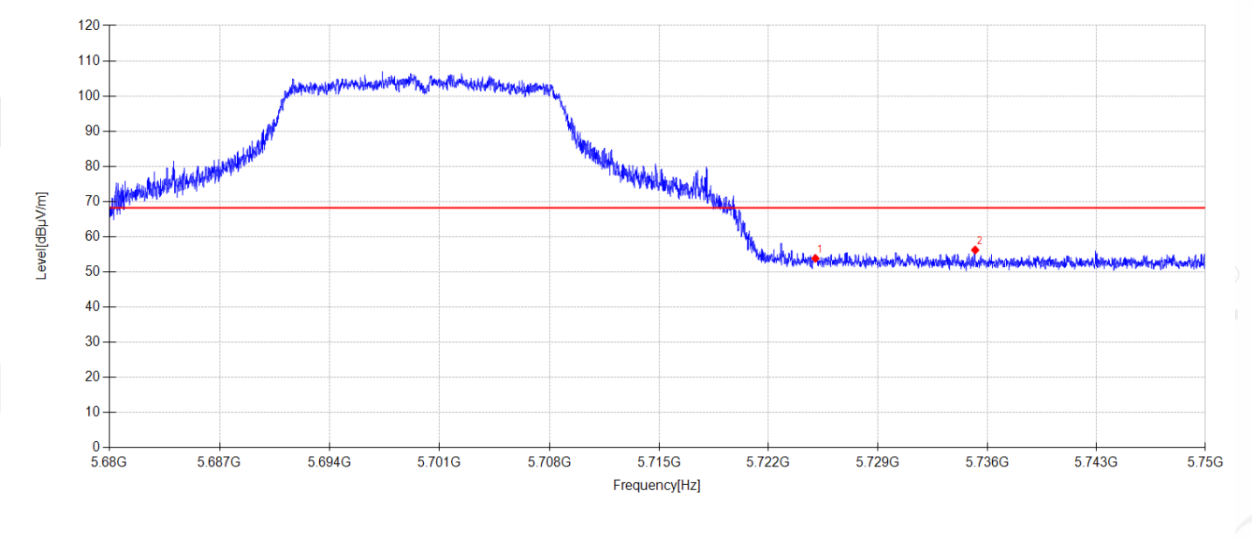

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.70	33.45	5.32	-29.65	53.82	68.20	14.38	PK	Vertical
2	5735.230	46.95	33.59	5.33	-29.65	56.22	68.20	11.98	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\65

Memo:

Sample Number: S26030303-004

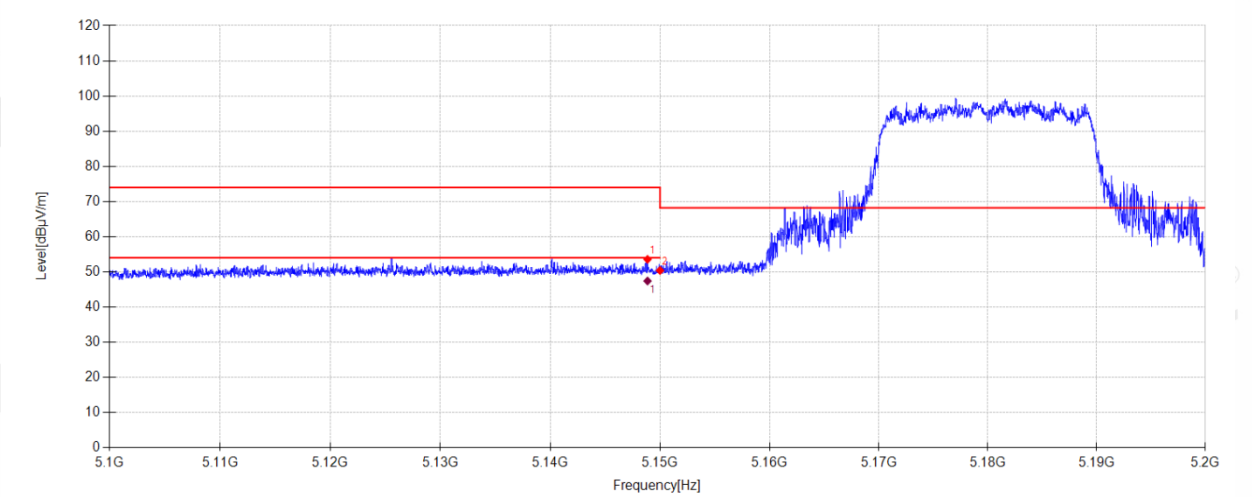

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.860	45.42	32.89	5.03	-29.77	53.57	74.00	20.43	PK	Horizontal
2	5150.000	42.23	32.90	5.04	-29.77	50.40	68.20	17.80	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.860	39.27	32.89	5.03	47.42	54.00	6.58	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\66

Memo:

Sample Number: S26030303-004

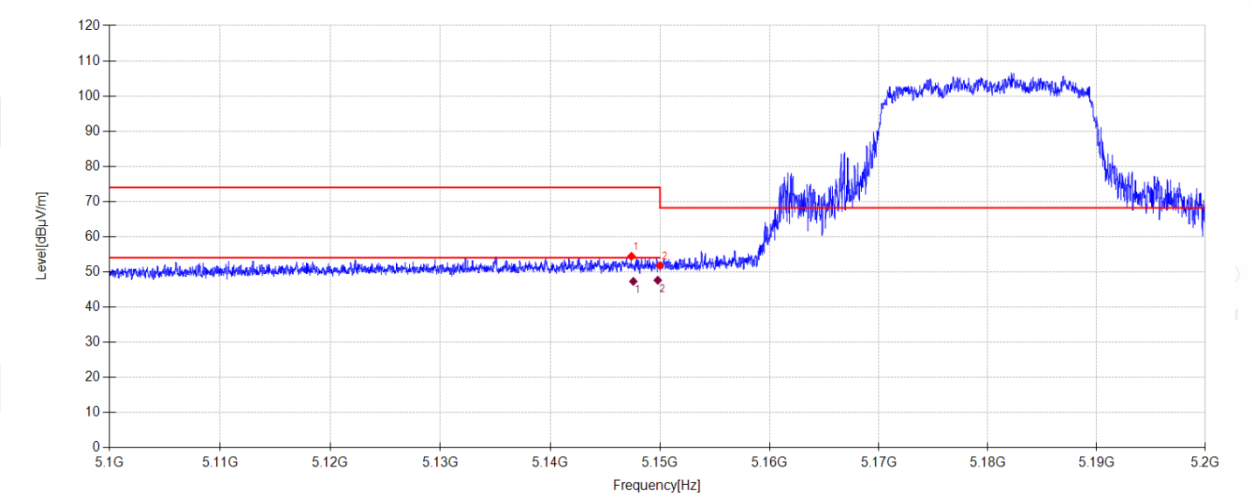

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.400	46.31	32.88	5.03	-29.77	54.45	74.00	19.55	PK	Vertical
2	5150.000	43.63	32.90	5.04	-29.77	51.80	68.20	16.40	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.566	39.16	32.88	5.03	47.30	54.00	6.70	AV	Vertical	
2	5149.797	39.46	32.90	5.04	47.63	54.00	6.37	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\67

Memo:

Sample Number: S26030303-004

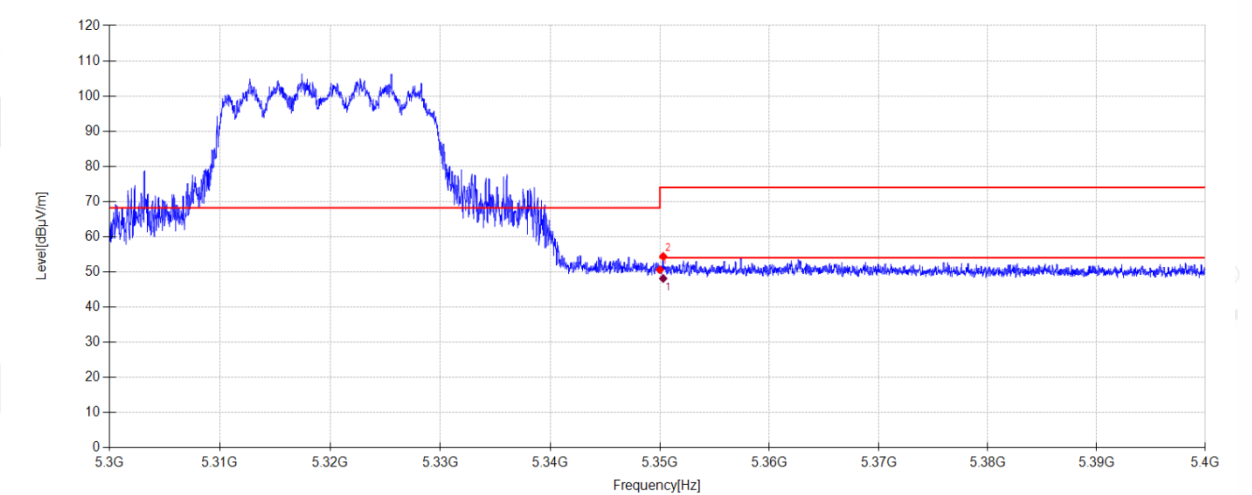

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.71	32.50	5.14	-29.73	50.62	68.20	17.58	PK	Horizontal
2	5350.300	46.50	32.50	5.14	-29.73	54.41	74.00	19.59	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.300	40.21	32.50	5.14	48.12	54.00	5.88	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-13Tested By:Cao Jie

Test Mode:MIMO TX 11AX20 5320MHz ModePower Supply:AC 120V/60Hz

Condition:Temp:23.6°C;Humi:55.1%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\68

Memo:Sample Number: S26030303-004

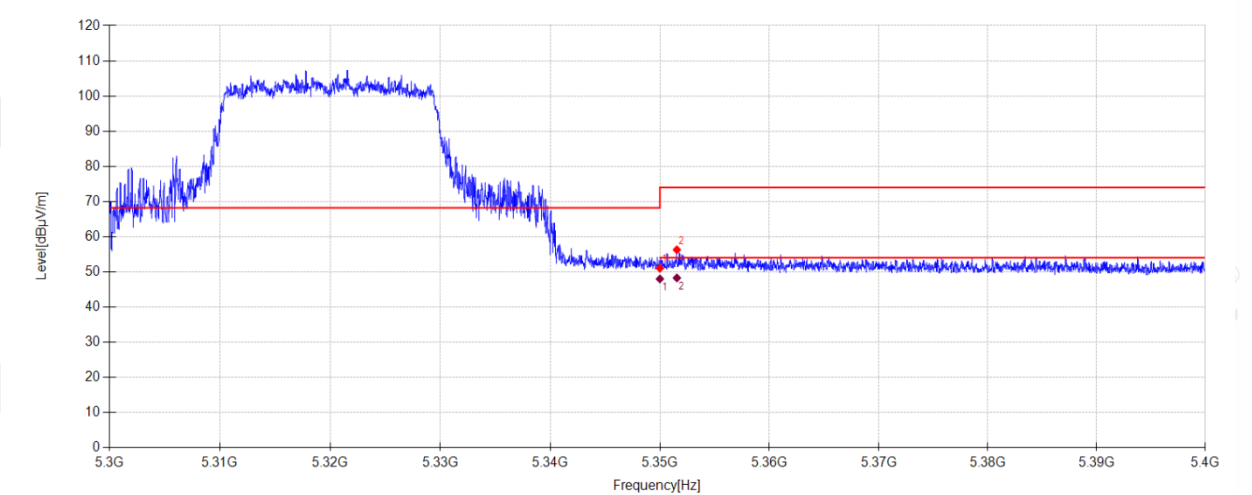

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.14	32.50	5.14	-29.73	51.05	68.20	17.15	PK	Vertical
2	5351.550	48.37	32.51	5.14	-29.73	56.29	74.00	17.71	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	40.09	32.50	5.14	48.00	54.00	6.00	AV	Vertical	
2	5351.550	40.36	32.51	5.14	48.28	54.00	5.72	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\69

Memo:

Sample Number: S26030303-004

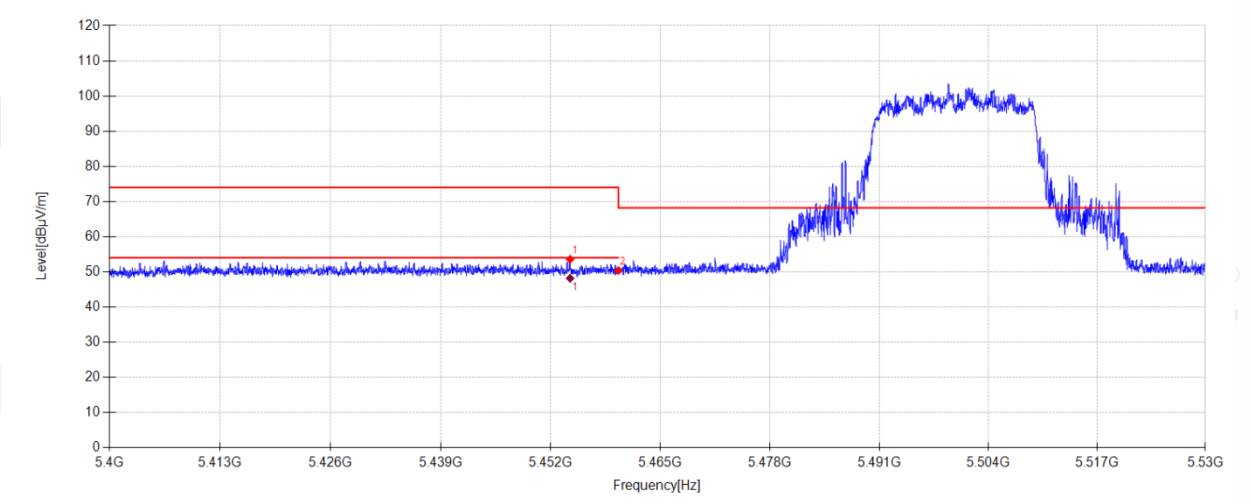

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.275	45.26	32.84	5.19	-29.71	53.58	74.00	20.42	PK	Horizontal
2	5460.000	42.01	32.90	5.19	-29.71	50.39	68.20	17.81	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5454.275	39.86	32.84	5.19	48.18	54.00	5.82	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\70

Memo:

Sample Number: S26030303-004

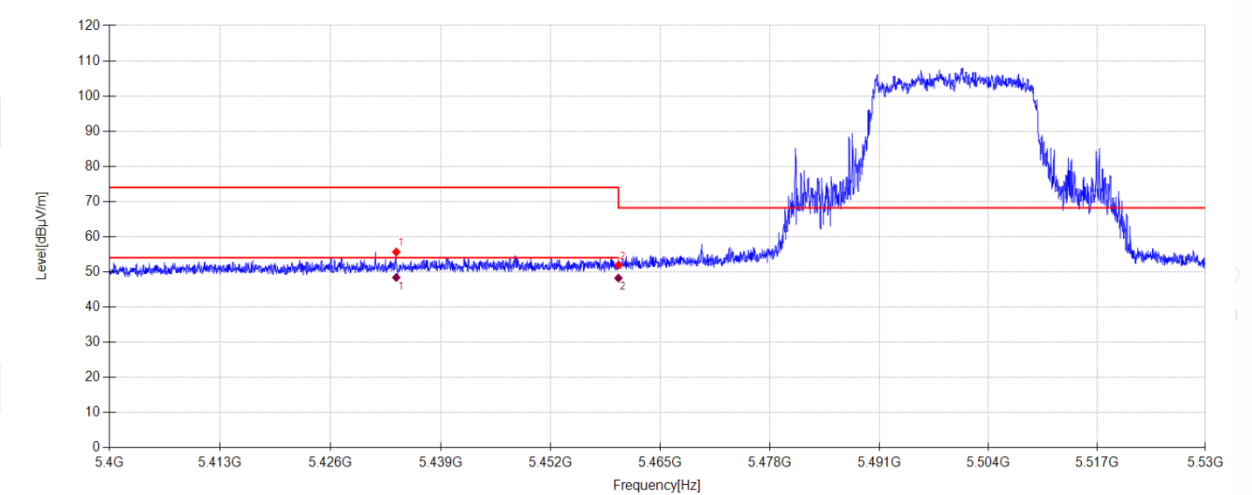

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5433.735	47.35	32.83	5.18	-29.71	55.65	74.00	18.35	PK	Vertical
2	5460.000	43.53	32.90	5.19	-29.71	51.91	68.20	16.29	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5433.735	40.11	32.83	5.18	48.41	54.00	5.59	AV	Vertical	
2	5460.000	39.85	32.90	5.19	48.23	54.00	5.77	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\71

Memo:

Sample Number: S26030303-004

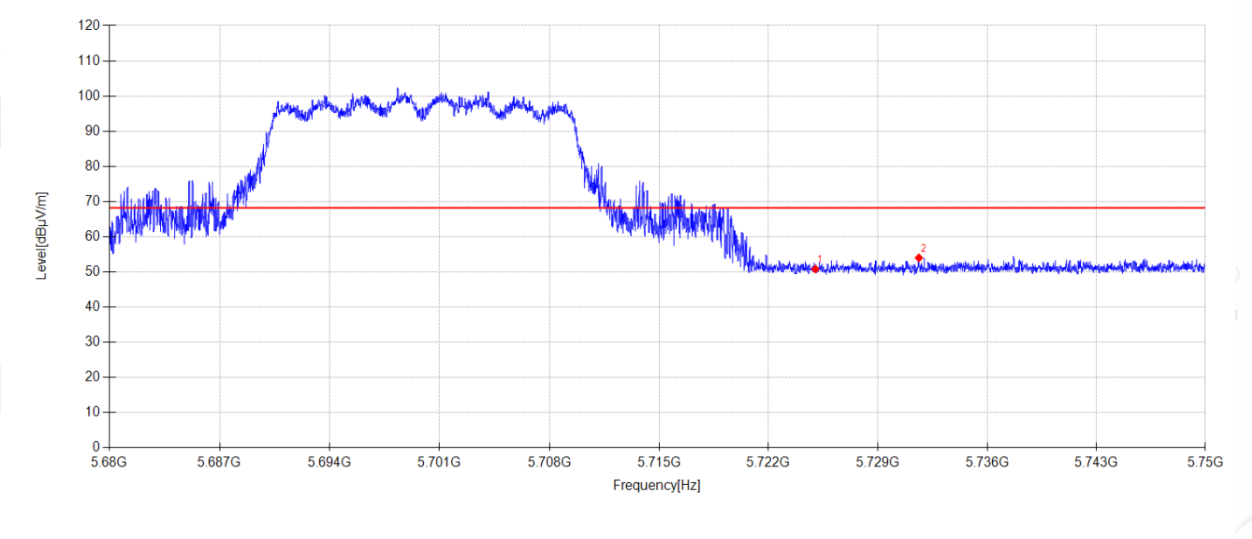

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.69	33.45	5.32	-29.65	50.81	68.20	17.39	PK	Horizontal
2	5731.625	44.77	33.54	5.33	-29.65	53.99	68.20	14.21	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\72

Memo:

Sample Number: S26030303-004

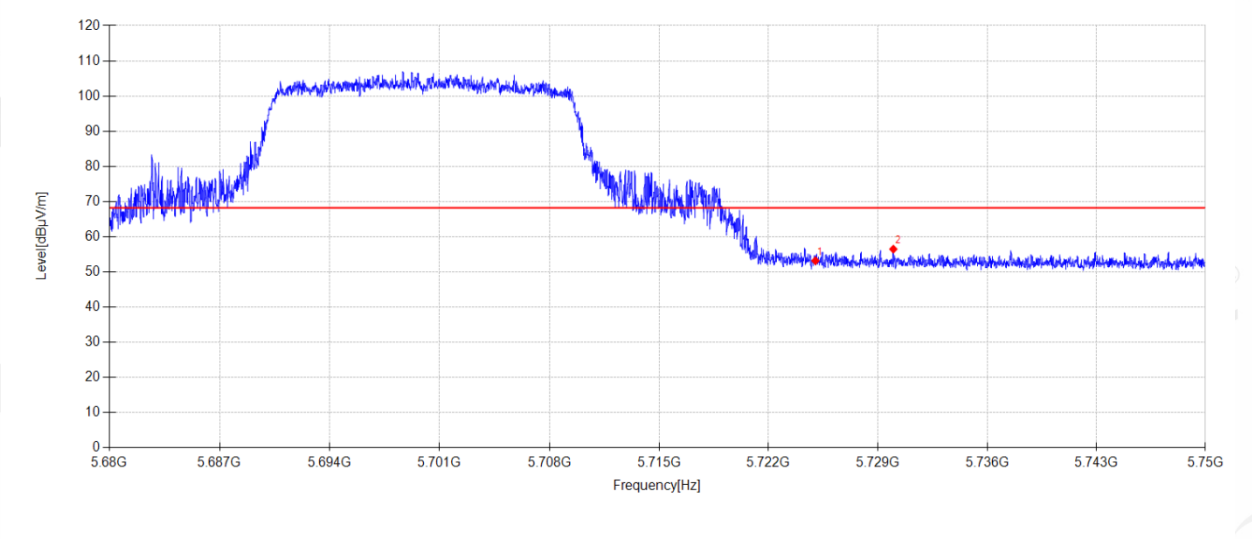

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.05	33.45	5.32	-29.65	53.17	68.20	15.03	PK	Vertical
2	5729.987	47.29	33.52	5.32	-29.65	56.48	68.20	11.72	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\77

Memo:

Sample Number: S26030303-004

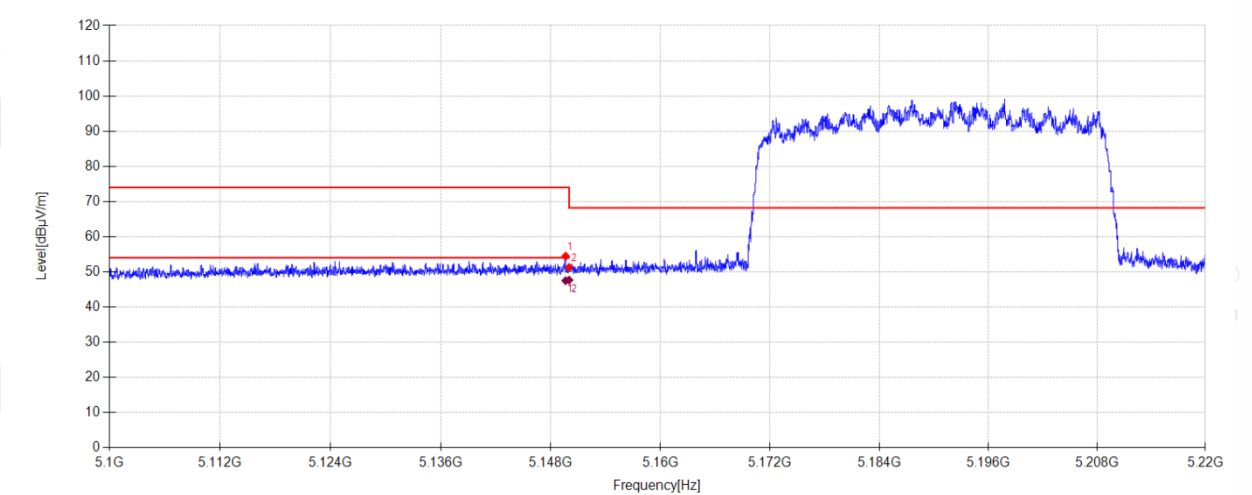

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.620	46.32	32.90	5.03	-29.77	54.48	74.00	19.52	PK	Horizontal
2	5150.000	43.10	32.90	5.04	-29.77	51.27	68.20	16.93	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5149.620	39.35	32.90	5.03	47.51	54.00	6.49	AV	Horizontal	
2	5150.000	39.50	32.90	5.04	47.67	54.00	6.33	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\78

Memo:

Sample Number: S26030303-004

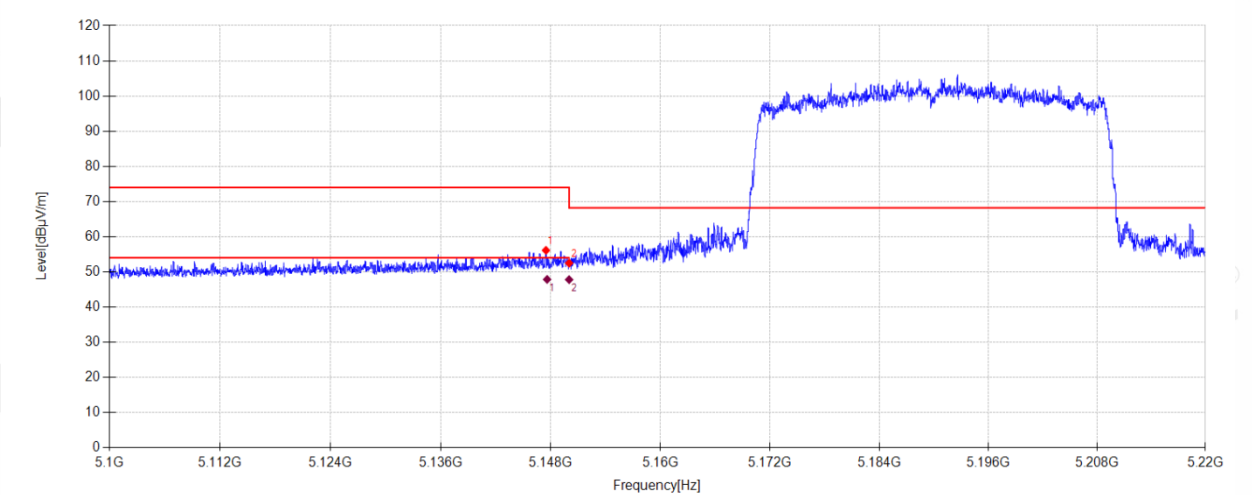

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.472	47.99	32.88	5.03	-29.77	56.13	74.00	17.87	PK	Vertical
2	5150.000	44.33	32.90	5.04	-29.77	52.50	68.20	15.70	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.596	39.73	32.88	5.03	47.87	54.00	6.13	AV	Vertical	
2	5150.000	39.63	32.90	5.04	47.80	54.00	6.20	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\81

Memo:

Sample Number: S26030303-004

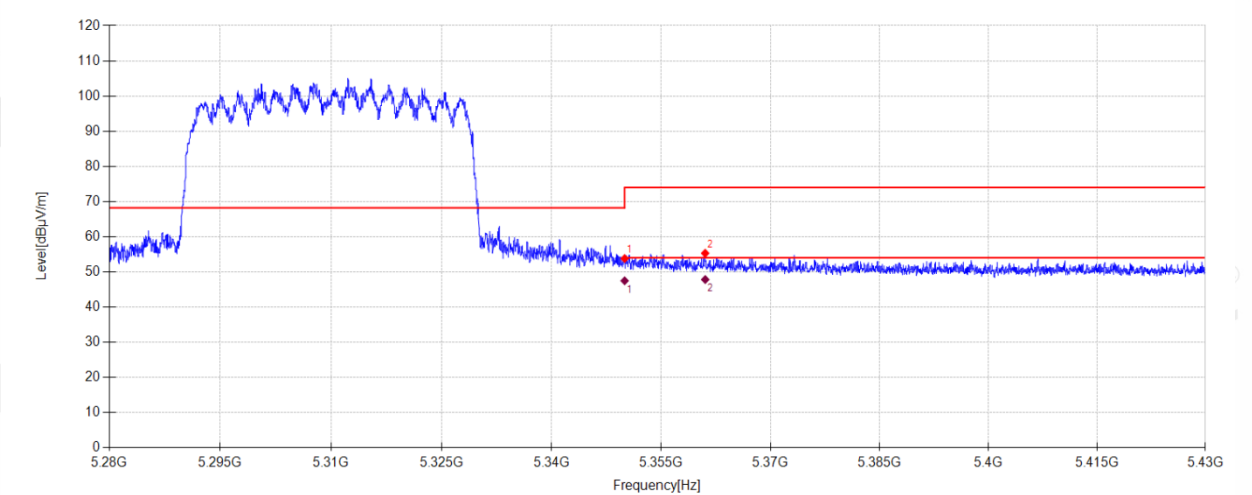

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.88	32.50	5.14	-29.73	53.79	68.20	14.41	PK	Horizontal
2	5361.030	47.30	32.59	5.14	-29.73	55.30	74.00	18.70	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.57	32.50	5.14	47.48	54.00	6.52	AV	Horizontal	
2	5361.030	39.83	32.59	5.14	47.83	54.00	6.17	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbin

Test Mode:

MIMO TX 11AX40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\82

Memo:

Sample Number: S26030303-004

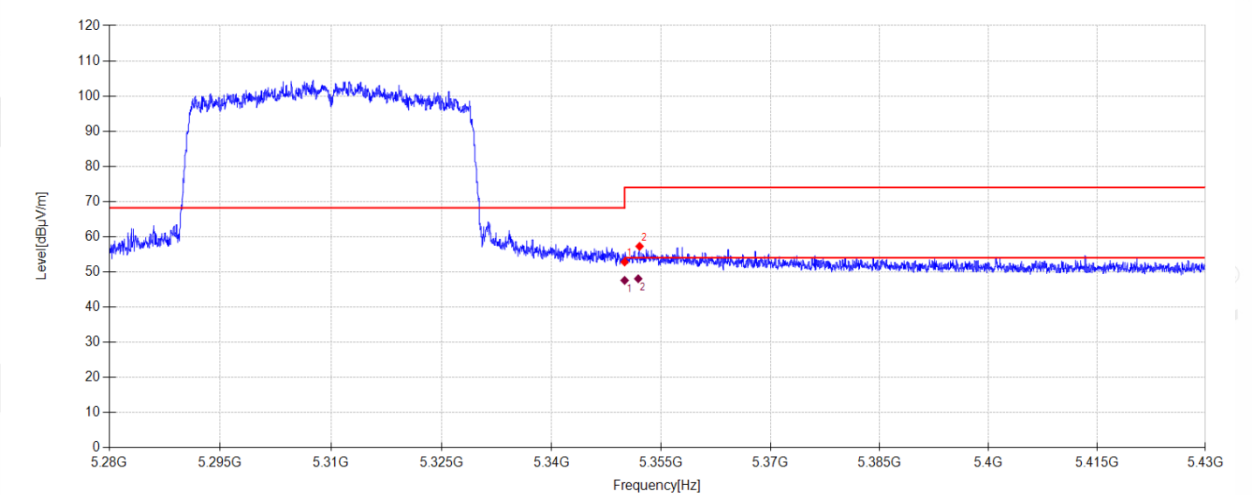

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.89	32.50	5.14	-29.73	52.80	68.20	15.40	PK	Vertical
2	5352.045	49.33	32.52	5.14	-29.73	57.26	74.00	16.74	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.67	32.50	5.14	47.58	54.00	6.42	AV	Vertical	
2	5351.860	40.12	32.52	5.14	48.05	54.00	5.95	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\83

Memo:

Sample Number: S26030303-004

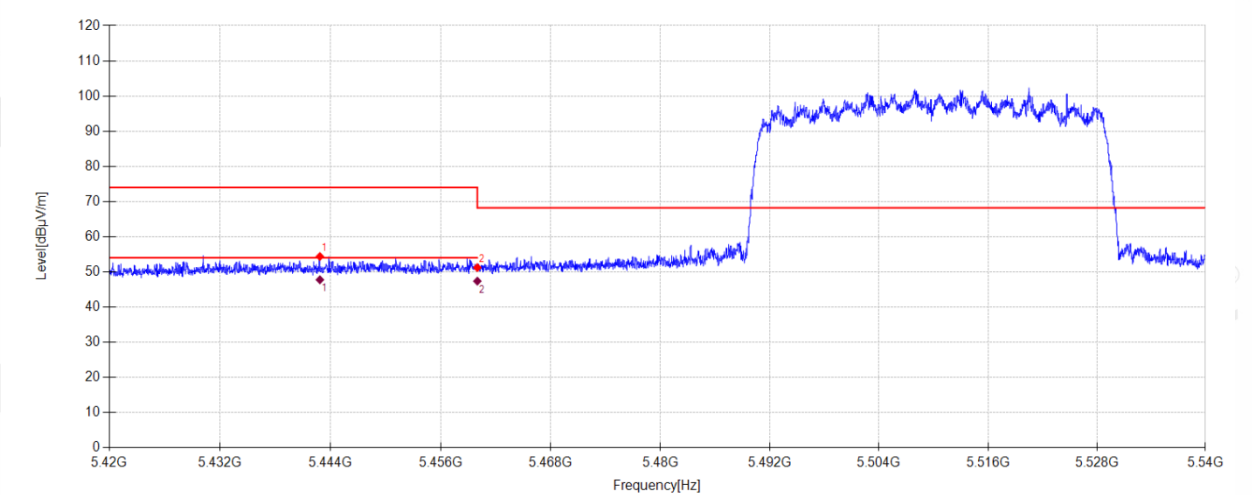

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5442.848	46.10	32.81	5.18	-29.71	54.38	74.00	19.62	PK	Horizontal
2	5460.000	42.84	32.90	5.19	-29.71	51.22	68.20	16.98	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5442.848	39.48	32.81	5.18	47.76	54.00	6.24	AV	Horizontal	
2	5460.000	39.00	32.90	5.19	47.38	54.00	6.62	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\84

Memo:

Sample Number: S26030303-004

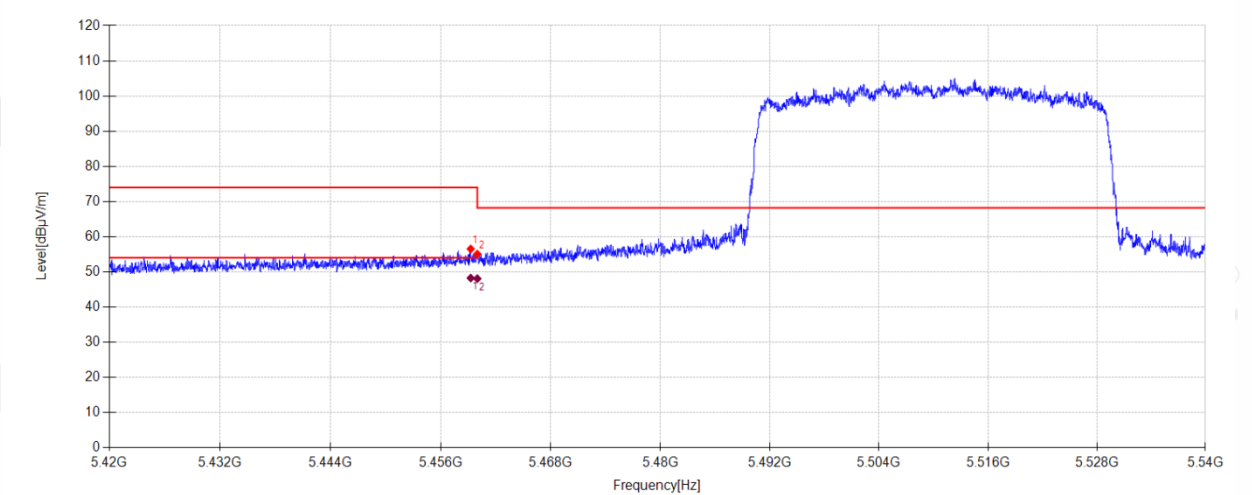

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5459.276	48.17	32.89	5.19	-29.71	56.54	74.00	17.46	PK	Vertical
2	5460.000	46.68	32.90	5.19	-29.71	55.06	68.20	13.14	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5459.276	39.89	32.89	5.19	48.26	54.00	5.74	AV	Vertical	
2	5460.000	39.71	32.90	5.19	48.09	54.00	5.91	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\85

Memo:

Sample Number: S26030303-004

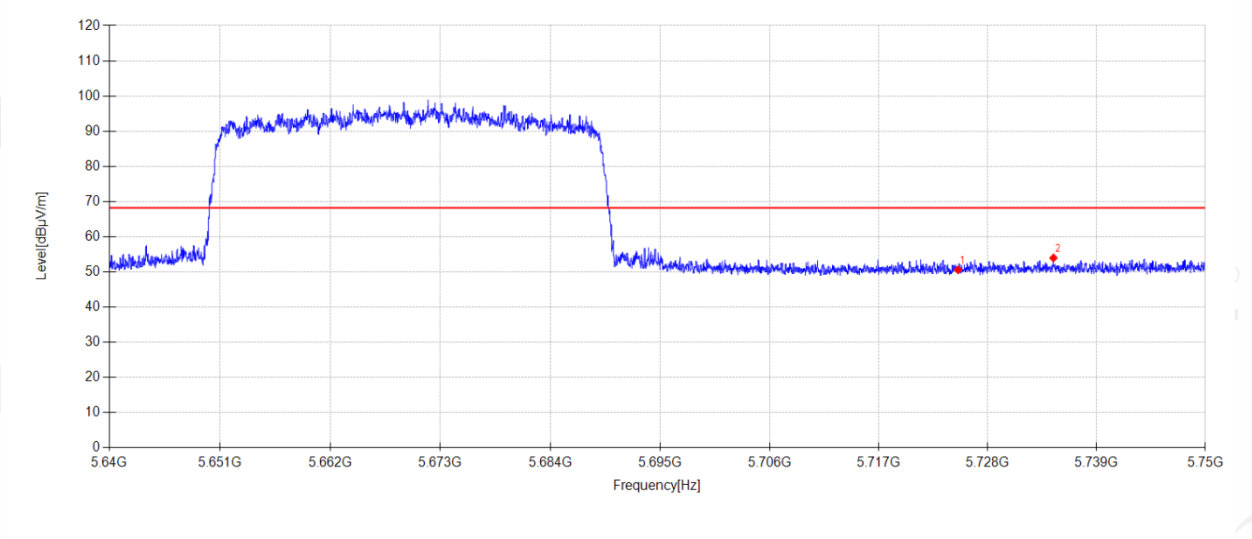

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.47	33.45	5.32	-29.65	50.59	68.20	17.61	PK	Horizontal
2	5734.633	44.71	33.58	5.33	-29.65	53.97	68.20	14.23	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\86

Memo:

Sample Number: S26030303-004

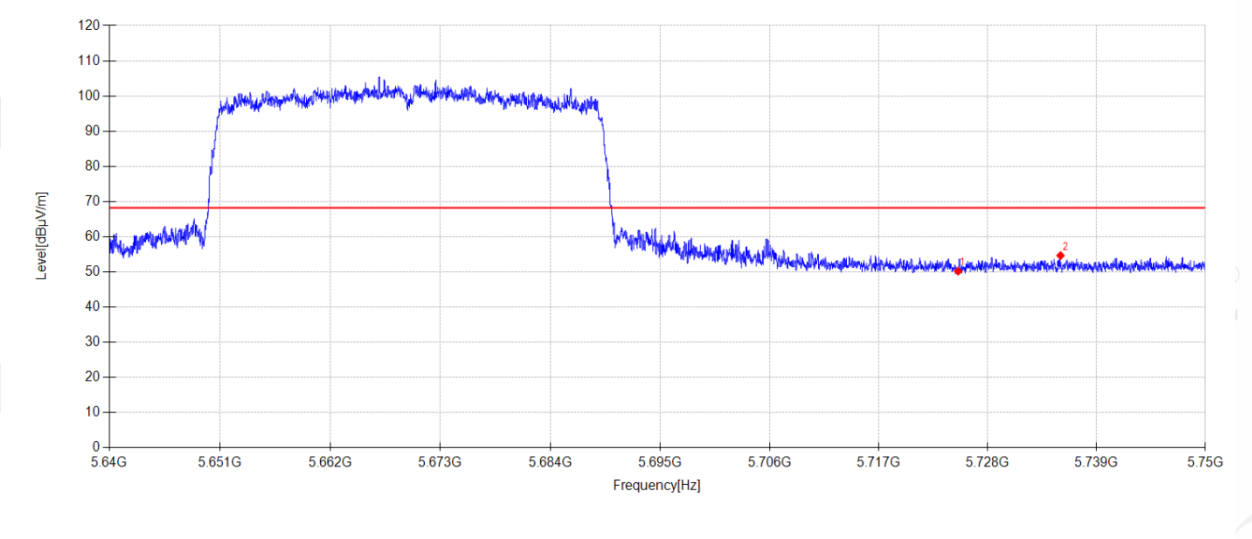

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.07	33.45	5.32	-29.65	50.19	68.20	18.01	PK	Vertical
2	5735.348	45.37	33.59	5.33	-29.65	54.64	68.20	13.56	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\87

Memo:

Sample Number: S26030303-004

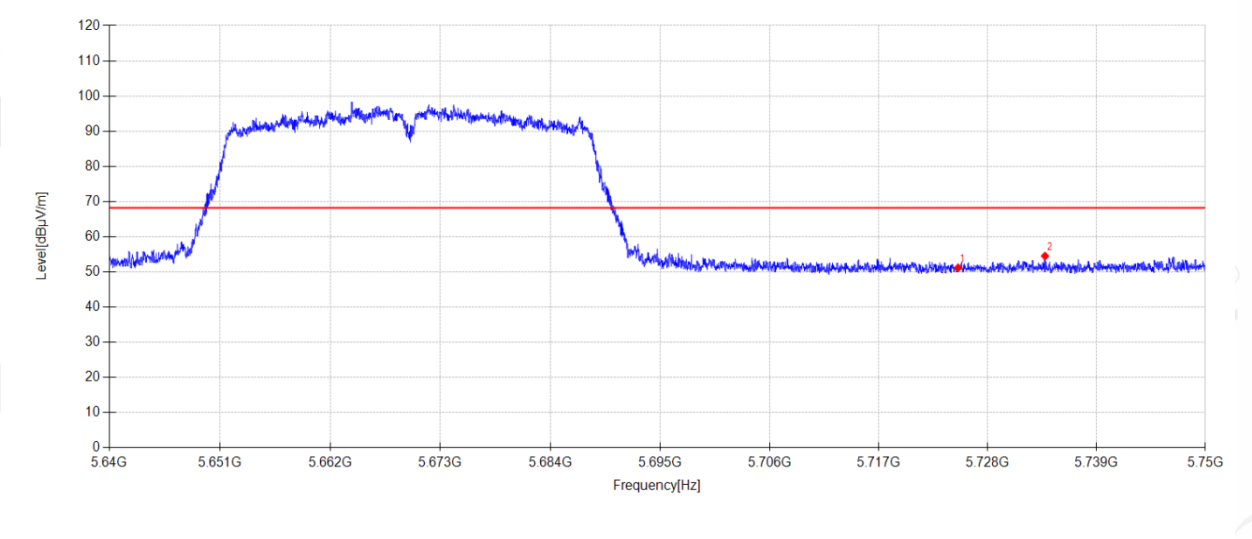

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.05	33.45	5.32	-29.65	51.17	68.20	17.03	PK	Horizontal
2	5733.775	45.26	33.57	5.33	-29.65	54.51	68.20	13.69	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\88

Memo:

Sample Number: S26030303-004

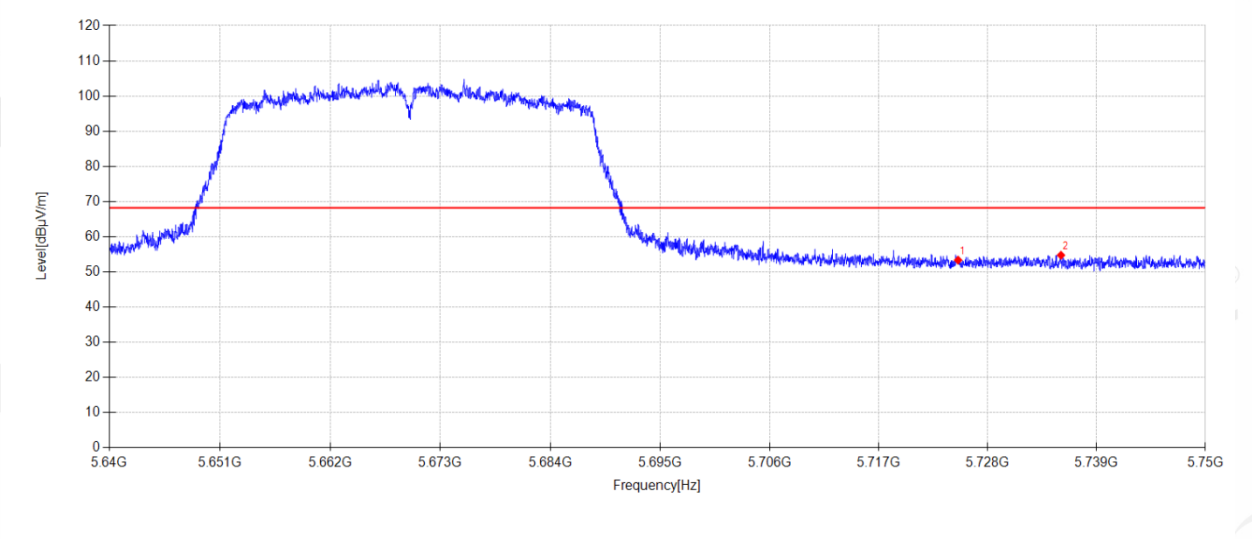

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.23	33.45	5.32	-29.65	53.35	68.20	14.85	PK	Vertical
2	5735.392	45.46	33.60	5.33	-29.65	54.74	68.20	13.46	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\89

Memo:

Sample Number: S26030303-004

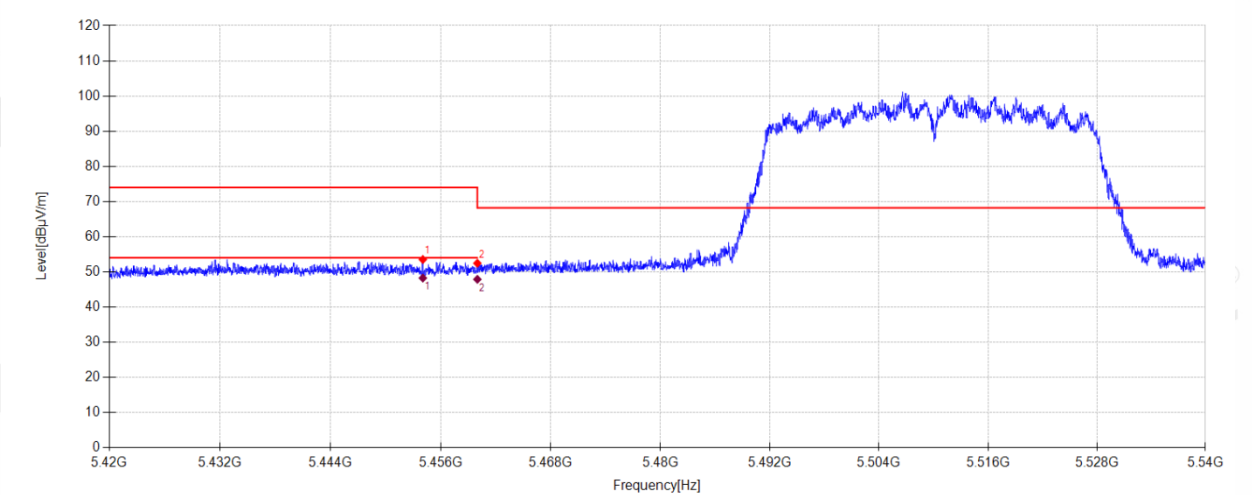

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.056	45.20	32.84	5.19	-29.71	53.52	74.00	20.48	PK	Horizontal
2	5460.000	44.07	32.90	5.19	-29.71	52.45	68.20	15.75	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5454.056	39.94	32.84	5.19	48.26	54.00	5.74	AV	Horizontal	
2	5460.000	39.51	32.90	5.19	47.89	54.00	6.11	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\90

Memo:

Sample Number: S26030303-004

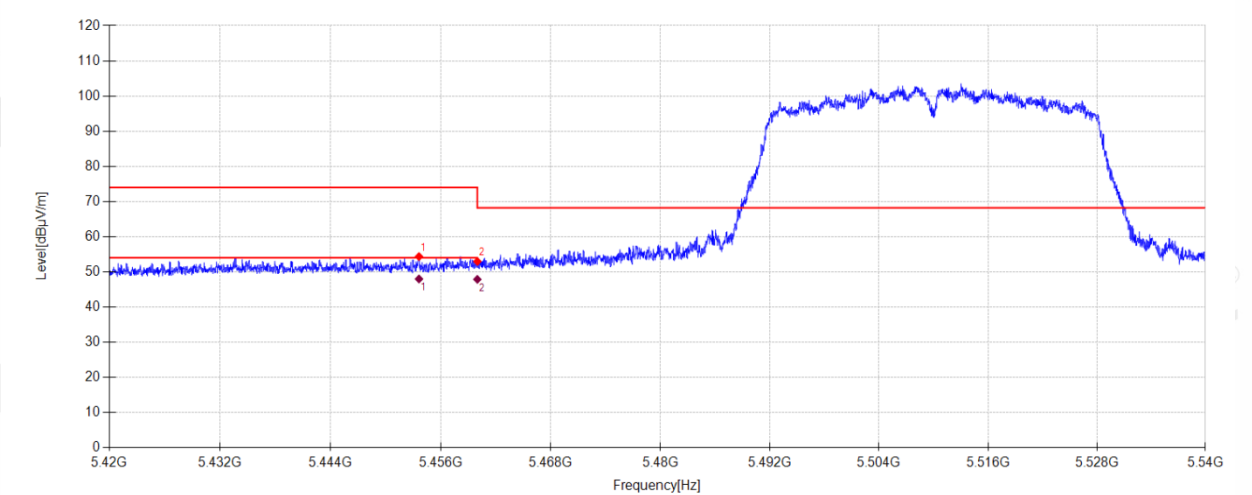

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.636	46.03	32.84	5.19	-29.71	54.35	74.00	19.65	PK	Vertical
2	5460.000	44.59	32.90	5.19	-29.71	52.97	68.20	15.23	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5453.636	39.68	32.84	5.19	48.00	54.00	6.00	AV	Vertical	
2	5460.000	39.50	32.90	5.19	47.88	54.00	6.12	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\92

Memo:

Sample Number: S26030303-004

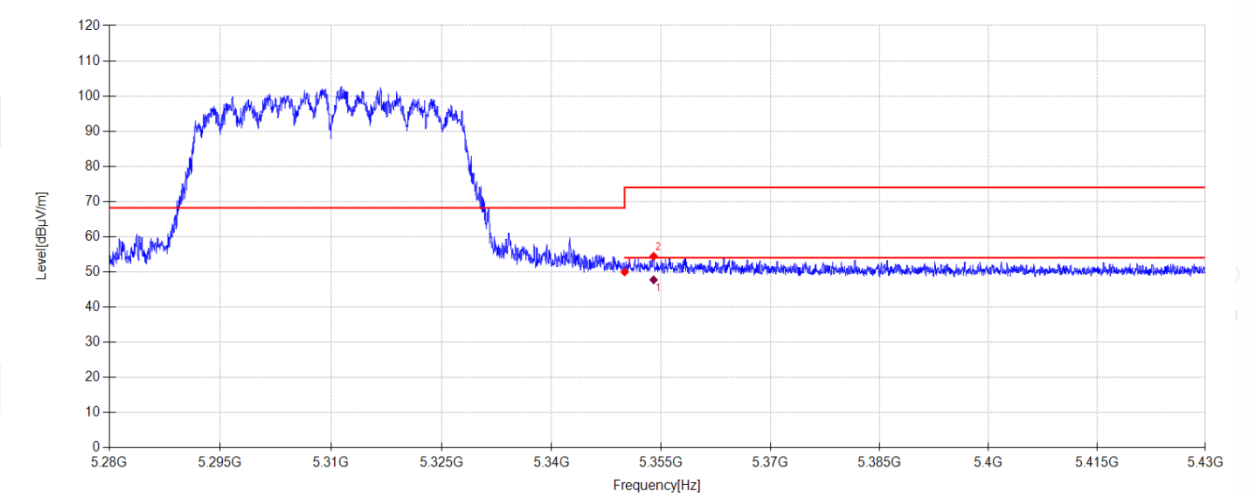

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.08	32.50	5.14	-29.73	49.99	68.20	18.21	PK	Horizontal
2	5353.965	46.51	32.53	5.14	-29.73	54.45	74.00	19.55	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5353.965	39.80	32.53	5.14	47.74	54.00	6.26	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\93

Memo:

Sample Number: S26030303-004

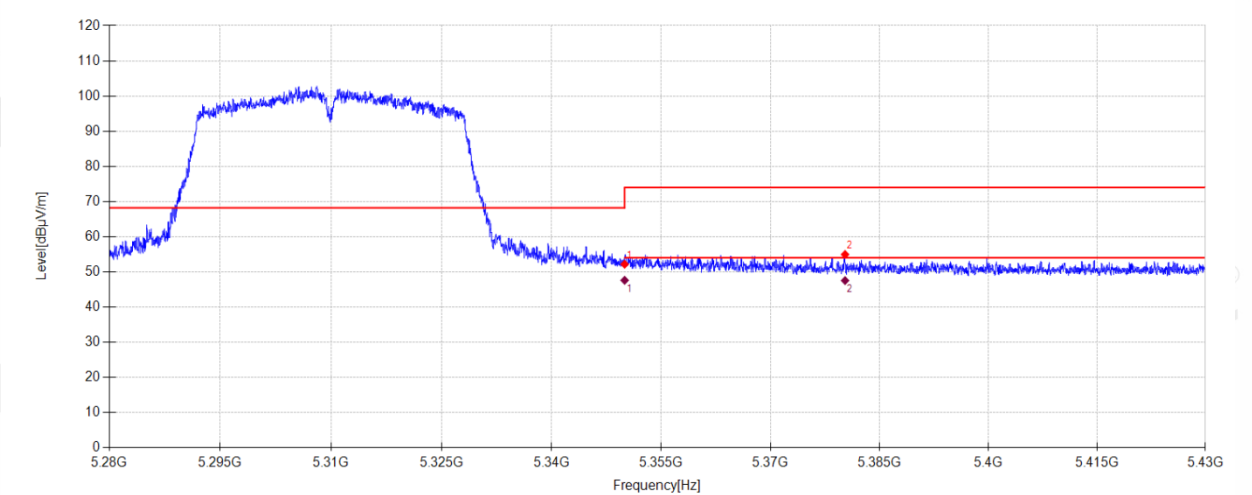

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.27	32.50	5.14	-29.73	52.18	68.20	16.02	PK	Vertical
2	5380.230	46.78	32.74	5.15	-29.72	54.95	74.00	19.05	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.71	32.50	5.14	47.62	54.00	6.38	AV	Vertical	
2	5380.230	39.37	32.74	5.15	47.54	54.00	6.46	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\94

Memo:

Sample Number: S26030303-004

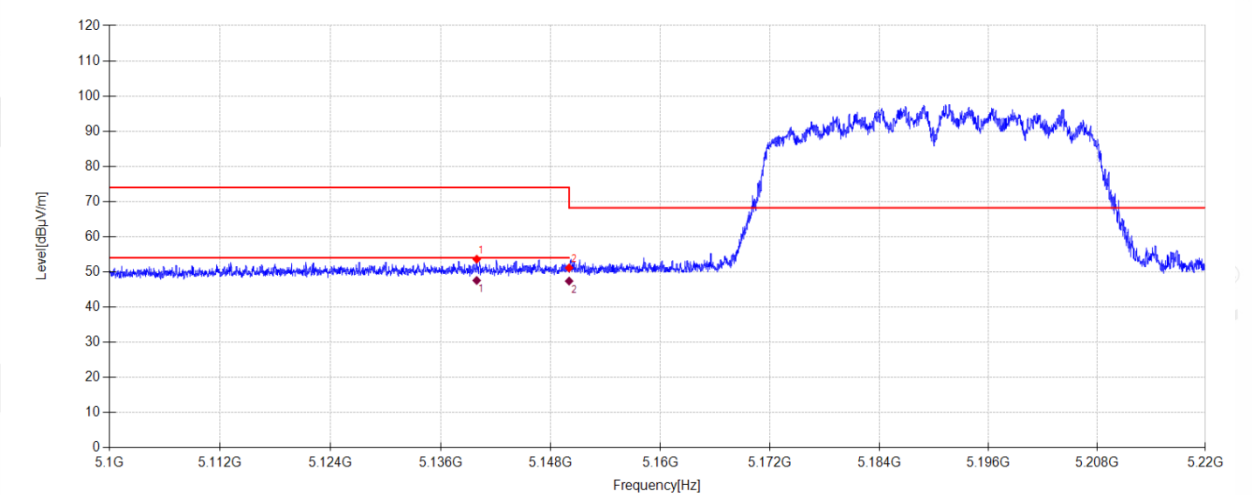

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5139.912	45.53	32.82	5.03	-29.77	53.61	74.00	20.39	PK	Horizontal
2	5150.000	42.97	32.90	5.04	-29.77	51.14	68.20	17.06	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5139.912	39.49	32.82	5.03	47.57	54.00	6.43	AV	Horizontal	
2	5150.000	39.22	32.90	5.04	47.39	54.00	6.61	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\95

Memo:

Sample Number: S26030303-004

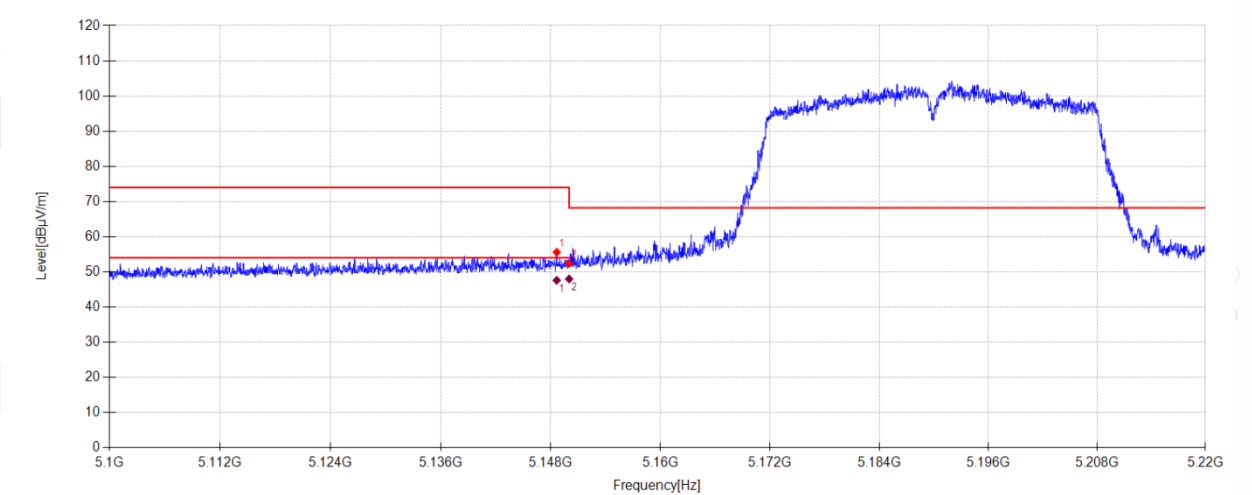

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.648	47.45	32.89	5.03	-29.77	55.60	74.00	18.40	PK	Vertical
2	5150.000	44.24	32.90	5.04	-29.77	52.41	68.20	15.79	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.648	39.46	32.89	5.03	47.61	54.00	6.39	AV	Vertical	
2	5150.000	39.82	32.90	5.04	47.99	54.00	6.01	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\96

Memo:

Sample Number: S26030303-004

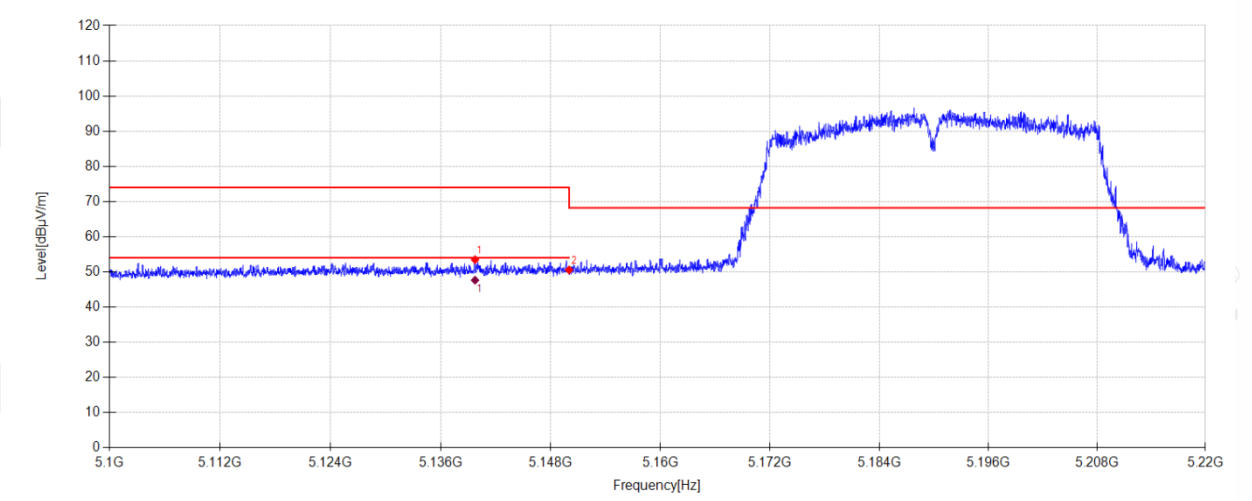

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5139.732	45.41	32.82	5.03	-29.77	53.49	74.00	20.51	PK	Horizontal
2	5150.000	42.39	32.90	5.04	-29.77	50.56	68.20	17.64	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5139.732	39.57	32.82	5.03	47.65	54.00	6.35	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\97

Memo:

Sample Number: S26030303-004

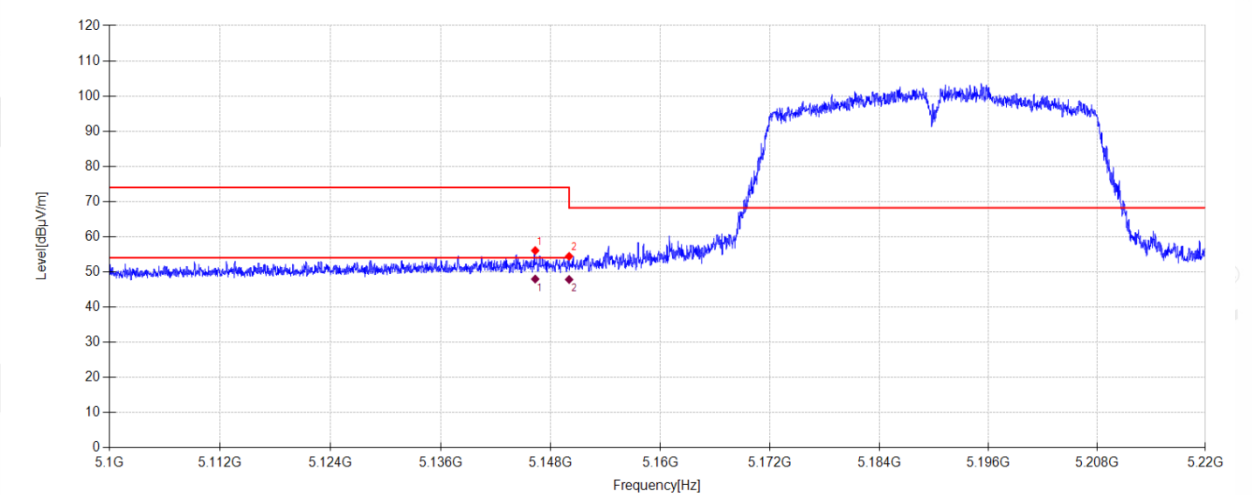

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.296	47.93	32.87	5.03	-29.77	56.06	74.00	17.94	PK	Vertical
2	5150.000	46.25	32.90	5.04	-29.77	54.42	68.20	13.78	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5146.296	39.84	32.87	5.03	47.97	54.00	6.03	AV	Vertical	
2	5150.000	39.67	32.90	5.04	47.84	54.00	6.16	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\98

Memo:

Sample Number: S26030303-004

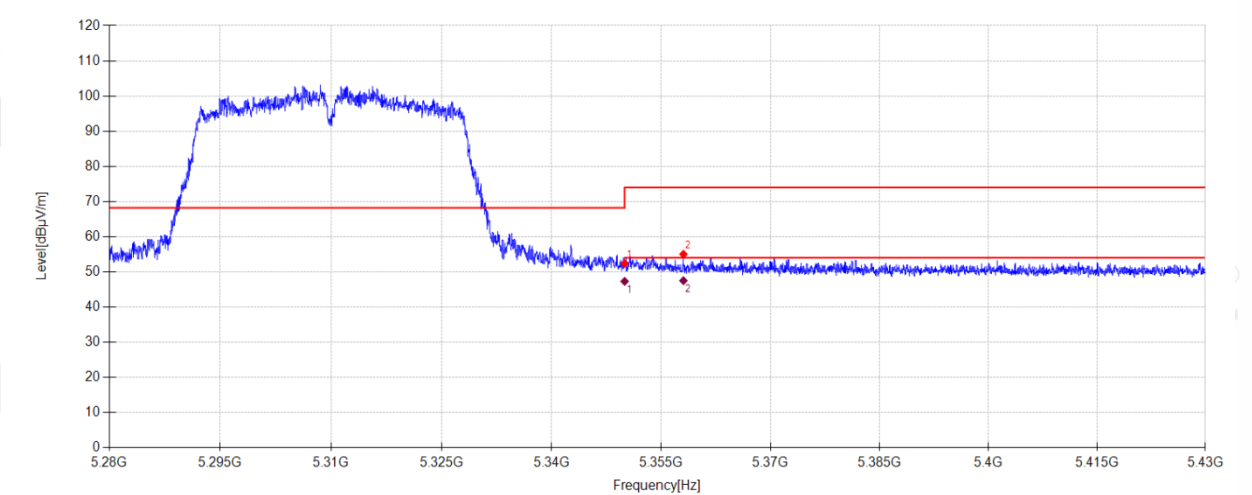

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.47	32.50	5.14	-29.73	52.38	68.20	15.82	PK	Horizontal
2	5358.045	47.07	32.56	5.14	-29.73	55.04	74.00	18.96	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.40	32.50	5.14	47.31	54.00	6.69	AV	Horizontal	
2	5358.045	39.54	32.56	5.14	47.51	54.00	6.49	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\99

Memo:

Sample Number: S26030303-004

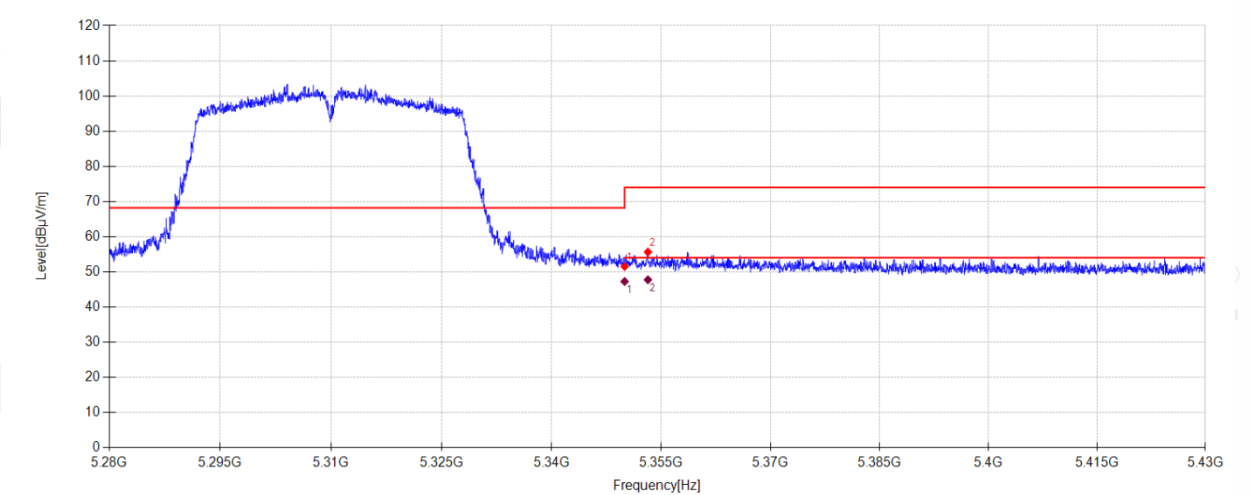

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.61	32.50	5.14	-29.73	51.52	68.20	16.68	PK	Vertical
2	5353.185	47.71	32.53	5.14	-29.73	55.65	74.00	18.35	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.37	32.50	5.14	47.28	54.00	6.72	AV	Vertical	
2	5353.185	39.82	32.53	5.14	47.76	54.00	6.24	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\100

Memo:

Sample Number: S26030303-004

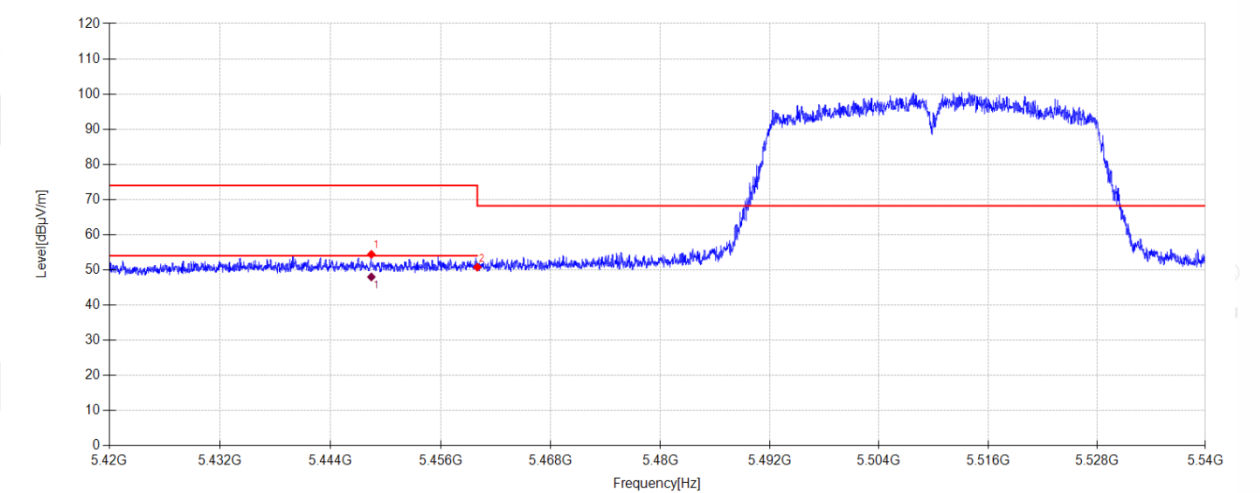

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.452	46.15	32.80	5.18	-29.71	54.42	74.00	19.58	PK	Horizontal
2	5460.000	42.38	32.90	5.19	-29.71	50.76	68.20	17.44	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5448.452	39.72	32.80	5.18	47.99	54.00	6.01	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\101

Memo:

Sample Number: S26030303-004

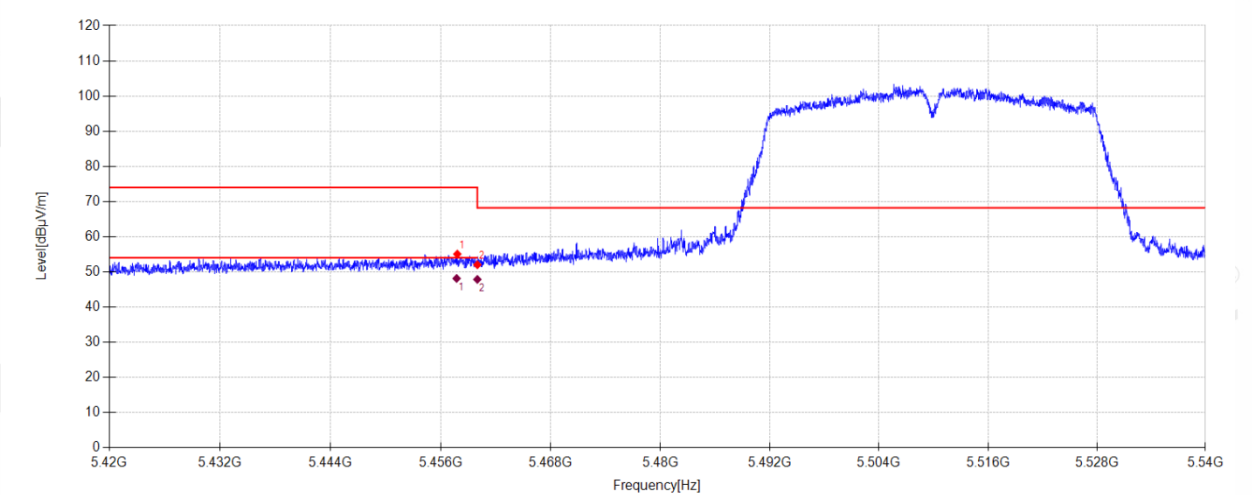

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.812	46.70	32.88	5.19	-29.71	55.06	74.00	18.94	PK	Vertical
2	5460.000	43.65	32.90	5.19	-29.71	52.03	68.20	16.17	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.741	39.78	32.88	5.19	48.14	54.00	5.86	AV	Vertical	
2	5460.000	39.49	32.90	5.19	47.87	54.00	6.13	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\102

Memo:

Sample Number: S26030303-004

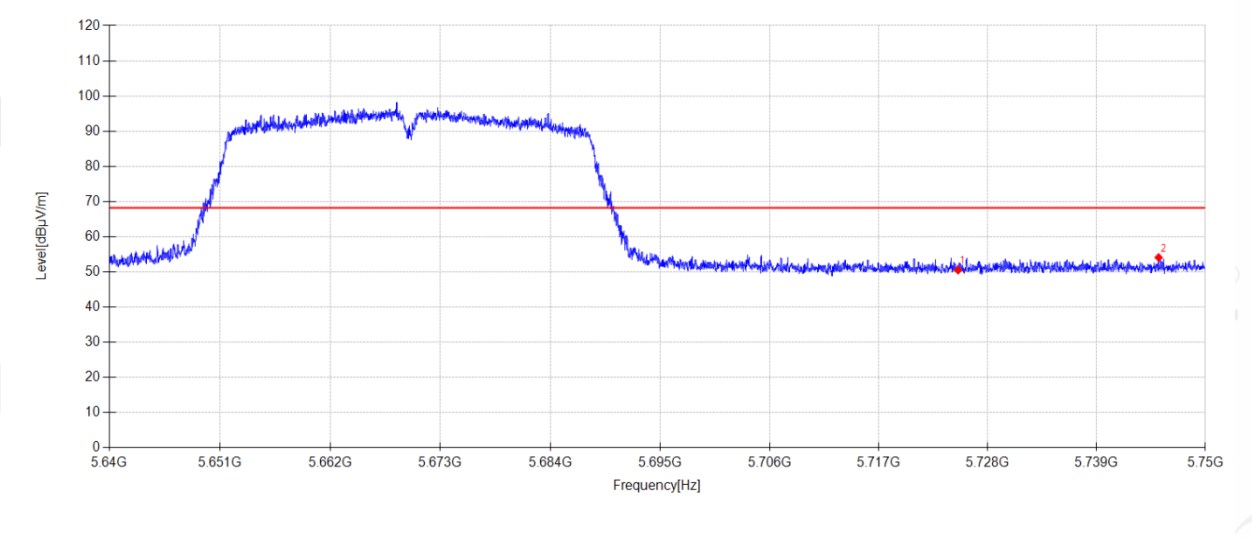

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.40	33.45	5.32	-29.65	50.52	68.20	17.68	PK	Horizontal
2	5745.270	44.68	33.73	5.33	-29.65	54.09	68.20	14.11	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\103

Memo:

Sample Number: S26030303-004

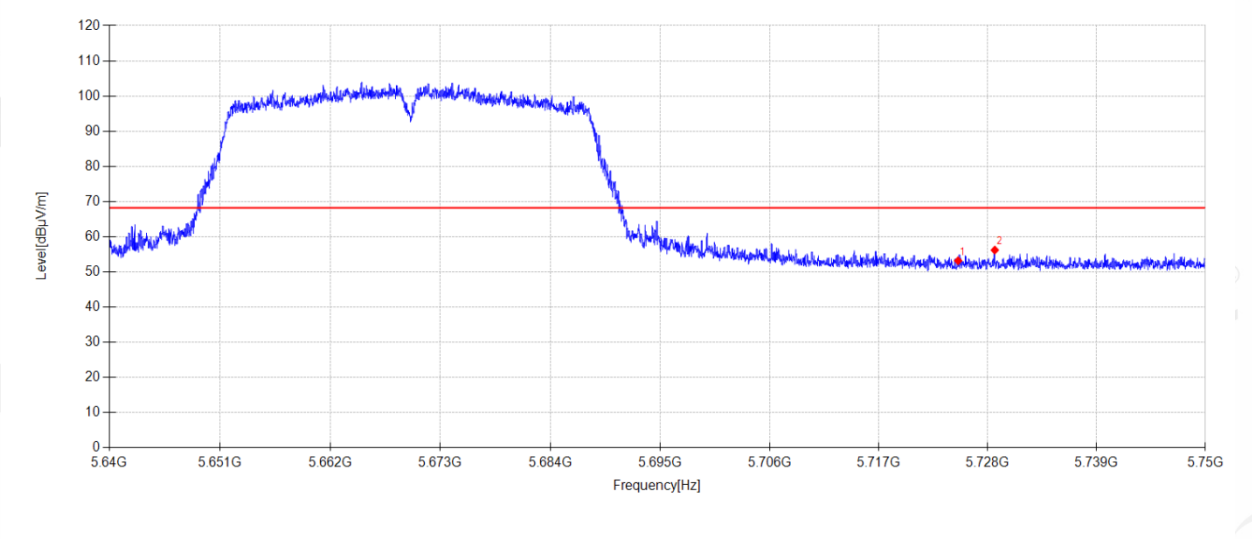

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.06	33.45	5.32	-29.65	53.18	68.20	15.02	PK	Vertical
2	5728.704	47.04	33.50	5.32	-29.65	56.21	68.20	11.99	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC80 5210MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\105

Memo:

Sample Number: S26030303-004

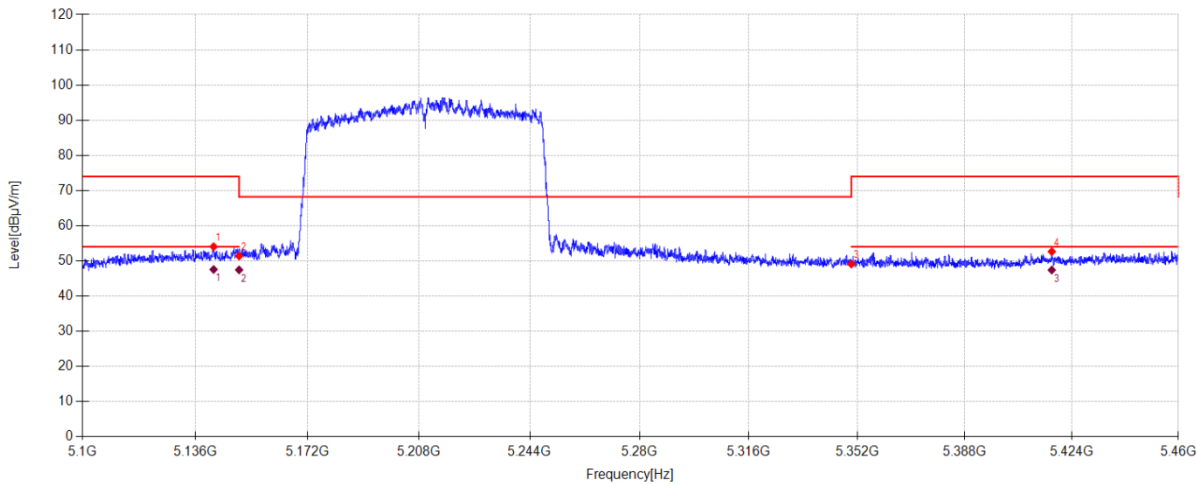

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.832	45.97	32.83	5.03	-29.77	54.06	74.00	19.94	PK	Horizontal
2	5150.000	43.22	32.90	5.04	-29.77	51.39	68.20	16.81	PK	Horizontal
3	5350.000	41.19	32.50	5.14	-29.73	49.10	68.20	19.10	PK	Horizontal
4	5417.160	44.33	32.87	5.17	-29.72	52.65	74.00	21.35	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5141.832	39.47	32.83	5.03	47.56	54.00	6.44	AV	Horizontal	
2	5150.000	39.28	32.90	5.04	47.45	54.00	6.55	AV	Horizontal	
3	5417.160	39.09	32.87	5.17	47.41	54.00	6.59	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC80 5210MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\106

Memo:

Sample Number: S26030303-004

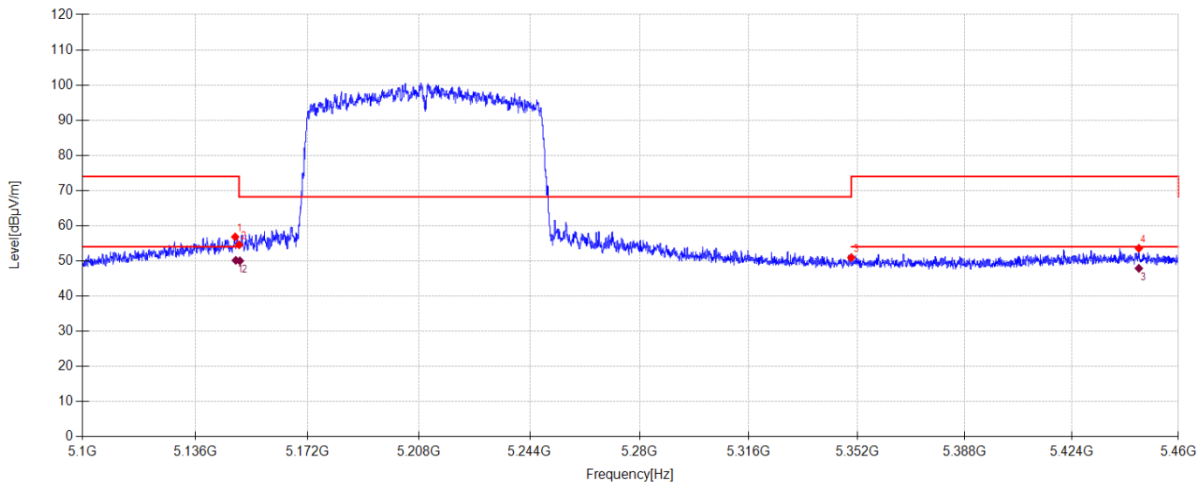

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.744	48.67	32.89	5.03	-29.77	56.82	74.00	17.18	PK	Vertical
2	5150.000	46.41	32.90	5.04	-29.77	54.58	68.20	13.62	PK	Vertical
3	5350.000	43.03	32.50	5.14	-29.73	50.94	68.20	17.26	PK	Vertical
4	5446.608	45.29	32.81	5.18	-29.71	53.57	74.00	20.43	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.938	42.00	32.89	5.03	50.15	54.00	3.85	AV	Vertical	
2	5150.234	41.84	32.90	5.04	50.01	54.00	3.99	AV	Vertical	
3	5446.608	39.60	32.81	5.18	47.88	54.00	6.12	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\107

Memo:

Sample Number: S26030303-004

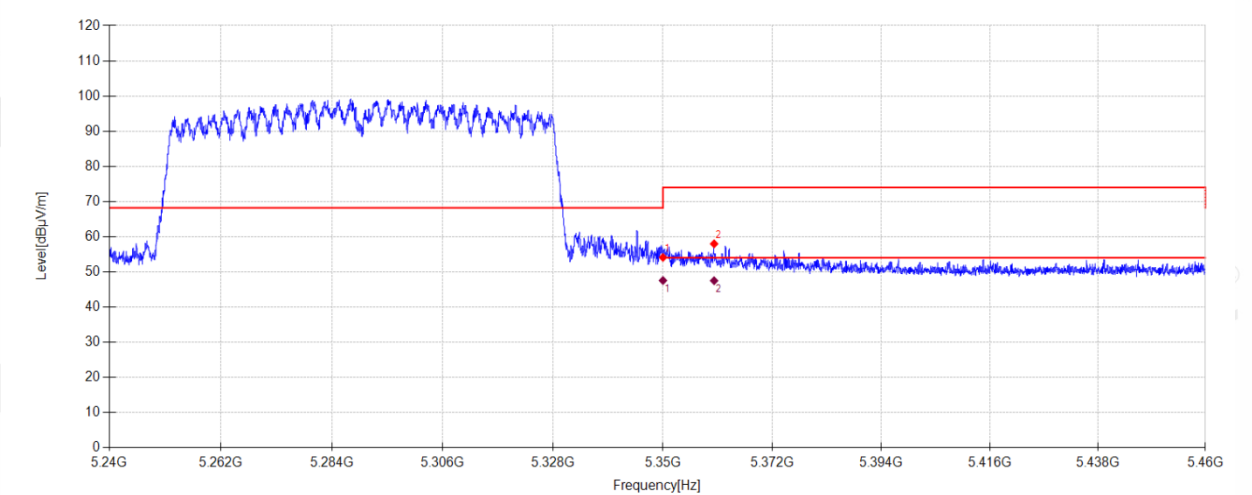

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	46.20	32.50	5.14	-29.73	54.11	68.20	14.09	PK	Horizontal
2	5360.274	49.99	32.58	5.14	-29.73	57.98	74.00	16.02	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.64	32.50	5.14	47.55	54.00	6.45	AV	Horizontal	
2	5360.274	39.51	32.58	5.14	47.50	54.00	6.50	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.