

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\108

Memo:

Sample Number: S26030303-004

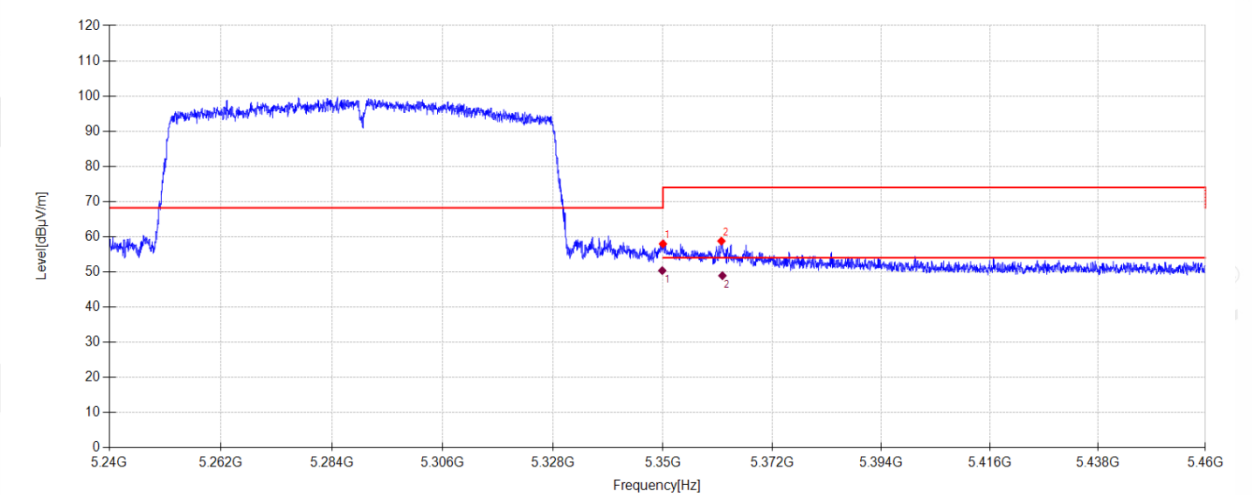

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	50.06	32.50	5.14	-29.73	57.97	68.20	10.23	PK	Vertical
2	5361.748	50.76	32.59	5.14	-29.73	58.76	74.00	15.24	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5349.860	42.45	32.50	5.14	50.36	54.00	3.64	AV	Vertical	
2	5361.949	40.93	32.59	5.14	48.93	54.00	5.07	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\109

Memo:

Sample Number: S26030303-004

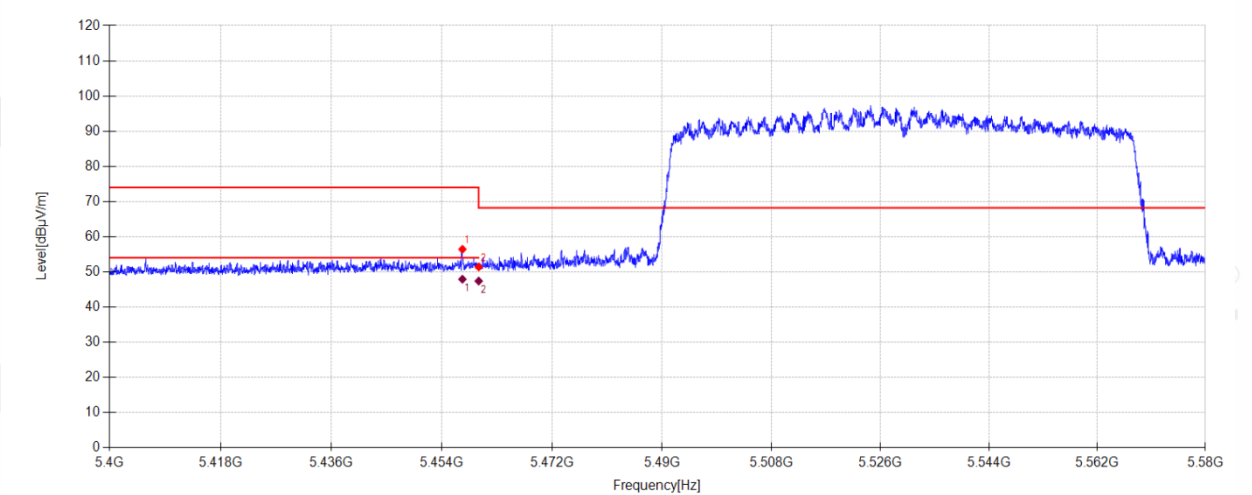

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.348	48.08	32.87	5.19	-29.71	56.43	74.00	17.57	PK	Horizontal
2	5460.000	43.03	32.90	5.19	-29.71	51.41	68.20	16.79	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.348	39.57	32.87	5.19	47.92	54.00	6.08	AV	Horizontal	
2	5460.000	39.02	32.90	5.19	47.40	54.00	6.60	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbin

Test Mode:

MIMO TX 11AC80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\110

Memo:

Sample Number: S26030303-004

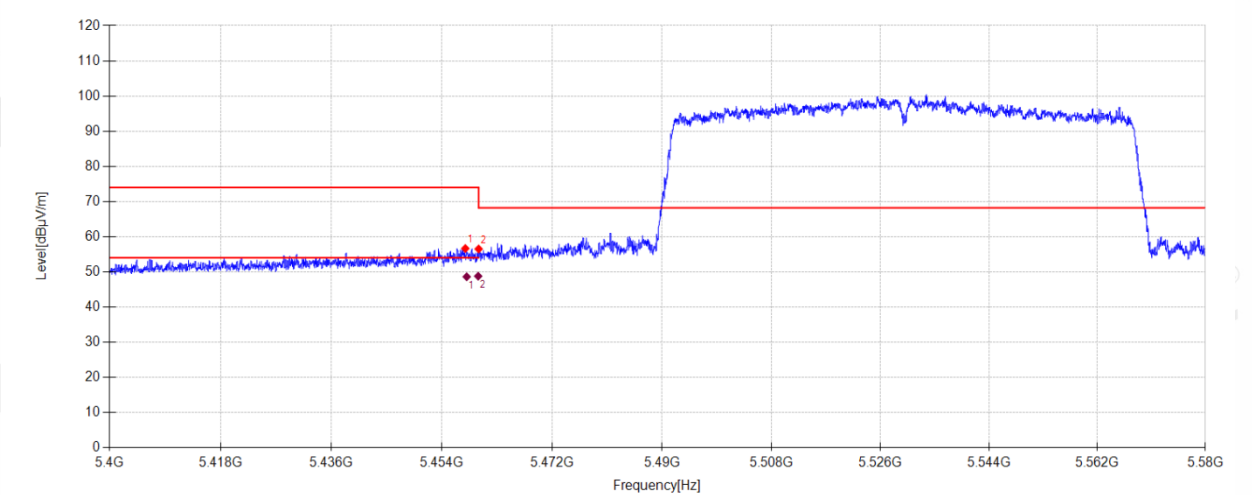

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.816	48.29	32.88	5.19	-29.71	56.65	74.00	17.35	PK	Vertical
2	5460.000	48.14	32.90	5.19	-29.71	56.52	68.20	11.68	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.044	40.26	32.88	5.19	48.62	54.00	5.38	AV	Vertical	
2	5459.919	40.40	32.90	5.19	48.78	54.00	5.22	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\111

Memo:

Sample Number: S26030303-004

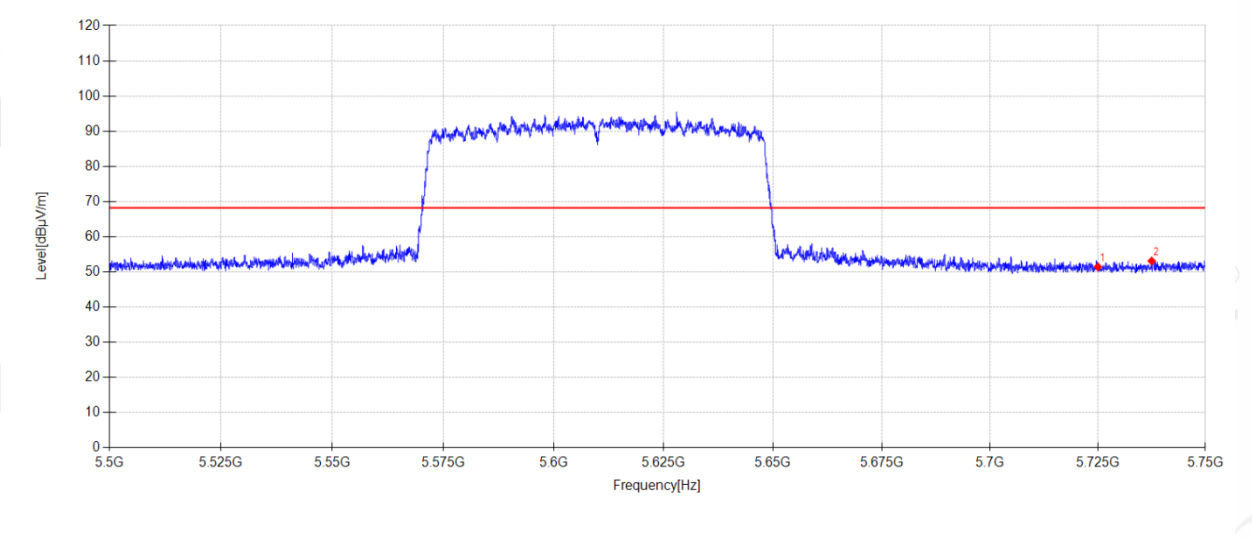

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.33	33.45	5.32	-29.66	51.44	68.20	16.76	PK	Horizontal
2	5737.500	43.79	33.63	5.33	-29.65	53.10	68.20	15.10	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\112

Memo:

Sample Number: S26030303-004

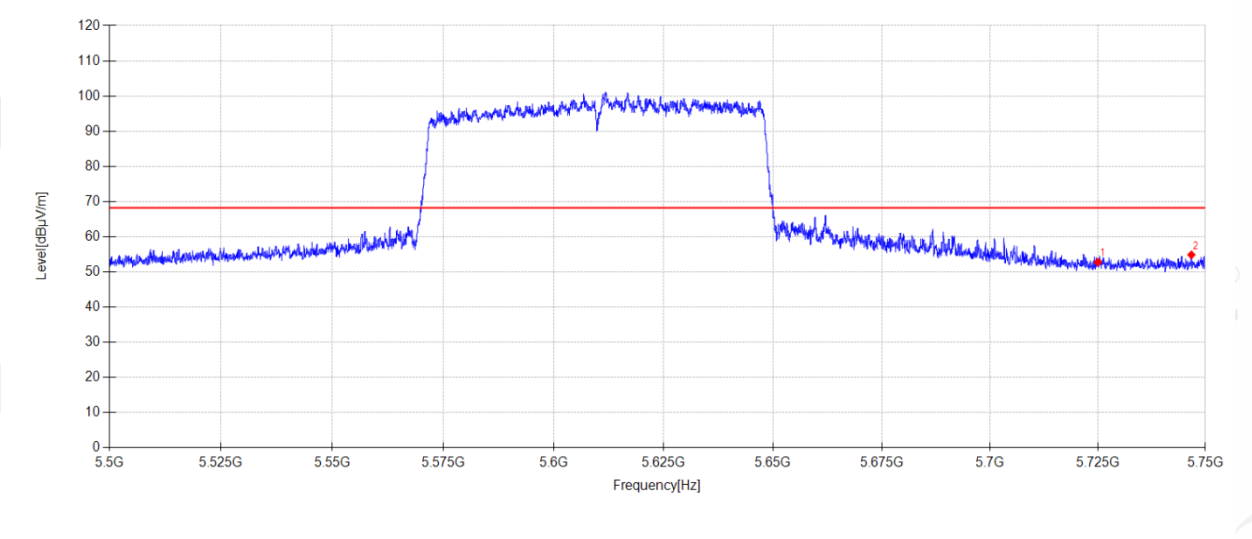

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.68	33.45	5.32	-29.66	52.79	68.20	15.41	PK	Vertical
2	5746.750	45.43	33.75	5.33	-29.65	54.86	68.20	13.34	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbin

Test Mode:

MIMO TX 11AX80 5210MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\113

Memo:

Sample Number: S26030303-004

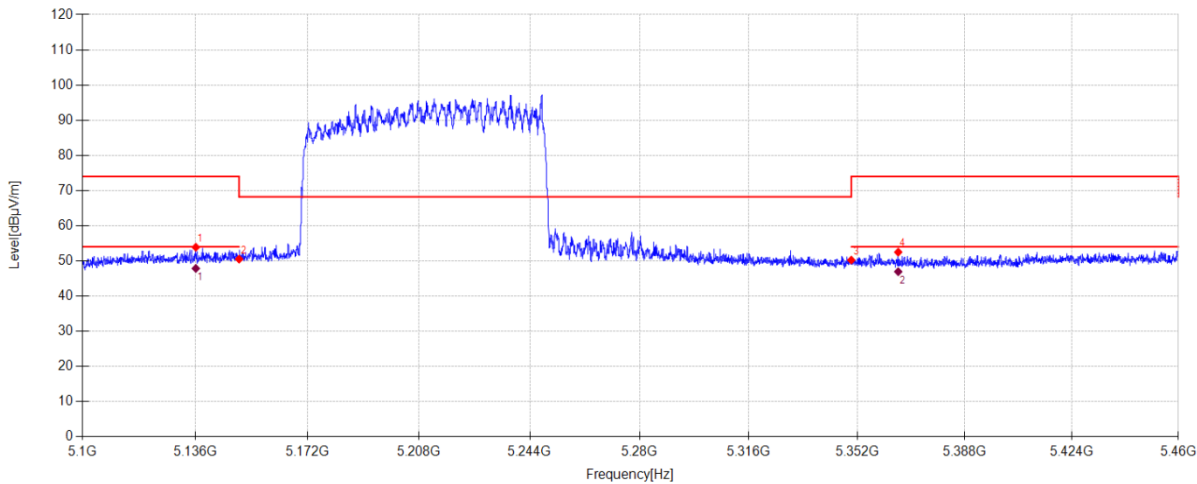

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5136.144	45.84	32.79	5.03	-29.77	53.89	74.00	20.11	PK	Horizontal
2	5150.000	42.33	32.90	5.04	-29.77	50.50	68.20	17.70	PK	Horizontal
3	5350.000	42.32	32.50	5.14	-29.73	50.23	68.20	17.97	PK	Horizontal
4	5365.644	44.45	32.63	5.14	-29.73	52.49	74.00	21.51	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5136.144	39.81	32.79	5.03	47.86	54.00	6.14	AV	Horizontal	
2	5365.644	38.90	32.63	5.14	46.94	54.00	7.06	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5210MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\114

Memo:

Sample Number: S26030303-004

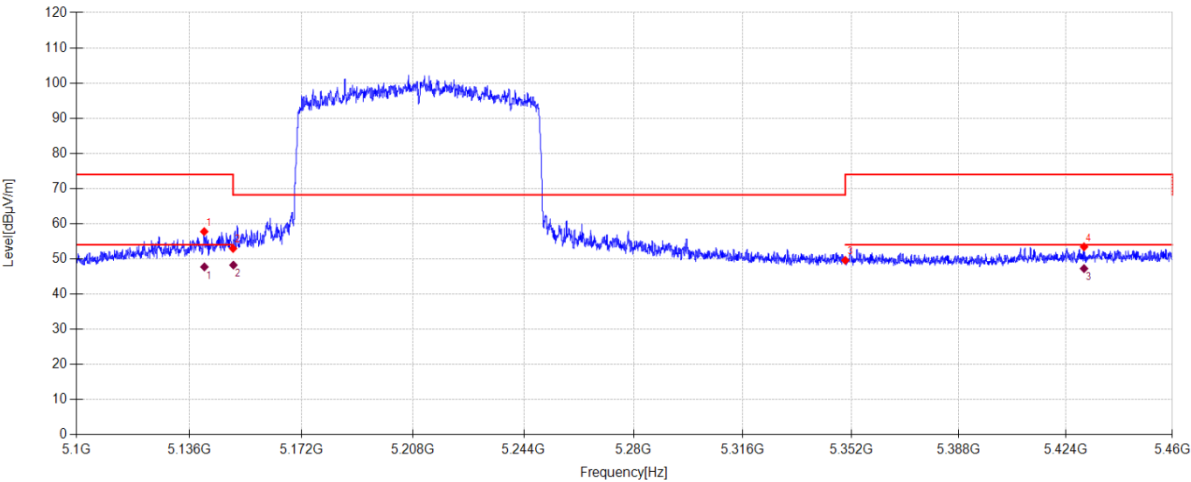

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5140.752	49.67	32.83	5.03	-29.77	57.76	74.00	16.24	PK	Vertical
2	5150.000	44.79	32.90	5.04	-29.77	52.96	68.20	15.24	PK	Vertical
3	5350.000	41.68	32.50	5.14	-29.73	49.59	68.20	18.61	PK	Vertical
4	5430.084	45.13	32.84	5.18	-29.71	53.44	74.00	20.56	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5140.801	39.63	32.83	5.03	47.72	54.00	6.28	AV	Vertical	
2	5150.100	40.07	32.90	5.04	48.24	54.00	5.76	AV	Vertical	
3	5430.084	38.94	32.84	5.18	47.25	54.00	6.75	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\115

Memo:

Sample Number: S26030303-004

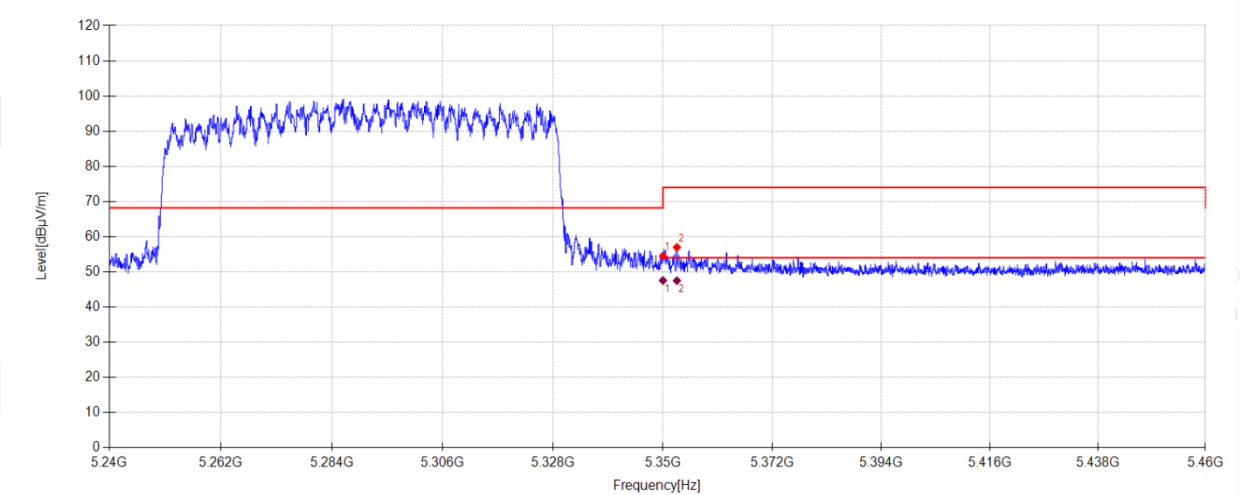

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	46.57	32.50	5.14	-29.73	54.48	68.20	13.72	PK	Horizontal
2	5352.794	49.06	32.52	5.14	-29.73	56.99	74.00	17.01	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.64	32.50	5.14	47.55	54.00	6.45	AV	Horizontal	
2	5352.794	39.58	32.52	5.14	47.51	54.00	6.49	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\116

Memo:

Sample Number: S26030303-004

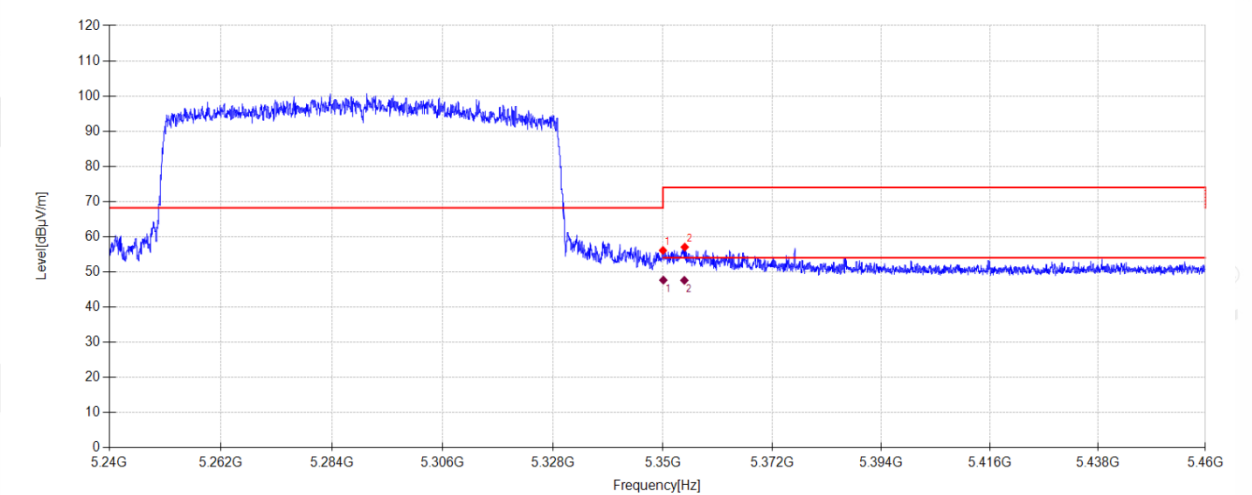

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.000	48.18	32.50	5.14	-29.73	56.09	68.20	12.11	PK	Vertical
2	5354.378	49.10	32.54	5.14	-29.73	57.05	74.00	16.95	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity	
1	5350.075	39.75	32.50	5.14	47.66	54.00	6.34	AV	Vertical	
2	5354.302	39.65	32.54	5.14	47.60	54.00	6.40	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\117

Memo:

Sample Number: S26030303-004

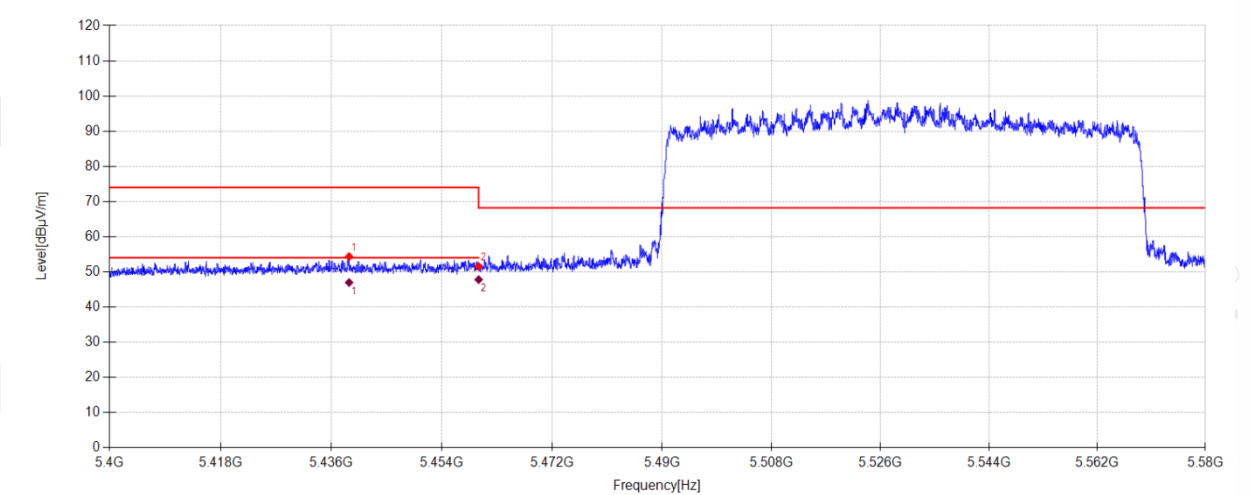

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5438.880	46.07	32.82	5.18	-29.71	54.36	74.00	19.64	PK	Horizontal
2	5460.000	43.14	32.90	5.19	-29.71	51.52	68.20	16.68	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5438.880	38.69	32.82	5.18	46.98	54.00	7.02	AV	Horizontal	
2	5460.000	39.42	32.90	5.19	47.80	54.00	6.20	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\118

Memo:

Sample Number: S26030303-004

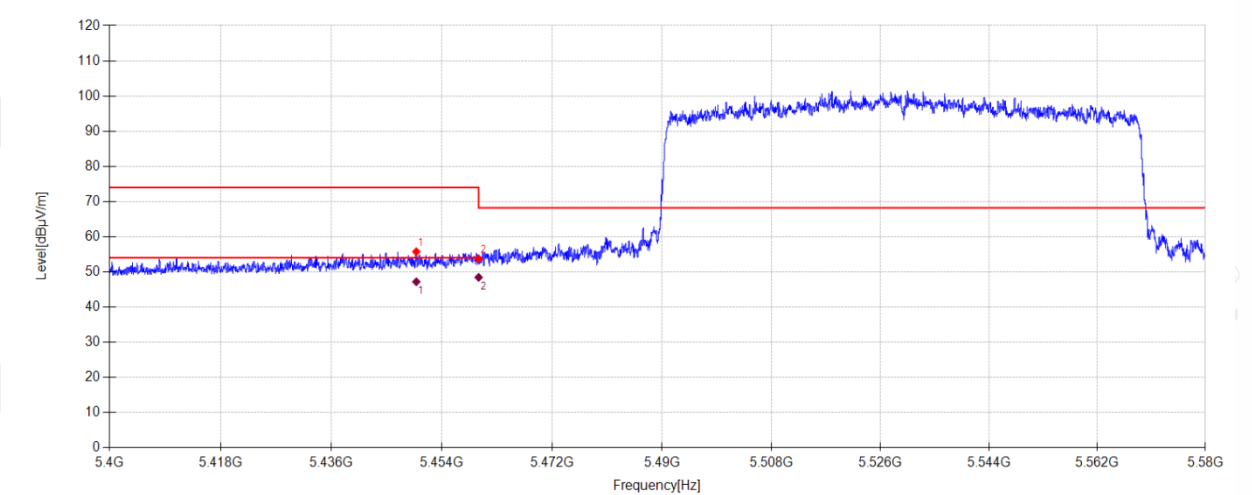

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5449.824	47.48	32.80	5.18	-29.71	55.75	74.00	18.25	PK	Vertical
2	5460.000	45.35	32.90	5.19	-29.71	53.73	68.20	14.47	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5449.824	38.92	32.80	5.18	47.19	54.00	6.81	AV	Vertical	
2	5460.000	40.07	32.90	5.19	48.45	54.00	5.55	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\119

Memo:

Sample Number: S26030303-004

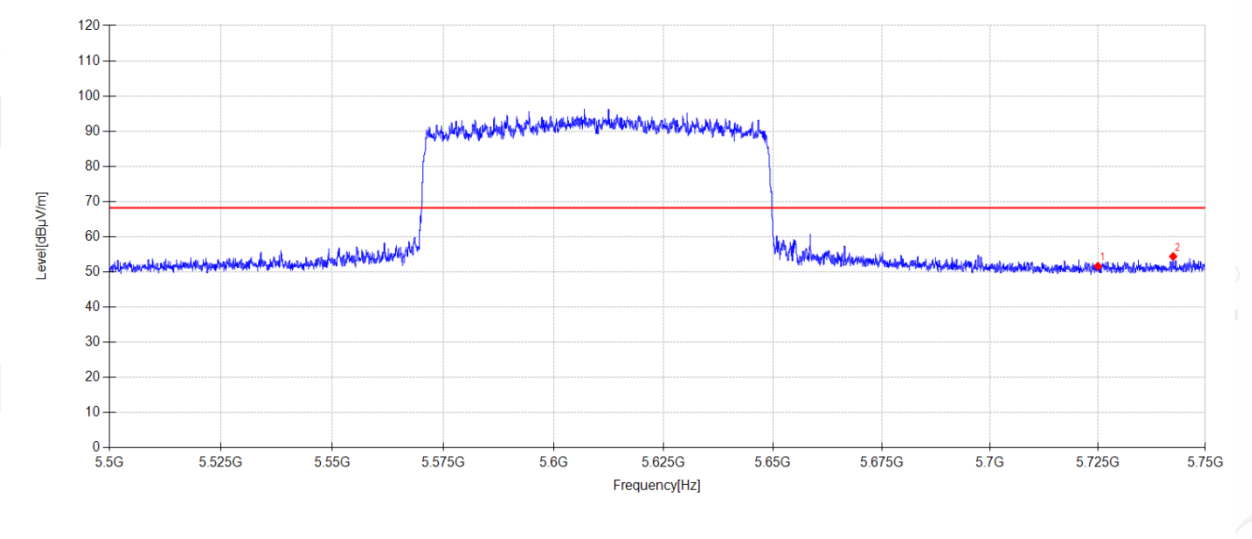

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.50	33.45	5.32	-29.66	51.61	68.20	16.59	PK	Horizontal
2	5742.500	45.01	33.70	5.33	-29.65	54.39	68.20	13.81	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5G\120

Memo:

Sample Number: S26030303-004

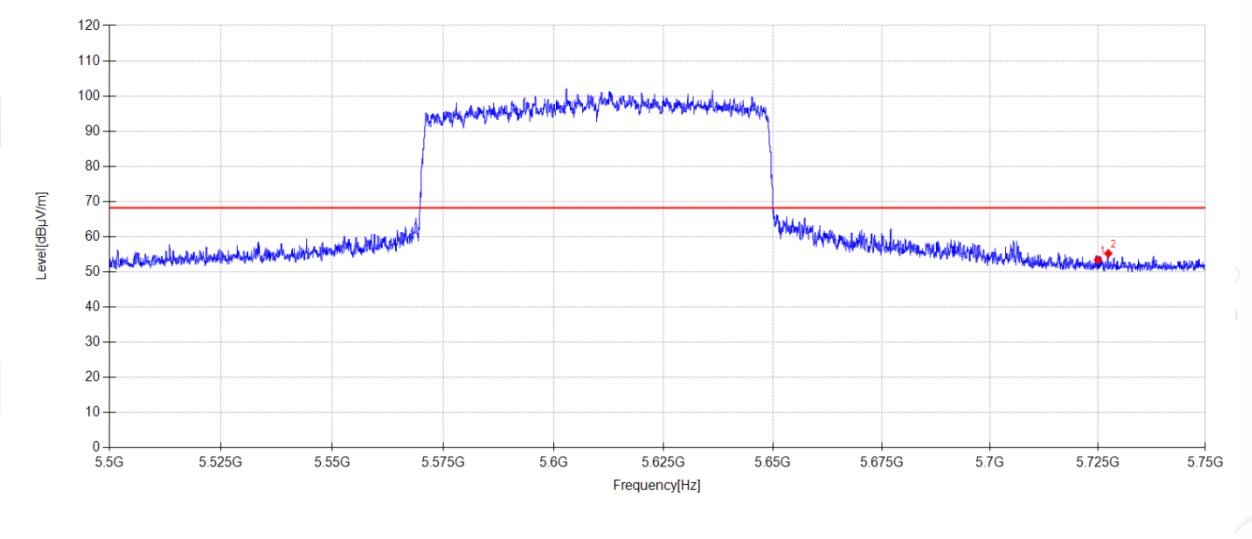

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.27	33.45	5.32	-29.66	53.38	68.20	14.82	PK	Vertical
2	5727.425	46.09	33.48	5.32	-29.65	55.24	68.20	12.96	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\7

Memo:

Sample Number: S26030303-004

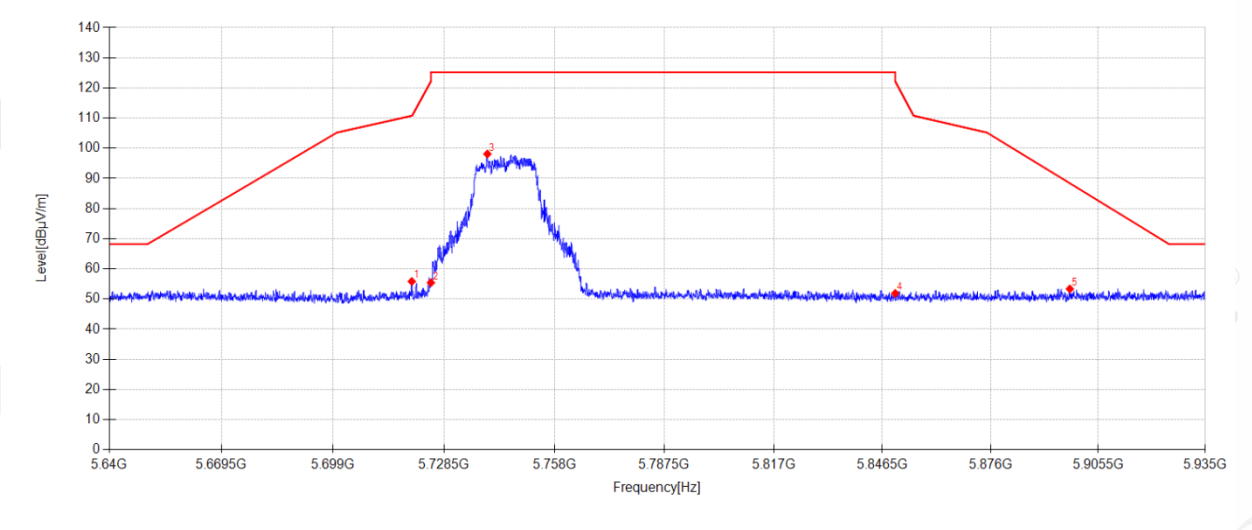

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.916	46.84	33.38	5.26	-29.66	55.82	110.78	54.96	PK	Horizontal
2	5725.000	46.36	33.45	5.26	-29.65	55.42	122.20	66.78	PK	Horizontal
3	5740.064	88.82	33.66	5.27	-29.65	98.10	125.20	27.10	PK	Horizontal
4	5850.000	42.29	33.90	5.31	-29.63	51.87	122.20	70.33	PK	Horizontal
5	5897.712	43.37	34.28	5.33	-29.62	53.36	88.39	35.03	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\8

Memo:

Sample Number: S26030303-004

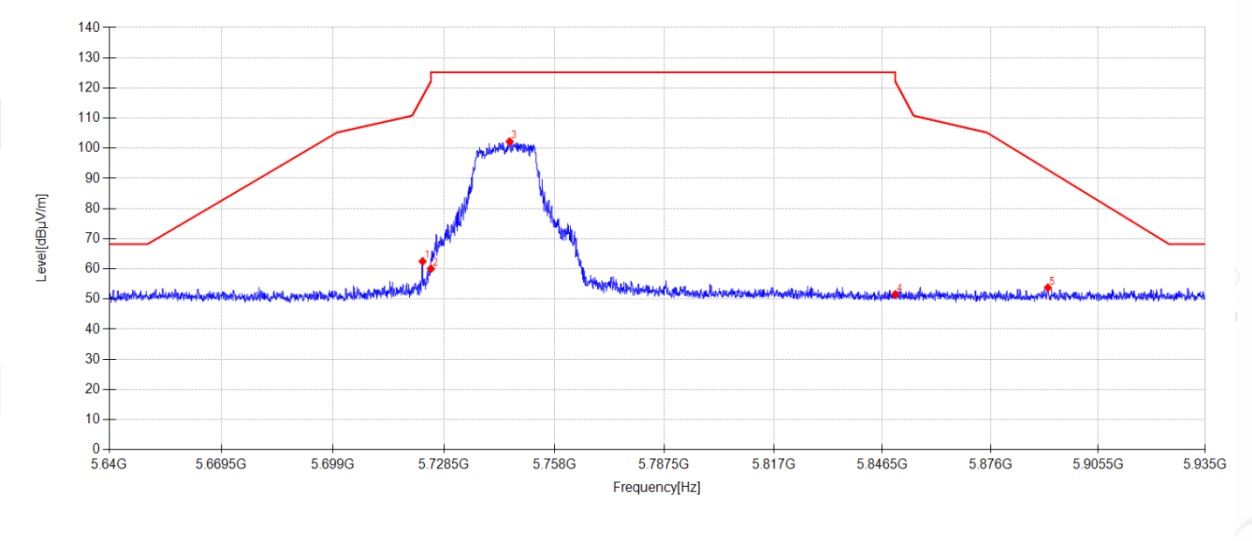

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.807	53.46	33.42	5.26	-29.66	62.48	117.20	54.72	PK	Vertical
2	5725.000	50.98	33.45	5.26	-29.65	60.04	122.20	62.16	PK	Vertical
3	5746.023	92.84	33.74	5.27	-29.65	102.20	125.20	23.00	PK	Vertical
4	5850.000	41.95	33.90	5.31	-29.63	51.53	122.20	70.67	PK	Vertical
5	5891.694	43.81	34.23	5.33	-29.62	53.75	92.85	39.10	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\9

Memo:

Sample Number: S26030303-004

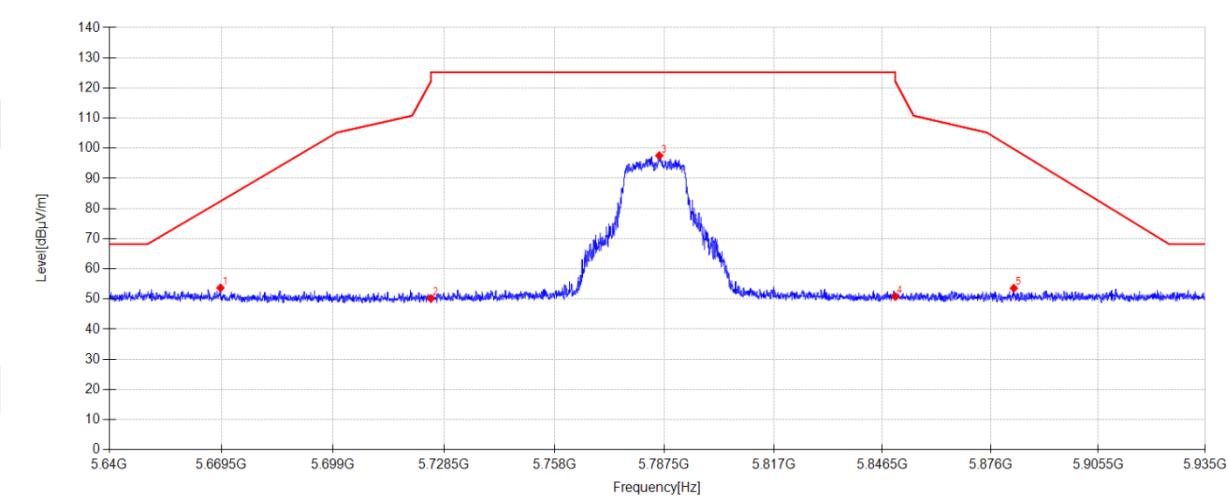

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5669.235	44.78	33.35	5.24	-29.67	53.70	82.43	28.73	PK	Horizontal
2	5725.000	41.10	33.45	5.26	-29.65	50.16	122.20	72.04	PK	Horizontal
3	5786.143	88.05	33.87	5.28	-29.64	97.56	125.20	27.64	PK	Horizontal
4	5850.000	41.24	33.90	5.31	-29.63	50.82	122.20	71.38	PK	Horizontal
5	5882.372	43.72	34.16	5.32	-29.62	53.58	99.74	46.16	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\10

Memo:

Sample Number: S26030303-004

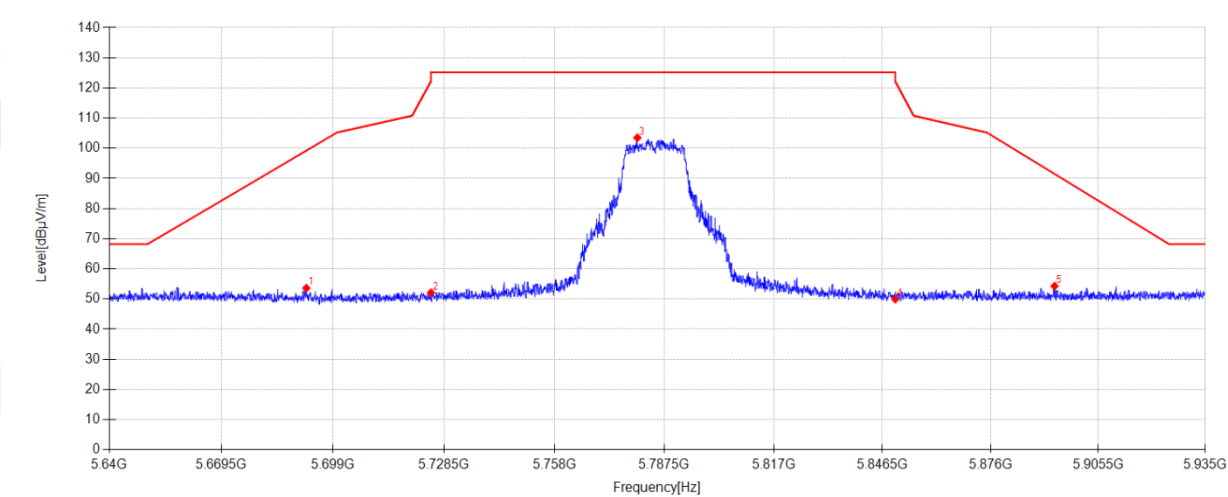

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5691.920	44.85	33.16	5.25	-29.66	53.60	99.22	45.62	PK	Vertical
2	5725.000	43.04	33.45	5.26	-29.65	52.10	122.20	70.10	PK	Vertical
3	5780.243	93.98	33.86	5.28	-29.64	103.48	125.20	21.72	PK	Vertical
4	5850.000	40.39	33.90	5.31	-29.63	49.97	122.20	72.23	PK	Vertical
5	5893.523	44.32	34.25	5.33	-29.62	54.28	91.49	37.21	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\11

Memo:

Sample Number: S26030303-004

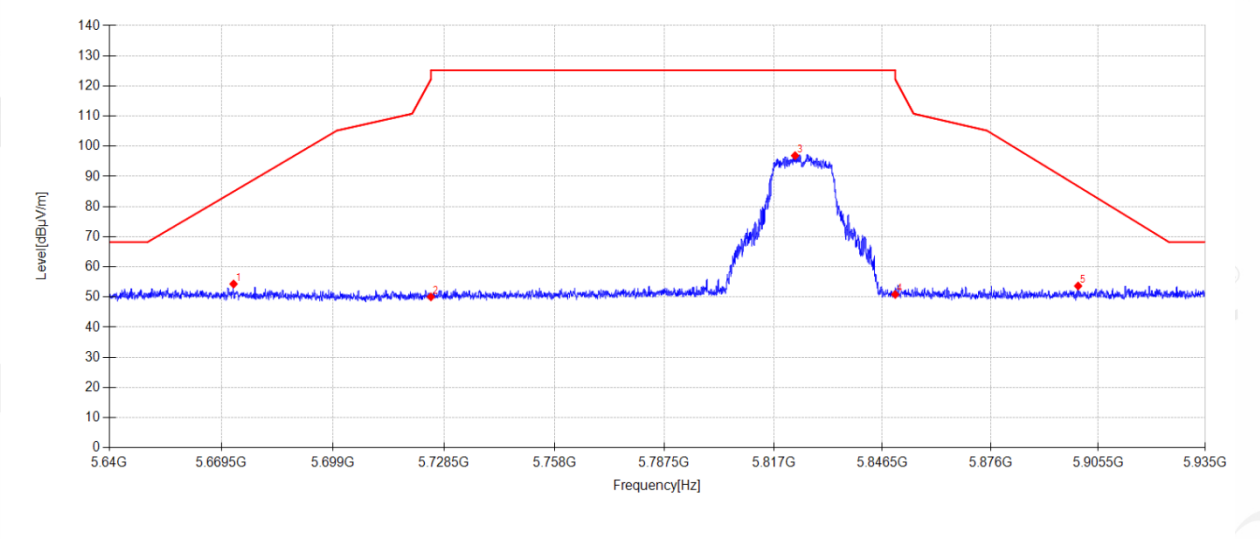

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5672.686	45.44	33.32	5.24	-29.67	54.33	84.99	30.66	PK	Horizontal
2	5725.000	40.99	33.45	5.26	-29.65	50.05	122.20	72.15	PK	Horizontal
3	5822.812	87.33	33.90	5.30	-29.64	96.89	125.20	28.31	PK	Horizontal
4	5850.000	41.27	33.90	5.31	-29.63	50.85	122.20	71.35	PK	Horizontal
5	5899.984	43.65	34.30	5.33	-29.62	53.66	86.71	33.05	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT1 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\12

Memo:

Sample Number: S26030303-004

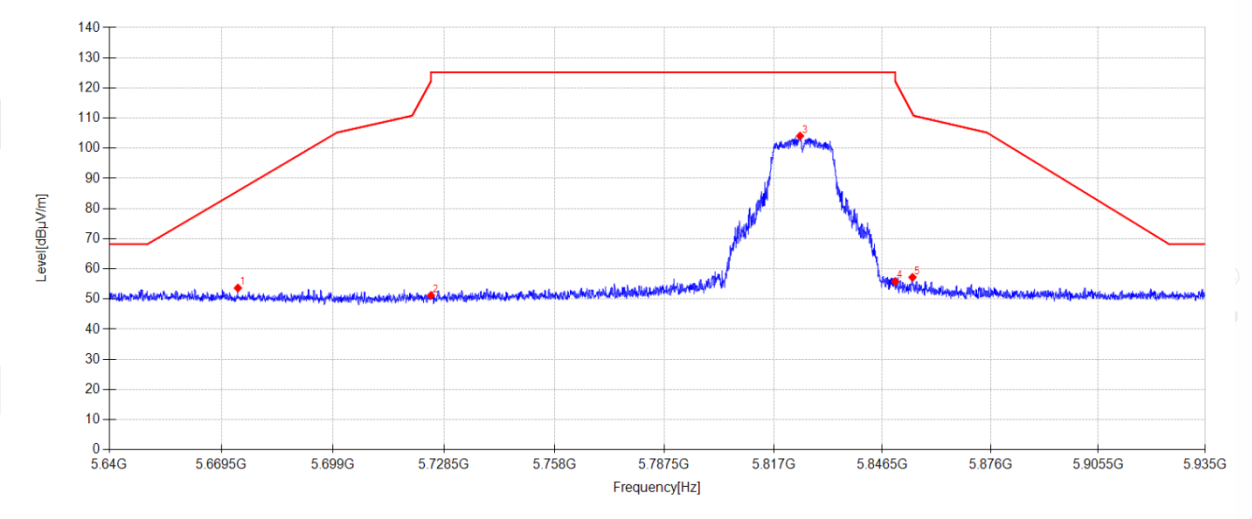

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5673.837	44.77	33.31	5.24	-29.67	53.65	85.84	32.19	PK	Vertical
2	5725.000	42.11	33.45	5.26	-29.65	51.17	122.20	71.03	PK	Vertical
3	5824.169	94.51	33.90	5.30	-29.64	104.07	125.20	21.13	PK	Vertical
4	5850.000	46.23	33.90	5.31	-29.63	55.81	122.20	66.39	PK	Vertical
5	5854.701	47.58	33.94	5.31	-29.63	57.20	111.48	54.28	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\16

Memo:

Sample Number: S26030303-004

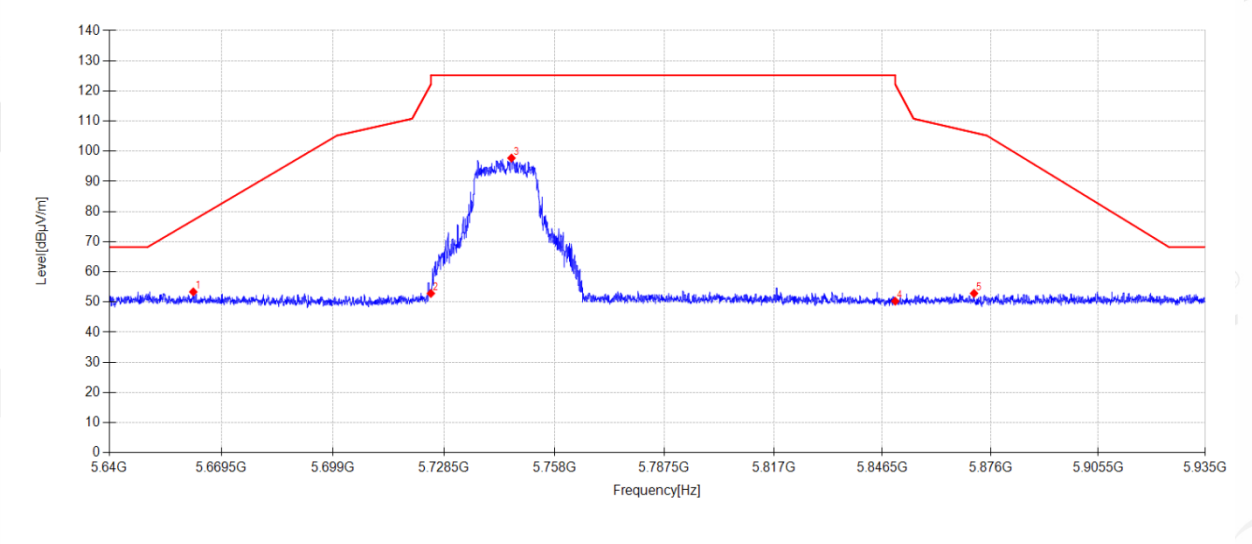

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5662.066	44.41	33.40	5.23	-29.67	53.37	77.13	23.76	PK	Horizontal
2	5725.000	43.79	33.45	5.26	-29.65	52.85	122.20	69.35	PK	Horizontal
3	5746.495	88.37	33.75	5.27	-29.65	97.74	125.20	27.46	PK	Horizontal
4	5850.000	40.70	33.90	5.31	-29.63	50.28	122.20	71.92	PK	Horizontal
5	5871.487	43.11	34.07	5.32	-29.63	52.87	106.18	53.31	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\17

Memo:

Sample Number: S26030303-004

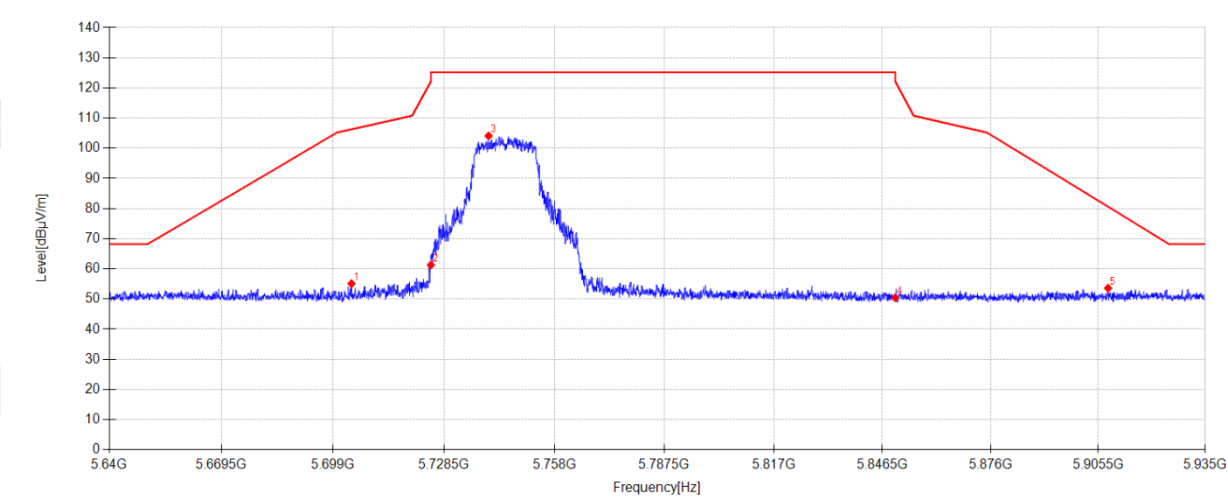

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5703.897	46.37	33.15	5.25	-29.66	55.11	106.29	51.18	PK	Vertical
2	5725.000	52.23	33.45	5.26	-29.65	61.29	122.20	60.91	PK	Vertical
3	5740.389	94.81	33.67	5.27	-29.65	104.10	125.20	21.10	PK	Vertical
4	5850.000	40.87	33.90	5.31	-29.63	50.45	122.20	71.75	PK	Vertical
5	5908.214	43.58	34.32	5.33	-29.62	53.61	80.62	27.01	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\18

Memo:

Sample Number: S26030303-004

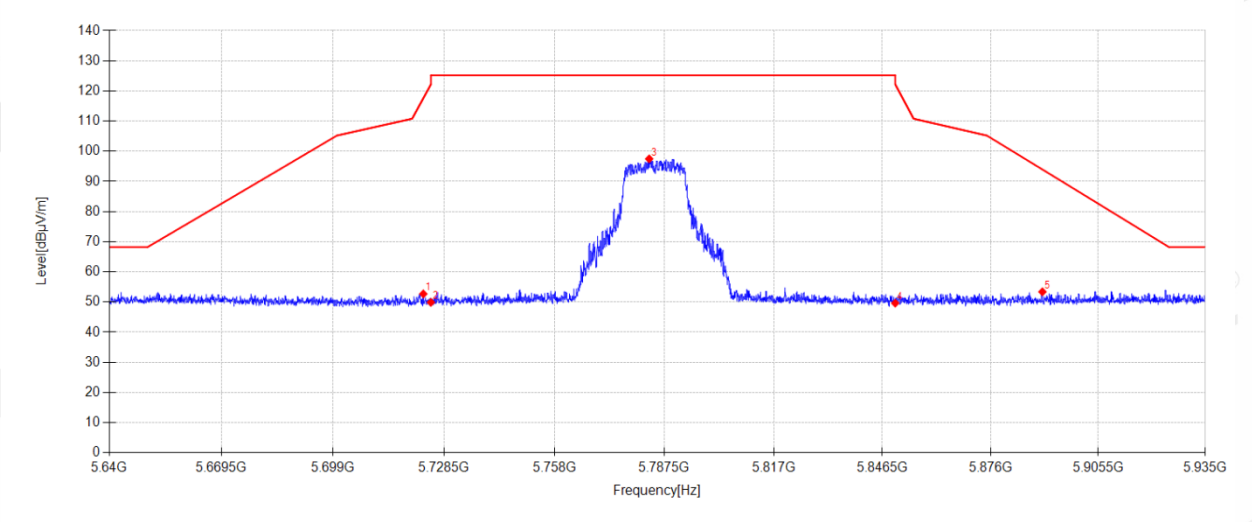

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5722.984	43.68	33.42	5.26	-29.66	52.70	117.60	64.90	PK	Horizontal
2	5725.000	40.84	33.45	5.26	-29.65	49.90	122.20	72.30	PK	Horizontal
3	5783.429	87.98	33.87	5.28	-29.64	97.49	125.20	27.71	PK	Horizontal
4	5850.000	40.05	33.90	5.31	-29.63	49.63	122.20	72.57	PK	Horizontal
5	5890.190	43.46	34.22	5.33	-29.62	53.39	93.96	40.57	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\19

Memo:

Sample Number: S26030303-004

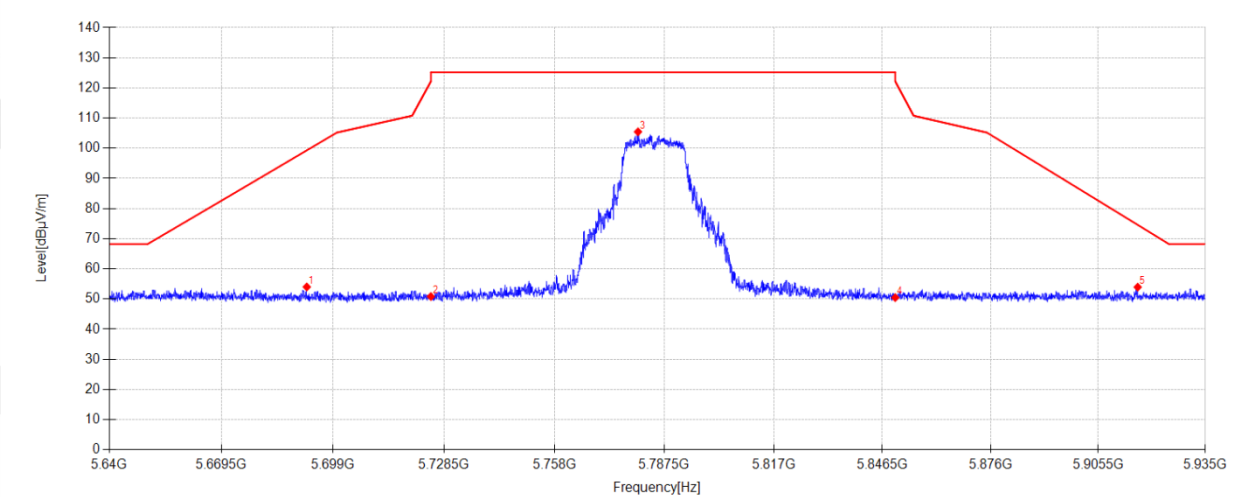

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5692.038	45.27	33.16	5.25	-29.66	54.02	99.31	45.29	PK	Vertical
2	5725.000	41.78	33.45	5.26	-29.65	50.84	122.20	71.36	PK	Vertical
3	5780.420	95.96	33.86	5.28	-29.64	105.46	125.20	19.74	PK	Vertical
4	5850.000	40.90	33.90	5.31	-29.63	50.48	122.20	71.72	PK	Vertical
5	5916.356	43.91	34.33	5.34	-29.62	53.96	74.60	20.64	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\20

Memo:

Sample Number: S26030303-004

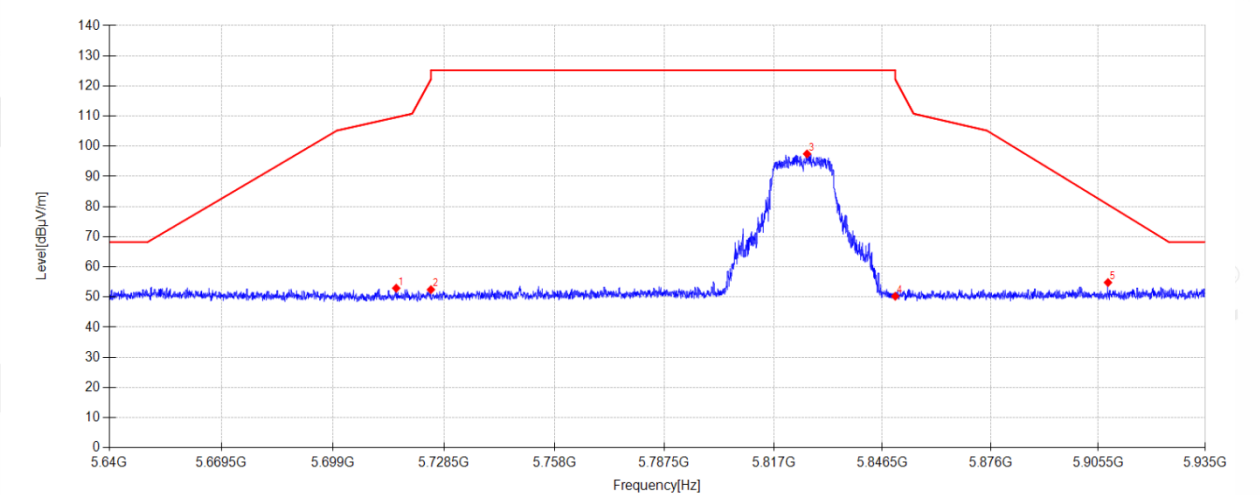

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.756	44.02	33.32	5.26	-29.66	52.94	109.61	56.67	PK	Horizontal
2	5725.000	43.39	33.45	5.26	-29.65	52.45	122.20	69.75	PK	Horizontal
3	5826.057	87.90	33.90	5.30	-29.63	97.47	125.20	27.73	PK	Horizontal
4	5850.000	40.67	33.90	5.31	-29.63	50.25	122.20	71.95	PK	Horizontal
5	5908.185	44.78	34.32	5.33	-29.62	54.81	80.64	25.83	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

ANT2 TX 11A 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\21

Memo:

Sample Number: S26030303-004

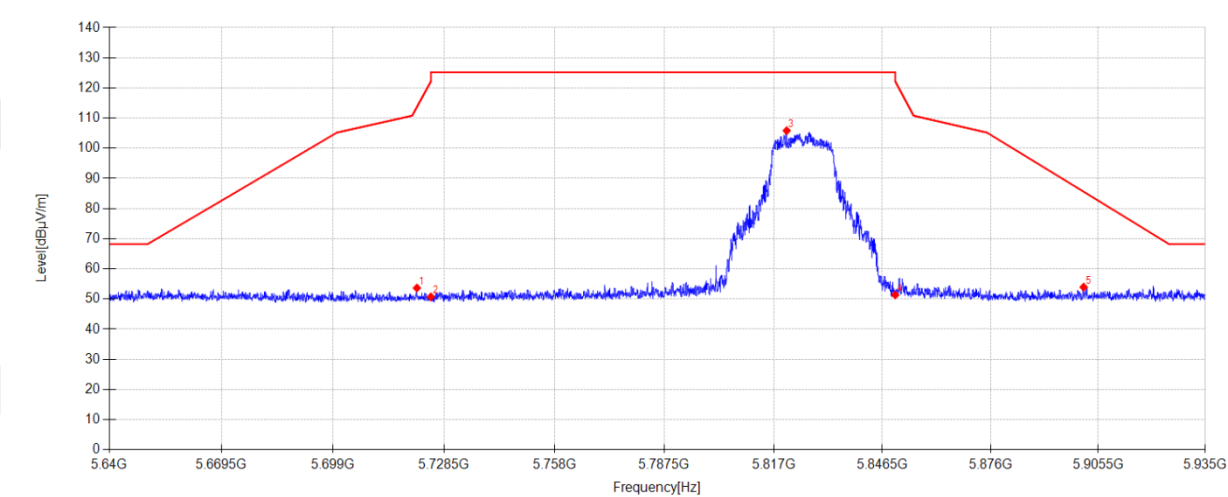

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.273	44.66	33.40	5.26	-29.66	53.66	113.70	60.04	PK	Vertical
2	5725.000	41.66	33.45	5.26	-29.65	50.72	122.20	71.48	PK	Vertical
3	5820.540	96.28	33.90	5.30	-29.64	105.84	125.20	19.36	PK	Vertical
4	5850.000	41.77	33.90	5.31	-29.63	51.35	122.20	70.85	PK	Vertical
5	5901.488	43.94	34.30	5.33	-29.62	53.95	85.60	31.65	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\22

Memo:

Sample Number: S26030303-004

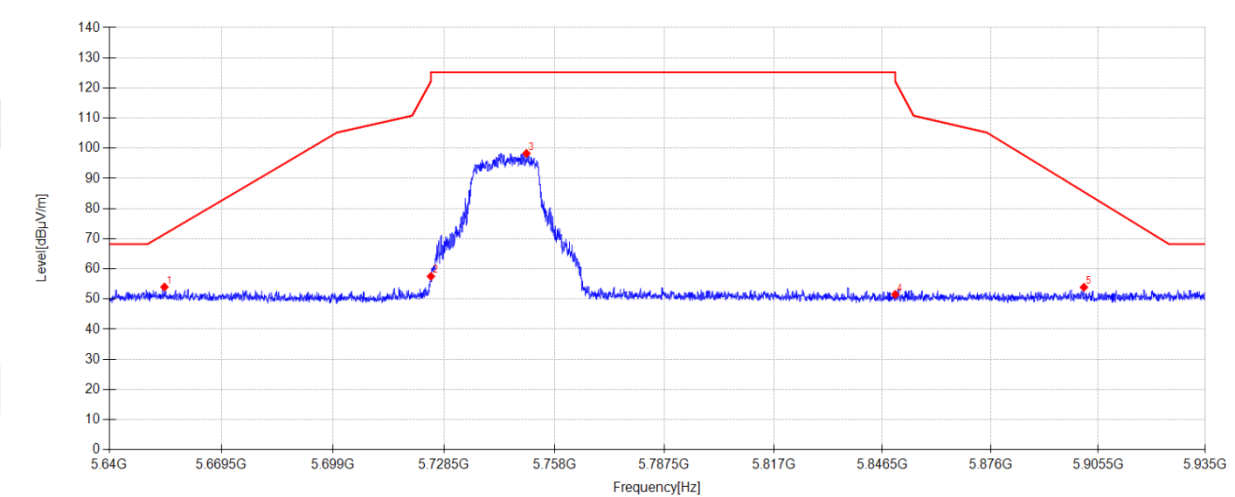

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5654.485	44.96	33.46	5.23	-29.67	53.98	71.52	17.54	PK	Horizontal
2	5725.000	48.45	33.45	5.26	-29.65	57.51	122.20	64.69	PK	Horizontal
3	5750.507	88.87	33.80	5.27	-29.65	98.29	125.20	26.91	PK	Horizontal
4	5850.000	41.95	33.90	5.31	-29.63	51.53	122.20	70.67	PK	Horizontal
5	5901.577	43.89	34.30	5.33	-29.62	53.90	85.53	31.63	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\23

Memo:

Sample Number: S26030303-004

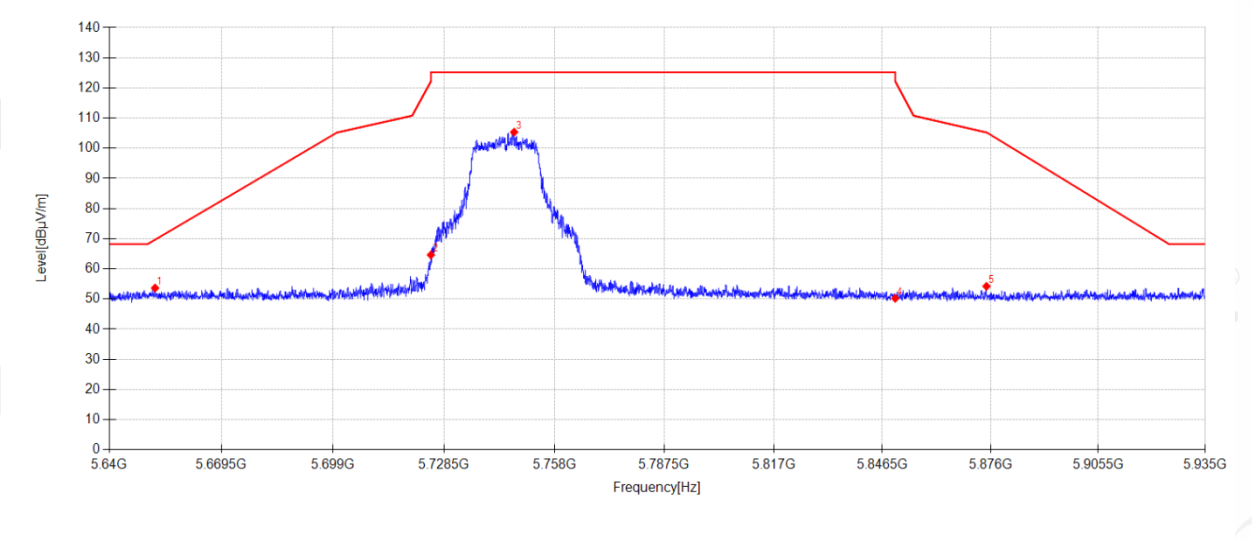

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5652.007	44.61	33.48	5.23	-29.67	53.65	69.68	16.03	PK	Vertical
2	5725.000	55.57	33.45	5.26	-29.65	64.63	122.20	57.57	PK	Vertical
3	5747.203	95.97	33.76	5.27	-29.65	105.35	125.20	19.85	PK	Vertical
4	5850.000	40.66	33.90	5.31	-29.63	50.24	122.20	71.96	PK	Vertical
5	5874.879	44.43	34.10	5.32	-29.63	54.22	105.23	51.01	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\24

Memo:

Sample Number: S26030303-004

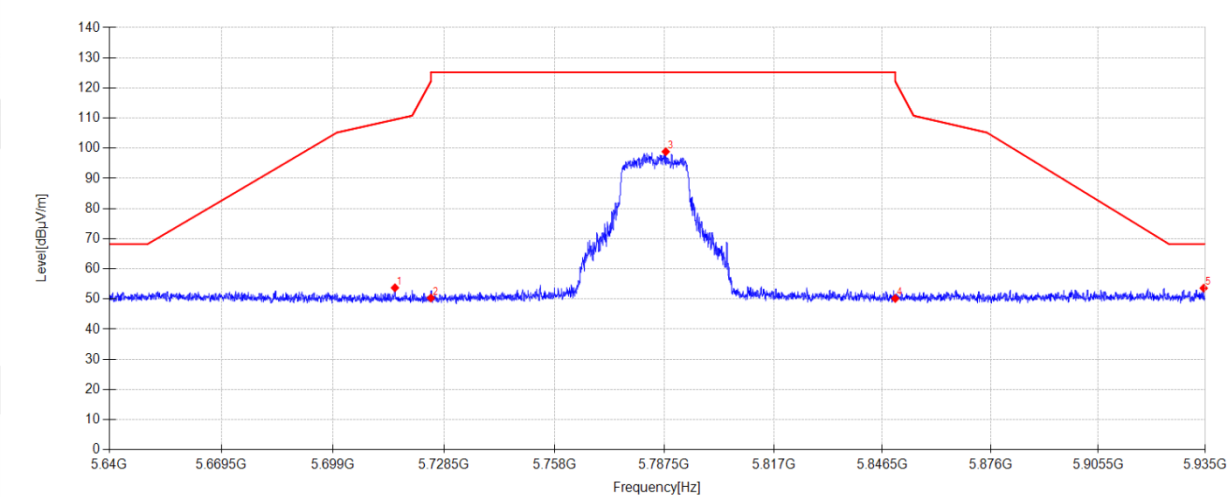

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5715.432	44.81	33.32	5.26	-29.66	53.73	109.52	55.79	PK	Horizontal
2	5725.000	41.28	33.45	5.26	-29.65	50.34	122.20	71.86	PK	Horizontal
3	5787.884	89.33	33.88	5.29	-29.64	98.86	125.20	26.34	PK	Horizontal
4	5850.000	40.60	33.90	5.31	-29.63	50.18	122.20	72.02	PK	Horizontal
5	5934.558	43.51	34.37	5.34	-29.61	53.61	68.20	14.59	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\25

Memo:

Sample Number: S26030303-004

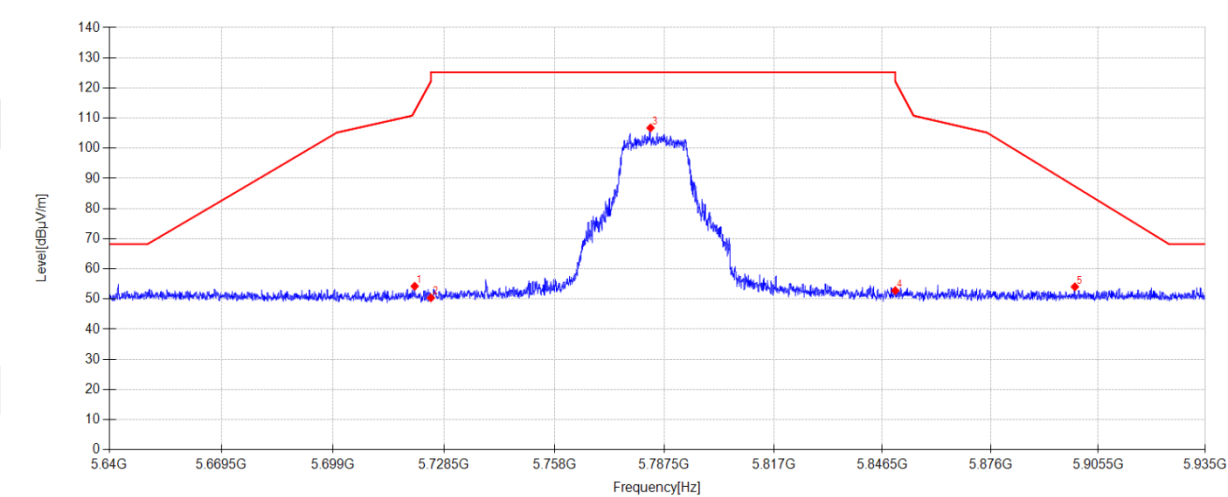

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5720.683	45.26	33.39	5.26	-29.66	54.25	112.36	58.11	PK	Vertical
2	5725.000	41.34	33.45	5.26	-29.65	50.40	122.20	71.80	PK	Vertical
3	5783.783	97.25	33.87	5.28	-29.64	106.76	125.20	18.44	PK	Vertical
4	5850.000	43.20	33.90	5.31	-29.63	52.78	122.20	69.42	PK	Vertical
5	5899.099	44.06	34.29	5.33	-29.62	54.06	87.37	33.31	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-13

Tested By:

Li Xiongbín

Test Mode:

MIMO TX 11N20 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:23.6°C;Humi:55.1%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26030303-2E\FCC ABOVE 1G 5.8G\26

Memo:

Sample Number: S26030303-004

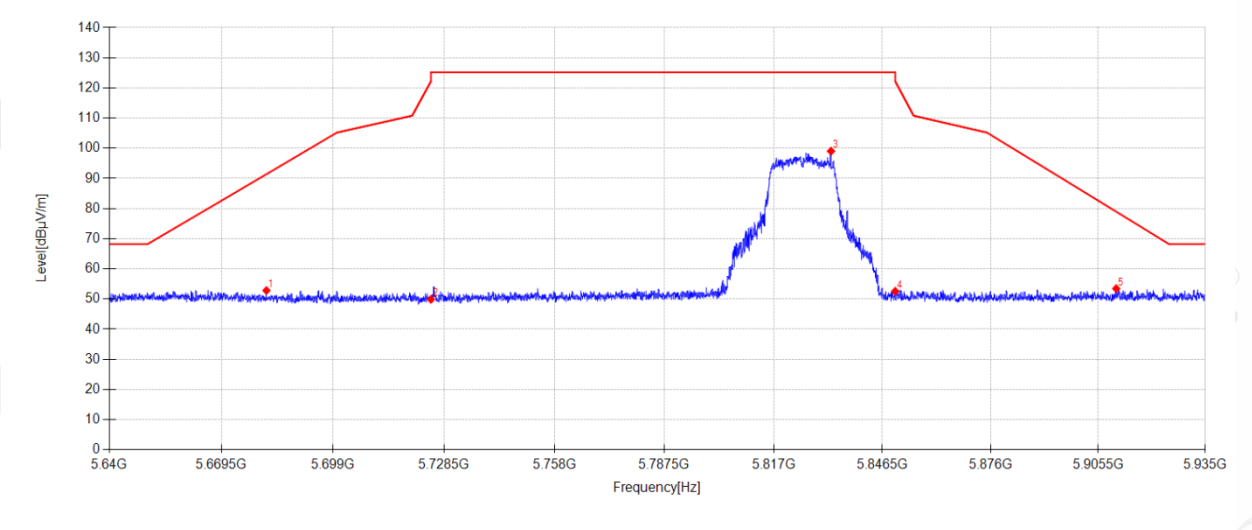

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5681.359	44.01	33.25	5.24	-29.66	52.84	91.41	38.57	PK	Horizontal
2	5725.000	40.84	33.45	5.26	-29.65	49.90	122.20	72.30	PK	Horizontal
3	5832.547	89.46	33.90	5.30	-29.63	99.03	125.20	26.17	PK	Horizontal
4	5850.000	43.01	33.90	5.31	-29.63	52.59	122.20	69.61	PK	Horizontal
5	5910.456	43.43	34.32	5.33	-29.62	53.46	78.96	25.50	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.