

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-04

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5825MHz Mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:60.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\57

Memo:

Sample Number: S26020802-001

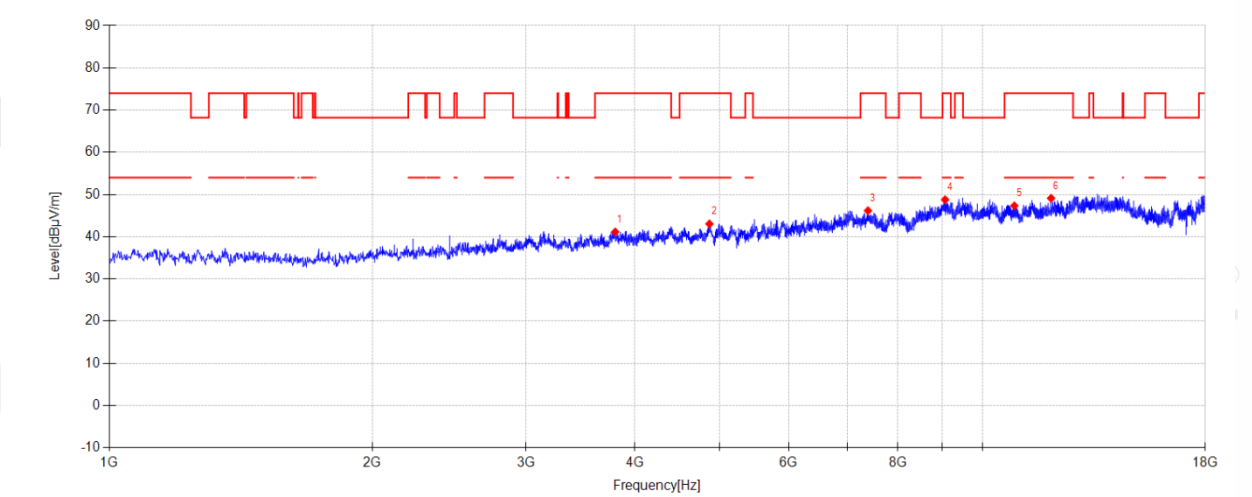

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3796.500	45.55	30.82	4.40	-39.62	41.15	74.00	32.85	PK	Horizontal
2	4867.500	44.97	32.97	4.89	-39.79	43.04	74.00	30.96	PK	Horizontal
3	7393.700	43.21	36.74	6.08	-39.86	46.17	74.00	27.83	PK	Horizontal
4	9061.400	41.71	38.69	7.04	-38.67	48.77	74.00	25.23	PK	Horizontal
5	10877.000	40.28	39.46	7.20	-39.61	47.33	74.00	26.67	PK	Horizontal
6	11983.700	42.08	38.92	7.71	-39.60	49.11	74.00	24.89	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-04

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5825MHz Mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:60.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\58

Memo:

Sample Number: S26020802-001

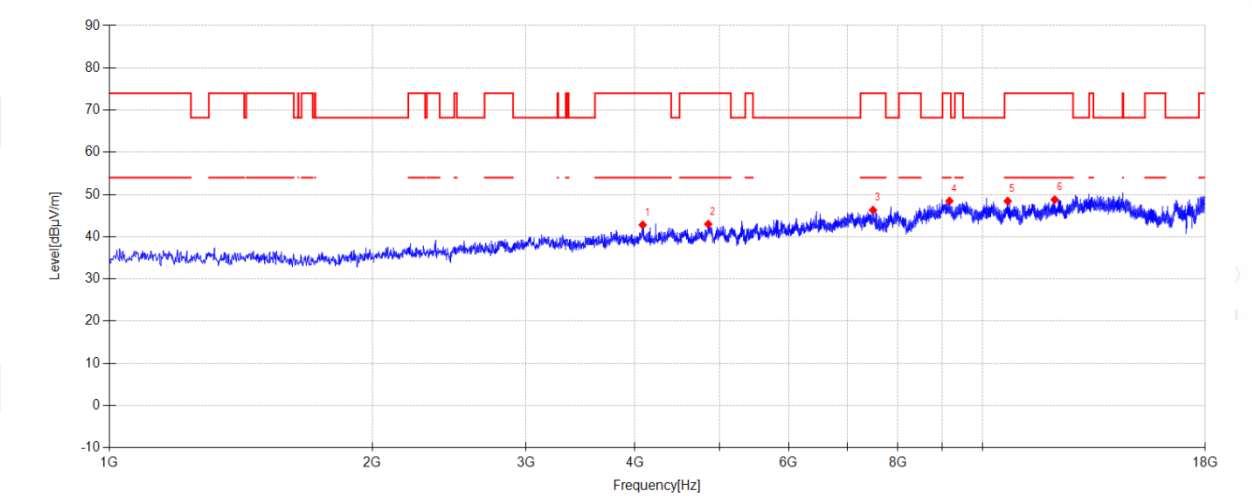

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4082.100	46.87	31.14	4.50	-39.71	42.80	74.00	31.20	PK	Vertical
2	4852.200	44.97	32.91	4.89	-39.79	42.98	74.00	31.02	PK	Vertical
3	7492.300	43.18	36.85	6.11	-39.85	46.29	74.00	27.71	PK	Vertical
4	9166.800	41.38	38.80	7.06	-38.78	48.46	74.00	25.54	PK	Vertical
5	10688.300	41.41	39.46	7.21	-39.63	48.45	74.00	25.55	PK	Vertical
6	12099.300	41.09	39.50	7.71	-39.52	48.78	74.00	25.22	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\13

Memo:

Sample Number: S26020802-001

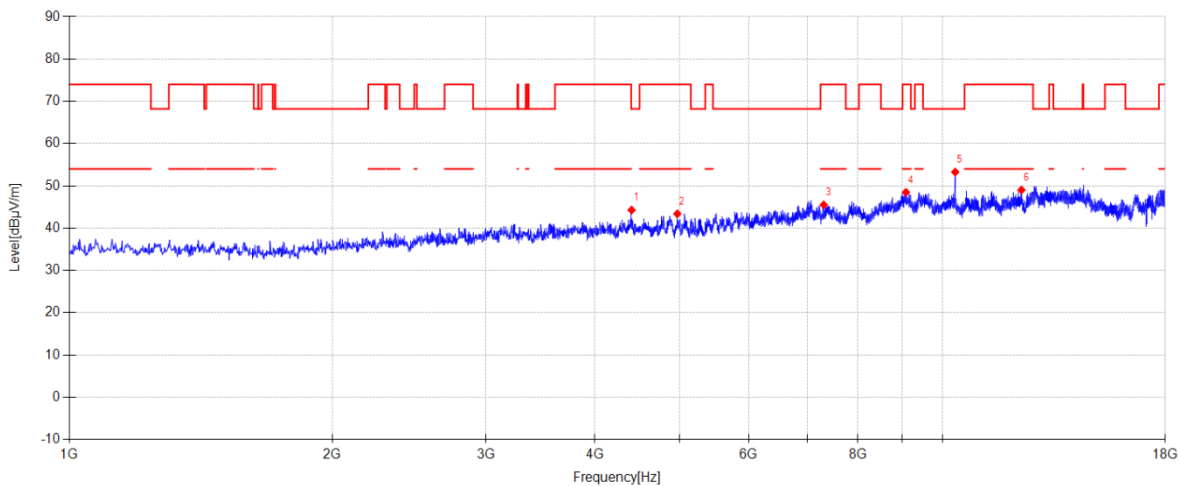

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4405.100	47.50	31.86	4.66	-39.74	44.28	68.20	23.92	PK	Horizontal
2	4969.500	45.20	33.06	4.94	-39.80	43.40	74.00	30.60	PK	Horizontal
3	7312.100	42.33	37.00	6.05	-39.87	45.51	74.00	28.49	PK	Horizontal
4	9081.800	41.79	38.33	7.05	-38.69	48.48	74.00	25.52	PK	Horizontal
5	10343.200	46.82	38.91	7.21	-39.67	53.27	68.20	14.93	PK	Horizontal
6	12315.200	41.33	39.35	7.70	-39.35	49.03	74.00	24.97	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\14

Memo:

Sample Number: S26020802-001

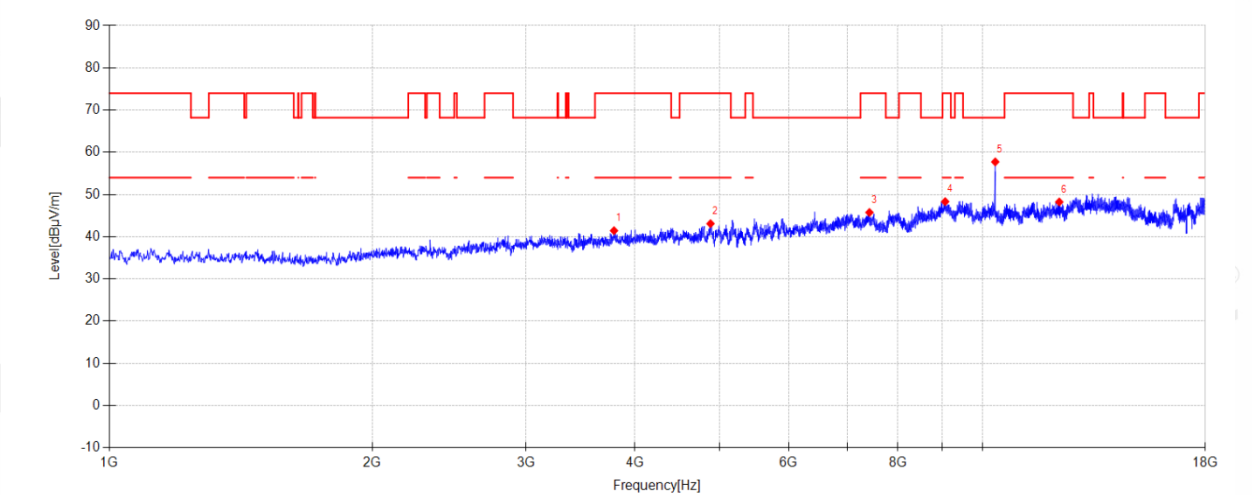


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3784.600	46.09	30.56	4.40	-39.61	41.44	74.00	32.56	PK	Vertical
2	4881.100	44.96	33.02	4.90	-39.79	43.09	74.00	30.91	PK	Vertical
3	7422.600	42.87	36.65	6.09	-39.86	45.75	74.00	28.25	PK	Vertical
4	9063.100	41.29	38.66	7.04	-38.67	48.32	74.00	25.68	PK	Vertical
5	10343.200	51.28	38.91	7.21	-39.67	57.73	68.20	10.47	PK	Vertical
6	12245.500	40.65	39.29	7.70	-39.40	48.24	74.00	25.76	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-10 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU8 5320MHz Mode **Power Supply:** Battery
Condition: Temp:23.9°C;Humi:53.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\15
Memo: Sample Number: S26020802-001

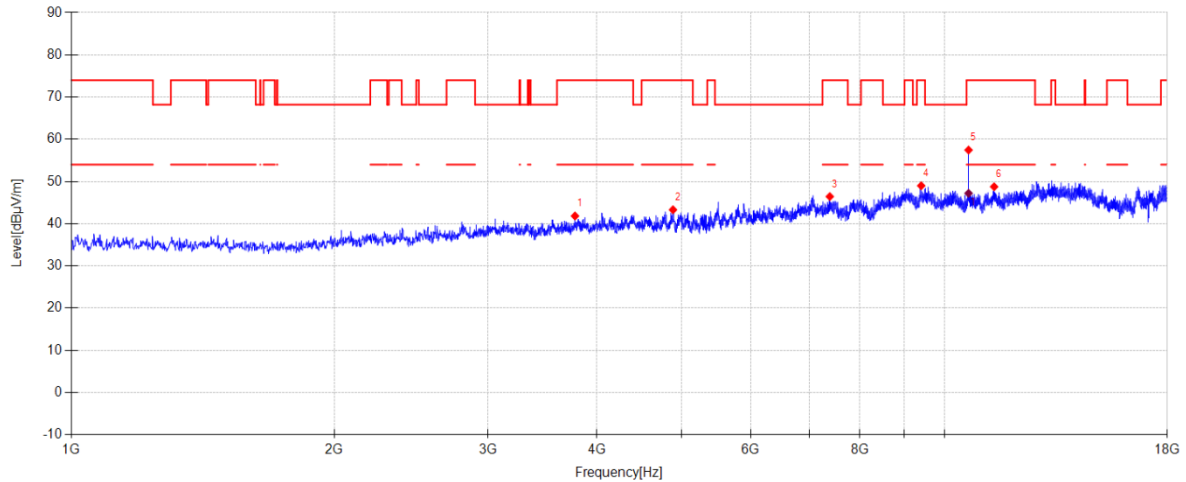

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3774.400	46.71	30.34	4.39	-39.61	41.83	74.00	32.17	PK	Horizontal
2	4887.900	45.14	33.05	4.90	-39.79	43.30	74.00	30.70	PK	Horizontal
3	7390.300	43.45	36.76	6.08	-39.86	46.43	74.00	27.57	PK	Horizontal
4	9404.800	42.29	38.65	7.11	-39.05	49.00	74.00	25.00	PK	Horizontal
5	10656.000	50.51	39.37	7.21	-39.63	57.46	74.00	16.54	PK	Horizontal
6	11400.600	41.16	39.79	7.41	-39.60	48.76	74.00	25.24	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10656.000	40.26	39.37	7.21	47.21	54.00	6.79	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-10 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU8 5320MHz Mode **Power Supply:** Battery
Condition: Temp:23.9°C;Humi:53.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\16
Memo: Sample Number: S26020802-001

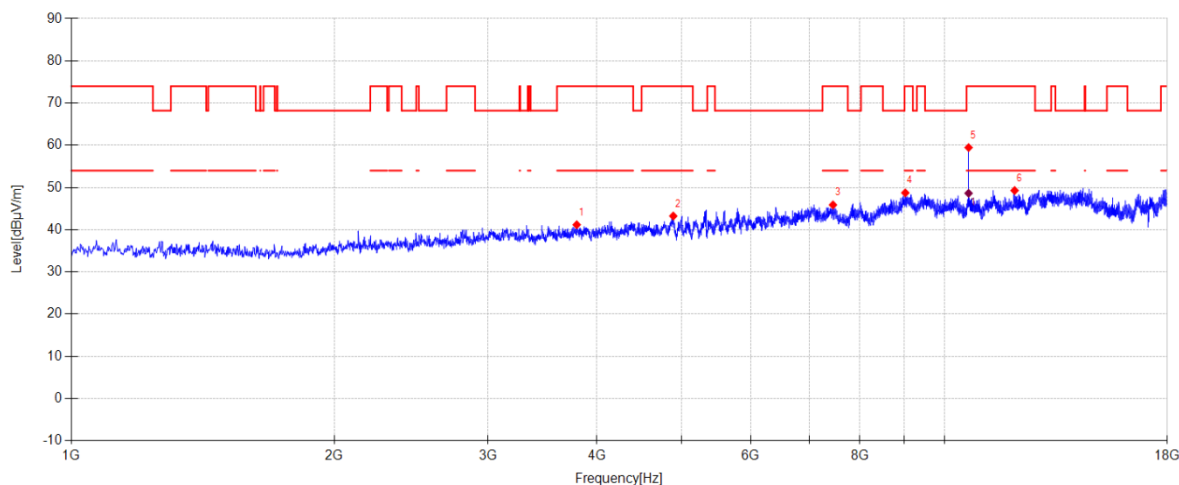**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3791.400	45.69	30.71	4.40	-39.62	41.18	74.00	32.82	PK	Vertical
2	4891.300	45.05	33.07	4.91	-39.79	43.24	74.00	30.76	PK	Vertical
3	7453.200	43.01	36.62	6.10	-39.85	45.88	74.00	28.12	PK	Vertical
4	9018.900	41.68	38.65	7.03	-38.62	48.74	74.00	25.26	PK	Vertical
5	10657.700	52.51	39.37	7.21	-39.63	59.46	74.00	14.54	PK	Vertical
6	12033.000	41.97	39.17	7.72	-39.57	49.29	74.00	24.71	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10656.700	41.68	39.37	7.21	48.63	54.00	5.37	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\17

Memo:

Sample Number: S26020802-001

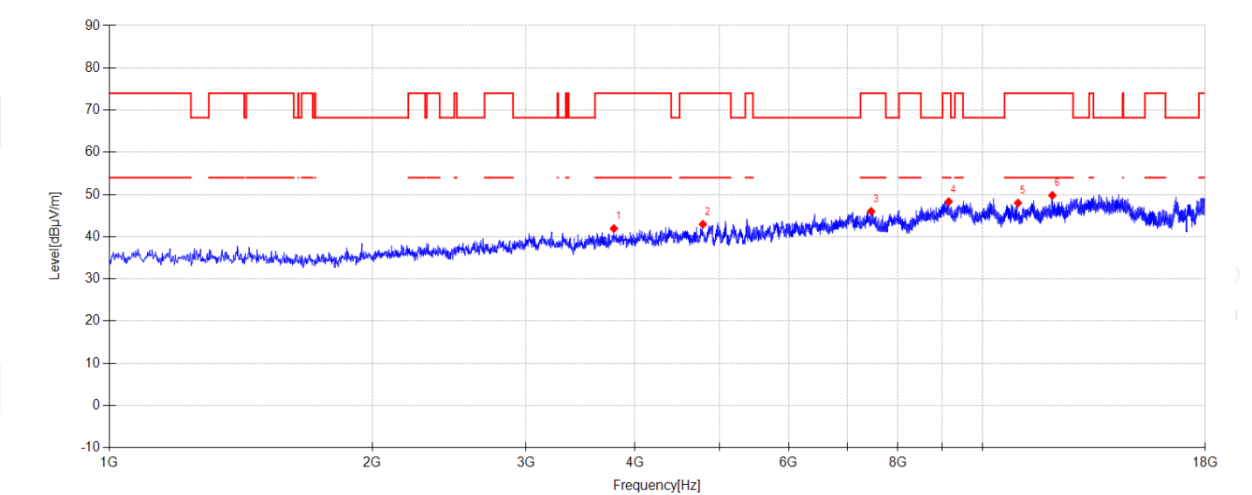

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3782.900	46.64	30.52	4.39	-39.61	41.94	74.00	32.06	PK	Horizontal
2	4784.200	45.76	32.13	4.85	-39.78	42.96	74.00	31.04	PK	Horizontal
3	7456.600	43.13	36.64	6.10	-39.85	46.02	74.00	27.98	PK	Horizontal
4	9148.100	41.05	38.96	7.06	-38.76	48.31	74.00	25.69	PK	Horizontal
5	10982.400	40.72	39.68	7.20	-39.60	48.00	74.00	26.00	PK	Horizontal
6	12022.800	42.55	39.11	7.72	-39.58	49.80	74.00	24.20	PK	Horizontal

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-10 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU0 5500MHz Mode **Power Supply:** Battery
Condition: Temp:23.9°C;Humi:53.9% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\18
Memo: Sample Number: S26020802-001

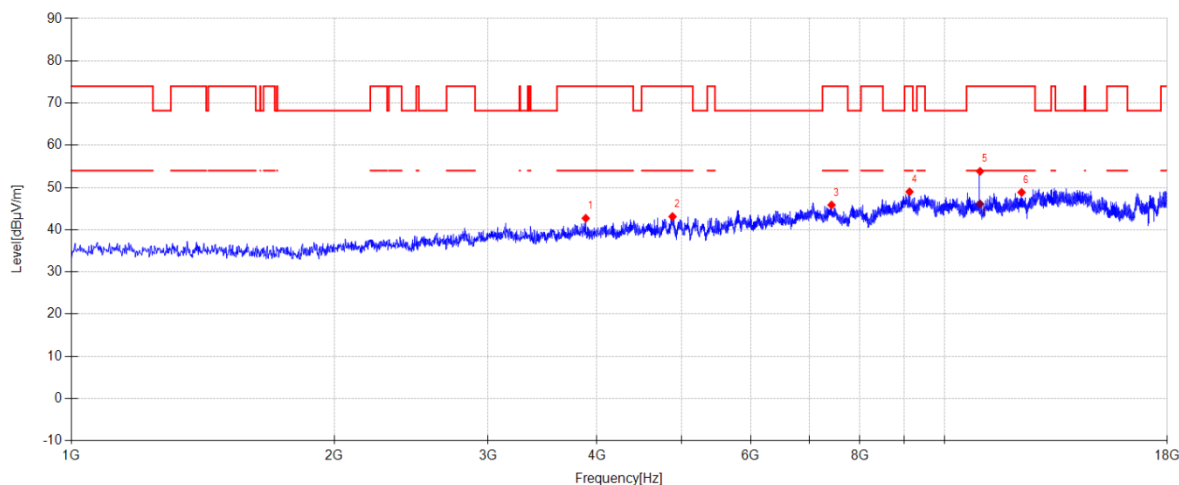**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3883.200	47.24	30.70	4.42	-39.65	42.71	74.00	31.29	PK	Vertical
2	4881.100	44.98	33.02	4.90	-39.79	43.11	74.00	30.89	PK	Vertical
3	7424.300	42.97	36.65	6.09	-39.86	45.85	74.00	28.15	PK	Vertical
4	9120.900	42.24	38.42	7.05	-38.73	48.98	74.00	25.02	PK	Vertical
5	10984.100	46.55	39.68	7.20	-39.60	53.83	74.00	20.17	PK	Vertical
6	12255.700	41.23	39.31	7.70	-39.40	48.84	74.00	25.16	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10984.100	38.84	39.68	7.20	46.12	54.00	7.88	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\19

Memo:

Sample Number: S26020802-001

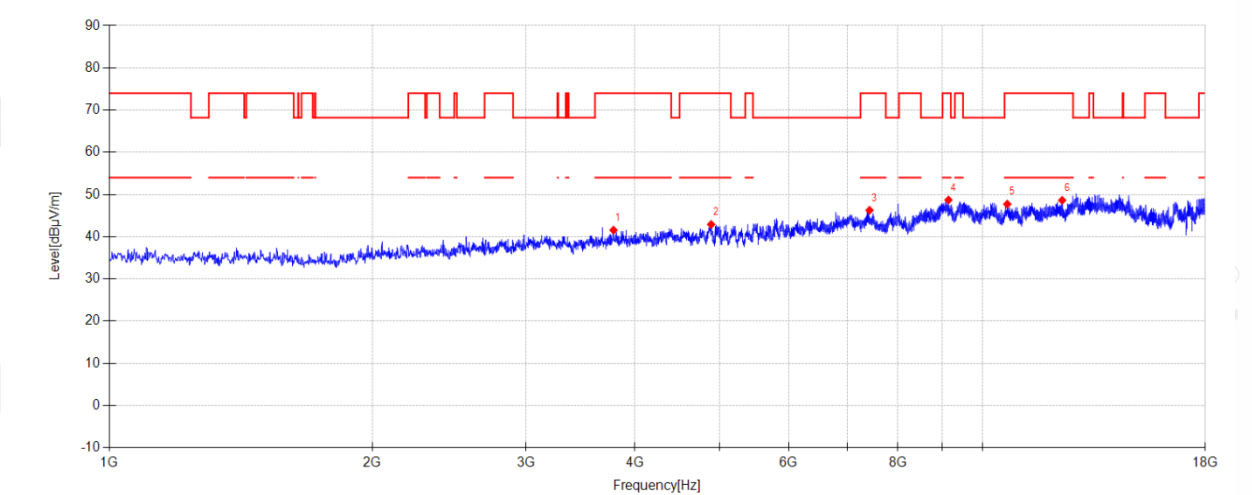

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3779.500	46.33	30.45	4.39	-39.61	41.56	74.00	32.44	PK	Horizontal
2	4889.600	44.74	33.06	4.90	-39.79	42.91	74.00	31.09	PK	Horizontal
3	7424.300	43.38	36.65	6.09	-39.86	46.26	74.00	27.74	PK	Horizontal
4	9143.000	41.55	38.86	7.06	-38.76	48.71	74.00	25.29	PK	Horizontal
5	10676.400	40.71	39.43	7.21	-39.63	47.72	74.00	26.28	PK	Horizontal
6	12339.000	40.98	39.28	7.70	-39.33	48.63	74.00	25.37	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\20

Memo:

Sample Number: S26020802-001

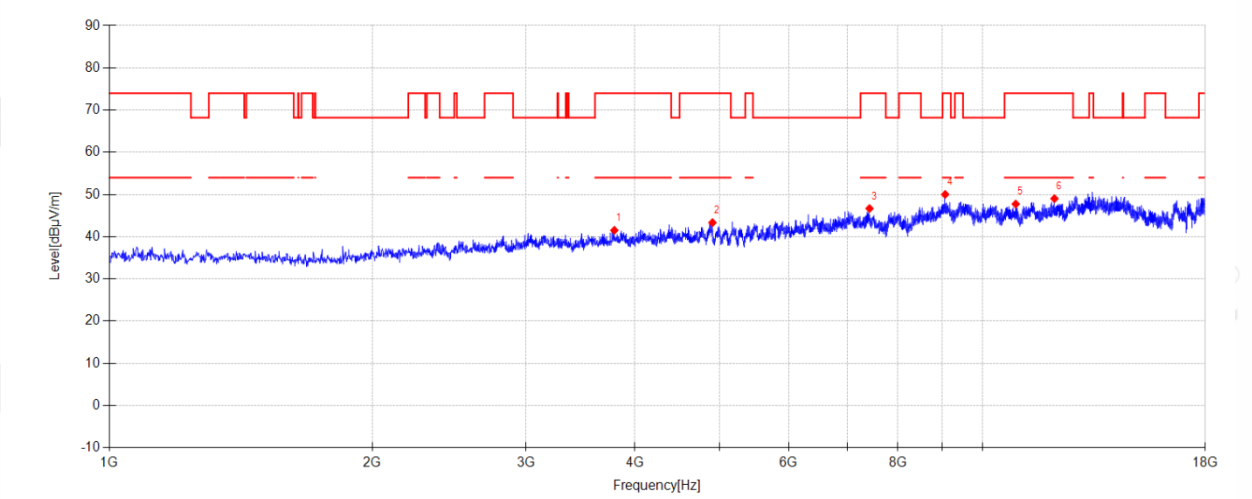

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3788.000	46.10	30.64	4.40	-39.62	41.52	74.00	32.48	PK	Vertical
2	4906.600	45.12	33.10	4.91	-39.79	43.34	74.00	30.66	PK	Vertical
3	7424.300	43.80	36.65	6.09	-39.86	46.68	74.00	27.32	PK	Vertical
4	9063.100	42.99	38.66	7.04	-38.67	50.02	74.00	23.98	PK	Vertical
5	10916.100	40.53	39.62	7.20	-39.61	47.74	74.00	26.26	PK	Vertical
6	12090.800	41.40	39.45	7.71	-39.53	49.03	74.00	24.97	PK	Vertical

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Band Edge Compliance

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2027/02/27
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-10M	DDT-ZC05591	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-3M	DDT-ZC05590	2026/10/10
RF cable	Zhongke Junchuang	JCTB510-NJW-NJW-0.6M	DDT-ZC04595	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-5M	DDT-ZC03800	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS32-RE	DDT-ZC02739	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2026/07/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2027/02/27
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2027/02/27
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2027/02/27
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2026/08/11
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27

14.2. Block diagram of test setup

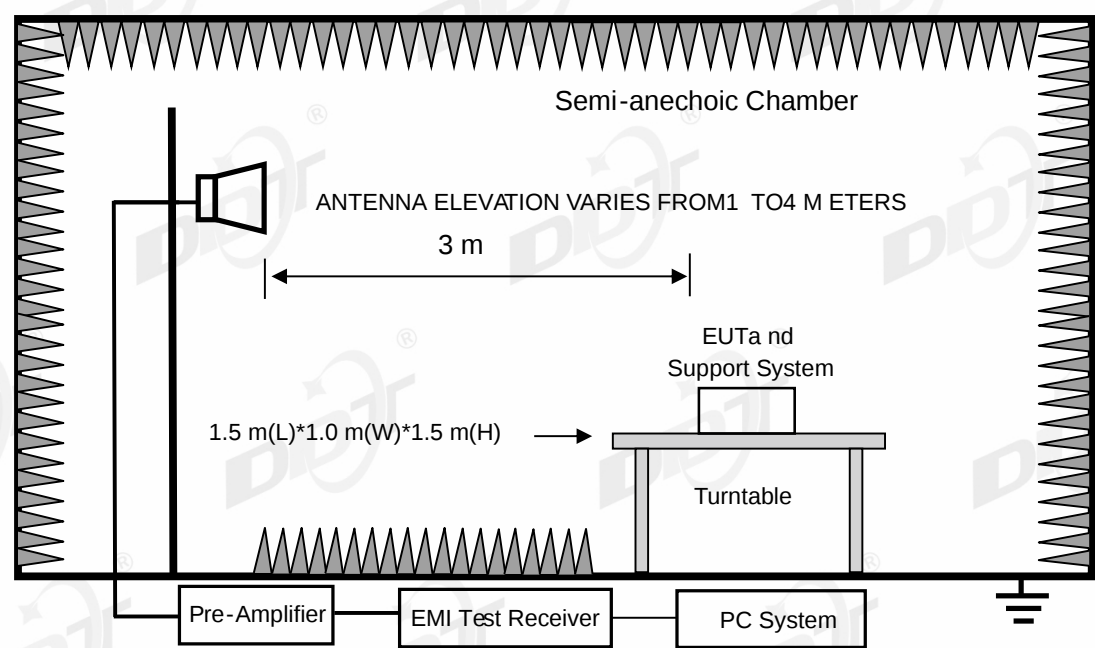

14.3. Limits

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

Same with Emissions in Restricted Frequency Bands except change investigated frequency range from 5.15-5.25 GHz, 5250-5350 GHz, 5470-5725 GHz, 5.725-5.85 GHz.
Remark: All restriction band have been tested, and only the worst case is shown in report.

14.6. Test result

PASS. (See below detailed test result)

14.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-04

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:60.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\159

Memo:

Sample Number: S26020802-001

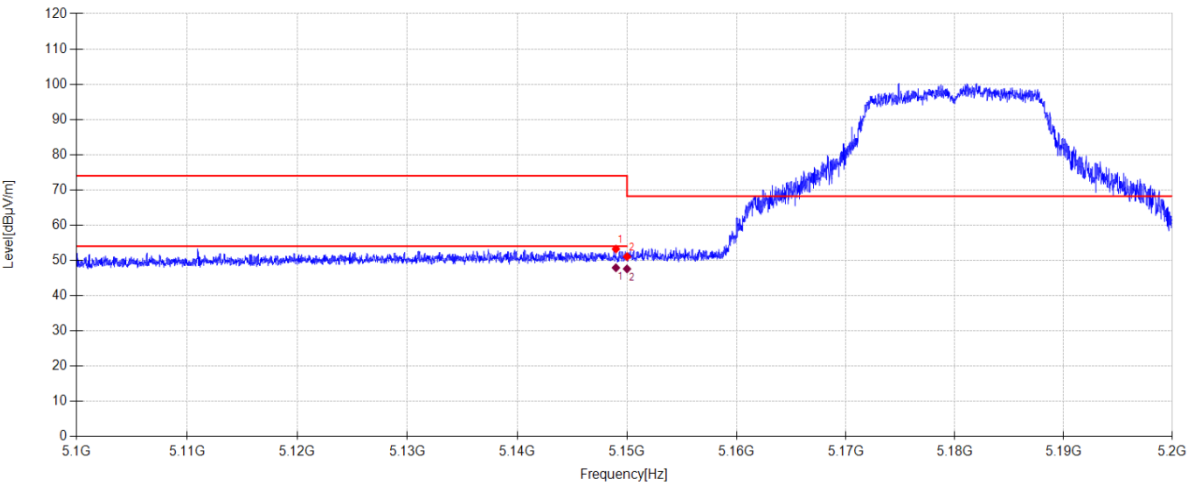

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.990	45.07	32.89	5.03	-29.77	53.22	74.00	20.78	PK	Horizontal
2	5150.000	42.90	32.90	5.04	-29.77	51.07	68.20	17.13	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.990	39.76	32.89	5.03	47.91	54.00	6.09	AV	Horizontal	
2	5150.000	39.42	32.90	5.04	47.59	54.00	6.41	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-04

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:60.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\160

Memo:

Sample Number: S26020802-001

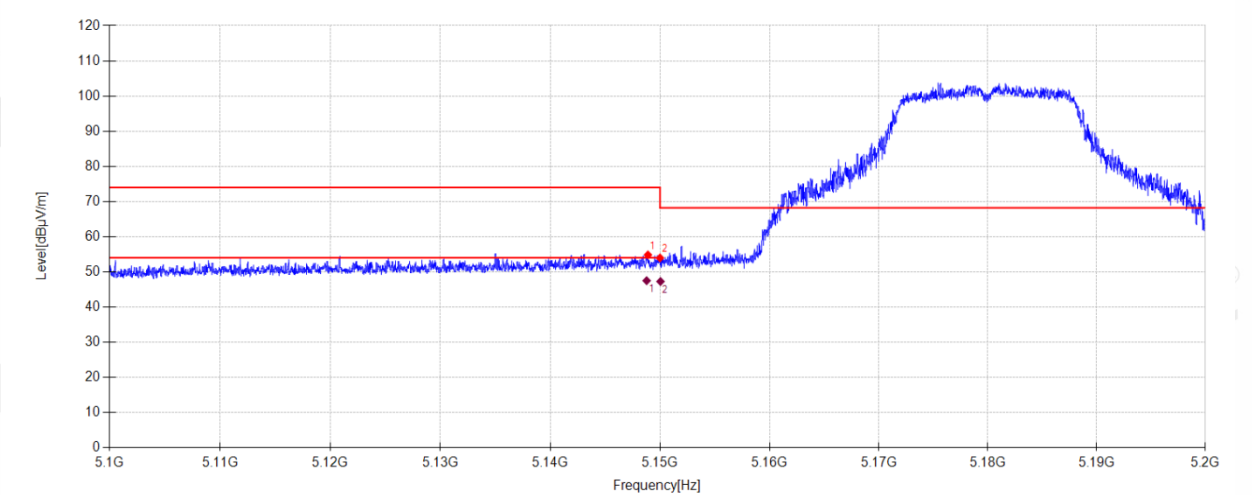

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.900	46.69	32.89	5.03	-29.77	54.84	74.00	19.16	PK	Vertical
2	5150.000	45.80	32.90	5.04	-29.77	53.97	68.20	14.23	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.781	39.35	32.89	5.03	47.50	54.00	6.50	AV	Vertical	
2	5150.047	39.11	32.90	5.04	47.28	54.00	6.72	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-04

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:60.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\163

Memo:

Sample Number: S26020802-001

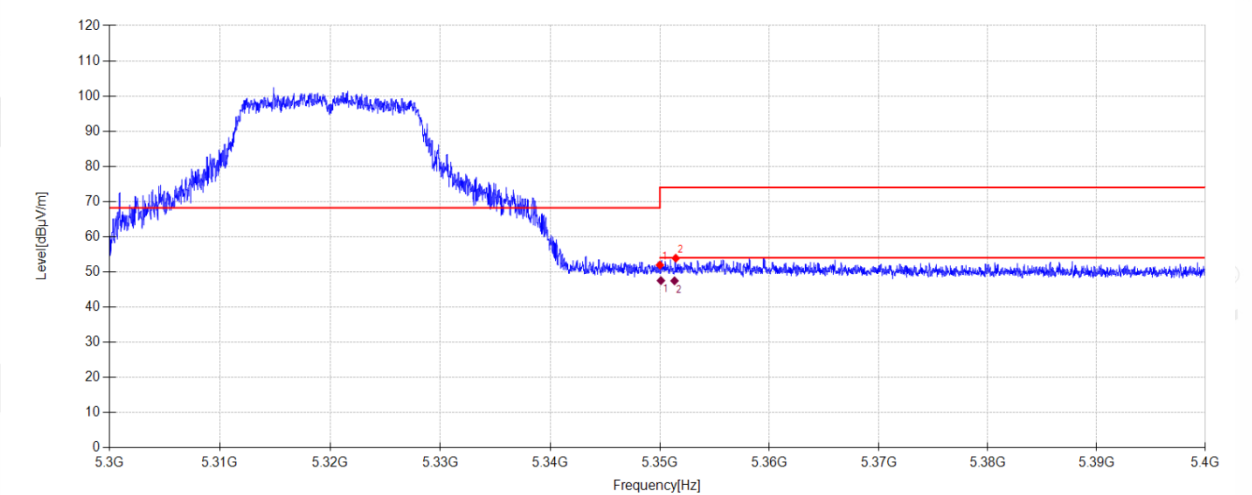

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.03	32.50	5.14	-29.73	51.94	68.20	16.26	PK	Horizontal
2	5351.450	45.97	32.51	5.14	-29.73	53.89	74.00	20.11	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.093	39.61	32.50	5.14	47.52	54.00	6.48	AV	Horizontal	
2	5351.333	39.54	32.51	5.14	47.46	54.00	6.54	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-04

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:60.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\164

Memo:

Sample Number: S26020802-001

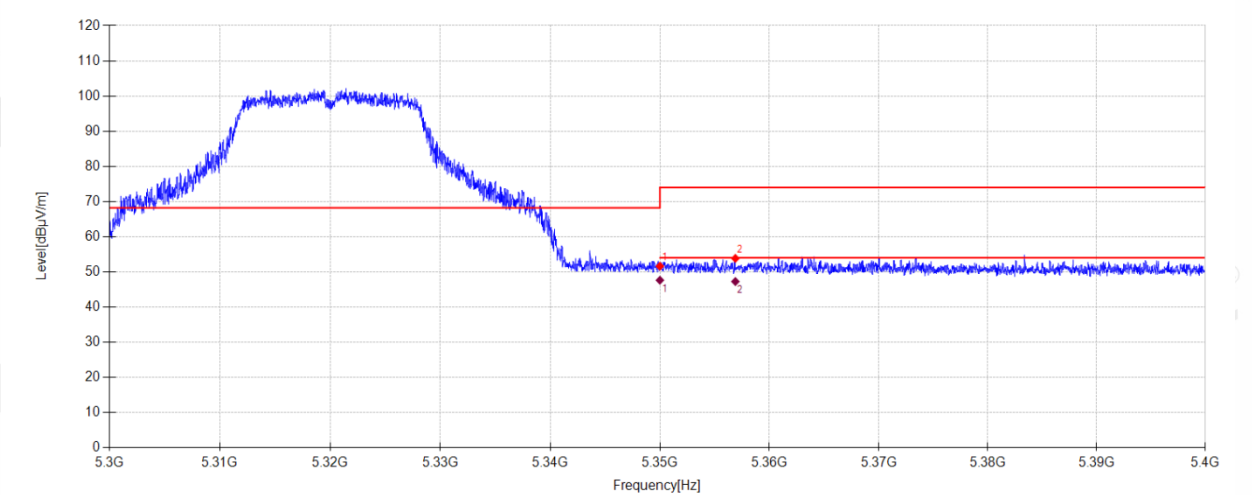

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.71	32.50	5.14	-29.73	51.62	68.20	16.58	PK	Vertical
2	5356.890	45.87	32.56	5.14	-29.73	53.84	74.00	20.16	PK	Vertical


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.73	32.50	5.14	47.64	54.00	6.36	AV	Vertical	
2	5356.890	39.29	32.56	5.14	47.26	54.00	6.74	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-04 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11A 5500MHz Mode **Power Supply:** Battery
Condition: Temp:21.9°C;Humi:60.6% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\175
Memo: Sample Number: S26020802-001

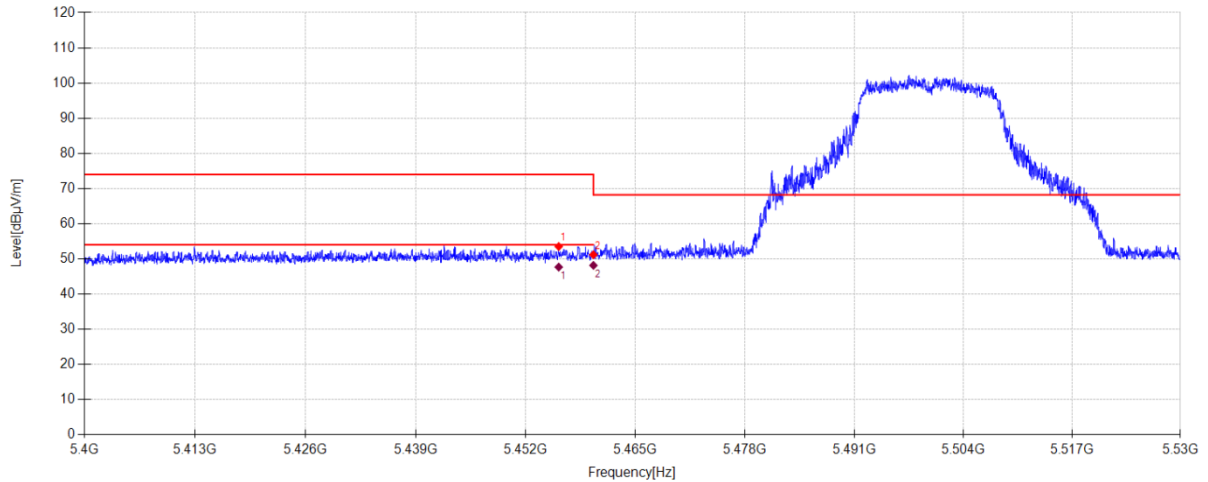**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.887	45.18	32.86	5.19	-29.71	53.52	74.00	20.48	PK	Horizontal
2	5460.000	42.81	32.90	5.19	-29.71	51.19	68.20	17.01	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.887	39.34	32.86	5.19	47.68	54.00	6.32	AV	Horizontal
2	5460.000	39.78	32.90	5.19	48.16	54.00	5.84	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-04 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11A 5500MHz Mode **Power Supply:** Battery
Condition: Temp:21.9°C;Humi:60.6% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\176
Memo: Sample Number: S26020802-001

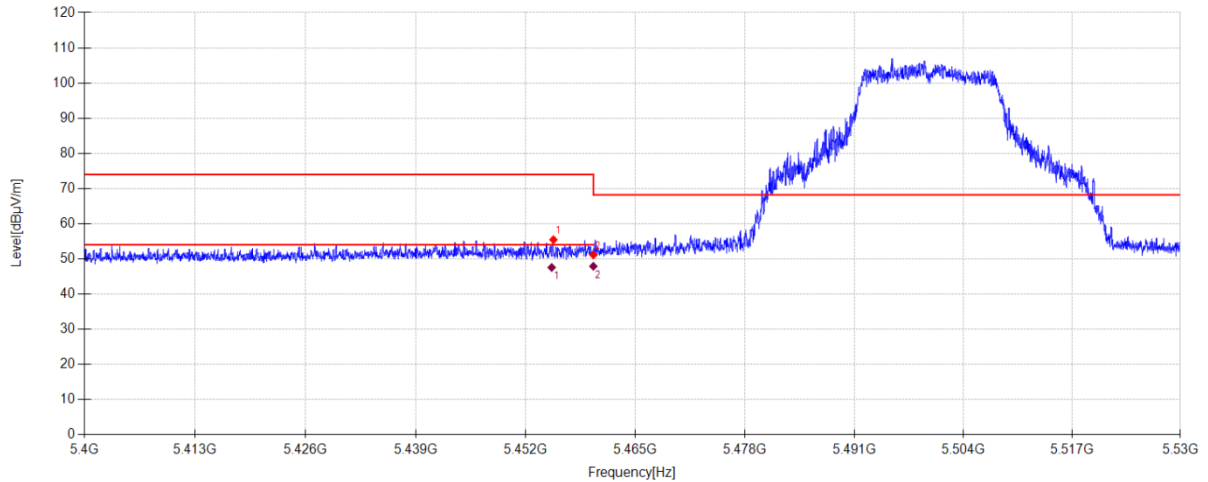**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.263	47.13	32.85	5.19	-29.71	55.46	74.00	18.54	PK	Vertical
2	5460.000	42.74	32.90	5.19	-29.71	51.12	68.20	17.08	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.054	39.23	32.85	5.19	47.56	54.00	6.44	AV	Vertical
2	5459.992	39.53	32.90	5.19	47.91	54.00	6.09	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-04

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:60.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\177

Memo:

Sample Number: S26020802-001

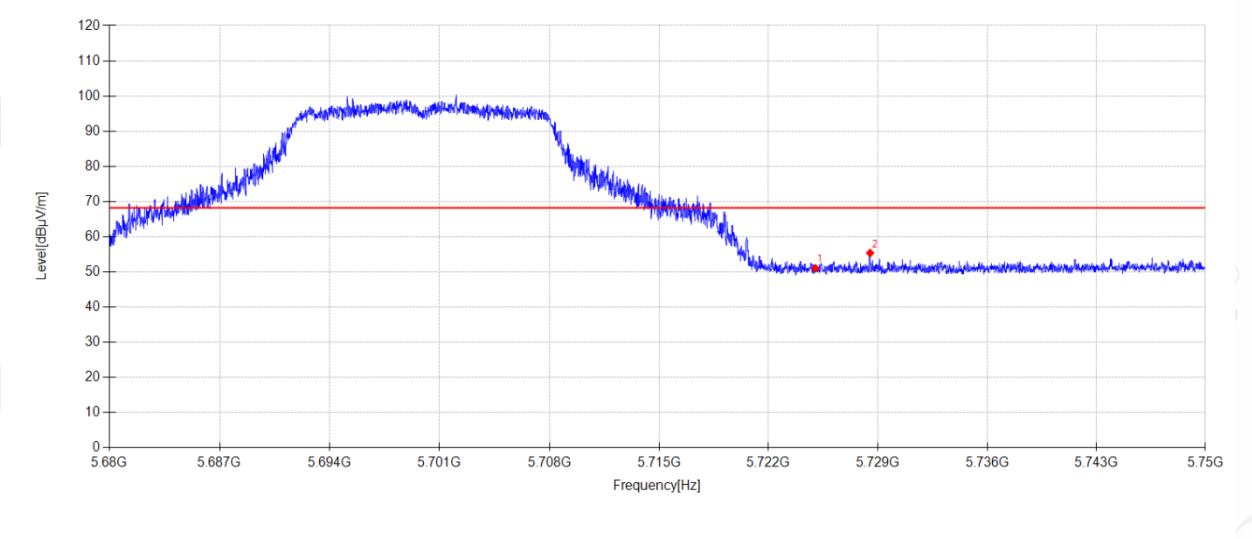

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.90	33.45	5.32	-29.65	51.02	68.20	17.18	PK	Horizontal
2	5728.496	46.20	33.50	5.32	-29.65	55.37	68.20	12.83	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-04

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:60.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\178

Memo:

Sample Number: S26020802-001

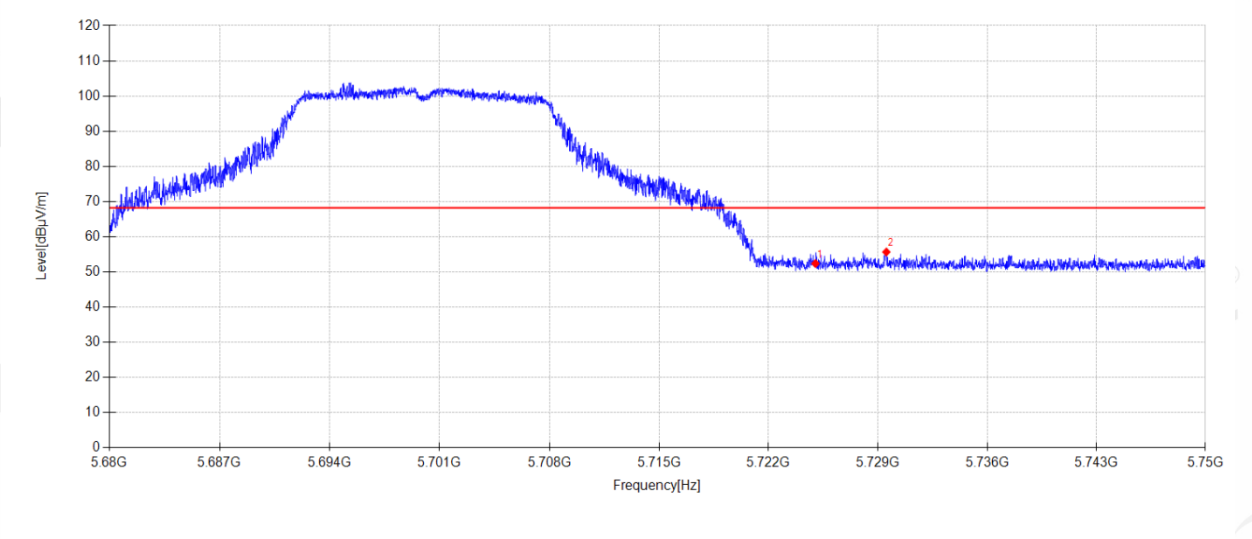

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.26	33.45	5.32	-29.65	52.38	68.20	15.82	PK	Vertical
2	5729.539	46.48	33.51	5.32	-29.65	55.66	68.20	12.54	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\179

Memo:

Sample Number: S26020802-001

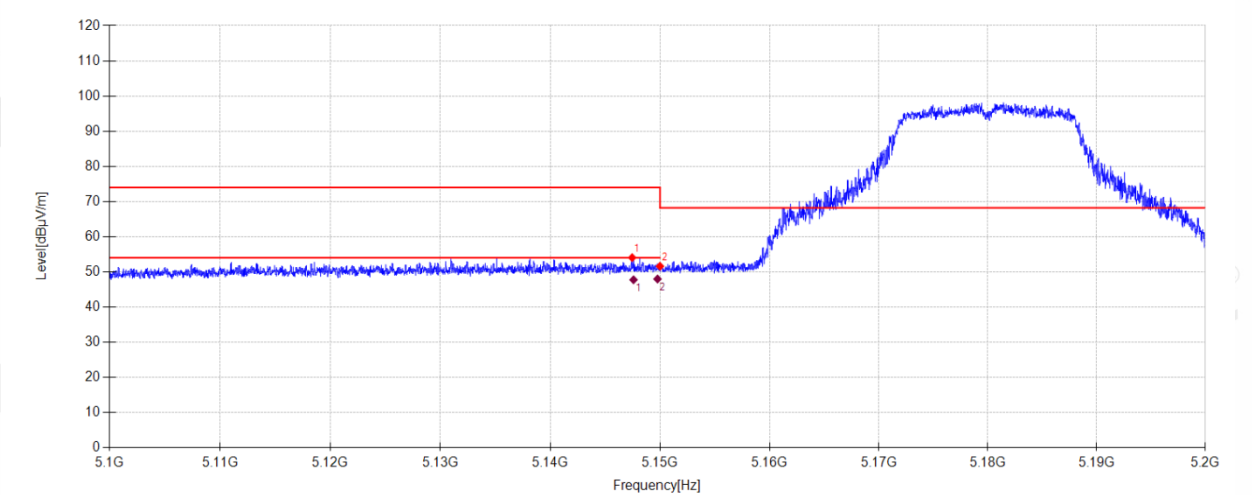

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.460	45.92	32.88	5.03	-29.77	54.06	74.00	19.94	PK	Horizontal
2	5150.000	43.44	32.90	5.04	-29.77	51.61	68.20	16.59	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.586	39.62	32.88	5.03	47.76	54.00	6.24	AV	Horizontal	
2	5149.770	39.81	32.90	5.04	47.98	54.00	6.02	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-05 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11A 5180MHz Mode **Power Supply:** Battery
Condition: Temp:25.3°C;Humi:58.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\180
Memo: Sample Number: S26020802-001

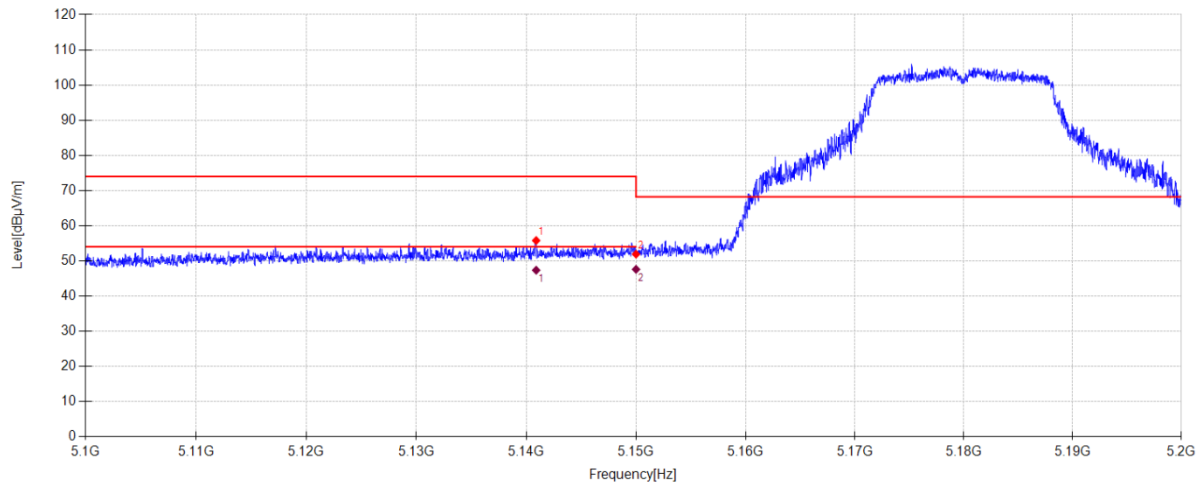**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5140.900	47.70	32.83	5.03	-29.77	55.79	74.00	18.21	PK	Vertical
2	5150.000	43.74	32.90	5.04	-29.77	51.91	68.20	16.29	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5140.900	39.26	32.83	5.03	47.35	54.00	6.65	AV	Vertical
2	5150.000	39.43	32.90	5.04	47.60	54.00	6.40	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\181

Memo:

Sample Number: S26020802-001

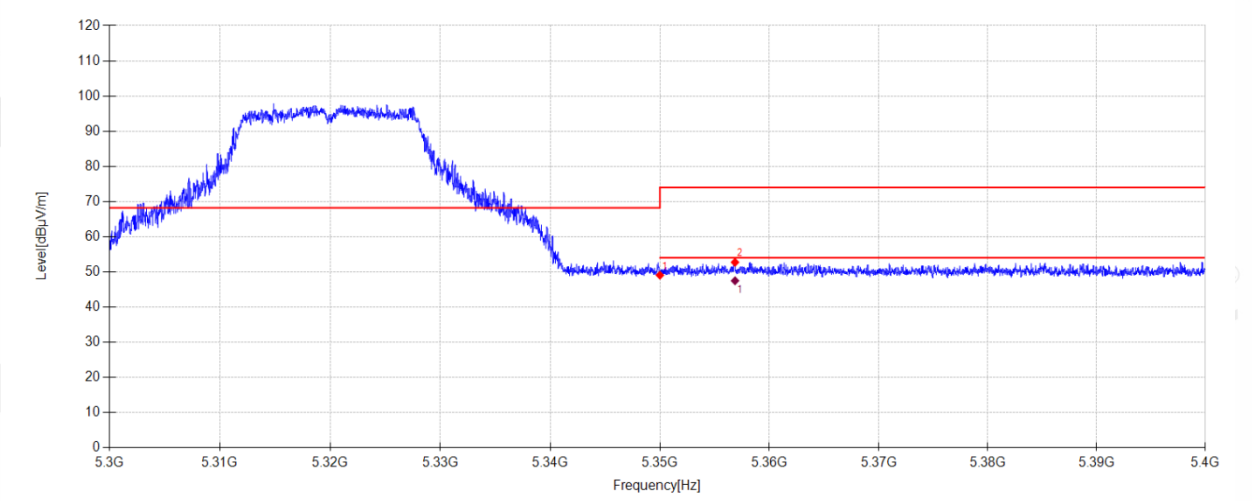

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.14	32.50	5.14	-29.73	49.05	68.20	19.15	PK	Horizontal
2	5356.860	44.77	32.55	5.14	-29.73	52.73	74.00	21.27	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5356.860	39.52	32.55	5.14	47.48	54.00	6.52	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\182

Memo:

Sample Number: S26020802-001

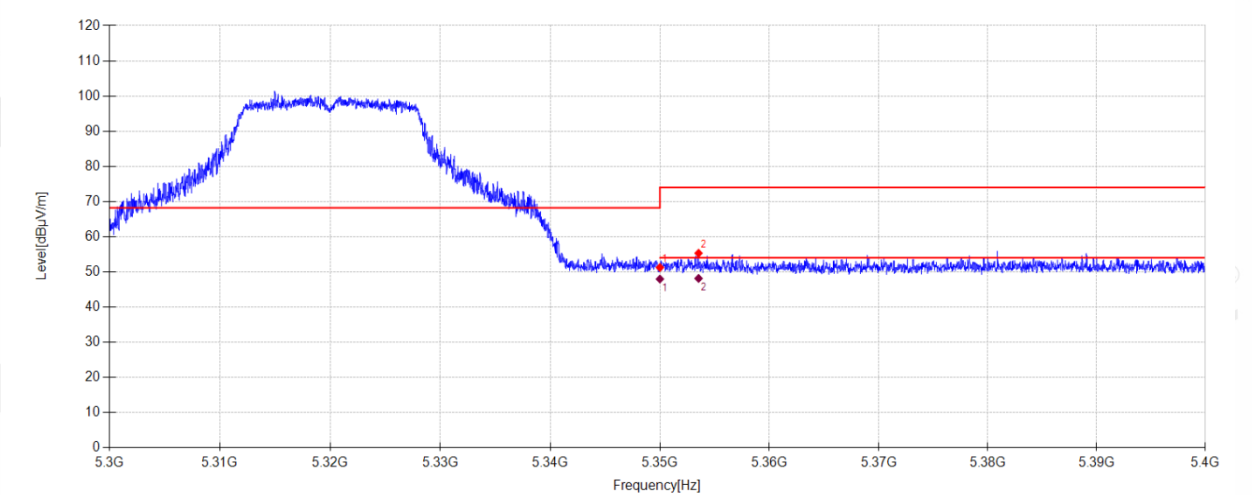

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.34	32.50	5.14	-29.73	51.25	68.20	16.95	PK	Vertical
2	5353.530	47.37	32.53	5.14	-29.73	55.31	74.00	18.69	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	40.06	32.50	5.14	47.97	54.00	6.03	AV	Vertical	
2	5353.530	40.21	32.53	5.14	48.15	54.00	5.85	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\183

Memo:

Sample Number: S26020802-001

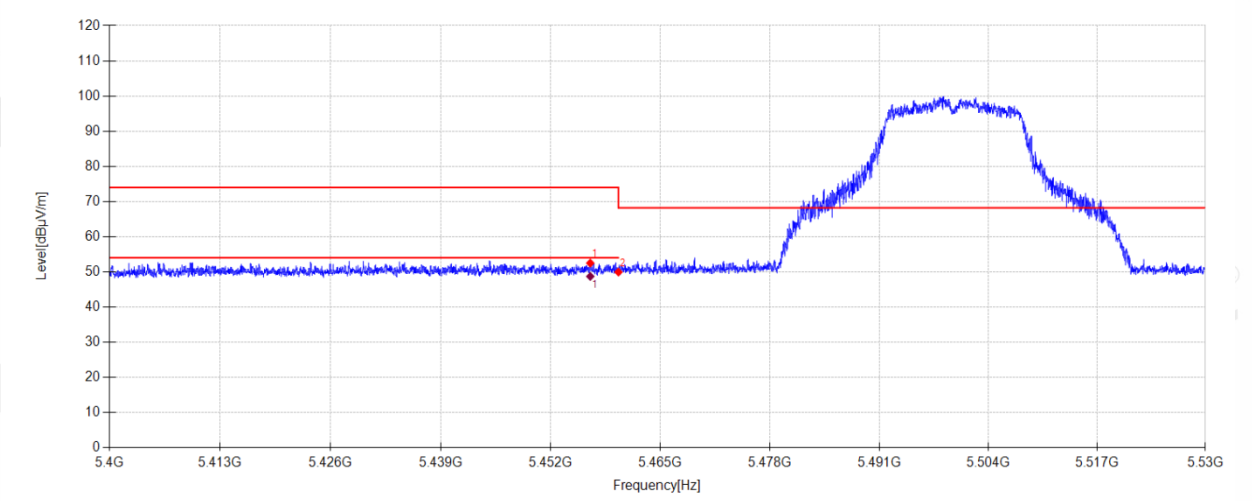

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.667	44.15	32.87	5.19	-29.71	52.50	74.00	21.50	PK	Horizontal
2	5460.000	41.57	32.90	5.19	-29.71	49.95	68.20	18.25	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.667	40.37	32.87	5.19	48.72	54.00	5.28	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\184

Memo:

Sample Number: S26020802-001

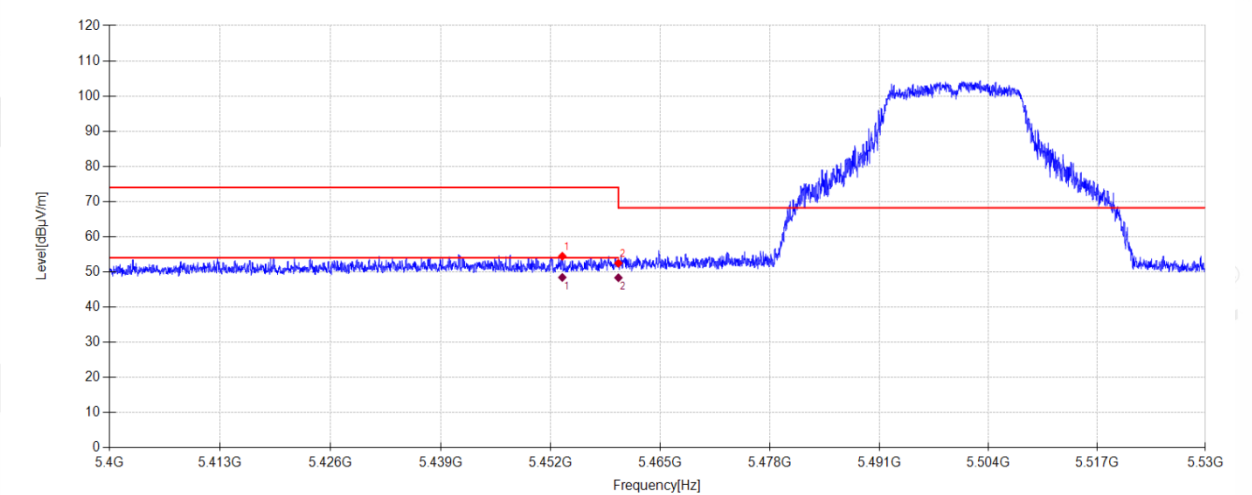

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.352	46.14	32.83	5.19	-29.71	54.45	74.00	19.55	PK	Vertical
2	5460.000	44.09	32.90	5.19	-29.71	52.47	68.20	15.73	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5453.352	40.12	32.83	5.19	48.43	54.00	5.57	AV	Vertical	
2	5460.000	39.96	32.90	5.19	48.34	54.00	5.66	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\185

Memo:

Sample Number: S26020802-001

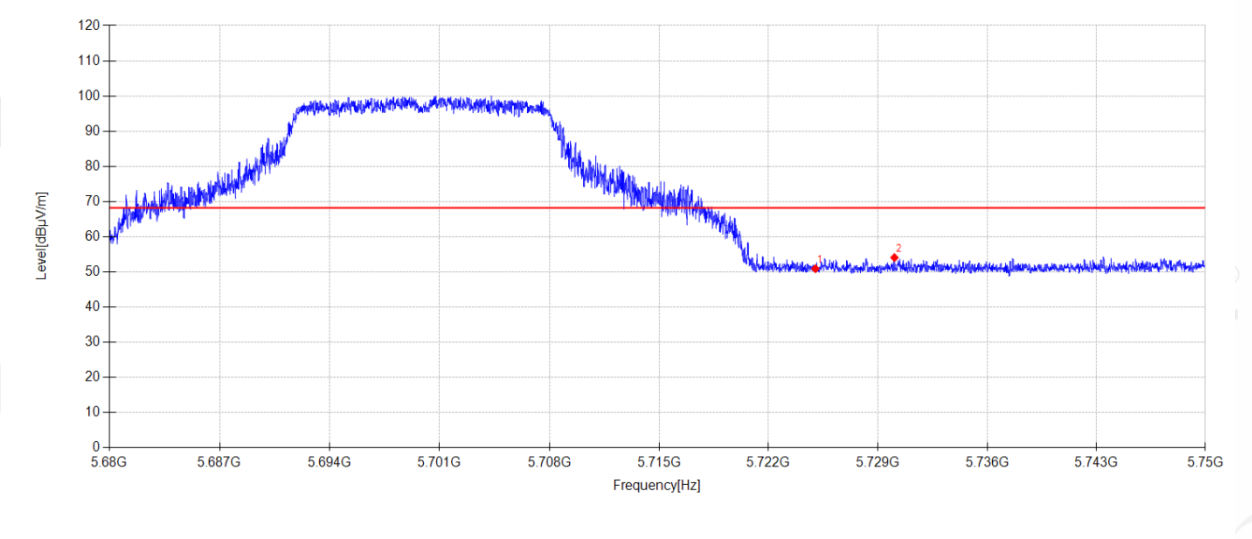

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.79	33.45	5.32	-29.65	50.91	68.20	17.29	PK	Horizontal
2	5730.057	44.88	33.52	5.33	-29.65	54.08	68.20	14.12	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\186

Memo:

Sample Number: S26020802-001

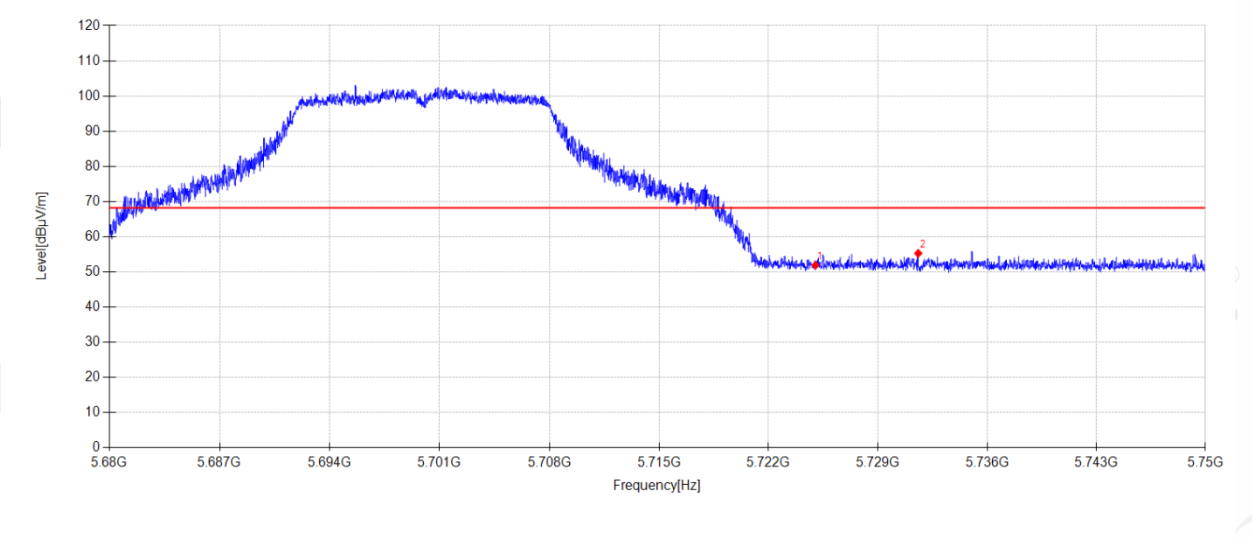

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.76	33.45	5.32	-29.65	51.88	68.20	16.32	PK	Vertical
2	5731.583	46.06	33.54	5.33	-29.65	55.28	68.20	12.92	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\187

Memo:

Sample Number: S26020802-001

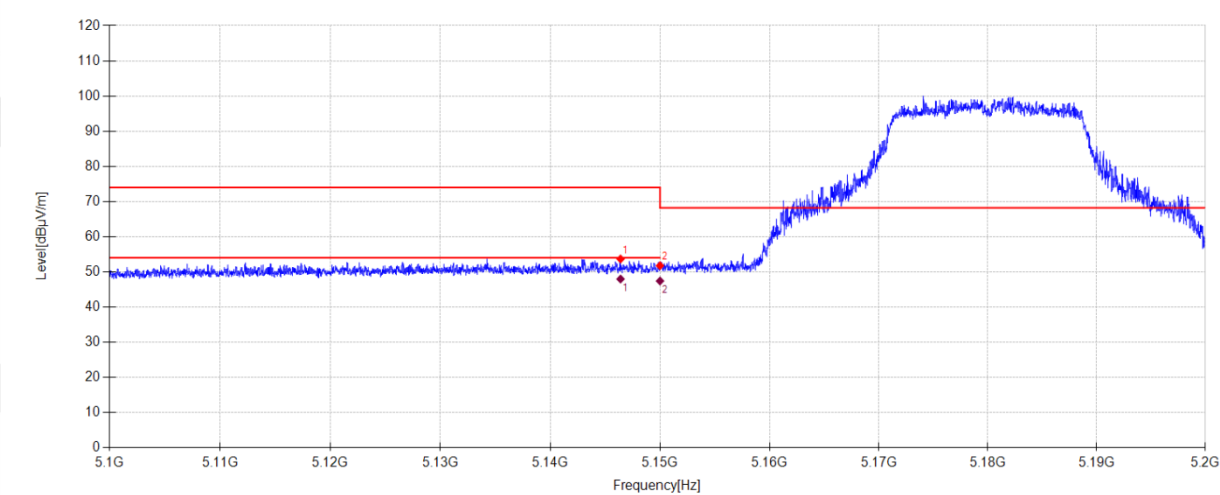

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.400	45.55	32.87	5.03	-29.77	53.68	74.00	20.32	PK	Horizontal
2	5150.000	43.61	32.90	5.04	-29.77	51.78	68.20	16.42	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5146.400	39.84	32.87	5.03	47.97	54.00	6.03	AV	Horizontal	
2	5150.000	39.25	32.90	5.04	47.42	54.00	6.58	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\188

Memo:

Sample Number: S26020802-001

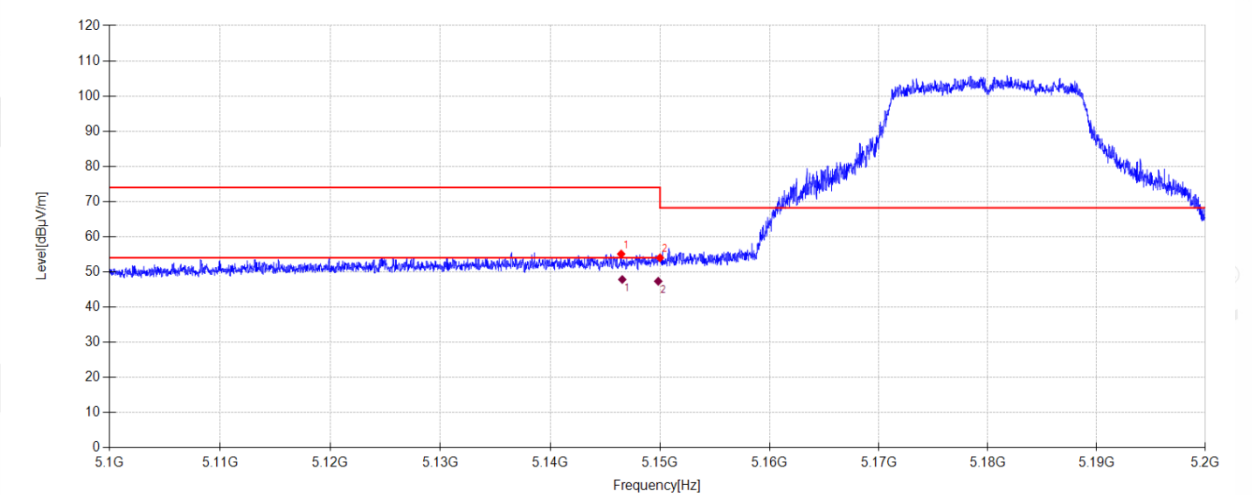

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.460	46.95	32.87	5.03	-29.77	55.08	74.00	18.92	PK	Vertical
2	5150.000	45.83	32.90	5.04	-29.77	54.00	68.20	14.20	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5146.558	39.71	32.87	5.03	47.84	54.00	6.16	AV	Vertical	
2	5149.836	39.17	32.90	5.04	47.34	54.00	6.66	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\189

Memo:

Sample Number: S26020802-001

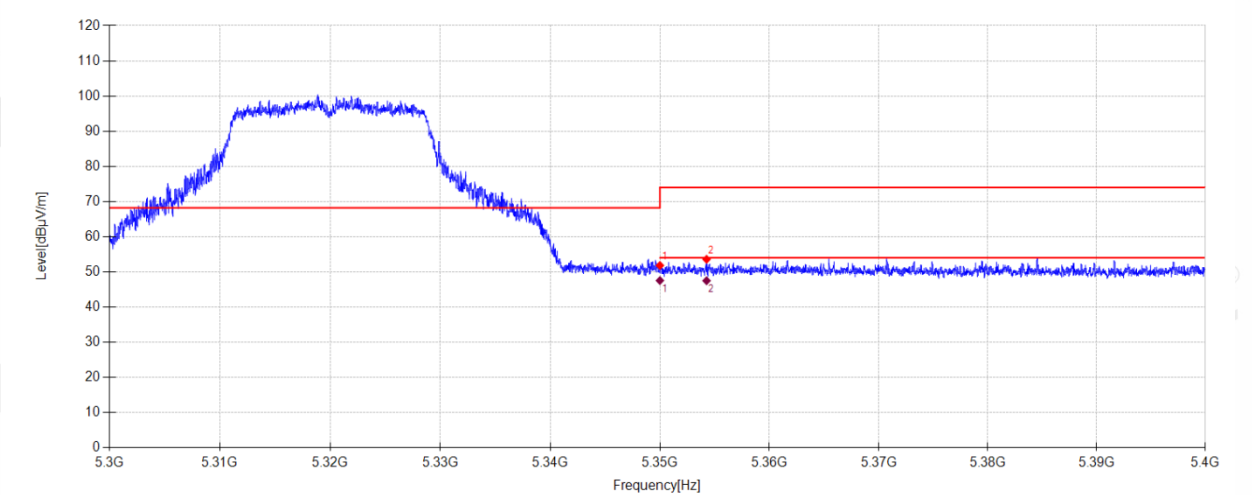

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.92	32.50	5.14	-29.73	51.83	68.20	16.37	PK	Horizontal
2	5354.260	45.64	32.53	5.14	-29.73	53.58	74.00	20.42	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.63	32.50	5.14	47.54	54.00	6.46	AV	Horizontal	
2	5354.260	39.55	32.53	5.14	47.49	54.00	6.51	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\190

Memo:

Sample Number: S26020802-001

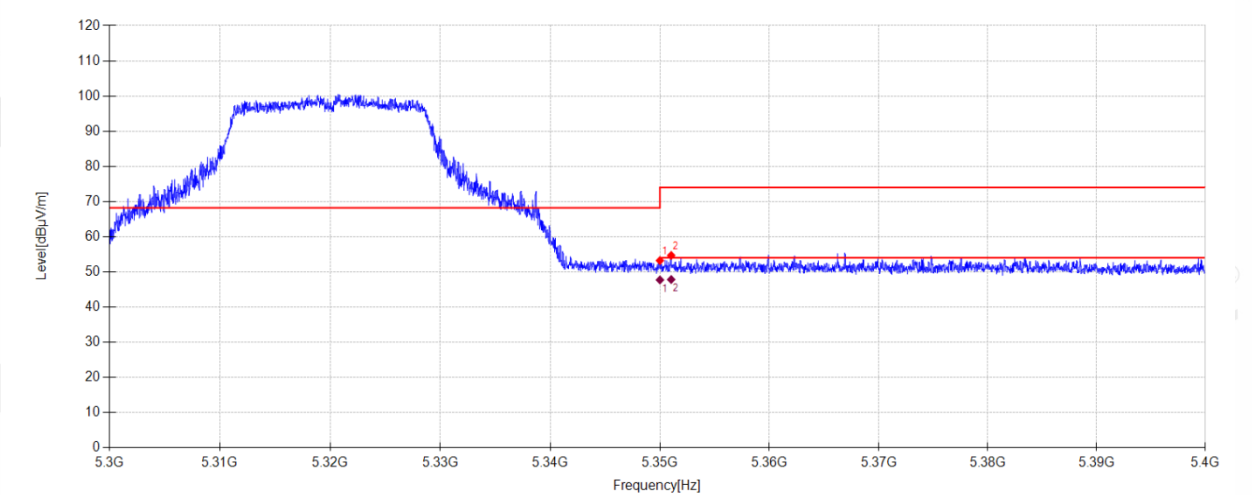

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.31	32.50	5.14	-29.73	53.22	68.20	14.98	PK	Vertical
2	5351.030	46.76	32.51	5.14	-29.73	54.68	74.00	19.32	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.81	32.50	5.14	47.72	54.00	6.28	AV	Vertical	
2	5351.030	39.92	32.51	5.14	47.84	54.00	6.16	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\191

Memo:

Sample Number: S26020802-001

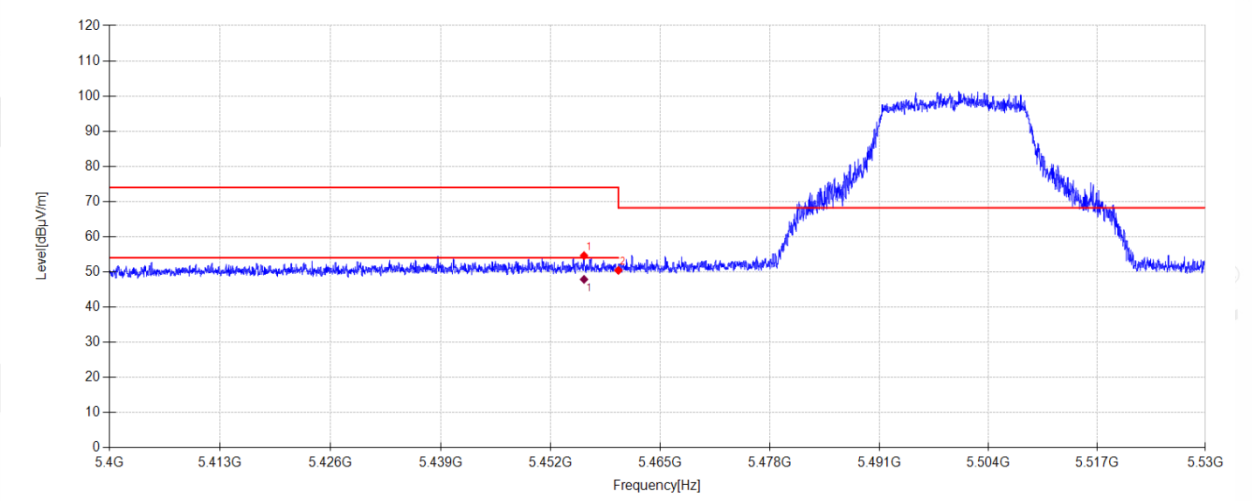

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.926	46.29	32.86	5.19	-29.71	54.63	74.00	19.37	PK	Horizontal
2	5460.000	42.05	32.90	5.19	-29.71	50.43	68.20	17.77	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.926	39.53	32.86	5.19	47.87	54.00	6.13	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\192

Memo:

Sample Number: S26020802-001

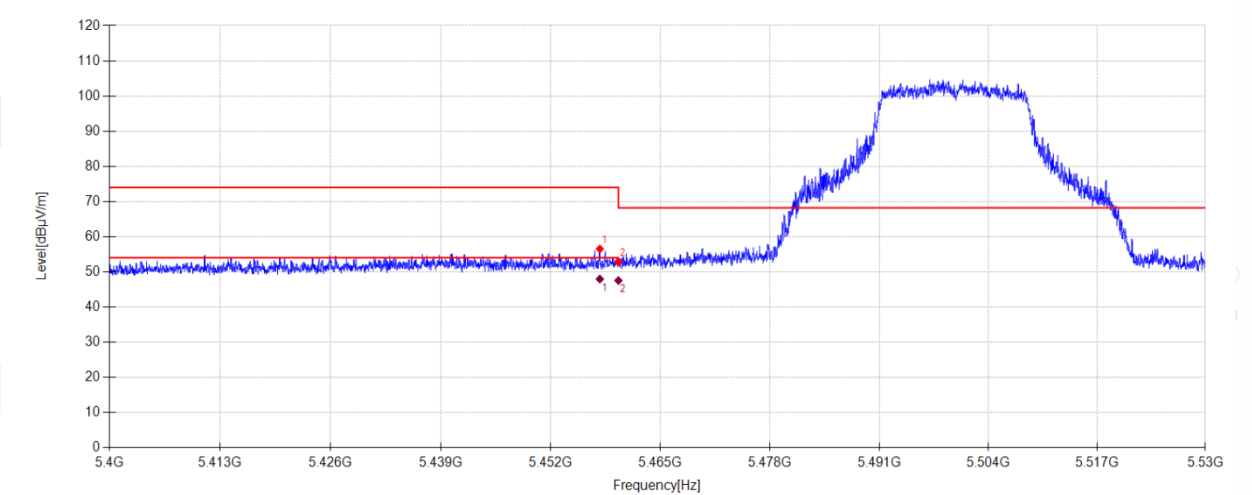

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.798	48.17	32.88	5.19	-29.71	56.53	74.00	17.47	PK	Vertical
2	5460.000	44.48	32.90	5.19	-29.71	52.86	68.20	15.34	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.798	39.61	32.88	5.19	47.97	54.00	6.03	AV	Vertical	
2	5460.000	39.16	32.90	5.19	47.54	54.00	6.46	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\193

Memo:

Sample Number: S26020802-001

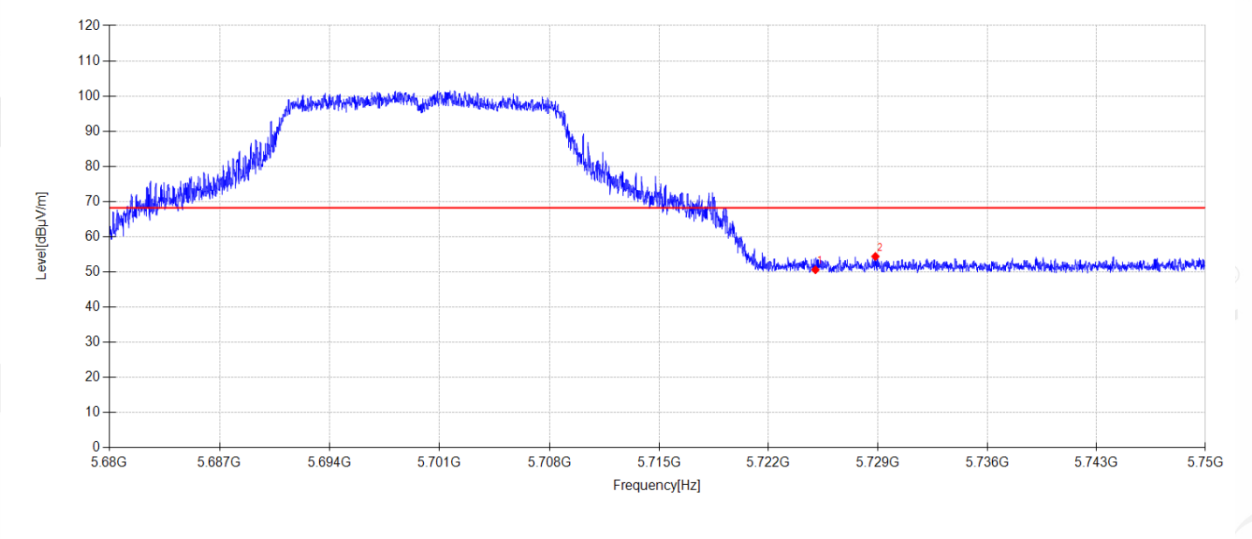

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.48	33.45	5.32	-29.65	50.60	68.20	17.60	PK	Horizontal
2	5728.839	45.21	33.50	5.32	-29.65	54.38	68.20	13.82	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\194

Memo:

Sample Number: S26020802-001

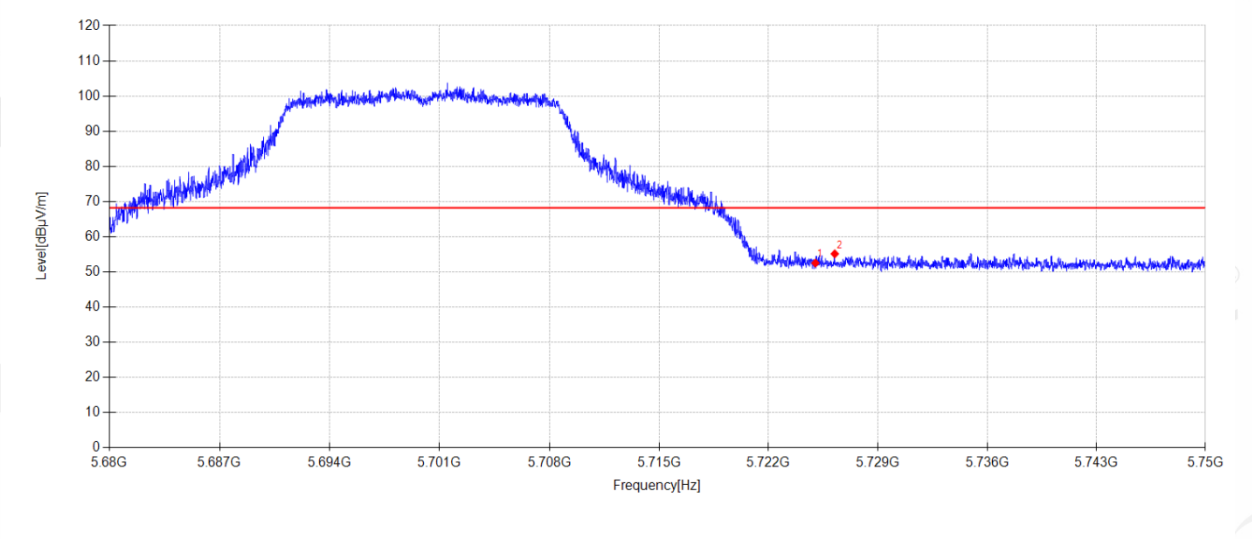

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.39	33.45	5.32	-29.65	52.51	68.20	15.69	PK	Vertical
2	5726.235	45.99	33.47	5.32	-29.65	55.13	68.20	13.07	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5190MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\195

Memo:

Sample Number: S26020802-001

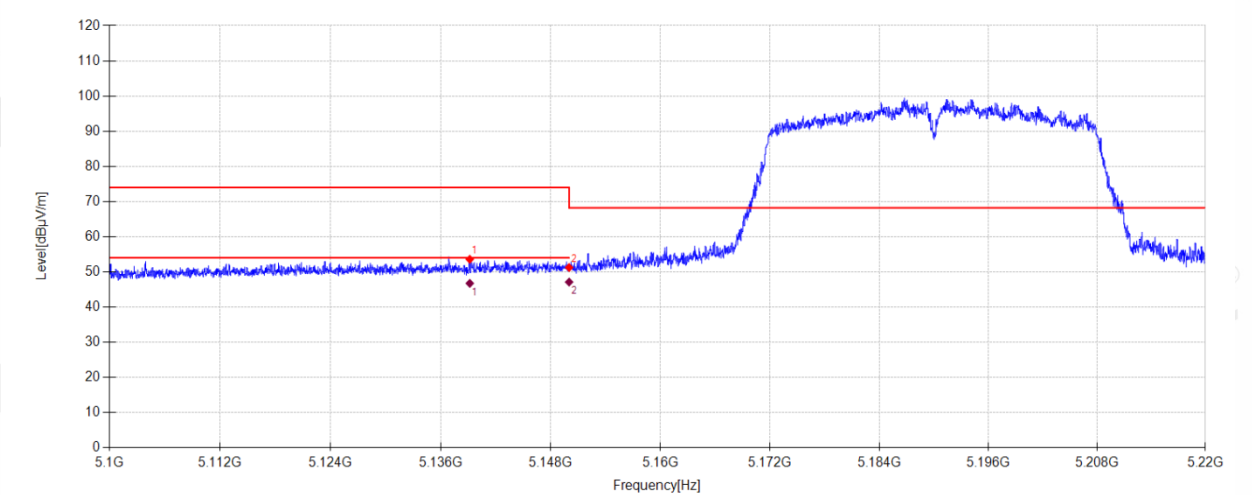

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5139.156	45.51	32.81	5.03	-29.77	53.58	74.00	20.42	PK	Horizontal
2	5150.000	43.07	32.90	5.04	-29.77	51.24	68.20	16.96	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5139.156	38.67	32.81	5.03	46.74	54.00	7.26	AV	Horizontal	
2	5150.000	38.95	32.90	5.04	47.12	54.00	6.88	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5190MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\196

Memo:

Sample Number: S26020802-001

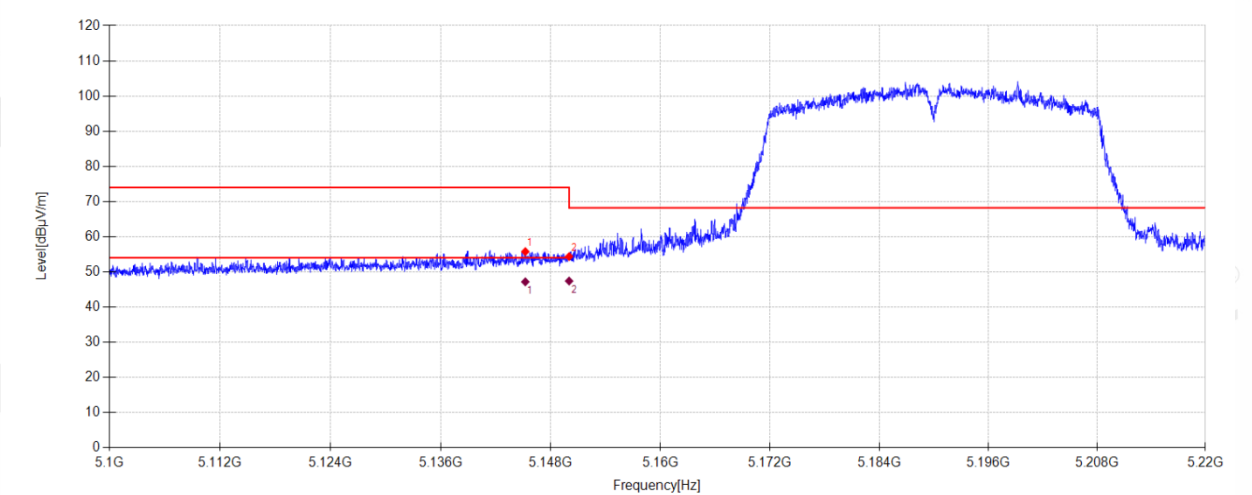

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.216	47.64	32.86	5.03	-29.77	55.76	74.00	18.24	PK	Vertical
2	5150.000	46.19	32.90	5.04	-29.77	54.36	68.20	13.84	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5145.216	39.06	32.86	5.03	47.18	54.00	6.82	AV	Vertical	
2	5150.000	39.24	32.90	5.04	47.41	54.00	6.59	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5310MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\197

Memo:

Sample Number: S26020802-001

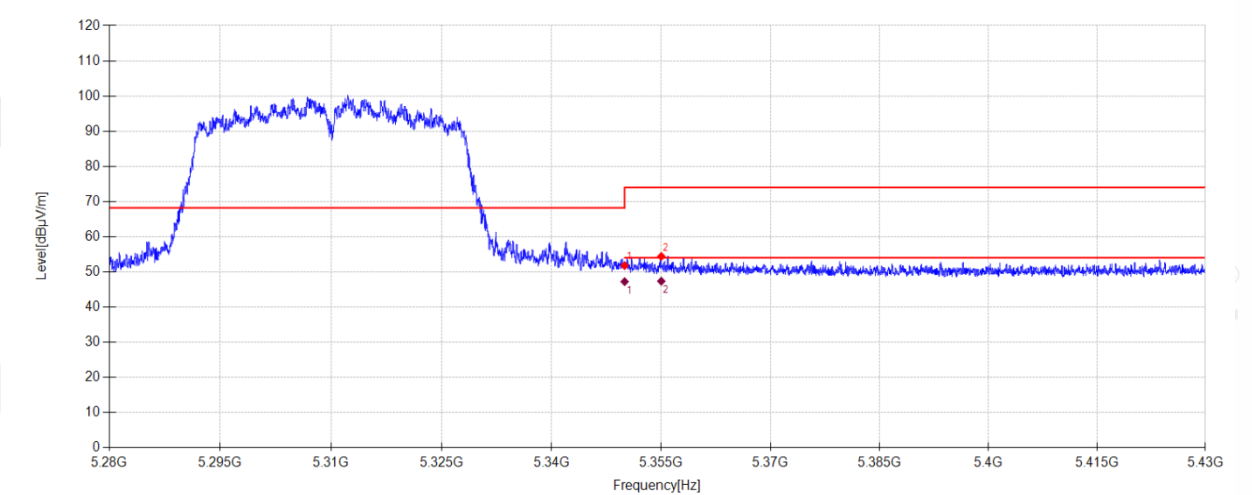

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.88	32.50	5.14	-29.73	51.79	68.20	16.41	PK	Horizontal
2	5355.015	46.46	32.54	5.14	-29.73	54.41	74.00	19.59	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.32	32.50	5.14	47.23	54.00	6.77	AV	Horizontal	
2	5355.015	39.41	32.54	5.14	47.36	54.00	6.64	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5310MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\198

Memo:

Sample Number: S26020802-001

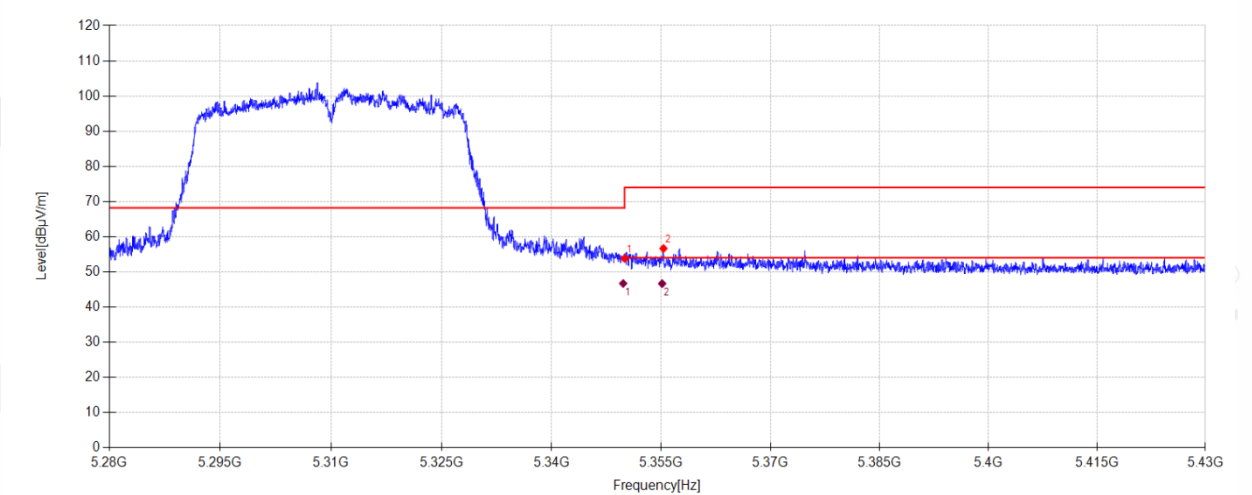

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.91	32.50	5.14	-29.73	53.82	68.20	14.38	PK	Vertical
2	5355.315	48.71	32.54	5.14	-29.73	56.66	74.00	17.34	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5349.798	38.80	32.50	5.14	46.71	54.00	7.29	AV	Vertical	
2	5355.127	38.72	32.54	5.14	46.67	54.00	7.33	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5510MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\199

Memo:

Sample Number: S26020802-001

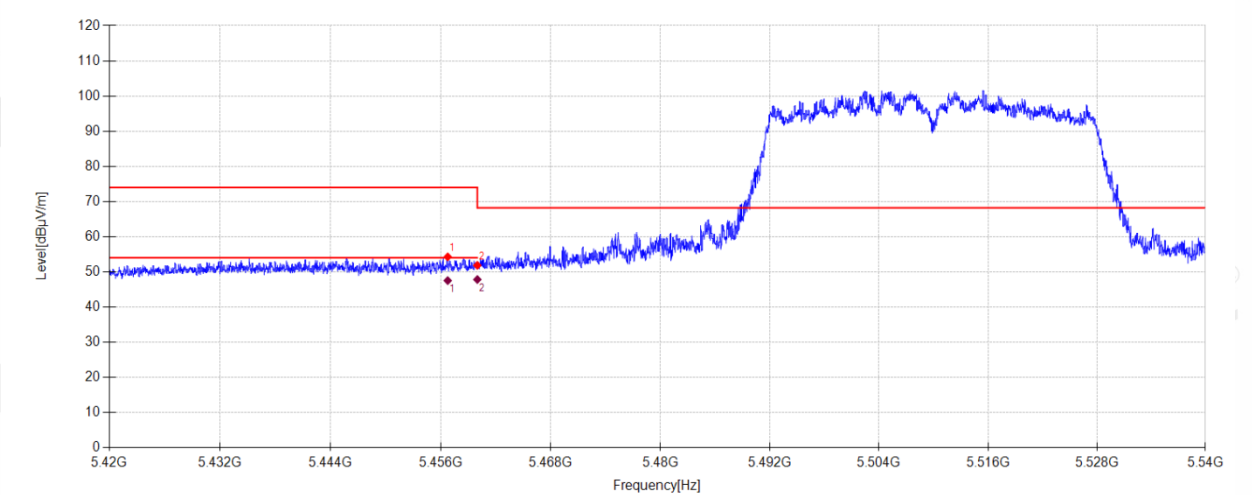

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.768	45.92	32.87	5.19	-29.71	54.27	74.00	19.73	PK	Horizontal
2	5460.000	43.48	32.90	5.19	-29.71	51.86	68.20	16.34	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.768	39.18	32.87	5.19	47.53	54.00	6.47	AV	Horizontal	
2	5460.000	39.46	32.90	5.19	47.84	54.00	6.16	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5510MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\200

Memo:

Sample Number: S26020802-001

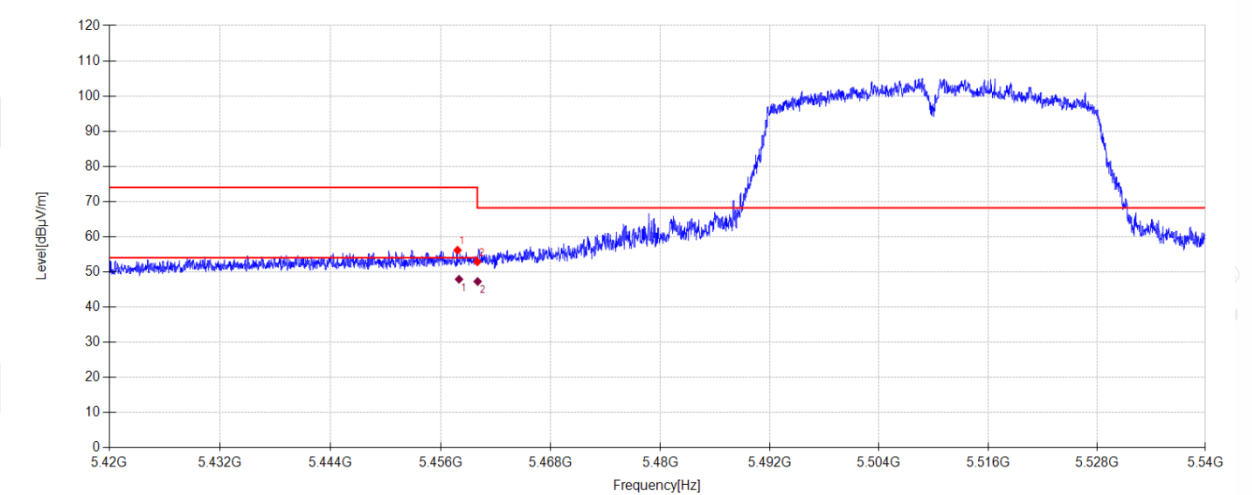

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.836	47.80	32.88	5.19	-29.71	56.16	74.00	17.84	PK	Vertical
2	5460.000	44.49	32.90	5.19	-29.71	52.87	68.20	15.33	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.001	39.55	32.88	5.19	47.91	54.00	6.09	AV	Vertical	
2	5460.033	38.89	32.90	5.19	47.27	54.00	6.73	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\201

Memo:

Sample Number: S26020802-001

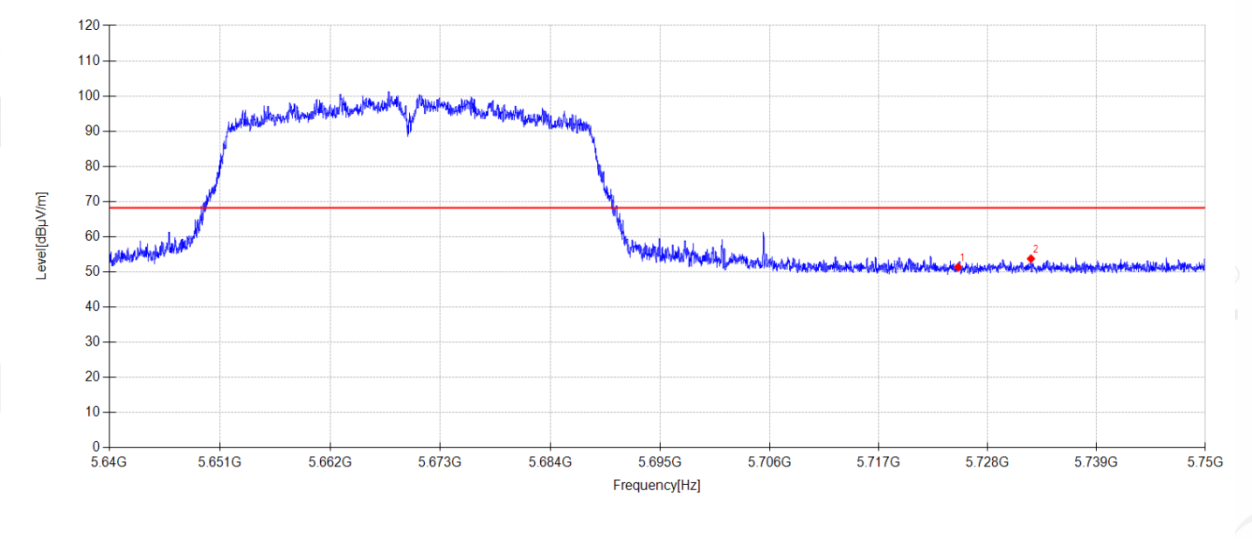

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.25	33.45	5.32	-29.65	51.37	68.20	16.83	PK	Horizontal
2	5732.356	44.51	33.55	5.33	-29.65	53.74	68.20	14.46	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\202

Memo:

Sample Number: S26020802-001

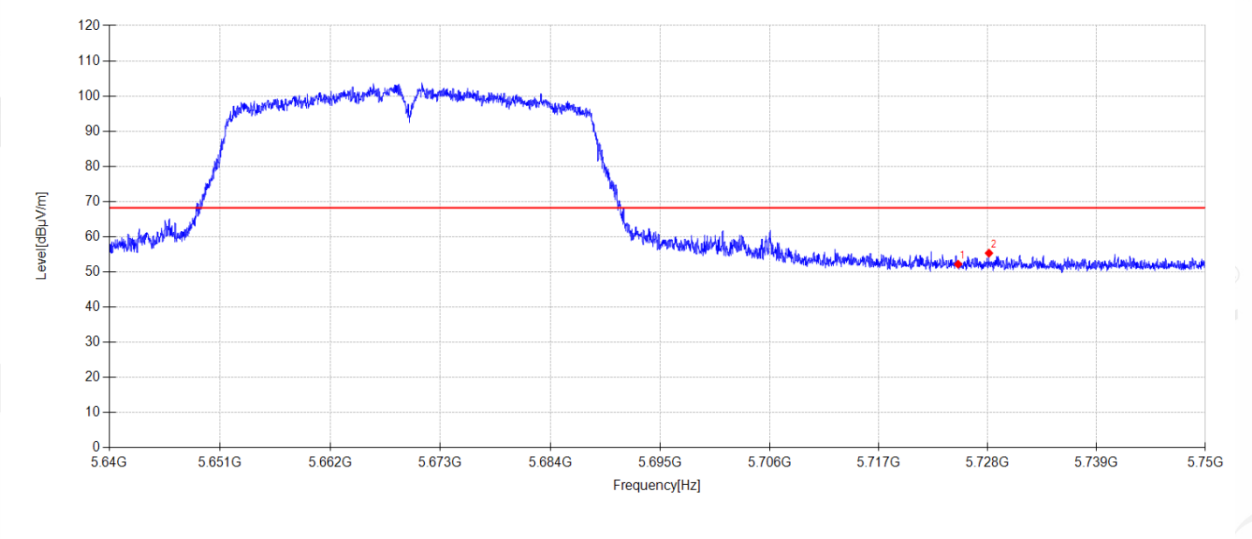

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.07	33.45	5.32	-29.65	52.19	68.20	16.01	PK	Vertical
2	5728.121	46.17	33.49	5.32	-29.65	55.33	68.20	12.87	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5190MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\203

Memo:

Sample Number: S26020802-001

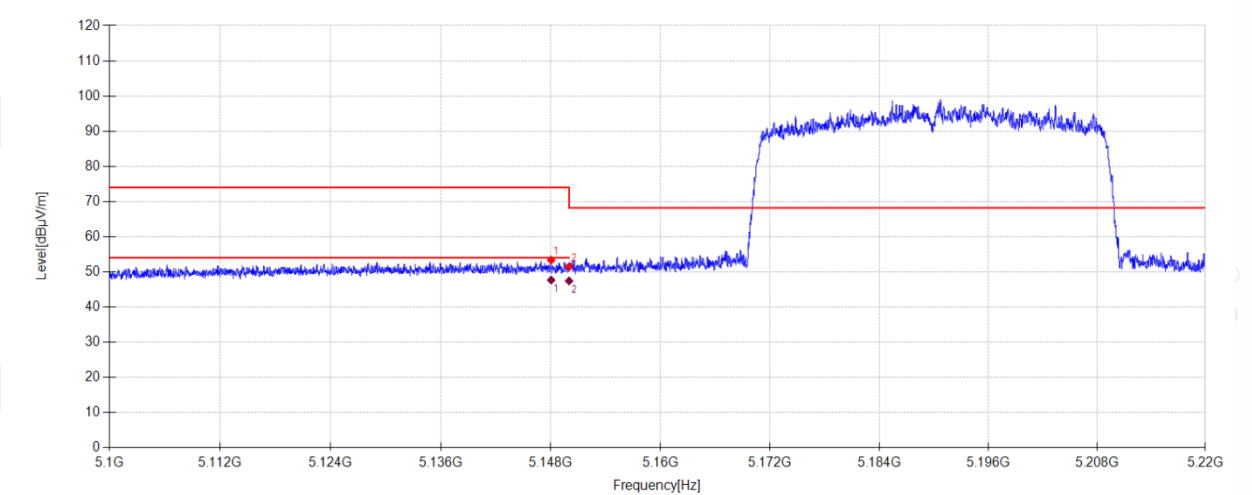

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.036	45.19	32.88	5.03	-29.77	53.33	74.00	20.67	PK	Horizontal
2	5150.000	43.32	32.90	5.04	-29.77	51.49	68.20	16.71	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.036	39.53	32.88	5.03	47.67	54.00	6.33	AV	Horizontal	
2	5150.000	39.26	32.90	5.04	47.43	54.00	6.57	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5190MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\204

Memo:

Sample Number: S26020802-001

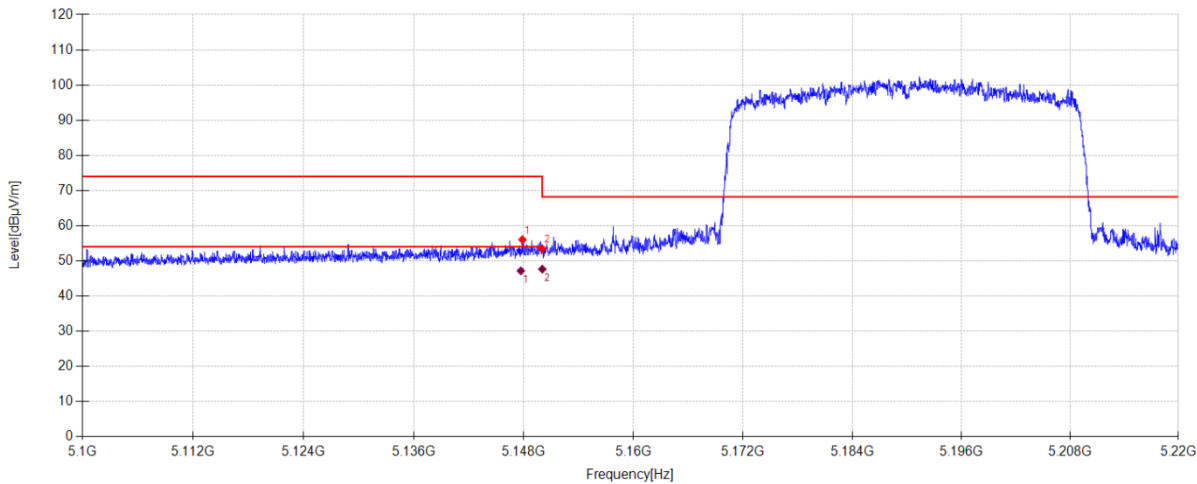

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.856	47.89	32.88	5.03	-29.77	56.03	74.00	17.97	PK	Vertical
2	5150.000	45.32	32.90	5.04	-29.77	53.49	68.20	14.71	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.679	39.03	32.88	5.03	47.17	54.00	6.83	AV	Vertical	
2	5150.024	39.48	32.90	5.04	47.65	54.00	6.35	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5310MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\205

Memo:

Sample Number: S26020802-001

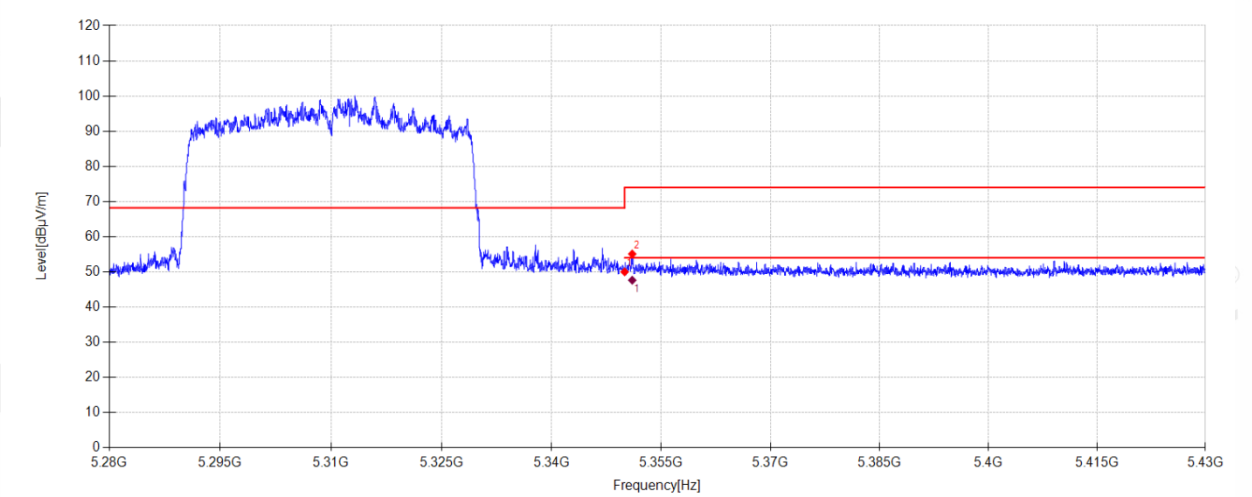

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.09	32.50	5.14	-29.73	50.00	68.20	18.20	PK	Horizontal
2	5351.040	47.17	32.51	5.14	-29.73	55.09	74.00	18.91	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5351.040	39.72	32.51	5.14	47.64	54.00	6.36	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-06Tested By:Cao Jie

Test Mode:MIMO TX 11AX40 5310MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:58.0%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\206

Memo:Sample Number: S26020802-001

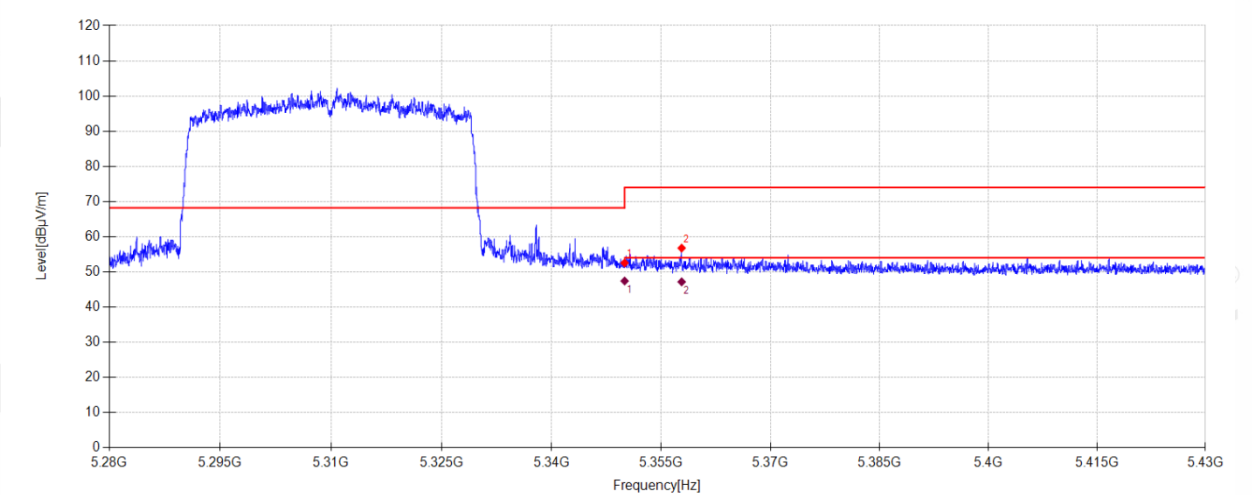

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.64	32.50	5.14	-29.73	52.55	68.20	15.65	PK	Vertical
2	5357.805	48.80	32.56	5.14	-29.73	56.77	74.00	17.23	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.50	32.50	5.14	47.41	54.00	6.59	AV	Vertical	
2	5357.805	39.20	32.56	5.14	47.17	54.00	6.83	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5510MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\207

Memo:

Sample Number: S26020802-001

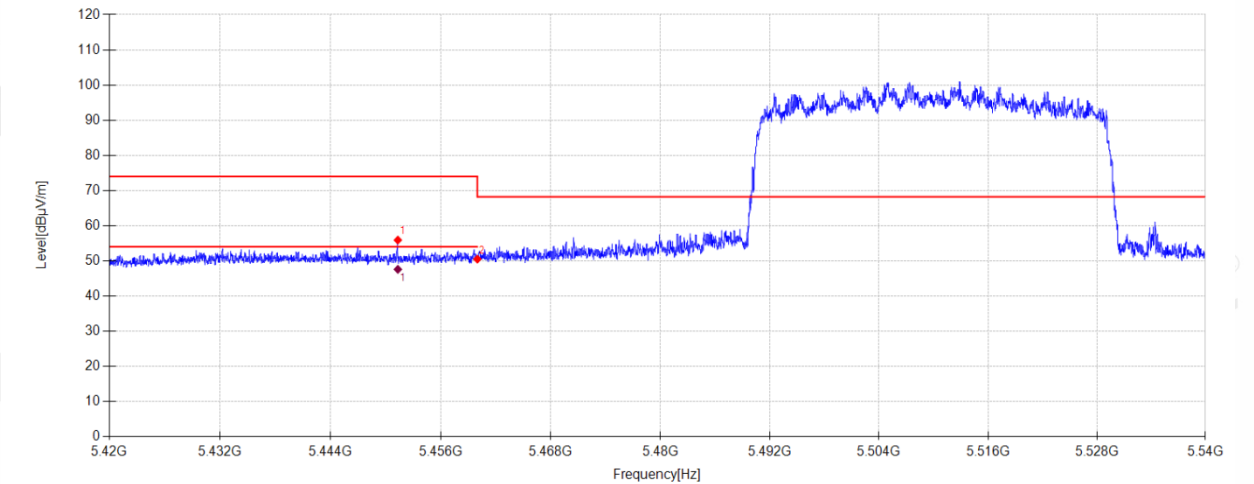

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.332	47.63	32.81	5.19	-29.71	55.92	74.00	18.08	PK	Horizontal
2	5460.000	42.12	32.90	5.19	-29.71	50.50	68.20	17.70	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5451.332	39.31	32.81	5.19	47.60	54.00	6.40	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.