

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5510MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\208

Memo:

Sample Number: S26020802-001

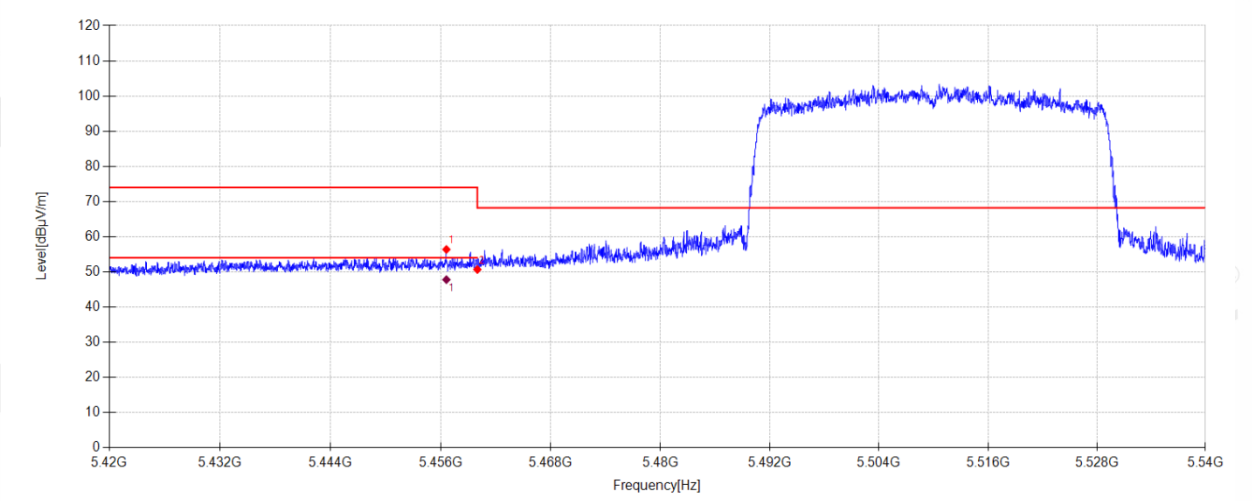

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.624	48.03	32.87	5.19	-29.71	56.38	74.00	17.62	PK	Vertical
2	5460.000	42.30	32.90	5.19	-29.71	50.68	68.20	17.52	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.624	39.45	32.87	5.19	47.80	54.00	6.20	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\209

Memo:

Sample Number: S26020802-001

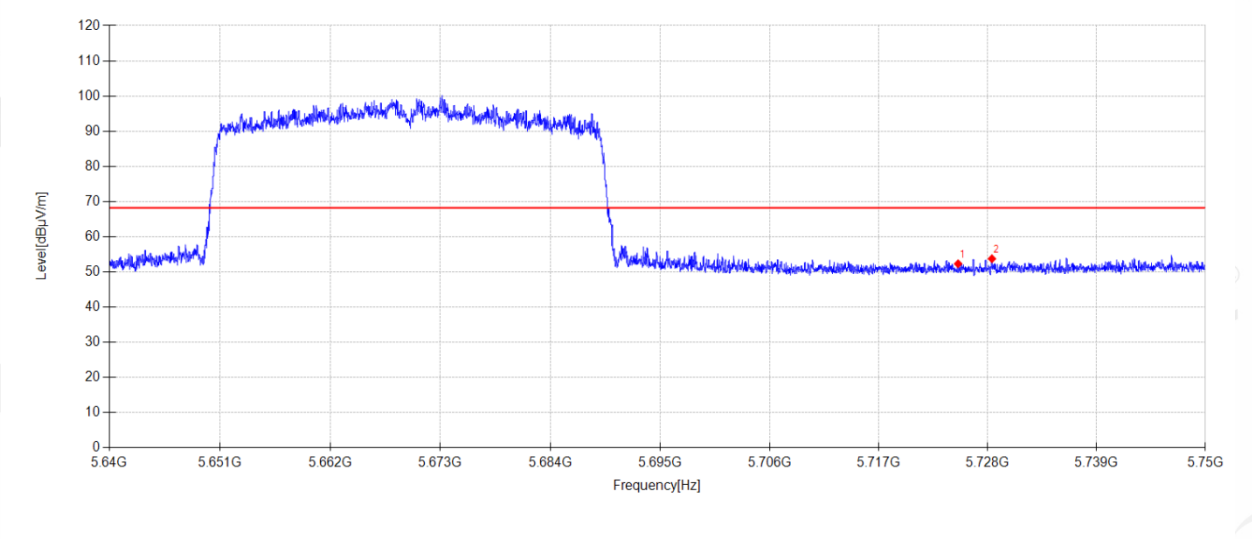

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.19	33.45	5.32	-29.65	52.31	68.20	15.89	PK	Horizontal
2	5728.418	44.57	33.50	5.32	-29.65	53.74	68.20	14.46	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\210

Memo:

Sample Number: S26020802-001

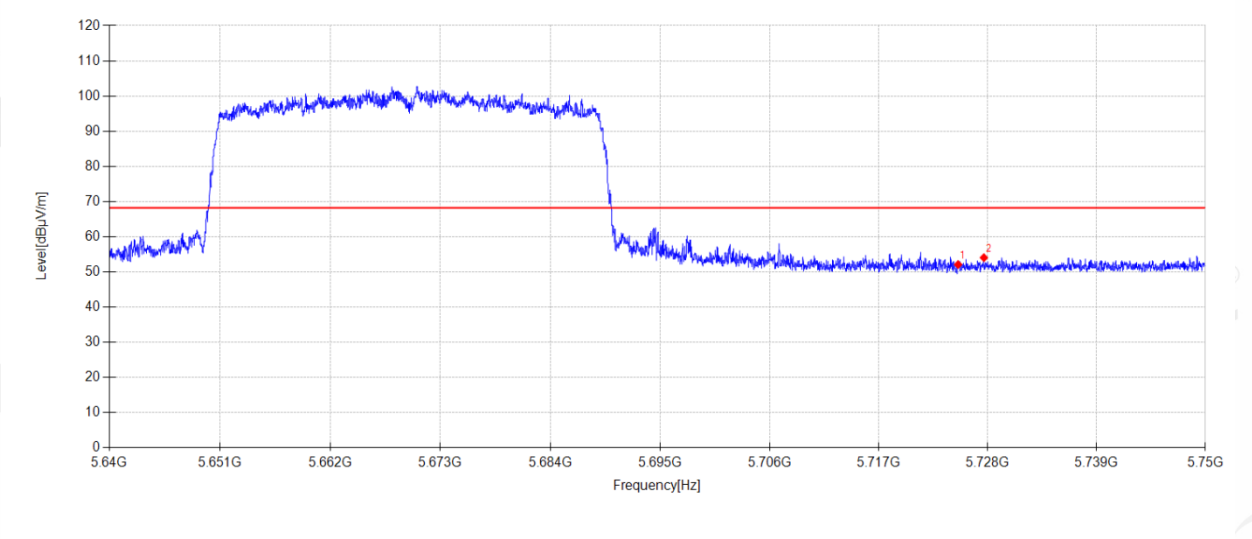

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.98	33.45	5.32	-29.65	52.10	68.20	16.10	PK	Vertical
2	5727.604	44.88	33.49	5.32	-29.65	54.04	68.20	14.16	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\211

Memo:

Sample Number: S26020802-001

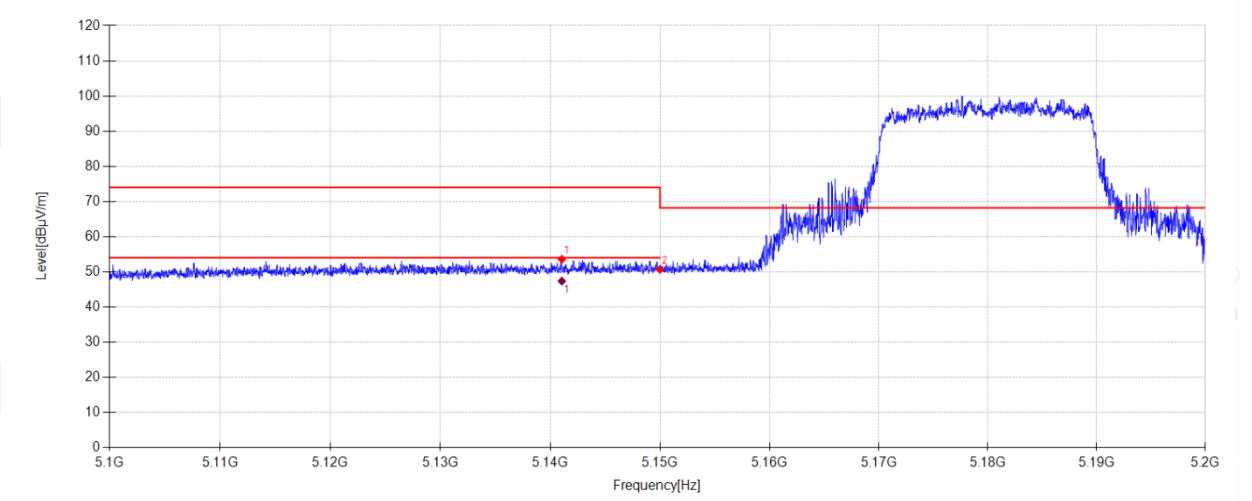

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.050	45.51	32.83	5.03	-29.77	53.60	74.00	20.40	PK	Horizontal
2	5150.000	42.54	32.90	5.04	-29.77	50.71	68.20	17.49	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5141.050	39.29	32.83	5.03	47.38	54.00	6.62	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\212

Memo:

Sample Number: S26020802-001

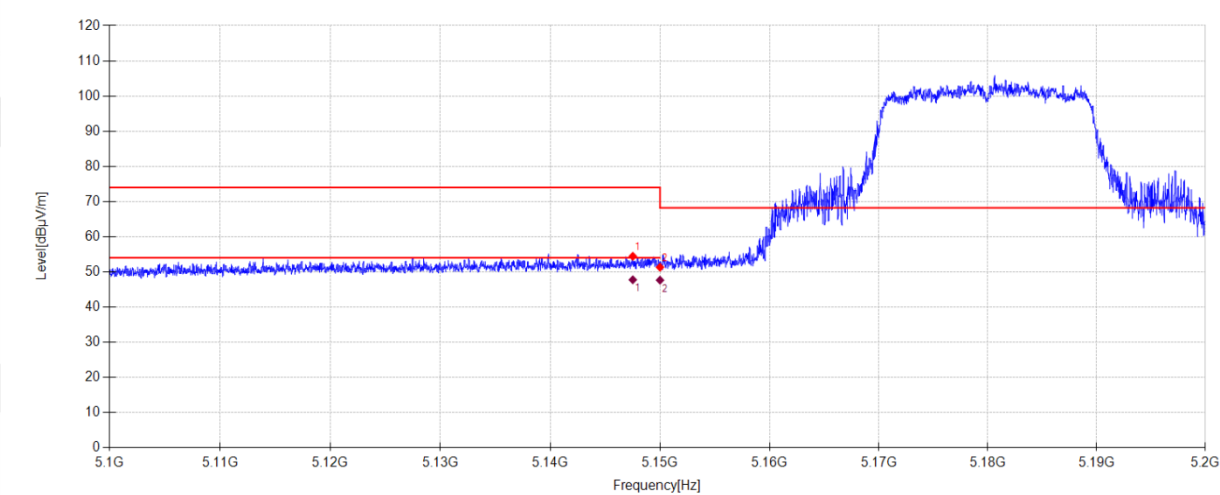

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.520	46.31	32.88	5.03	-29.77	54.45	74.00	19.55	PK	Vertical
2	5150.000	43.15	32.90	5.04	-29.77	51.32	68.20	16.88	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.520	39.62	32.88	5.03	47.76	54.00	6.24	AV	Vertical	
2	5150.000	39.48	32.90	5.04	47.65	54.00	6.35	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\213

Memo:

Sample Number: S26020802-001

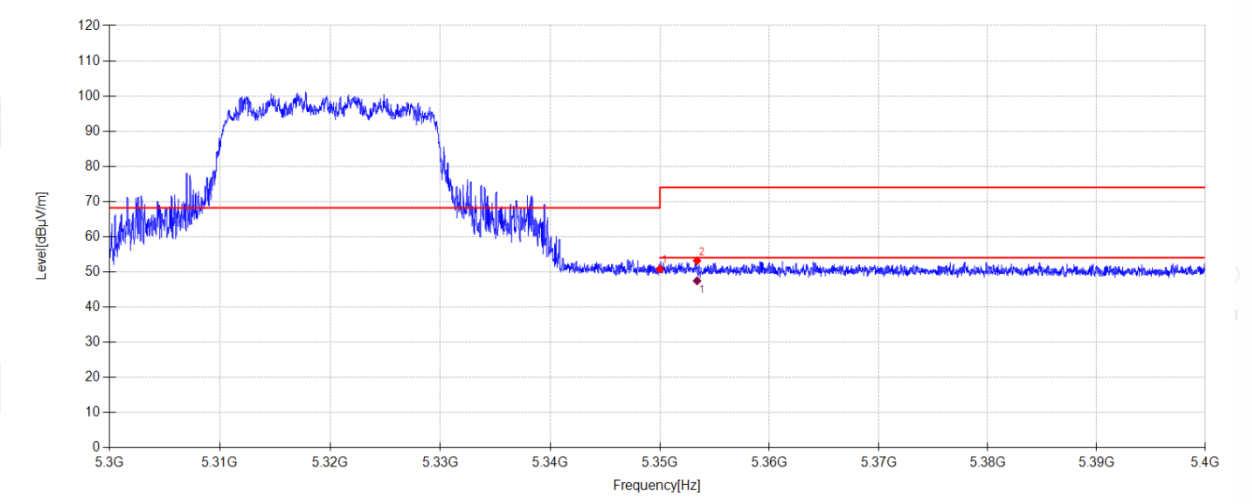

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.89	32.50	5.14	-29.73	50.80	68.20	17.40	PK	Horizontal
2	5353.390	45.23	32.53	5.14	-29.73	53.17	74.00	20.83	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5353.390	39.52	32.53	5.14	47.46	54.00	6.54	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\214

Memo:

Sample Number: S26020802-001

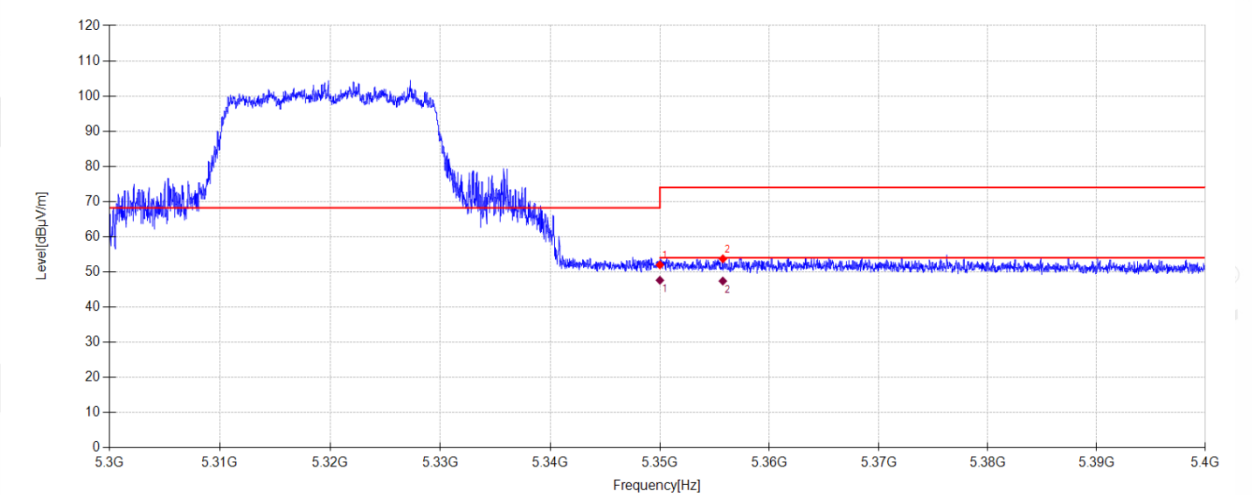

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.08	32.50	5.14	-29.73	51.99	68.20	16.21	PK	Vertical
2	5355.750	45.75	32.55	5.14	-29.73	53.71	74.00	20.29	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.71	32.50	5.14	47.62	54.00	6.38	AV	Vertical	
2	5355.750	39.44	32.55	5.14	47.40	54.00	6.60	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\215

Memo:

Sample Number: S26020802-001

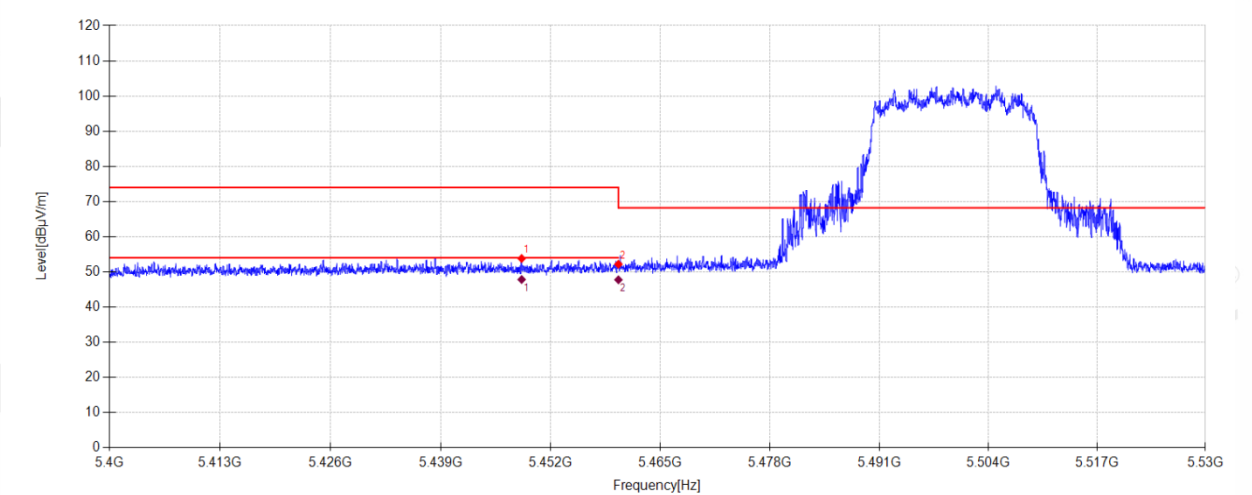

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5448.542	45.54	32.80	5.18	-29.71	53.81	74.00	20.19	PK	Horizontal
2	5460.000	43.80	32.90	5.19	-29.71	52.18	68.20	16.02	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5448.542	39.56	32.80	5.18	47.83	54.00	6.17	AV	Horizontal	
2	5460.000	39.38	32.90	5.19	47.76	54.00	6.24	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\216

Memo:

Sample Number: S26020802-001

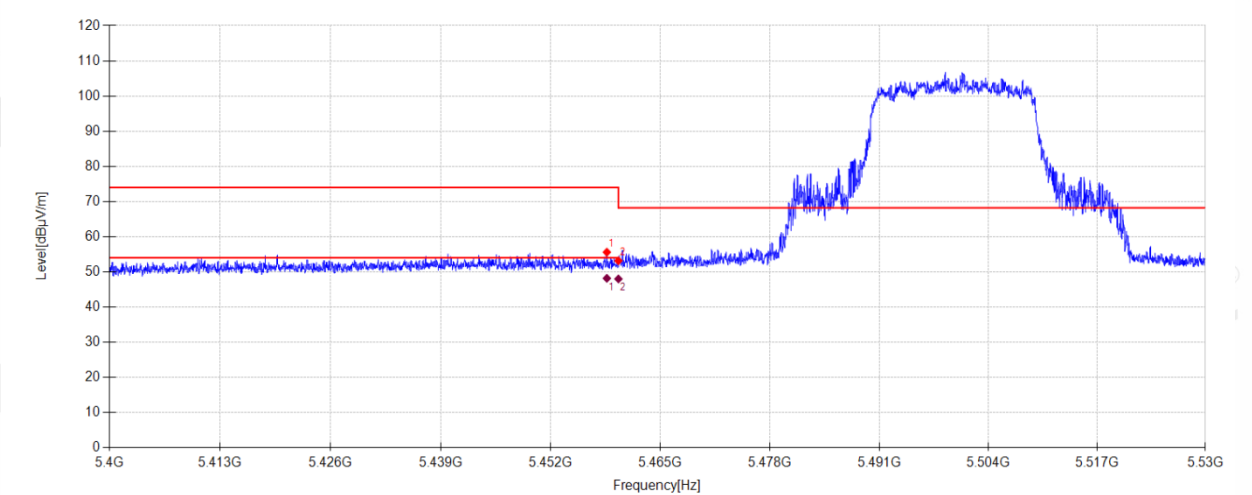

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.630	47.24	32.89	5.19	-29.71	55.61	74.00	18.39	PK	Vertical
2	5460.000	44.79	32.90	5.19	-29.71	53.17	68.20	15.03	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]		Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.630	39.81	32.89	5.19		48.18	54.00	5.82	AV	Vertical
2	5460.000	39.62	32.90	5.19		48.00	54.00	6.00	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\217

Memo:

Sample Number: S26020802-001

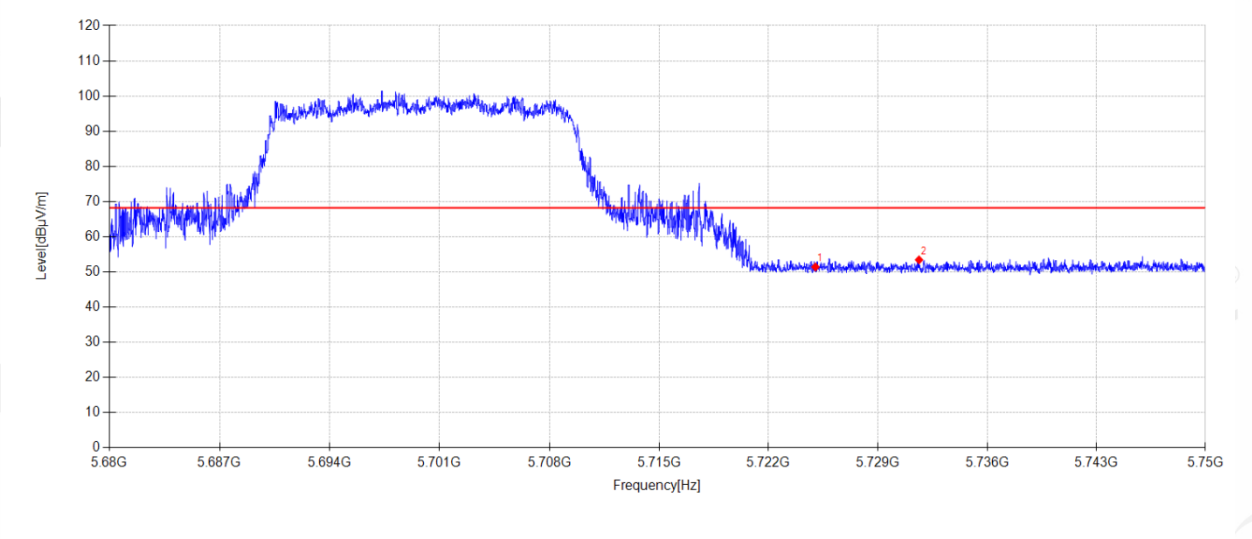

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.29	33.45	5.32	-29.65	51.41	68.20	16.79	PK	Horizontal
2	5731.632	44.20	33.54	5.33	-29.65	53.42	68.20	14.78	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\218

Memo:

Sample Number: S26020802-001

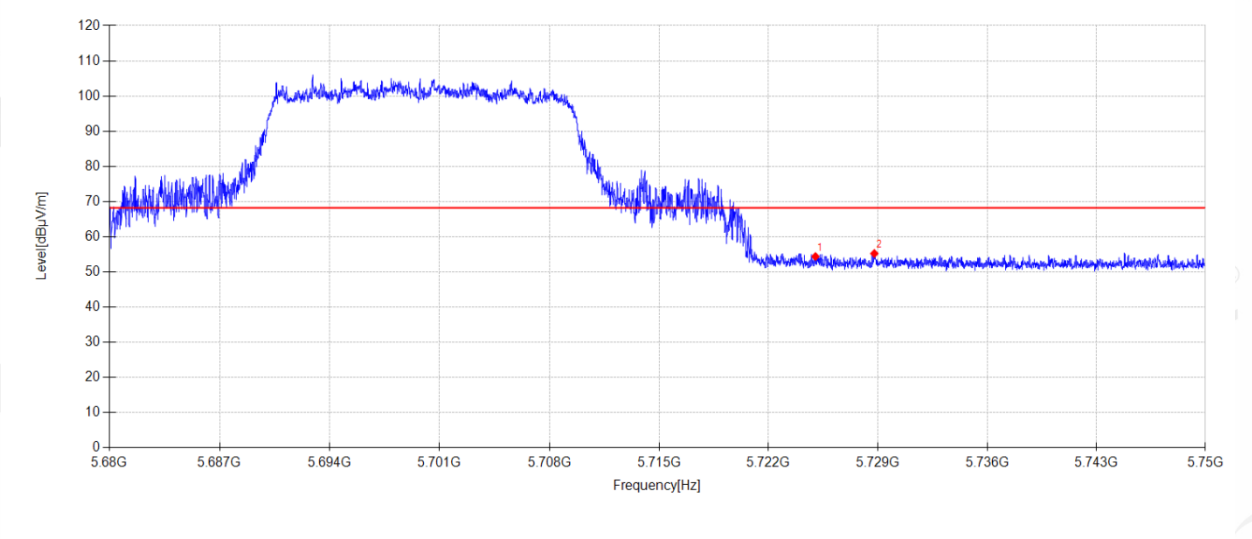

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.25	33.45	5.32	-29.65	54.37	68.20	13.83	PK	Vertical
2	5728.769	46.06	33.50	5.32	-29.65	55.23	68.20	12.97	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\219

Memo:

Sample Number: S26020802-001

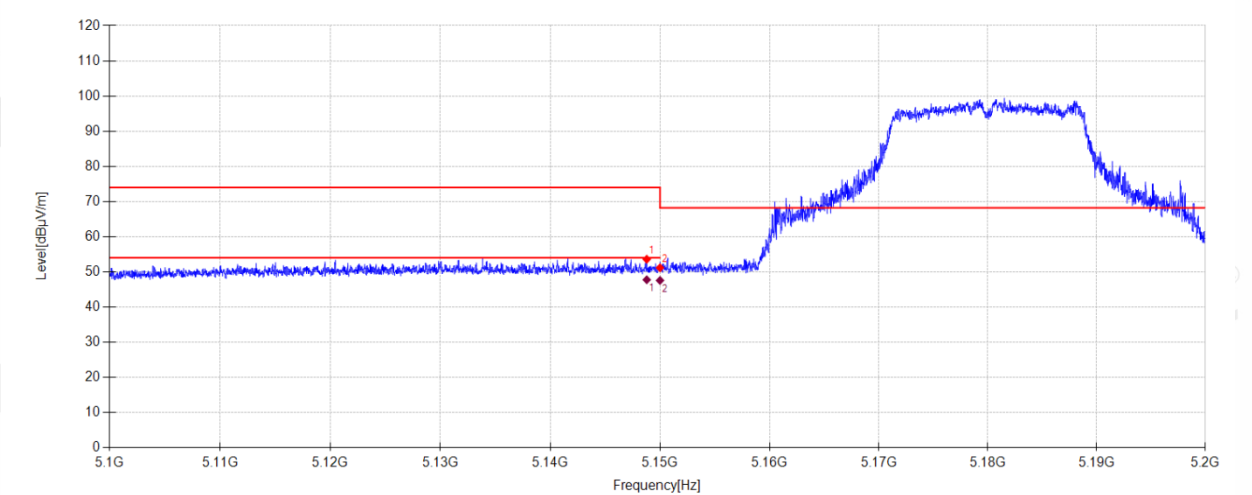

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.790	45.45	32.89	5.03	-29.77	53.60	74.00	20.40	PK	Horizontal
2	5150.000	43.00	32.90	5.04	-29.77	51.17	68.20	17.03	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5148.790	39.62	32.89	5.03	47.77	54.00	6.23	AV	Horizontal	
2	5150.000	39.41	32.90	5.04	47.58	54.00	6.42	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\220

Memo:

Sample Number: S26020802-001

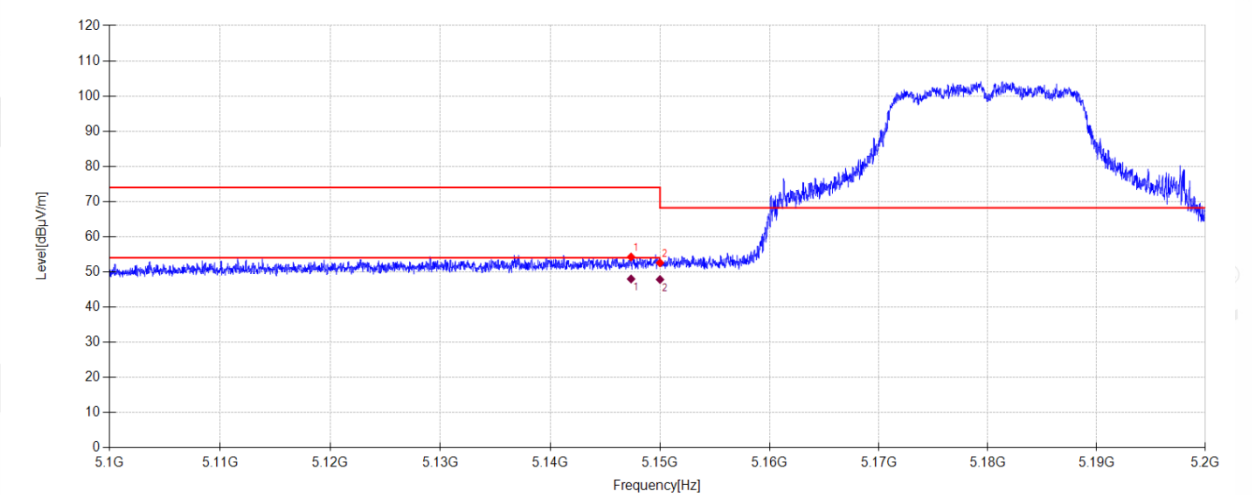

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.360	46.09	32.88	5.03	-29.77	54.23	74.00	19.77	PK	Vertical
2	5150.000	44.39	32.90	5.04	-29.77	52.56	68.20	15.64	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5147.360	39.85	32.88	5.03	47.99	54.00	6.01	AV	Vertical	
2	5150.000	39.66	32.90	5.04	47.83	54.00	6.17	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\221

Memo:

Sample Number: S26020802-001

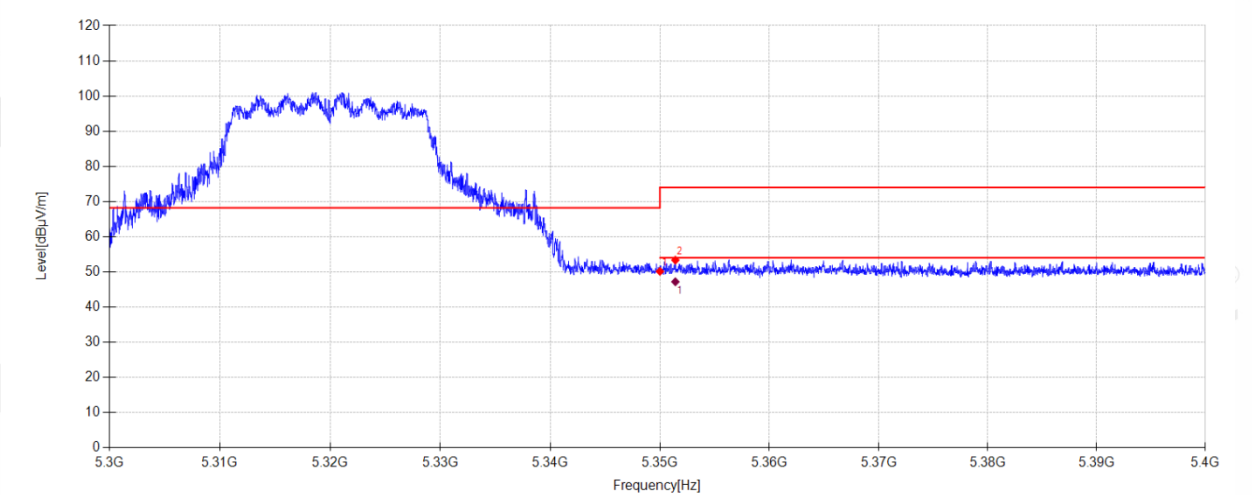

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.24	32.50	5.14	-29.73	50.15	68.20	18.05	PK	Horizontal
2	5351.410	45.42	32.51	5.14	-29.73	53.34	74.00	20.66	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5351.410	39.27	32.51	5.14	47.19	54.00	6.81	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\222

Memo:

Sample Number: S26020802-001

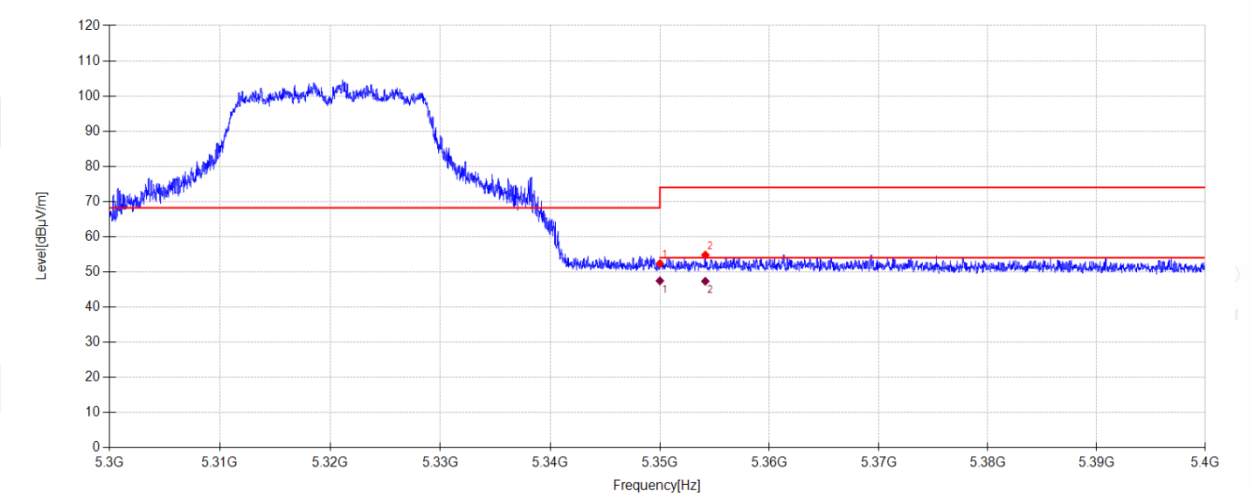

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.45	32.50	5.14	-29.73	52.36	68.20	15.84	PK	Vertical
2	5354.150	46.88	32.53	5.14	-29.73	54.82	74.00	19.18	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.55	32.50	5.14	47.46	54.00	6.54	AV	Vertical	
2	5354.150	39.40	32.53	5.14	47.34	54.00	6.66	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\223

Memo:

Sample Number: S26020802-001

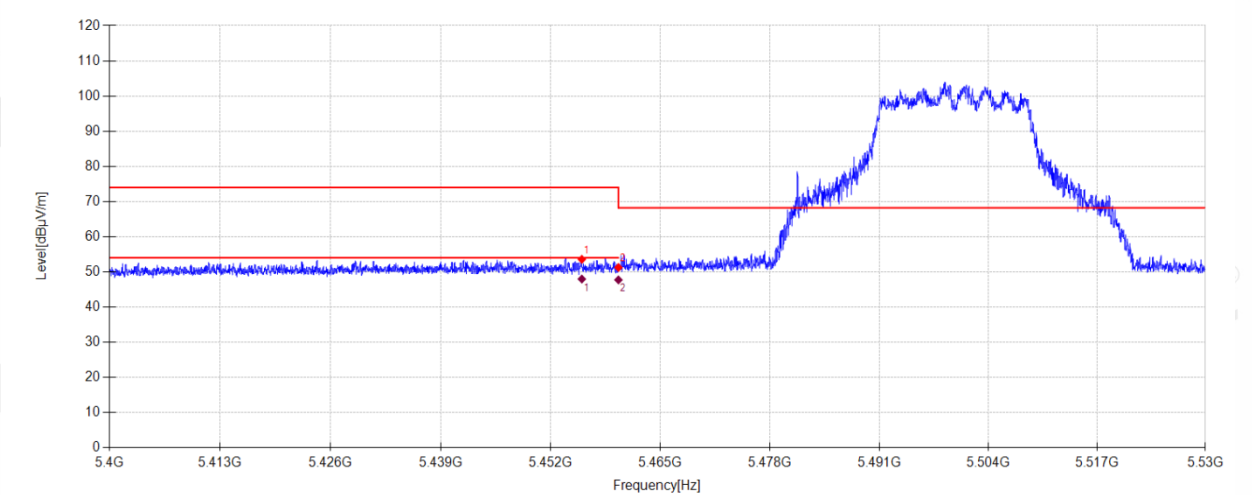

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.666	45.23	32.86	5.19	-29.71	53.57	74.00	20.43	PK	Horizontal
2	5460.000	42.88	32.90	5.19	-29.71	51.26	68.20	16.94	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.666	39.63	32.86	5.19	47.97	54.00	6.03	AV	Horizontal	
2	5460.000	39.35	32.90	5.19	47.73	54.00	6.27	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\224

Memo:

Sample Number: S26020802-001

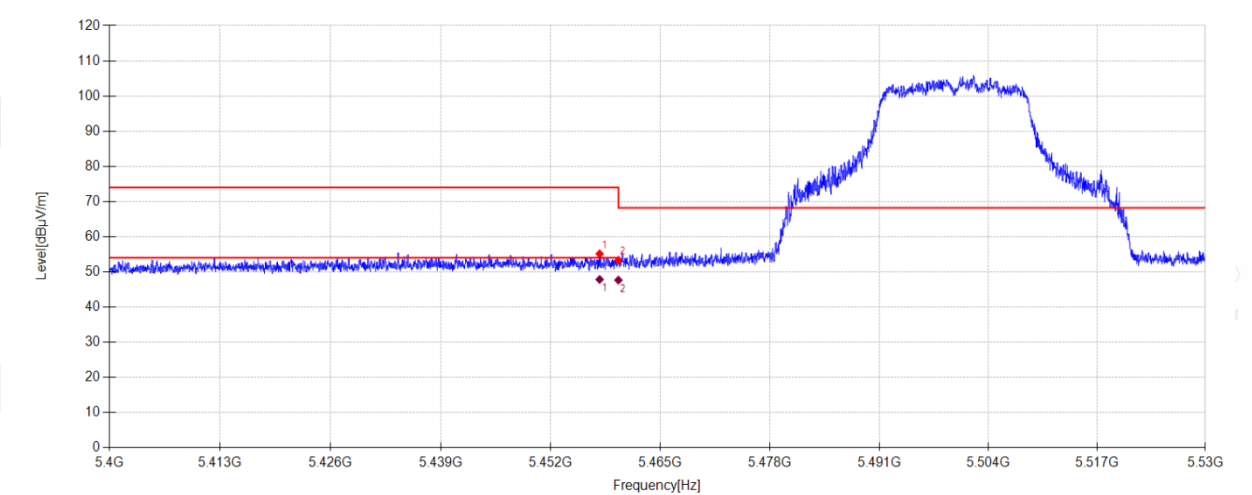

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.772	46.78	32.88	5.19	-29.71	55.14	74.00	18.86	PK	Vertical
2	5460.000	44.93	32.90	5.19	-29.71	53.31	68.20	14.89	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.772	39.49	32.88	5.19	47.85	54.00	6.15	AV	Vertical	
2	5460.000	39.28	32.90	5.19	47.66	54.00	6.34	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\225

Memo:

Sample Number: S26020802-001

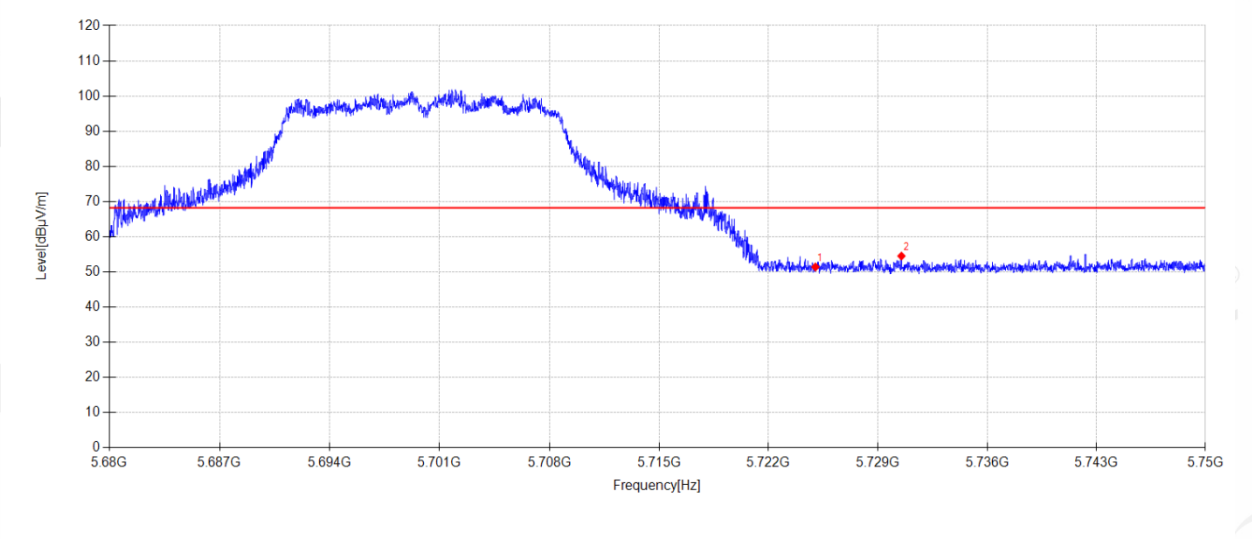

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.28	33.45	5.32	-29.65	51.40	68.20	16.80	PK	Horizontal
2	5730.505	45.30	33.53	5.33	-29.65	54.51	68.20	13.69	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\226

Memo:

Sample Number: S26020802-001

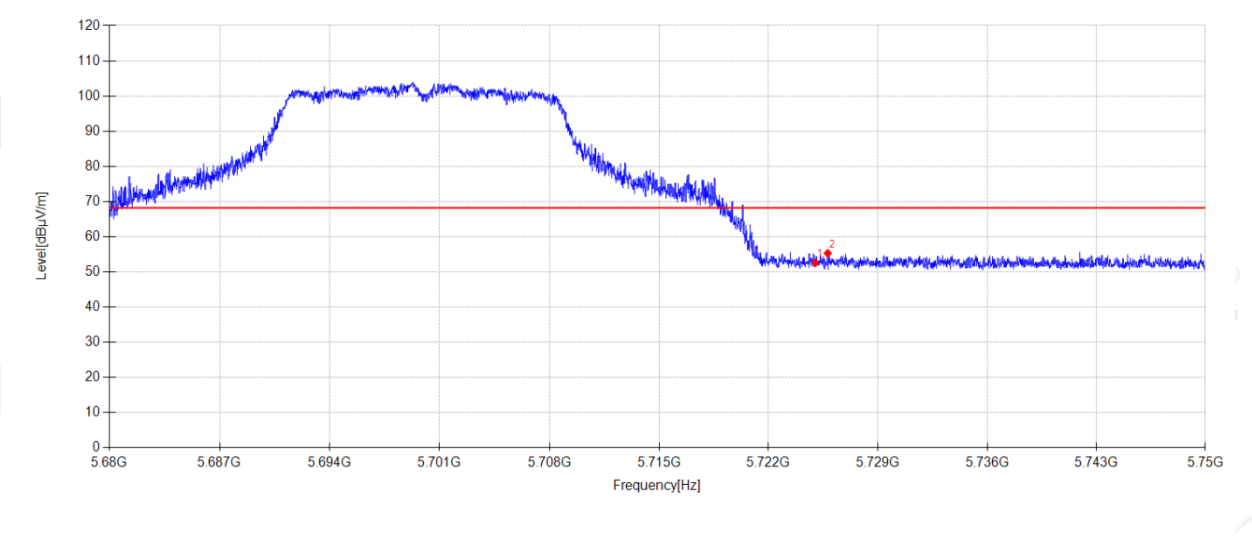

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.49	33.45	5.32	-29.65	52.61	68.20	15.59	PK	Vertical
2	5725.787	46.17	33.46	5.32	-29.65	55.30	68.20	12.90	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5190MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\227

Memo:

Sample Number: S26020802-001

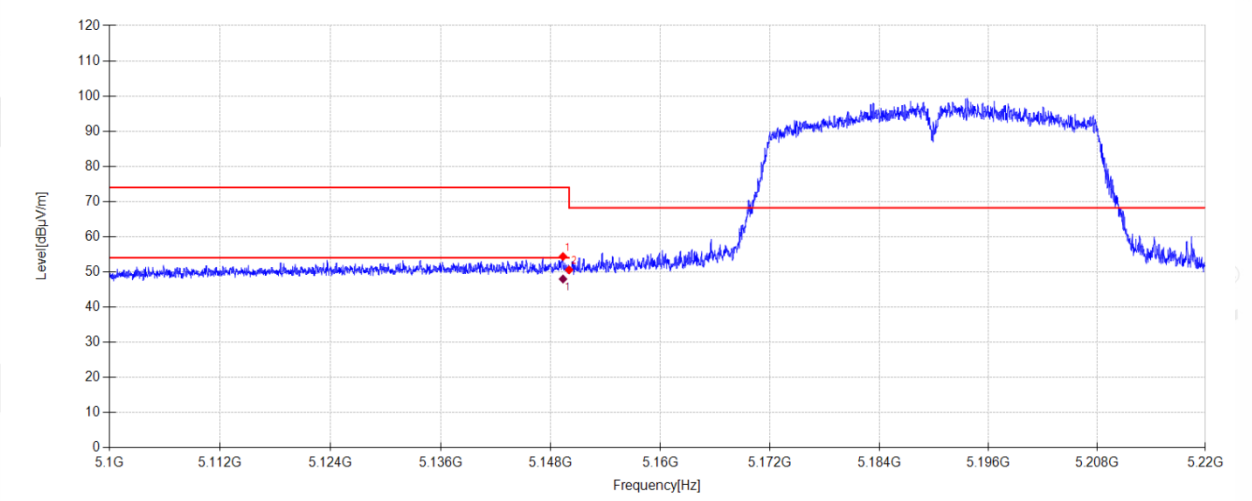

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.332	46.22	32.89	5.03	-29.77	54.37	74.00	19.63	PK	Horizontal
2	5150.000	42.39	32.90	5.04	-29.77	50.56	68.20	17.64	PK	Horizontal


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5149.332	39.83	32.89	5.03	47.98	54.00	6.02	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-06 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5190MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:58.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\228
Memo: Sample Number: S26020802-001

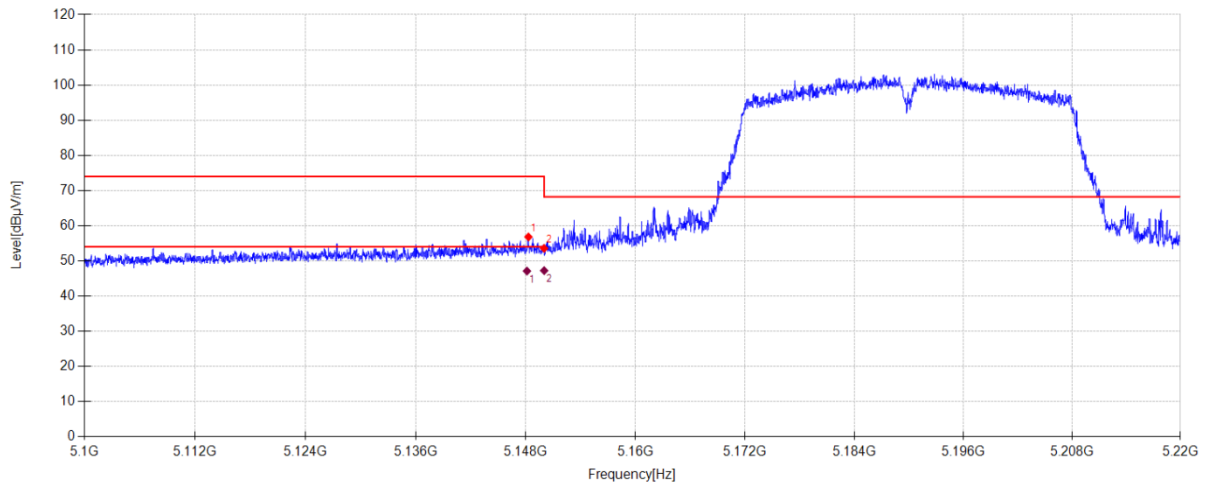**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.288	48.67	32.89	5.03	-29.77	56.82	74.00	17.18	PK	Vertical
2	5150.000	45.39	32.90	5.04	-29.77	53.56	68.20	14.64	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.126	38.97	32.89	5.03	47.12	54.00	6.88	AV	Vertical
2	5150.006	39.07	32.90	5.04	47.24	54.00	6.76	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5310MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\229

Memo:

Sample Number: S26020802-001

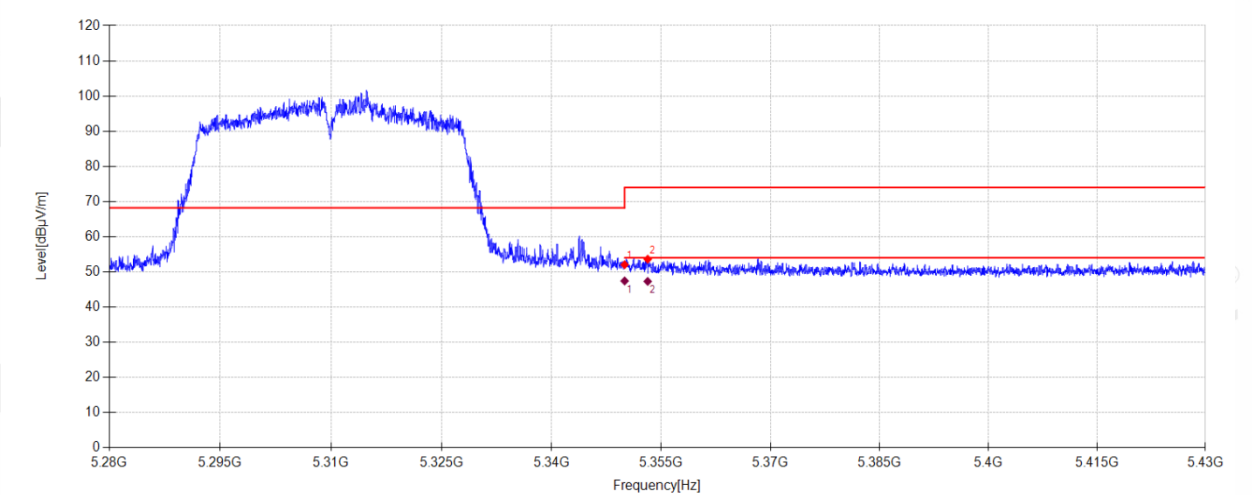

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.13	32.50	5.14	-29.73	52.04	68.20	16.16	PK	Horizontal
2	5353.155	45.67	32.53	5.14	-29.73	53.61	74.00	20.39	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.52	32.50	5.14	47.43	54.00	6.57	AV	Horizontal	
2	5353.155	39.36	32.53	5.14	47.30	54.00	6.70	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5310MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\230

Memo:

Sample Number: S26020802-001

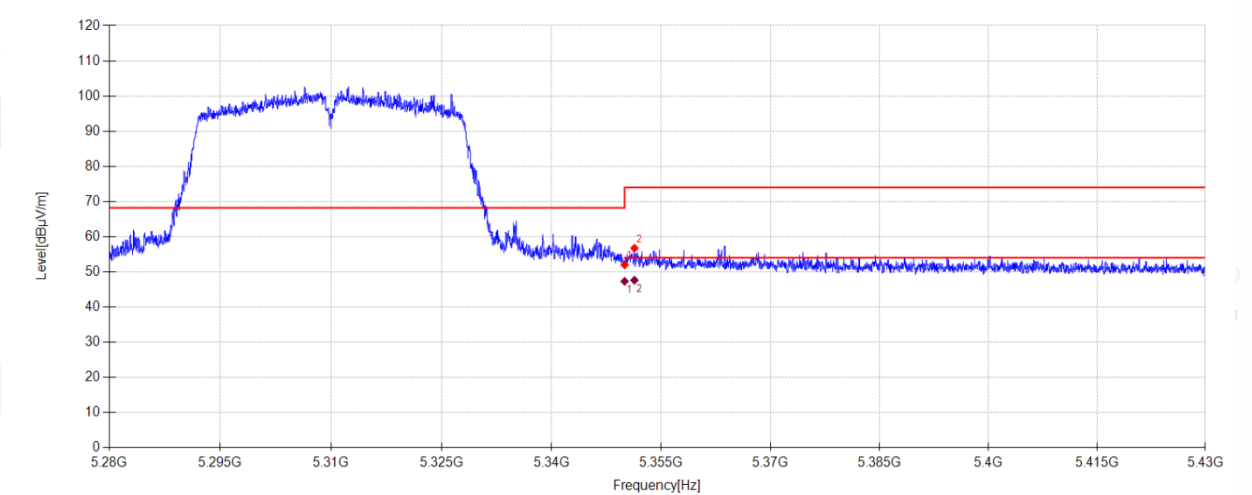

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.10	32.50	5.14	-29.73	52.01	68.20	16.19	PK	Vertical
2	5351.340	48.81	32.51	5.14	-29.73	56.73	74.00	17.27	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.41	32.50	5.14	47.32	54.00	6.68	AV	Vertical	
2	5351.340	39.72	32.51	5.14	47.64	54.00	6.36	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5510MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\231

Memo:

Sample Number: S26020802-001

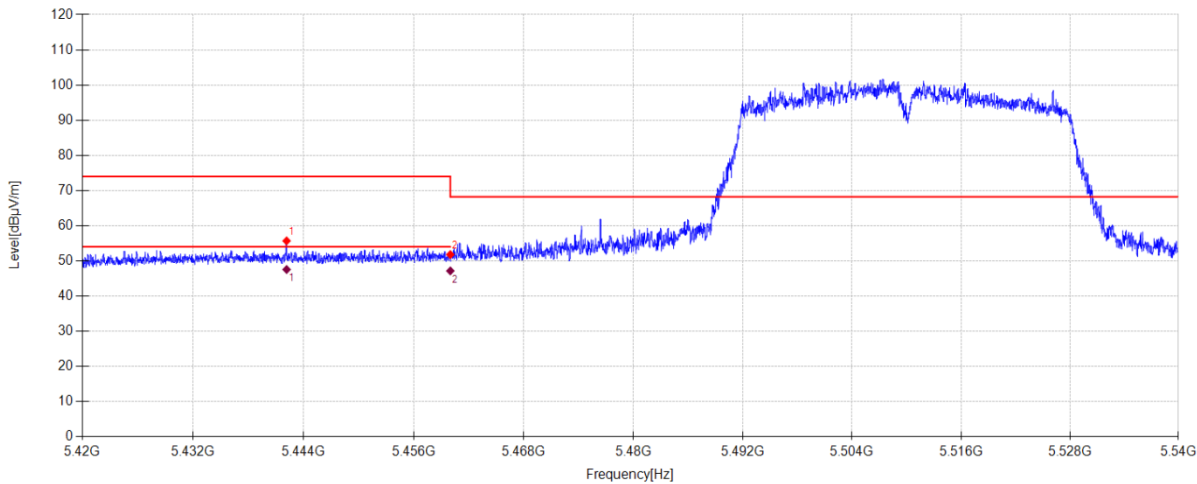

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5442.164	47.40	32.82	5.18	-29.71	55.69	74.00	18.31	PK	Horizontal
2	5460.000	43.42	32.90	5.19	-29.71	51.80	68.20	16.40	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5442.164	39.26	32.82	5.18	47.55	54.00	6.45	AV	Horizontal	
2	5460.000	38.79	32.90	5.19	47.17	54.00	6.83	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5510MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\232

Memo:

Sample Number: S26020802-001

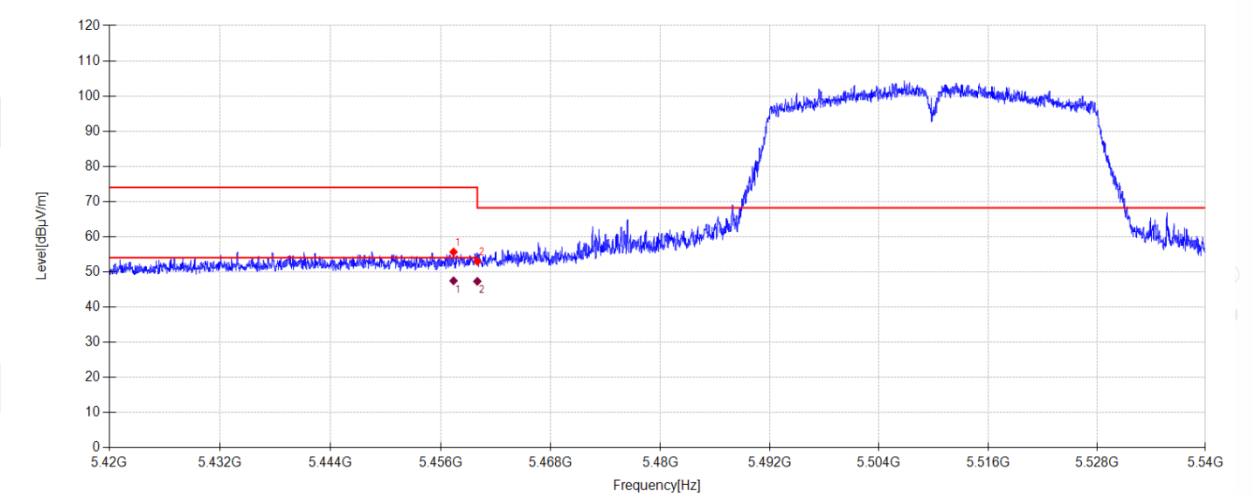

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.404	47.31	32.87	5.19	-29.71	55.66	74.00	18.34	PK	Vertical
2	5460.000	44.62	32.90	5.19	-29.71	53.00	68.20	15.20	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.404	39.12	32.87	5.19	47.47	54.00	6.53	AV	Vertical	
2	5460.000	38.94	32.90	5.19	47.32	54.00	6.68	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\233

Memo:

Sample Number: S26020802-001

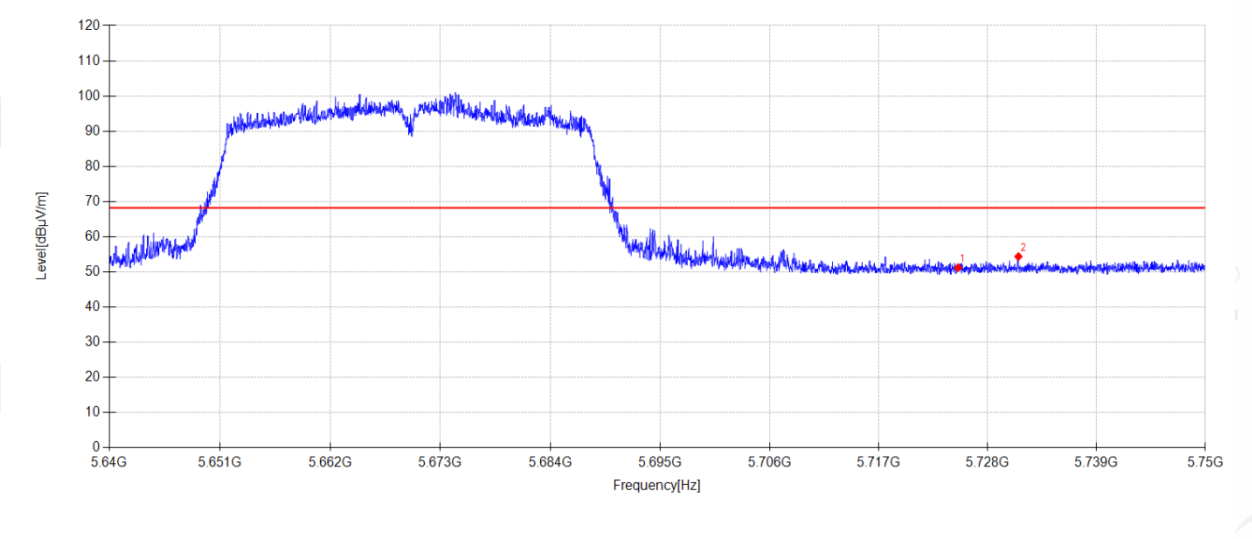

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.09	33.45	5.32	-29.65	51.21	68.20	16.99	PK	Horizontal
2	5731.091	45.14	33.54	5.33	-29.65	54.36	68.20	13.84	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\234

Memo:

Sample Number: S26020802-001

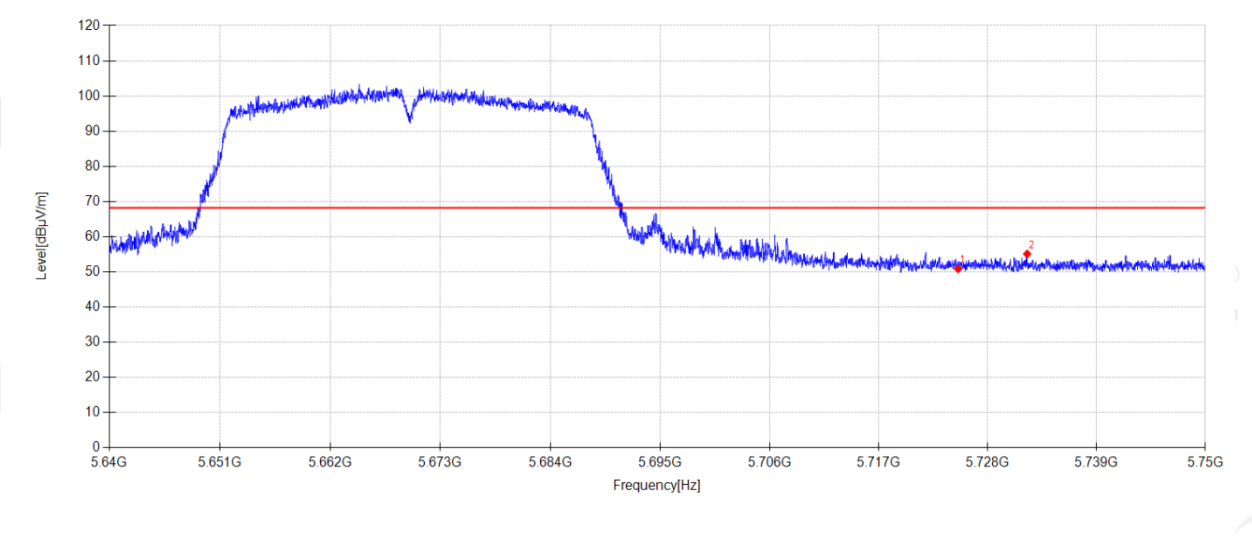


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.75	33.45	5.32	-29.65	50.87	68.20	17.33	PK	Vertical
2	5731.971	45.88	33.55	5.33	-29.65	55.11	68.20	13.09	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-06 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5210MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:58.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\235
Memo: Sample Number: S26020802-001

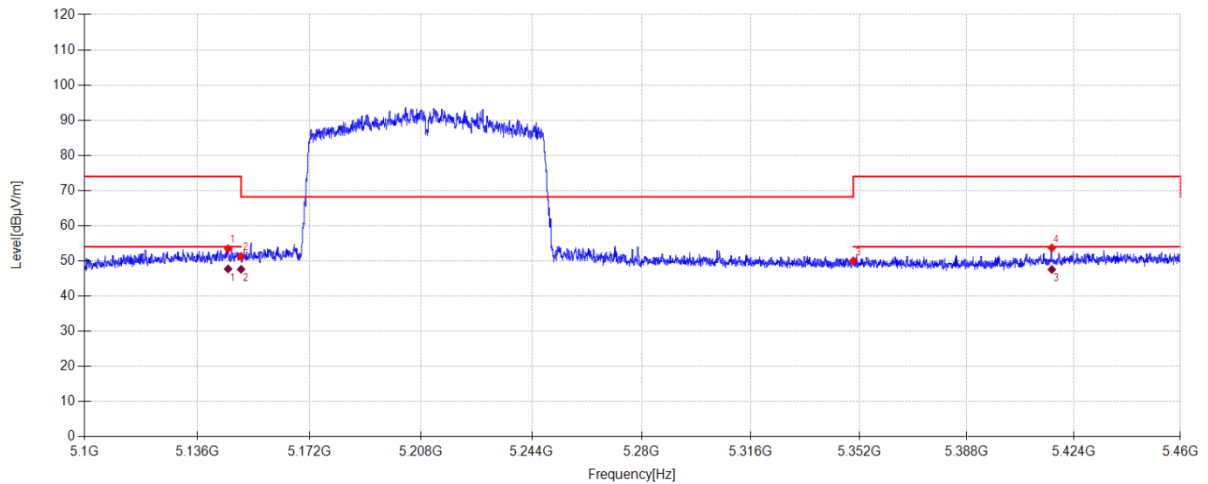

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.828	45.33	32.87	5.03	-29.77	53.46	74.00	20.54	PK	Horizontal
2	5150.000	43.10	32.90	5.04	-29.77	51.27	68.20	16.93	PK	Horizontal
3	5350.000	42.09	32.50	5.14	-29.73	50.00	68.20	18.20	PK	Horizontal
4	5416.512	45.36	32.87	5.17	-29.72	53.68	74.00	20.32	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.828	39.58	32.87	5.03	47.71	54.00	6.29	AV	Horizontal
2	5150.000	39.43	32.90	5.04	47.60	54.00	6.40	AV	Horizontal
3	5416.512	39.24	32.87	5.17	47.56	54.00	6.44	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-06 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5210MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:58.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\236
Memo: Sample Number: S26020802-001

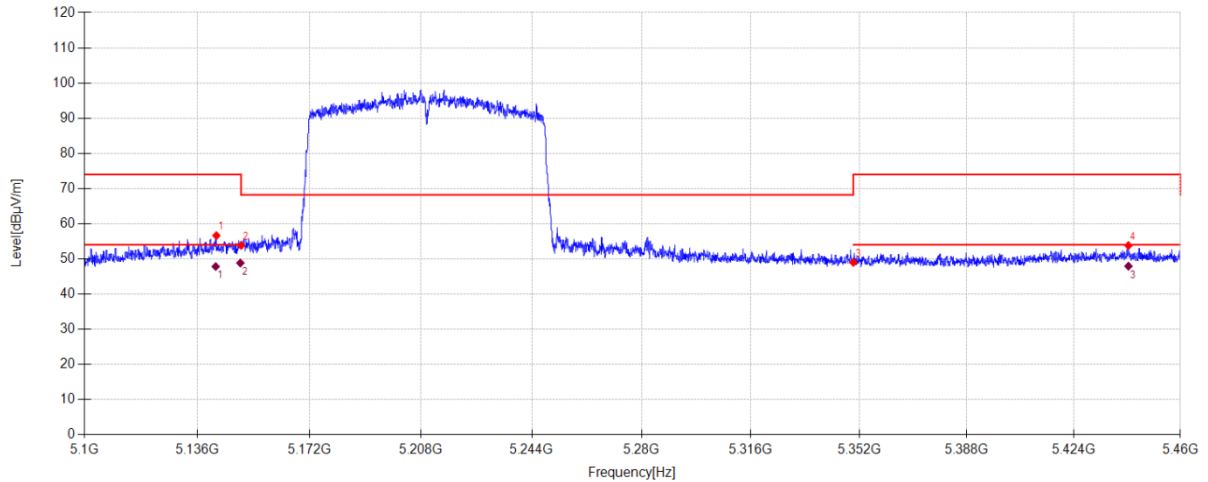

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5142.084	48.53	32.84	5.03	-29.77	56.63	74.00	17.37	PK	Vertical
2	5150.000	45.69	32.90	5.04	-29.77	53.86	68.20	14.34	PK	Vertical
3	5350.000	41.10	32.50	5.14	-29.73	49.01	68.20	19.19	PK	Vertical
4	5442.396	45.51	32.82	5.18	-29.71	53.80	74.00	20.20	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5141.862	39.72	32.84	5.03	47.82	54.00	6.18	AV	Vertical
2	5149.770	40.66	32.90	5.04	48.83	54.00	5.17	AV	Vertical
3	5442.396	39.65	32.82	5.18	47.94	54.00	6.06	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-06 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5290MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:58.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\237
Memo: Sample Number: S26020802-001

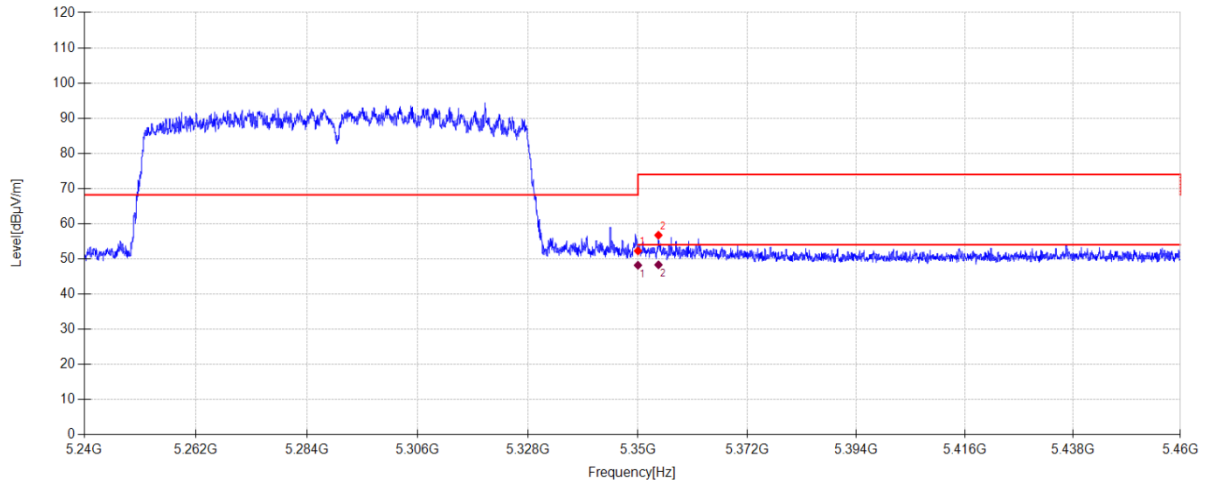**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.36	32.50	5.14	-29.73	52.27	68.20	15.93	PK	Horizontal
2	5354.114	48.79	32.53	5.14	-29.73	56.73	74.00	17.27	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.29	32.50	5.14	48.20	54.00	5.80	AV	Horizontal
2	5354.114	40.38	32.53	5.14	48.32	54.00	5.68	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5290MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\238

Memo:

Sample Number: S26020802-001

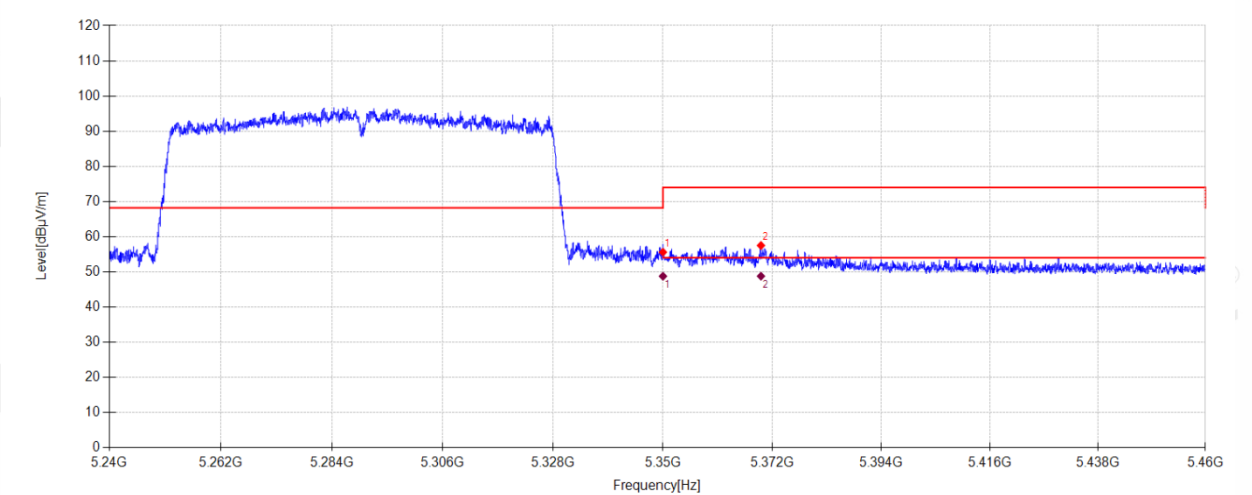

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	47.69	32.50	5.14	-29.73	55.60	68.20	12.60	PK	Vertical
2	5369.712	49.43	32.66	5.14	-29.73	57.50	74.00	16.50	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	40.86	32.50	5.14	48.77	54.00	5.23	AV	Vertical	
2	5369.712	40.72	32.66	5.14	48.79	54.00	5.21	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5530MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\239

Memo:

Sample Number: S26020802-001

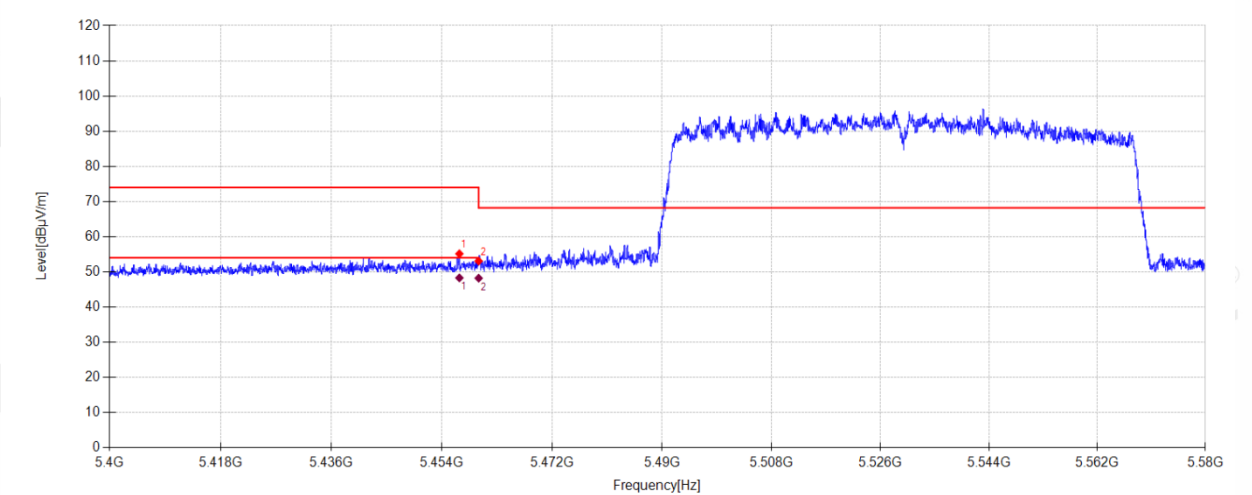

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.844	46.80	32.87	5.19	-29.71	55.15	74.00	18.85	PK	Horizontal
2	5460.000	44.70	32.90	5.19	-29.71	53.08	68.20	15.12	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.844	39.95	32.87	5.19	48.30	54.00	5.70	AV	Horizontal	
2	5460.000	39.83	32.90	5.19	48.21	54.00	5.79	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5530MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\240

Memo:

Sample Number: S26020802-001

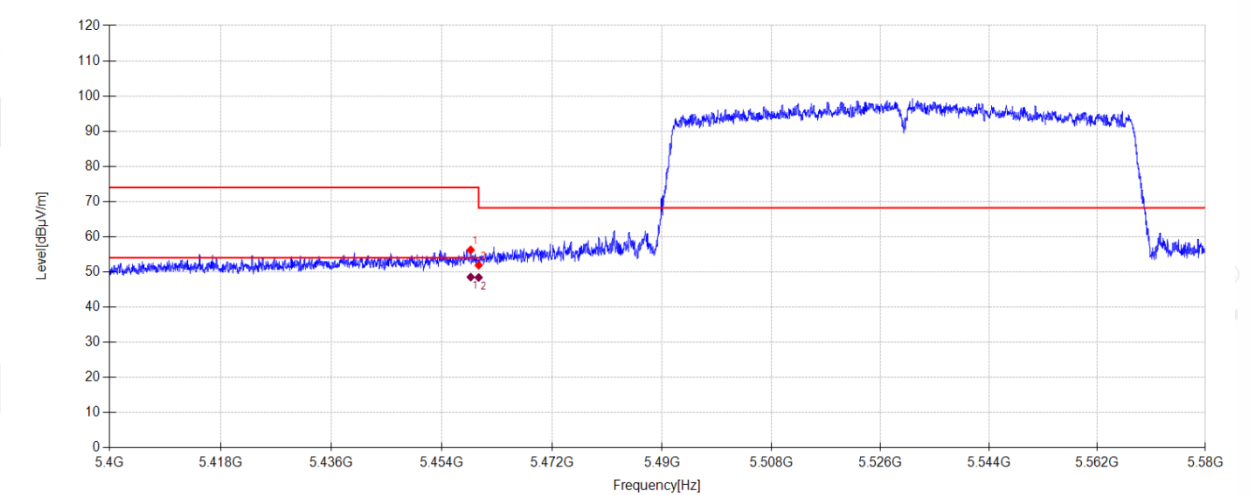

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.698	47.87	32.89	5.19	-29.71	56.24	74.00	17.76	PK	Vertical
2	5460.000	43.50	32.90	5.19	-29.71	51.88	68.20	16.32	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.698	40.16	32.89	5.19	48.53	54.00	5.47	AV	Vertical	
2	5460.000	40.03	32.90	5.19	48.41	54.00	5.59	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-06Tested By:Cao Jie

Test Mode:MIMO TX 11AC80 5610MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:58.0%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\241

Memo:Sample Number: S26020802-001

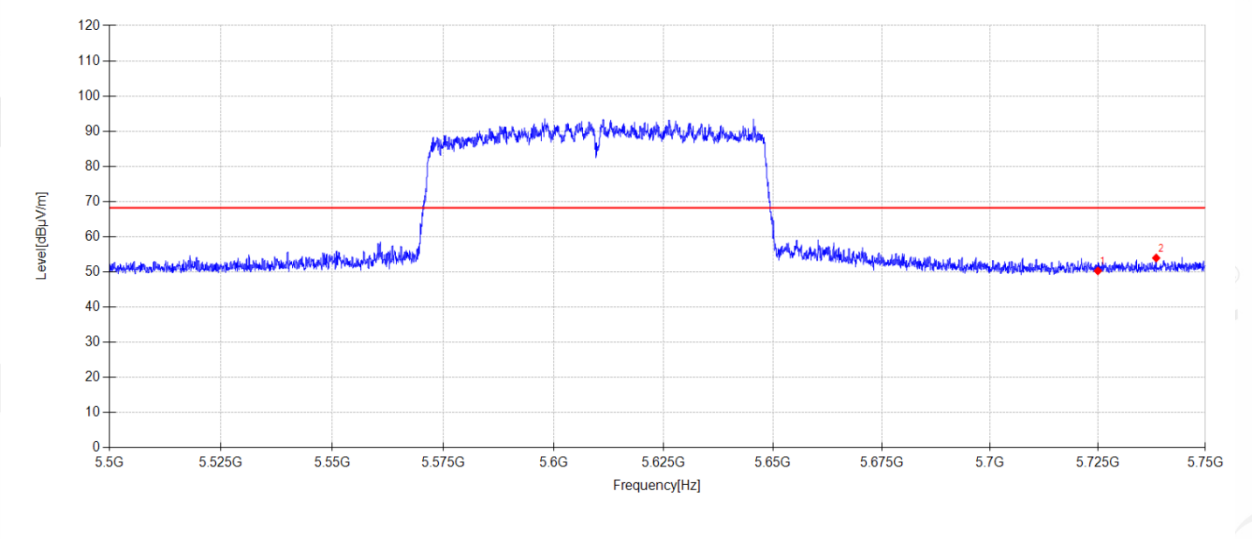

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.18	33.45	5.32	-29.66	50.29	68.20	17.91	PK	Horizontal
2	5738.550	44.64	33.64	5.33	-29.65	53.96	68.20	14.24	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\242

Memo:

Sample Number: S26020802-001

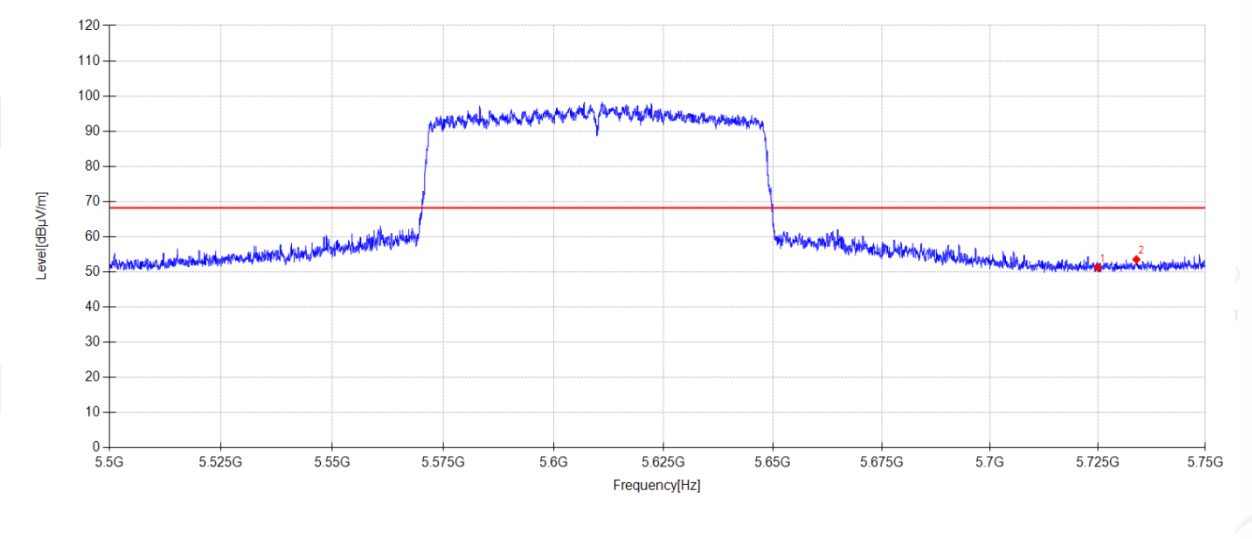

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.14	33.45	5.32	-29.66	51.25	68.20	16.95	PK	Vertical
2	5733.950	44.28	33.58	5.33	-29.65	53.54	68.20	14.66	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-06 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5210MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:58.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\243
Memo: Sample Number: S26020802-001

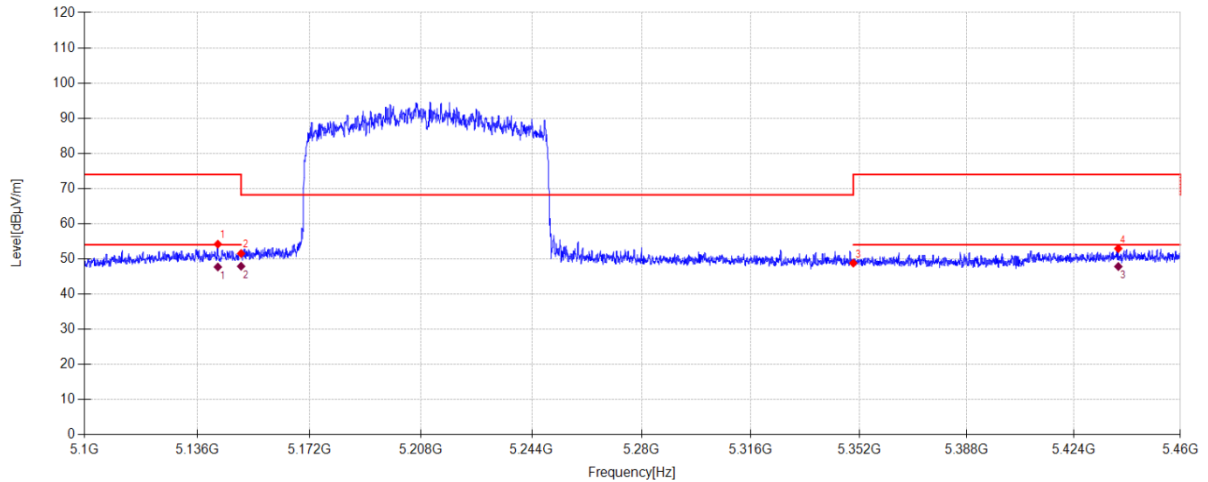

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5142.552	46.09	32.84	5.03	-29.77	54.19	74.00	19.81	PK	Horizontal
2	5150.000	43.36	32.90	5.04	-29.77	51.53	68.20	16.67	PK	Horizontal
3	5350.000	40.89	32.50	5.14	-29.73	48.80	68.20	19.40	PK	Horizontal
4	5438.976	44.65	32.82	5.18	-29.71	52.94	74.00	21.06	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5142.552	39.61	32.84	5.03	47.71	54.00	6.29	AV	Horizontal
2	5150.000	39.74	32.90	5.04	47.91	54.00	6.09	AV	Horizontal
3	5438.976	39.55	32.82	5.18	47.84	54.00	6.16	AV	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-06 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5210MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:58.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\244
Memo: Sample Number: S26020802-001

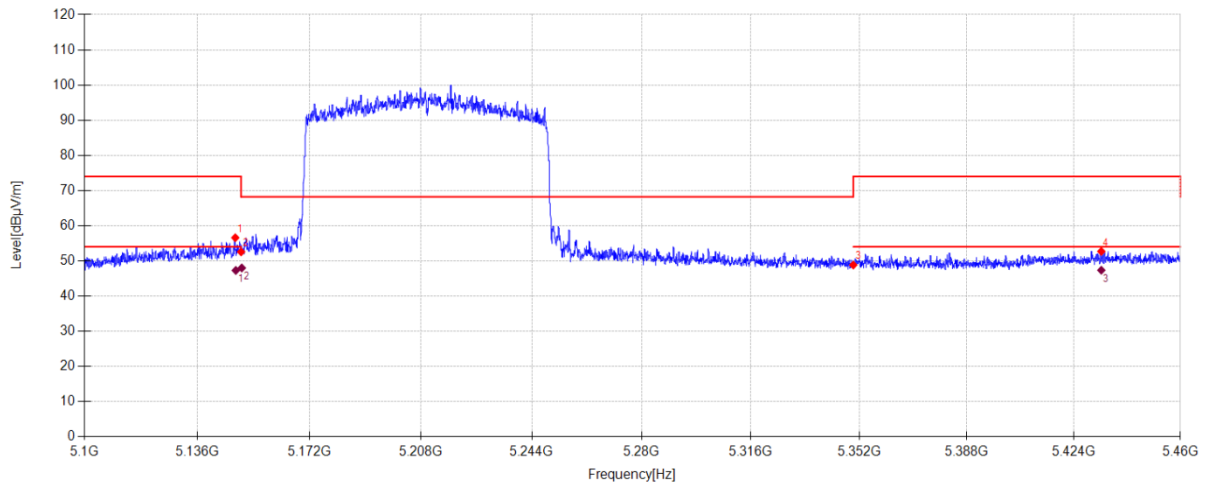

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.132	48.44	32.89	5.03	-29.77	56.59	74.00	17.41	PK	Vertical
2	5150.000	44.40	32.90	5.04	-29.77	52.57	68.20	15.63	PK	Vertical
3	5350.000	40.92	32.50	5.14	-29.73	48.83	68.20	19.37	PK	Vertical
4	5433.216	44.40	32.83	5.18	-29.71	52.70	74.00	21.30	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.297	39.15	32.89	5.03	47.30	54.00	6.70	AV	Vertical
2	5150.205	39.83	32.90	5.04	48.00	54.00	6.00	AV	Vertical
3	5433.216	39.06	32.83	5.18	47.36	54.00	6.64	AV	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5290MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\245

Memo:

Sample Number: S26020802-001

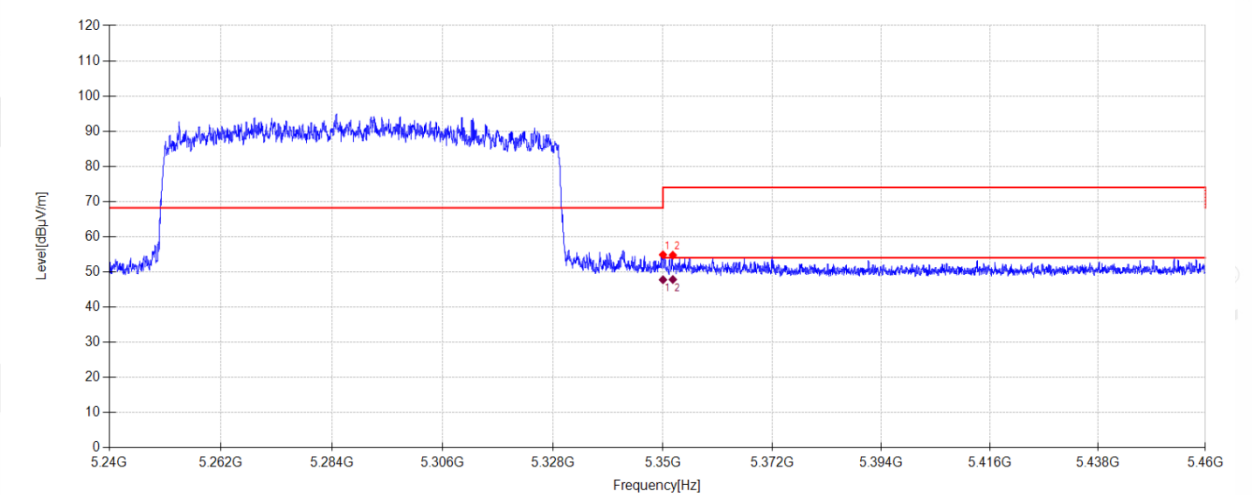

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	46.97	32.50	5.14	-29.73	54.88	68.20	13.32	PK	Horizontal
2	5351.980	46.83	32.52	5.14	-29.73	54.76	74.00	19.24	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	39.86	32.50	5.14	47.77	54.00	6.23	AV	Horizontal	
2	5351.980	39.91	32.52	5.14	47.84	54.00	6.16	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5290MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\246

Memo:

Sample Number: S26020802-001

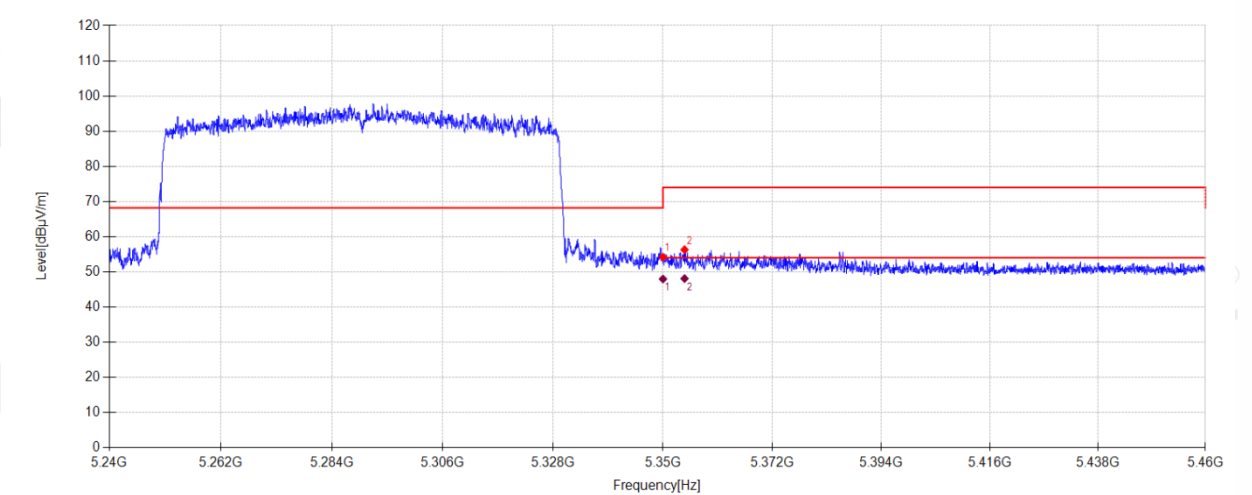

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	46.27	32.50	5.14	-29.73	54.18	68.20	14.02	PK	Vertical
2	5354.334	48.37	32.53	5.14	-29.73	56.31	74.00	17.69	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	40.07	32.50	5.14	47.98	54.00	6.02	AV	Vertical	
2	5354.334	40.16	32.53	5.14	48.10	54.00	5.90	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5530MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\247

Memo:

Sample Number: S26020802-001

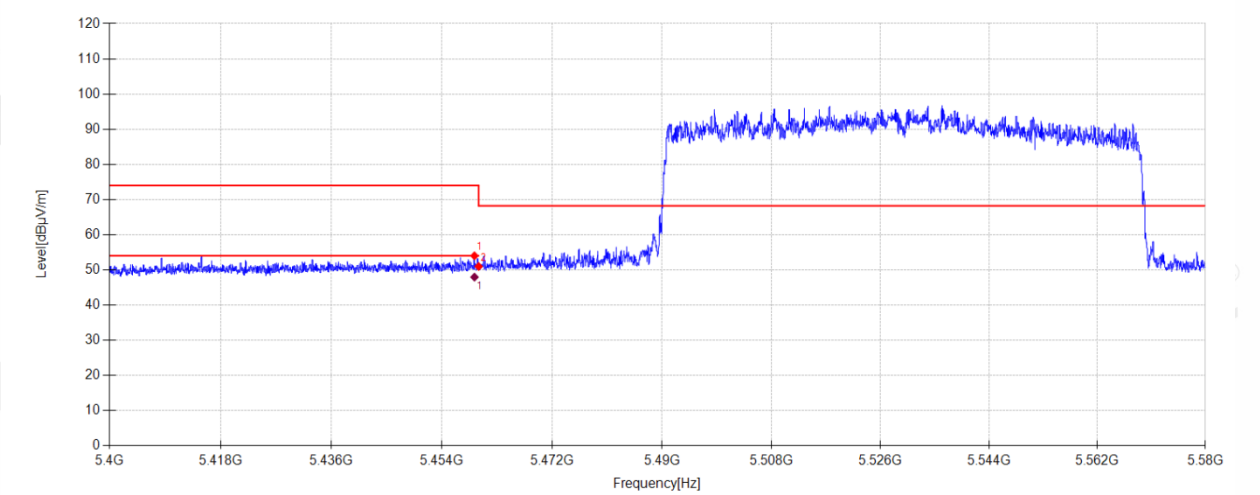

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5459.310	45.63	32.89	5.19	-29.71	54.00	74.00	20.00	PK	Horizontal
2	5460.000	42.60	32.90	5.19	-29.71	50.98	68.20	17.22	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5459.310	39.58	32.89	5.19	47.95	54.00	6.05	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5530MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\248

Memo:

Sample Number: S26020802-001

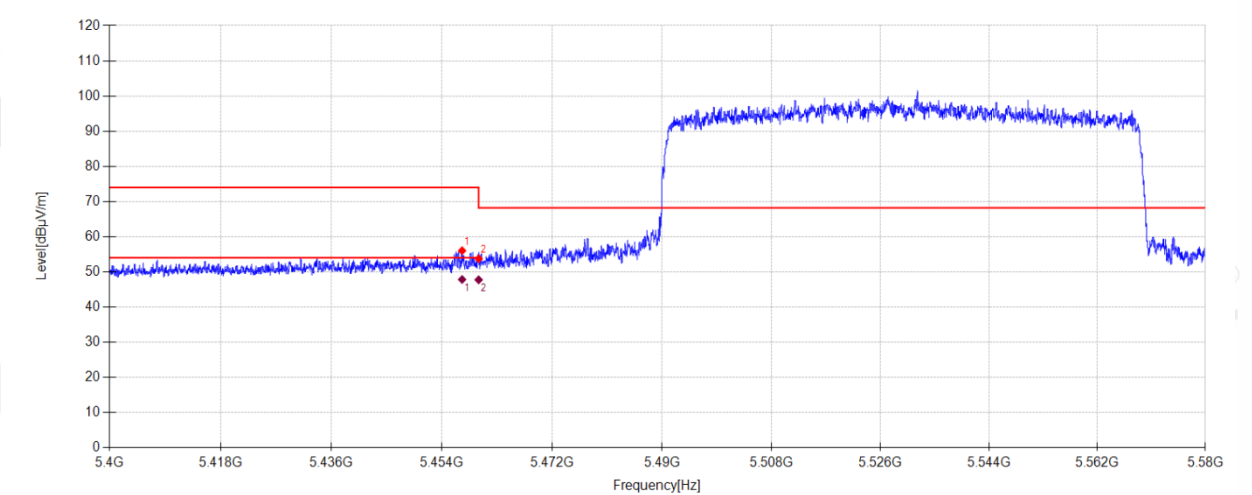

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.294	47.68	32.87	5.19	-29.71	56.03	74.00	17.97	PK	Vertical
2	5460.000	45.38	32.90	5.19	-29.71	53.76	68.20	14.44	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.294	39.49	32.87	5.19	47.84	54.00	6.16	AV	Vertical	
2	5460.000	39.37	32.90	5.19	47.75	54.00	6.25	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\249

Memo:

Sample Number: S26020802-001

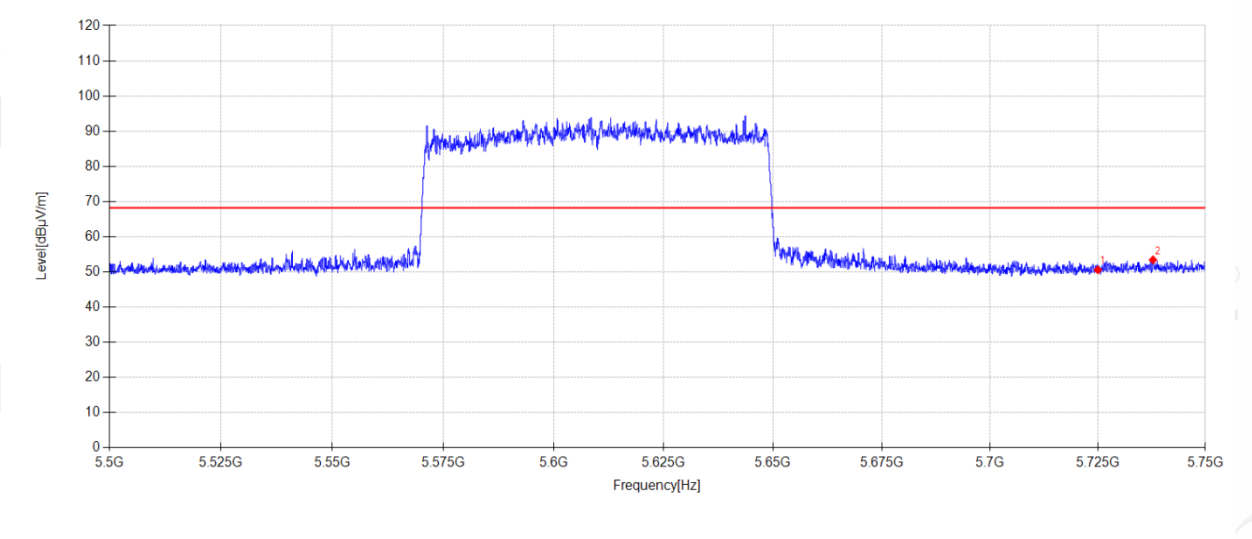

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.46	33.45	5.32	-29.66	50.57	68.20	17.63	PK	Horizontal
2	5737.800	44.13	33.63	5.33	-29.65	53.44	68.20	14.76	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G\250

Memo:

Sample Number: S26020802-001

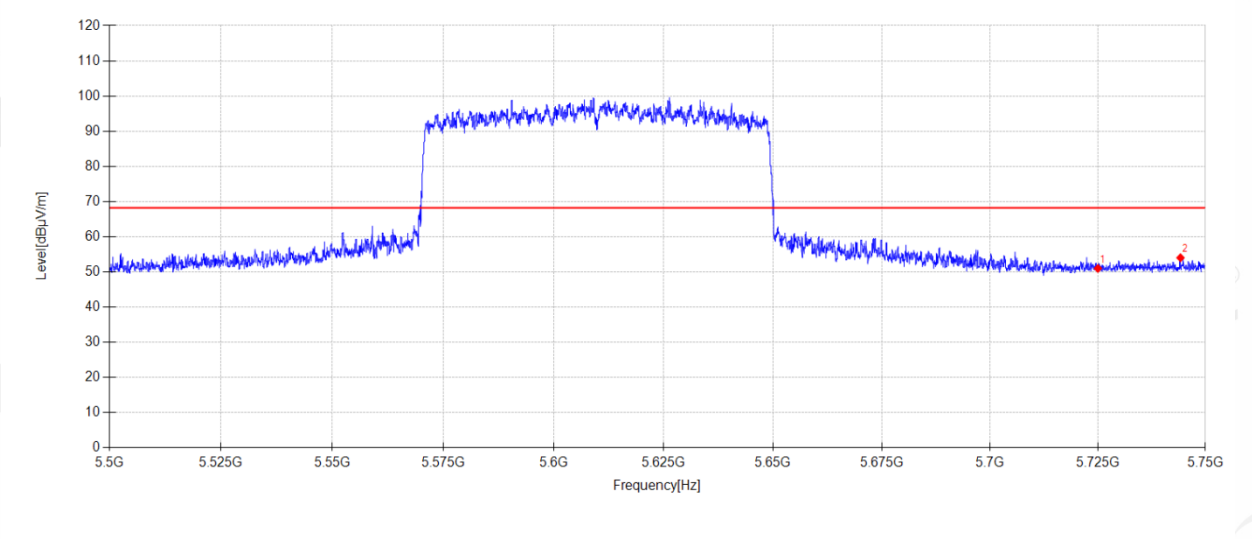

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.88	33.45	5.32	-29.66	50.99	68.20	17.21	PK	Vertical
2	5744.200	44.62	33.72	5.33	-29.65	54.02	68.20	14.18	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-04

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5720MHz Mode

Power Supply:

Battery

Condition:

Temp:21.9°C;Humi:60.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\21

Memo:

Sample Number: S26020802-001

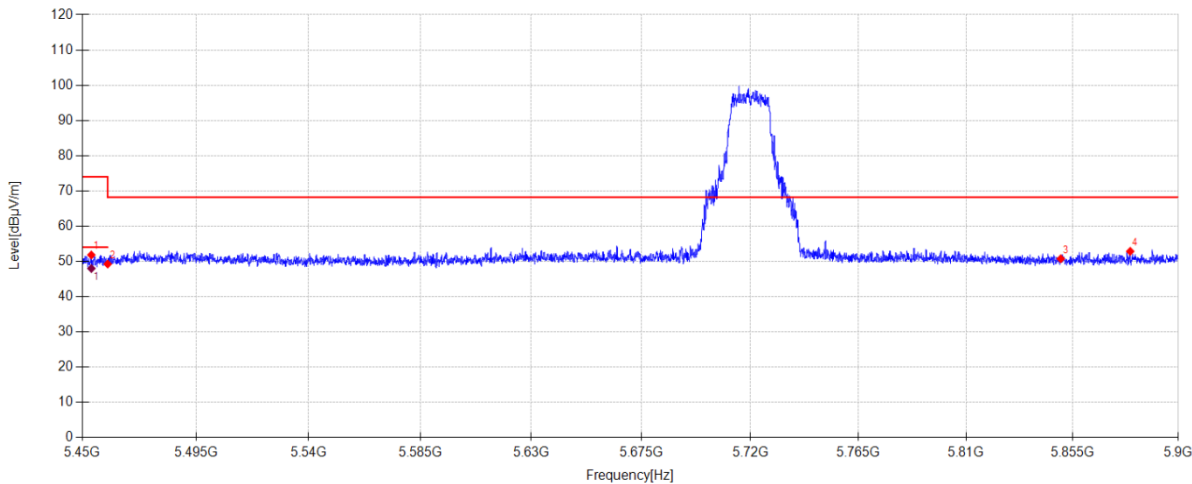

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.555	43.50	32.84	5.19	-29.71	51.82	74.00	22.18	PK	Horizontal
2	5460.000	40.87	32.90	5.19	-29.71	49.25	68.20	18.95	PK	Horizontal
3	5850.000	41.09	33.90	5.39	-29.63	50.75	68.20	17.45	PK	Horizontal
4	5879.480	42.93	34.14	5.40	-29.62	52.85	68.20	15.35	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5453.555	39.68	32.84	5.19	48.00	54.00	6.00	AV	Horizontal	

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-04 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11A 5720MHz Mode **Power Supply:** Battery
Condition: Temp:21.9°C;Humi:60.6% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\22
Memo: Sample Number: S26020802-001

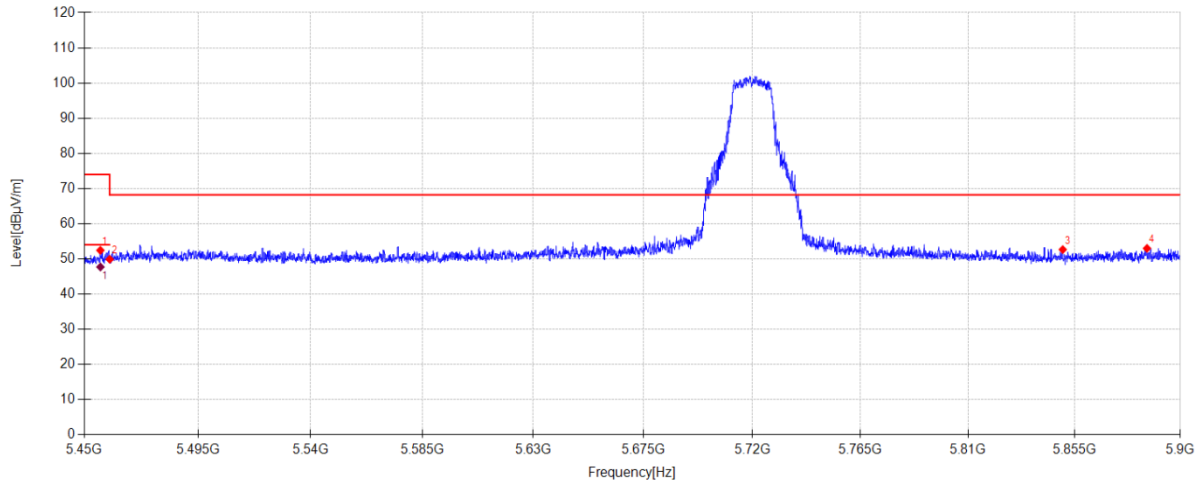**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.345	44.10	32.86	5.19	-29.71	52.44	74.00	21.56	PK	Vertical
2	5460.000	41.51	32.90	5.19	-29.71	49.89	68.20	18.31	PK	Vertical
3	5850.000	42.99	33.90	5.39	-29.63	52.65	68.20	15.55	PK	Vertical
4	5885.780	43.03	34.19	5.40	-29.62	53.00	68.20	15.20	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.345	39.37	32.86	5.19	47.71	54.00	6.29	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5720MHz Mode

Power Supply:

Battery

Condition:

Temp:25.3°C;Humi:58.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\23

Memo:

Sample Number: S26020802-001

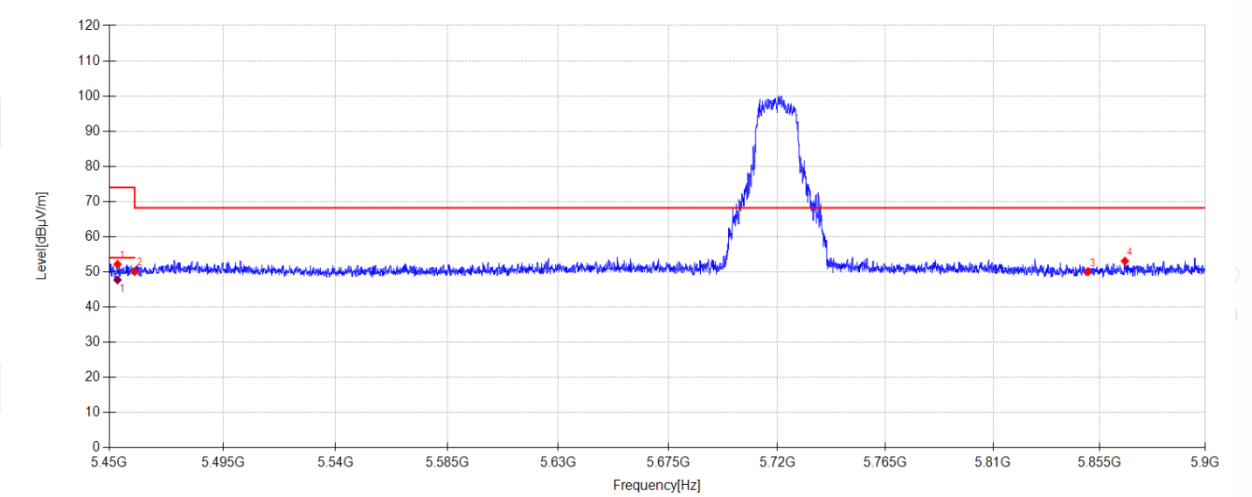

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.240	43.85	32.83	5.19	-29.71	52.16	74.00	21.84	PK	Horizontal
2	5460.000	41.68	32.90	5.19	-29.71	50.06	68.20	18.14	PK	Horizontal
3	5850.000	40.37	33.90	5.39	-29.63	50.03	68.20	18.17	PK	Horizontal
4	5865.755	43.29	34.03	5.39	-29.63	53.08	68.20	15.12	PK	Horizontal


Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5453.240	39.41	32.83	5.19	47.72	54.00	6.28	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-05 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11A 5720MHz Mode **Power Supply:** Battery
Condition: Temp:25.3°C;Humi:58.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\24
Memo: Sample Number: S26020802-001

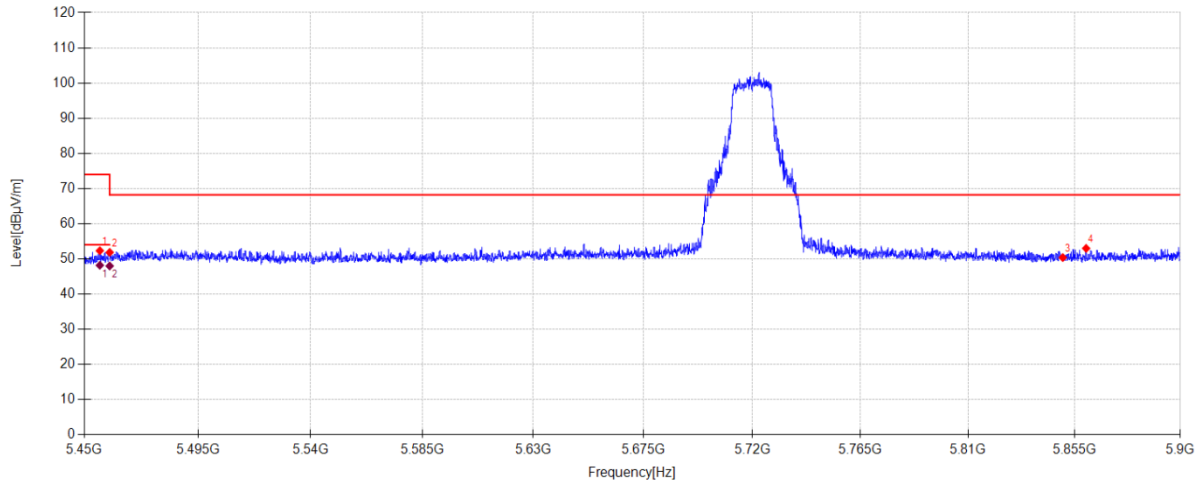**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.120	43.99	32.86	5.19	-29.71	52.33	74.00	21.67	PK	Vertical
2	5460.000	43.47	32.90	5.19	-29.71	51.85	68.20	16.35	PK	Vertical
3	5850.000	40.73	33.90	5.39	-29.63	50.39	68.20	17.81	PK	Vertical
4	5859.905	43.26	33.98	5.39	-29.63	53.00	68.20	15.20	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.120	39.85	32.86	5.19	48.19	54.00	5.81	AV	Vertical
2	5460.000	39.61	32.90	5.19	47.99	54.00	6.01	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 5720MHz Mode **Power Supply:** Battery
Condition: Temp:25.3°C;Humi:58.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\25
Memo: Sample Number: S26020802-001

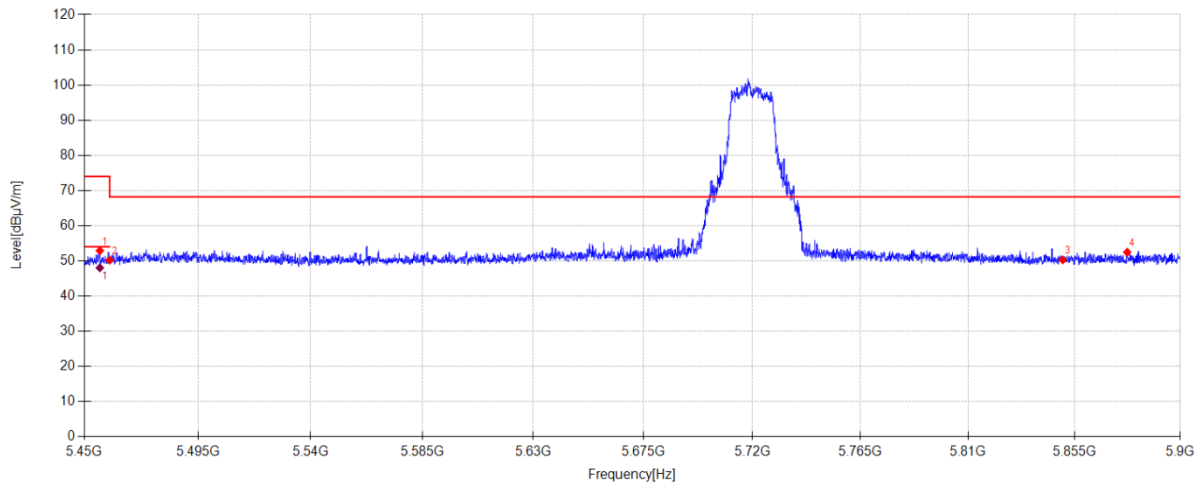**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.120	44.55	32.86	5.19	-29.71	52.89	74.00	21.11	PK	Horizontal
2	5460.000	41.81	32.90	5.19	-29.71	50.19	68.20	18.01	PK	Horizontal
3	5850.000	40.63	33.90	5.39	-29.63	50.29	68.20	17.91	PK	Horizontal
4	5877.365	42.57	34.12	5.40	-29.62	52.47	68.20	15.73	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.120	39.69	32.86	5.19	48.03	54.00	5.97	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-05Tested By:Cao Jie

Test Mode:MIMO TX 11N20 5720MHz ModePower Supply:Battery

Condition:Temp:25.3°C;Humi:58.4%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\26

Memo:Sample Number: S26020802-001

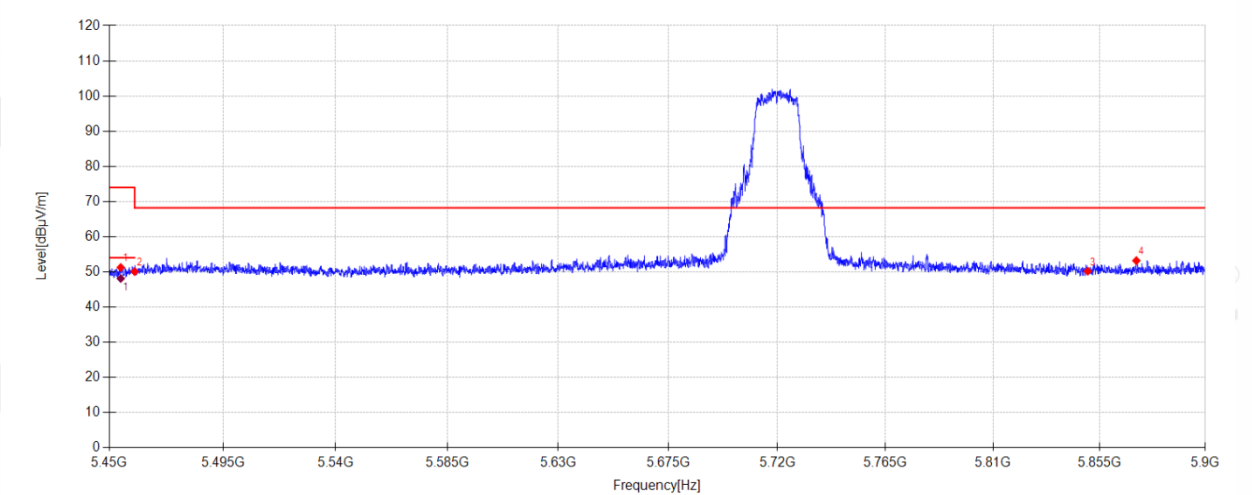

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.500	42.94	32.85	5.19	-29.71	51.27	74.00	22.73	PK	Vertical
2	5460.000	41.69	32.90	5.19	-29.71	50.07	68.20	18.13	PK	Vertical
3	5850.000	40.53	33.90	5.39	-29.63	50.19	68.20	18.01	PK	Vertical
4	5870.615	43.37	34.06	5.40	-29.63	53.20	68.20	15.00	PK	Vertical


Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5454.500	39.80	32.85	5.19	48.13	54.00	5.87	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5710MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:58.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\33
Memo: Sample Number: S26020802-001

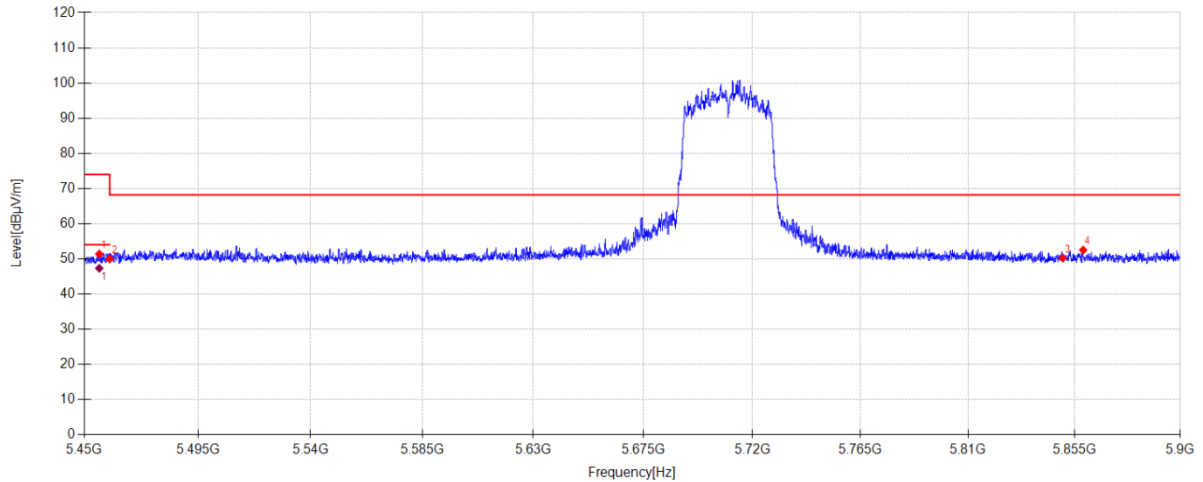**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.895	43.05	32.86	5.19	-29.71	51.39	74.00	22.61	PK	Horizontal
2	5460.000	41.59	32.90	5.19	-29.71	49.97	68.20	18.23	PK	Horizontal
3	5850.000	40.58	33.90	5.39	-29.63	50.24	68.20	17.96	PK	Horizontal
4	5858.645	42.78	33.97	5.39	-29.63	52.51	68.20	15.69	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.895	38.99	32.86	5.19	47.33	54.00	6.67	AV	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.