

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5710MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\34

Memo:

Sample Number: S26020802-001

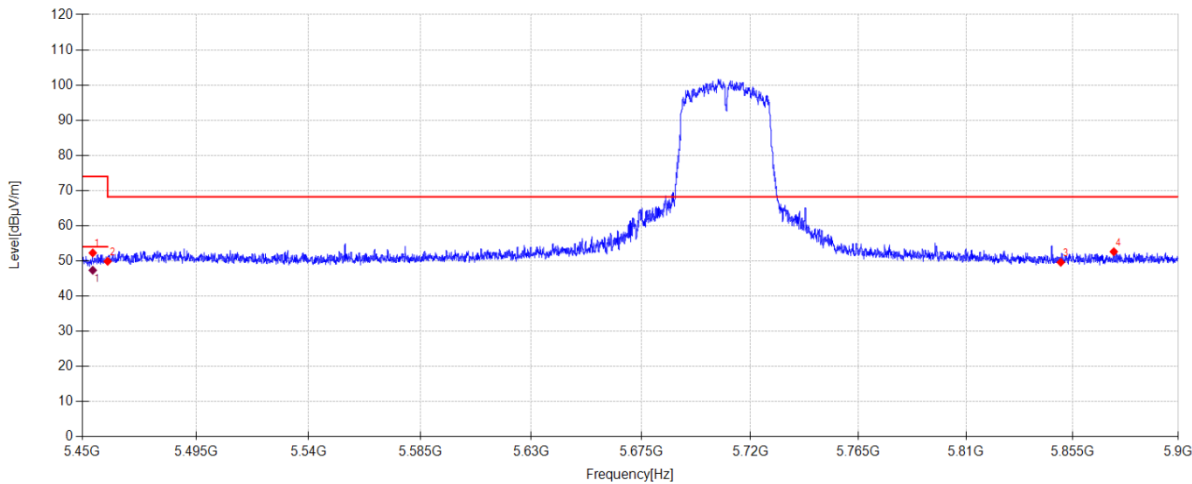

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.095	43.95	32.84	5.19	-29.71	52.27	74.00	21.73	PK	Vertical
2	5460.000	41.50	32.90	5.19	-29.71	49.88	68.20	18.32	PK	Vertical
3	5850.000	39.93	33.90	5.39	-29.63	49.59	68.20	18.61	PK	Vertical
4	5872.505	42.76	34.08	5.40	-29.63	52.61	68.20	15.59	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5454.095	39.02	32.84	5.19	47.34	54.00	6.66	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5710MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\35

Memo:

Sample Number: S26020802-001

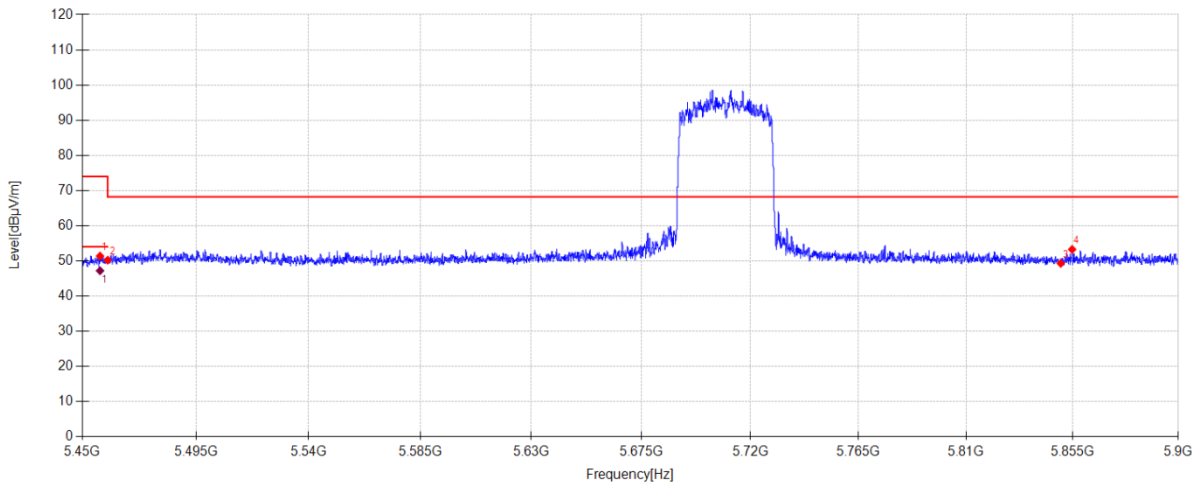

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.975	43.03	32.87	5.19	-29.71	51.38	74.00	22.62	PK	Horizontal
2	5460.000	41.83	32.90	5.19	-29.71	50.21	68.20	17.99	PK	Horizontal
3	5850.000	39.61	33.90	5.39	-29.63	49.27	68.20	18.93	PK	Horizontal
4	5854.820	43.56	33.94	5.39	-29.63	53.26	68.20	14.94	PK	Horizontal


Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.975	38.85	32.87	5.19	47.20	54.00	6.80	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5710MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:58.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\36
Memo: Sample Number: S26020802-001

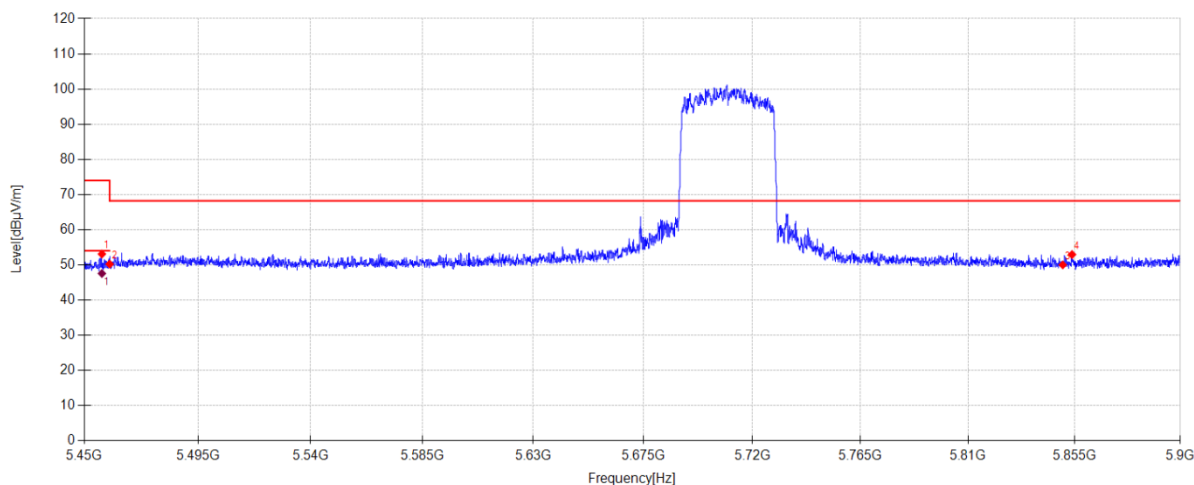**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.930	44.74	32.87	5.19	-29.71	53.09	74.00	20.91	PK	Vertical
2	5460.000	41.85	32.90	5.19	-29.71	50.23	68.20	17.97	PK	Vertical
3	5850.000	40.35	33.90	5.39	-29.63	50.01	68.20	18.19	PK	Vertical
4	5853.920	43.25	33.93	5.39	-29.63	52.94	68.20	15.26	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.930	39.21	32.87	5.19	47.56	54.00	6.44	AV	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-06Tested By:Cao Jie

Test Mode:MIMO TX 11AX20 5720MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:58.0%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\37

Memo:Sample Number: S26020802-001

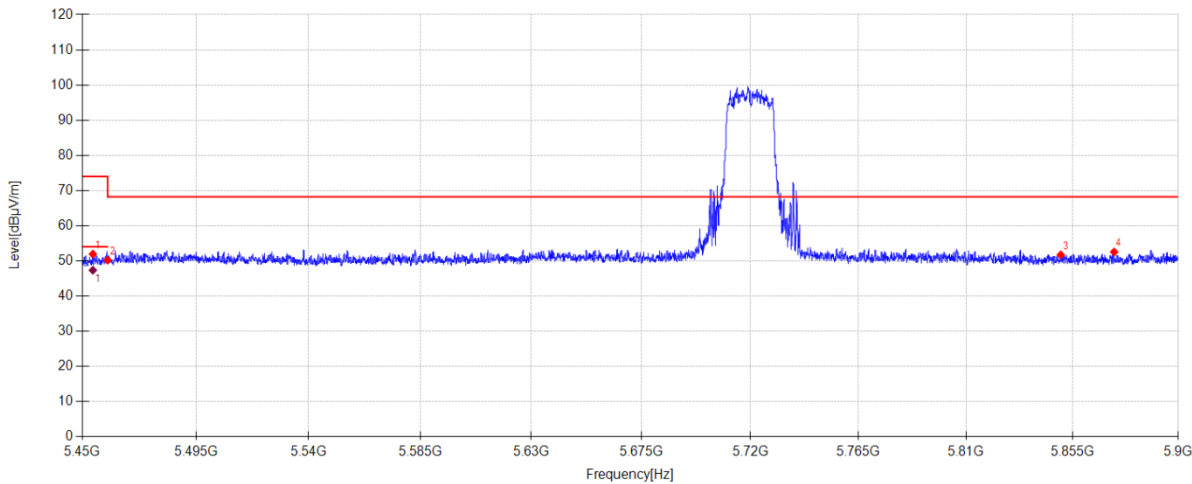

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.140	43.62	32.84	5.19	-29.71	51.94	74.00	22.06	PK	Horizontal
2	5460.000	41.83	32.90	5.19	-29.71	50.21	68.20	17.99	PK	Horizontal
3	5850.000	42.07	33.90	5.39	-29.63	51.73	68.20	16.47	PK	Horizontal
4	5872.640	42.69	34.08	5.40	-29.63	52.54	68.20	15.66	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5454.140	39.03	32.84	5.19	47.35	54.00	6.65	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5720MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\38

Memo:

Sample Number: S26020802-001

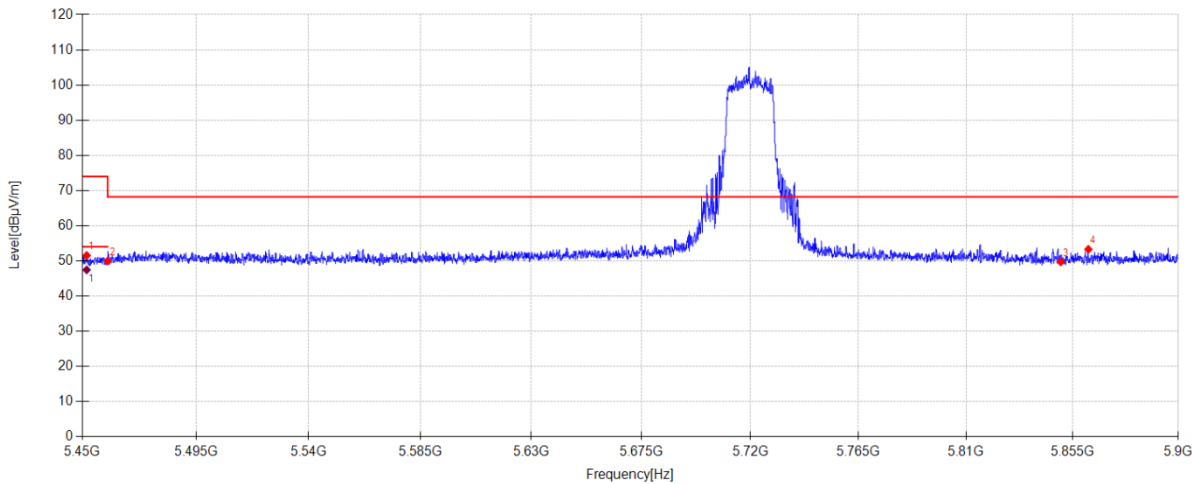

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.710	43.24	32.82	5.19	-29.71	51.54	74.00	22.46	PK	Vertical
2	5460.000	41.60	32.90	5.19	-29.71	49.98	68.20	18.22	PK	Vertical
3	5850.000	40.05	33.90	5.39	-29.63	49.71	68.20	18.49	PK	Vertical
4	5861.705	43.55	33.99	5.39	-29.63	53.30	68.20	14.90	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5451.710	39.14	32.82	5.19	47.44	54.00	6.56	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-06Tested By:Cao Jie

Test Mode:MIMO TX 11AC20 5720MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:58.0%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\39

Memo:Sample Number: S26020802-001

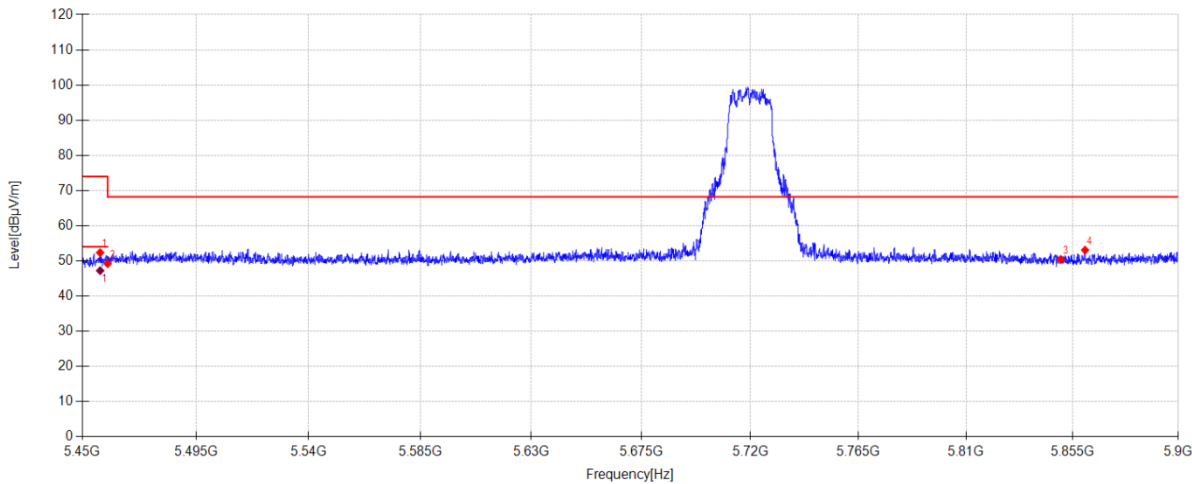

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.020	44.00	32.87	5.19	-29.71	52.35	74.00	21.65	PK	Horizontal
2	5460.000	40.82	32.90	5.19	-29.71	49.20	68.20	19.00	PK	Horizontal
3	5850.000	40.78	33.90	5.39	-29.63	50.44	68.20	17.76	PK	Horizontal
4	5860.310	43.34	33.98	5.39	-29.63	53.08	68.20	15.12	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5457.020	38.89	32.87	5.19	47.24	54.00	6.76	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5720MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\40

Memo:

Sample Number: S26020802-001

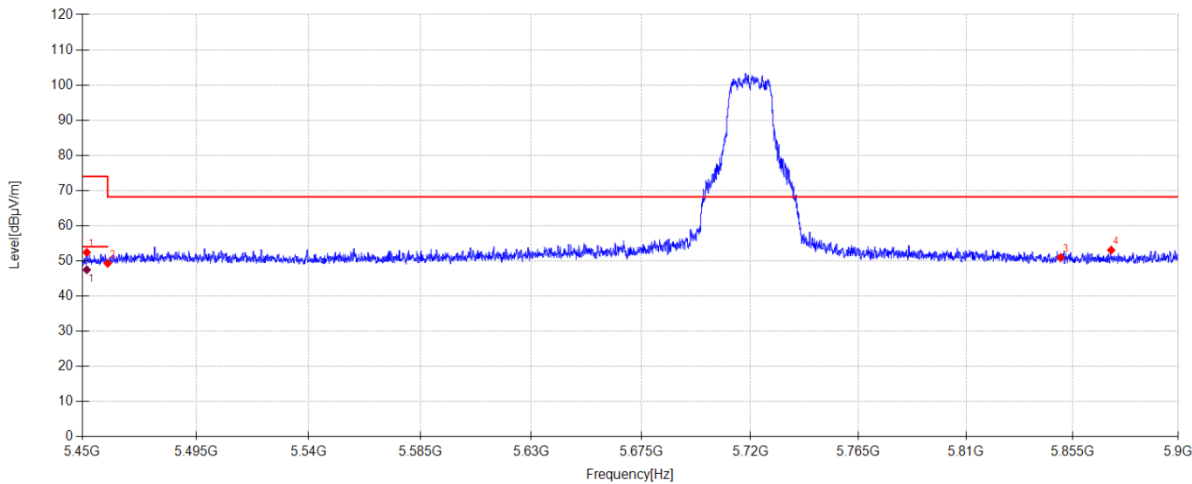

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.755	44.13	32.82	5.19	-29.71	52.43	74.00	21.57	PK	Vertical
2	5460.000	40.91	32.90	5.19	-29.71	49.29	68.20	18.91	PK	Vertical
3	5850.000	41.33	33.90	5.39	-29.63	50.99	68.20	17.21	PK	Vertical
4	5871.380	43.23	34.07	5.40	-29.63	53.07	68.20	15.13	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5451.755	39.17	32.82	5.19	47.47	54.00	6.53	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-06Tested By:Cao Jie

Test Mode:MIMO TX 11AC80 5690MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:58.0%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\41

Memo:Sample Number: S26020802-001

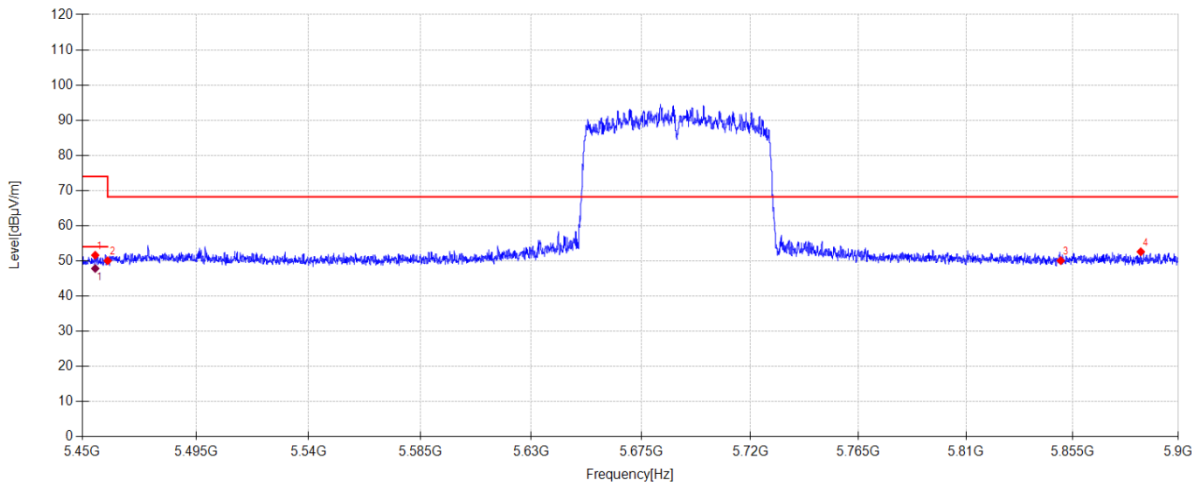

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.085	43.29	32.85	5.19	-29.71	51.62	74.00	22.38	PK	Horizontal
2	5460.000	41.66	32.90	5.19	-29.71	50.04	68.20	18.16	PK	Horizontal
3	5850.000	40.40	33.90	5.39	-29.63	50.06	68.20	18.14	PK	Horizontal
4	5883.980	42.64	34.17	5.40	-29.62	52.59	68.20	15.61	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5455.085	39.51	32.85	5.19	47.84	54.00	6.16	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-06Tested By:Cao Jie

Test Mode:MIMO TX 11AC80 5690MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:58.0%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\42

Memo:Sample Number: S26020802-001

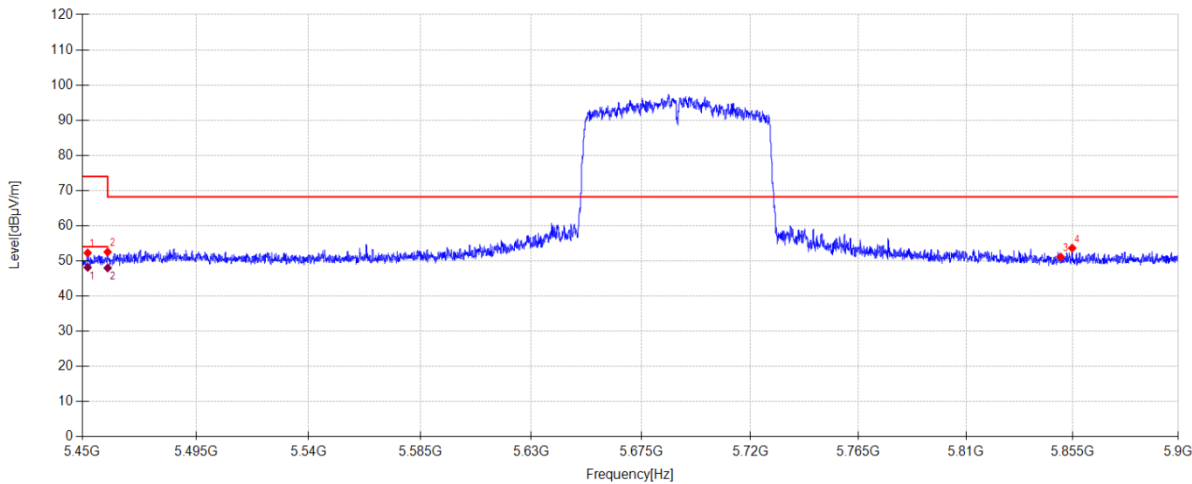

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.115	43.97	32.82	5.19	-29.71	52.27	74.00	21.73	PK	Vertical
2	5460.000	44.15	32.90	5.19	-29.71	52.53	68.20	15.67	PK	Vertical
3	5850.000	41.47	33.90	5.39	-29.63	51.13	68.20	17.07	PK	Vertical
4	5854.865	43.94	33.94	5.39	-29.63	53.64	68.20	14.56	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5452.115	39.84	32.82	5.19	48.14	54.00	5.86	AV	Vertical	
2	5460.000	39.61	32.90	5.19	47.99	54.00	6.01	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-06Tested By:Cao Jie

Test Mode:MIMO TX 11AX80 5690MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:58.0%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\43

Memo:Sample Number: S26020802-001

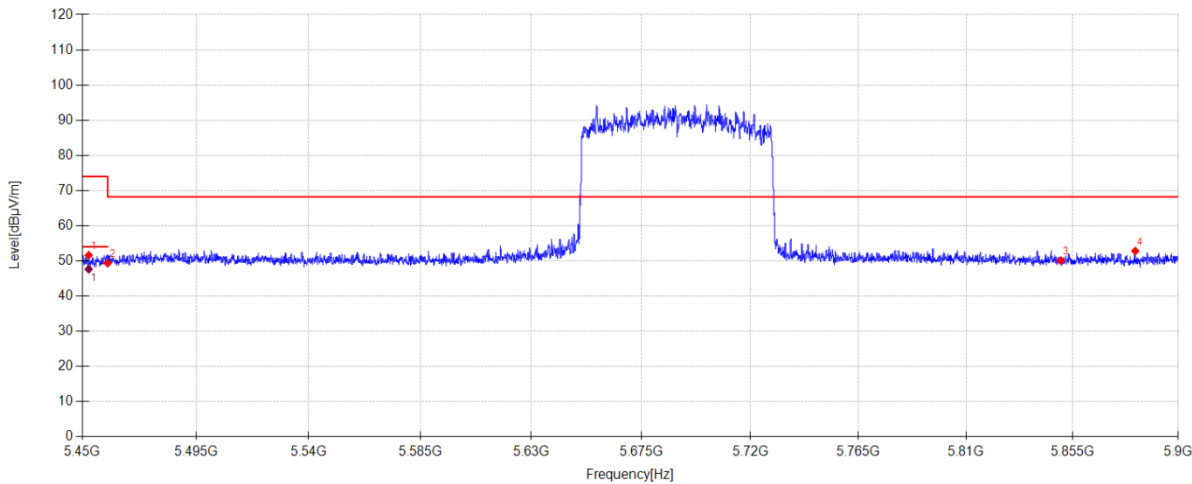

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.520	43.30	32.83	5.19	-29.71	51.61	74.00	22.39	PK	Horizontal
2	5460.000	40.99	32.90	5.19	-29.71	49.37	68.20	18.83	PK	Horizontal
3	5850.000	40.43	33.90	5.39	-29.63	50.09	68.20	18.11	PK	Horizontal
4	5881.640	42.88	34.15	5.40	-29.62	52.81	68.20	15.39	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5452.520	39.35	32.83	5.19	47.66	54.00	6.34	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-06Tested By:Cao Jie

Test Mode:MIMO TX 11AX80 5690MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:58.0%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G KUAYUE\44

Memo:Sample Number: S26020802-001

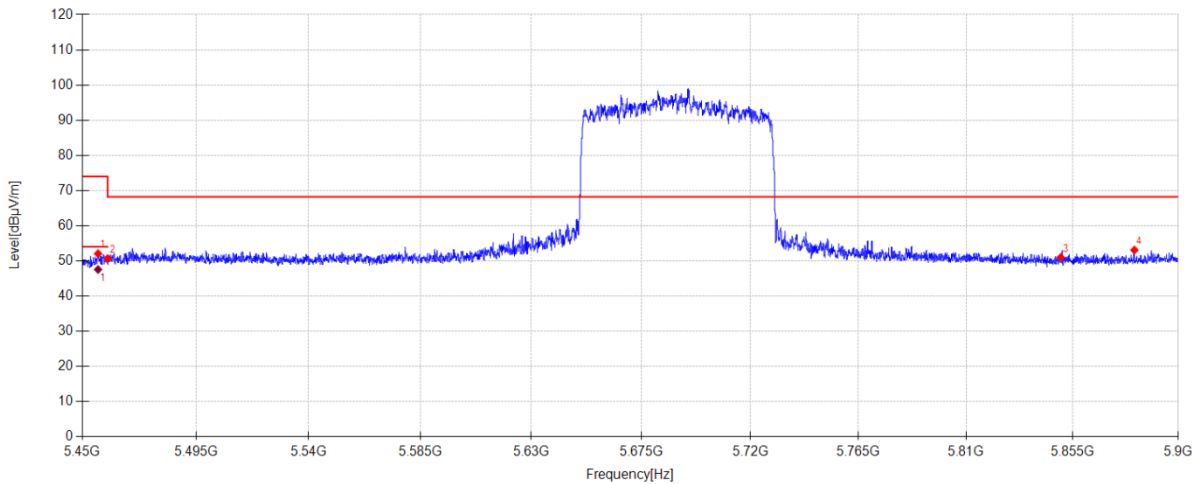

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.210	43.70	32.86	5.19	-29.71	52.04	74.00	21.96	PK	Vertical
2	5460.000	42.27	32.90	5.19	-29.71	50.65	68.20	17.55	PK	Vertical
3	5850.000	41.34	33.90	5.39	-29.63	51.00	68.20	17.20	PK	Vertical
4	5881.280	43.15	34.15	5.40	-29.62	53.08	68.20	15.12	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5456.210	39.21	32.86	5.19	47.55	54.00	6.45	AV	Vertical	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5775MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\59

Memo:

Sample Number: S26020802-001

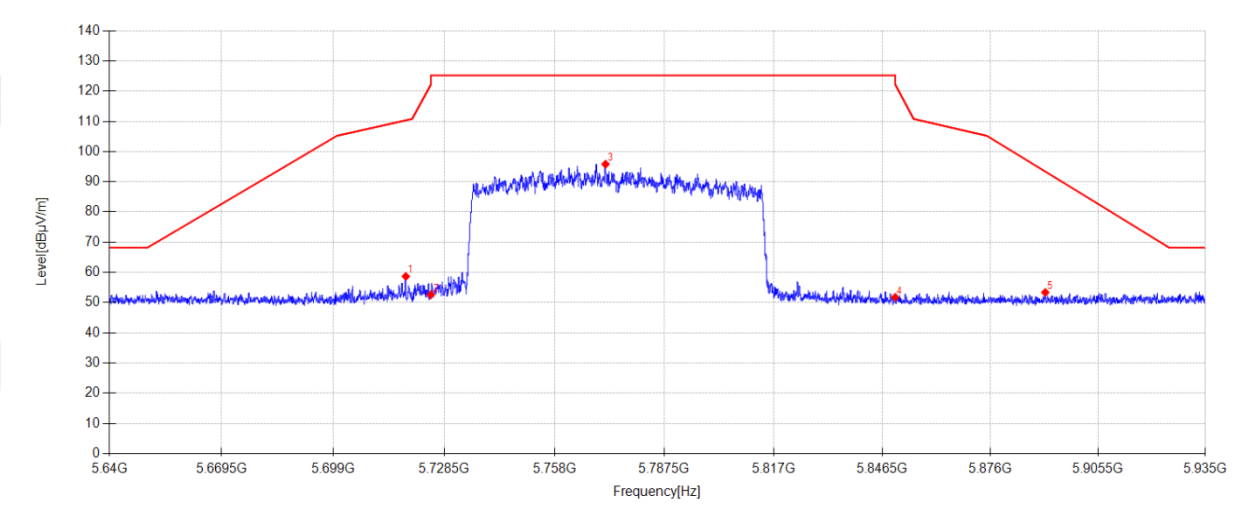

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5718.323	49.70	33.36	5.26	-29.66	58.66	110.33	51.67	PK	Horizontal
2	5725.000	43.54	33.45	5.26	-29.65	52.60	122.20	69.60	PK	Horizontal
3	5771.688	86.35	33.84	5.28	-29.65	95.82	125.20	29.38	PK	Horizontal
4	5850.000	42.15	33.90	5.31	-29.63	51.73	122.20	70.47	PK	Horizontal
5	5890.986	43.42	34.23	5.33	-29.62	53.36	93.37	40.01	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5775MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\60

Memo:

Sample Number: S26020802-001

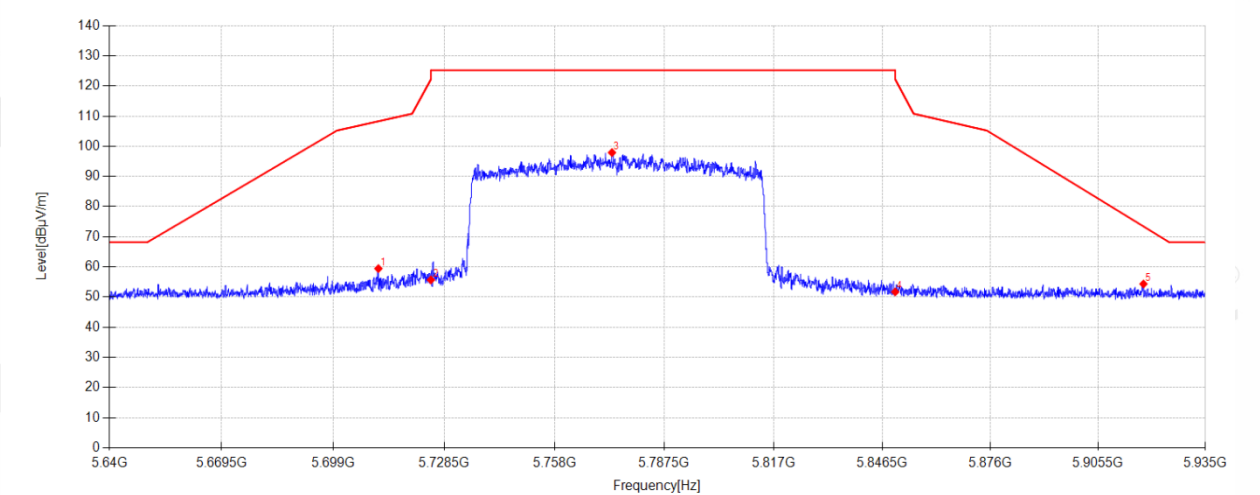

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.036	50.59	33.25	5.25	-29.66	59.43	108.29	48.86	PK	Vertical
2	5725.000	46.62	33.45	5.26	-29.65	55.68	122.20	66.52	PK	Vertical
3	5773.429	88.42	33.85	5.28	-29.65	97.90	125.20	27.30	PK	Vertical
4	5850.000	42.13	33.90	5.31	-29.63	51.71	122.20	70.49	PK	Vertical
5	5917.949	44.28	34.34	5.34	-29.62	54.34	73.42	19.08	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5775MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\61

Memo:

Sample Number: S26020802-001

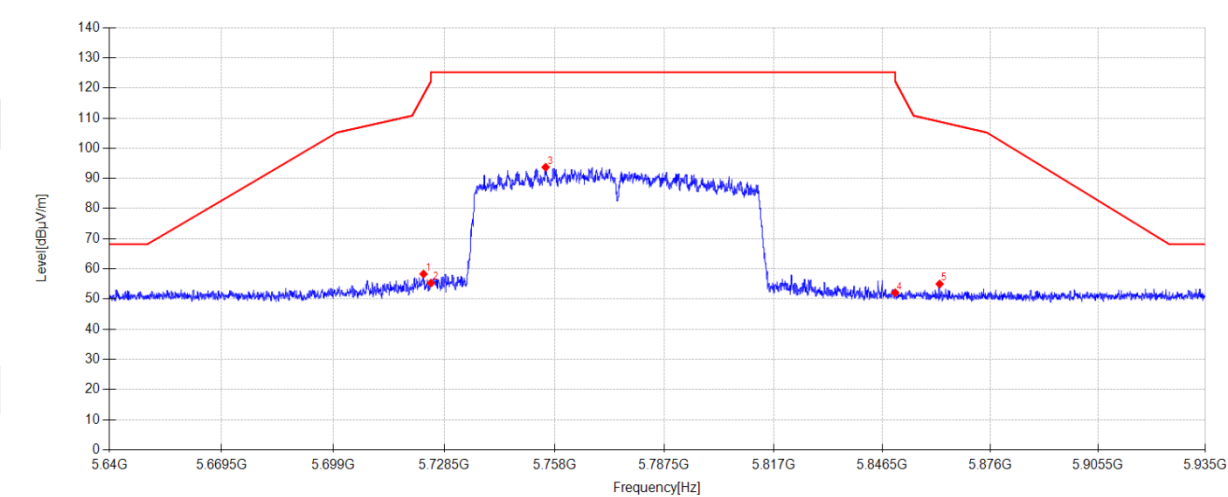

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.043	49.27	33.42	5.26	-29.66	58.29	117.74	59.45	PK	Horizontal
2	5725.000	46.24	33.45	5.26	-29.65	55.30	122.20	66.90	PK	Horizontal
3	5755.640	84.28	33.81	5.27	-29.65	93.71	125.20	31.49	PK	Horizontal
4	5850.000	42.50	33.90	5.31	-29.63	52.08	122.20	70.12	PK	Horizontal
5	5862.106	45.30	34.00	5.31	-29.63	54.98	108.81	53.83	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5775MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\62

Memo:

Sample Number: S26020802-001

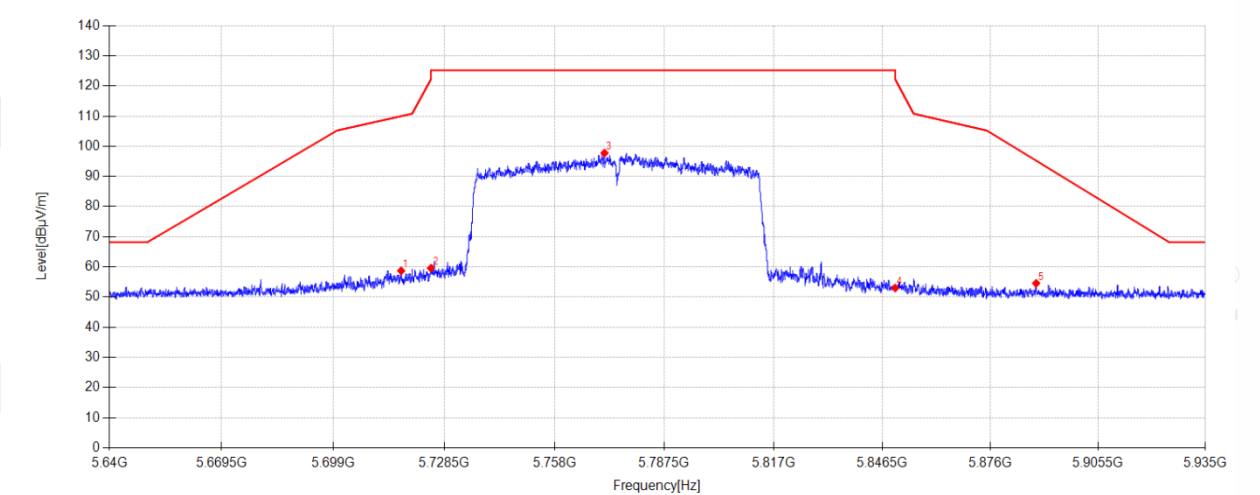

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5717.084	49.76	33.34	5.26	-29.66	58.70	109.98	51.28	PK	Vertical
2	5725.000	50.50	33.45	5.26	-29.65	59.56	122.20	62.64	PK	Vertical
3	5771.423	88.28	33.84	5.28	-29.65	97.75	125.20	27.45	PK	Vertical
4	5850.000	43.41	33.90	5.31	-29.63	52.99	122.20	69.21	PK	Vertical
5	5888.479	44.64	34.21	5.33	-29.62	54.56	95.23	40.67	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5755MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\63

Memo:

Sample Number: S26020802-001

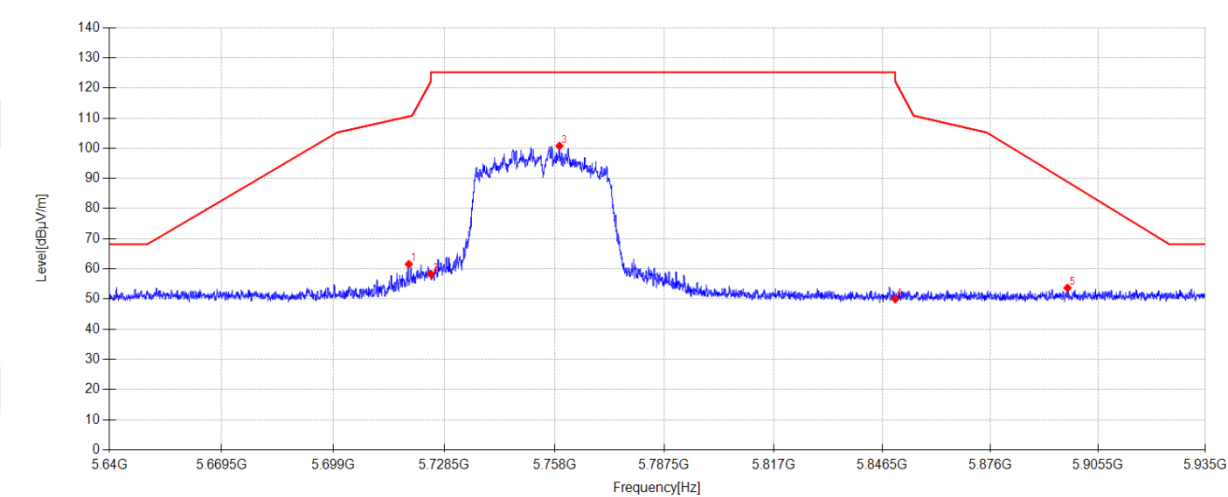

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.119	52.59	33.37	5.26	-29.66	61.56	110.55	48.99	PK	Horizontal
2	5725.000	49.22	33.45	5.26	-29.65	58.28	122.20	63.92	PK	Horizontal
3	5759.357	91.33	33.82	5.27	-29.65	100.77	125.20	24.43	PK	Horizontal
4	5850.000	40.41	33.90	5.31	-29.63	49.99	122.20	72.21	PK	Horizontal
5	5897.063	43.69	34.28	5.33	-29.62	53.68	88.87	35.19	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5755MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\64

Memo:

Sample Number: S26020802-001

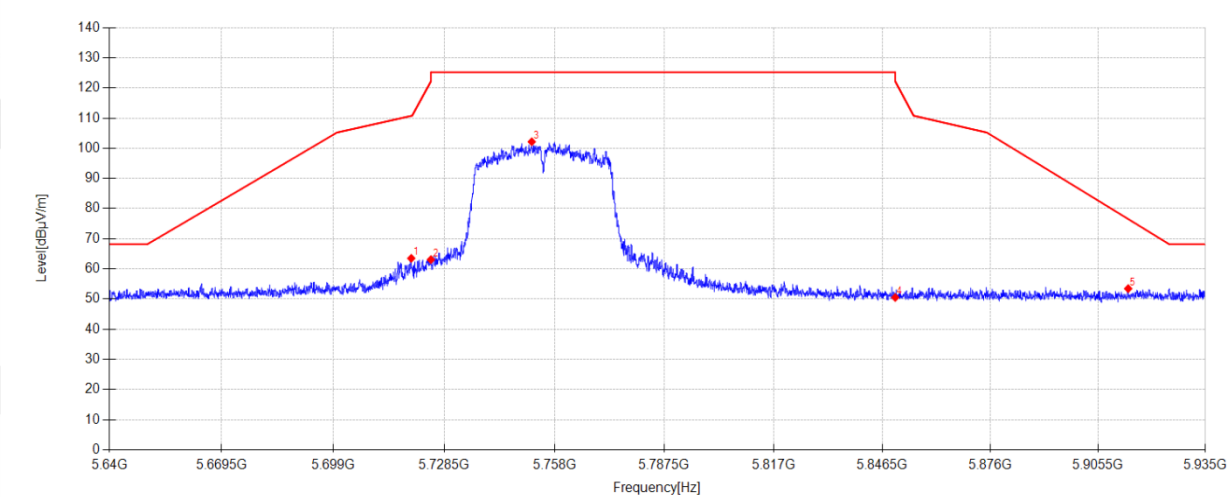

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.768	54.51	33.38	5.26	-29.66	63.49	110.74	47.25	PK	Vertical
2	5725.000	54.01	33.45	5.26	-29.65	63.07	122.20	59.13	PK	Vertical
3	5751.923	92.73	33.80	5.27	-29.65	102.15	125.20	23.05	PK	Vertical
4	5850.000	40.93	33.90	5.31	-29.63	50.51	122.20	71.69	PK	Vertical
5	5913.731	43.40	34.33	5.34	-29.62	53.45	76.54	23.09	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5795MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\65

Memo:

Sample Number: S26020802-001

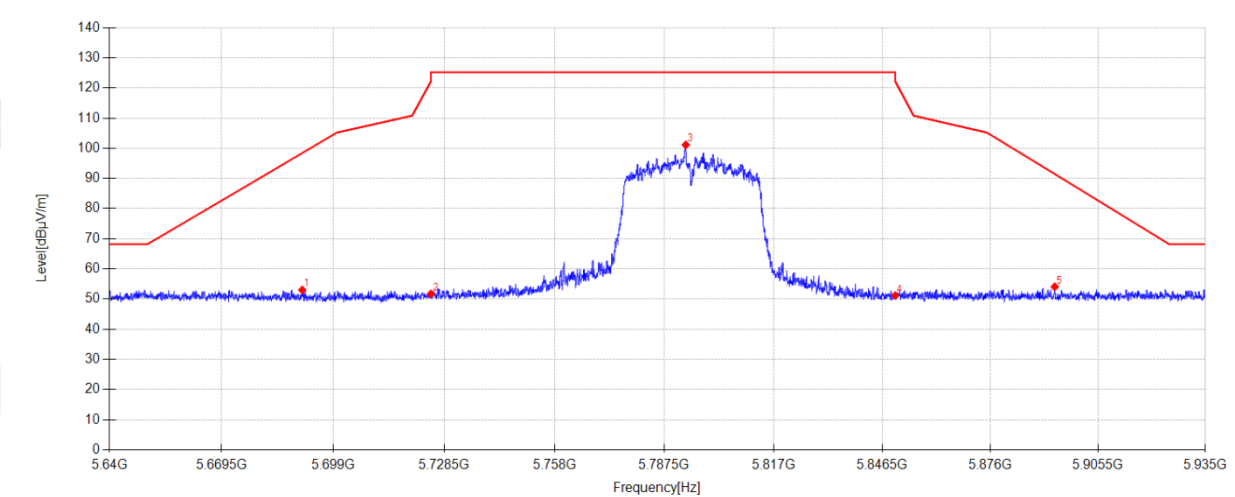

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5690.829	44.24	33.17	5.25	-29.66	53.00	98.41	45.41	PK	Horizontal
2	5725.000	42.62	33.45	5.26	-29.65	51.68	122.20	70.52	PK	Horizontal
3	5793.282	91.58	33.89	5.29	-29.64	101.12	125.20	24.08	PK	Horizontal
4	5850.000	41.56	33.90	5.31	-29.63	51.14	122.20	71.06	PK	Horizontal
5	5893.582	44.11	34.25	5.33	-29.62	54.07	91.45	37.38	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5795MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\66

Memo:

Sample Number: S26020802-001

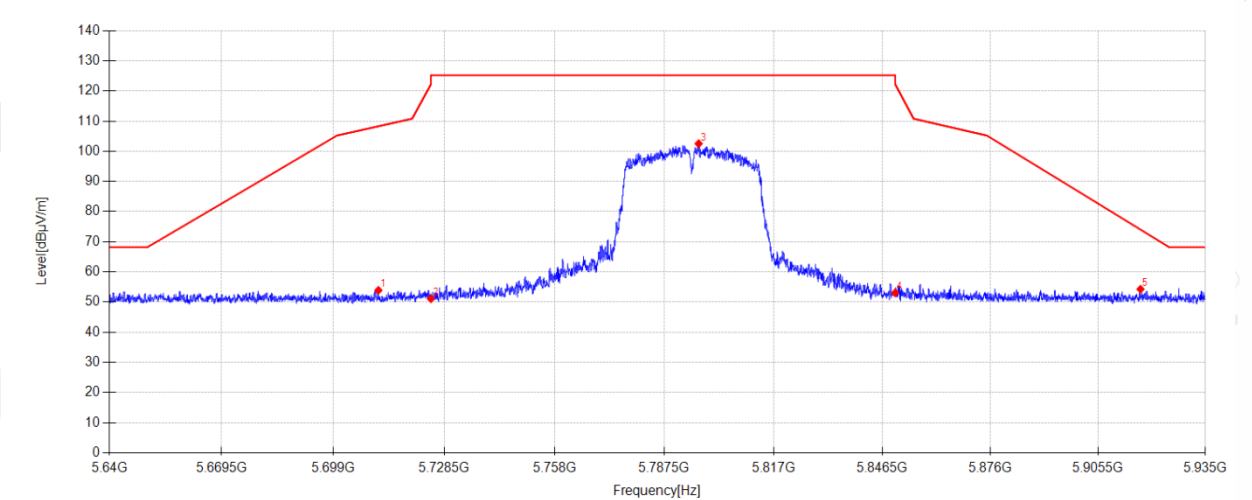

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.036	45.05	33.25	5.25	-29.66	53.89	108.29	54.40	PK	Vertical
2	5725.000	42.02	33.45	5.26	-29.65	51.08	122.20	71.12	PK	Vertical
3	5796.763	92.98	33.89	5.29	-29.64	102.52	125.20	22.68	PK	Vertical
4	5850.000	43.47	33.90	5.31	-29.63	53.05	122.20	69.15	PK	Vertical
5	5917.123	44.21	34.33	5.34	-29.62	54.26	74.03	19.77	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5795MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\67

Memo:

Sample Number: S26020802-001

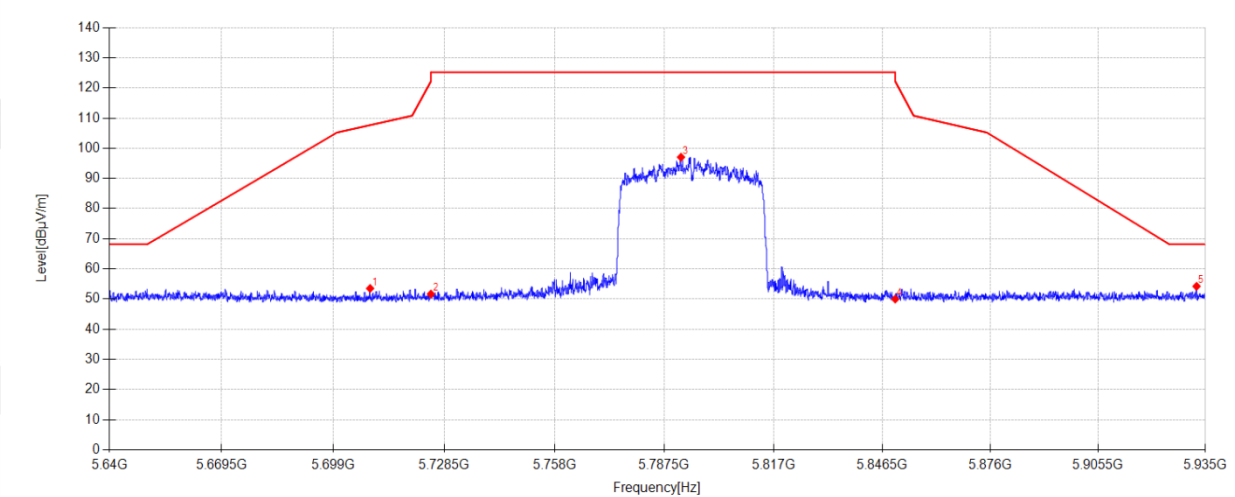

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5708.824	44.70	33.22	5.25	-29.66	53.51	107.67	54.16	PK	Horizontal
2	5725.000	42.59	33.45	5.26	-29.65	51.65	122.20	70.55	PK	Horizontal
3	5791.984	87.51	33.88	5.29	-29.64	97.04	125.20	28.16	PK	Horizontal
4	5850.000	40.40	33.90	5.31	-29.63	49.98	122.20	72.22	PK	Horizontal
5	5932.581	44.12	34.37	5.34	-29.61	54.22	68.20	13.98	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5795MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\68

Memo:

Sample Number: S26020802-001

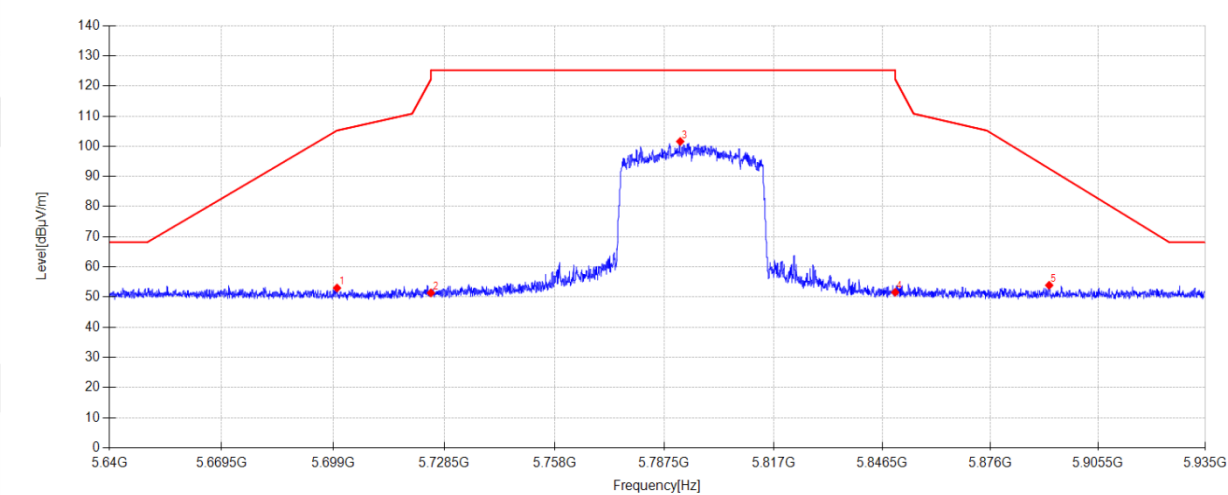

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5700.062	44.30	33.10	5.25	-29.66	52.99	105.22	52.23	PK	Vertical
2	5725.000	42.30	33.45	5.26	-29.65	51.36	122.20	70.84	PK	Vertical
3	5791.778	92.05	33.88	5.29	-29.64	101.58	125.20	23.62	PK	Vertical
4	5850.000	41.99	33.90	5.31	-29.63	51.57	122.20	70.63	PK	Vertical
5	5892.048	43.95	34.24	5.33	-29.62	53.90	92.58	38.68	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5755MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\69

Memo:

Sample Number: S26020802-001

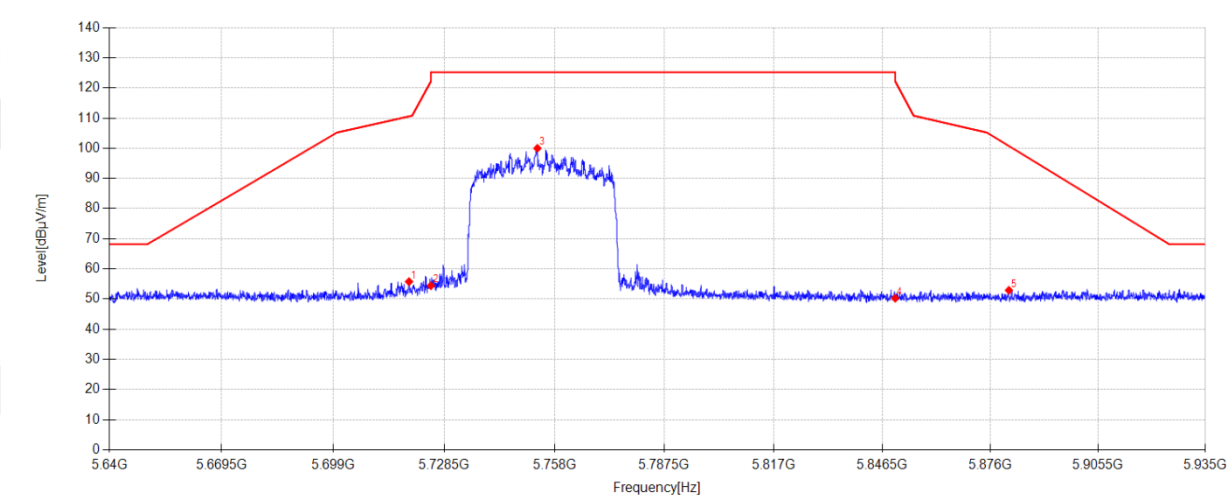

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.178	46.80	33.37	5.26	-29.66	55.77	110.57	54.80	PK	Horizontal
2	5725.000	45.36	33.45	5.26	-29.65	54.42	122.20	67.78	PK	Horizontal
3	5753.428	90.55	33.81	5.27	-29.65	99.98	125.20	25.22	PK	Horizontal
4	5850.000	40.69	33.90	5.31	-29.63	50.27	122.20	71.93	PK	Horizontal
5	5881.015	43.05	34.15	5.32	-29.62	52.90	100.75	47.85	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5755MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\70

Memo:

Sample Number: S26020802-001

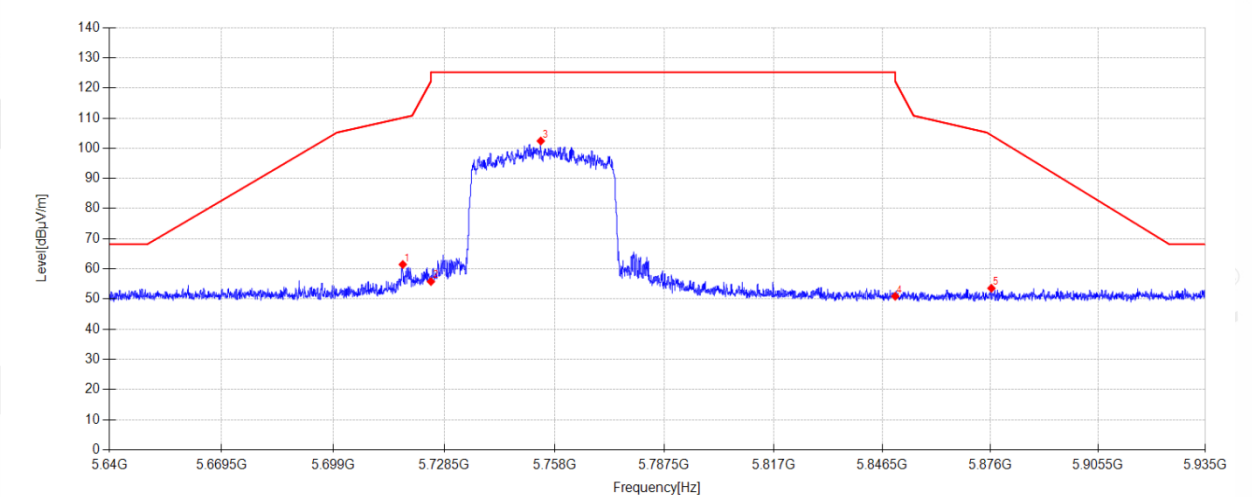

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5717.526	52.50	33.35	5.26	-29.66	61.45	110.11	48.66	PK	Vertical
2	5725.000	46.73	33.45	5.26	-29.65	55.79	122.20	66.41	PK	Vertical
3	5754.342	92.98	33.81	5.27	-29.65	102.41	125.20	22.79	PK	Vertical
4	5850.000	41.33	33.90	5.31	-29.63	50.91	122.20	71.29	PK	Vertical
5	5876.236	43.76	34.11	5.32	-29.62	53.57	104.29	50.72	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5755MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\71

Memo:

Sample Number: S26020802-001

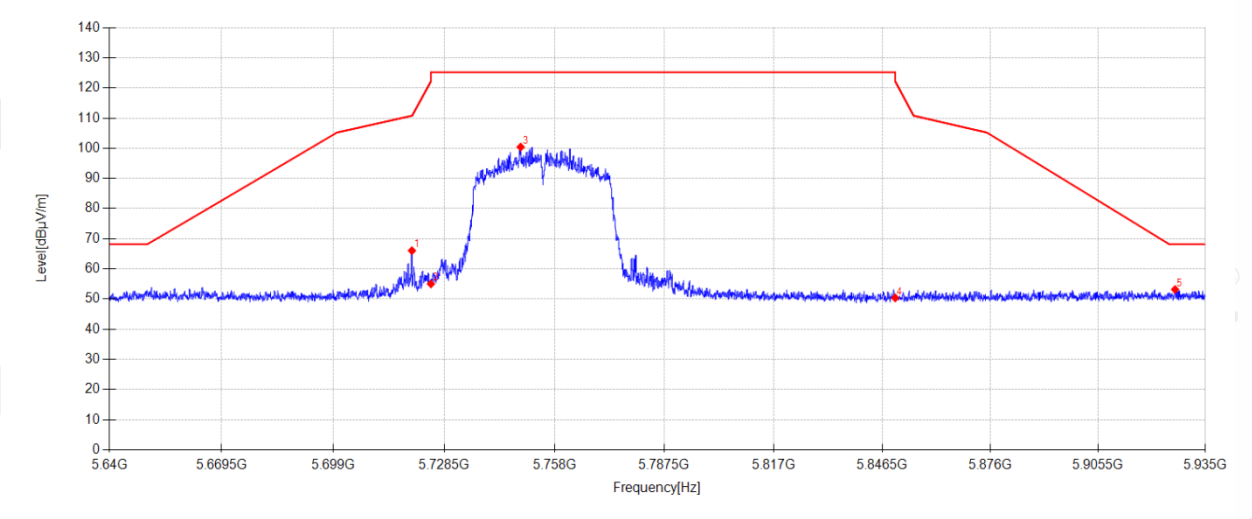

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.945	57.06	33.38	5.26	-29.66	66.04	110.78	44.74	PK	Horizontal
2	5725.000	45.96	33.45	5.26	-29.65	55.02	122.20	67.18	PK	Horizontal
3	5748.944	91.00	33.79	5.27	-29.65	100.41	125.20	24.79	PK	Horizontal
4	5850.000	40.81	33.90	5.31	-29.63	50.39	122.20	71.81	PK	Horizontal
5	5926.652	43.08	34.35	5.34	-29.61	53.16	68.20	15.04	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5755MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\72

Memo:

Sample Number: S26020802-001

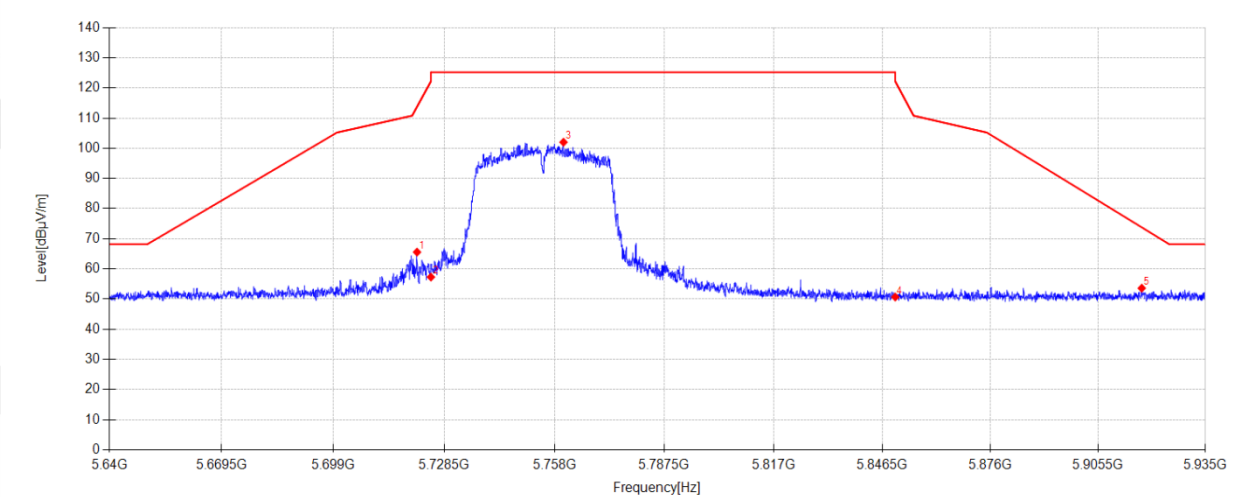

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.302	56.57	33.40	5.26	-29.66	65.57	113.77	48.20	PK	Vertical
2	5725.000	48.22	33.45	5.26	-29.65	57.28	122.20	64.92	PK	Vertical
3	5760.419	92.57	33.82	5.27	-29.65	102.01	125.20	23.19	PK	Vertical
4	5850.000	41.09	33.90	5.31	-29.63	50.67	122.20	71.53	PK	Vertical
5	5917.477	43.55	34.33	5.34	-29.62	53.60	73.77	20.17	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5795MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\73

Memo:

Sample Number: S26020802-001

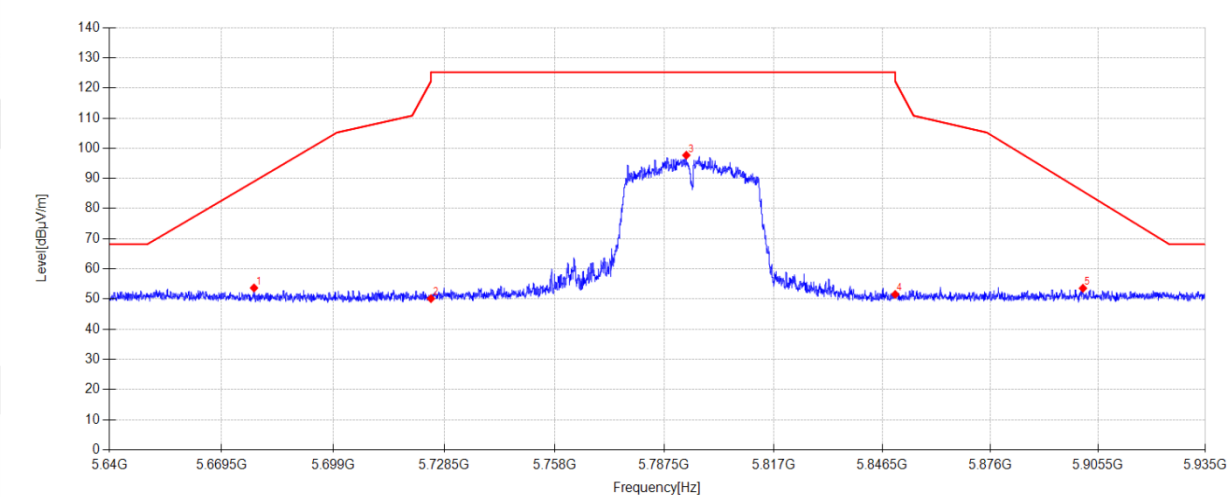

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5678.085	44.82	33.28	5.24	-29.66	53.68	88.98	35.30	PK	Horizontal
2	5725.000	41.08	33.45	5.26	-29.65	50.14	122.20	72.06	PK	Horizontal
3	5793.430	88.15	33.89	5.29	-29.64	97.69	125.20	27.51	PK	Horizontal
4	5850.000	41.96	33.90	5.31	-29.63	51.54	122.20	70.66	PK	Horizontal
5	5901.311	43.57	34.30	5.33	-29.62	53.58	85.73	32.15	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5795MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\74

Memo:

Sample Number: S26020802-001

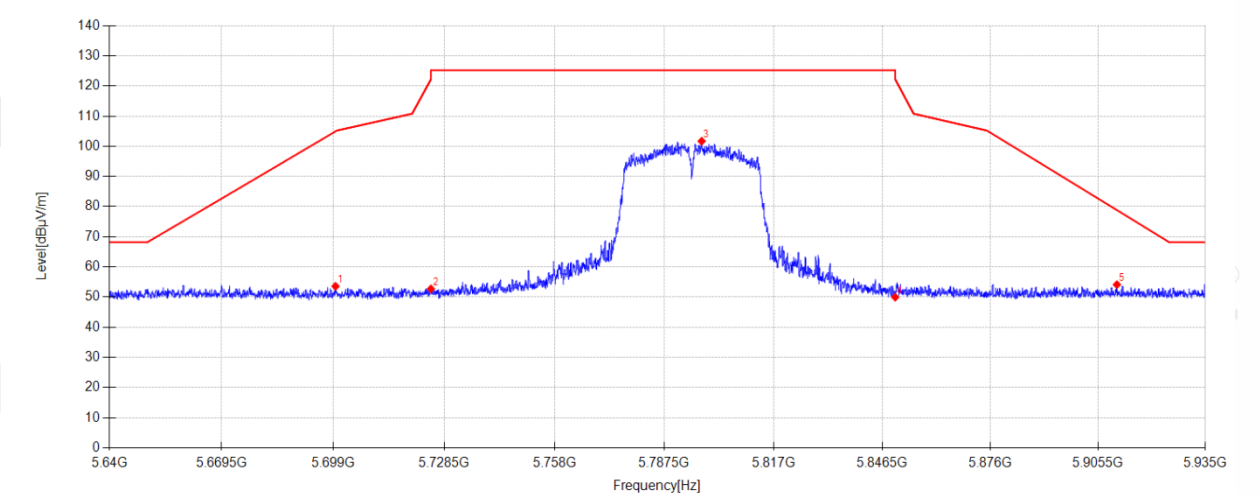

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5699.649	44.88	33.10	5.25	-29.66	53.57	104.94	51.37	PK	Vertical
2	5725.000	43.63	33.45	5.26	-29.65	52.69	122.20	69.51	PK	Vertical
3	5797.560	92.14	33.90	5.29	-29.64	101.69	125.20	23.51	PK	Vertical
4	5850.000	40.36	33.90	5.31	-29.63	49.94	122.20	72.26	PK	Vertical
5	5910.633	44.08	34.32	5.33	-29.62	54.11	78.83	24.72	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5745MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\75

Memo:

Sample Number: S26020802-001

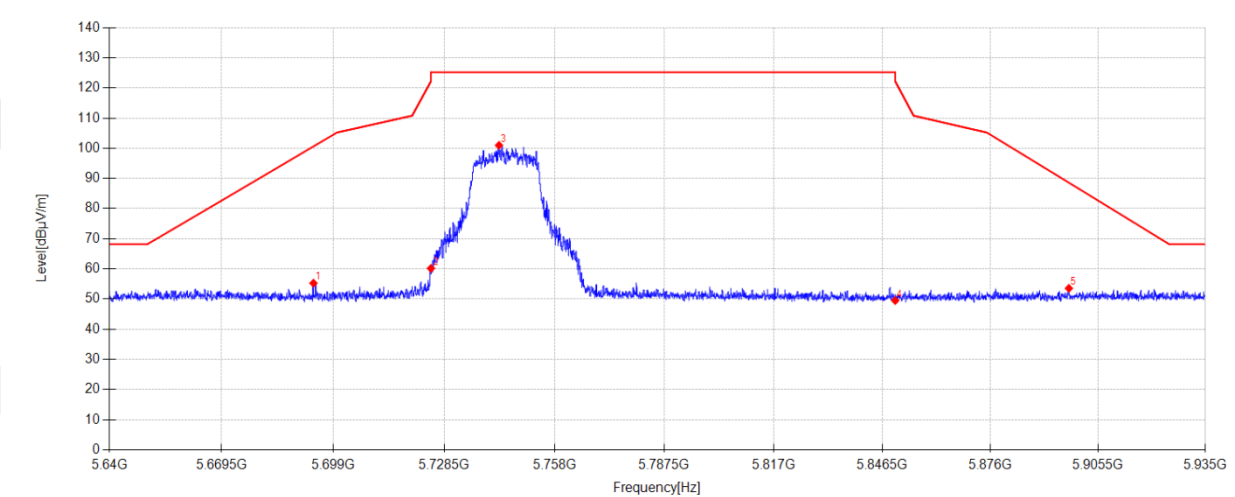

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5693.808	46.51	33.15	5.25	-29.66	55.25	100.62	45.37	PK	Horizontal
2	5725.000	51.10	33.45	5.26	-29.65	60.16	122.20	62.04	PK	Horizontal
3	5743.162	91.66	33.70	5.27	-29.65	100.98	125.20	24.22	PK	Horizontal
4	5850.000	39.92	33.90	5.31	-29.63	49.50	122.20	72.70	PK	Horizontal
5	5897.447	43.55	34.28	5.33	-29.62	53.54	88.59	35.05	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5745MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\76

Memo:

Sample Number: S26020802-001

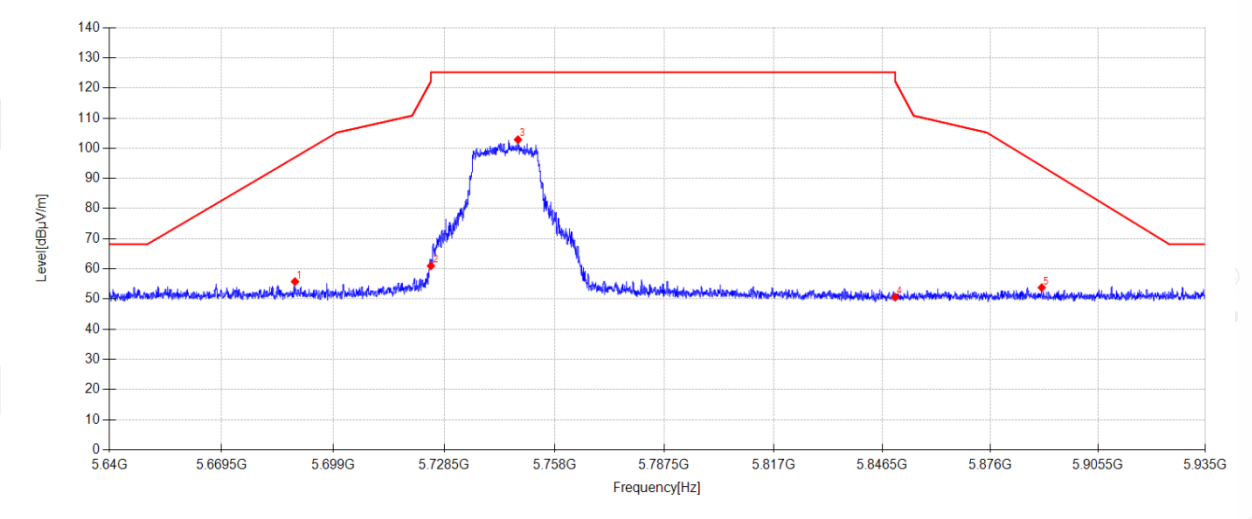

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5688.911	46.99	33.19	5.25	-29.66	55.77	96.99	41.22	PK	Vertical
2	5725.000	51.92	33.45	5.26	-29.65	60.98	122.20	61.22	PK	Vertical
3	5748.236	93.46	33.78	5.27	-29.65	102.86	125.20	22.34	PK	Vertical
4	5850.000	41.04	33.90	5.31	-29.63	50.62	122.20	71.58	PK	Vertical
5	5890.013	43.86	34.22	5.33	-29.62	53.79	94.09	40.30	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5785MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\77

Memo:

Sample Number: S26020802-001

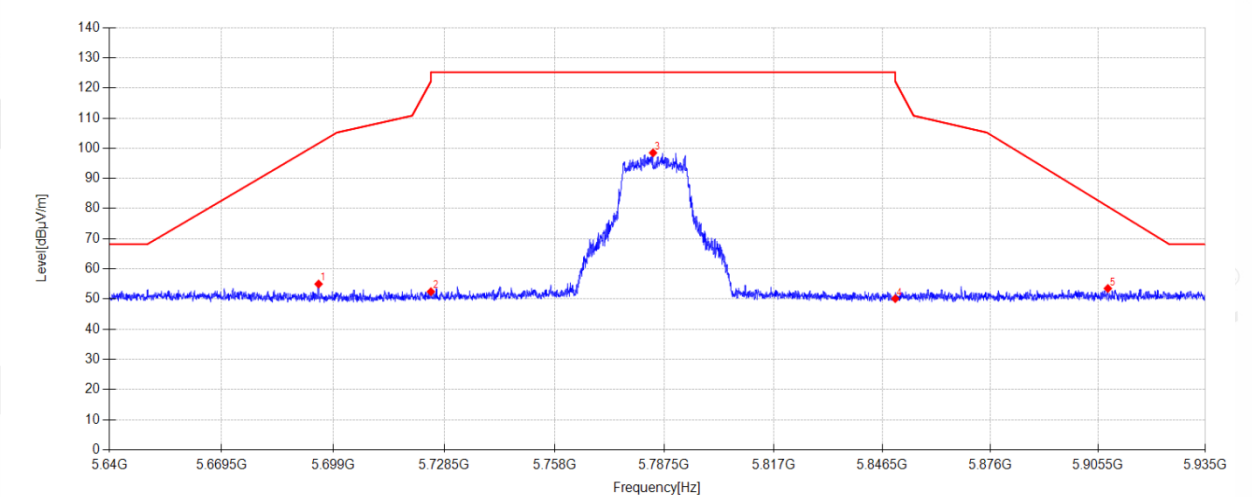

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5695.165	46.24	33.14	5.25	-29.66	54.97	101.62	46.65	PK	Horizontal
2	5725.000	43.37	33.45	5.26	-29.65	52.43	122.20	69.77	PK	Horizontal
3	5784.462	88.96	33.87	5.28	-29.64	98.47	125.20	26.73	PK	Horizontal
4	5850.000	40.54	33.90	5.31	-29.63	50.12	122.20	72.08	PK	Horizontal
5	5908.155	43.47	34.32	5.33	-29.62	53.50	80.67	27.17	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5785MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\78

Memo:

Sample Number: S26020802-001

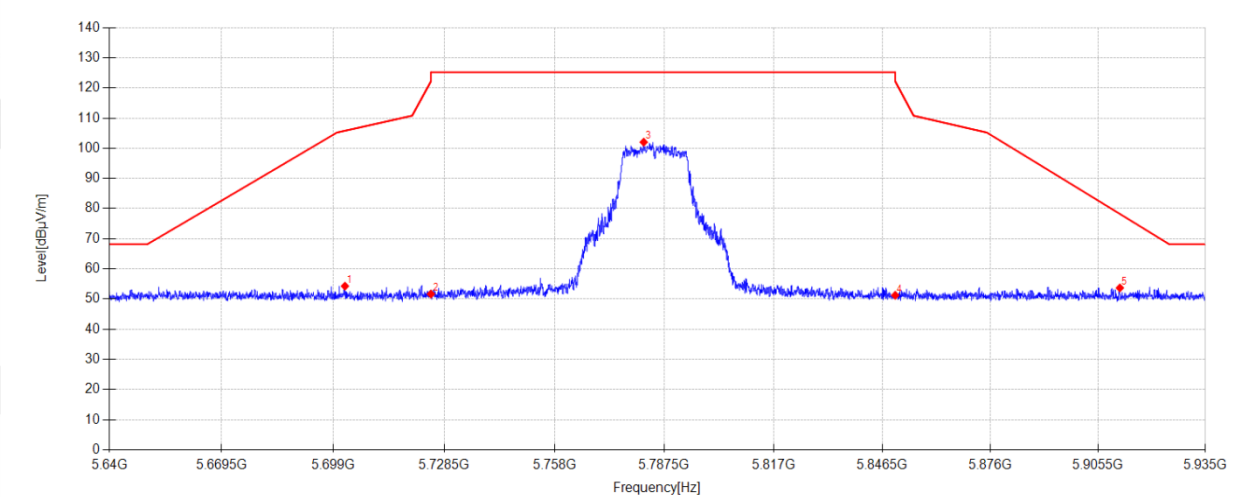

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5702.157	45.56	33.13	5.25	-29.66	54.28	105.80	51.52	PK	Vertical
2	5725.000	42.60	33.45	5.26	-29.65	51.66	122.20	70.54	PK	Vertical
3	5781.954	92.53	33.86	5.28	-29.64	102.03	125.20	23.17	PK	Vertical
4	5850.000	41.66	33.90	5.31	-29.63	51.24	122.20	70.96	PK	Vertical
5	5911.459	43.66	34.32	5.33	-29.62	53.69	78.22	24.53	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-06Tested By:Cao Jie

Test Mode:MIMO TX 11N20 5825MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:58.0%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\79

Memo:Sample Number: S26020802-001

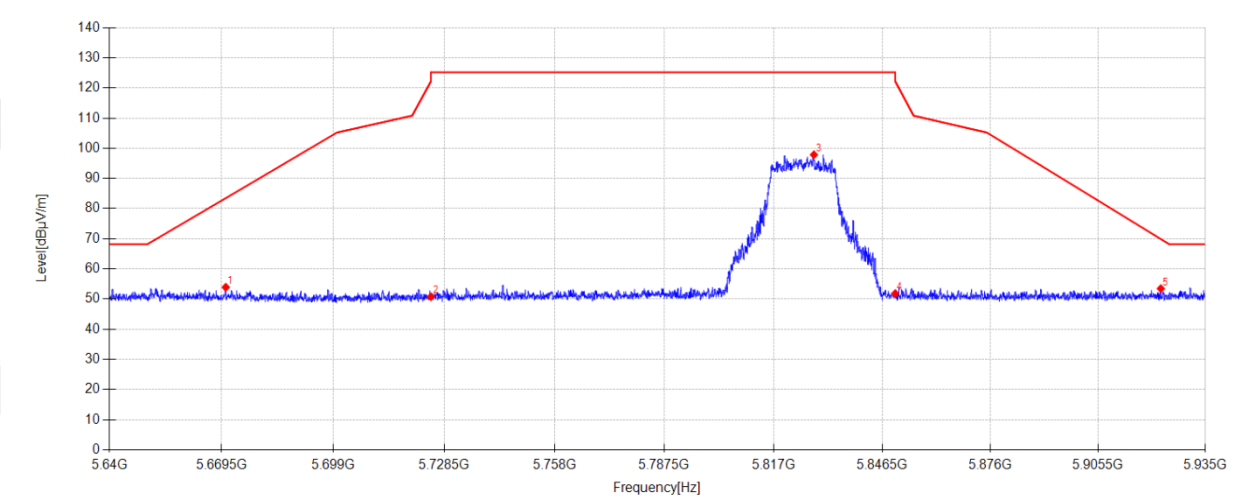

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5670.621	45.00	33.34	5.24	-29.67	53.91	83.46	29.55	PK	Horizontal
2	5725.000	41.69	33.45	5.26	-29.65	50.75	122.20	71.45	PK	Horizontal
3	5827.915	88.29	33.90	5.30	-29.63	97.86	125.20	27.34	PK	Horizontal
4	5850.000	42.24	33.90	5.31	-29.63	51.82	122.20	70.38	PK	Horizontal
5	5922.728	43.39	34.35	5.34	-29.62	53.46	69.88	16.42	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5825MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\80

Memo:

Sample Number: S26020802-001

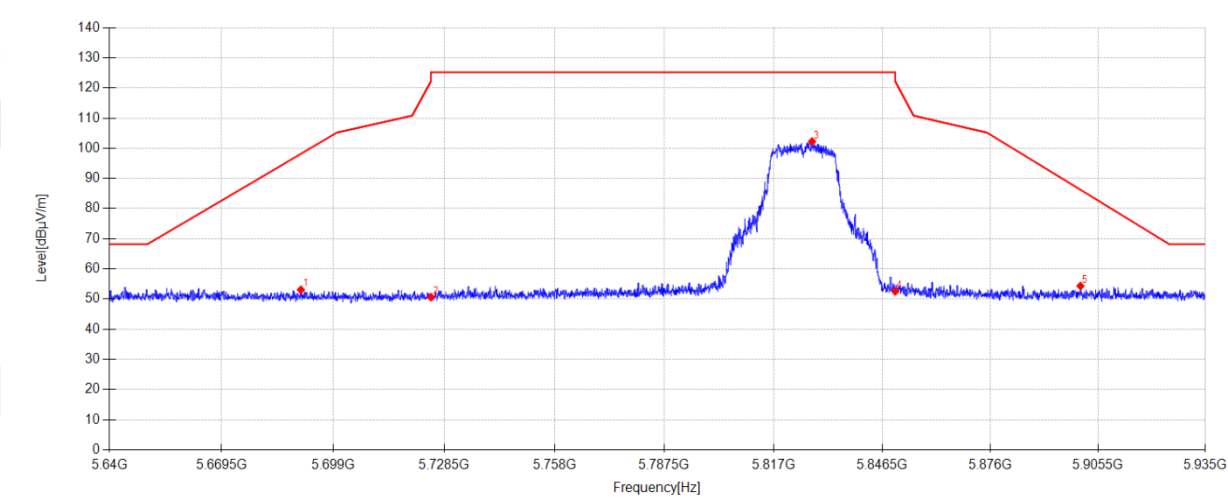

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5690.475	44.29	33.18	5.25	-29.66	53.06	98.15	45.09	PK	Vertical
2	5725.000	41.55	33.45	5.26	-29.65	50.61	122.20	71.59	PK	Vertical
3	5827.414	92.66	33.90	5.30	-29.63	102.23	125.20	22.97	PK	Vertical
4	5850.000	42.96	33.90	5.31	-29.63	52.54	122.20	69.66	PK	Vertical
5	5900.633	44.33	34.30	5.33	-29.62	54.34	86.23	31.89	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-06 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5825MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:58.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\81
Memo: Sample Number: S26020802-001

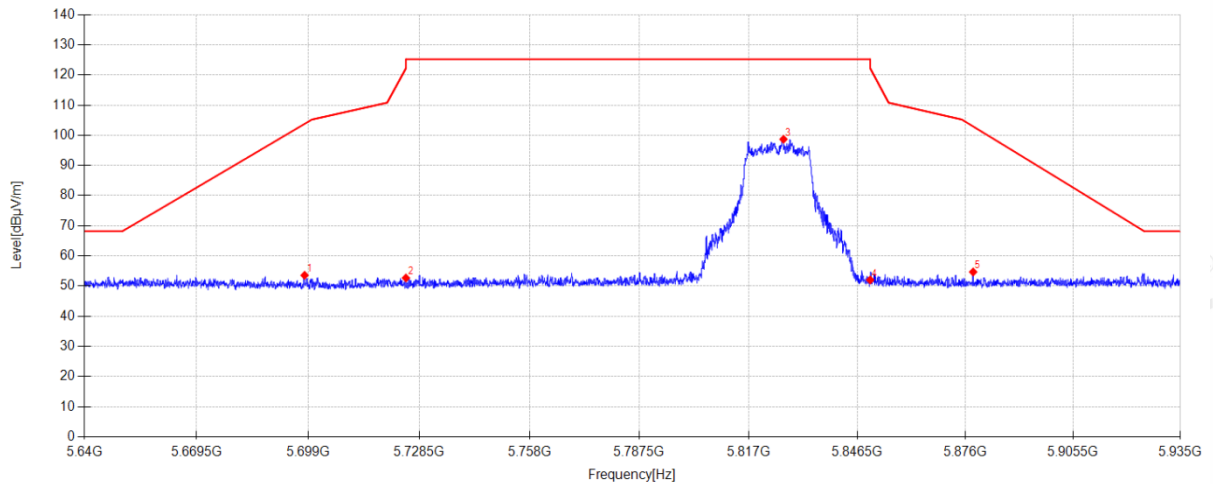**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5698.086	44.86	33.12	5.25	-29.66	53.57	103.78	50.21	PK	Horizontal
2	5725.000	43.62	33.45	5.26	-29.65	52.68	122.20	69.52	PK	Horizontal
3	5826.440	89.11	33.90	5.30	-29.63	98.68	125.20	26.52	PK	Horizontal
4	5850.000	42.43	33.90	5.31	-29.63	52.01	122.20	70.19	PK	Horizontal
5	5878.065	44.85	34.12	5.32	-29.62	54.67	102.93	48.26	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5825MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\82

Memo:

Sample Number: S26020802-001

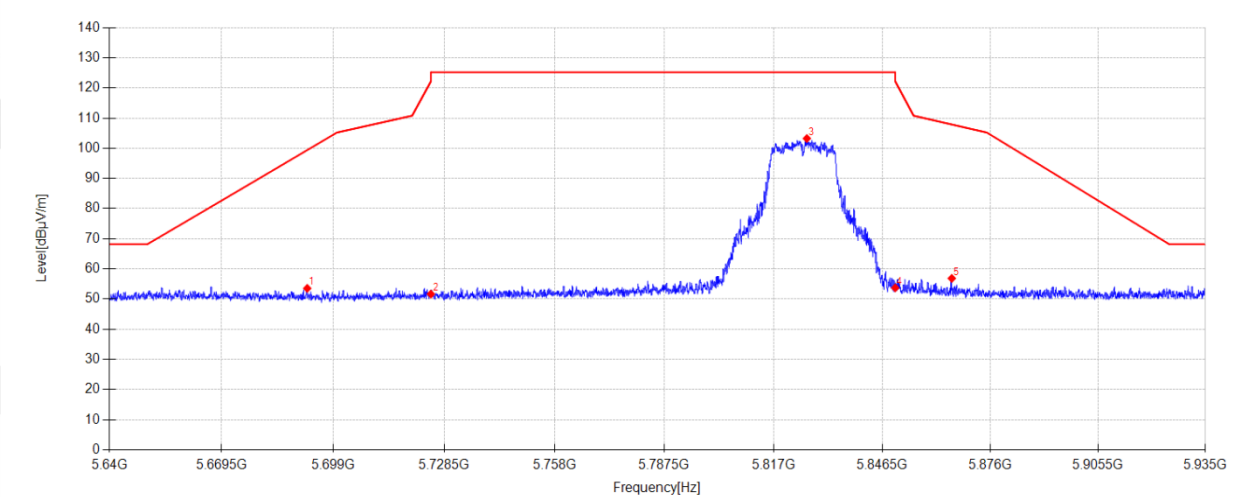

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5692.156	44.78	33.16	5.25	-29.66	53.53	99.40	45.87	PK	Vertical
2	5725.000	42.59	33.45	5.26	-29.65	51.65	122.20	70.55	PK	Vertical
3	5825.998	93.67	33.90	5.30	-29.63	103.24	125.20	21.96	PK	Vertical
4	5850.000	44.12	33.90	5.31	-29.63	53.70	122.20	68.50	PK	Vertical
5	5865.410	47.13	34.02	5.32	-29.63	56.84	107.89	51.05	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.