

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5785MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\83

Memo:

Sample Number: S26020802-001

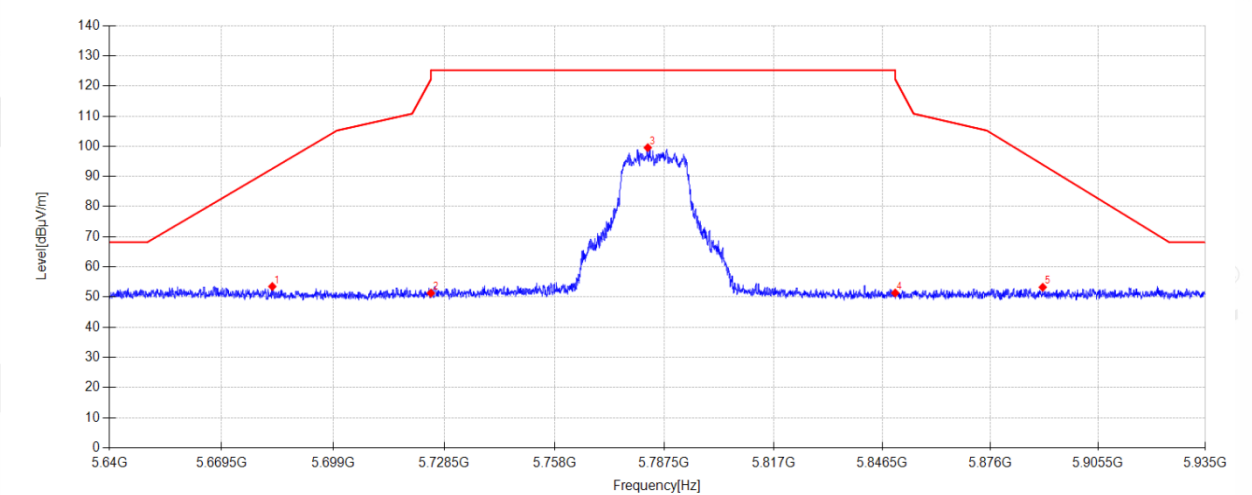

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5682.923	44.67	33.24	5.24	-29.66	53.49	92.56	39.07	PK	Horizontal
2	5725.000	42.23	33.45	5.26	-29.65	51.29	122.20	70.91	PK	Horizontal
3	5783.046	90.03	33.87	5.28	-29.64	99.54	125.20	25.66	PK	Horizontal
4	5850.000	41.77	33.90	5.31	-29.63	51.35	122.20	70.85	PK	Horizontal
5	5890.278	43.31	34.22	5.33	-29.62	53.24	93.89	40.65	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5785MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\84

Memo:

Sample Number: S26020802-001

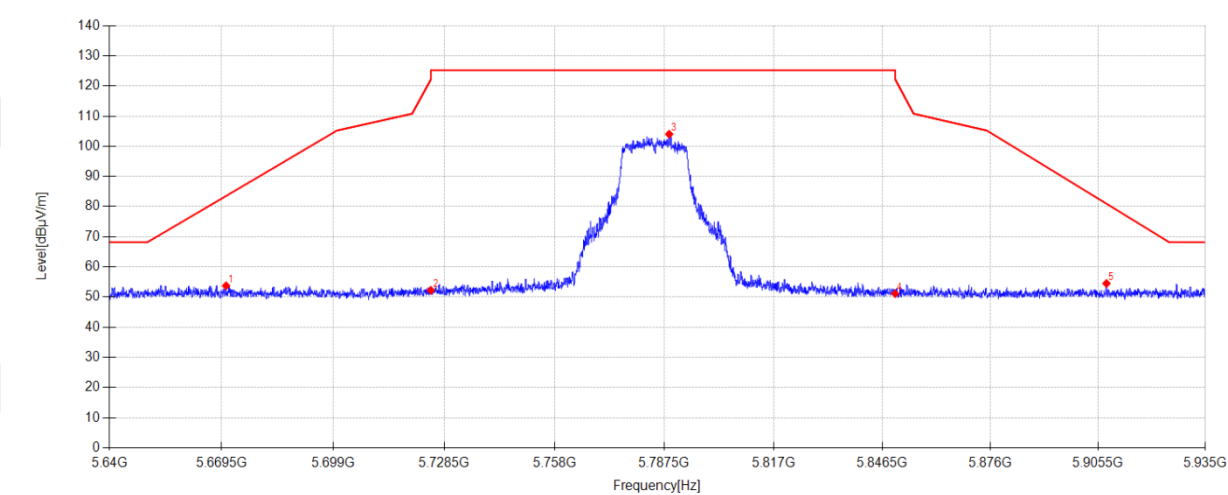

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5670.710	44.84	33.33	5.24	-29.67	53.74	83.53	29.79	PK	Vertical
2	5725.000	43.15	33.45	5.26	-29.65	52.21	122.20	69.99	PK	Vertical
3	5788.798	94.48	33.88	5.29	-29.64	104.01	125.20	21.19	PK	Vertical
4	5850.000	41.54	33.90	5.31	-29.63	51.12	122.20	71.08	PK	Vertical
5	5907.772	44.48	34.32	5.33	-29.62	54.51	80.95	26.44	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5745MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\85

Memo:

Sample Number: S26020802-001

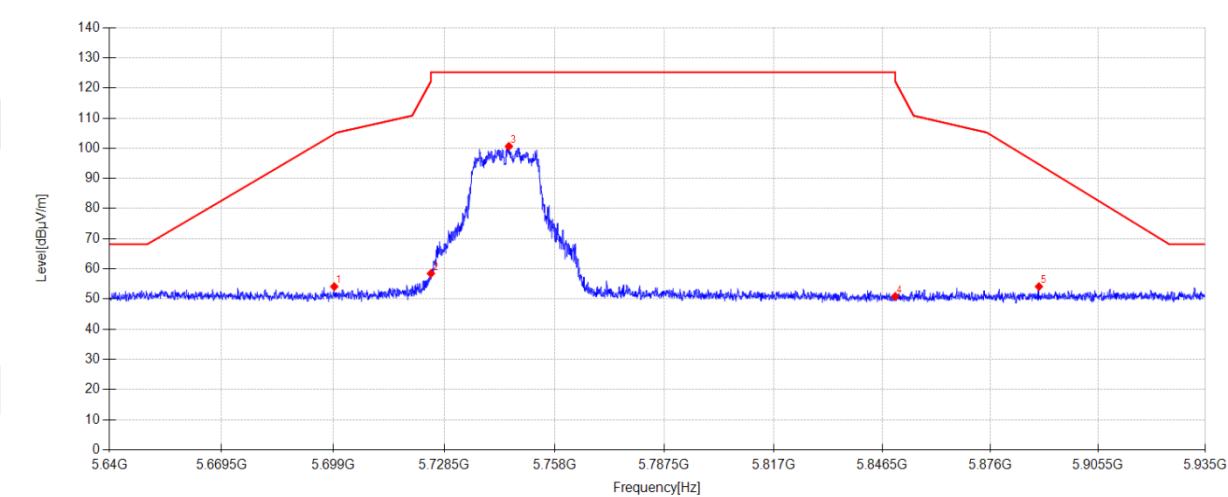

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5699.325	45.42	33.11	5.25	-29.66	54.12	104.70	50.58	PK	Horizontal
2	5725.000	49.40	33.45	5.26	-29.65	58.46	122.20	63.74	PK	Horizontal
3	5745.817	91.29	33.74	5.27	-29.65	100.65	125.20	24.55	PK	Horizontal
4	5850.000	41.31	33.90	5.31	-29.63	50.89	122.20	71.31	PK	Horizontal
5	5889.246	44.22	34.21	5.33	-29.62	54.14	94.66	40.52	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5745MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\86

Memo:

Sample Number: S26020802-001

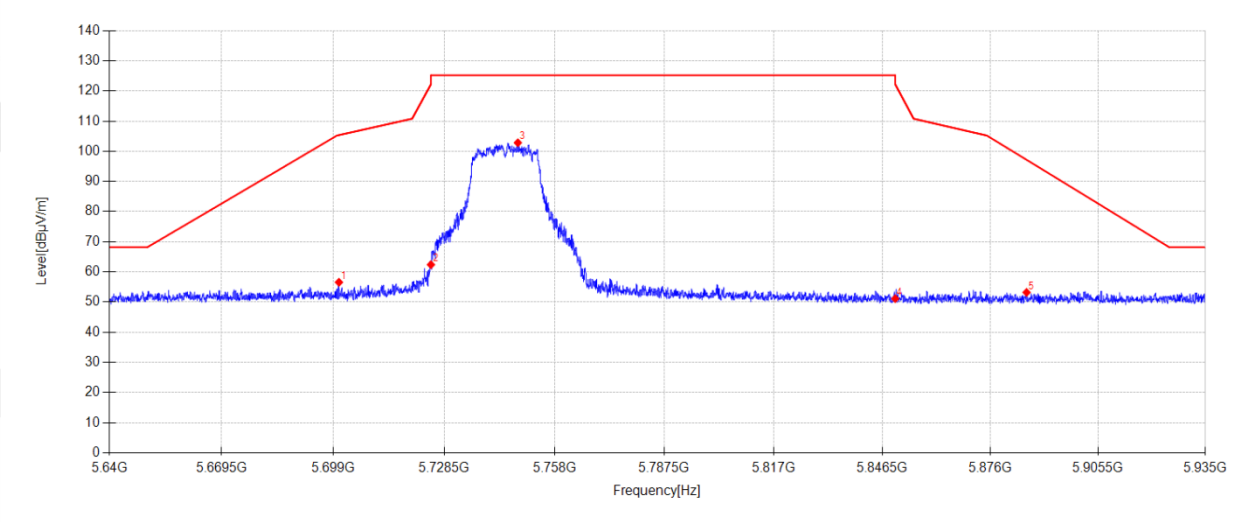

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5700.564	47.85	33.11	5.25	-29.66	56.55	105.36	48.81	PK	Vertical
2	5725.000	53.33	33.45	5.26	-29.65	62.39	122.20	59.81	PK	Vertical
3	5748.206	93.44	33.77	5.27	-29.65	102.83	125.20	22.37	PK	Vertical
4	5850.000	41.54	33.90	5.31	-29.63	51.12	122.20	71.08	PK	Vertical
5	5885.853	43.30	34.19	5.32	-29.62	53.19	97.17	43.98	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5745MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\87

Memo:

Sample Number: S26020802-001

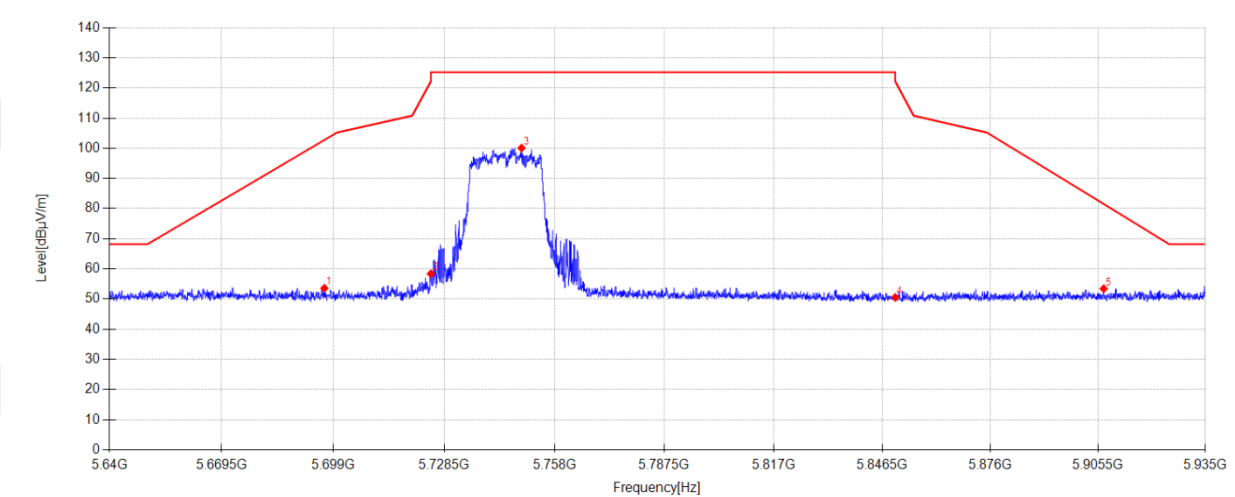

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5696.699	44.85	33.13	5.25	-29.66	53.57	102.76	49.19	PK	Horizontal
2	5725.000	49.31	33.45	5.26	-29.65	58.37	122.20	63.83	PK	Horizontal
3	5749.180	90.67	33.79	5.27	-29.65	100.08	125.20	25.12	PK	Horizontal
4	5850.000	40.94	33.90	5.31	-29.63	50.52	122.20	71.68	PK	Horizontal
5	5907.005	43.39	34.31	5.33	-29.62	53.41	81.52	28.11	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5745MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\88

Memo:

Sample Number: S26020802-001

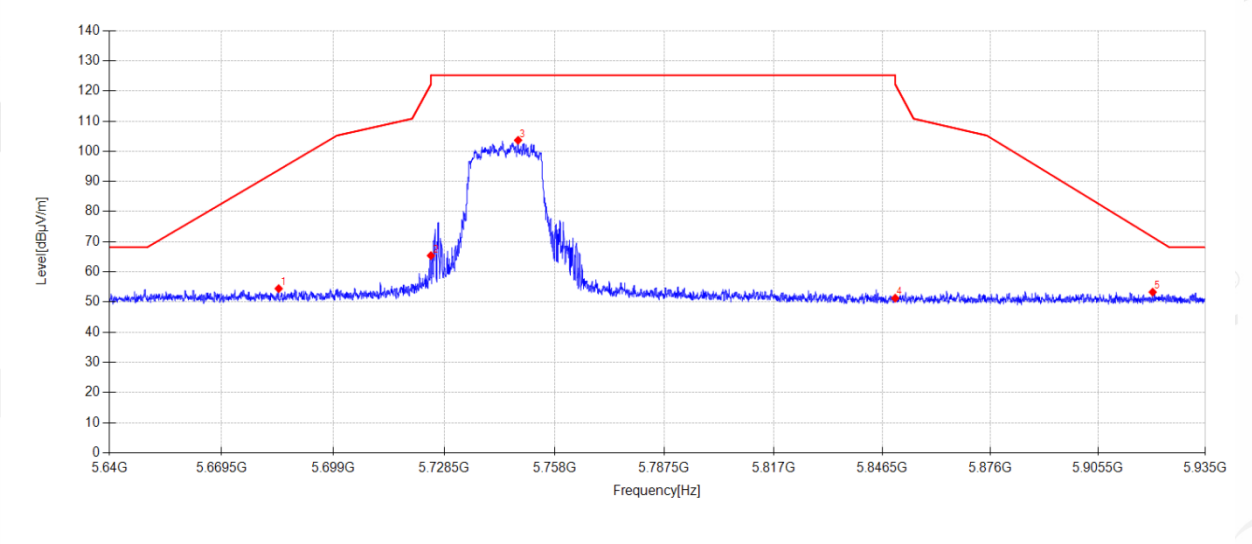

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5684.604	45.65	33.22	5.24	-29.66	54.45	93.81	39.36	PK	Vertical
2	5725.000	56.33	33.45	5.26	-29.65	65.39	122.20	56.81	PK	Vertical
3	5748.265	94.25	33.78	5.27	-29.65	103.65	125.20	21.55	PK	Vertical
4	5850.000	41.69	33.90	5.31	-29.63	51.27	122.20	70.93	PK	Vertical
5	5920.486	43.23	34.34	5.34	-29.62	53.29	71.54	18.25	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5785MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\89

Memo:

Sample Number: S26020802-001

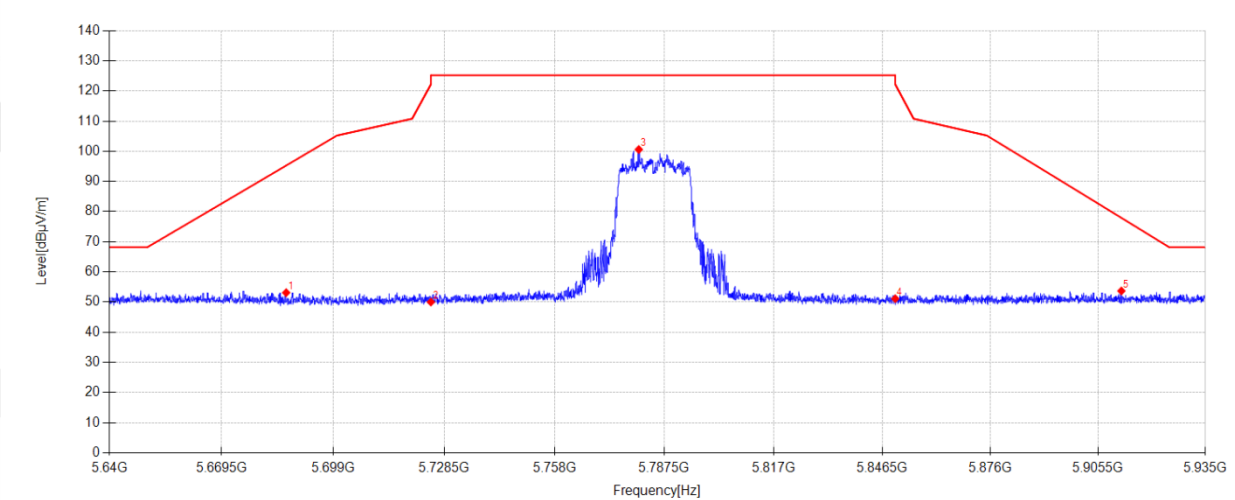

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5686.581	44.31	33.21	5.24	-29.66	53.10	95.27	42.17	PK	Horizontal
2	5725.000	40.95	33.45	5.26	-29.65	50.01	122.20	72.19	PK	Horizontal
3	5780.627	91.08	33.86	5.28	-29.64	100.58	125.20	24.62	PK	Horizontal
4	5850.000	41.54	33.90	5.31	-29.63	51.12	122.20	71.08	PK	Horizontal
5	5911.872	43.65	34.32	5.33	-29.62	53.68	77.91	24.23	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5785MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\90

Memo:

Sample Number: S26020802-001

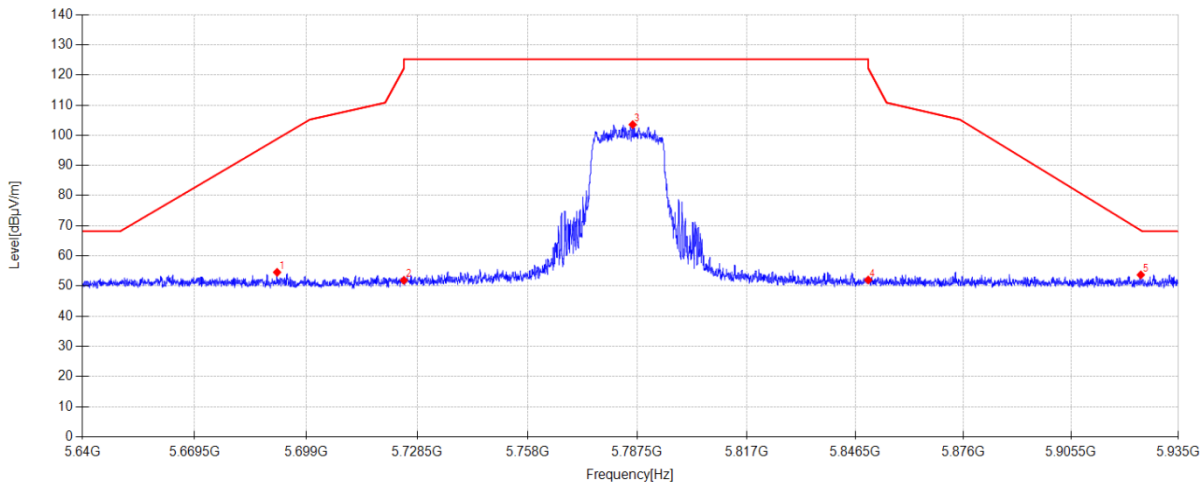

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5691.330	45.79	33.17	5.25	-29.66	54.55	98.78	44.23	PK	Vertical
2	5725.000	42.82	33.45	5.26	-29.65	51.88	122.20	70.32	PK	Vertical
3	5786.261	94.02	33.87	5.28	-29.64	103.53	125.20	21.67	PK	Vertical
4	5850.000	42.44	33.90	5.31	-29.63	52.02	122.20	70.18	PK	Vertical
5	5924.646	43.63	34.35	5.34	-29.62	53.70	68.46	14.76	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5825MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\91

Memo:

Sample Number: S26020802-001

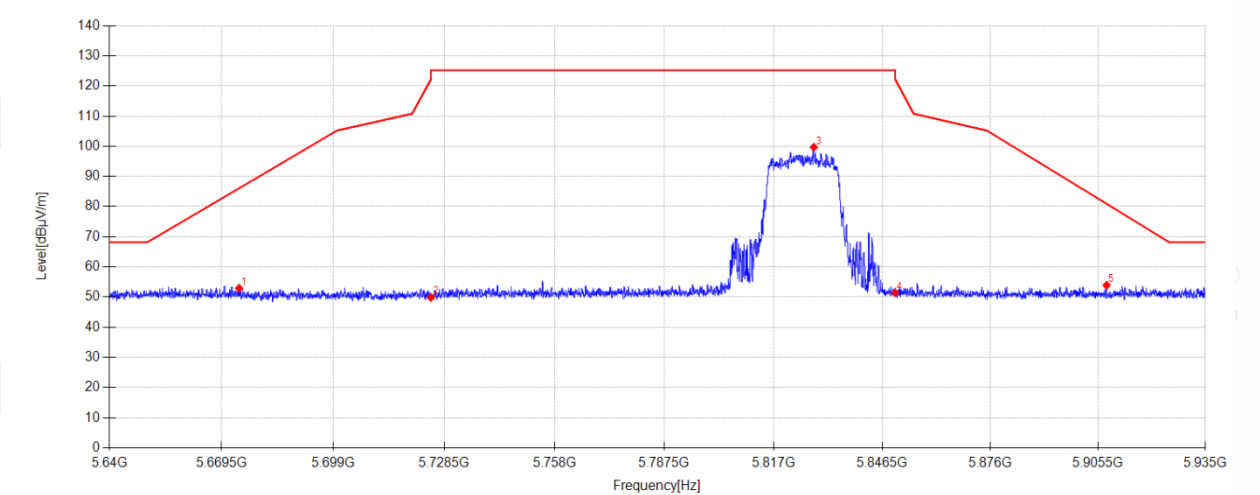

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5674.161	44.03	33.31	5.24	-29.67	52.91	86.08	33.17	PK	Horizontal
2	5725.000	40.79	33.45	5.26	-29.65	49.85	122.20	72.35	PK	Horizontal
3	5827.886	90.12	33.90	5.30	-29.63	99.69	125.20	25.51	PK	Horizontal
4	5850.000	41.82	33.90	5.31	-29.63	51.40	122.20	70.80	PK	Horizontal
5	5907.801	43.91	34.32	5.33	-29.62	53.94	80.93	26.99	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5825MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\92

Memo:

Sample Number: S26020802-001

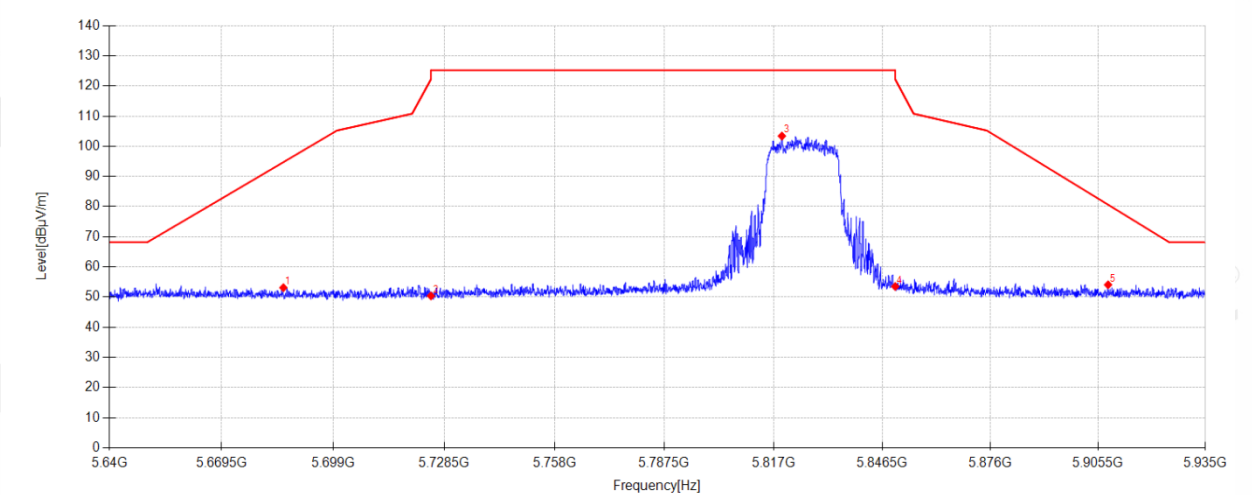

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5685.843	44.32	33.21	5.24	-29.66	53.11	94.72	41.61	PK	Vertical
2	5725.000	41.32	33.45	5.26	-29.65	50.38	122.20	71.82	PK	Vertical
3	5819.242	93.83	33.90	5.30	-29.64	103.39	125.20	21.81	PK	Vertical
4	5850.000	43.93	33.90	5.31	-29.63	53.51	122.20	68.69	PK	Vertical
5	5908.214	44.03	34.32	5.33	-29.62	54.06	80.62	26.56	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5825MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\93

Memo:

Sample Number: S26020802-001

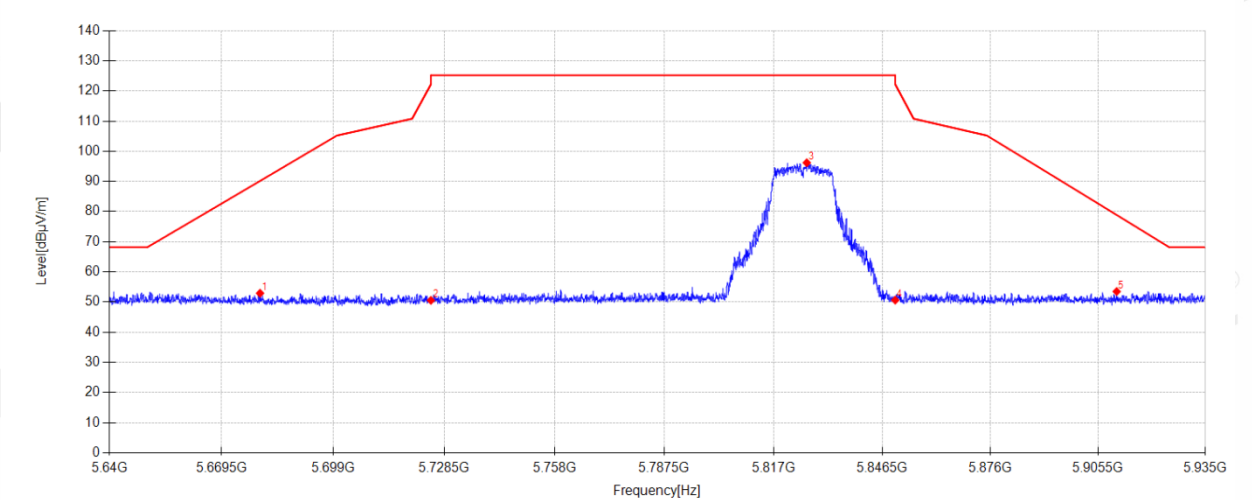

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5679.678	44.07	33.26	5.24	-29.66	52.91	90.16	37.25	PK	Horizontal
2	5725.000	41.50	33.45	5.26	-29.65	50.56	122.20	71.64	PK	Horizontal
3	5825.968	86.62	33.90	5.30	-29.63	96.19	125.20	29.01	PK	Horizontal
4	5850.000	41.05	33.90	5.31	-29.63	50.63	122.20	71.57	PK	Horizontal
5	5910.574	43.46	34.32	5.33	-29.62	53.49	78.88	25.39	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5825MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\94

Memo:

Sample Number: S26020802-001

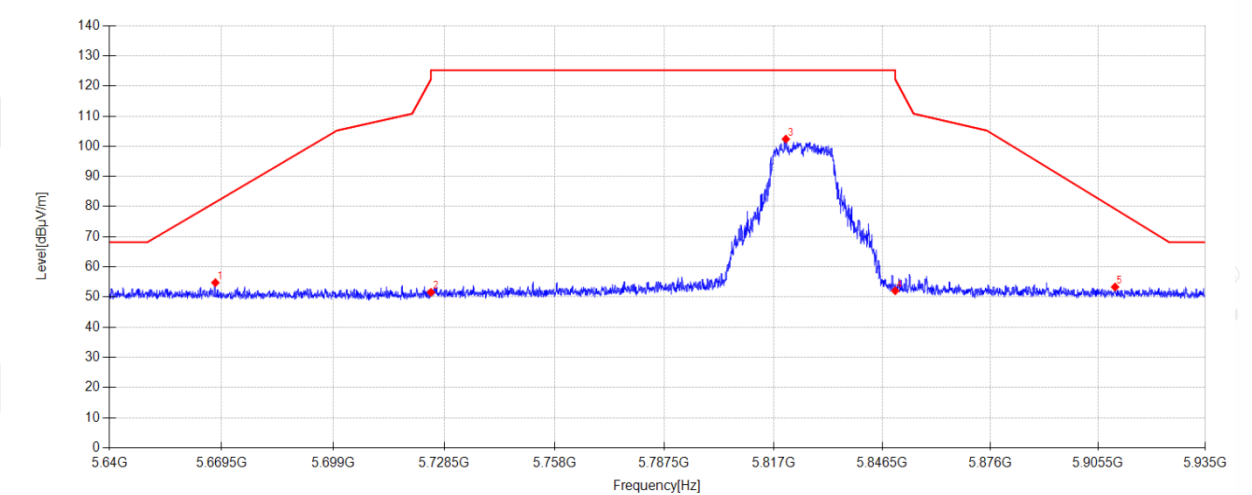

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5667.878	45.83	33.36	5.24	-29.67	54.76	81.43	26.67	PK	Vertical
2	5725.000	42.48	33.45	5.26	-29.65	51.54	122.20	70.66	PK	Vertical
3	5820.304	92.82	33.90	5.30	-29.64	102.38	125.20	22.82	PK	Vertical
4	5850.000	42.49	33.90	5.31	-29.63	52.07	122.20	70.13	PK	Vertical
5	5910.132	43.29	34.32	5.33	-29.62	53.32	79.20	25.88	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5785MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\95

Memo:

Sample Number: S26020802-001

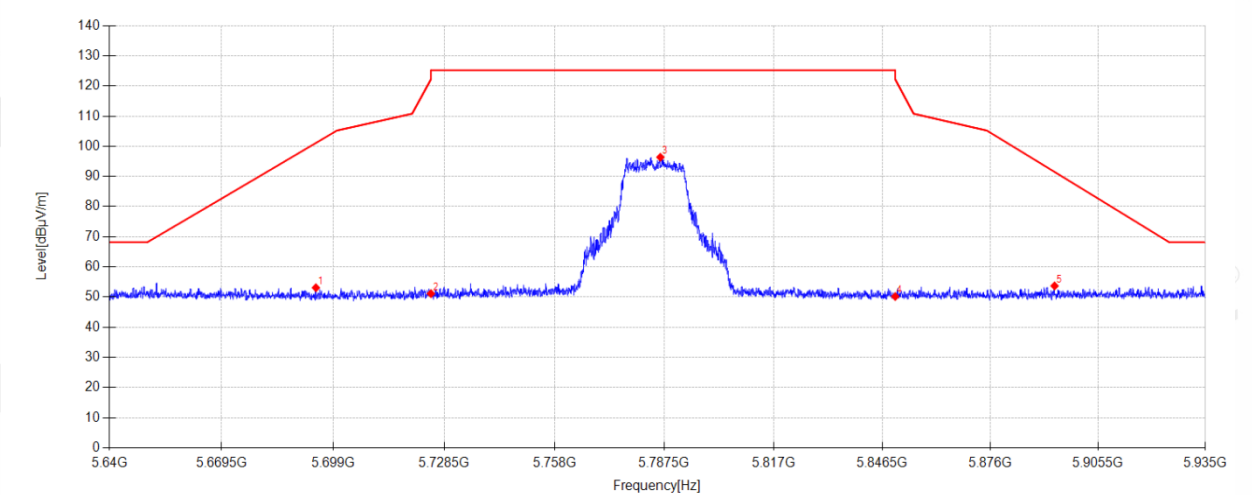

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5694.457	44.35	33.14	5.25	-29.66	53.08	101.10	48.02	PK	Horizontal
2	5725.000	42.07	33.45	5.26	-29.65	51.13	122.20	71.07	PK	Horizontal
3	5786.438	86.85	33.87	5.28	-29.64	96.36	125.20	28.84	PK	Horizontal
4	5850.000	40.59	33.90	5.31	-29.63	50.17	122.20	72.03	PK	Horizontal
5	5893.523	43.73	34.25	5.33	-29.62	53.69	91.49	37.80	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5785MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\96

Memo:

Sample Number: S26020802-001

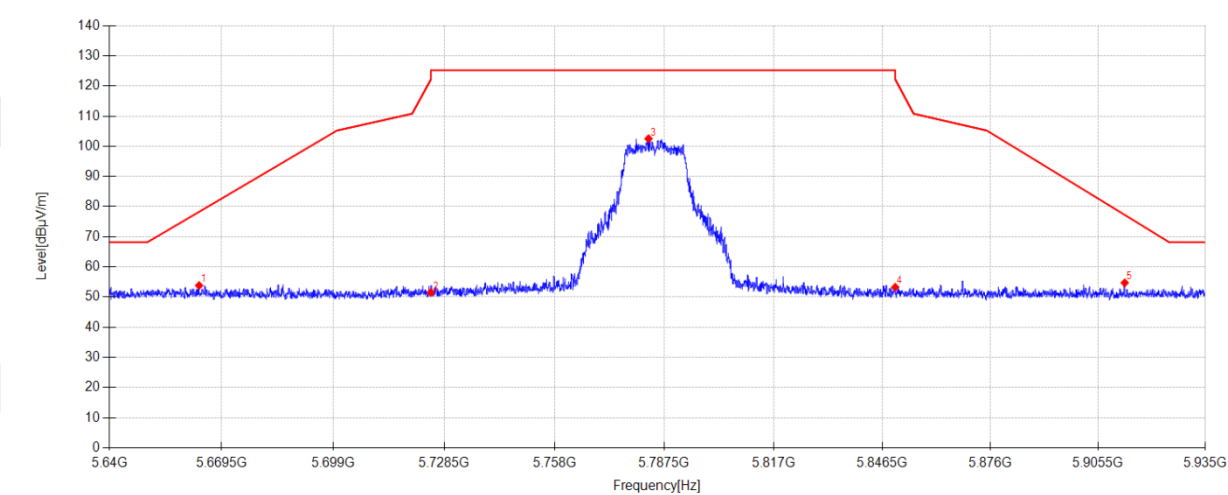

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5663.600	44.86	33.39	5.24	-29.67	53.82	78.26	24.44	PK	Vertical
2	5725.000	42.44	33.45	5.26	-29.65	51.50	122.20	70.70	PK	Vertical
3	5783.252	93.00	33.87	5.28	-29.64	102.51	125.20	22.69	PK	Vertical
4	5850.000	43.68	33.90	5.31	-29.63	53.26	122.20	68.94	PK	Vertical
5	5912.787	44.67	34.33	5.34	-29.62	54.72	77.24	22.52	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-03-06 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11A 5745MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:58.0% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\97
Memo: Sample Number: S26020802-001

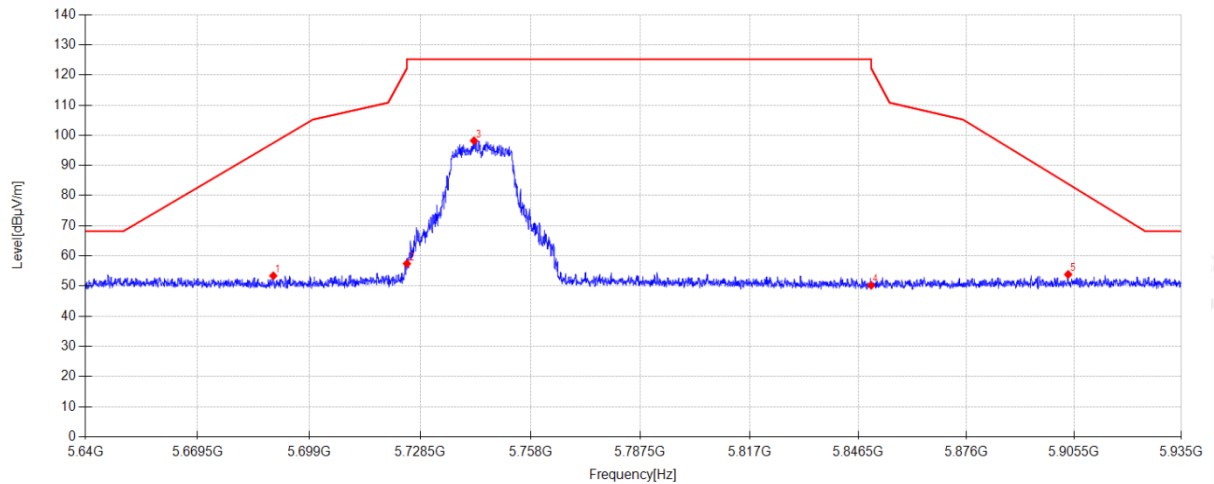**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5689.531	44.62	33.18	5.25	-29.66	53.39	97.45	44.06	PK	Horizontal
2	5725.000	48.37	33.45	5.26	-29.65	57.43	122.20	64.77	PK	Horizontal
3	5742.896	88.86	33.70	5.27	-29.65	98.18	125.20	27.02	PK	Horizontal
4	5850.000	40.64	33.90	5.31	-29.63	50.22	122.20	71.98	PK	Horizontal
5	5903.848	43.82	34.31	5.33	-29.62	53.84	83.85	30.01	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5745MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\98

Memo:

Sample Number: S26020802-001

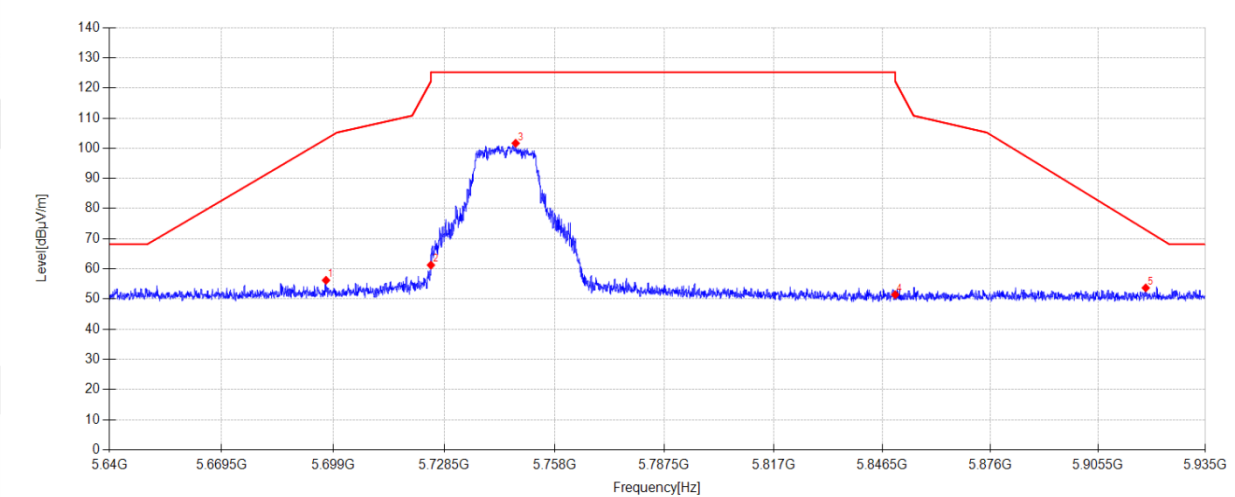

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5697.142	47.50	33.12	5.25	-29.66	56.21	103.08	46.87	PK	Vertical
2	5725.000	52.19	33.45	5.26	-29.65	61.25	122.20	60.95	PK	Vertical
3	5747.616	92.28	33.77	5.27	-29.65	101.67	125.20	23.53	PK	Vertical
4	5850.000	41.87	33.90	5.31	-29.63	51.45	122.20	70.75	PK	Vertical
5	5918.569	43.64	34.34	5.34	-29.62	53.70	72.96	19.26	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5745MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\99

Memo:

Sample Number: S26020802-001

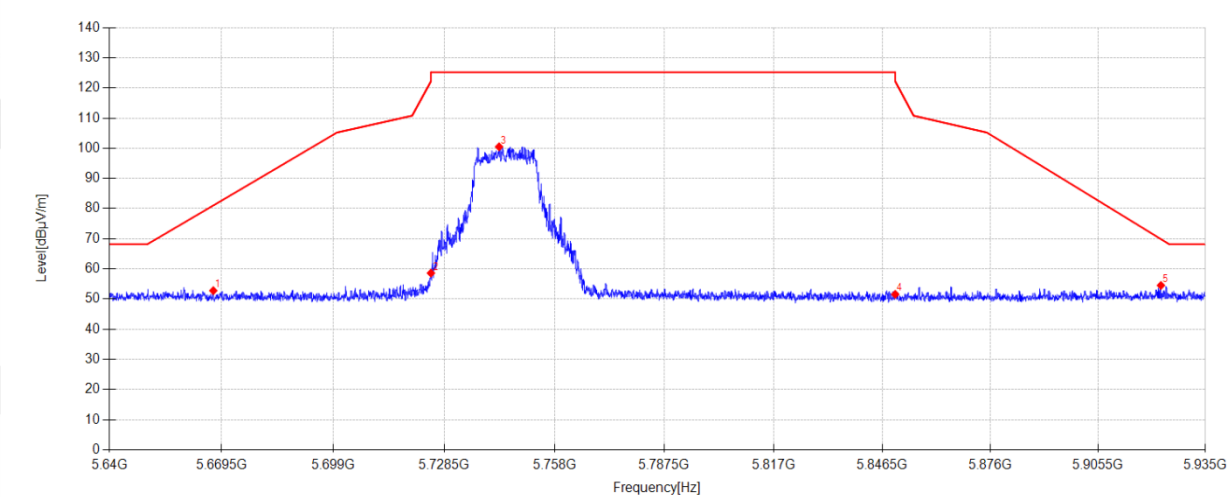

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5667.347	43.85	33.36	5.24	-29.67	52.78	81.04	28.26	PK	Horizontal
2	5725.000	49.54	33.45	5.26	-29.65	58.60	122.20	63.60	PK	Horizontal
3	5743.191	91.17	33.70	5.27	-29.65	100.49	125.20	24.71	PK	Horizontal
4	5850.000	41.98	33.90	5.31	-29.63	51.56	122.20	70.64	PK	Horizontal
5	5922.758	44.44	34.35	5.34	-29.62	54.51	69.86	15.35	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5745MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\100

Memo:

Sample Number: S26020802-001

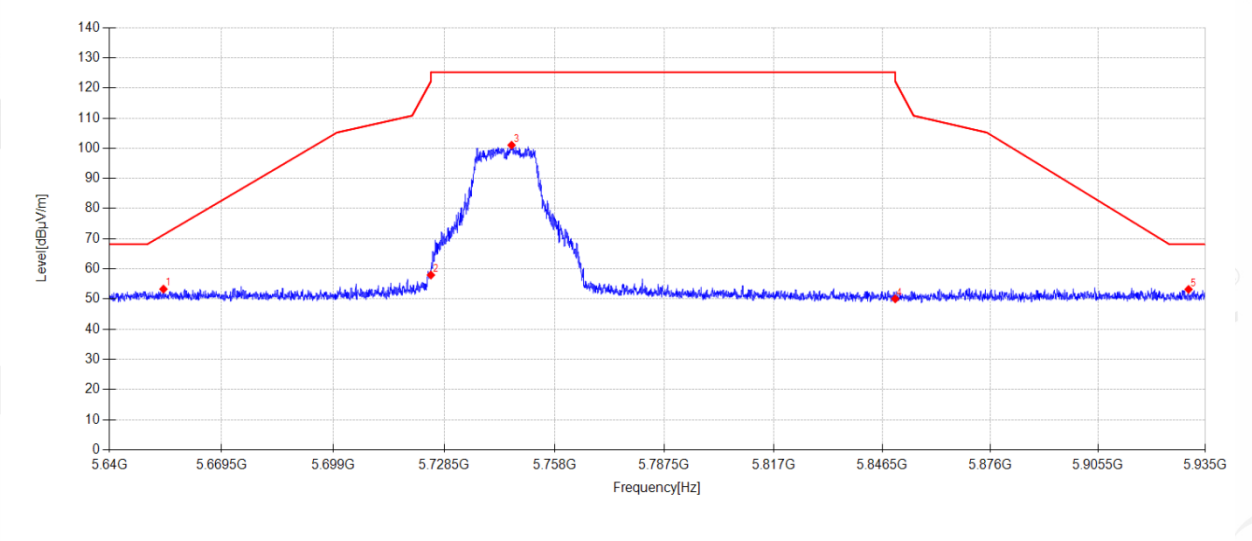

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5654.219	44.26	33.47	5.23	-29.67	53.29	71.32	18.03	PK	Vertical
2	5725.000	48.89	33.45	5.26	-29.65	57.95	122.20	64.25	PK	Vertical
3	5746.525	91.65	33.75	5.27	-29.65	101.02	125.20	24.18	PK	Vertical
4	5850.000	40.48	33.90	5.31	-29.63	50.06	122.20	72.14	PK	Vertical
5	5930.369	43.11	34.36	5.34	-29.61	53.20	68.20	15.00	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5785MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\101

Memo:

Sample Number: S26020802-001

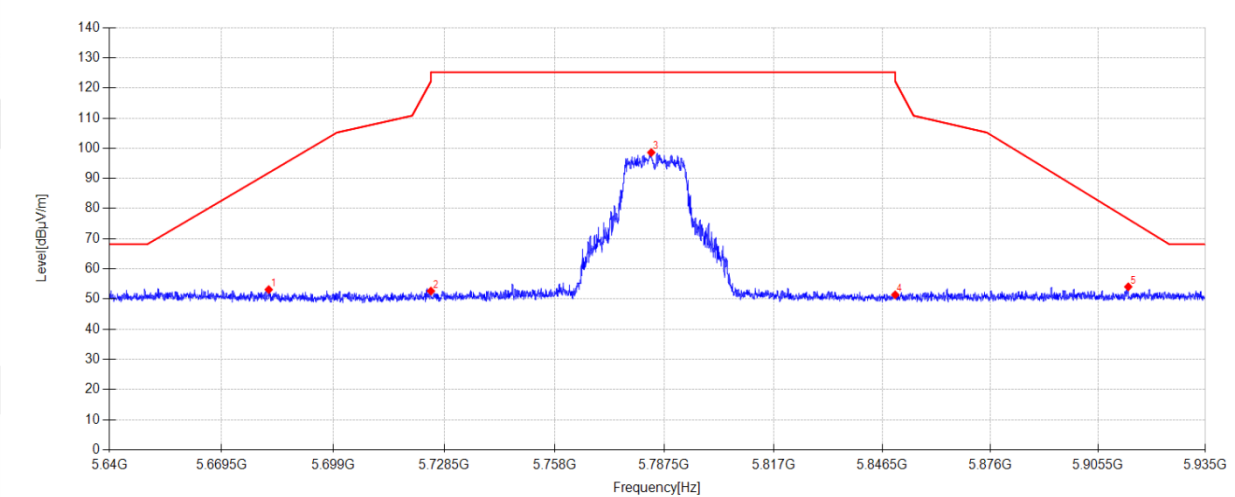

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5681.979	44.30	33.24	5.24	-29.66	53.12	91.86	38.74	PK	Horizontal
2	5725.000	43.58	33.45	5.26	-29.65	52.64	122.20	69.56	PK	Horizontal
3	5783.990	89.08	33.87	5.28	-29.64	98.59	125.20	26.61	PK	Horizontal
4	5850.000	41.81	33.90	5.31	-29.63	51.39	122.20	70.81	PK	Horizontal
5	5913.760	44.01	34.33	5.34	-29.62	54.06	76.52	22.46	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5785MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\102

Memo:

Sample Number: S26020802-001

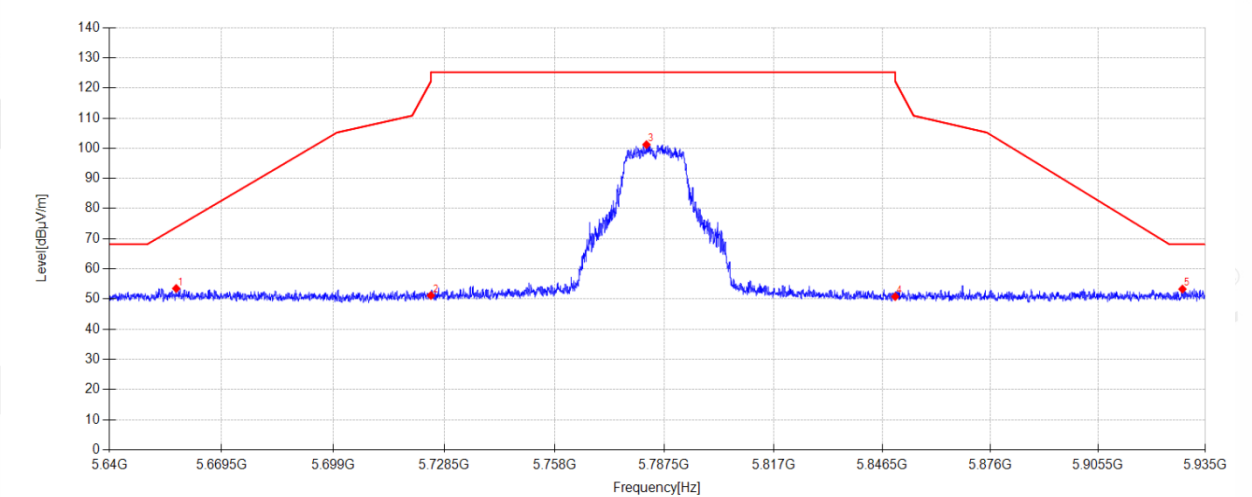

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5657.582	44.50	33.44	5.23	-29.67	53.50	73.81	20.31	PK	Vertical
2	5725.000	42.11	33.45	5.26	-29.65	51.17	122.20	71.03	PK	Vertical
3	5782.692	91.68	33.87	5.28	-29.64	101.19	125.20	24.01	PK	Vertical
4	5850.000	41.21	33.90	5.31	-29.63	50.79	122.20	71.41	PK	Vertical
5	5928.687	43.21	34.36	5.34	-29.61	53.30	68.20	14.90	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result


Test Date:2026-03-06Tested By:Cao Jie

Test Mode:ANT2 TX 11A 5825MHz ModePower Supply:Battery

Condition:Temp:24.7°C;Humi:58.0%Test Site:DDT 3# Chamber

File Path:d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\103

Memo:Sample Number: S26020802-001

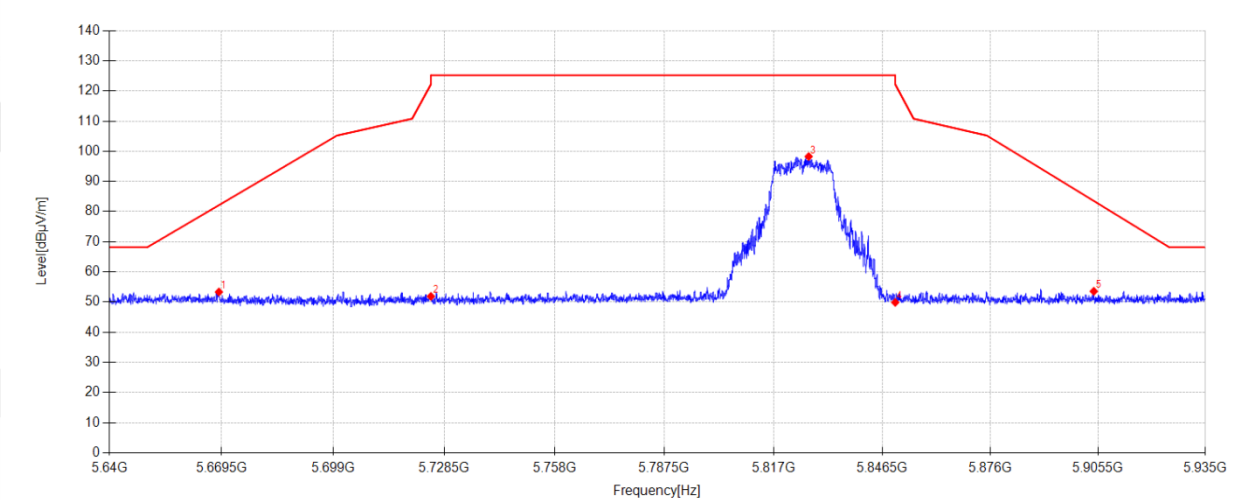

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5668.822	44.42	33.35	5.24	-29.67	53.34	82.13	28.79	PK	Horizontal
2	5725.000	42.80	33.45	5.26	-29.65	51.86	122.20	70.34	PK	Horizontal
3	5826.499	88.68	33.90	5.30	-29.63	98.25	125.20	26.95	PK	Horizontal
4	5850.000	40.29	33.90	5.31	-29.63	49.87	122.20	72.33	PK	Horizontal
5	5904.291	43.54	34.31	5.33	-29.62	53.56	83.53	29.97	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-06

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5825MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:58.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5.8G\104

Memo:

Sample Number: S26020802-001

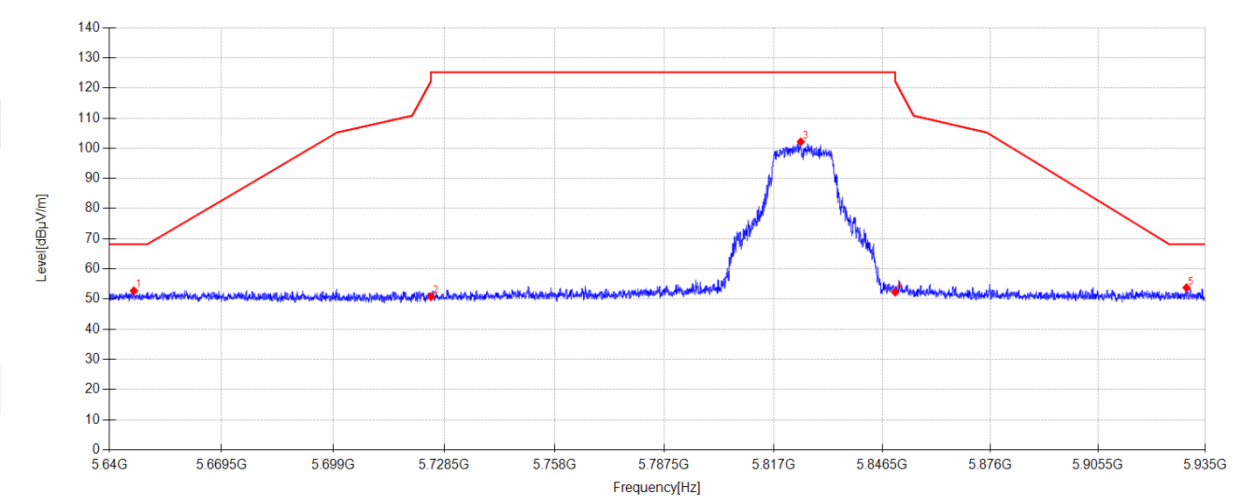

Suspected Data List										
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5646.461	43.72	33.46	5.23	-29.67	52.74	68.20	15.46	PK	Vertical
2	5725.000	41.68	33.45	5.26	-29.65	50.74	122.20	71.46	PK	Vertical
3	5824.375	92.61	33.90	5.30	-29.64	102.17	125.20	23.03	PK	Vertical
4	5850.000	42.67	33.90	5.31	-29.63	52.25	122.20	69.95	PK	Vertical
5	5929.808	43.67	34.36	5.34	-29.61	53.76	68.20	14.44	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\5

Memo:

Sample Number: S26020802-001

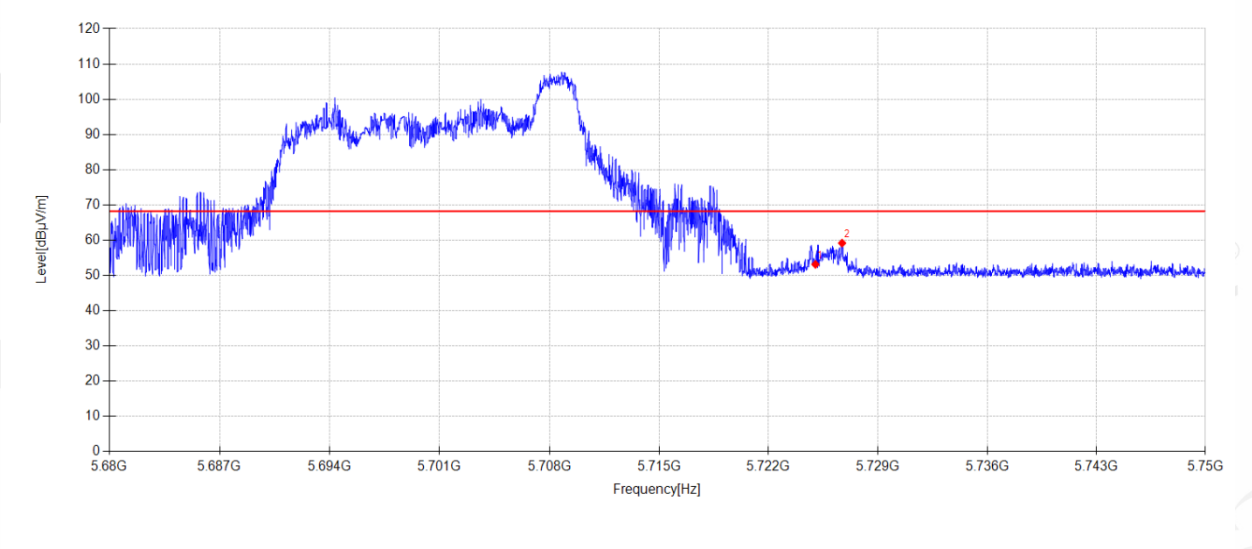

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.01	33.45	5.32	-29.65	53.13	68.20	15.07	PK	Horizontal
2	5726.704	50.03	33.47	5.32	-29.65	59.17	68.20	9.03	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5700MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\6

Memo:

Sample Number: S26020802-001

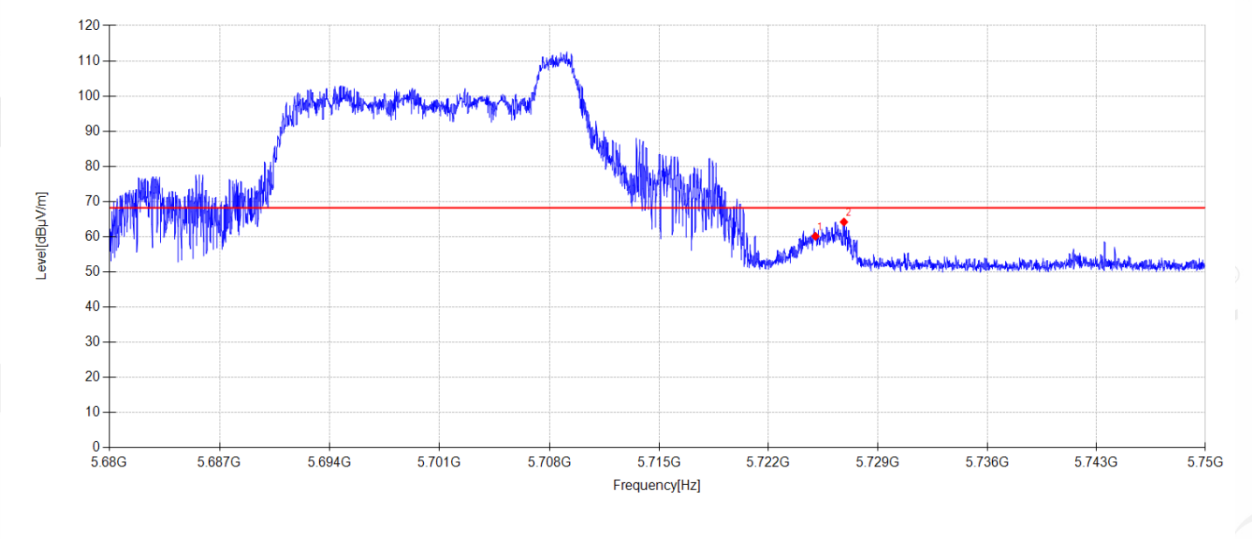

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	51.01	33.45	5.32	-29.65	60.13	68.20	8.07	PK	Vertical
2	5726.823	55.04	33.48	5.32	-29.65	64.19	68.20	4.01	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\7

Memo:

Sample Number: S26020802-001

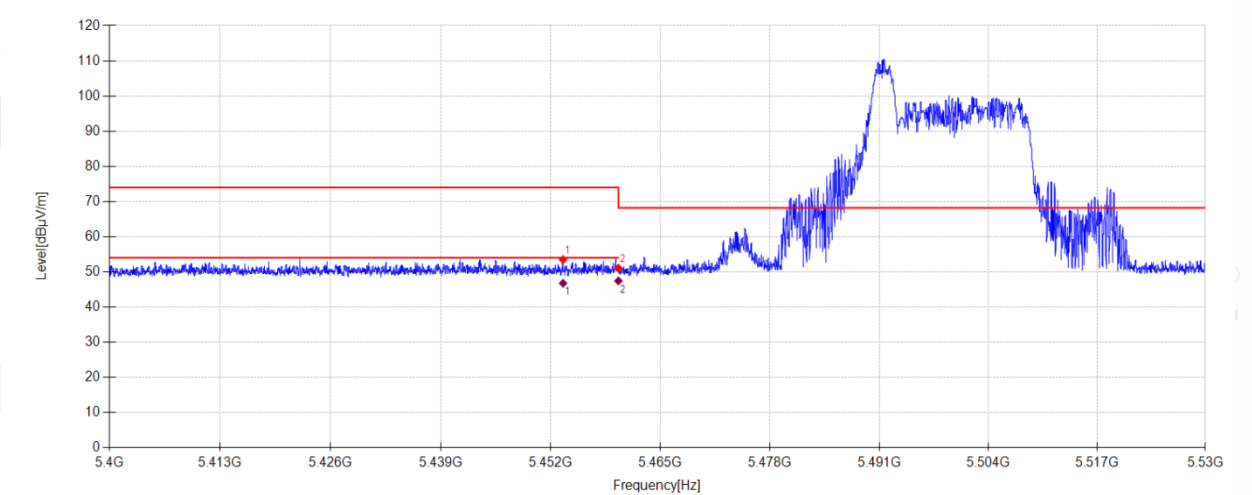

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.443	45.19	32.83	5.19	-29.71	53.50	74.00	20.50	PK	Horizontal
2	5460.000	42.70	32.90	5.19	-29.71	51.08	68.20	17.12	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5453.443	38.45	32.83	5.19	46.76	54.00	7.24	AV	Horizontal	
2	5460.000	39.06	32.90	5.19	47.44	54.00	6.56	AV	Horizontal	

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5500MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\8

Memo:

Sample Number: S26020802-001

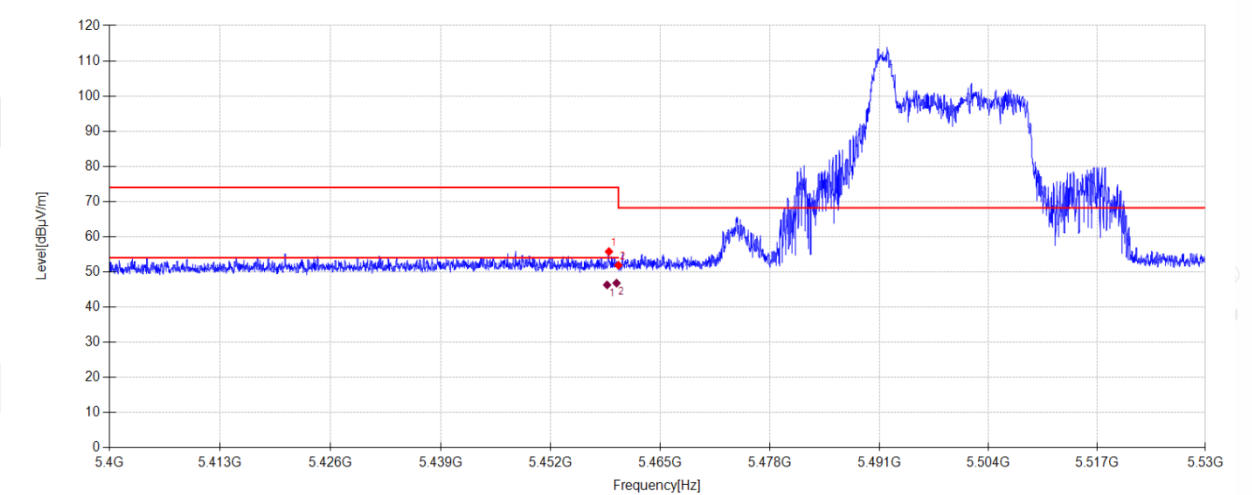

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.877	47.40	32.89	5.19	-29.71	55.77	74.00	18.23	PK	Vertical
2	5460.000	43.51	32.90	5.19	-29.71	51.89	68.20	16.31	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5458.656	37.93	32.89	5.19	46.30	54.00	7.70	AV	Vertical	
2	5459.780	38.44	32.90	5.19	46.82	54.00	7.18	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\9

Memo:

Sample Number: S26020802-001

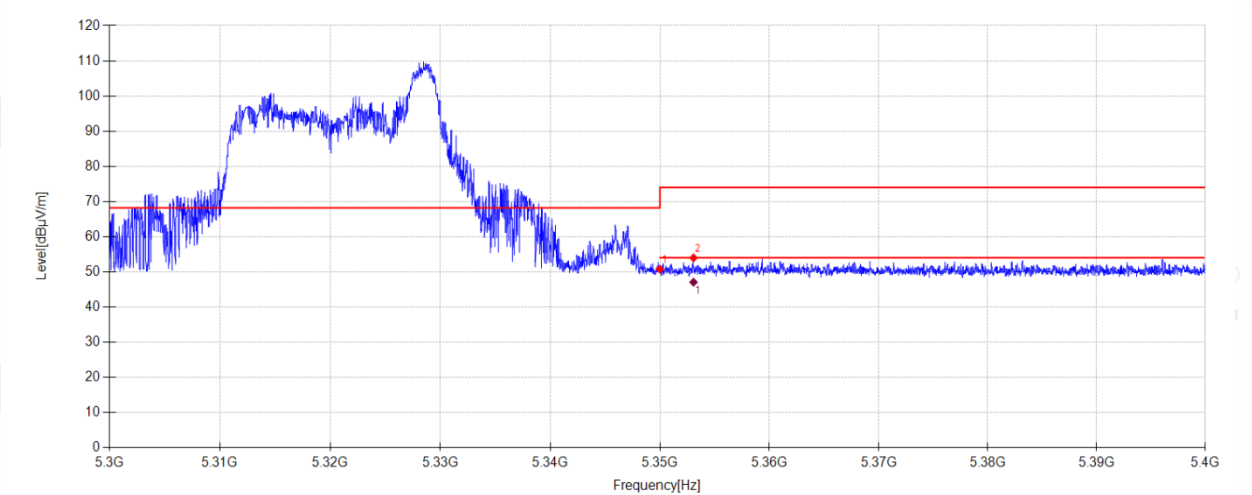

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.88	32.50	5.14	-29.73	50.79	68.20	17.41	PK	Horizontal
2	5353.070	46.06	32.52	5.14	-29.73	53.99	74.00	20.01	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5353.070	39.15	32.52	5.14	47.08	54.00	6.92	AV	Horizontal	

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5320MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\10

Memo:

Sample Number: S26020802-001

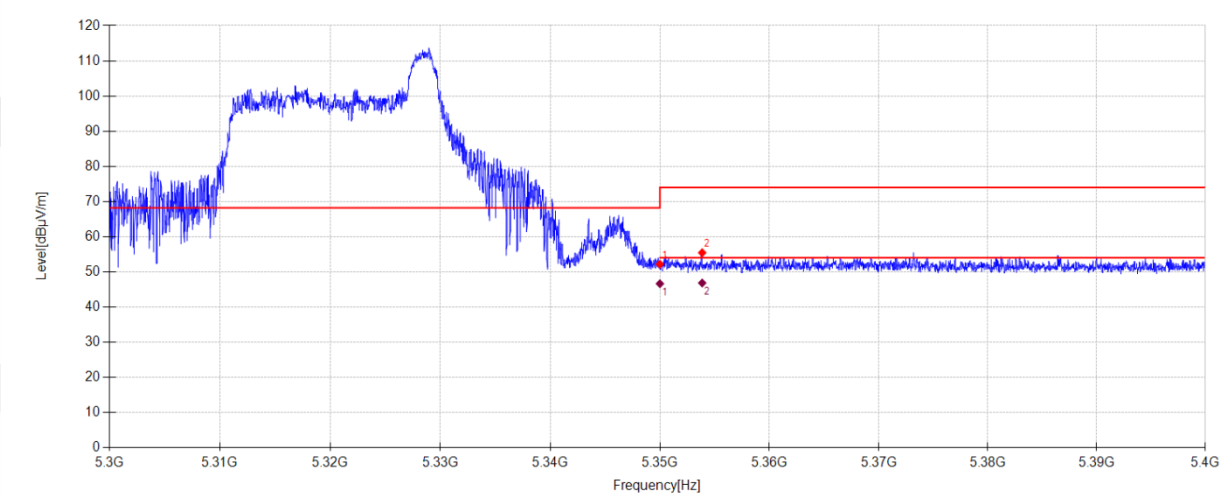

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.27	32.50	5.14	-29.73	52.18	68.20	16.02	PK	Vertical
2	5353.860	47.52	32.53	5.14	-29.73	55.46	74.00	18.54	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5350.000	38.74	32.50	5.14	46.65	54.00	7.35	AV	Vertical	
2	5353.860	38.91	32.53	5.14	46.85	54.00	7.15	AV	Vertical	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\11

Memo:

Sample Number: S26020802-001

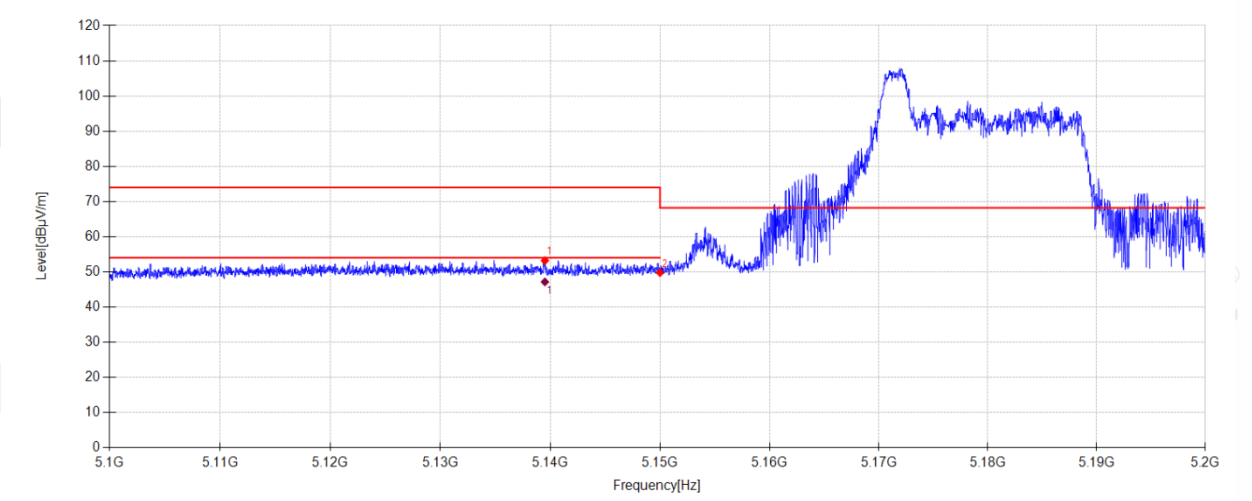

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5139.510	45.14	32.82	5.03	-29.77	53.22	74.00	20.78	PK	Horizontal
2	5150.000	41.61	32.90	5.04	-29.77	49.78	68.20	18.42	PK	Horizontal

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5139.510	39.07	32.82	5.03	47.15	54.00	6.85	AV	Horizontal	

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-03-10

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5180MHz Mode

Power Supply:

Battery

Condition:

Temp:23.9°C;Humi:53.9%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26020802-2E\FCC ABOVE 1G 5G RU\12

Memo:

Sample Number: S26020802-001

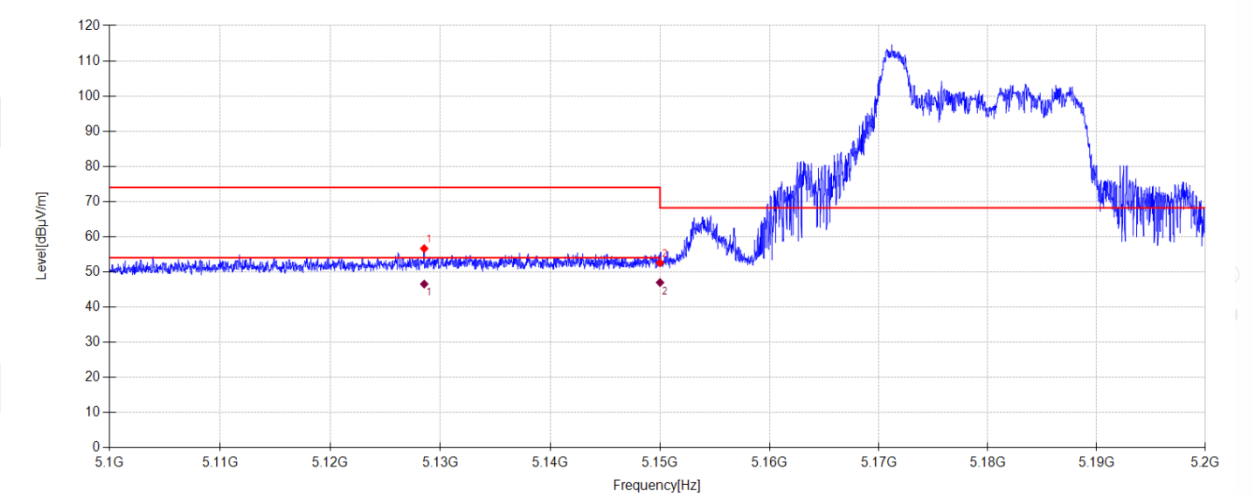

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5128.530	48.65	32.73	5.02	-29.77	56.63	74.00	17.37	PK	Vertical
2	5150.000	44.37	32.90	5.04	-29.77	52.54	68.20	15.66	PK	Vertical

Final Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	
1	5128.530	38.56	32.73	5.02	46.54	54.00	7.46	AV	Vertical	
2	5150.000	38.81	32.90	5.04	46.98	54.00	7.02	AV	Vertical	

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

15. Power Line Conducted Emissions

15.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI 3	DDT-ZC01972	2027/02/27
Two Line V-Network	R&S	ENV216	DDT-ZC00586	2026/07/06
Pulse Limiter	R&S	KH43101	DDT-ZC00747	2027/02/27
Coaxial signal signal cable	H&S	RG214-5	DDT-ZC01817	2027/02/27
Conducted Radiated Software	Audix	e3	DDT-ZC00562	/
Two Line V-Network	R&S	ENV216	DDT-ZC02058	2026/07/06

15.2. Block diagram of test setup

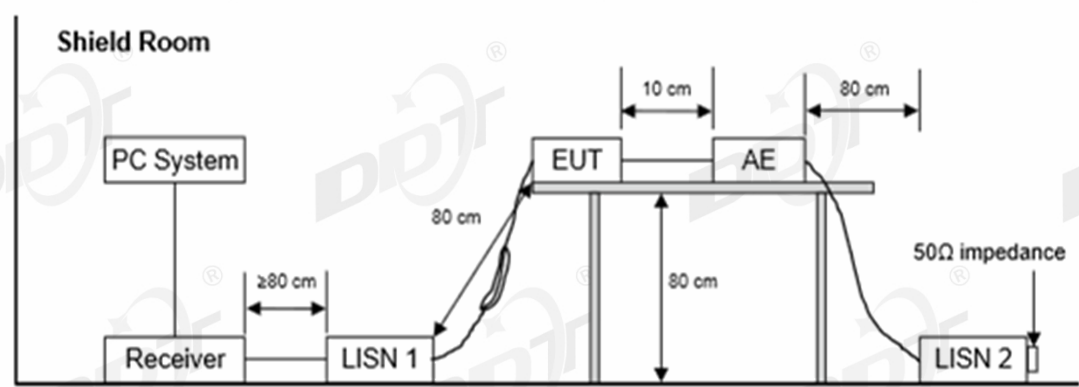

15.3. Limits

Frequency	Quasi-Peak Level dB(uV)	Average Level dB(uV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.
Note 2: The lower limit shall apply at the transition frequencies.

15.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

15.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.
All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

15.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.


15.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 5# Shield Room
Test Date : 2026-04-09
Power Supply : AC 120V/60Hz
Condition : Temp:21.8°C,Humi:59.8%
Memo : S26020802-001

D:\2026 report data\Q26020802-2E\0409 CE.EM6
Tested By : Ling Yisheng
Test Mode : WIFI 5G Mode
LISN : 2025 2# 216/LINE

Data: 18

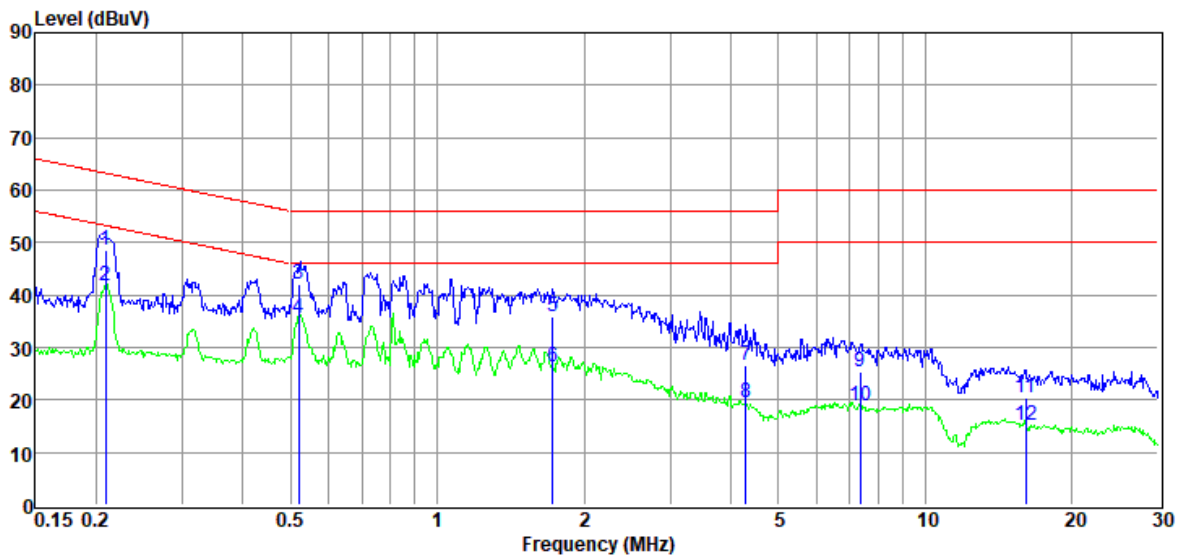

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.21	28.90	9.46	0.05	10.21	48.62	63.23	14.61	QP	LINE
2	0.21	22.15	9.46	0.05	10.21	41.87	53.23	11.36	Average	LINE
3	0.52	22.07	9.49	0.10	10.32	41.98	56.00	14.02	QP	LINE
4	0.52	15.80	9.49	0.10	10.32	35.71	46.00	10.29	Average	LINE
5	1.73	15.68	9.52	0.20	10.39	35.79	56.00	20.21	QP	LINE
6	1.73	6.32	9.52	0.20	10.39	26.43	46.00	19.57	Average	LINE
7	4.29	6.63	9.53	0.24	10.28	26.68	56.00	29.32	QP	LINE
8	4.29	-0.47	9.53	0.24	10.28	19.58	46.00	26.42	Average	LINE
9	7.37	5.45	9.55	0.26	10.19	25.45	60.00	34.55	QP	LINE
10	7.37	-1.07	9.55	0.26	10.19	18.93	50.00	31.07	Average	LINE
11	16.06	0.13	9.77	0.33	10.23	20.46	60.00	39.54	QP	LINE
12	16.06	-5.18	9.77	0.33	10.23	15.15	50.00	34.85	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).


4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 5# Shield Room
 Test Date : 2026-04-09
 Power Supply : AC 120V/60Hz
 Condition : Temp:21.8°C,Humi:59.8%
 Memo : S26020802-001

D:\2026 report data\Q26020802-2E\0409 CE.EM6
 Tested By : Ling Yisheng
 Test Mode : WIFI 5G Mode
 LISN : 2025 2# 216/NEUTRAL

Data: 20

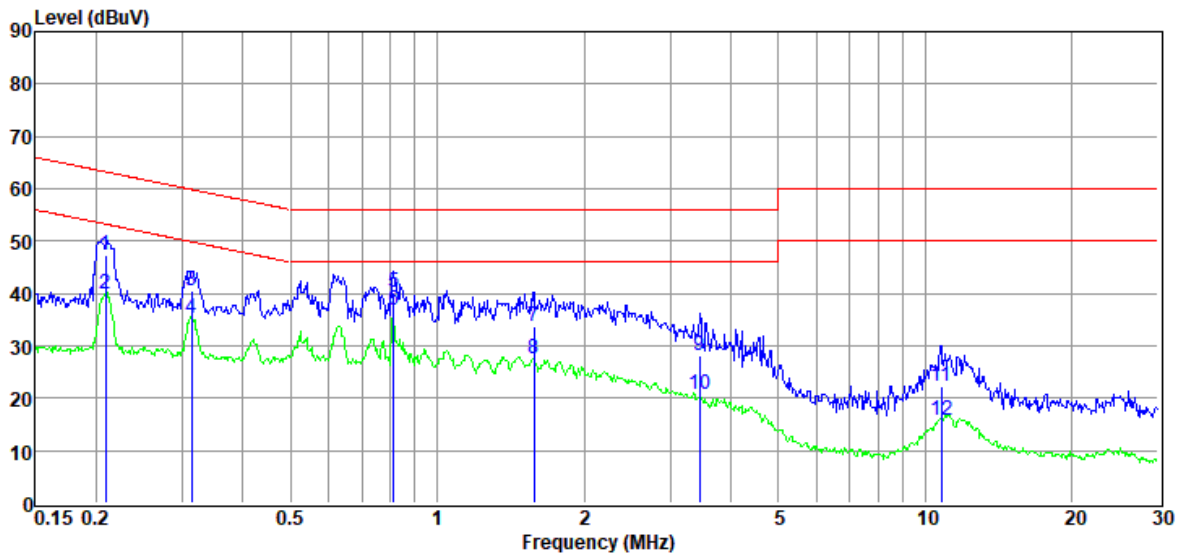

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Margin (dB)	Detector	Phase
1	0.21	27.52	9.49	0.05	10.21	47.27	63.23	15.96	QP	NEUTRAL
2	0.21	20.15	9.49	0.05	10.21	39.90	53.23	13.33	Average	NEUTRAL
3	0.31	20.74	9.48	0.08	10.26	40.56	59.88	19.32	QP	NEUTRAL
4	0.31	15.29	9.48	0.08	10.26	35.11	49.88	14.77	Average	NEUTRAL
5	0.81	20.07	9.48	0.15	10.38	40.08	56.00	15.92	QP	NEUTRAL
6	0.81	16.78	9.48	0.15	10.38	36.79	46.00	9.21	Average	NEUTRAL
7	1.58	13.62	9.50	0.20	10.39	33.71	56.00	22.29	QP	NEUTRAL
8	1.58	7.31	9.50	0.20	10.39	27.40	46.00	18.60	Average	NEUTRAL
9	3.45	8.06	9.52	0.23	10.31	28.12	56.00	27.88	QP	NEUTRAL
10	3.45	0.80	9.52	0.23	10.31	20.86	46.00	25.14	Average	NEUTRAL
11	10.79	2.11	9.66	0.28	10.15	22.20	60.00	37.80	QP	NEUTRAL
12	10.79	-4.28	9.66	0.28	10.15	15.81	50.00	34.19	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

17. Photos of the EUT

Please refer to DDT-Q26020802-2E appendix I

-----End Report-----