

SPECIFICATION



深圳市大显科技有限公司

Shenzhen Daxian Technology Co., Ltd.

中山悦辰 COVE X1 WIFI 1 天线组件

Richsound COVE X2 WIFI 1 Antenna assembly

产 品 规 格 书

Product Specification

客 户 connection	中山悦辰 Richsound	频 段 frequency range	2400MHz ~ 2500MHz 5150MHz ~ 5850MHz
项目名称 entry name	COVE X1	版 本 edition	V05
物料编号 Material No	3C-OVEX1-174	颜 色 Color	黑色+灰色 Black+Gray
客户料号 Customer Item Number	101000833		
R F 设计 R F Design	沈 川 Chuan.Shen	结构设计 Structural Design	周锐斌 Rui Bin Zhong
品质经理 Quality Manager	李崇瑞 ChongRui.Li	技术总监 Technical Director	张 磊 Lei Zhang
日 期 Date	2026-01-28		

客户确认:

Customer confirmation:

装配是否符合贵司要求: ☐OK ☐NGWhether the assembly meets your company's requirements: ☐OK ☐NG

深圳市大显科技有限公司

Shenzhen Daxian Technology Co., Ltd.

深圳市龙岗区布吉镇吉华路 513 号上水径村(国防培训基地
对面) 达成工业园综合楼 7 楼

TEL:0755-28576002

FAX:0755-84276383

上海分部: 上海市张江高科技园区集成电路产业区龙东大道
3000 号 8 号楼 201 室

TEL:021-61630552

FAX:755-84276383

Buji Town, Longgang District, Shenzhen, China Jihua Road 513,
Shangshuijing Village (opposite the national defense
training base) Dacheng Industrial Park, Building 7.

TEL:0755-28576002

FAX:0755-84276383

Room201, Building8, LongDongRoad3000#, Semiconductor Industry
Park, ZhangJiang Hitech Zone, ShangHai

TEL:021-61630552

FAX:755-84276383

[illegible]

Page 2

索引

Indexes

一、项目说明 Project Description.....	4
二、 WIFI 1 天线 antenna.....	4
1、 规格 specifications.....	4
1.1 电气规格标准 Electrical specifications and standards.....	5
1.1.1 电性能指标 Electrical performance index.....	5
1.1.2 天线位置图片 Antenna position picture.....	5
1.2 结构规格标准 Structural specifications and standards.....	5
1.2.1 天线组成 Antenna composition..	5
2、测试环境 testing environment.....	6
3、测试 test.	7
3.1 驻波(VSWR)的测试 Test of standing wave (VSWR).....	7
3.1.1 测试连接 Test connection.....	7
3.2 效率、功率（TRP）、灵敏度（TIS）的测试 Testing of efficiency, power (TRP), sensitivity (TIS).....	7
3.2.1 测试的场地 Test site.....	7
3.2.2 测试的仪表 Tested Instruments.....	7
3.2.3 测试数据 test data.....	7
4、VSWR 参数图 Parameter diagram.....	8-9
5、无源场型图 Passive field pattern diagram.....	10-11
6、结论 conclusion.....	11
三、工程图 schedule drawing.....	12

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

一 项目说明 Project Description


客户名: Customer Name:	中山悦辰 Richsound
整机类型: Type of complete machine:	音箱 loudspeaker box
天线频段: Antenna band:	2400MHz ~ 2500MHz、5150MHz ~ 5850MHz
天线形式: Antenna form:	FPC+同轴线+线材海绵 FPC+coaxial line+wire sponge
馈电形式: Feed form:	焊接 weld
硬件版本: Hardware version:	/

二 WIFI 1 天线组件 Antenna assembly

1 规格 specifications

本报告主要提供 COVE X1 项目天线的各项电气和结构性能参数的测试状况。下图为大显设计的天线图片。

This report mainly provides the testing status of various electrical and structural performance parameters of the antenna for the COVE X1 project. The following image shows an antenna with a large display design.

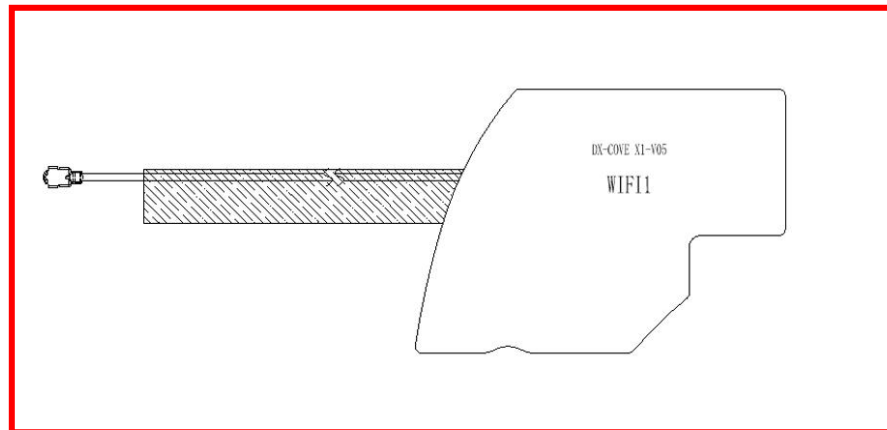

天线外观图

antenna appearing diagram

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

1.1 电气规格标准 Electrical specifications and standards


1.1.1 电性能指标 Electrical performance index

天线工作频段在 2400MHz ~ 2500MHz、5150MHz ~ 5850MHz。下表是大显设计和量产天线的电性能的指标。

The operating frequency band of the antenna is between 2400 and 2500 MHz、5150 and 5850MHz..The following table shows the electrical performance indicators of large display design and mass production antennas.

Frequency Range	Frequency (MHz)	VSWR
WIFI 1	2400MHz ~ 2500MHz 5150MHz ~ 5850MHz	≤ 2

1.1.2 天线位置图片 Antenna position picture

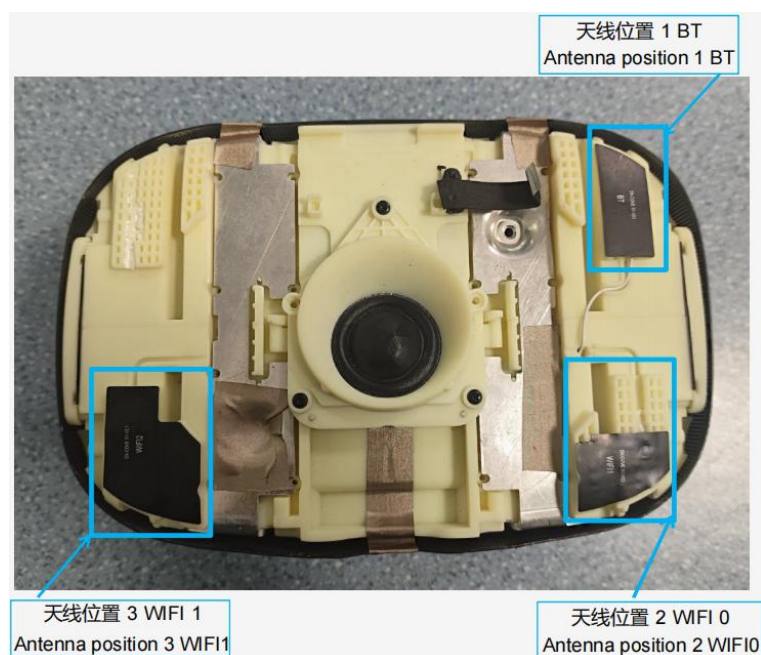

2 结构规格标准 Structural specifications and standards

1.2.1 天线组成 Antenna composition

天线主要是由 FPC+同轴线+线材海绵 组成。

The antenna is mainly composed of FPC+coaxial line+wire sponge.

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

2、测试设备 The Equipment of Active Test

Satimo 3D Chamber $4 \times 4 \times 4$ (m)

CMW500 E5071C

Network analyzer-R&S ZVL

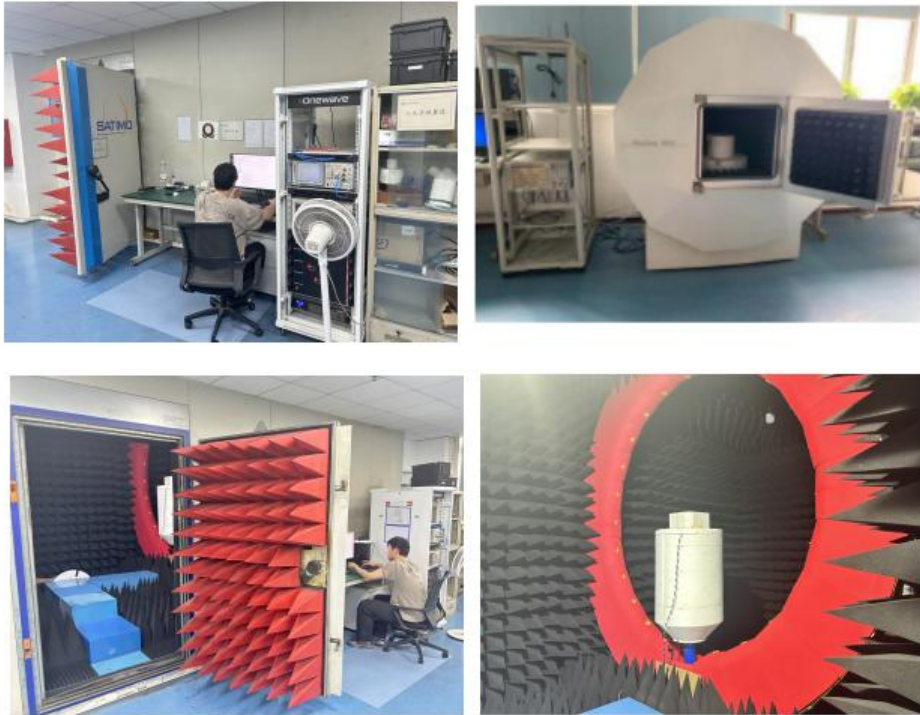


图 2

Figure 2

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

3 测试 test

3.1 驻波(VSWR)的测试 Test of standing wave (VSWR)

3.1.1 测试连接: VSWR 测试装置依次连接为: R&S ZVL 网络分析仪 → 测试线 → 测试治

Test connection: The VSWR test device is sequentially connected as follows: R&S ZVL network analyzer → test line → test fixture

实测(附图)Actual measurement (attached drawing)

3.2 增益及效率、功率 (TRP)、灵敏度 (TIS) 的测试

Gain and efficiency, power (TRP), sensitivity (TIS) testing

3.2.1 测试的场地 Test site:

大显微波暗室。测试频率范围为 400MHz—6GHz, 静区范围为 50cm 圆周, 反射率小于 -50 dB。

Large display microwave anechoic chamber. The test frequency range is 400MHz - 6GHz, the static zone range is 50cm circumferential, and the reflectivity is less than - 50dB.

3.2.2 测试的仪表 Tested Instruments:

R&S ZVL 网络分析仪、CMW500 E5071C、标准喇叭天线、法国 SATIMO-SG24SYSTEM 系统、打印机等。

R&S ZVL network analyzer, Agilent 8960 E5515C, standard horn antenna, French SATIMO-SG24SYSTEM system, printer, etc.

3.2.3 测试数据: 在微波暗室中, 测试的功率和灵敏度相关的数值如下表

Test data: In a microwave anechoic chamber, the values related to the power and sensitivity tested are shown in the table below

无源效率&增益 Passive efficiency&gain:


	Efficiency (%)	Efficiency (dB)	Gain (dBi)
2400	41.01	-3.87	1.39
2450	41.55	-3.81	1.66
2500	41.35	-3.84	1.17
5150	36.02	-4.43	2.48
5300	36.18	-4.42	2.63
5500	36.54	-4.41	2.83
5700	36.24	-4.37	2.71
5850	35.71	-4.47	2.51

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

4、VSWR 参数图 VSWR parameter diagram

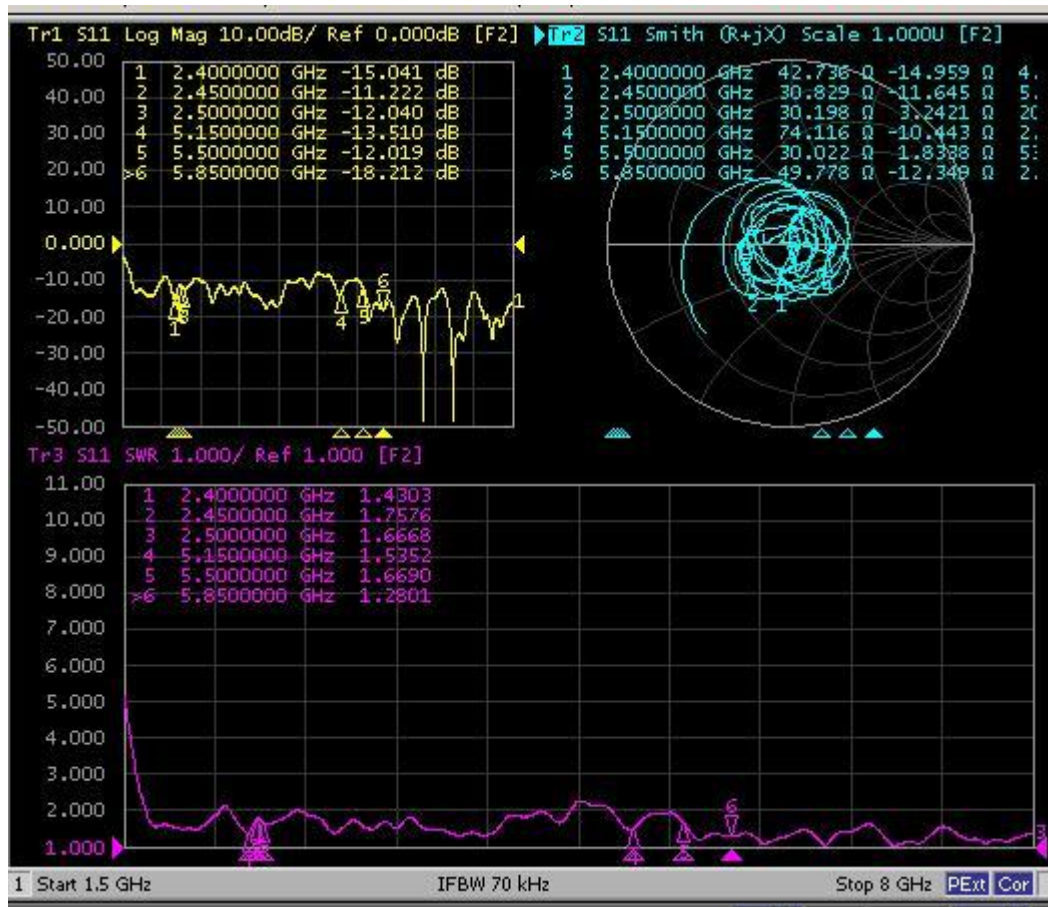


www.Topant.com.cn

Confidentiality requirements


Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

天线隔离度 Antenna Isolation:

BT and WIFI 1

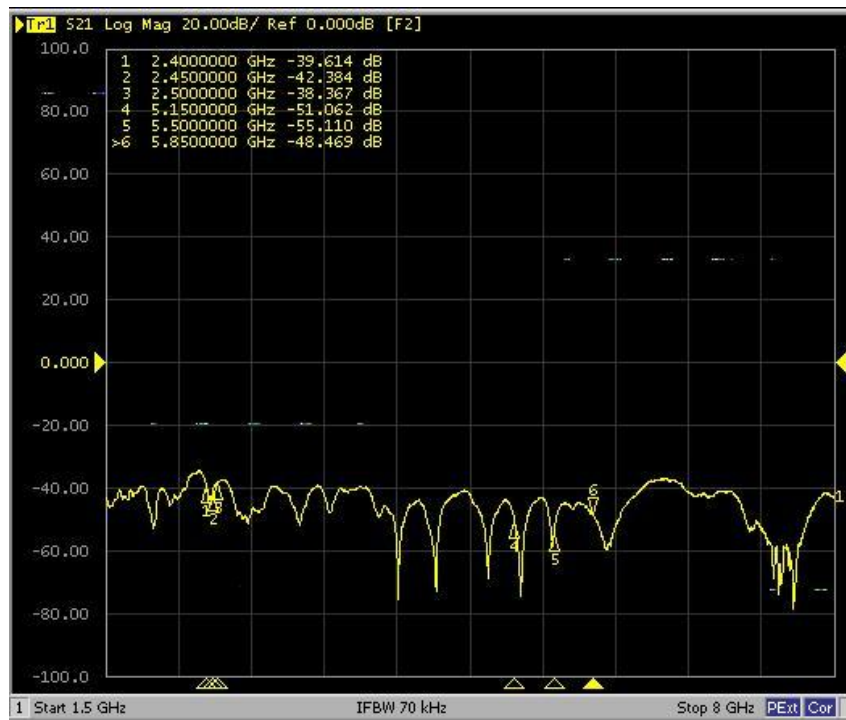

WIFI 0 and WIFI 1

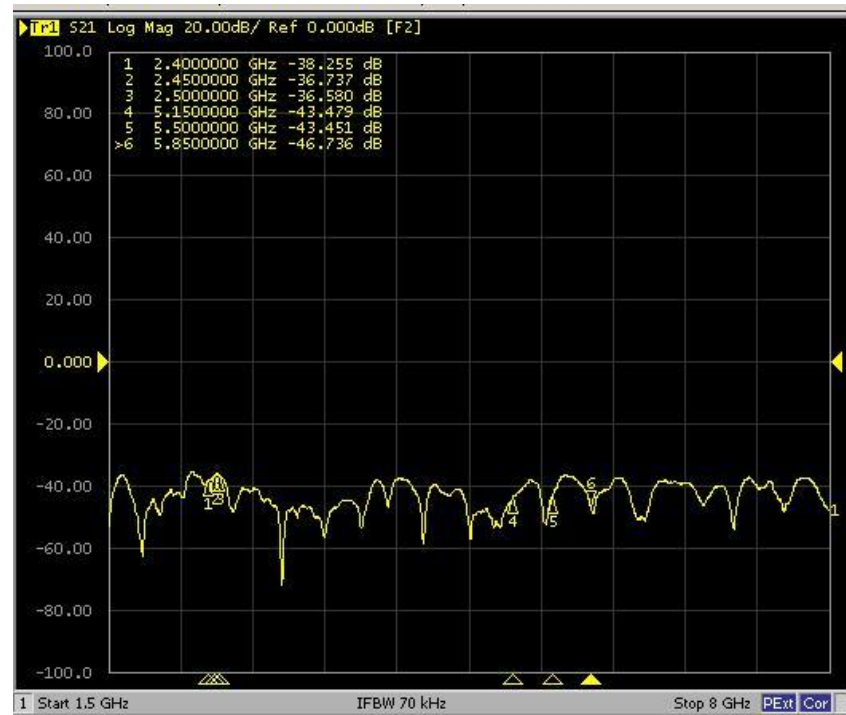


www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd


5、无源场型图 Passive Field Pattern Diagram

2450MHz

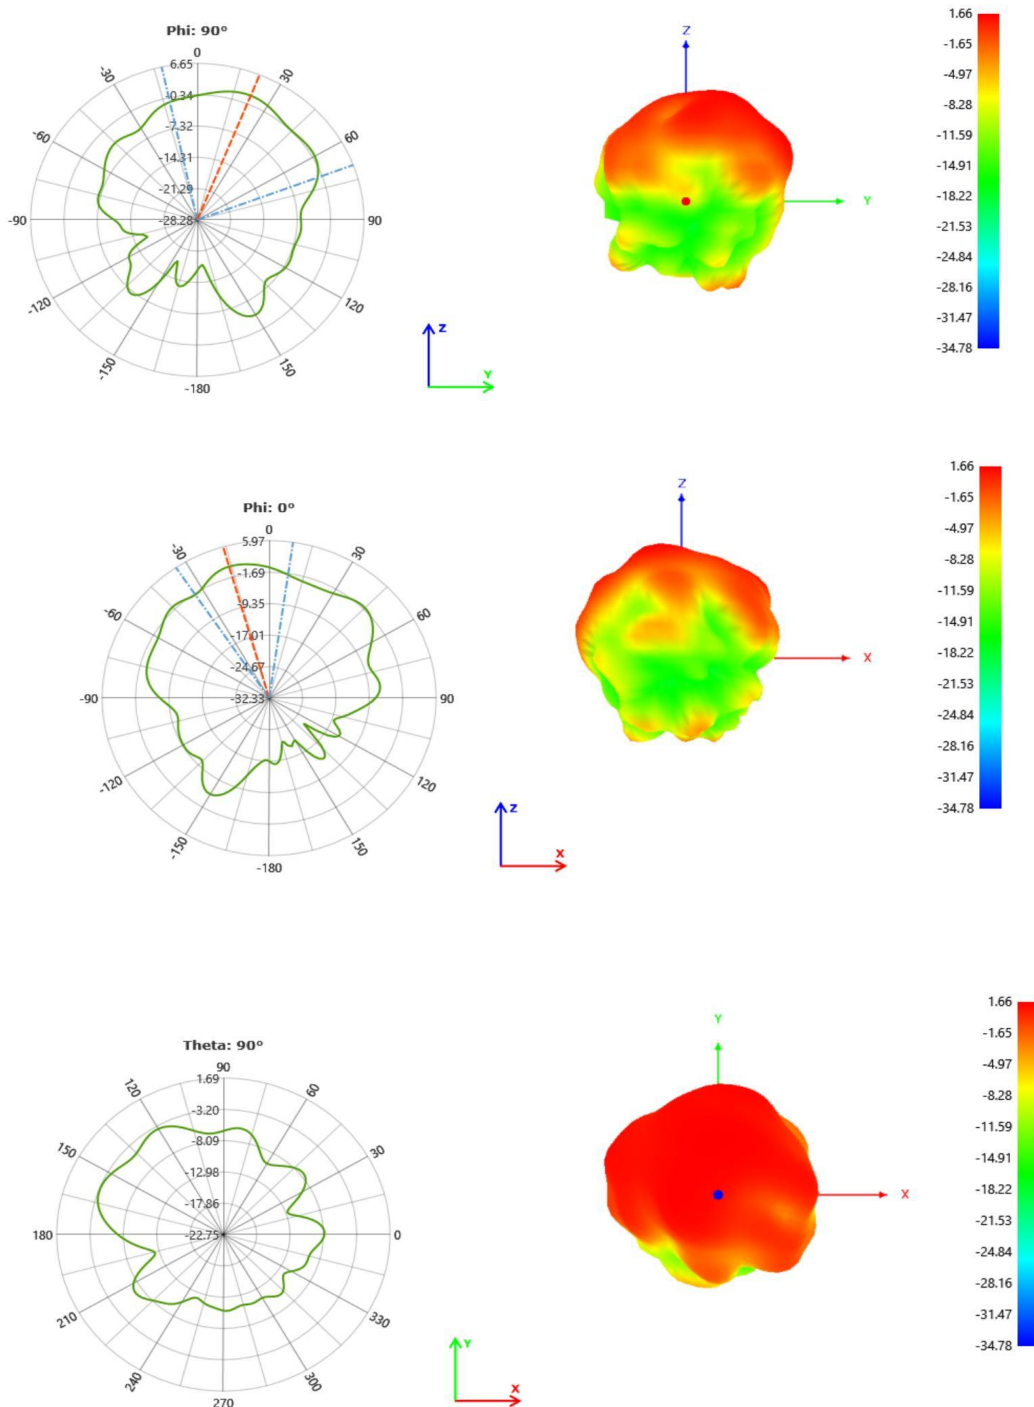

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

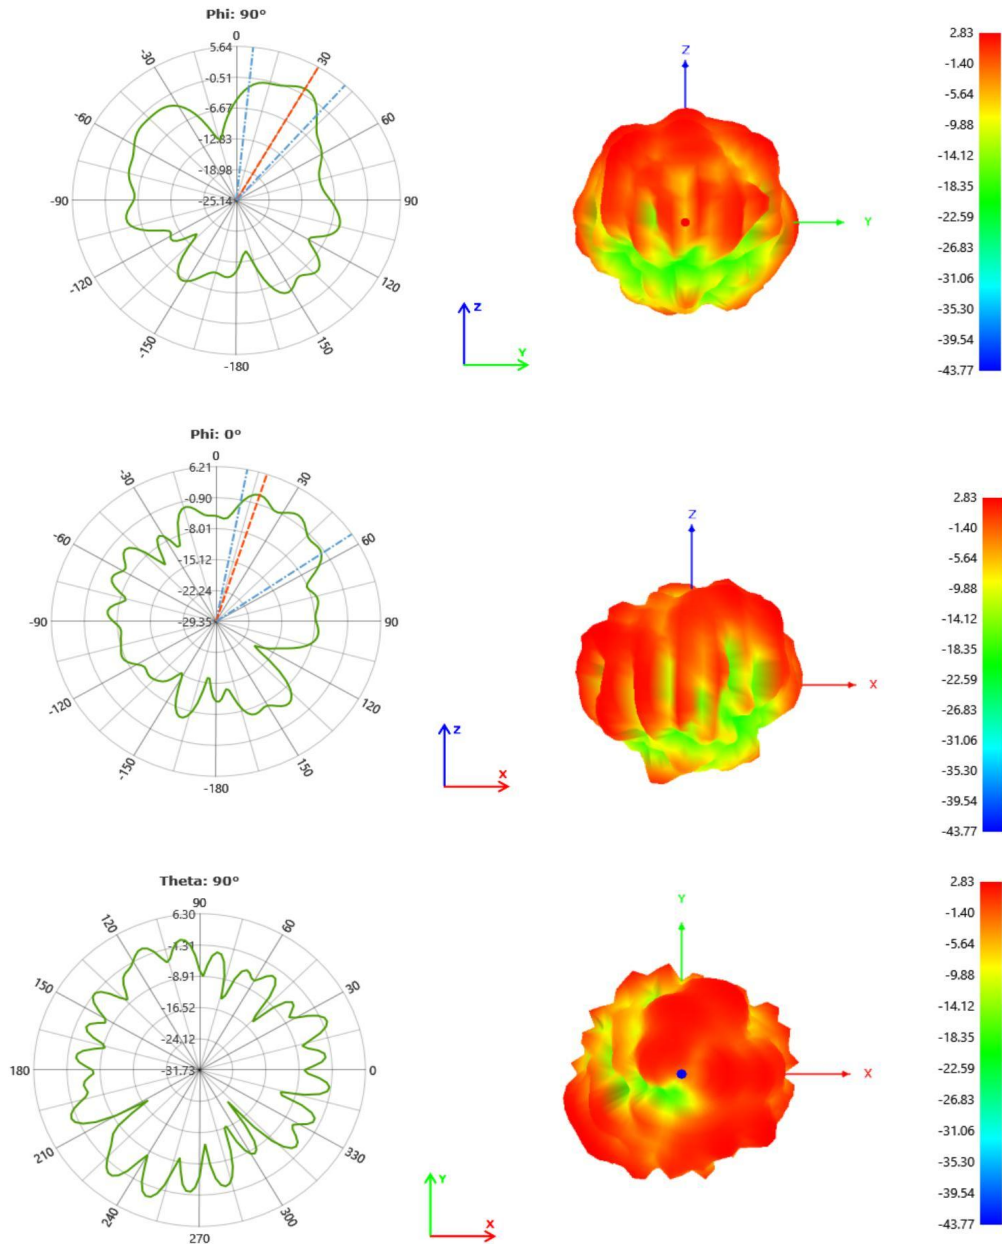5500MHz



6、结论 conclusion

此天线是在客户提供样机基础上设计，电参数和结构性能已达到技术要求，请确认！

This antenna is designed based on the prototype provided by the customer. The electrical parameters and structural performance have met the technical requirements, please confirm!

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

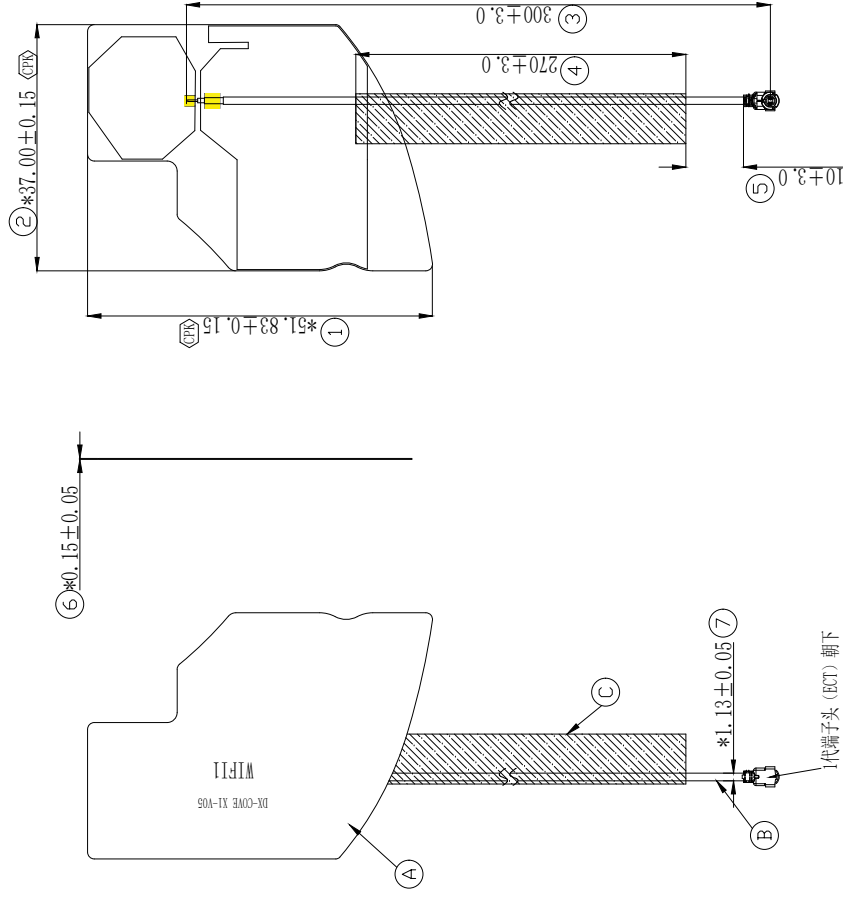

C	线材海绵 (Cable sponge)	PIF	黑色 (black)
B	端子线轴 (PC connector)	Cable	灰色 (gray)
A	FFC	Electrolytic copper PI	黑色 (black)
序号 (serial number)	零件名称 (Part Name)	材质 (material)	颜色 (colour)
			备注 (Note)

技术要求:

(technical requirement:)

1. “*”为重点尺寸；
 - (1. “*” is the key dimension.)
2. 未标注尺寸请依图纸；
 - (2. Please refer to the drawing for unspecified dimensions.)
3. 不可有虚焊、漏焊、短线、断线等操作不良；
 - (3. There should be no poor operation such as faulty soldering, missing soldering, short wires, broken wires, etc.)
4. 符合 RoHS 要求。
 - (4. Meet RoHS requirements.)



深圳大显科技有限公司

Shenzhen Topant Technology Co., Ltd.

机型(Machine model)	COVE X1	产品颜色(Product Color)	黑色(black)	日期(date)	2026/01/28
项目编号(Project Code)	CC-OVEX1-174	模面处理(Mold surface treatment)	NA	结构(WD)	周锐斌
零件名称(Part Name)	WiFi天线(WiFi antenna)	单位(unit)	mm	比例(scale)	1:1
零件编码(Part Number)	3C-OVEX1-174	第三视角 (Third perspective)		射频(RF)	沈川
材质(material)	FPC+sponge+RF connector			审核(check)	吴锡欢
保存路径(Save Path)				批准(ratify)	张磊
				当前版本(current version)	A