

# FCC AND IC CERTIFICATION TEST REPORT

## FOR

|                             |   |                                                            |
|-----------------------------|---|------------------------------------------------------------|
| <b>Applicant</b>            | : | Harman International Industries, Incorporated              |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES |
| <b>Equipment under Test</b> | : | Wireless Adaptor and 120W Digital Amplifier                |
| <b>Model No.</b>            | : | ADAPT+AMP                                                  |
| <b>Trade Mark</b>           | : | Harman Kardon                                              |
| <b>FCC ID</b>               | : | APIHKADAPTAMP                                              |
| <b>IC</b>                   | : | 6132A-HKADAPTAMP                                           |
| <b>Manufacturer</b>         | : | Harman International Industries, Incorporated              |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES |

**Issued By:** Dongguan Dongdian Testing Service Co., Ltd.

**Add:** No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City,  
Guangdong Province, China, 523808

**Tel:** +86-0769-89201699   **E-mail:** ddt@dgddt.com   <http://www.dgddt.com>

# REPORT

## TABLE OF CONTENTS

|       |                                                    |    |
|-------|----------------------------------------------------|----|
|       | Test report declares.....                          | 4  |
| 1.    | Summary of test results.....                       | 5  |
| 2.    | General test information .....                     | 6  |
| 2.1.  | Description of EUT .....                           | 6  |
| 2.2.  | Accessories of EUT .....                           | 6  |
| 2.3.  | Assistant equipment used for test .....            | 6  |
| 2.4.  | Block diagram of EUT configuration for test .....  | 7  |
| 2.5.  | Deviations of test standard.....                   | 7  |
| 2.6.  | Test environment conditions.....                   | 7  |
| 2.7.  | Test laboratory .....                              | 7  |
| 2.8.  | Measurement uncertainty.....                       | 8  |
| 3.    | Equipment used during test .....                   | 9  |
| 4.    | 6dB Bandwidth and 99% Bandwidth .....              | 10 |
| 4.1.  | Block diagram of test setup .....                  | 10 |
| 4.2.  | Limits .....                                       | 10 |
| 4.3.  | Test Procedure .....                               | 10 |
| 4.4.  | Test Result .....                                  | 10 |
| 4.5.  | original test data.....                            | 13 |
| 5.    | Conducted peak Output Power .....                  | 37 |
| 5.1.  | Block diagram of test setup .....                  | 37 |
| 5.2.  | Limits .....                                       | 37 |
| 5.3.  | Test Procedure .....                               | 37 |
| 5.4.  | Test Result .....                                  | 37 |
| 6.    | Power Spectral Density.....                        | 39 |
| 6.1.  | Block diagram of test setup .....                  | 39 |
| 6.2.  | Limits .....                                       | 39 |
| 6.3.  | Test Procedure .....                               | 39 |
| 6.4.  | Test Result .....                                  | 39 |
| 6.5.  | original test data.....                            | 41 |
| 6.6.  | Band Edge and Spurious Emissions (Conducted) ..... | 53 |
| 6.7.  | Block diagram of test setup .....                  | 53 |
| 6.8.  | Limits .....                                       | 53 |
| 6.9.  | Test Procedure .....                               | 53 |
| 6.10. | Test Result .....                                  | 54 |
| 6.11. | original test data.....                            | 55 |
| 7.    | Radiated Spurious Emissions .....                  | 88 |

|       |                                                     |     |
|-------|-----------------------------------------------------|-----|
| 7.1.  | Block diagram of test setup .....                   | 88  |
| 7.2.  | Limit .....                                         | 89  |
| 7.3.  | Test Procedure .....                                | 90  |
| 7.4.  | Test result .....                                   | 91  |
| 8.    | Radiated Band Edge Compliance .....                 | 95  |
| 8.1.  | Block diagram of test setup .....                   | 95  |
| 8.2.  | Limit .....                                         | 95  |
| 8.3.  | Test Procedure .....                                | 95  |
| 8.4.  | Test result .....                                   | 95  |
| 9.    | Power Line Conducted Emission.....                  | 112 |
| 9.1.  | Block diagram of test setup .....                   | 112 |
| 9.2.  | Power Line Conducted Emission Limits(Class B) ..... | 112 |
| 9.3.  | Test Procedure .....                                | 112 |
| 9.4.  | Test Result .....                                   | 113 |
| 10.   | Antenna Requirements.....                           | 116 |
| 10.1. | Limit .....                                         | 116 |
| 10.2. | Result .....                                        | 116 |

**TEST REPORT DECLARE**

|                             |   |                                                            |
|-----------------------------|---|------------------------------------------------------------|
| <b>Applicant</b>            | : | Harman International Industries, Incorporated              |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES |
| <b>Equipment under Test</b> | : | Wireless Adaptor and 120W Digital Amplifier                |
| <b>Model No</b>             | : | ADAPT+AMP                                                  |
| <b>Trade Mark</b>           | : | Harman Kardon                                              |
| <b>Manufacturer</b>         | : | Harman International Industries, Incorporated              |
| <b>Address</b>              | : | 8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES |

**Test Standard Used:** FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

**Test procedure used:** ANSI C63.10:2013, RSS-Gen Issue 4, Nov. 2014, KDB558074 D01 DTS Meas Guidance V03r02


**We Declare:**

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.**

|                         |                    |                      |                               |
|-------------------------|--------------------|----------------------|-------------------------------|
| <b>Report No:</b>       | DDT-RQ17090505-1E4 |                      |                               |
| <b>Date of Receipt:</b> | Sep. 05, 2017      | <b>Date of Test:</b> | Sep. 05, 2017 ~ Oct. 15, 2017 |

**Prepared By:**

  
**Toby Ren/Engineer**

Approved By:  
  
**Kevin Feng/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

## 1. Summary of test results

| The EUT have been tested according to the applicable standards as referenced below. |                                                                                        |         |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|---------|
| Description of Test Item                                                            | Standard                                                                               | Results |
| 6dB Bandwidth and 99% Bandwidth                                                     | FCC 15.247 (a) (2)<br>RSS-247 Clause 5.2 (a)                                           | PASS    |
| Conducted Output Power                                                              | FCC 15.247 (b) (3)<br>RSS-247 Clause 5.4 (e)                                           | PASS    |
| Power Spectral Density                                                              | FCC 15.247 (e)<br>RSS-247 Clause 5.2 (b)                                               | PASS    |
| Band-edge and Spurious Emissions (Conducted)                                        | FCC 15.247 (d)<br>RSS-247 Clause 5.5                                                   | PASS    |
| Radiated Spurious Emissions                                                         | FCC 15.247 (d)<br>FCC 15.209<br>FCC 15.205<br>RSS-247 Clause 5.5<br>RSS-GEN Clause 8.9 | PASS    |
| Radiated Band Edge Compliance                                                       | FCC 15.247 (d)<br>FCC 15.209<br>FCC 15.205<br>RSS-247 Clause 5.5<br>RSS-GEN Clause 8.9 | PASS    |
| Power Line Conducted Emission                                                       | FCC 15.207<br>RSS-GEN Clause 8.8                                                       | PASS    |
| Antenna requirement                                                                 | FCC 15.203<br>RSS-GEN Clause 8.3                                                       | PASS    |

## 2. General test information

### 2.1. Description of EUT

|                          |                                                                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT* Name                | : Wireless Adaptor and 120W Digital Amplifier                                                                                                    |
| Model Number             | : ADAPT+AMP                                                                                                                                      |
| EUT function description | : Please reference user manual of this device                                                                                                    |
| Power supply             | : AC 100-240V,50/60Hz, 120W                                                                                                                      |
| Radio Technology         | : IEEE802.11b/g/n                                                                                                                                |
| FCC Operation frequency  | : IEEE 802.11b: 2412MHz—2462MHz<br>IEEE 802.11g: 2412MHz—2462MHz<br>IEEE 802.11n HT20: 2412MHz—2462MHz<br>IEEE 802.11n HT40:2422MHz—2452MHz      |
| Modulation               | : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) |
| Transmitter rate         | : IEEE 802.11b: 1, 2, 5.5, 11 Mbps<br>IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps<br>IEEE 802.11n HT20: up to 150 Mbps, HT40: up to 300Mbps  |
| Antenna Type             | : Integrated antenna 1:<br>2.4G band maximum PK gain 2.60dBi<br>Integrated antenna 2:<br>2.4G band maximum PK gain 4.20dBi                       |
| Sample Type              | : Series production                                                                                                                              |

Note: EUT is the ab.of equipment under test.

| Channle information |           |    |           |    |           |    |           |
|---------------------|-----------|----|-----------|----|-----------|----|-----------|
| CH                  | Frequency | CH | Frequency | CH | Frequency | CH | Frequency |
| 1                   | 2412      | 5  | 2432      | 9  | 2452      | /  | /         |
| 2                   | 2417      | 6  | 2437      | 10 | 2457      | /  | /         |
| 3                   | 2422      | 7  | 2442      | 11 | 2462      | /  | /         |
| 4                   | 2427      | 8  | 2447      | /  | /         | /  | /         |


### 2.2. Accessories of EUT

| Description of Accessories | Manufacturer | Model number | Serial No. | Other        |
|----------------------------|--------------|--------------|------------|--------------|
| Optical cable              | Harman       | N/A          | N/A        | Length: 1.5m |
| Audio cable                | Harman       | N/A          | N/A        | Length: 0.8m |
| AC cable                   | Harman       | N/A          | N/A        | Length: 1.5m |

### 2.3. Assistant equipment used for test

| Description of Assistant equipment | Manufacturer | Model number or Type | EMC Compliance | SN:               |
|------------------------------------|--------------|----------------------|----------------|-------------------|
| Notebook                           | DELL         | Latitude D610        | FCC DOC        | 00045-534-136-300 |
| Network Cable                      | N/A          | N/A                  | N/A            | Length: 1.5m      |

## 2.4. Block diagram of EUT configuration for test



EUT was connected to control to provided by manufacturer which has a standard LAN PORT connector to connect to Notebook, and the Notebook will run a special test software “The super terminal” provided by manufacturer to control EUT work in Continuous TX mode (>98% duty cycle), and select test channel, wireless mode and data rate.

| Tested mode, channel, and data rate information                                                                                     |                  |                                |           |                 |
|-------------------------------------------------------------------------------------------------------------------------------------|------------------|--------------------------------|-----------|-----------------|
| Mode                                                                                                                                | Setting Tx Power | data rate (Mbps)<br>(see Note) | Channel   | Frequency (MHz) |
| IEEE 802.11b                                                                                                                        | 56               | 11                             | LCH :CH1  | 2412            |
|                                                                                                                                     | 56               | 11                             | MCH: CH6  | 2437            |
|                                                                                                                                     | 56               | 11                             | HCH: CH11 | 2462            |
| IEEE 802.11g                                                                                                                        | 56               | 54                             | LCH :CH1  | 2412            |
|                                                                                                                                     | 56               | 54                             | MCH: CH6  | 2437            |
|                                                                                                                                     | 56               | 54                             | HCH: CH11 | 2462            |
| IEEE 802.11n HT20                                                                                                                   | 56               | MCS 7                          | LCH :CH1  | 2412            |
|                                                                                                                                     | 56               | MCS 7                          | MCH: CH6  | 2437            |
|                                                                                                                                     | 56               | MCS 7                          | HCH: CH11 | 2462            |
| IEEE 802.11n HT40                                                                                                                   | 56               | MCS 7                          | LCH :CH3  | 2422            |
|                                                                                                                                     | 56               | MCS 7                          | MCH: CH6  | 2437            |
|                                                                                                                                     | 54               | MCS 7                          | HCH: CH9  | 2452            |
| Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test. |                  |                                |           |                 |

## 2.5. Deviations of test standard

No Deviation

## 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |           |
|--------------------|-----------|
| Temperature range: | 21-25℃    |
| Humidity range:    | 40-75%    |
| Pressure range:    | 86-106kPa |

## 2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808 Tel: +86-0769-89201699 <http://www.dgddt.com>

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

Designation Number: CN1182; Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

**2.8. Measurement uncertainty**


| Test Item                                                                                                                                     | Uncertainty                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Bandwidth                                                                                                                                     | 1.1%                                           |
| Peak Output Power(Conducted)( Spectrum analyzer)                                                                                              | 0.86dB(10 MHz $\leq$ f < 3.6GHz);              |
|                                                                                                                                               | 1.38dB(3.6GHz $\leq$ f < 8GHz)                 |
| Peak Output Power(Conducted)(Power Sensor)                                                                                                    | 0.74dB                                         |
| Power Spectral Density                                                                                                                        | 0.74dB(10 MHz $\leq$ f < 3.6GHz);              |
|                                                                                                                                               | 1.38dB(3.6GHz $\leq$ f < 8GHz)                 |
| Frequencies Stability                                                                                                                         | 6.7 x 10 <sup>-8</sup> (Antenna couple method) |
|                                                                                                                                               | 5.5 x 10 <sup>-8</sup> (Conducted method)      |
| Conducted spurious emissions                                                                                                                  | 0.86dB(10 MHz $\leq$ f < 3.6GHz);              |
|                                                                                                                                               | 1.40dB(3.6GHz $\leq$ f < 8GHz)                 |
|                                                                                                                                               | 1.66dB(8GHz $\leq$ f < 26GHz)                  |
| Uncertainty for radio frequency (RBW<20KHz)                                                                                                   | 3×10 <sup>-8</sup>                             |
| Temperature                                                                                                                                   | 0.4°C                                          |
| Humidity                                                                                                                                      | 2%                                             |
| Uncertainty for Radiation Emission test<br>(30MHz-1GHz)                                                                                       | 4.70 dB (Antenna Polarize: V)                  |
|                                                                                                                                               | 4.84 dB (Antenna Polarize: H)                  |
| Uncertainty for Radiation Emission test<br>(1GHz-26GHz)                                                                                       | 4.10dB(1-6GHz)                                 |
|                                                                                                                                               | 4.40dB (6GHz-18Gz)                             |
|                                                                                                                                               | 3.54dB (18GHz-26Gz)                            |
| Uncertainty for Power line conduction emission test                                                                                           | 3.32dB (150KHz-30MHz)                          |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |                                                |

### 3. Equipment used during test

| Equipment                                                 | Manufacturer  | Model No.    | Serial No.     | Last Cal.     | Cal. Interval |
|-----------------------------------------------------------|---------------|--------------|----------------|---------------|---------------|
| <b>RF Connected Test (Tonscent RF Measurement System)</b> |               |              |                |               |               |
| Spectrum analyzer                                         | R&S           | FSU26        | 1166.1660.26   | Oct. 23, 2017 | 1 Year        |
| Wideband Radio Communication tester                       | R&S           | CMW500       | 155523         | Oct. 21, 2017 | 1 Year        |
| Vector Signal Generator                                   | Agilent       | E8267D       | MY52098743     | Oct. 23, 2017 | 1 Year        |
| Vector Signal Generator                                   | Agilent       | N5182A       | MY48180737     | Oct. 21, 2017 | 1 Year        |
| Power Sensor                                              | Agilent       | U2021XA      | MY55150010     | Oct. 21, 2017 | 1 Year        |
| Power Sensor                                              | Agilent       | U2021XA      | MY55150011     | Oct. 21, 2017 | 1 Year        |
| DC Power Source                                           | MATRIS        | MPS-3005L-3  | D813058W       | Oct. 21, 2017 | 1 Year        |
| Attenuator                                                | Mini-Circuits | BW-S10W2     | 101109         | Oct. 21, 2017 | 1 Year        |
| RF Cable                                                  | Micable       | C10-01-01-1  | 100309         | Oct. 21, 2017 | 1 Year        |
| Temp&Humi Programmable                                    | ZHIXIANG      | ZXGDJS-150L  | ZX170110-A     | Oct. 21, 2017 | 1Year         |
| Test Software                                             | JS Tonscend   | JS1120-2     | Ver.2.5        | N/A           | N/A           |
| USB Data acquisition                                      | Agilent       | U2531A       | TW55043503     | N/A           | N/A           |
| Auto control Unit                                         | JS Tonscend   | JS0806-2     | 158060010      | N/A           | N/A           |
| <b>Radiated Emission Test</b>                             |               |              |                |               |               |
| EMI Test Receiver                                         | R&S           | ESU8         | 100316         | Oct. 21, 2017 | 1 Year        |
| Spectrum analyzer                                         | R&S           | FSU26        | 1166.1660.26   | Oct. 21, 2017 | 1 Year        |
| Trilog Broadband Antenna                                  | Schwarzbeck   | VULB9163     | 9163-462       | Oct. 21, 2017 | 1 Year        |
| Active Loop antenna                                       | Schwarzbeck   | FMZB-1519    | 1519-038       | Oct. 21, 2017 | 1 Year        |
| Broadband Horn antenna                                    | Schwarzbeck   | BBHA 9170    | BBHA 9170 #790 | Aug. 11, 2017 | 1 Year        |
| Double Ridged Horn Antenna                                | R&S           | HF907        | 100276         | Oct. 21, 2017 | 1 Year        |
| Pre-amplifier                                             | A.H.          | PAM-0118     | 360            | Oct. 21, 2017 | 1 Year        |
| RF Cable                                                  | HUBSER        | CP-X2        | W11.03         | Oct. 21, 2017 | 1 Year        |
| RF Cable                                                  | HUBSER        | CP-X1        | W12.02         | Oct. 21, 2017 | 1 Year        |
| MI Cable                                                  | HUBSER        | C10-01-01-1M | 1091629        | Oct. 21, 2017 | 1 Year        |
| Test software                                             | Audix         | E3           | V 6.11111b     | N/A           | N/A           |
| <b>Power Line Conducted Emissions Test</b>                |               |              |                |               |               |
| Test Receiver                                             | R&S           | ESU8         | 100316         | Oct. 21, 2017 | 1 Year        |
| LISN 1                                                    | R&S           | ENV216       | 101109         | Oct. 21, 2017 | 1 Year        |
| LISN 2                                                    | R&S           | ESH2-Z5      | 100309         | Oct. 21, 2017 | 1 Year        |
| Pulse Limiter                                             | R&S           | ESH3-Z2      | 101242         | Oct. 21, 2017 | 1 Year        |
| CE Cable 1                                                | HUBSER        | ESU8/RF2     | W10.01         | Oct. 21, 2017 | 1 Year        |
| Test software                                             | Audix         | E3           | V 6.11111b     | N/A           | N/A           |

## 4. 6dB Bandwidth and 99% Bandwidth

### 4.1. Block diagram of test setup

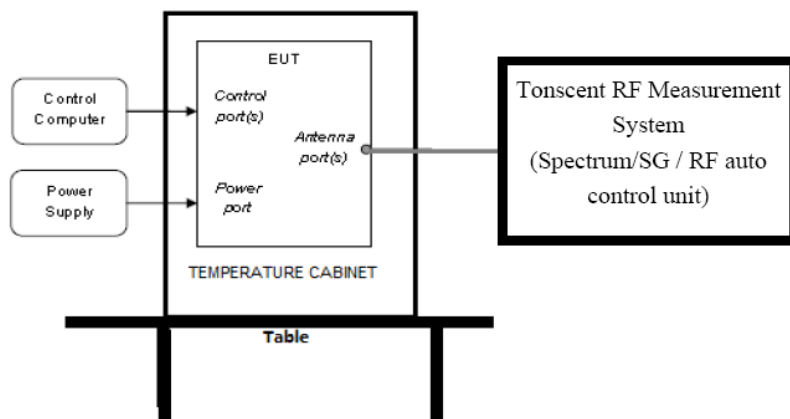

### 4.2. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 KHz

### 4.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

|                |          |
|----------------|----------|
| RBW:           | 100KHz   |
| VBW:           | 300KHz   |
| Detector Mode: | Peak     |
| Sweep time:    | auto     |
| Trace mode     | Max hold |

(3) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 4.4. Test Result

6dB Bandwidth:

| Test Mode | Test Channel | Ant  | EBW[MHz] | Limit | Verdict |
|-----------|--------------|------|----------|-------|---------|
| 11BMIMO   | 2412         | Ant1 | 8.600    | 0.5   | PASS    |
| 11BMIMO   | 2412         | Ant2 | 8.120    | 0.5   | PASS    |
| 11BMIMO   | 2437         | Ant1 | 8.280    | 0.5   | PASS    |
| 11BMIMO   | 2437         | Ant2 | 9.360    | 0.5   | PASS    |
| 11BMIMO   | 2462         | Ant1 | 9.480    | 0.5   | PASS    |
| 11BMIMO   | 2462         | Ant2 | 7.840    | 0.5   | PASS    |

|           |      |      |        |     |      |
|-----------|------|------|--------|-----|------|
| 11GMIMO   | 2412 | Ant1 | 16.200 | 0.5 | PASS |
| 11GMIMO   | 2412 | Ant2 | 16.440 | 0.5 | PASS |
| 11GMIMO   | 2437 | Ant1 | 16.120 | 0.5 | PASS |
| 11GMIMO   | 2437 | Ant2 | 16.520 | 0.5 | PASS |
| 11GMIMO   | 2462 | Ant1 | 16.120 | 0.5 | PASS |
| 11GMIMO   | 2462 | Ant2 | 16.200 | 0.5 | PASS |
| 11N20MIMO | 2412 | Ant1 | 17.680 | 0.5 | PASS |
| 11N20MIMO | 2412 | Ant2 | 17.600 | 0.5 | PASS |
| 11N20MIMO | 2437 | Ant1 | 17.760 | 0.5 | PASS |
| 11N20MIMO | 2437 | Ant2 | 17.760 | 0.5 | PASS |
| 11N20MIMO | 2462 | Ant1 | 17.480 | 0.5 | PASS |
| 11N20MIMO | 2462 | Ant2 | 17.400 | 0.5 | PASS |
| 11N40MIMO | 2422 | Ant1 | 36.560 | 0.5 | PASS |
| 11N40MIMO | 2422 | Ant2 | 36.560 | 0.5 | PASS |
| 11N40MIMO | 2437 | Ant1 | 36.480 | 0.5 | PASS |
| 11N40MIMO | 2437 | Ant2 | 36.560 | 0.5 | PASS |
| 11N40MIMO | 2452 | Ant1 | 35.840 | 0.5 | PASS |
| 11N40MIMO | 2452 | Ant2 | 35.920 | 0.5 | PASS |


99% bandwidth:

| Test Mode | Test Channel | Ant  | OBW[MHz] | Limit[MHz] | Verdict |
|-----------|--------------|------|----------|------------|---------|
| 11BMIMO   | 2412         | Ant1 | 11.520   | ---        | PASS    |
| 11BMIMO   | 2412         | Ant2 | 11.440   | ---        | PASS    |
| 11BMIMO   | 2437         | Ant1 | 11.640   | ---        | PASS    |
| 11BMIMO   | 2437         | Ant2 | 11.600   | ---        | PASS    |
| 11BMIMO   | 2462         | Ant1 | 11.640   | ---        | PASS    |
| 11BMIMO   | 2462         | Ant2 | 11.520   | ---        | PASS    |
| 11GMIMO   | 2412         | Ant1 | 16.440   | ---        | PASS    |
| 11GMIMO   | 2412         | Ant2 | 16.440   | ---        | PASS    |
| 11GMIMO   | 2437         | Ant1 | 16.480   | ---        | PASS    |
| 11GMIMO   | 2437         | Ant2 | 16.520   | ---        | PASS    |
| 11GMIMO   | 2462         | Ant1 | 16.520   | ---        | PASS    |
| 11GMIMO   | 2462         | Ant2 | 16.480   | ---        | PASS    |
| 11N20MIMO | 2412         | Ant1 | 17.680   | ---        | PASS    |
| 11N20MIMO | 2412         | Ant2 | 17.680   | ---        | PASS    |
| 11N20MIMO | 2437         | Ant1 | 17.760   | ---        | PASS    |
| 11N20MIMO | 2437         | Ant2 | 17.720   | ---        | PASS    |
| 11N20MIMO | 2462         | Ant1 | 17.760   | ---        | PASS    |
| 11N20MIMO | 2462         | Ant2 | 17.680   | ---        | PASS    |
| 11N40MIMO | 2422         | Ant1 | 36.320   | ---        | PASS    |

|           |      |      |        |     |      |
|-----------|------|------|--------|-----|------|
| 11N40MIMO | 2422 | Ant2 | 36.240 | --- | PASS |
| 11N40MIMO | 2437 | Ant1 | 36.240 | --- | PASS |
| 11N40MIMO | 2437 | Ant2 | 36.240 | --- | PASS |
| 11N40MIMO | 2452 | Ant1 | 36.080 | --- | PASS |
| 11N40MIMO | 2452 | Ant2 | 36.080 | --- | PASS |


6dB Bandwidth:

6dB Bandwidth\_11N20MIMO\_2437\_Ant1

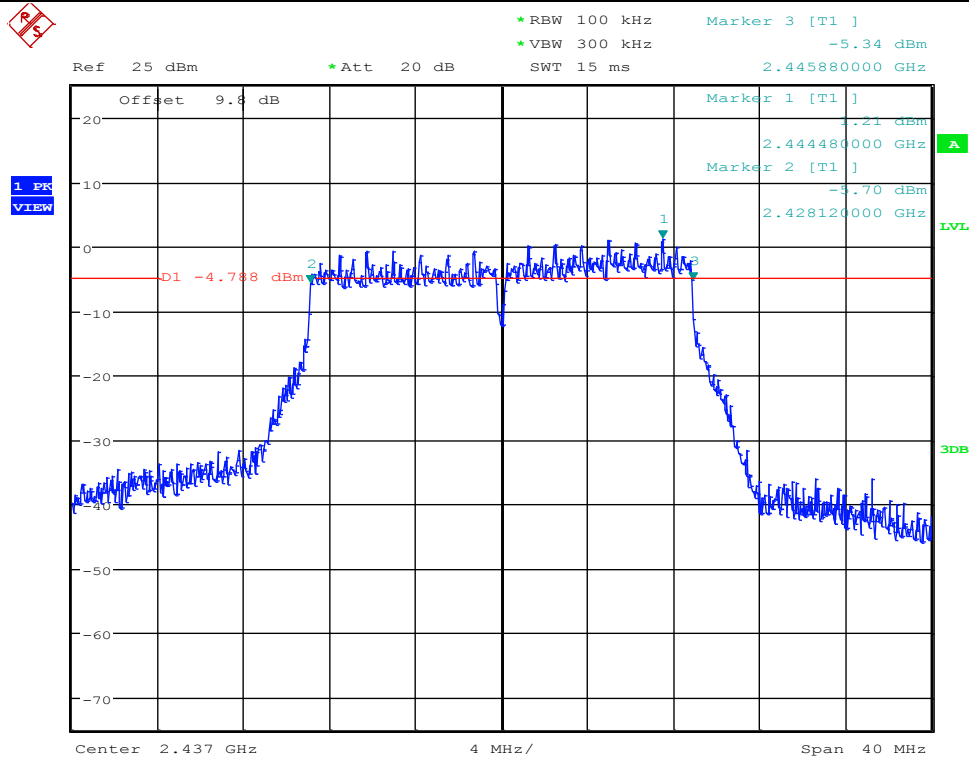


Date: 13.OCT.2017 18:32:35

6dB Bandwidth\_11N20MIMO\_2437\_Ant2

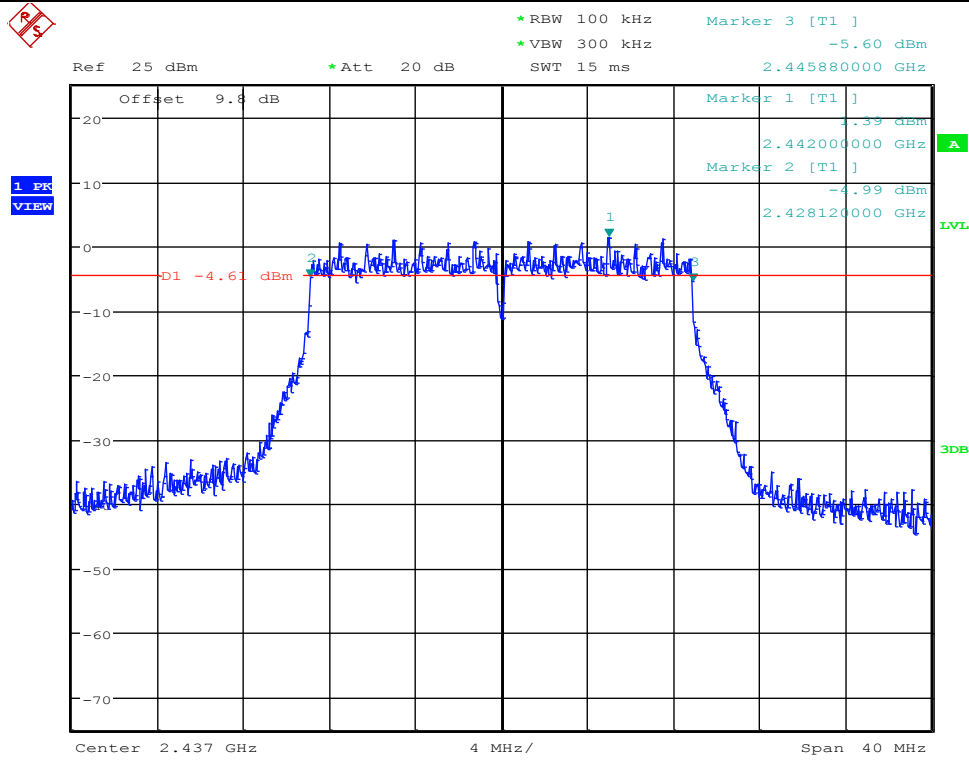


Date: 13.OCT.2017 18:34:07

6dB Bandwidth\_11N20MIMO\_2462\_Ant1

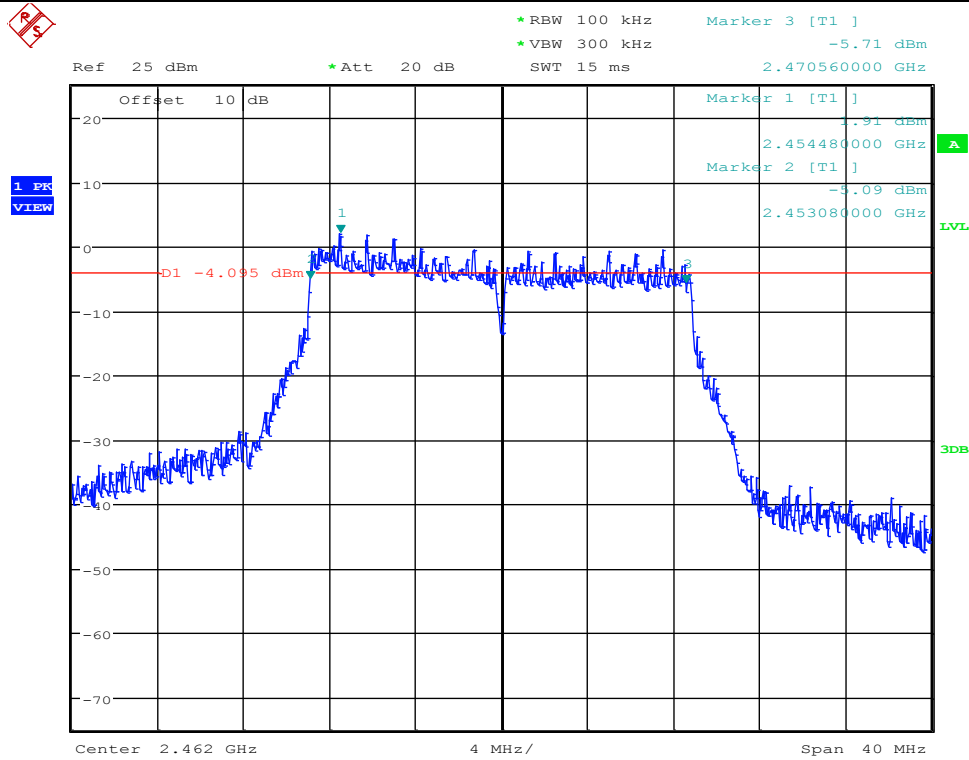

Date: 13.OCT.2017 18:36:26

6dB Bandwidth\_11N20MIMO\_2462\_Ant2

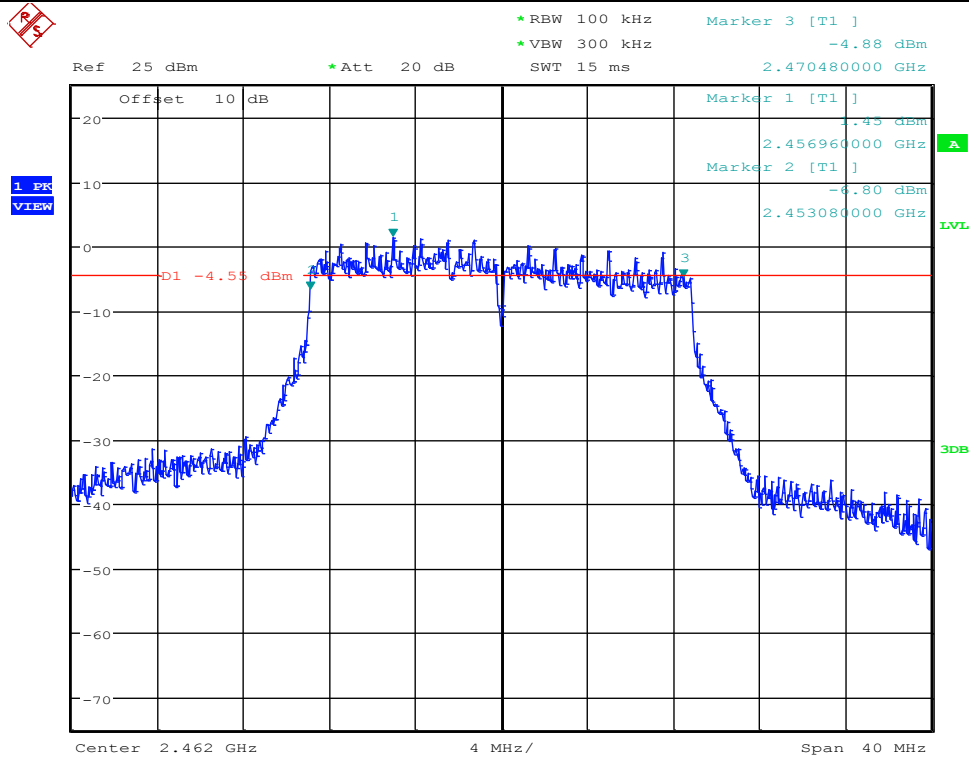


Date: 13.OCT.2017 18:38:56








6dB Bandwidth\_11GMIMO\_2412\_Ant1

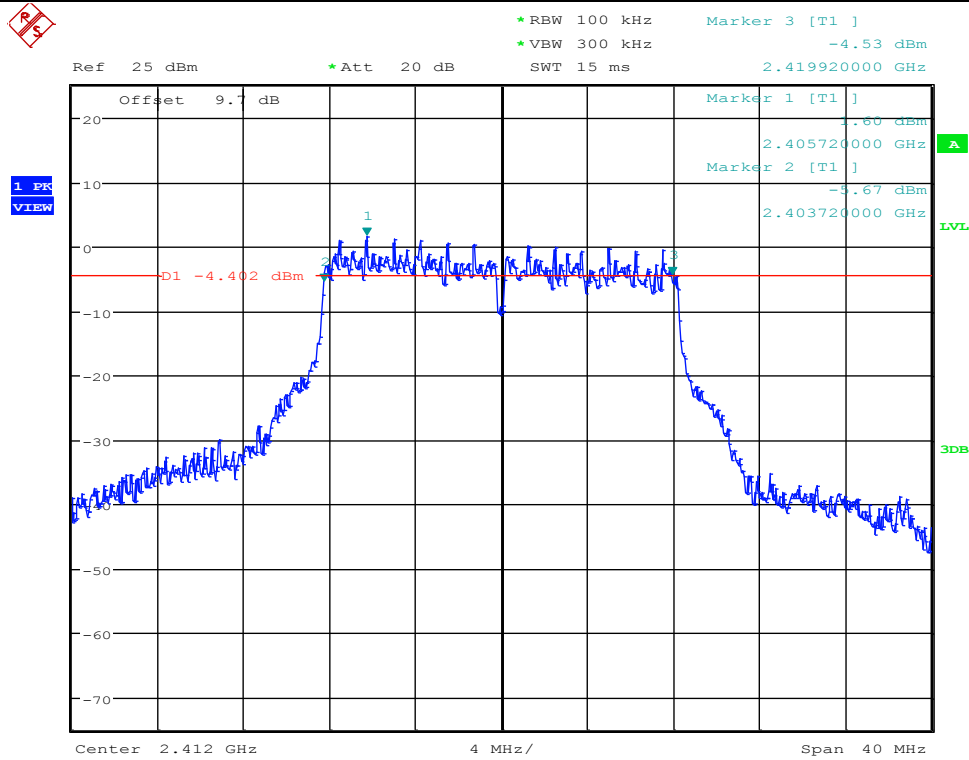


Date: 13.OCT.2017 16:49:40

6dB Bandwidth\_11BMIMO\_2412\_Ant1

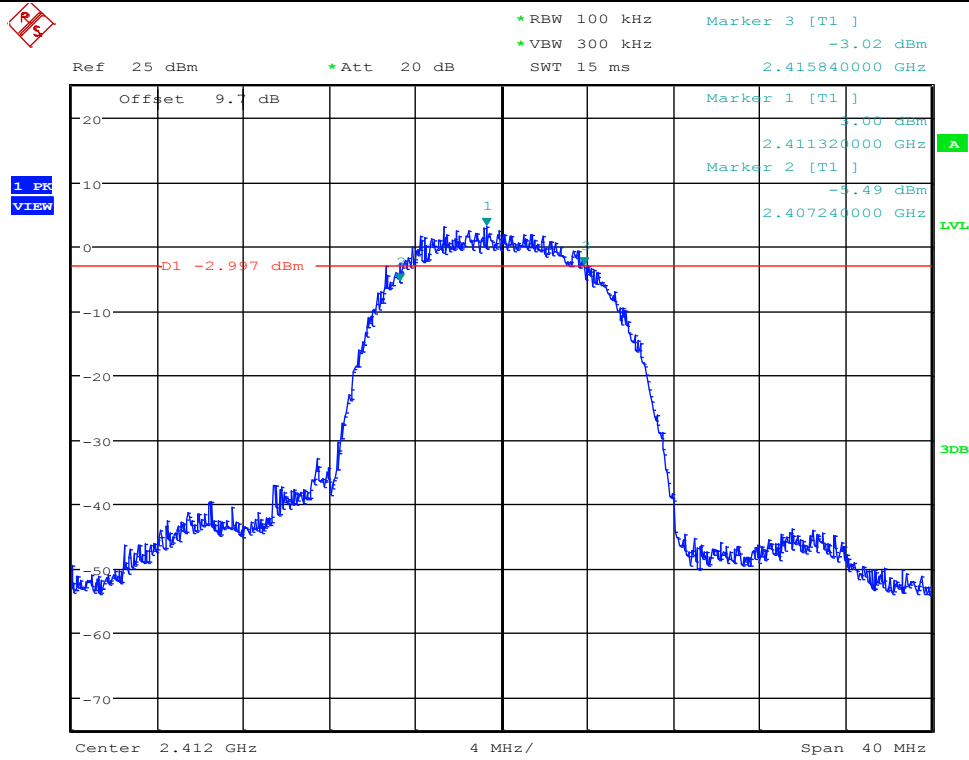


Date: 13.OCT.2017 16:28:03

6dB Bandwidth\_11GMIMO\_2412\_Ant2

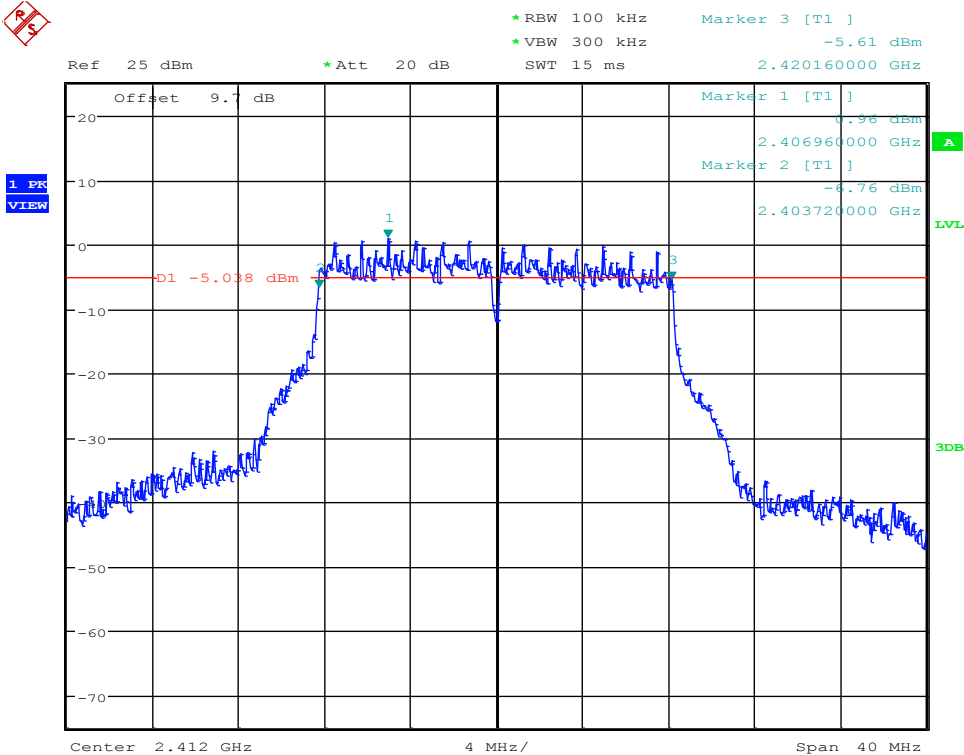


Date: 13.OCT.2017 16:52:08

6dB Bandwidth\_11BMIMO\_2412\_Ant2

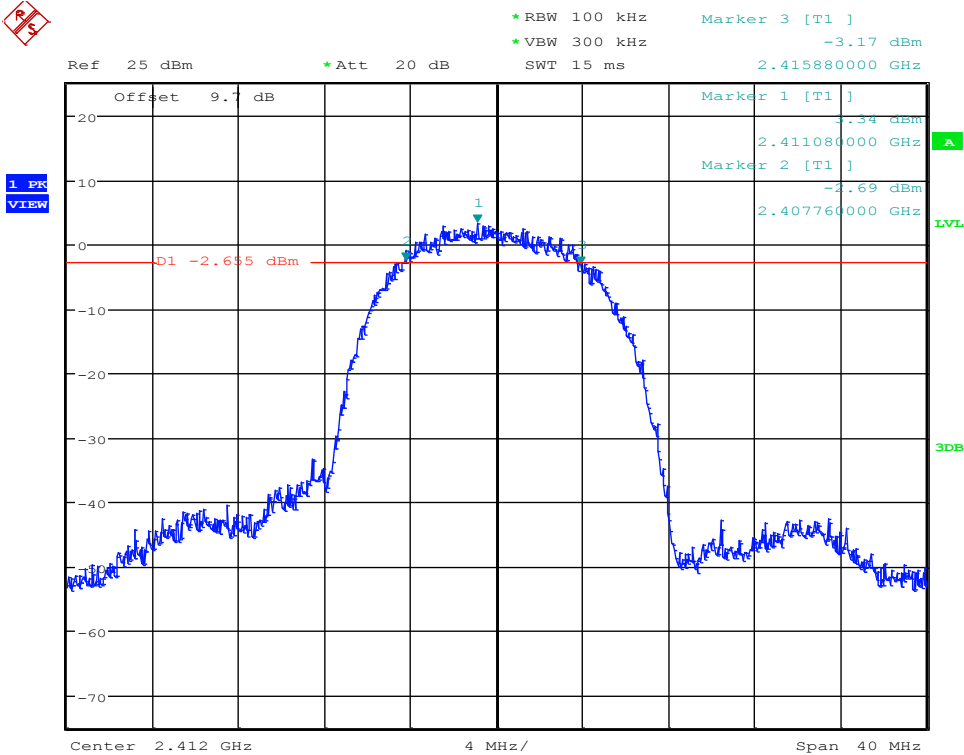


Date: 13.OCT.2017 16:30:32

6dB Bandwidth\_11GMIMO\_2437\_Ant1

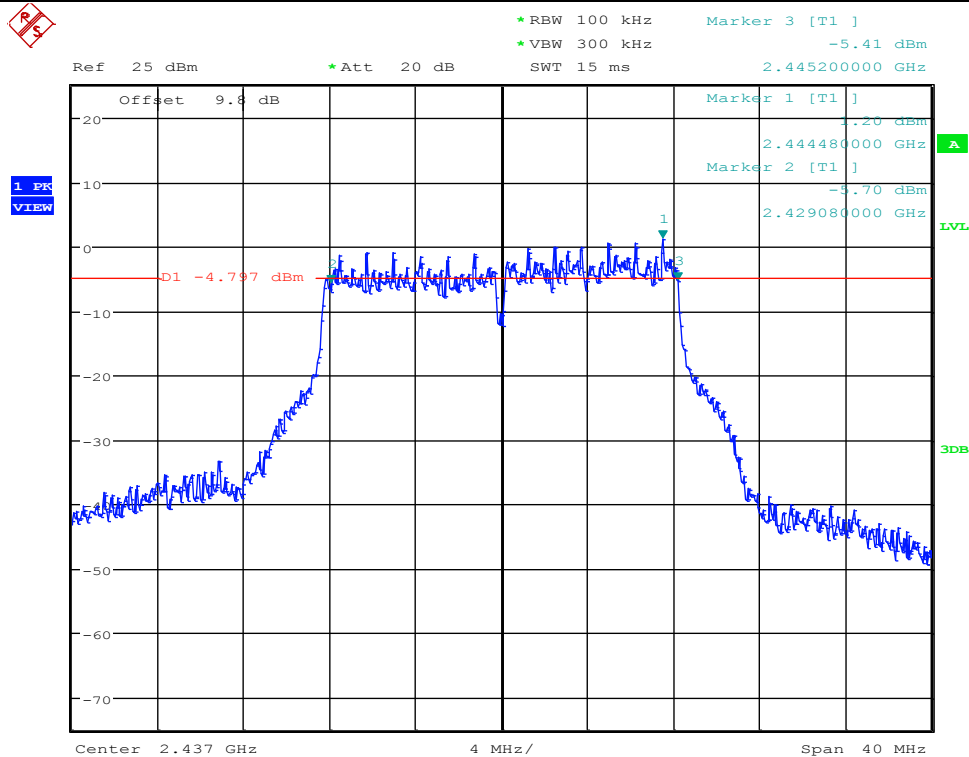


Date: 13.OCT.2017 16:59:15

6dB Bandwidth\_11BMIMO\_2437\_Ant1

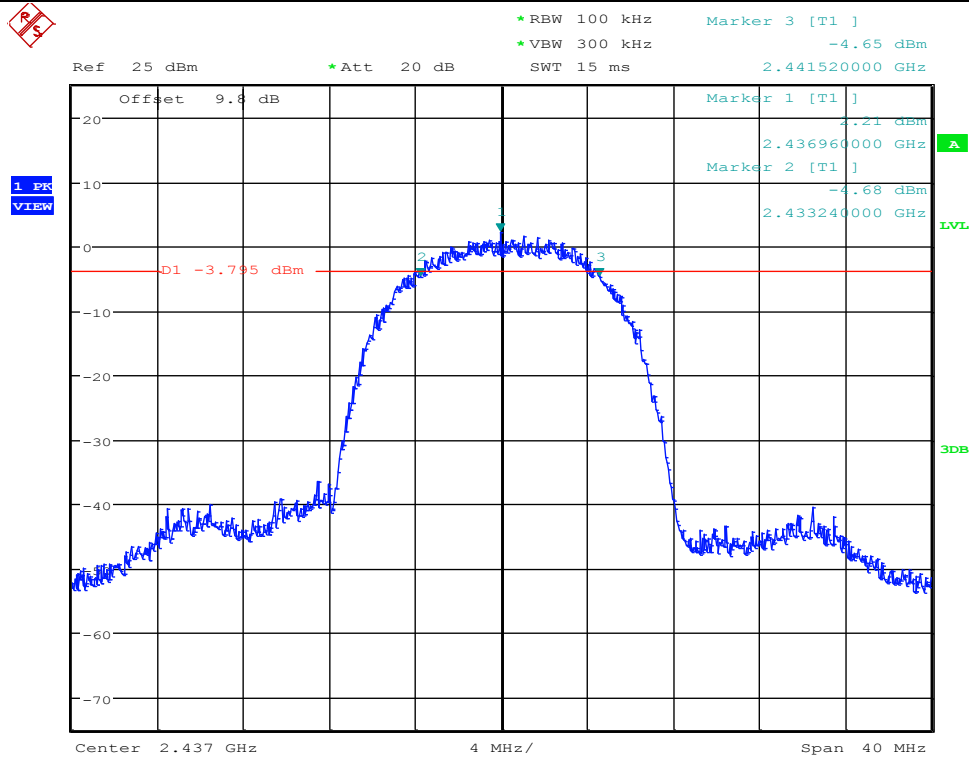


Date: 13.OCT.2017 16:38:40

6dB Bandwidth\_11GMIMO\_2437\_Ant2

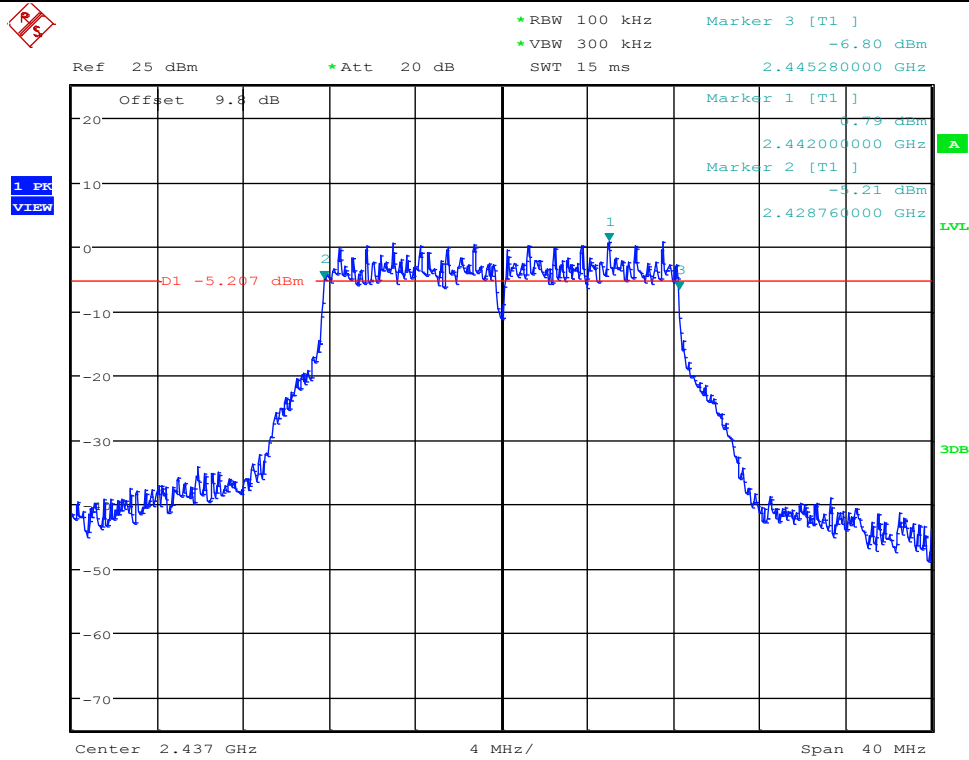


Date: 13.OCT.2017 17:00:47

6dB Bandwidth\_11BMIMO\_2437\_Ant2

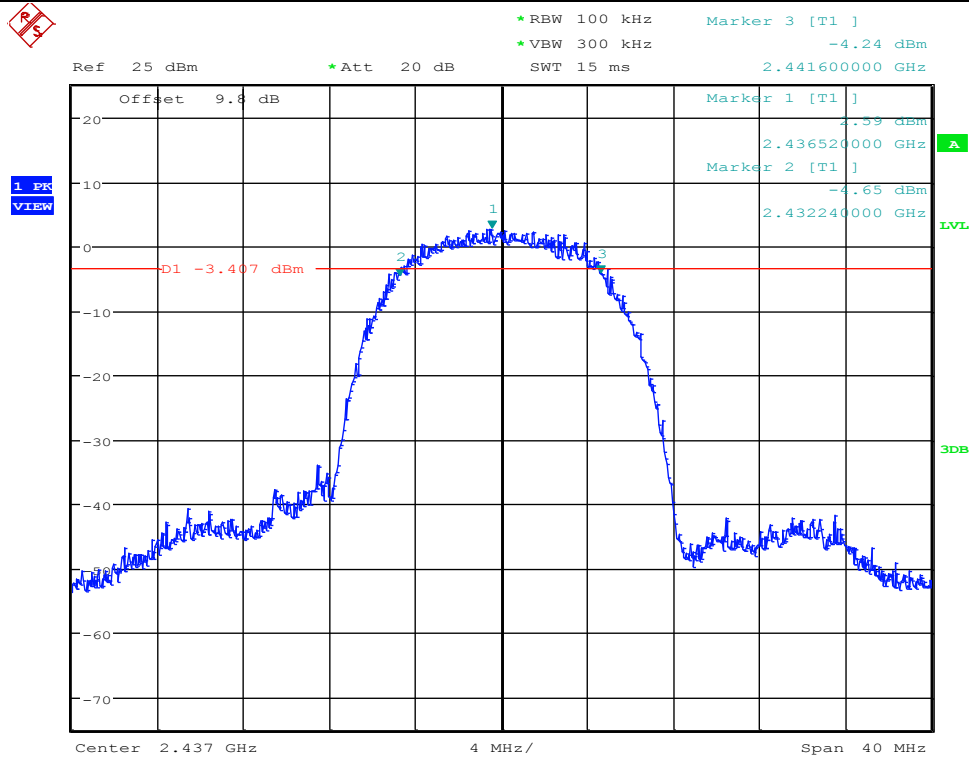


Date: 13.OCT.2017 16:40:13

6dB Bandwidth\_11BMIMO\_2462\_Ant1

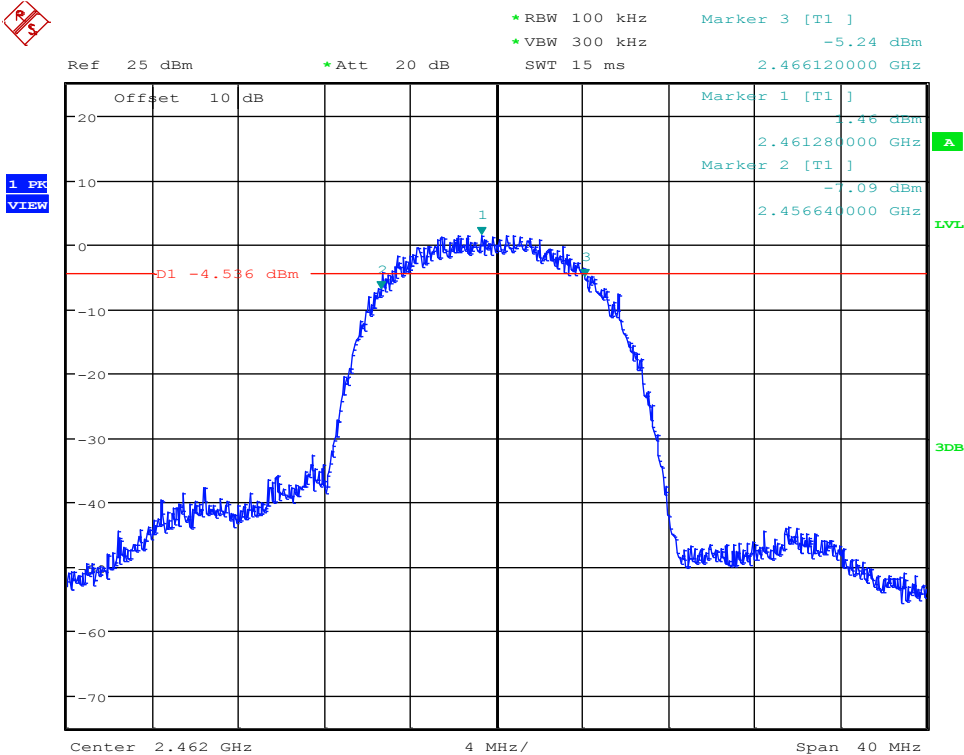


Date: 13.OCT.2017 16:42:46

6dB Bandwidth\_11GMIMO\_2462\_Ant1

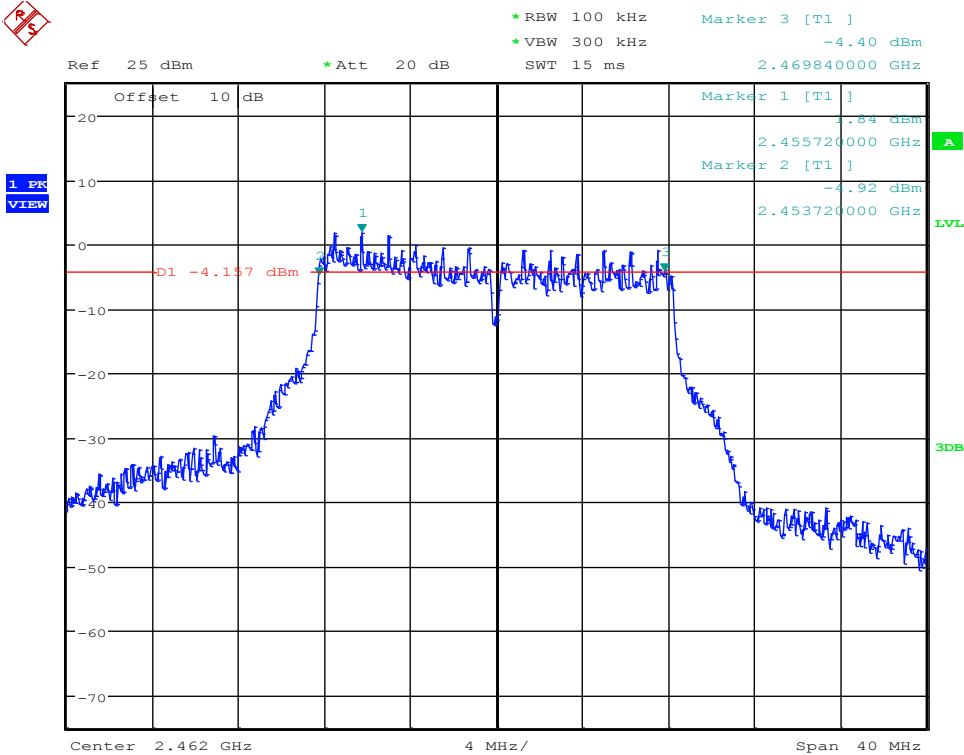


Date: 13.OCT.2017 17:40:02

6dB Bandwidth\_11BMIMO\_2462\_Ant2

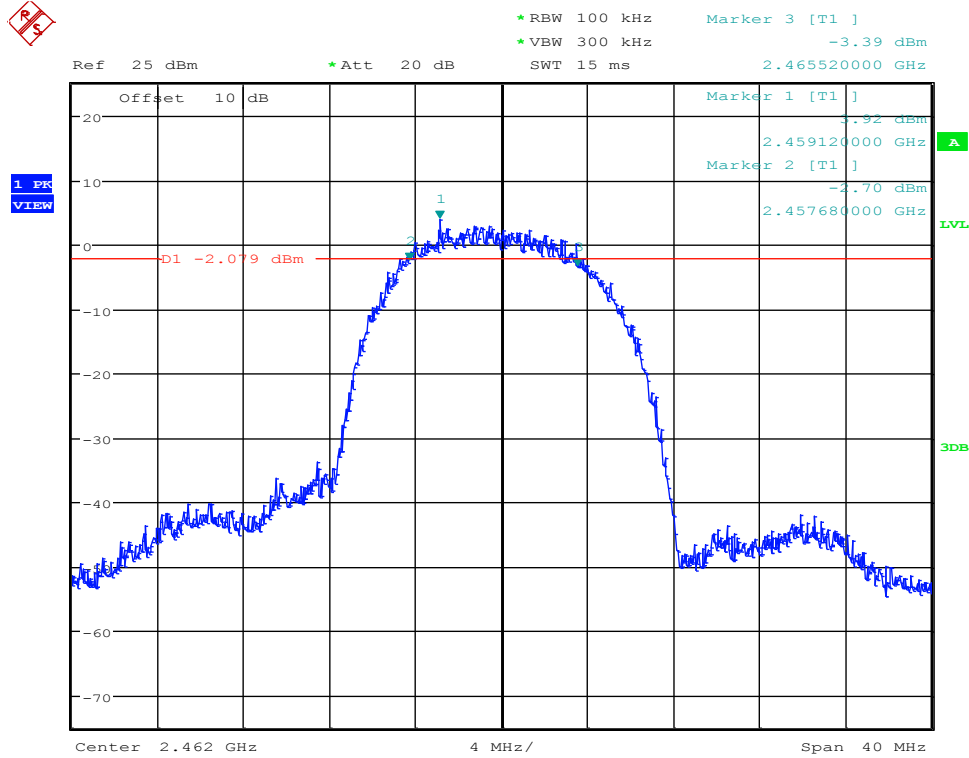


Date: 13.OCT.2017 16:45:15

6dB Bandwidth\_11GMIMO\_2462\_Ant2

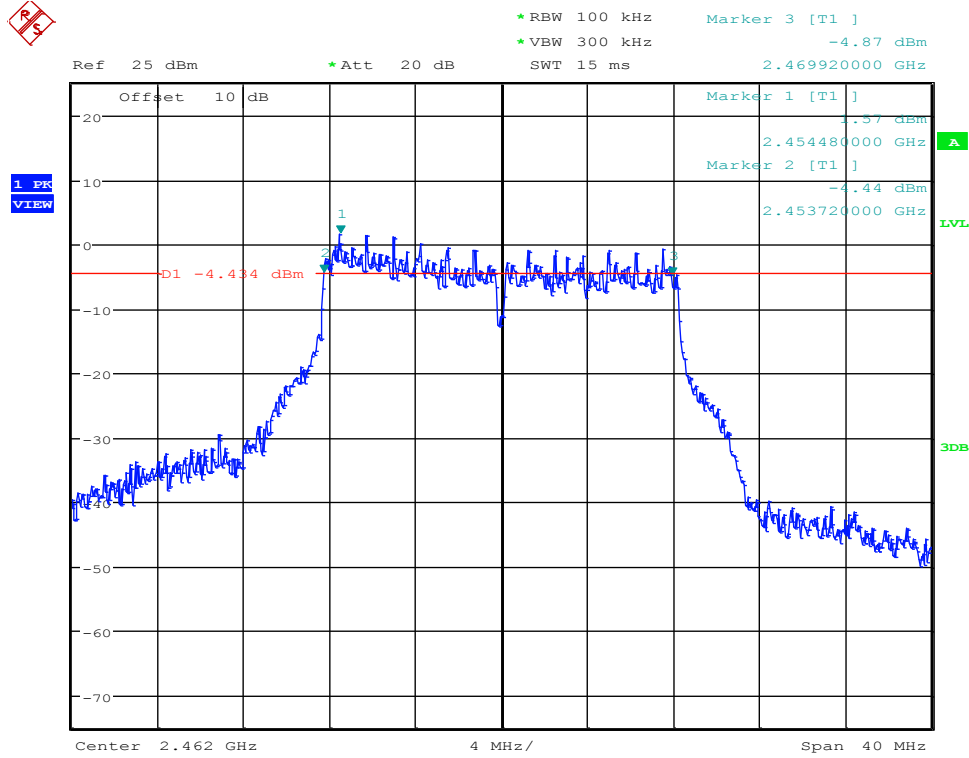


Date: 13.OCT.2017 17:42:32

Occupied Bandwidth\_11N20MIMO\_2412\_Ant1




Date: 13.OCT.2017 17:48:30

Occupied Bandwidth\_11N20MIMO\_2437\_Ant1

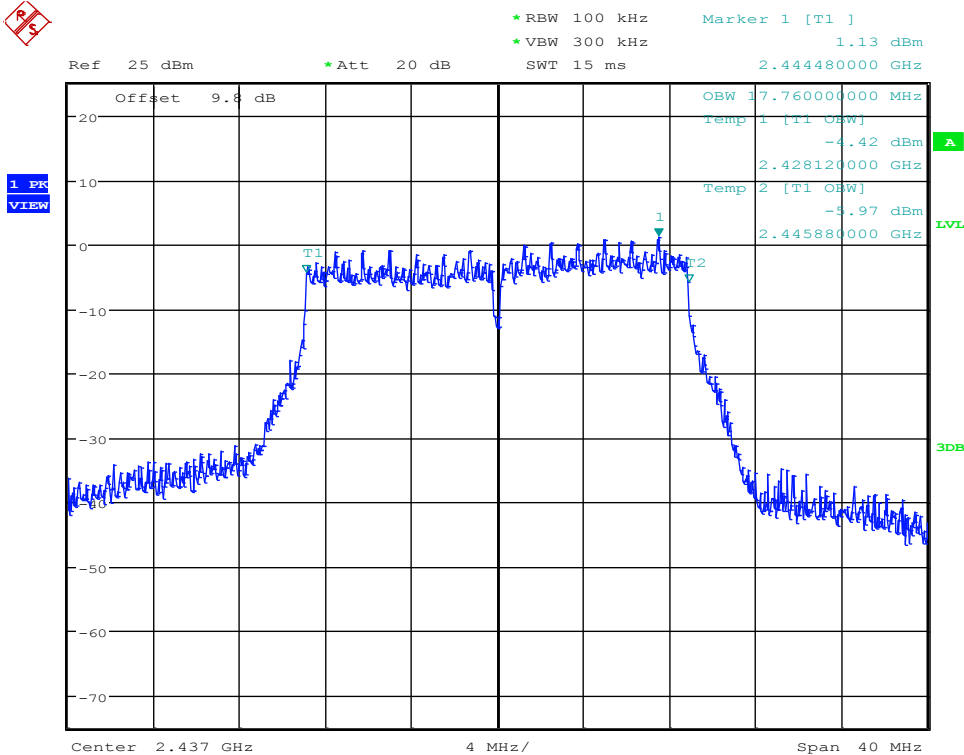


Date: 13.OCT.2017 18:32:53

Occupied Bandwidth\_11N20MIMO\_2437\_Ant2

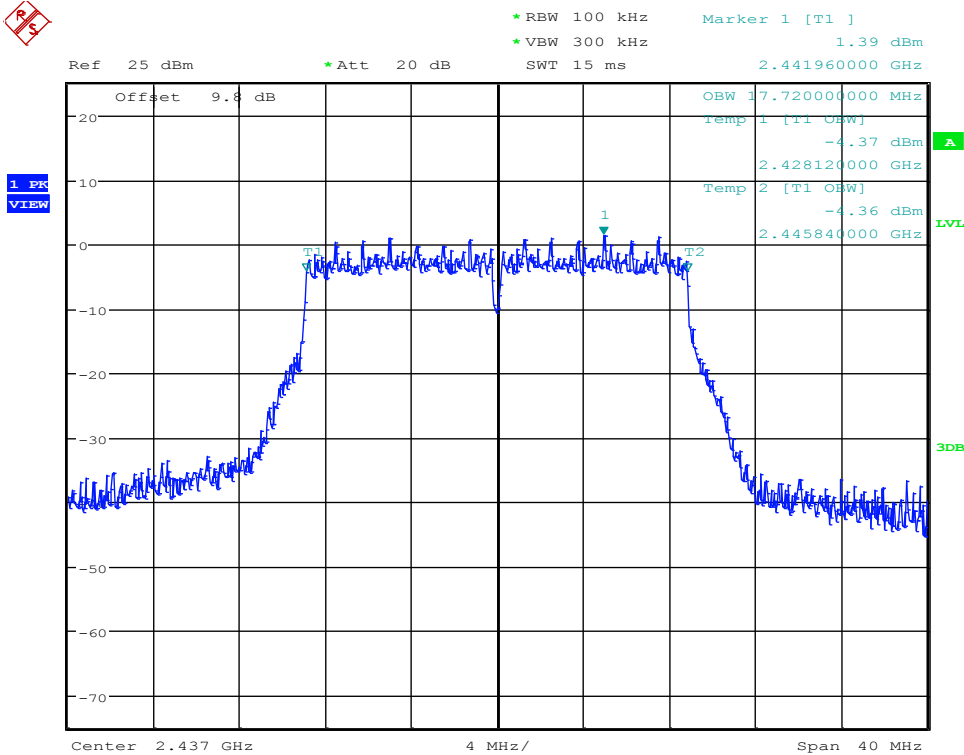


Date: 13.OCT.2017 18:34:26

Occupied Bandwidth\_11N20MIMO\_2462\_Ant1

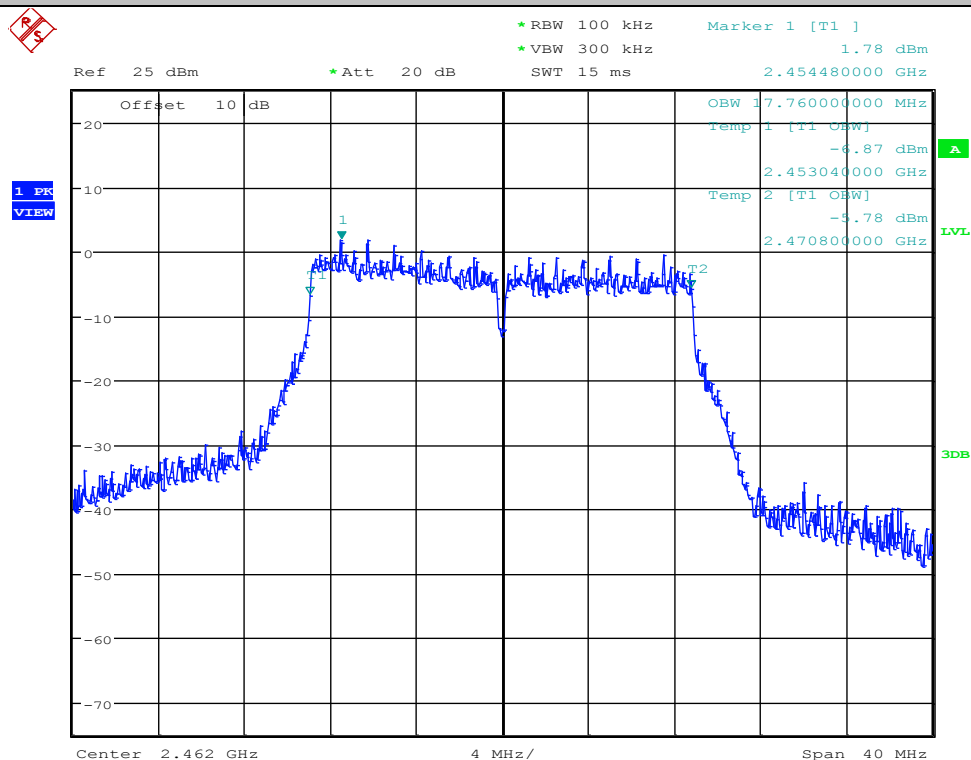


Date: 13.OCT.2017 18:36:44

Occupied Bandwidth\_11N20MIMO\_2462\_Ant2

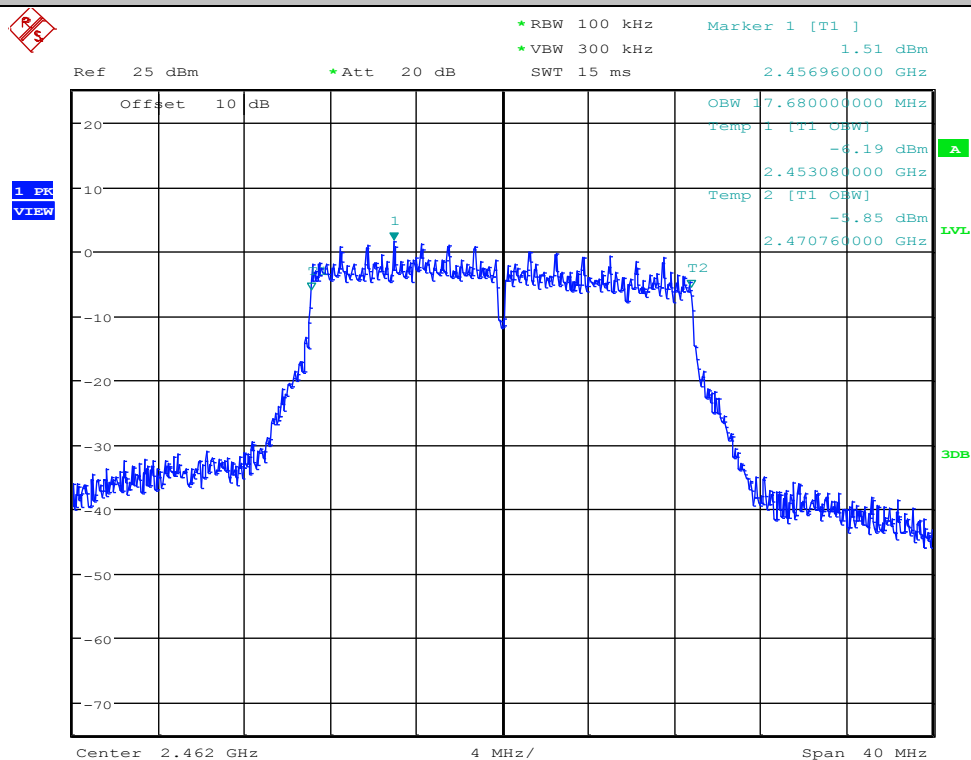


Date: 13.OCT.2017 18:39:14

Occupied Bandwidth\_11N40MIMO\_2422\_Ant1

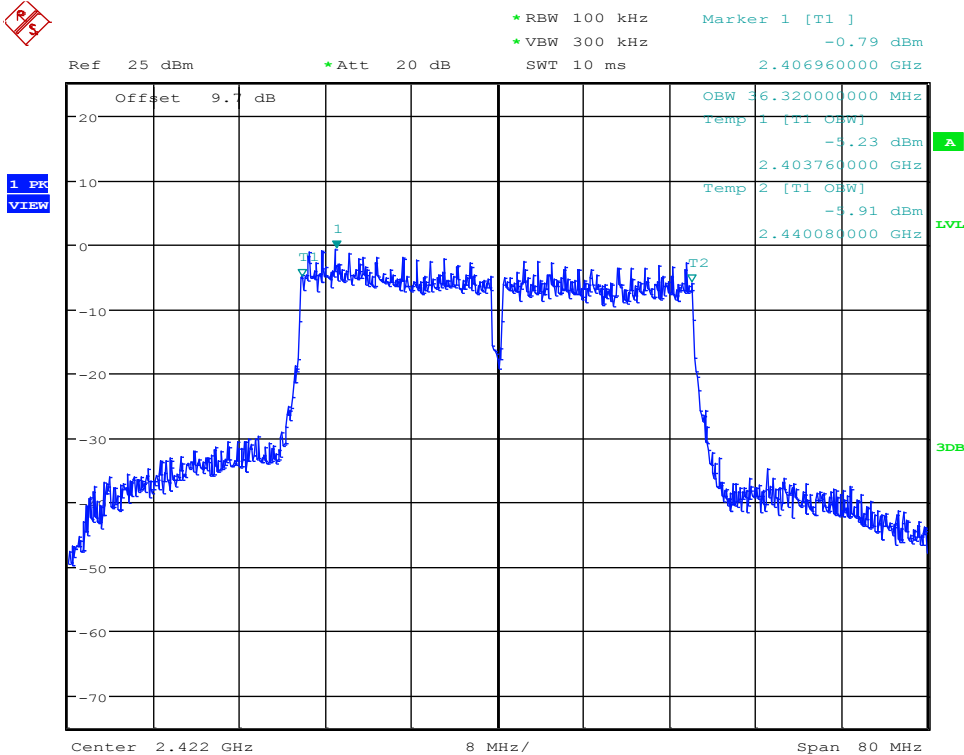


Date: 13.OCT.2017 18:42:48

Occupied Bandwidth\_11N40MIMO\_2422\_Ant2

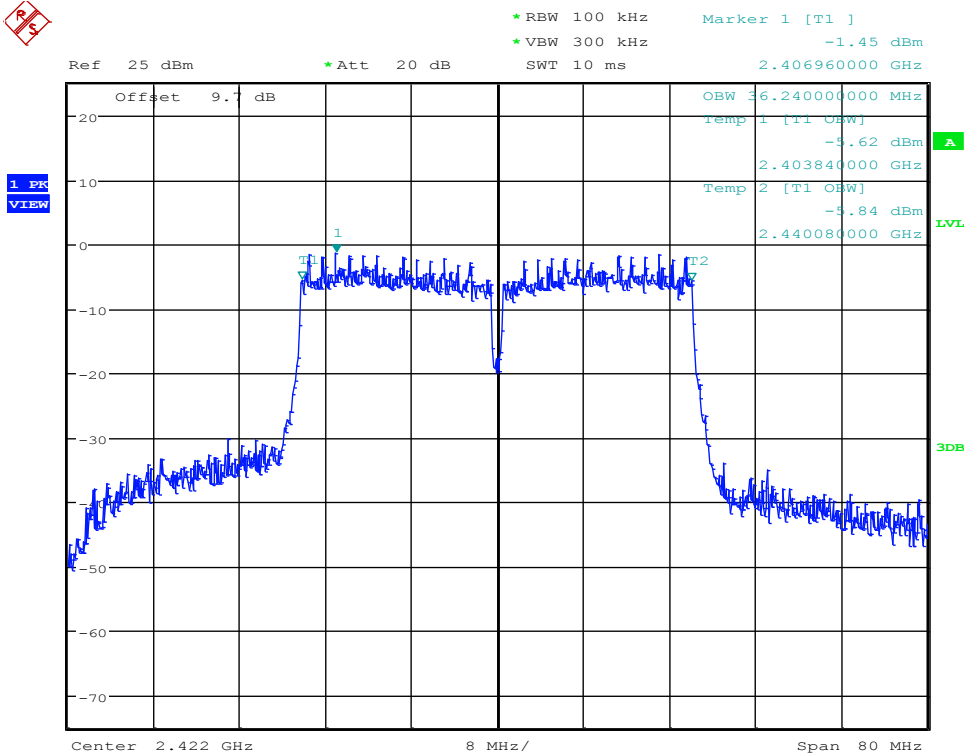


Date: 13.OCT.2017 18:45:18

Occupied Bandwidth\_11N40MIMO\_2437\_Ant1

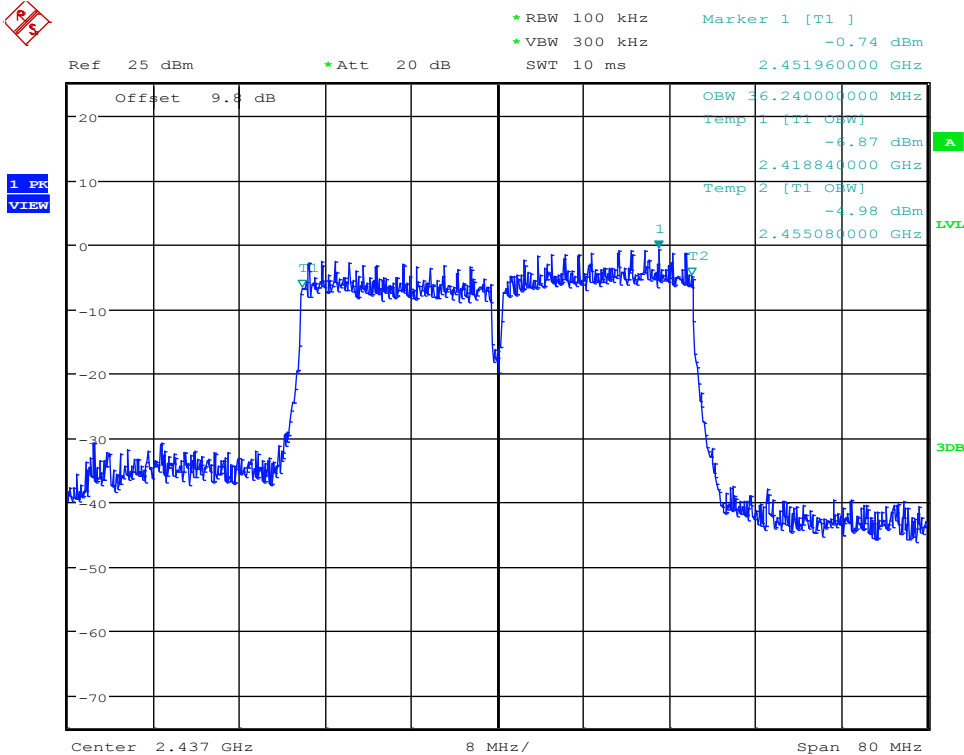


Date: 13.OCT.2017 18:48:27

Occupied Bandwidth\_11N40MIMO\_2437\_Ant2

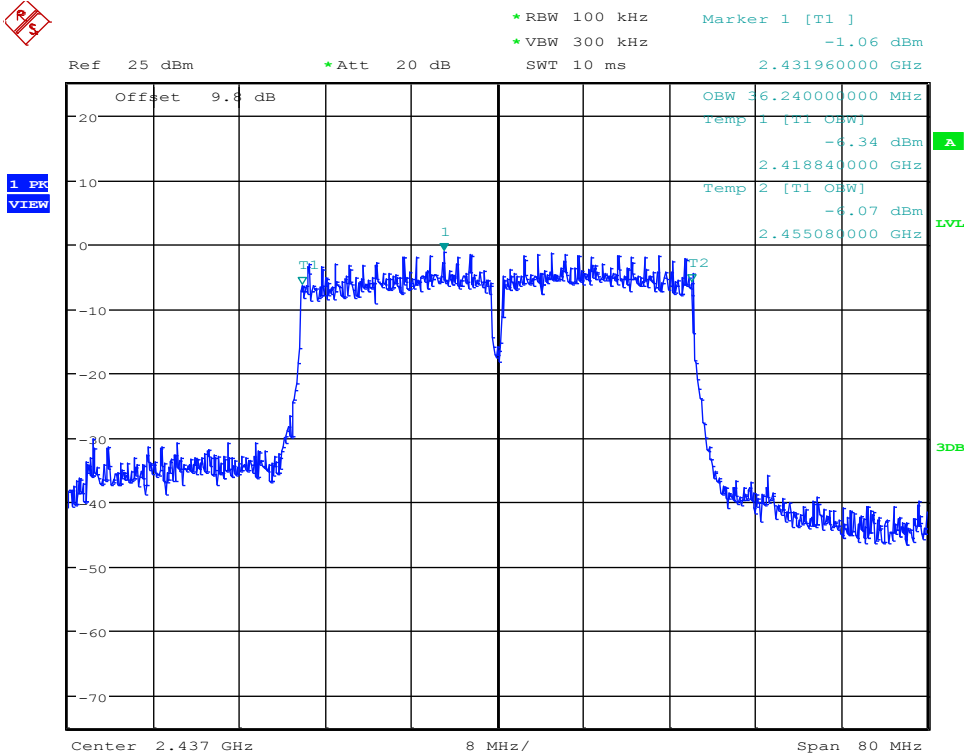


Date: 13.OCT.2017 18:49:59

Occupied Bandwidth\_11N40MIMO\_2452\_Ant1

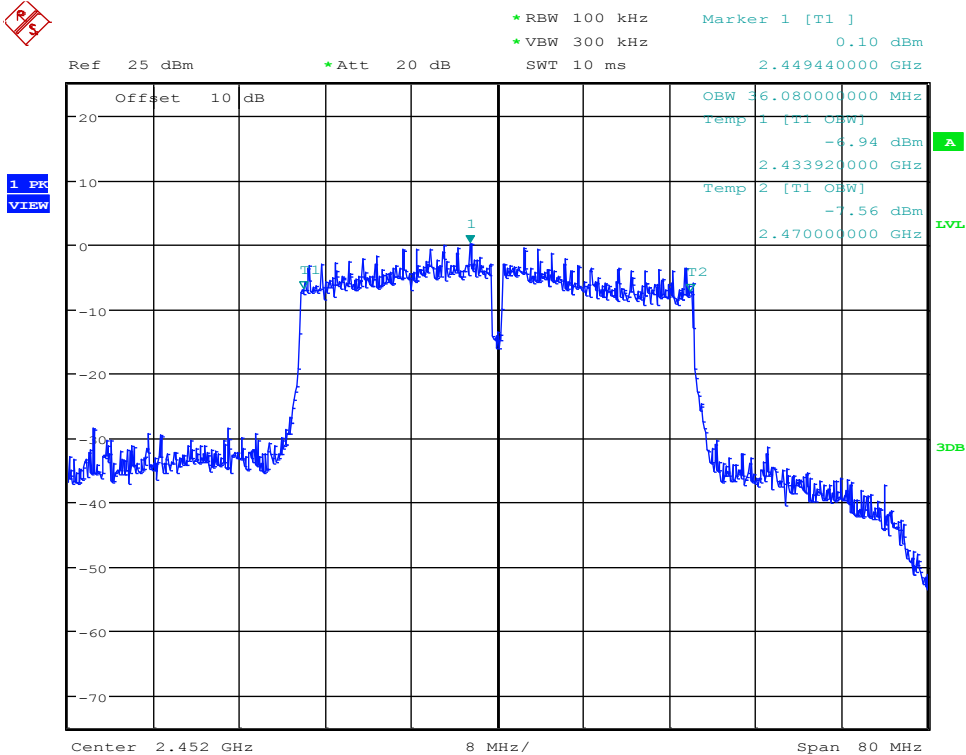

Date: 13.OCT.2017 18:52:43


Occupied Bandwidth\_11N40MIMO\_2452\_Ant2

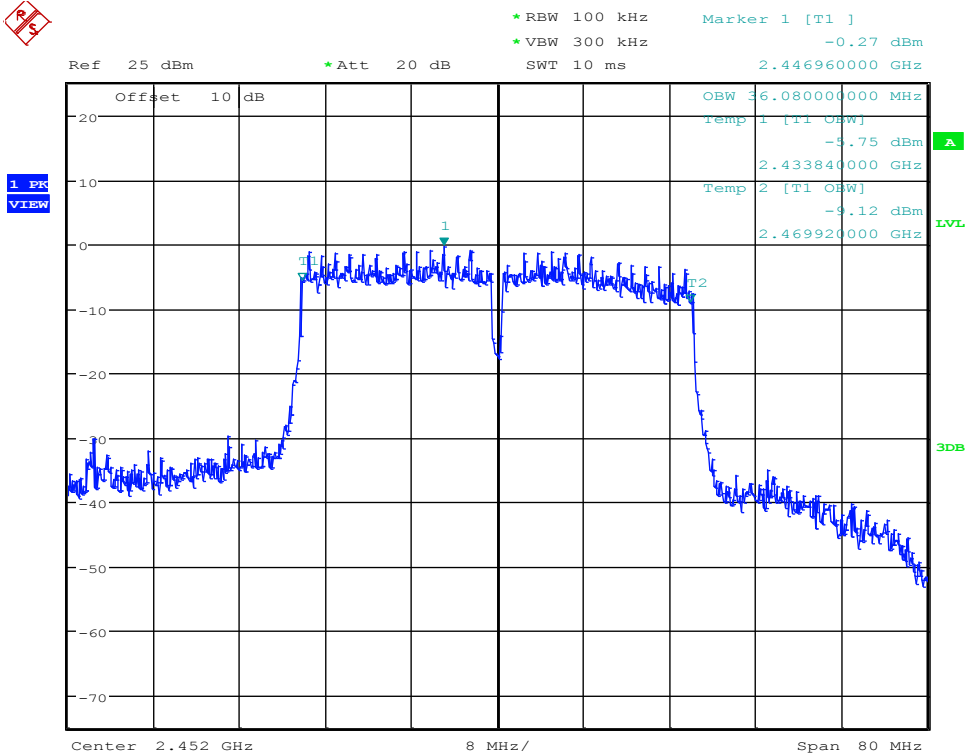

Date: 13.OCT.2017 18:55:13




Occupied Bandwidth\_11GMIMO\_2412\_Ant2

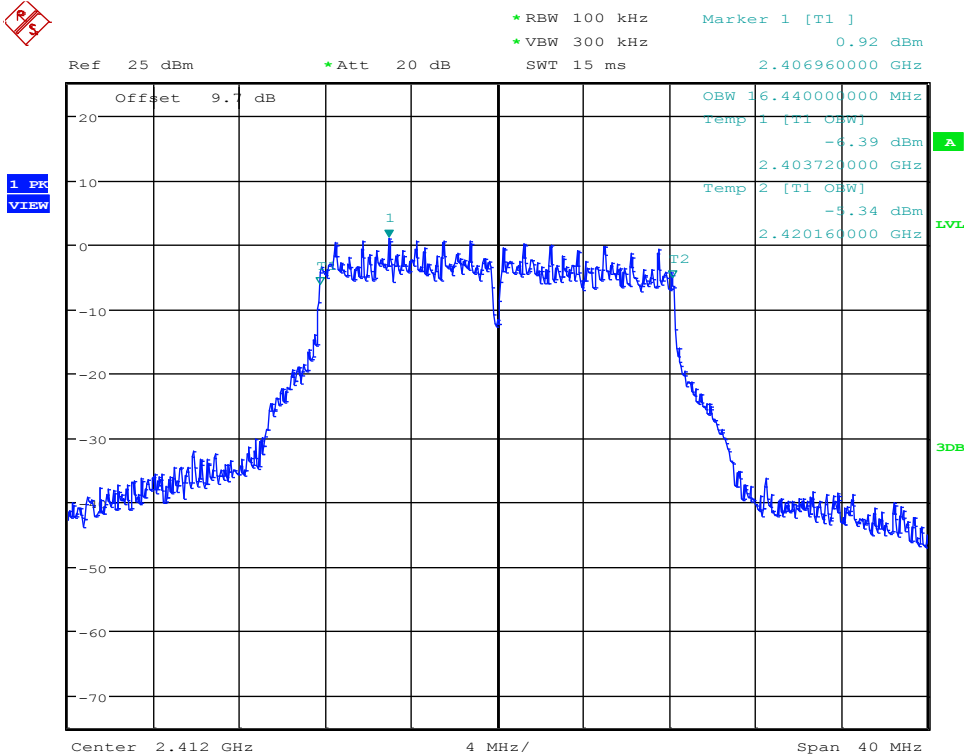

Date: 13.OCT.2017 16:52:26


Occupied Bandwidth\_11BMIMO\_2412\_Ant2

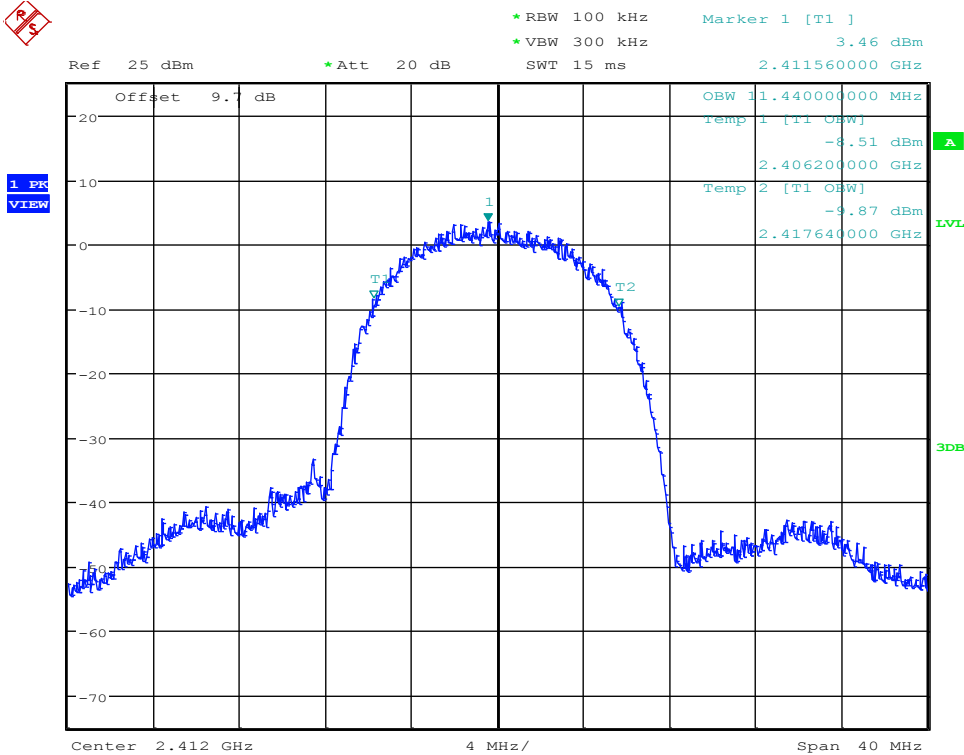

Date: 13.OCT.2017 16:30:50




Occupied Bandwidth\_11GMIMO\_2437\_Ant2

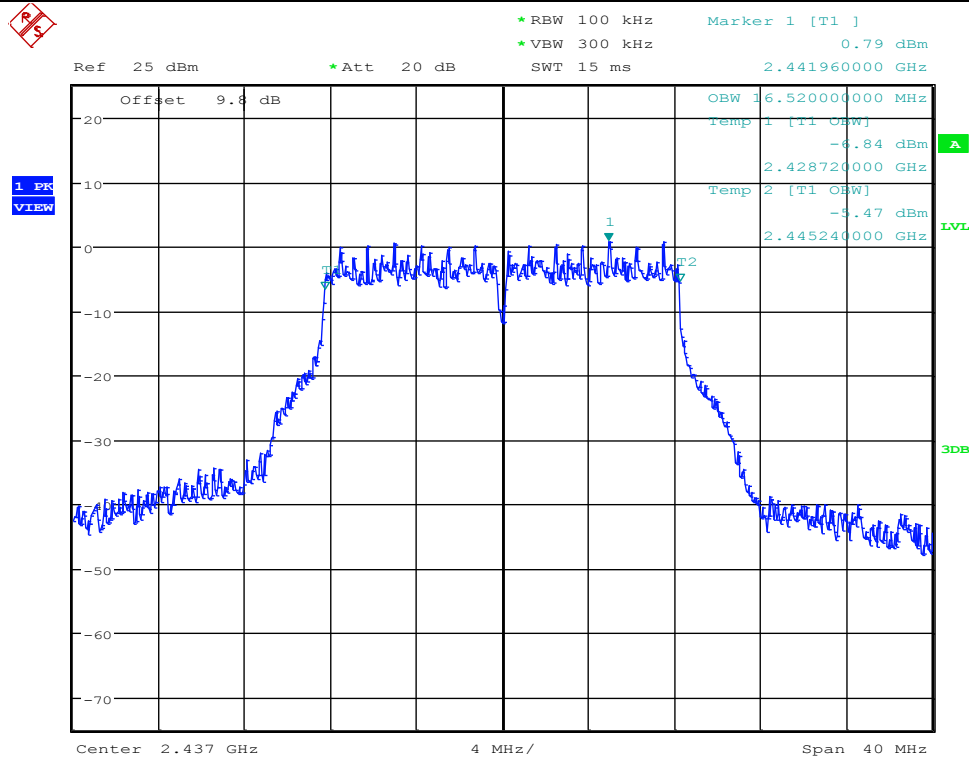


Date: 13.OCT.2017 17:01:05

Occupied Bandwidth\_11BMIMO\_2437\_Ant2

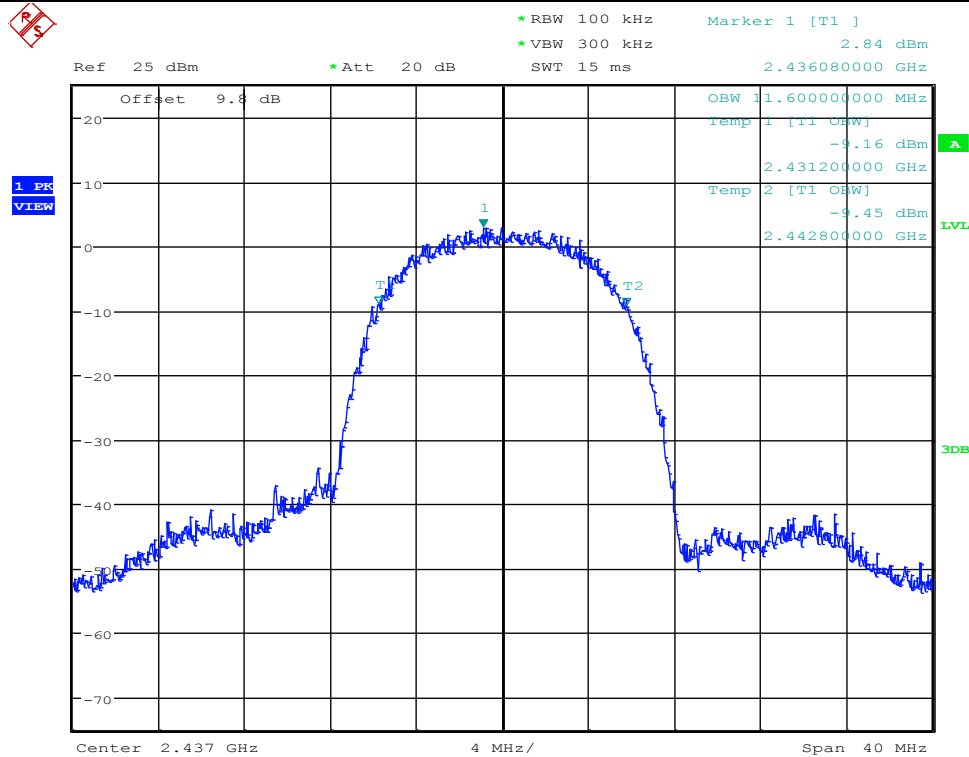


Date: 13.OCT.2017 16:40:31

Occupied Bandwidth\_11BMIMO\_2462\_Ant1

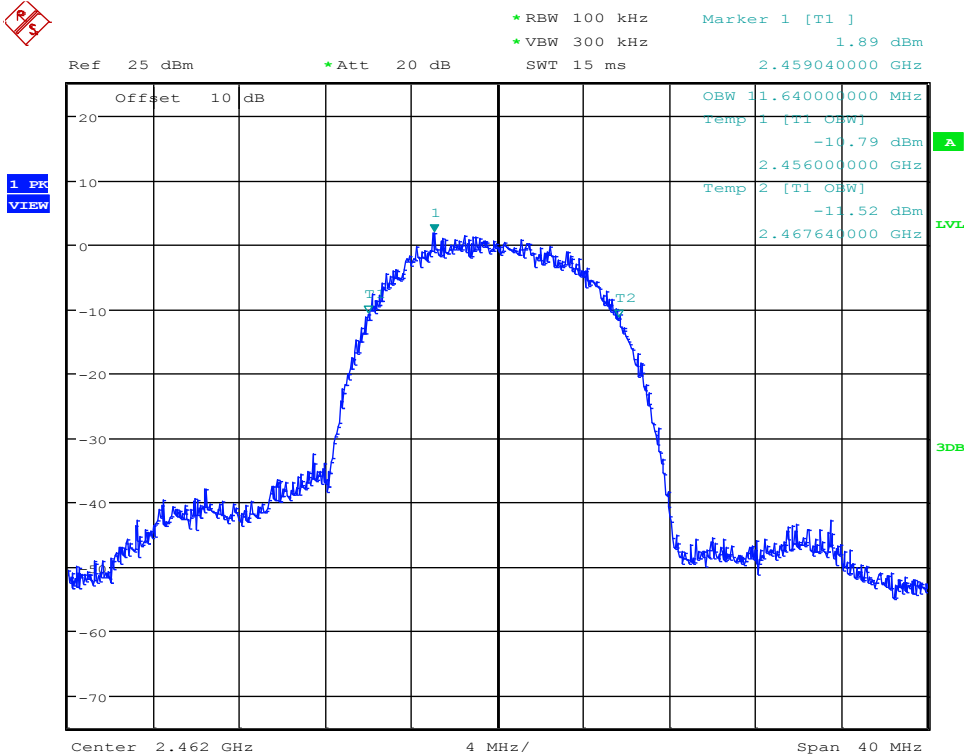


Date: 13.OCT.2017 16:43:04

Occupied Bandwidth\_11GMIMO\_2462\_Ant1

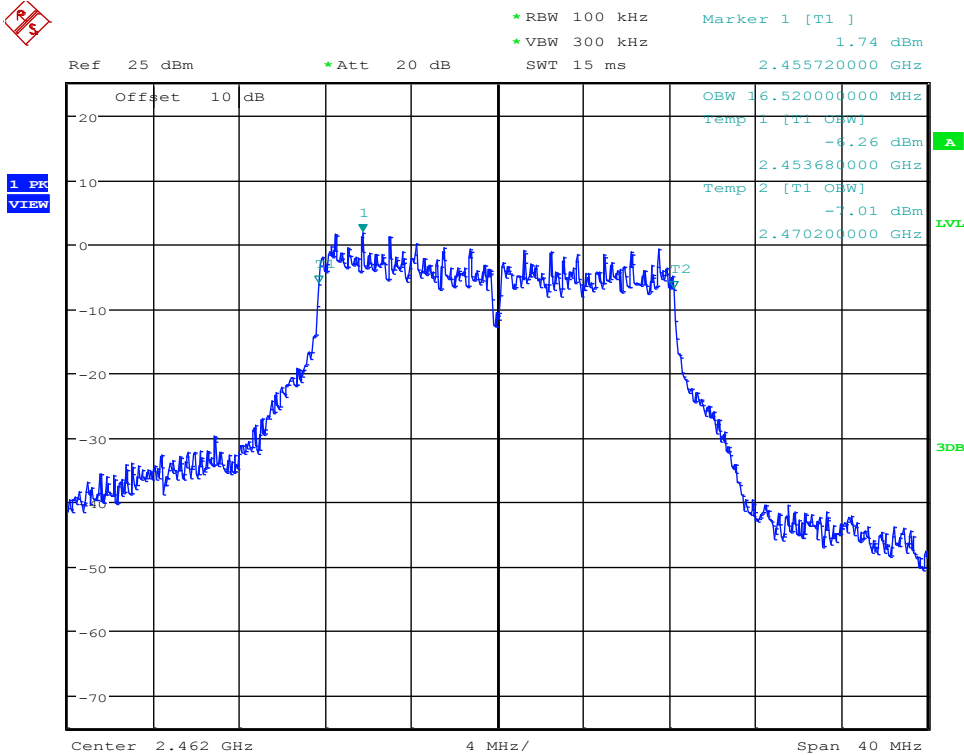


Date: 13.OCT.2017 17:40:21

Occupied Bandwidth\_11BMIMO\_2462\_Ant2

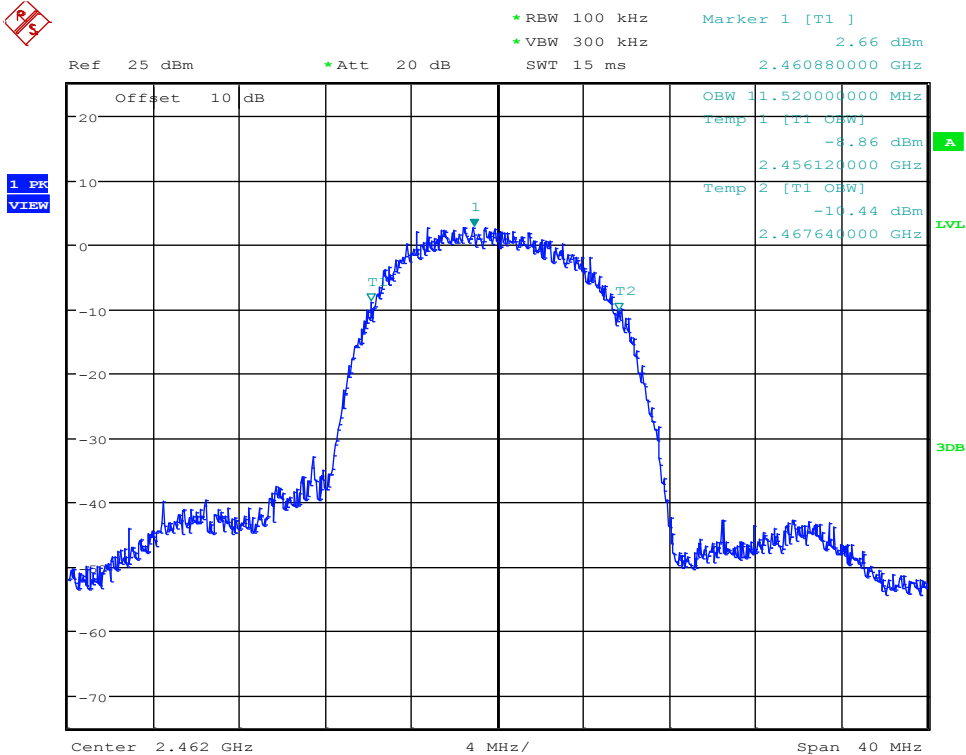

Date: 13.OCT.2017 16:45:33

Occupied Bandwidth\_11GMIMO\_2462\_Ant2

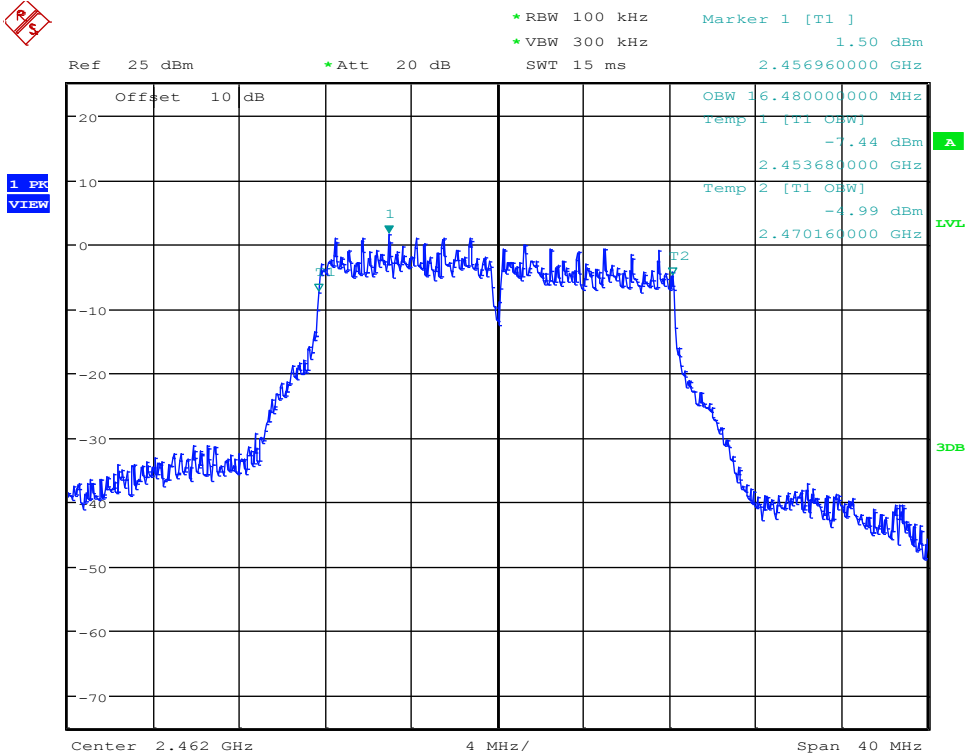

Date: 13.OCT.2017 17:42:50

## 5. Conducted peak Output Power

### 5.1. Block diagram of test setup

Same as section 4.1

### 5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.  
If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by power sensor.

### 5.4. Test Result

| Test Mode | Test Channel | Ant       | Power[dBm] | Limit[dBm] | Verdict |
|-----------|--------------|-----------|------------|------------|---------|
| 11BMIMO   | 2412         | Ant1      | 19.14      | 30         | PASS    |
| 11BMIMO   | 2412         | Ant2      | 19.45      | 30         | PASS    |
| 11BMIMO   | 2412         | Ant1+Ant2 | 22.31      | 30         | PASS    |
| 11BMIMO   | 2437         | Ant1      | 18.01      | 30         | PASS    |
| 11BMIMO   | 2437         | Ant2      | 19.5       | 30         | PASS    |
| 11BMIMO   | 2437         | Ant1+Ant2 | 21.83      | 30         | PASS    |
| 11BMIMO   | 2462         | Ant1      | 18.22      | 30         | PASS    |
| 11BMIMO   | 2462         | Ant2      | 19.41      | 30         | PASS    |
| 11BMIMO   | 2462         | Ant1+Ant2 | 21.87      | 30         | PASS    |
| 11GMIMO   | 2412         | Ant1      | 19.87      | 30         | PASS    |
| 11GMIMO   | 2412         | Ant2      | 19.61      | 30         | PASS    |
| 11GMIMO   | 2412         | Ant1+Ant2 | 22.75      | 30         | PASS    |
| 11GMIMO   | 2437         | Ant1      | 19.16      | 30         | PASS    |
| 11GMIMO   | 2437         | Ant2      | 19.89      | 30         | PASS    |
| 11GMIMO   | 2437         | Ant1+Ant2 | 22.55      | 30         | PASS    |
| 11GMIMO   | 2462         | Ant1      | 19.27      | 30         | PASS    |
| 11GMIMO   | 2462         | Ant2      | 19.75      | 30         | PASS    |
| 11GMIMO   | 2462         | Ant1+Ant2 | 22.53      | 30         | PASS    |
| 11N20MIMO | 2412         | Ant1      | 21.16      | 30         | PASS    |
| 11N20MIMO | 2412         | Ant2      | 20.89      | 30         | PASS    |
| 11N20MIMO | 2412         | Ant1+Ant2 | 24.04      | 30         | PASS    |
| 11N20MIMO | 2437         | Ant1      | 20.48      | 30         | PASS    |

|           |      |           |       |    |      |
|-----------|------|-----------|-------|----|------|
| 11N20MIMO | 2437 | Ant2      | 21.28 | 30 | PASS |
| 11N20MIMO | 2437 | Ant1+Ant2 | 23.91 | 30 | PASS |
| 11N20MIMO | 2462 | Ant1      | 20.69 | 30 | PASS |
| 11N20MIMO | 2462 | Ant2      | 20.75 | 30 | PASS |
| 11N20MIMO | 2462 | Ant1+Ant2 | 23.73 | 30 | PASS |
| 11N40MIMO | 2422 | Ant1      | 21.03 | 30 | PASS |
| 11N40MIMO | 2422 | Ant2      | 21.39 | 30 | PASS |
| 11N40MIMO | 2422 | Ant1+Ant2 | 24.22 | 30 | PASS |
| 11N40MIMO | 2437 | Ant1      | 21.3  | 30 | PASS |
| 11N40MIMO | 2437 | Ant2      | 21.51 | 30 | PASS |
| 11N40MIMO | 2437 | Ant1+Ant2 | 24.42 | 30 | PASS |
| 11N40MIMO | 2452 | Ant1      | 21.73 | 30 | PASS |
| 11N40MIMO | 2452 | Ant2      | 21.81 | 30 | PASS |
| 11N40MIMO | 2452 | Ant1+Ant2 | 24.78 | 30 | PASS |

## 6. Power Spectral Density

### 6.1. Block diagram of test setup

Same as section 4.1

### 6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### 6.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

|                  |                                                    |
|------------------|----------------------------------------------------|
| Center frequency | DTS Channel center frequency                       |
| RBW:             | $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ |
| VBW:             | $\geq 3\text{RBW}$                                 |
| Span             | 1.5times the DTS bandwidth                         |
| Detector Mode:   | RMS                                                |
| Sweep time:      | auto                                               |
| Trace mode       | Max hold                                           |

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.4. Test Result

| Test Mode | Test Channel | Ant       | PSD[dBm/30kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|--------------|-----------|----------------|-----------------|---------|
| 11BMIMO   | 2412         | Ant1      | -0.64          | 8.00            | PASS    |
| 11BMIMO   | 2412         | Ant2      | -0.35          | 8.00            | PASS    |
| 11BMIMO   | 2412         | Ant1+Ant2 | 2.517          | 8.00            | PASS    |
| 11BMIMO   | 2437         | Ant1      | -2.21          | 8.00            | PASS    |
| 11BMIMO   | 2437         | Ant2      | -0.66          | 8.00            | PASS    |
| 11BMIMO   | 2437         | Ant1+Ant2 | 1.644          | 8.00            | PASS    |
| 11BMIMO   | 2462         | Ant1      | -1.62          | 8.00            | PASS    |
| 11BMIMO   | 2462         | Ant2      | -0.61          | 8.00            | PASS    |
| 11BMIMO   | 2462         | Ant1+Ant2 | 1.924          | 8.00            | PASS    |
| 11GMIMO   | 2412         | Ant1      | -3.96          | 8.00            | PASS    |
| 11GMIMO   | 2412         | Ant2      | -4.56          | 8.00            | PASS    |
| 11GMIMO   | 2412         | Ant1+Ant2 | -1.239         | 8.00            | PASS    |
| 11GMIMO   | 2437         | Ant1      | -4.19          | 8.00            | PASS    |
| 11GMIMO   | 2437         | Ant2      | -3.91          | 8.00            | PASS    |

|           |      |           |        |      |      |
|-----------|------|-----------|--------|------|------|
| 11GMIMO   | 2437 | Ant1+Ant2 | -1.037 | 8.00 | PASS |
| 11GMIMO   | 2462 | Ant1      | -3.77  | 8.00 | PASS |
| 11GMIMO   | 2462 | Ant2      | -3.97  | 8.00 | PASS |
| 11GMIMO   | 2462 | Ant1+Ant2 | -0.858 | 8.00 | PASS |
| 11N20MIMO | 2412 | Ant1      | -3.81  | 8.00 | PASS |
| 11N20MIMO | 2412 | Ant2      | -3.18  | 8.00 | PASS |
| 11N20MIMO | 2412 | Ant1+Ant2 | -0.473 | 8.00 | PASS |
| 11N20MIMO | 2437 | Ant1      | -3.1   | 8.00 | PASS |
| 11N20MIMO | 2437 | Ant2      | -3.15  | 8.00 | PASS |
| 11N20MIMO | 2437 | Ant1+Ant2 | -0.114 | 8.00 | PASS |
| 11N20MIMO | 2462 | Ant1      | -1.94  | 8.00 | PASS |
| 11N20MIMO | 2462 | Ant2      | -3.21  | 8.00 | PASS |
| 11N20MIMO | 2462 | Ant1+Ant2 | 0.481  | 8.00 | PASS |
| 11N40MIMO | 2422 | Ant1      | -6.04  | 8.00 | PASS |
| 11N40MIMO | 2422 | Ant2      | -5.98  | 8.00 | PASS |
| 11N40MIMO | 2422 | Ant1+Ant2 | -2.999 | 8.00 | PASS |
| 11N40MIMO | 2437 | Ant1      | -4.96  | 8.00 | PASS |
| 11N40MIMO | 2437 | Ant2      | -5.41  | 8.00 | PASS |
| 11N40MIMO | 2437 | Ant1+Ant2 | -2.168 | 8.00 | PASS |
| 11N40MIMO | 2452 | Ant1      | -4.21  | 8.00 | PASS |
| 11N40MIMO | 2452 | Ant2      | -4.68  | 8.00 | PASS |
| 11N40MIMO | 2452 | Ant1+Ant2 | -1.428 | 8.00 | PASS |

**Maximum Peak power spectral density\_11N20MIMO\_2412\_Ant1**

\*RBW 30 kHz  
\*VBW 100 kHz  
SWT 40 ms

Marker 1 [T1 ]  
-3.81 dBm  
2.405705920 GHz

Ref 25 dBm      \*Att 20 dB

Offset 9.7 dB

1 PK VIEW

The plot shows a blue line representing the power spectral density. The y-axis ranges from -70 to 20 dBm. The x-axis ranges from 2.405 to 2.415 GHz. A green horizontal line at approximately -3.81 dBm indicates the peak level. The signal has a bandwidth of about 35.36 MHz.

A LVL 3DB

Center 2.412 GHz      3.536 MHz/      Span 35.36 MHz

Date: 13.OCT.2017 17:46:53

---

**Maximum Peak power spectral density\_11N20MIMO\_2412\_Ant2**

\*RBW 30 kHz  
\*VBW 100 kHz  
SWT 40 ms

Marker 1 [T1 ]  
-3.18 dBm  
2.410732800 GHz

Ref 25 dBm      \*Att 20 dB

Offset 9.7 dB

1 PK VIEW


The plot shows a blue line representing the power spectral density. The y-axis ranges from -70 to 20 dBm. The x-axis ranges from 2.405 to 2.415 GHz. A green horizontal line at approximately -3.18 dBm indicates the peak level. The signal has a bandwidth of about 35.2 MHz.

A LVL 3DB

Center 2.412 GHz      3.52 MHz/      Span 35.2 MHz


Date: 13.OCT.2017 17:49:24

Maximum Peak power spectral density\_11N20MIMO\_2437\_Ant1

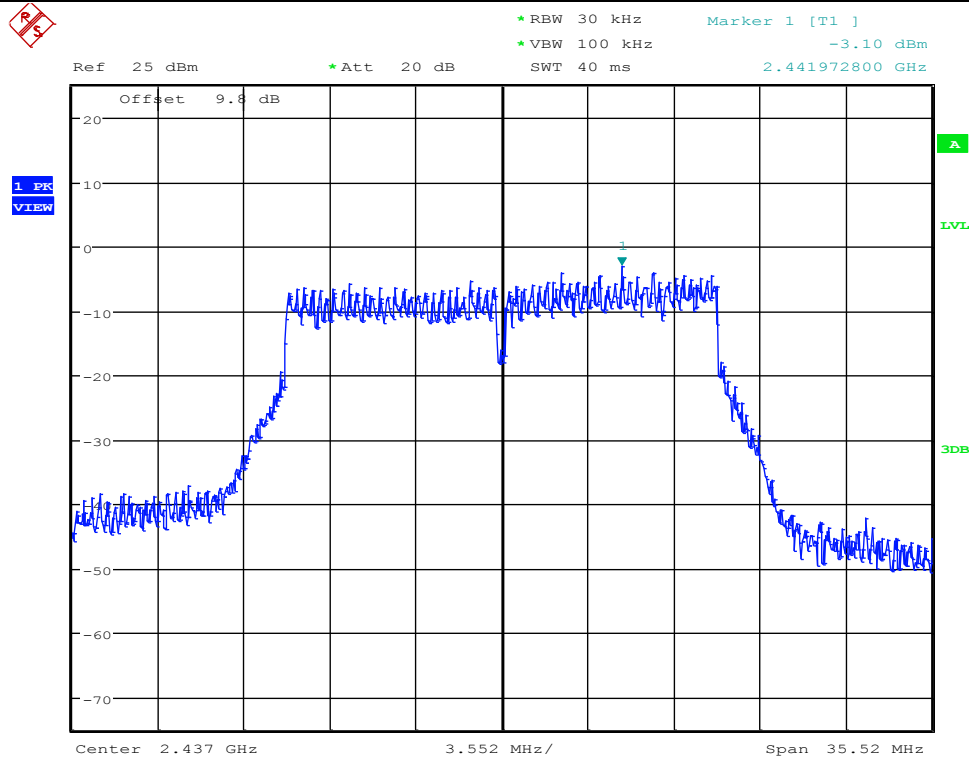


Date: 13.OCT.2017 18:33:46

Maximum Peak power spectral density\_11N20MIMO\_2437\_Ant2

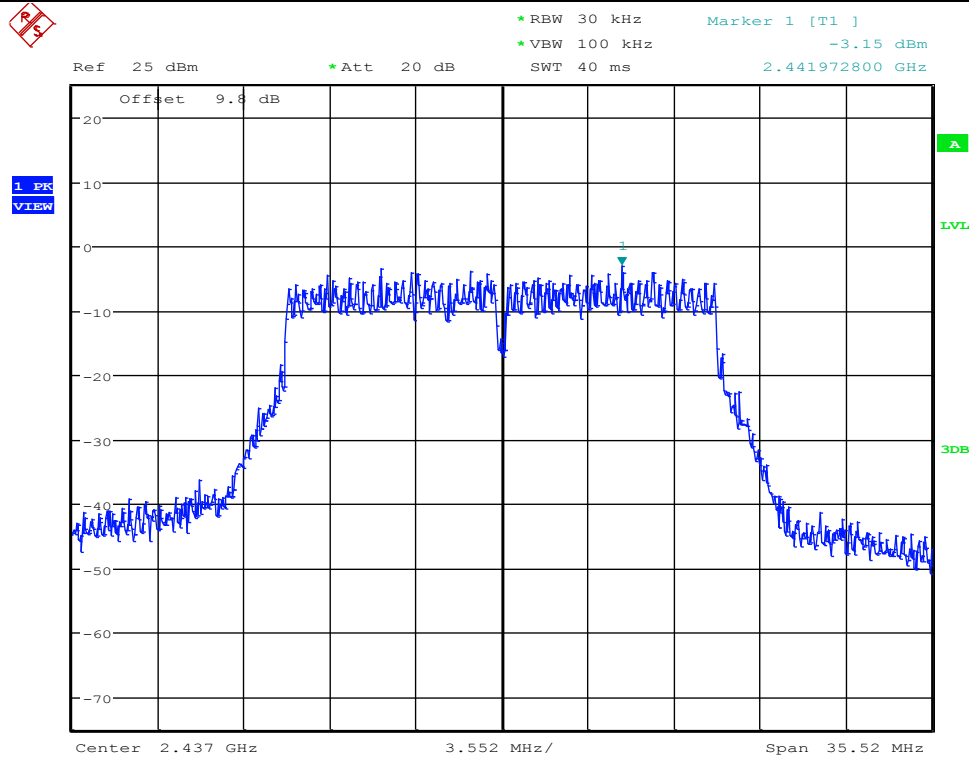


Date: 13.OCT.2017 18:35:19

Maximum Peak power spectral density\_11N20MIMO\_2462\_Ant1

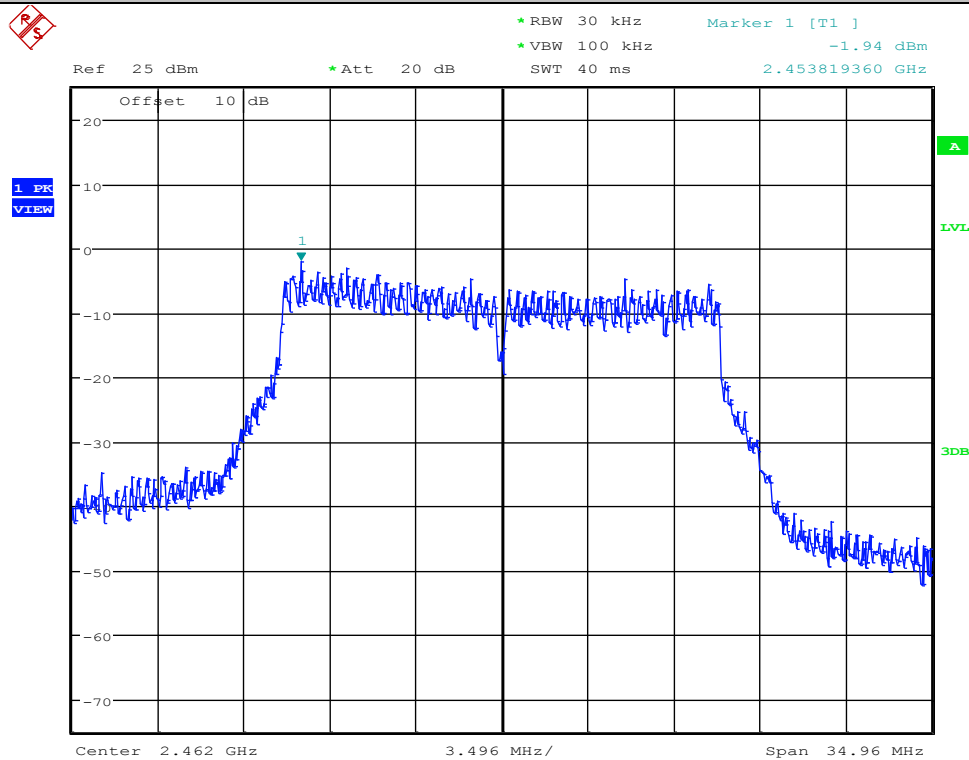


Date: 13.OCT.2017 18:37:37

Maximum Peak power spectral density\_11N20MIMO\_2462\_Ant2

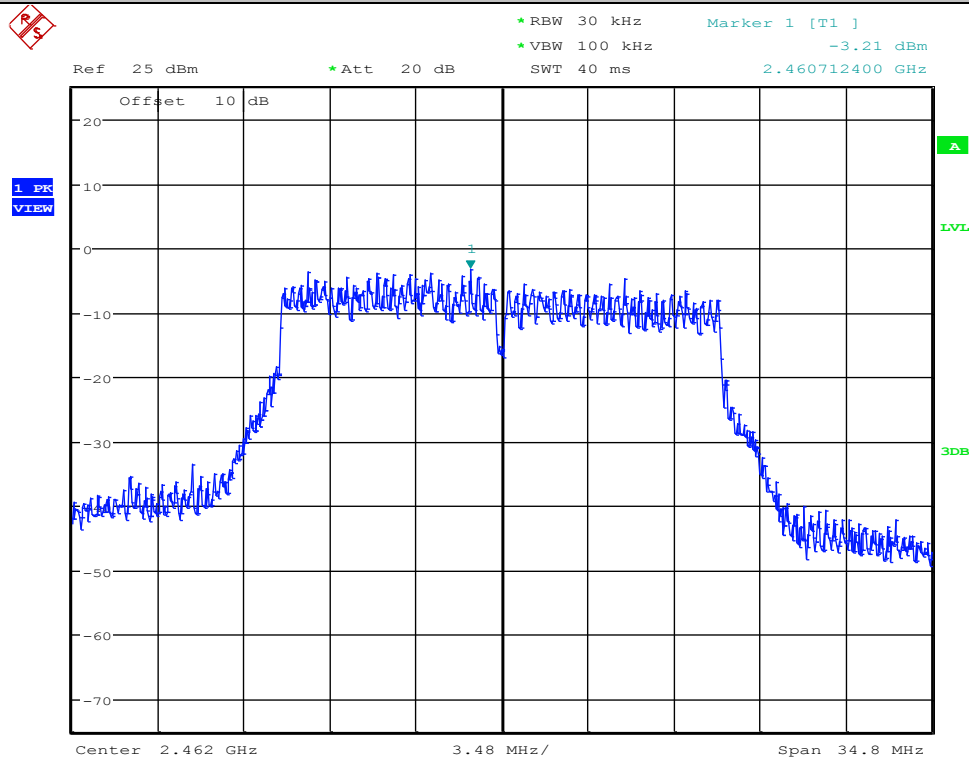


Date: 13.OCT.2017 18:40:08

Maximum Peak power spectral density\_11N40MIMO\_2422\_Ant1

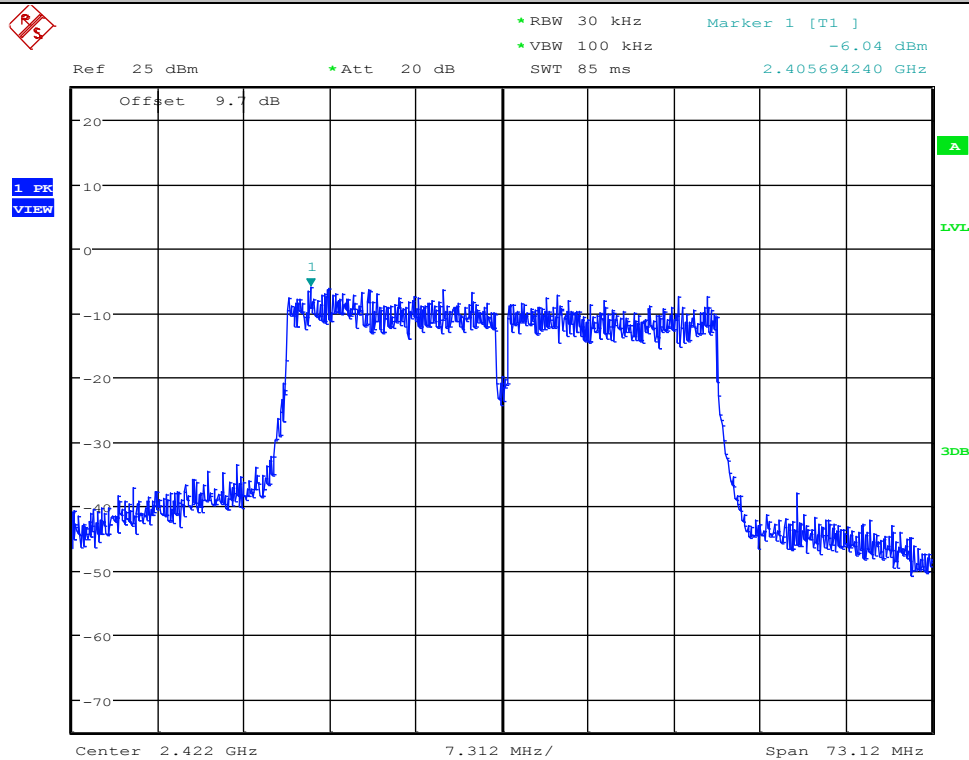


Date: 13.OCT.2017 18:43:41

Maximum Peak power spectral density\_11N40MIMO\_2422\_Ant2

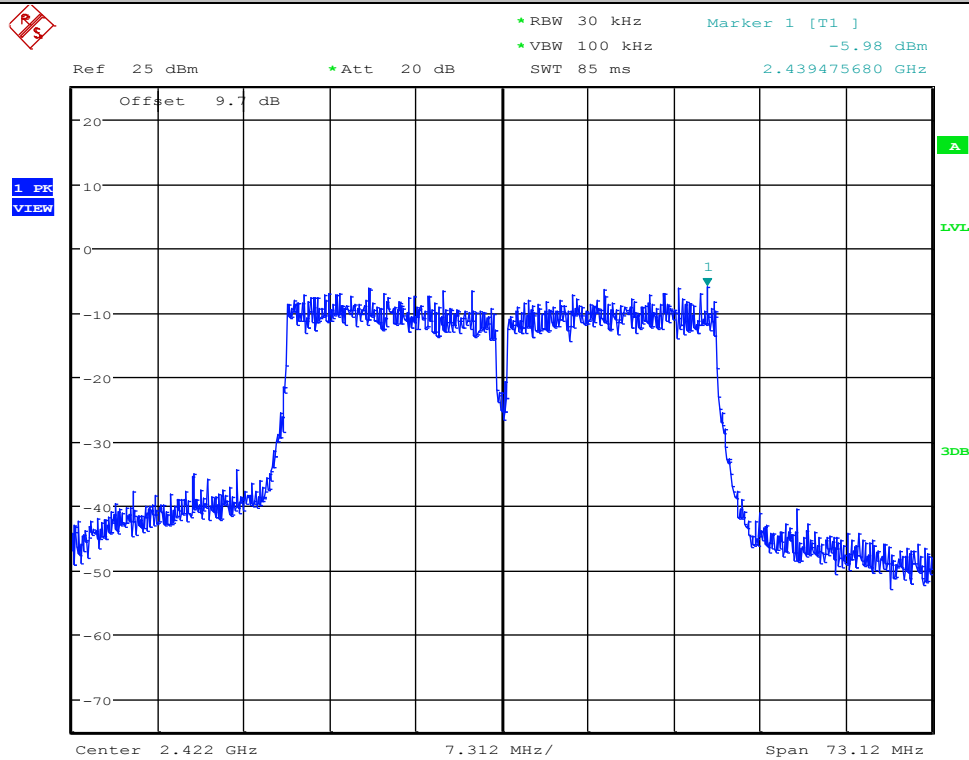


Date: 13.OCT.2017 18:46:12

Maximum Peak power spectral density\_11N40MIMO\_2437\_Ant1

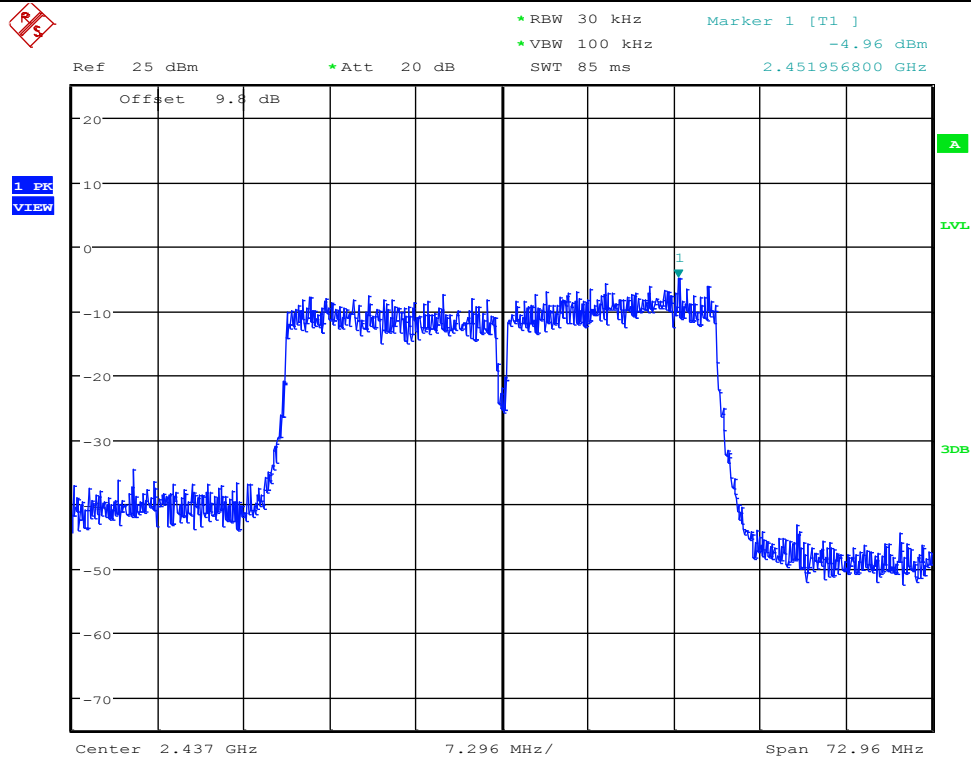


Date: 13.OCT.2017 18:49:20

Maximum Peak power spectral density\_11N40MIMO\_2437\_Ant2

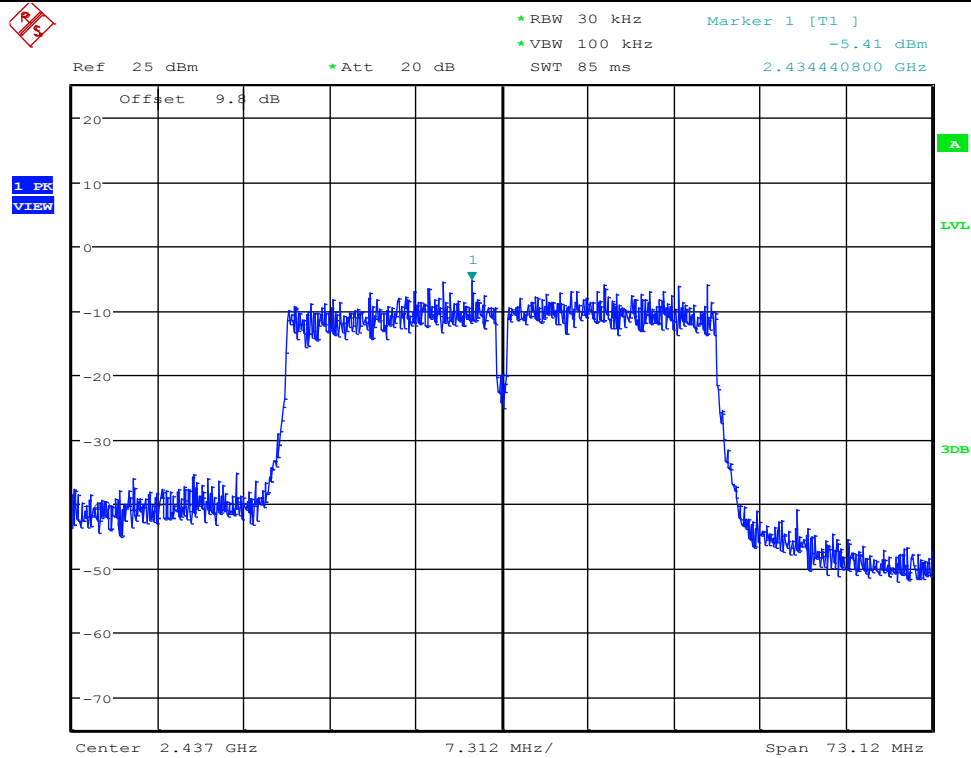


Date: 13.OCT.2017 18:50:53

Maximum Peak power spectral density\_11N40MIMO\_2452\_Ant1

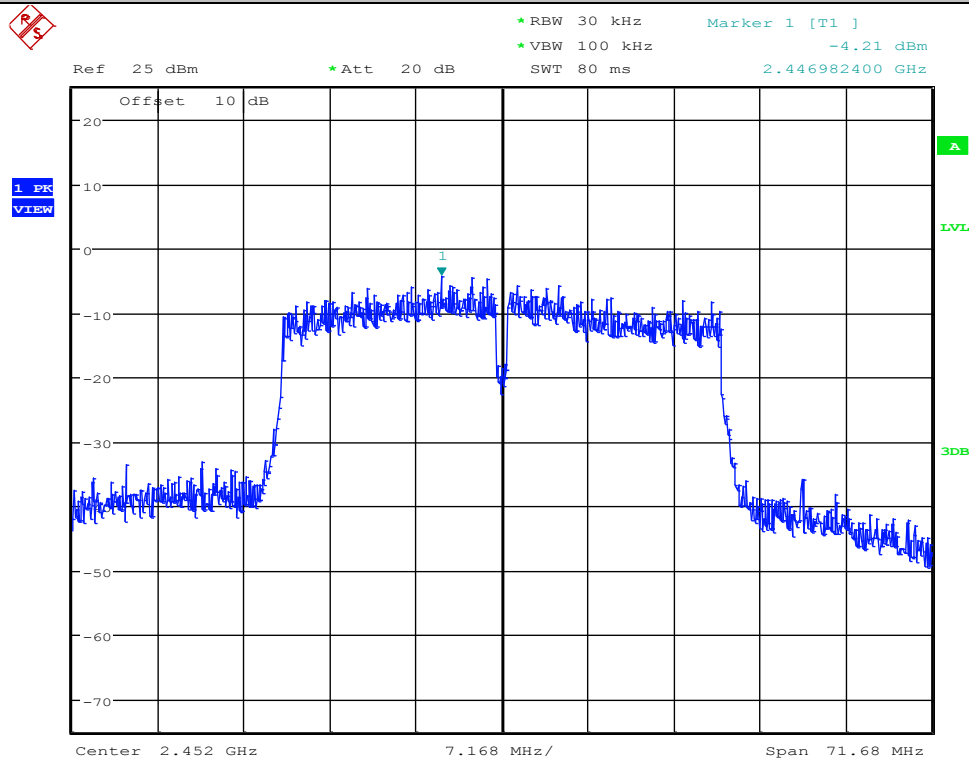


Date: 13.OCT.2017 18:53:36

Maximum Peak power spectral density\_11N40MIMO\_2452\_Ant2

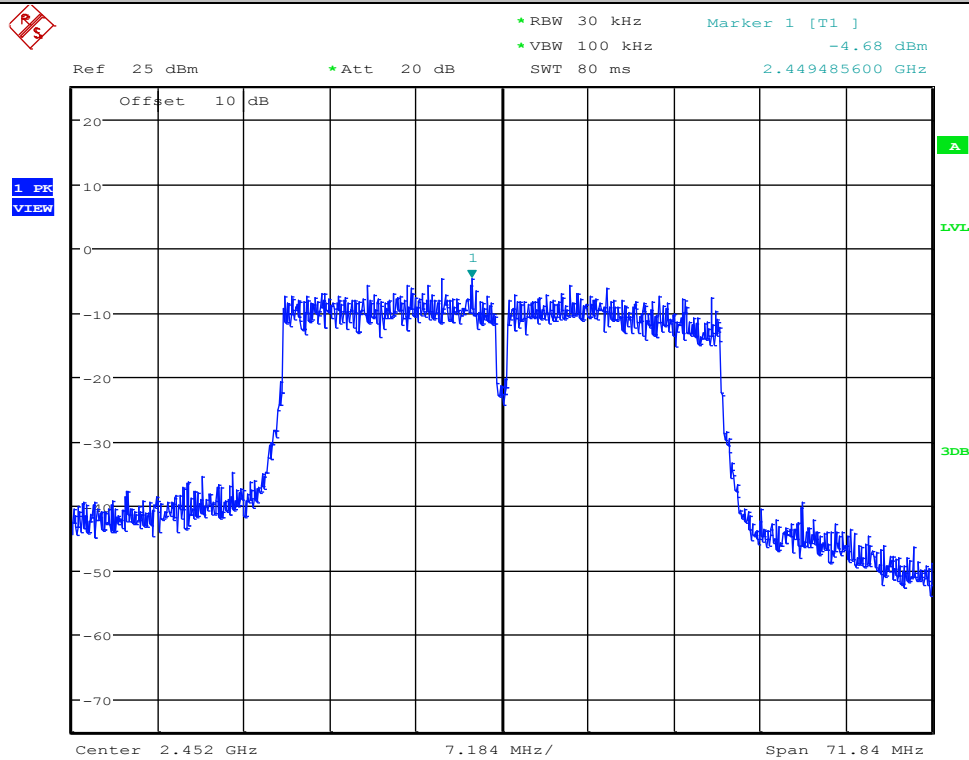


Date: 13.OCT.2017 18:56:07

Maximum Peak power spectral density\_11GMIMO\_2412\_Ant1

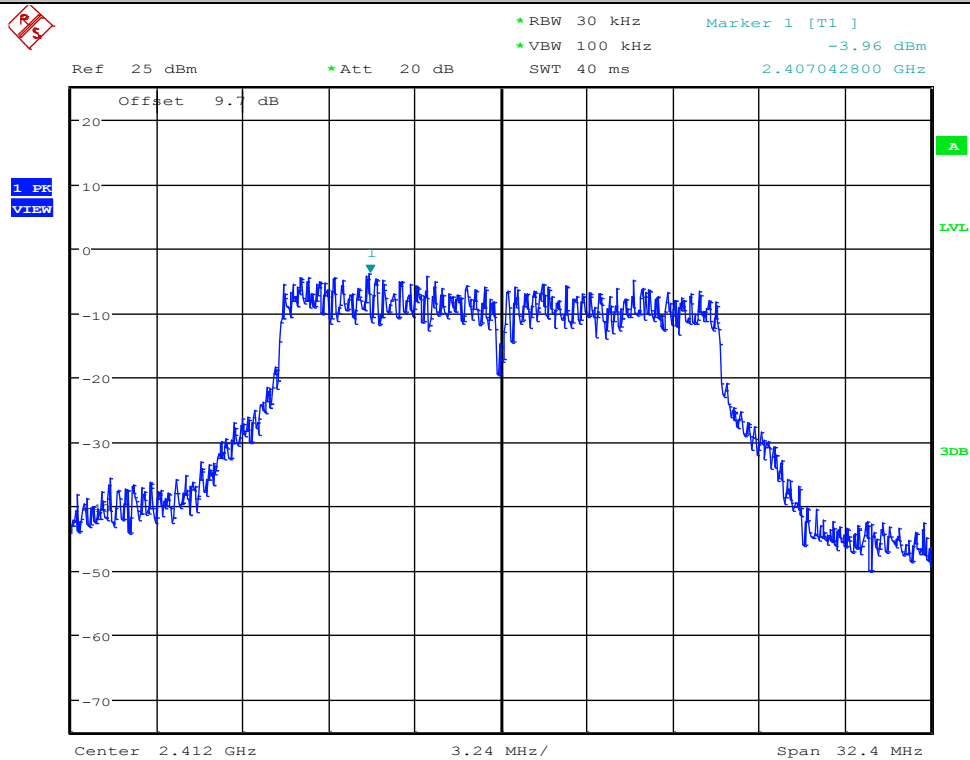


Date: 13.OCT.2017 16:50:50

Maximum Peak power spectral density\_11BMIMO\_2412\_Ant1

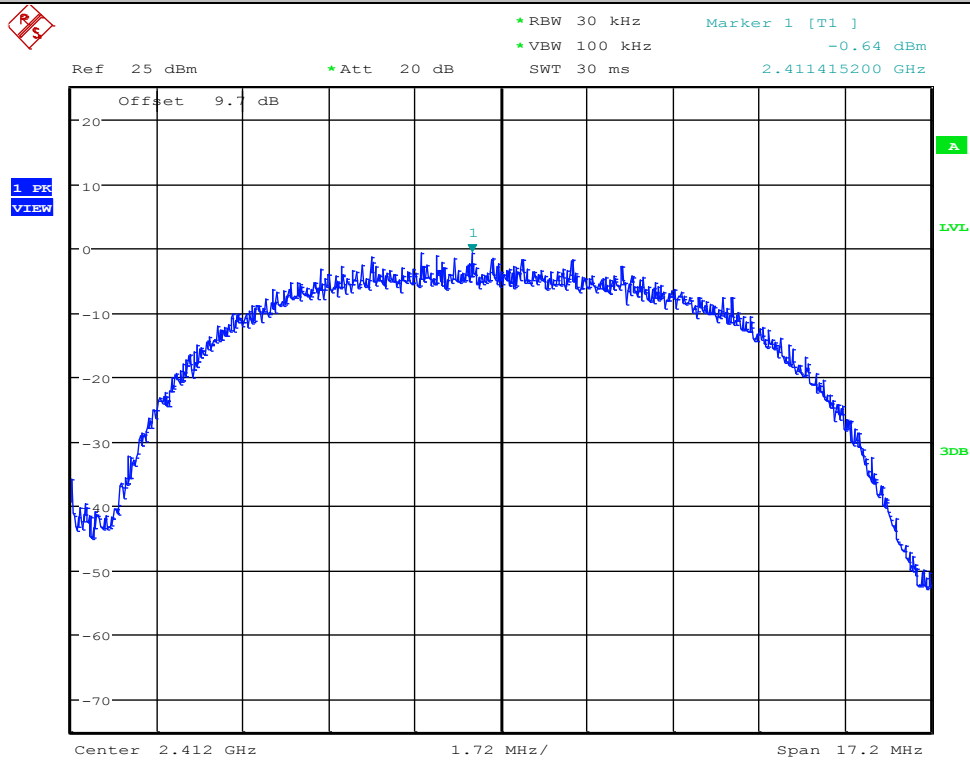


Date: 13.OCT.2017 16:29:15

Maximum Peak power spectral density\_11GMIMO\_2412\_Ant2

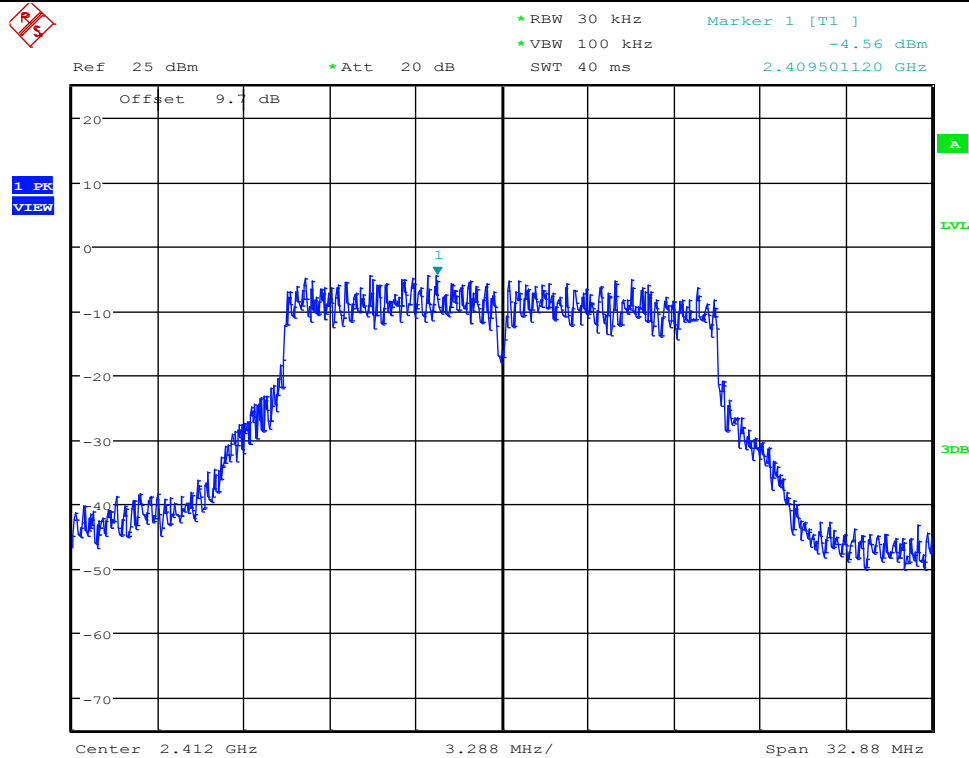


Date: 13.OCT.2017 16:53:20

Maximum Peak power spectral density\_11BMIMO\_2412\_Ant2

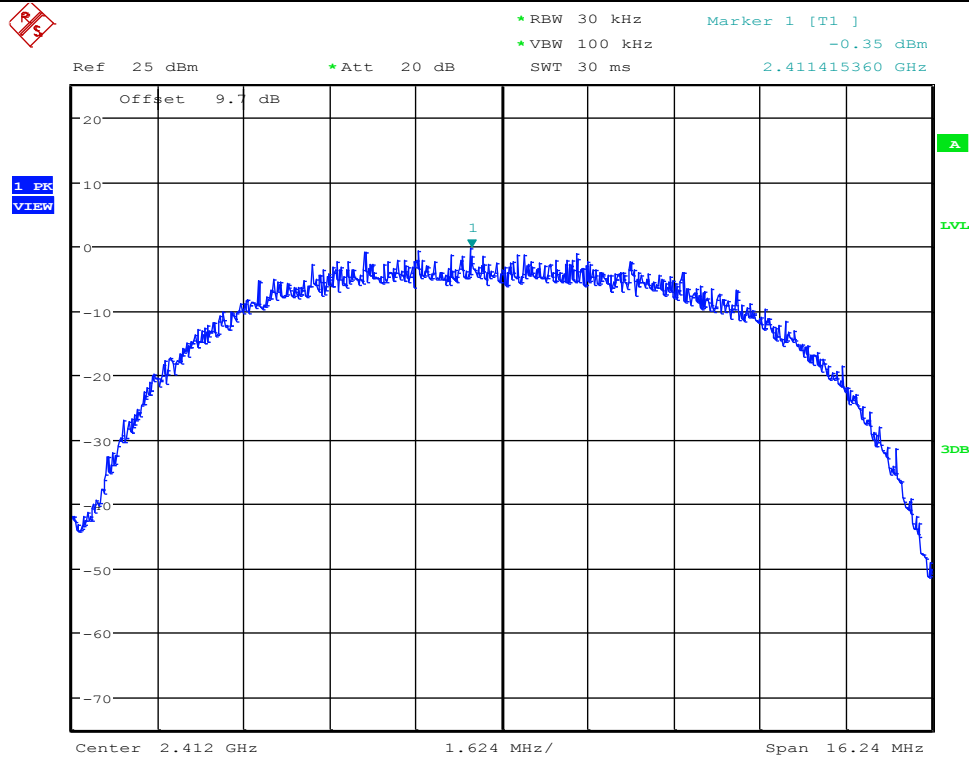


Date: 13.OCT.2017 16:31:44

Maximum Peak power spectral density\_11GMIMO\_2437\_Ant1

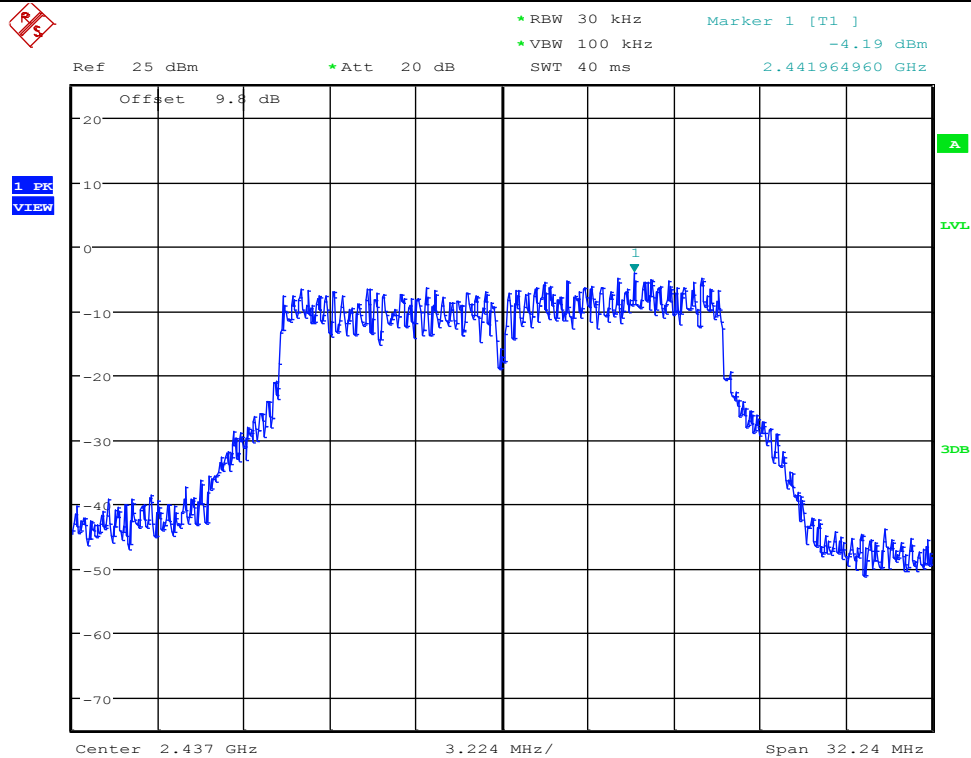


Date: 13.OCT.2017 17:00:26

Maximum Peak power spectral density\_11BMIMO\_2437\_Ant1

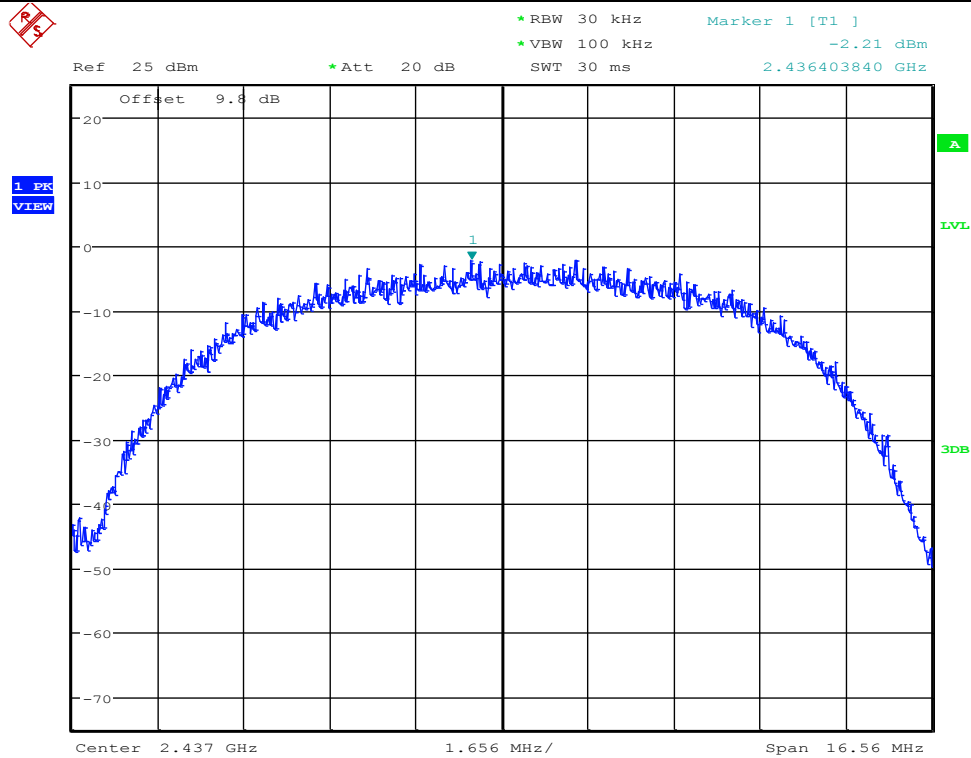


Date: 13.OCT.2017 16:39:52

Maximum Peak power spectral density\_11GMIMO\_2437\_Ant2

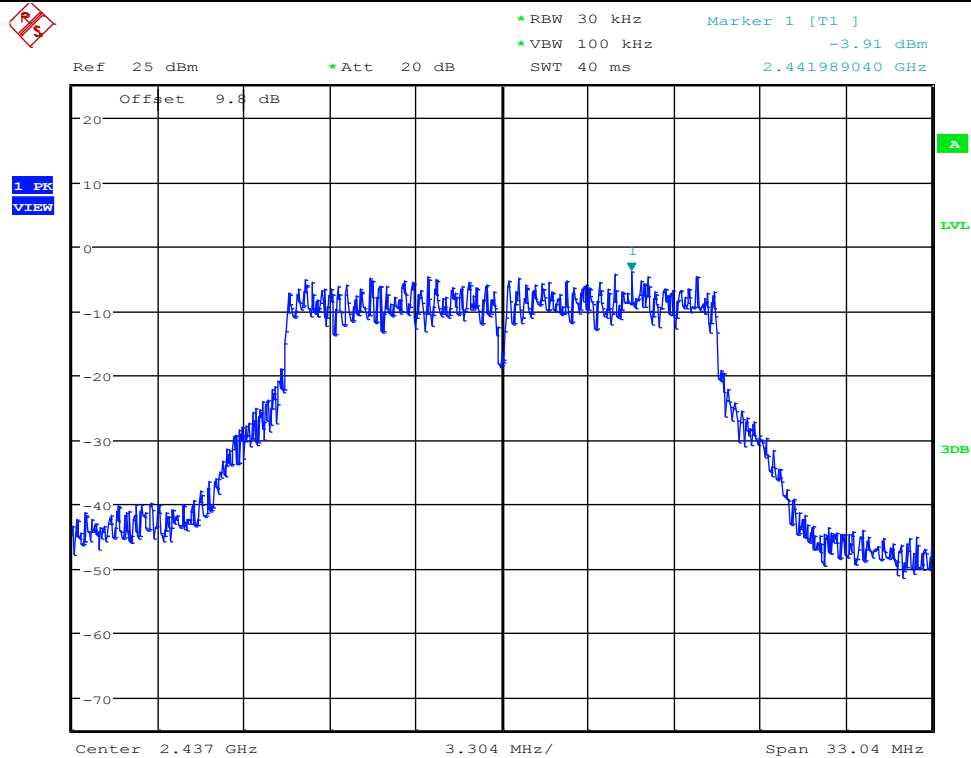


Date: 13.OCT.2017 17:01:59

Maximum Peak power spectral density\_11BMIMO\_2437\_Ant2

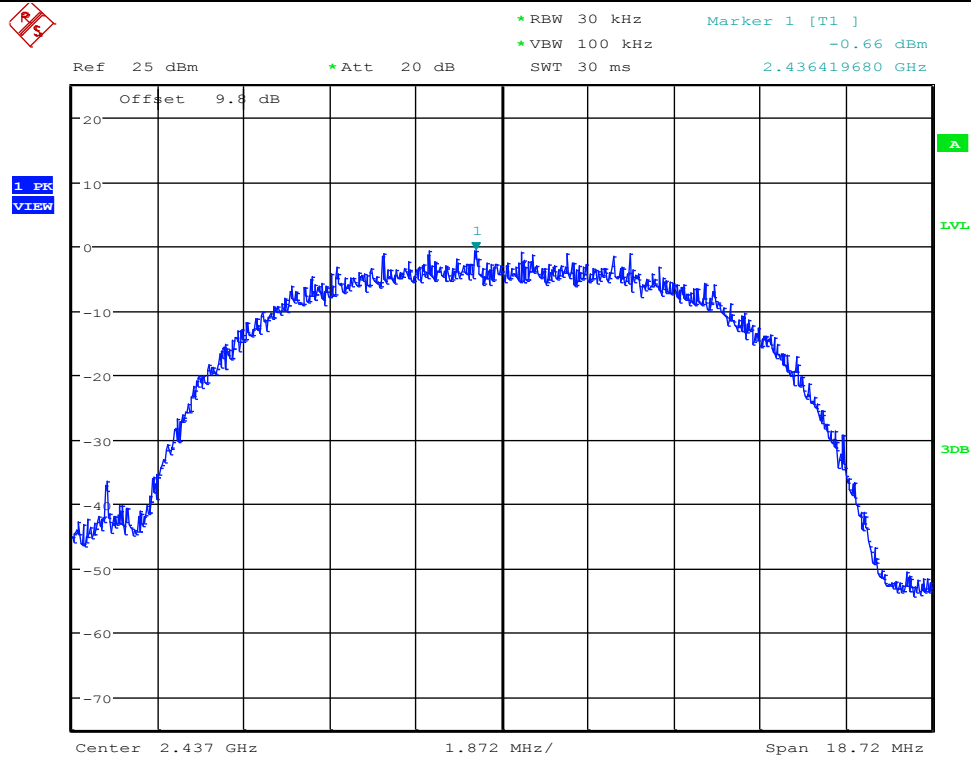


Date: 13.OCT.2017 16:41:24

Maximum Peak power spectral density\_11GMIMO\_2462\_Ant1

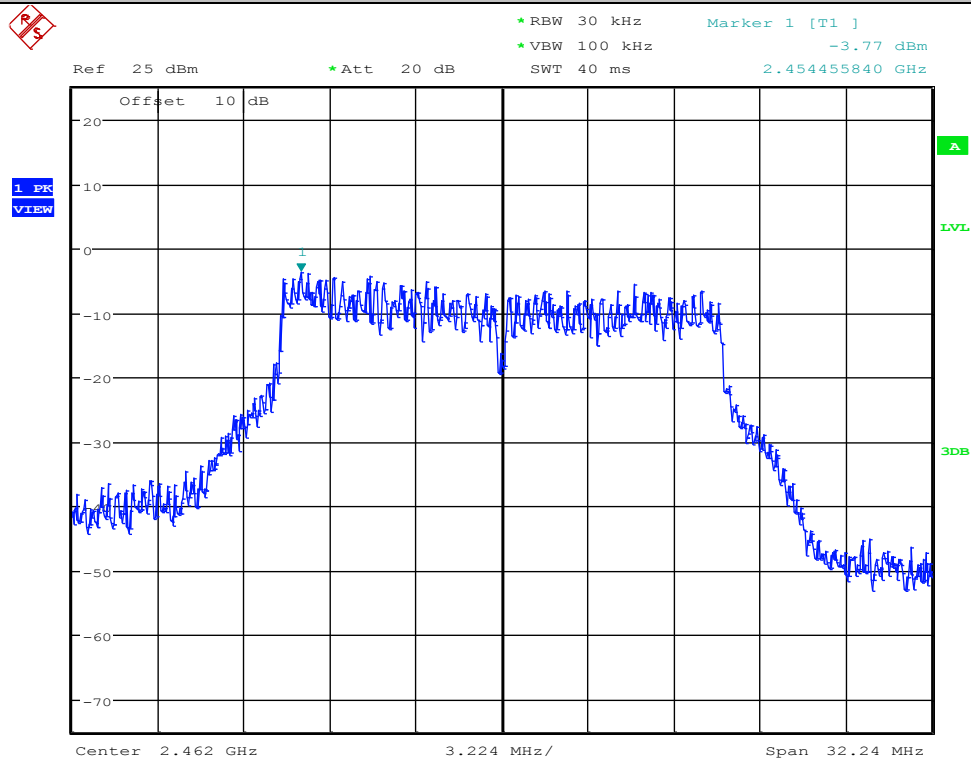


Date: 13.OCT.2017 17:41:13

Maximum Peak power spectral density\_11BMIMO\_2462\_Ant1

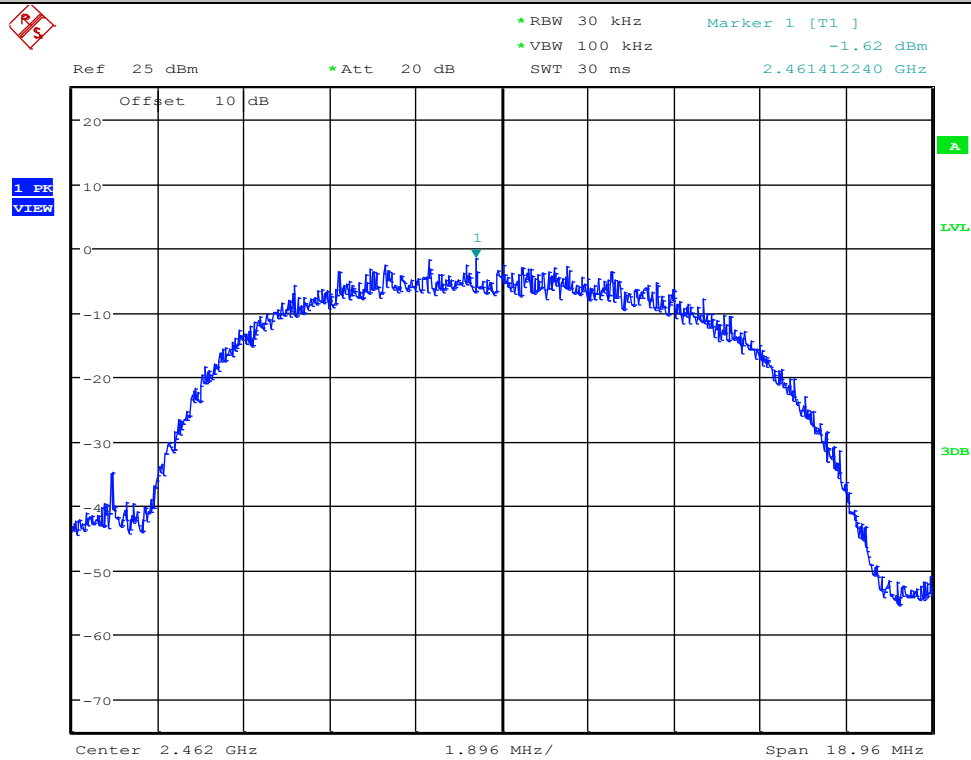


Date: 13.OCT.2017 16:43:57

Maximum Peak power spectral density\_11BMIMO\_2462\_Ant2

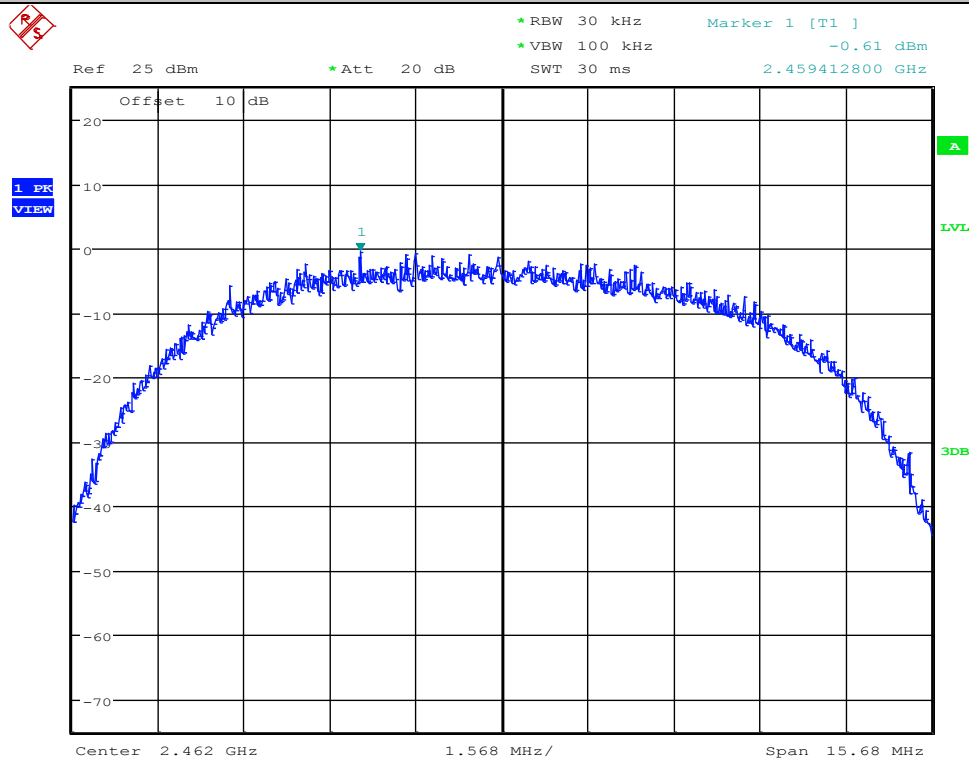

Date: 13.OCT.2017 16:46:26

Maximum Peak power spectral density\_11GMIMO\_2462\_Ant2

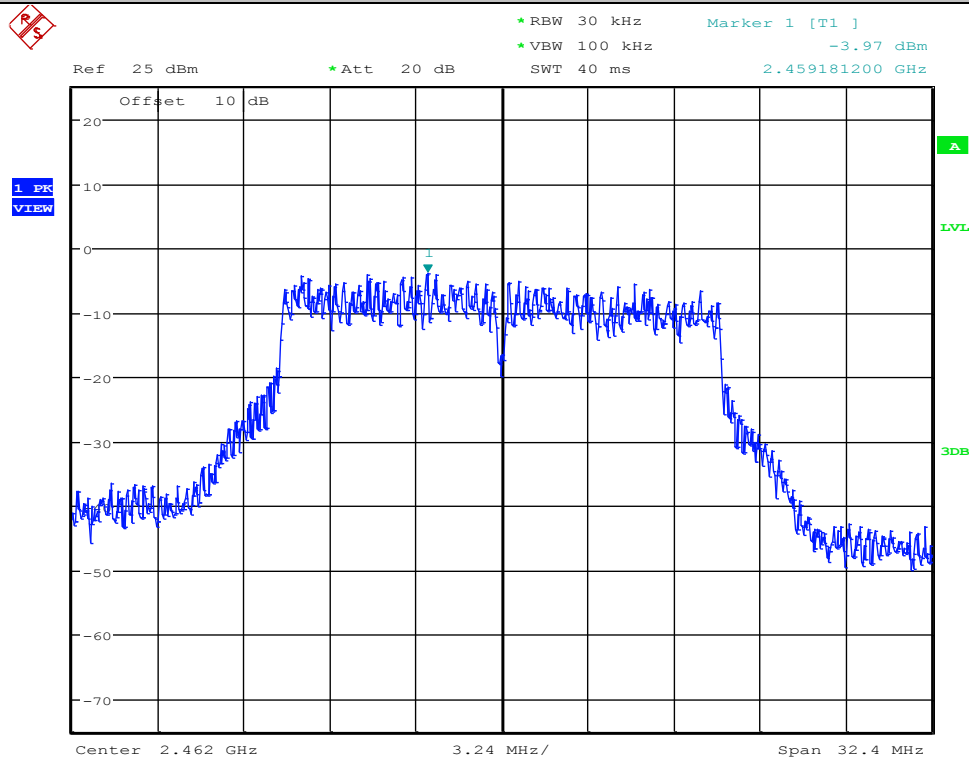

Date: 13.OCT.2017 17:43:44

## 6.6. Band Edge and Spurious Emissions (Conducted)

### 6.7. Block diagram of test setup

Same as section 4.1

### 6.8. Limits

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 6.9. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

|                  |                              |
|------------------|------------------------------|
| Center frequency | DTS Channel center frequency |
| RBW:             | 100KHz                       |
| VBW:             | 300KHz                       |
| Span             | 1.5times the DTS bandwidth   |
| Detector Mode:   | Peak                         |
| Sweep time:      | auto                         |
| Trace mode       | Max hold                     |

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

|                              |                                          |
|------------------------------|------------------------------------------|
| RBW:                         | 100KHz                                   |
| VBW:                         | 300KHz                                   |
| Span                         | Encompass frequency range to be measured |
| Number of measurement points | $\geq \text{span/RBW}$                   |
| Detector Mode:               | Peak                                     |
| Sweep time:                  | auto                                     |
| Trace mode                   | Max hold                                 |

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

**6.10. Test Result**

| EUT Set Mode | CH or Frequency | Ant1 Result (dBm) | EUT Set Mode | CH or Frequency | Ant1 Result Result (dBm) |
|--------------|-----------------|-------------------|--------------|-----------------|--------------------------|
| 11BMIMO      | CH1             | PASS              | 11N20 MIMO   | CH1             | PASS                     |
|              | CH6             | PASS              |              | CH6             | PASS                     |
|              | CH11            | PASS              |              | CH11            | PASS                     |
| 11GMIMO      | CH1             | PASS              | 11N40MIMO    | CH3             | PASS                     |
|              | CH6             | PASS              |              | CH6             | PASS                     |
|              | CH11            | PASS              |              | CH9             | PASS                     |

| EUT Set Mode | CH or Frequency | Ant2 Result (dBm) | EUT Set Mode | CH or Frequency | Ant2 Result (dBm) |
|--------------|-----------------|-------------------|--------------|-----------------|-------------------|
| 11BMIMO      | CH1             | PASS              | 11N20 MIMO   | CH1             | PASS              |
|              | CH6             | PASS              |              | CH6             | PASS              |
|              | CH11            | PASS              |              | CH11            | PASS              |
| 11GMIMO      | CH1             | PASS              | 11N40MIMO    | CH3             | PASS              |
|              | CH6             | PASS              |              | CH6             | PASS              |
|              | CH11            | PASS              |              | CH9             | PASS              |

## Band-edge for RF Conducted Emissions\_11N20MIMO\_2412\_Ant1

Ref 25 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 4 [T1]      -38.58 dBm  
 \*VBW 300 kHz      2.389900000 GHz  
 SWT 10 ms

Offset 9.7 dB

Marker 1 [T1]      -18.43 dBm  
 2.405700000 GHz  
 Marker 2 [T1]      -28.34 dBm  
 2.400000000 GHz  
 Marker 3 [T1]      -38.39 dBm  
 2.390000000 GHz

1 PK VIEW

Center 2.4 GHz      10 MHz/      Span 100 MHz

Date: 13.OCT.2017 17:47:09

## Band-edge for RF Conducted Emissions\_11N20MIMO\_2412\_Ant2

Ref 25 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 4 [T1]      -41.35 dBm  
 \*VBW 300 kHz      2.389400000 GHz  
 SWT 10 ms

Offset 9.7 dB


Marker 1 [T1]      -18.88 dBm  
 2.406900000 GHz  
 Marker 2 [T1]      -33.63 dBm  
 2.400000000 GHz  
 Marker 3 [T1]      -42.65 dBm  
 2.390000000 GHz

1 PK VIEW

Center 2.4 GHz      10 MHz/      Span 100 MHz


Date: 13.OCT.2017 17:49:41

Band-edge for RF Conducted Emissions\_11N20MIMO\_2462\_Ant1

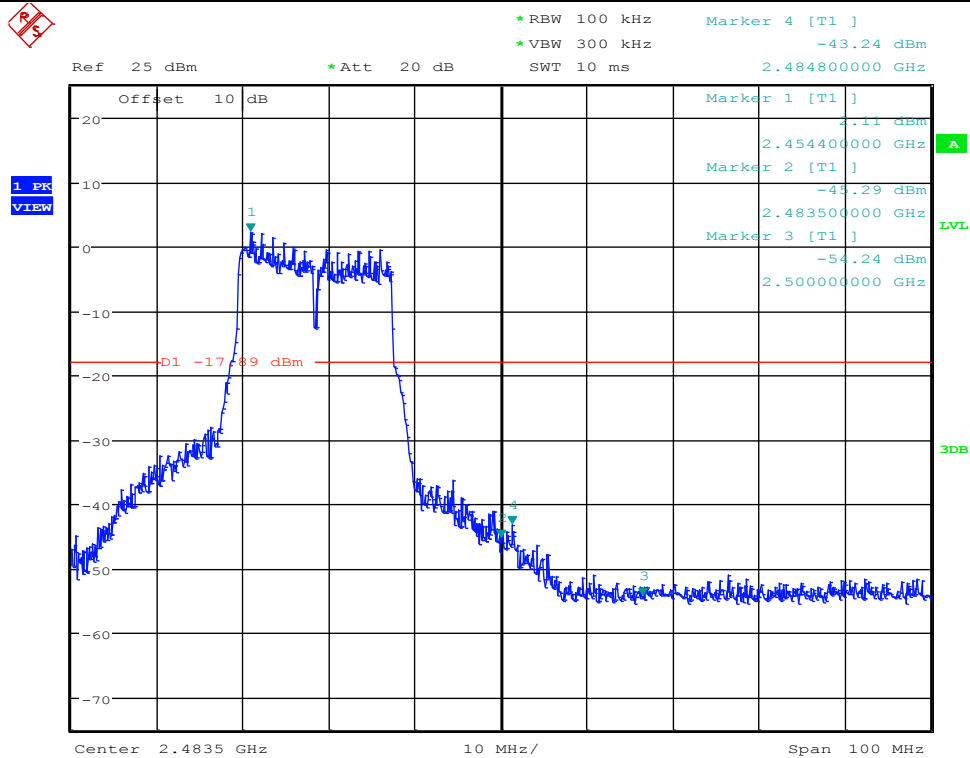


Date: 13.OCT.2017 18:37:53

Band-edge for RF Conducted Emissions\_11N20MIMO\_2462\_Ant2

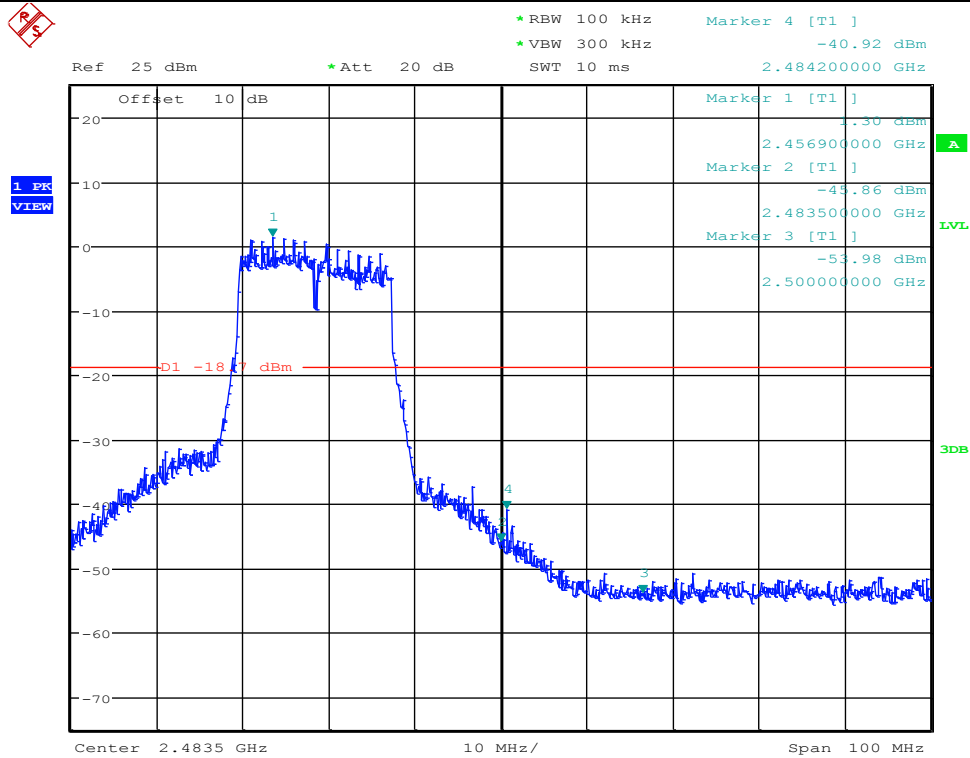


Date: 13.OCT.2017 18:40:25


Band-edge for RF Conducted Emissions\_11N40MIMO\_2422\_Ant1

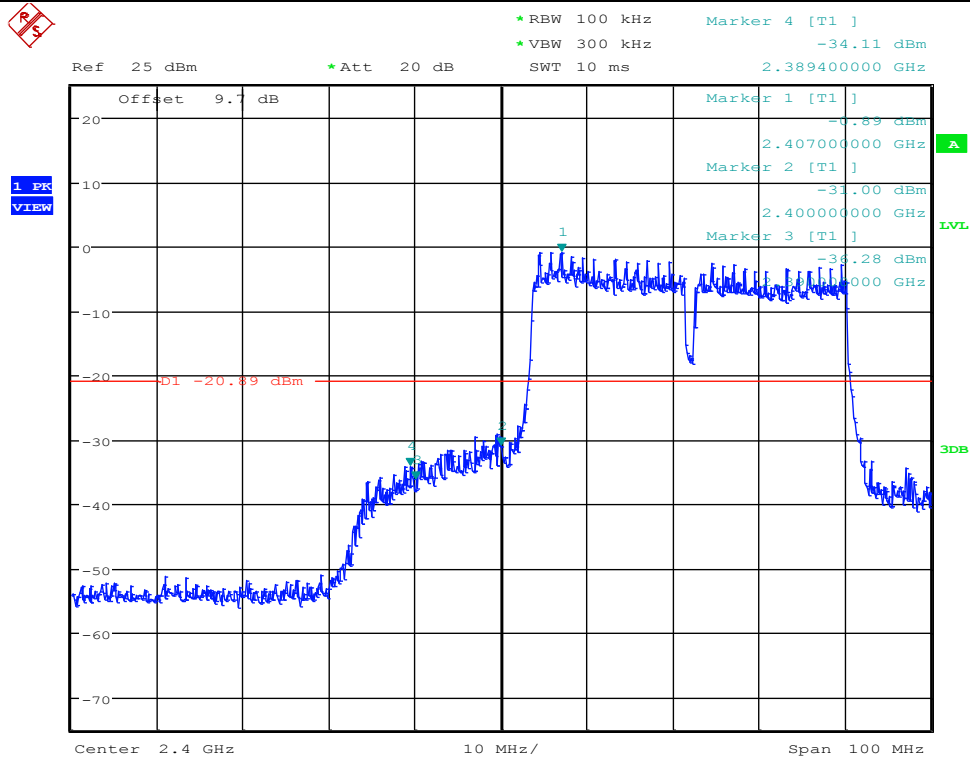

Band-edge for RF Conducted Emissions\_11N40MIMO\_2422\_Ant2

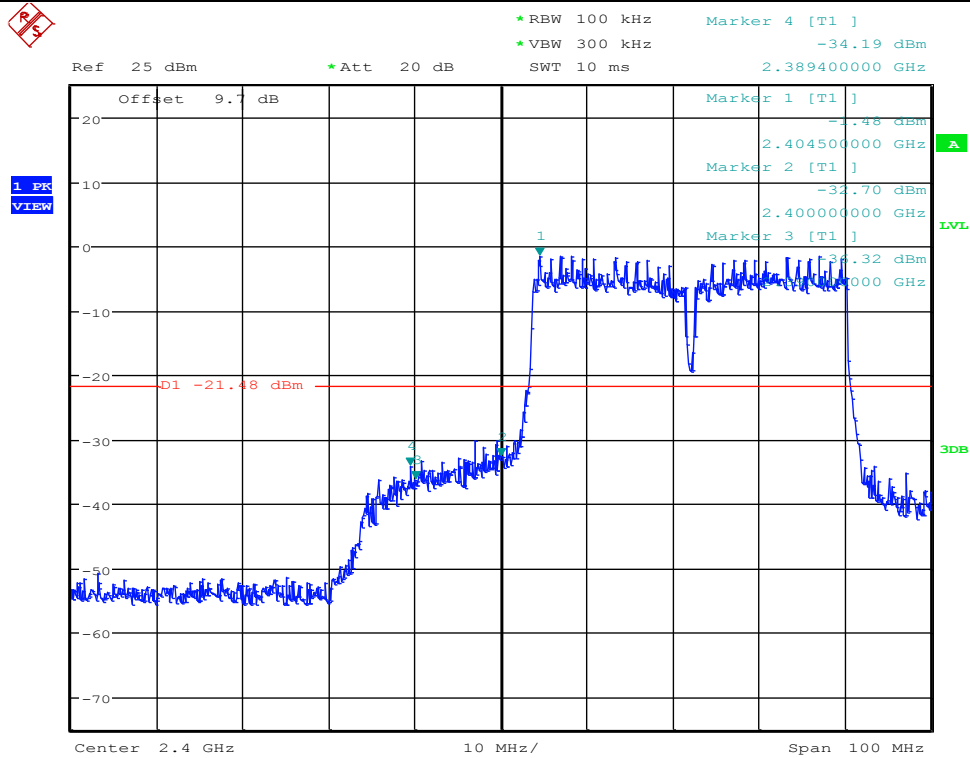


Band-edge for RF Conducted Emissions\_11N40MIMO\_2452\_Ant1

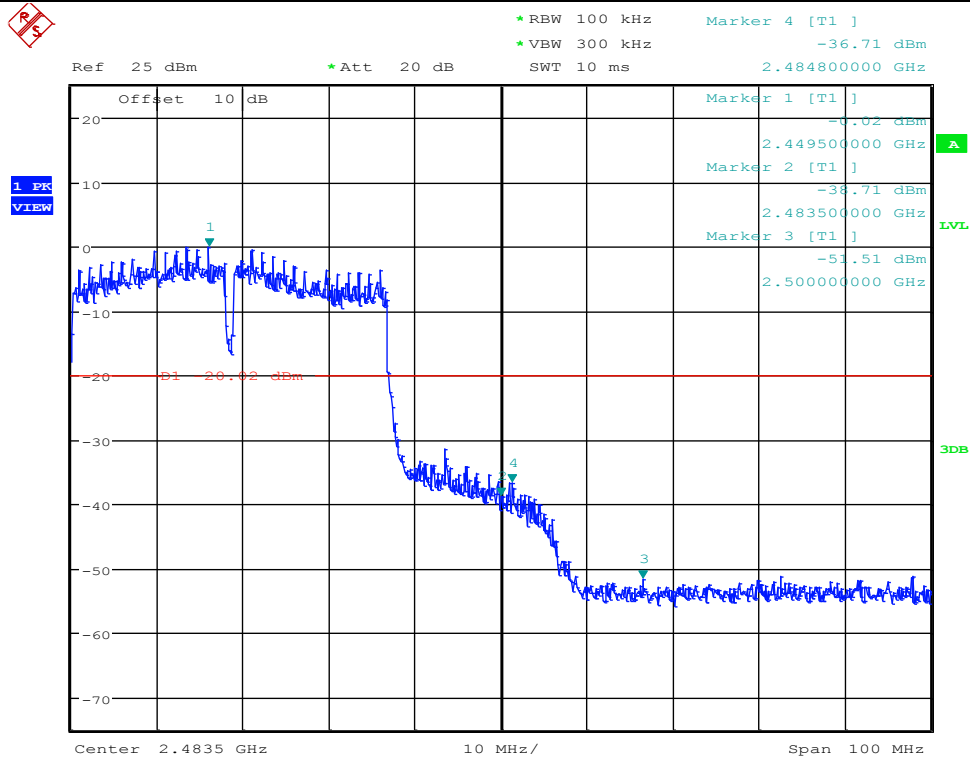


Date: 13.OCT.2017 18:53:52

Band-edge for RF Conducted Emissions\_11N40MIMO\_2452\_Ant2

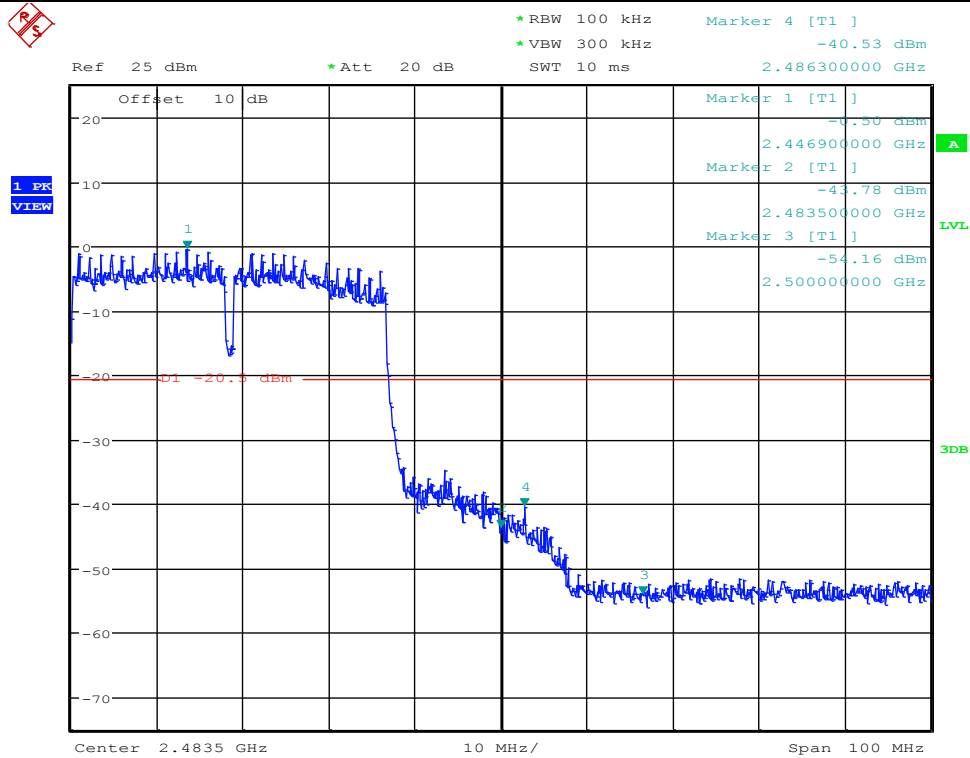


Date: 13.OCT.2017 18:56:24

Band-edge for RF Conducted Emissions\_11BMIMO\_2412\_Ant1

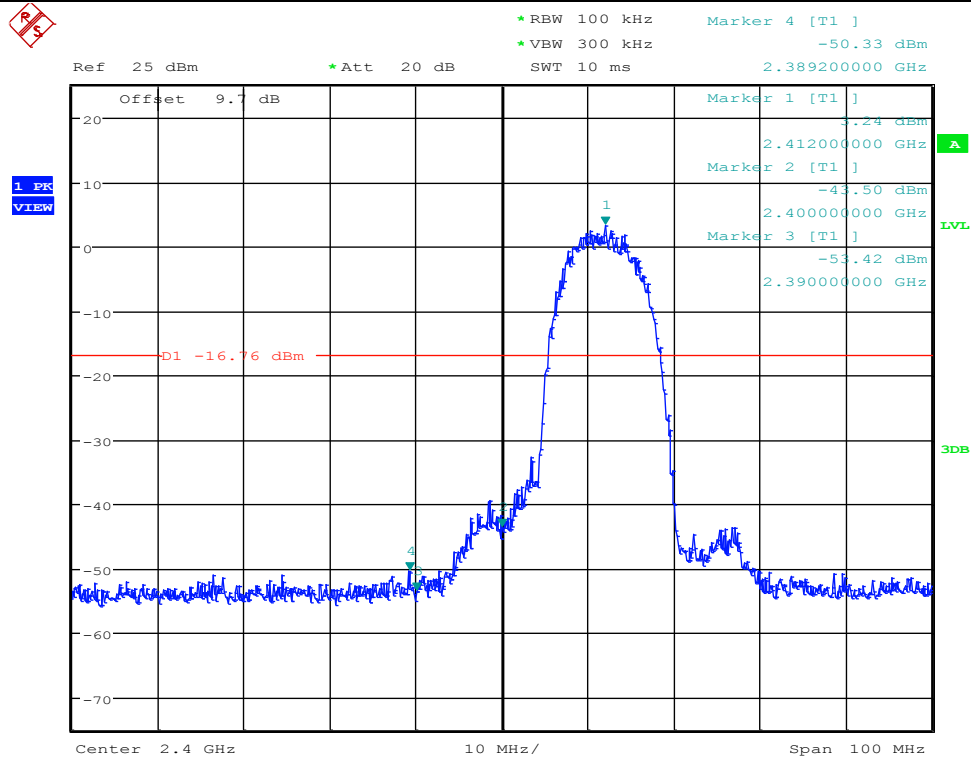


Date: 13.OCT.2017 16:29:30

Band-edge for RF Conducted Emissions\_11GMIMO\_2412\_Ant1

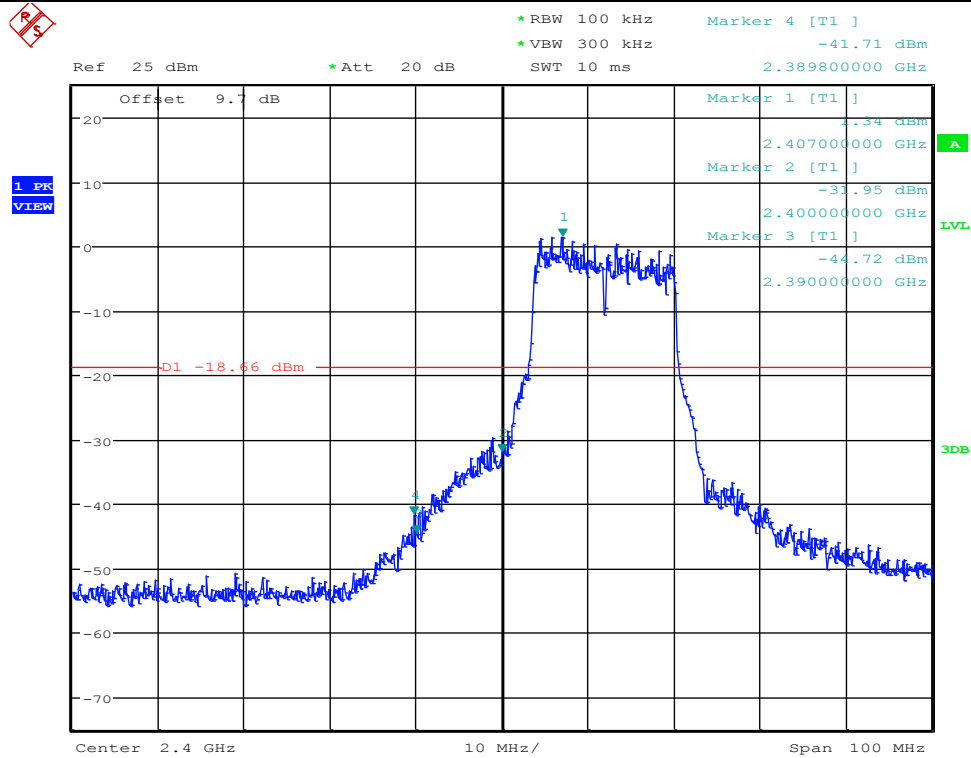


Date: 13.OCT.2017 16:51:06

Band-edge for RF Conducted Emissions\_11BMIMO\_2412\_Ant2

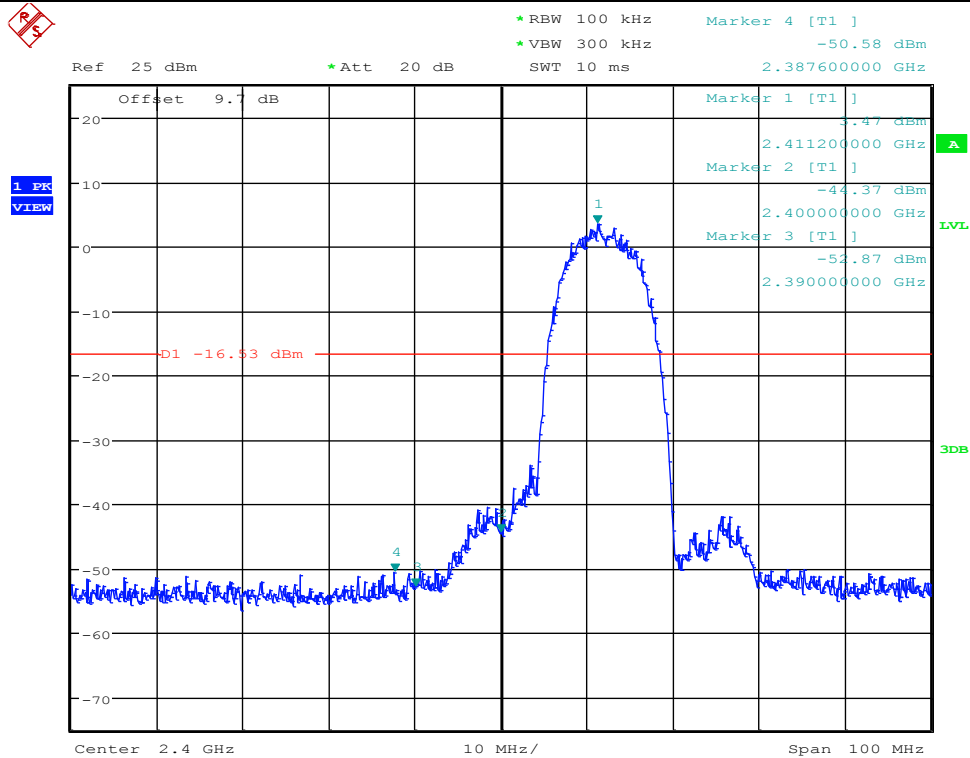


Date: 13.OCT.2017 16:32:01

Band-edge for RF Conducted Emissions\_11GMIMO\_2412\_Ant2

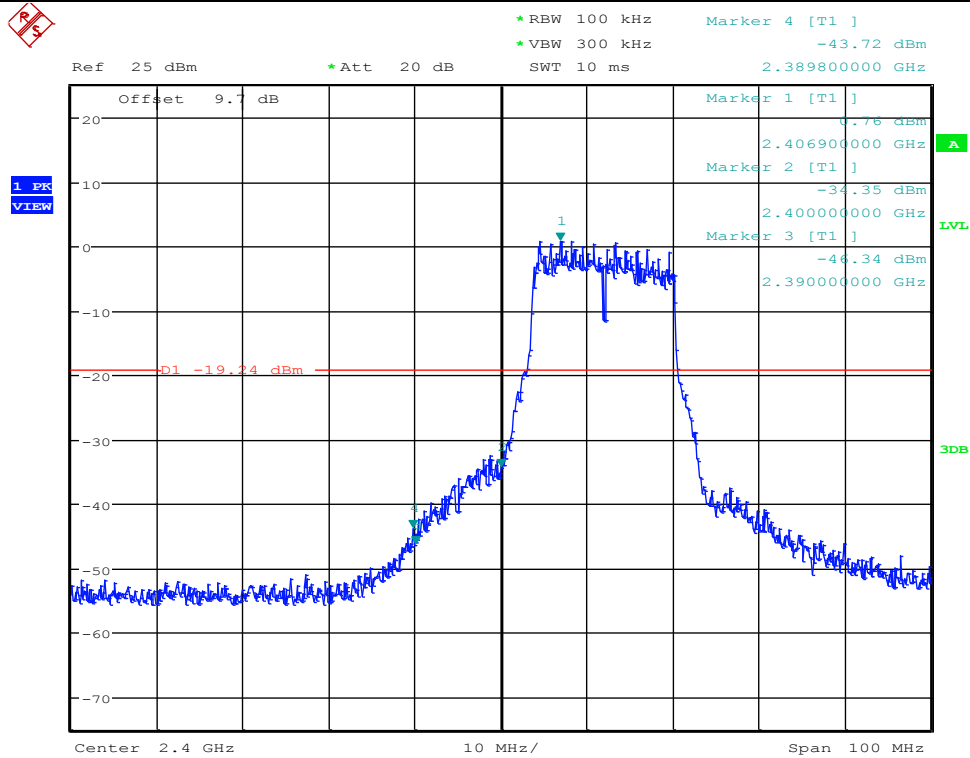


Date: 13.OCT.2017 16:53:36

Band-edge for RF Conducted Emissions\_11BMIMO\_2462\_Ant1

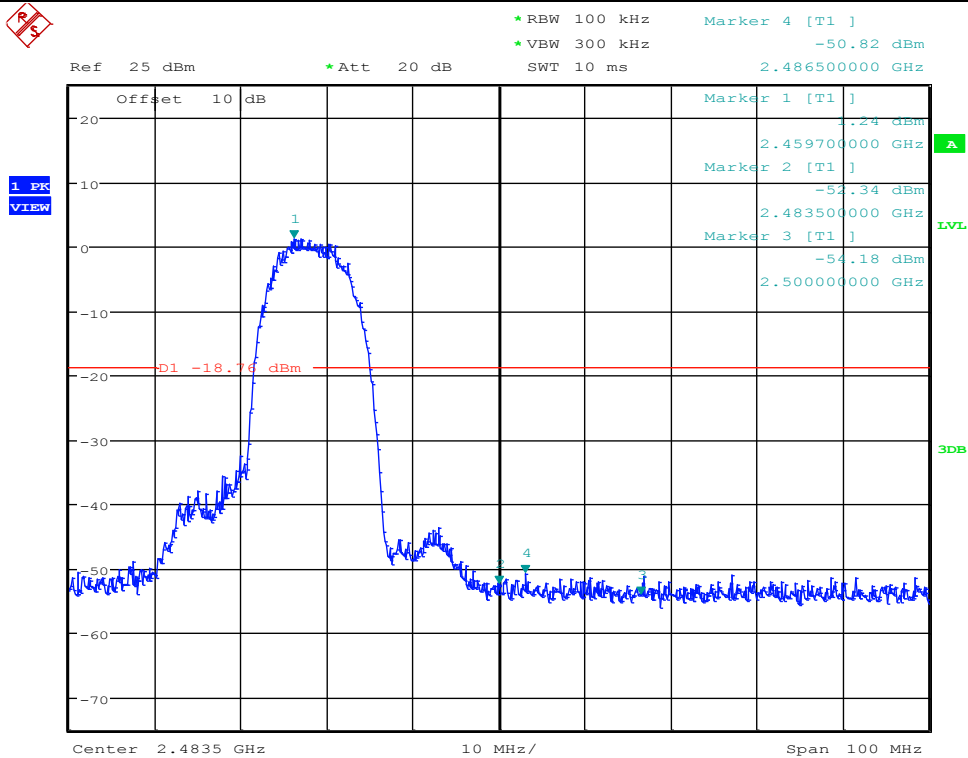


Date: 13.OCT.2017 16:44:12

Band-edge for RF Conducted Emissions\_11GMIMO\_2462\_Ant1

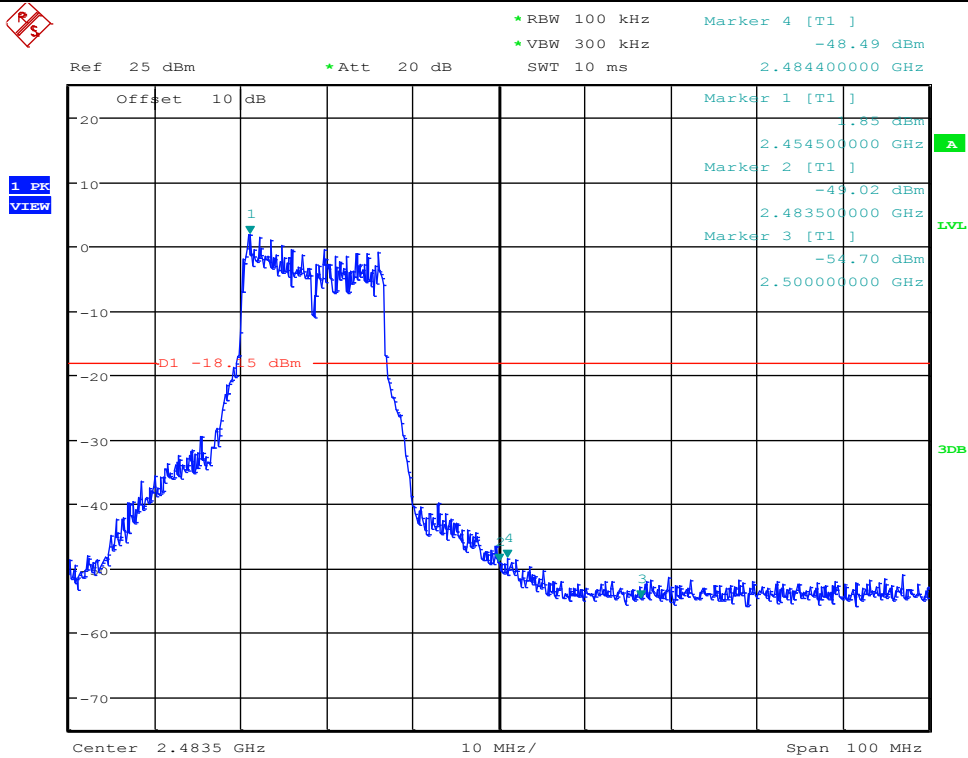


Date: 13.OCT.2017 17:41:29

Band-edge for RF Conducted Emissions\_11BMIMO\_2462\_Ant2

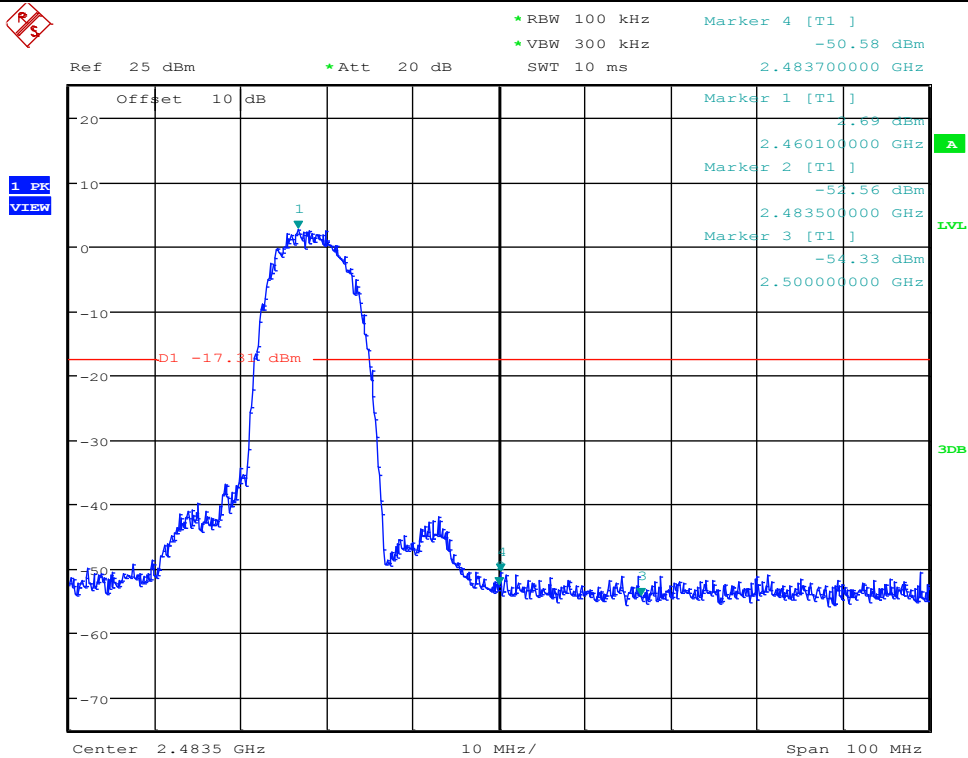



Date: 13.OCT.2017 16:46:43

Band-edge for RF Conducted Emissions\_11GMIMO\_2462\_Ant2

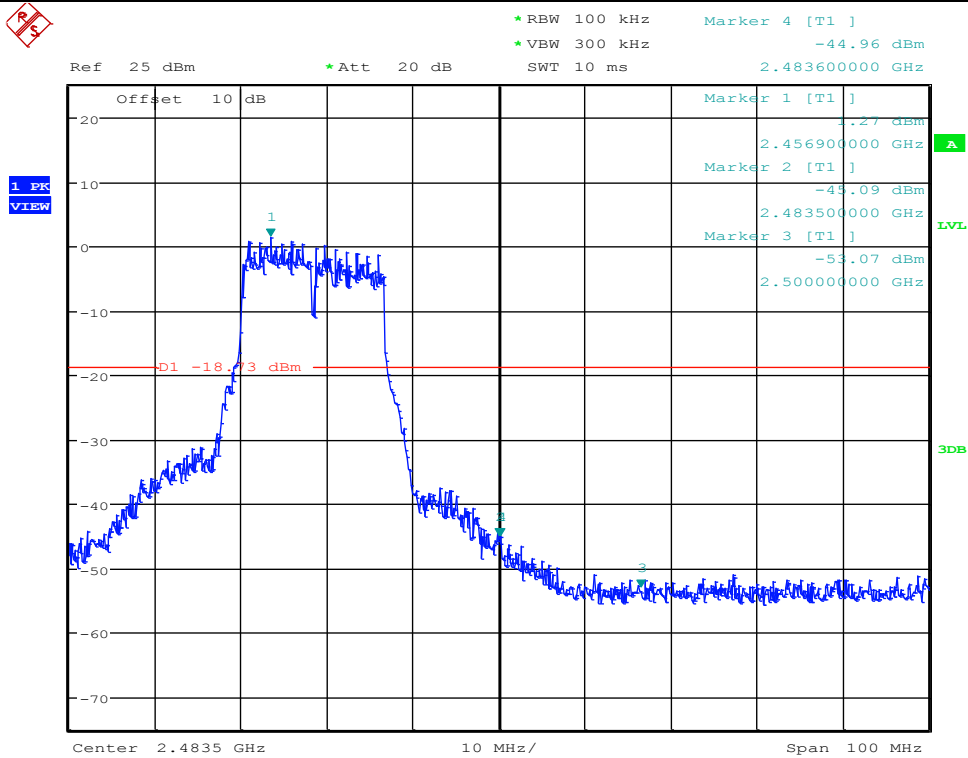


Date: 13.OCT.2017 17:44:00

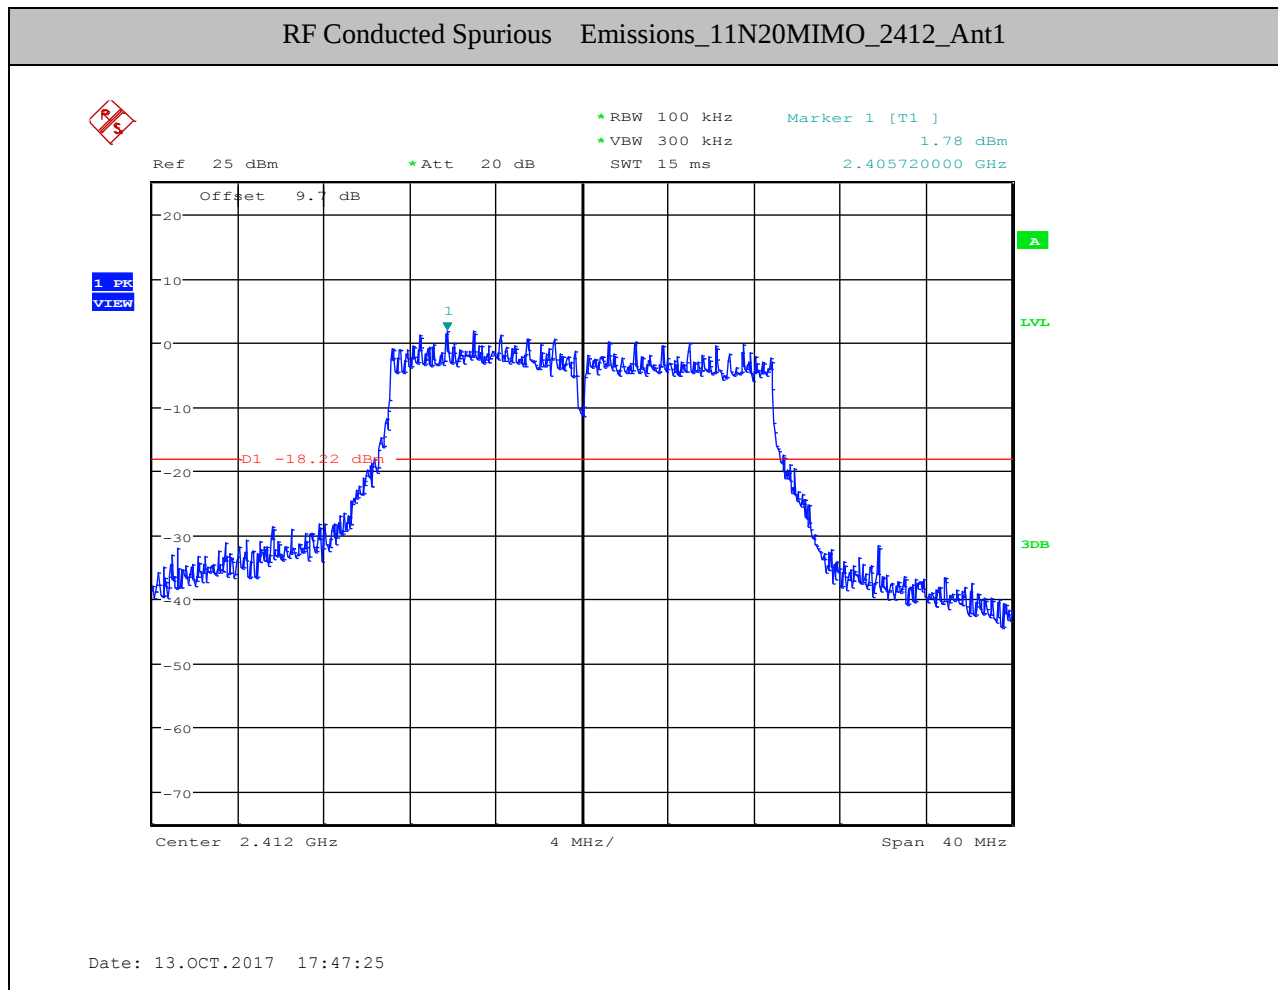

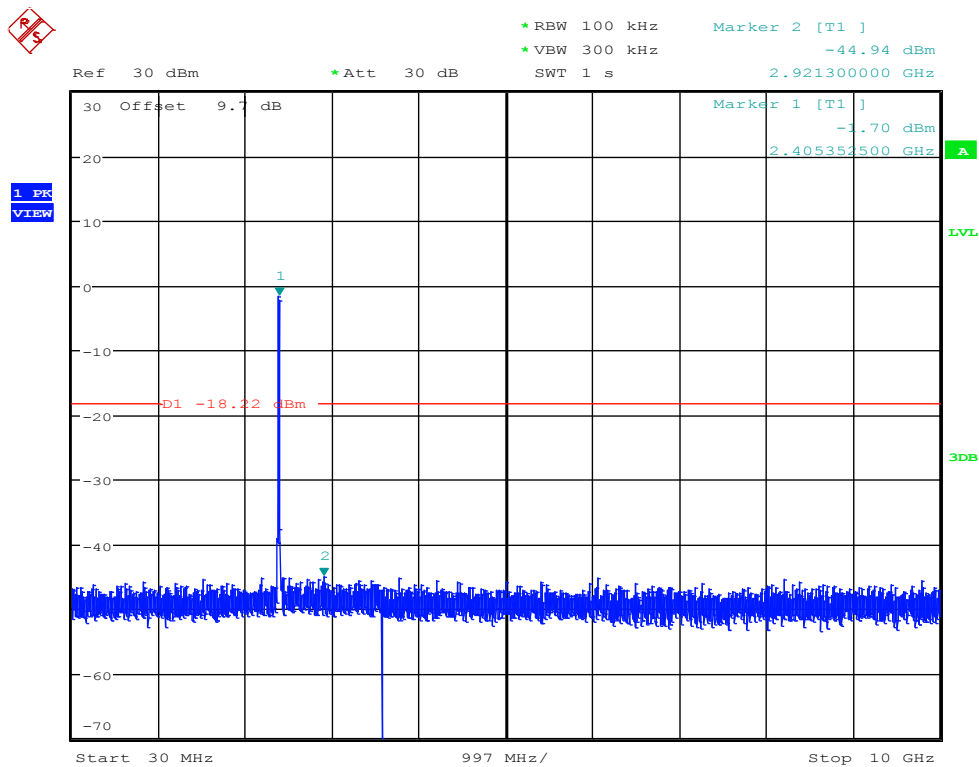


Date: 13.OCT.2017 17:47:37

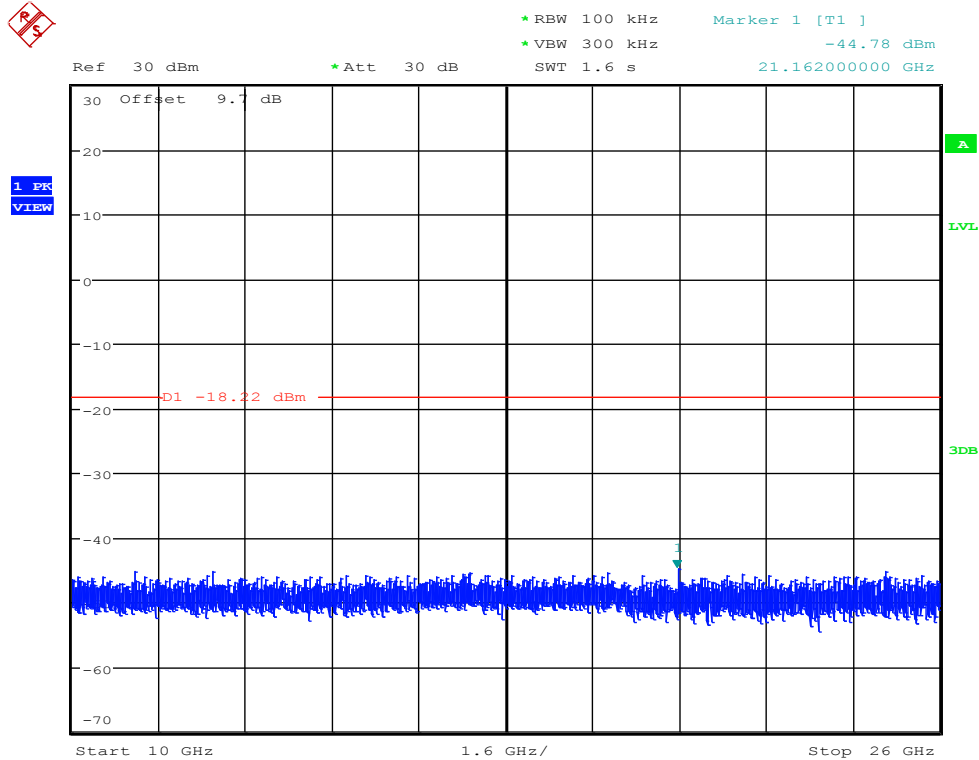


Date: 13.OCT.2017 17:47:47


RF Conducted Spurious Emissions\_11N20MIMO\_2412\_Ant2

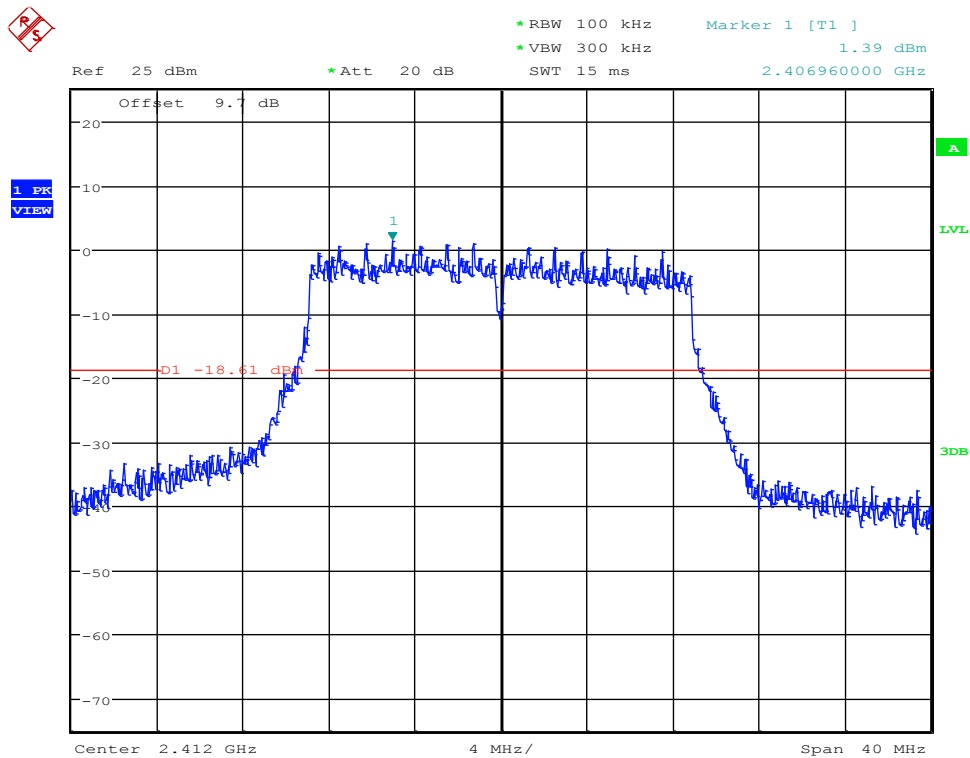

Date: 13.OCT.2017 17:49:56

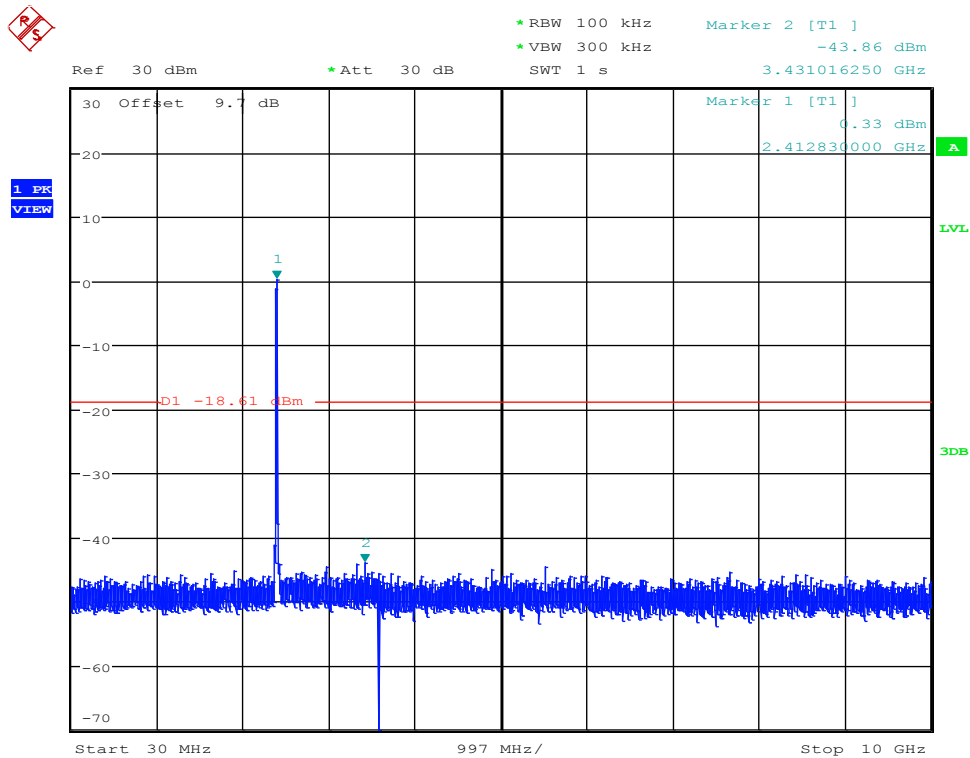


Date: 13.OCT.2017 17:50:08

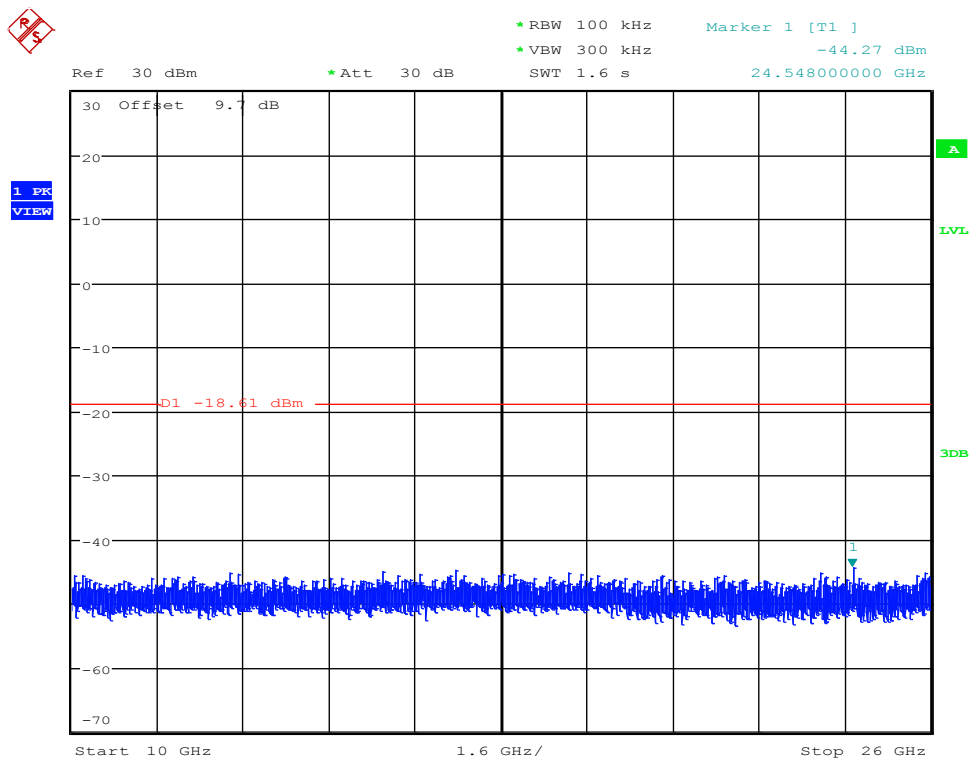


Date: 13.OCT.2017 17:50:18


RF Conducted Spurious Emissions\_11N20MIMO\_2462\_Ant1

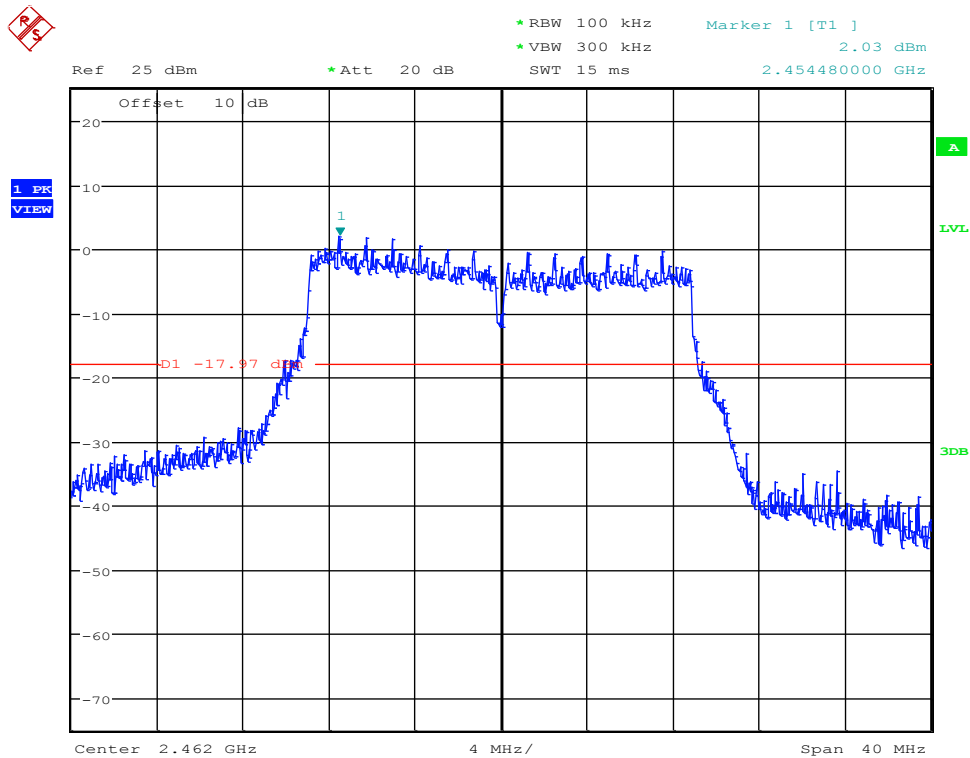

Date: 13.OCT.2017 18:38:09

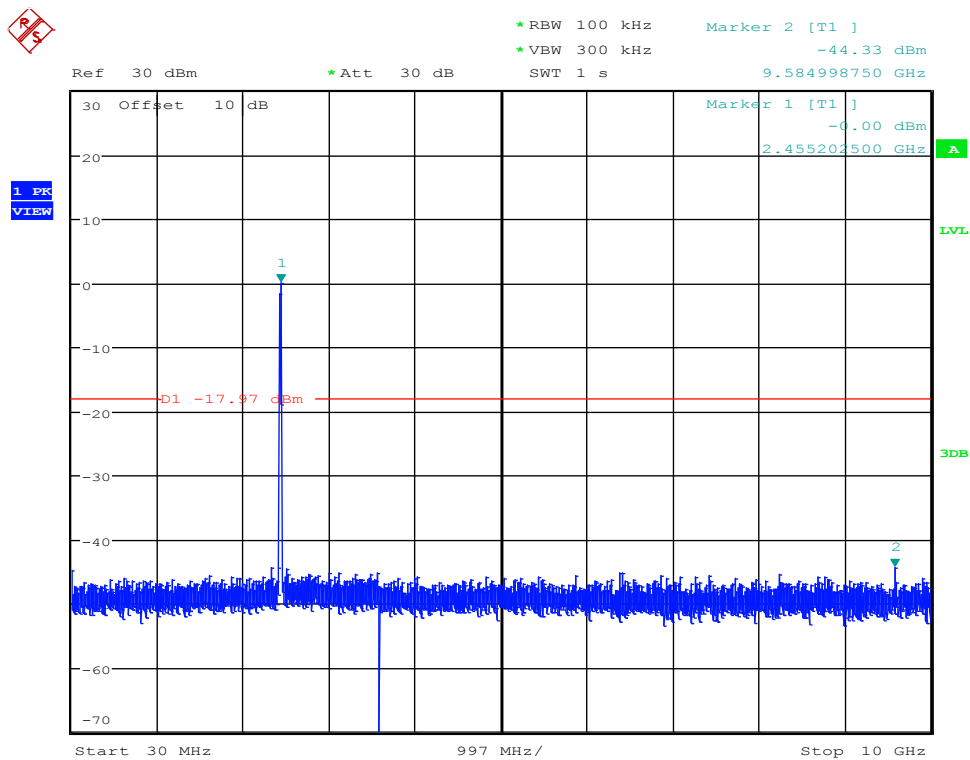


Date: 13.OCT.2017 18:38:21

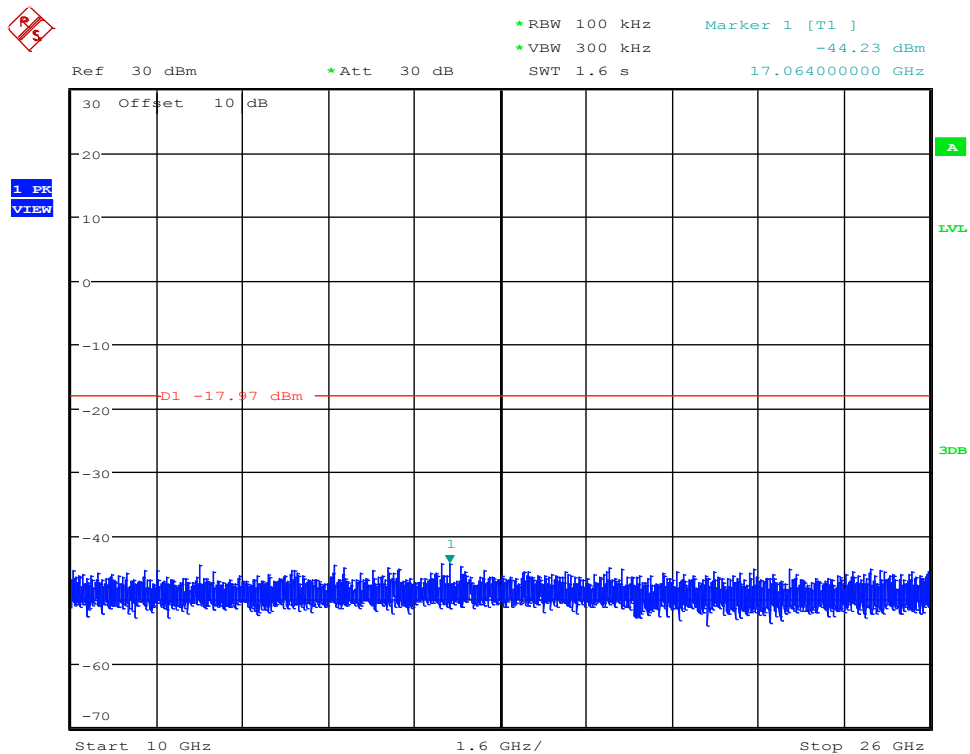


Date: 13.OCT.2017 18:38:31


RF Conducted Spurious Emissions\_11N20MIMO\_2462\_Ant2

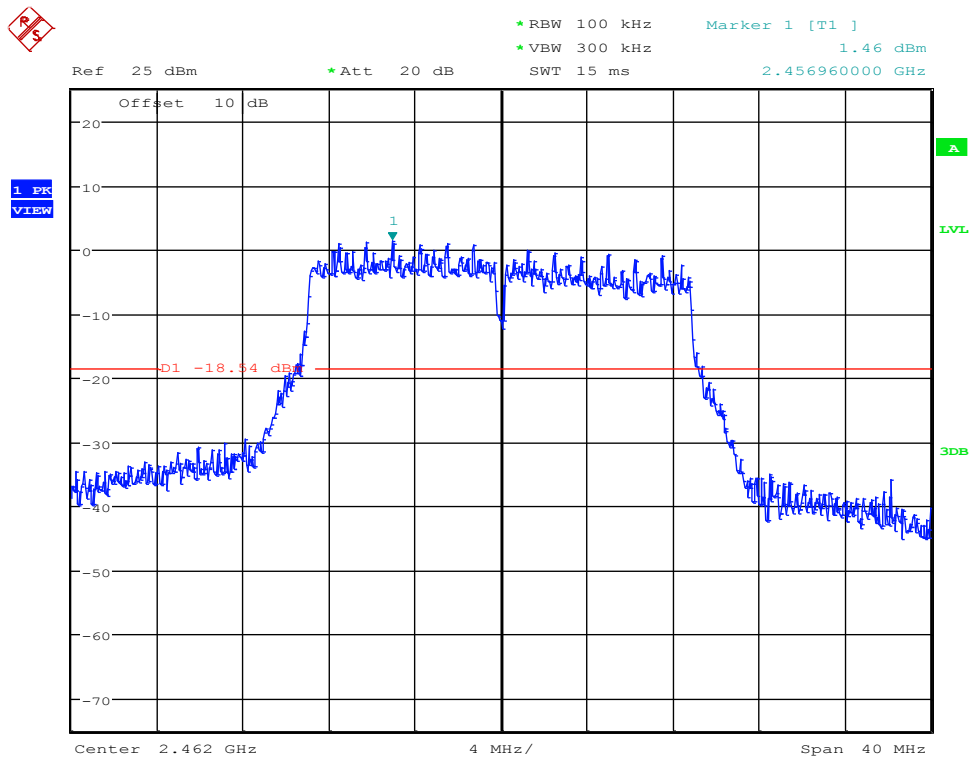

Date: 13.OCT.2017 18:40:41

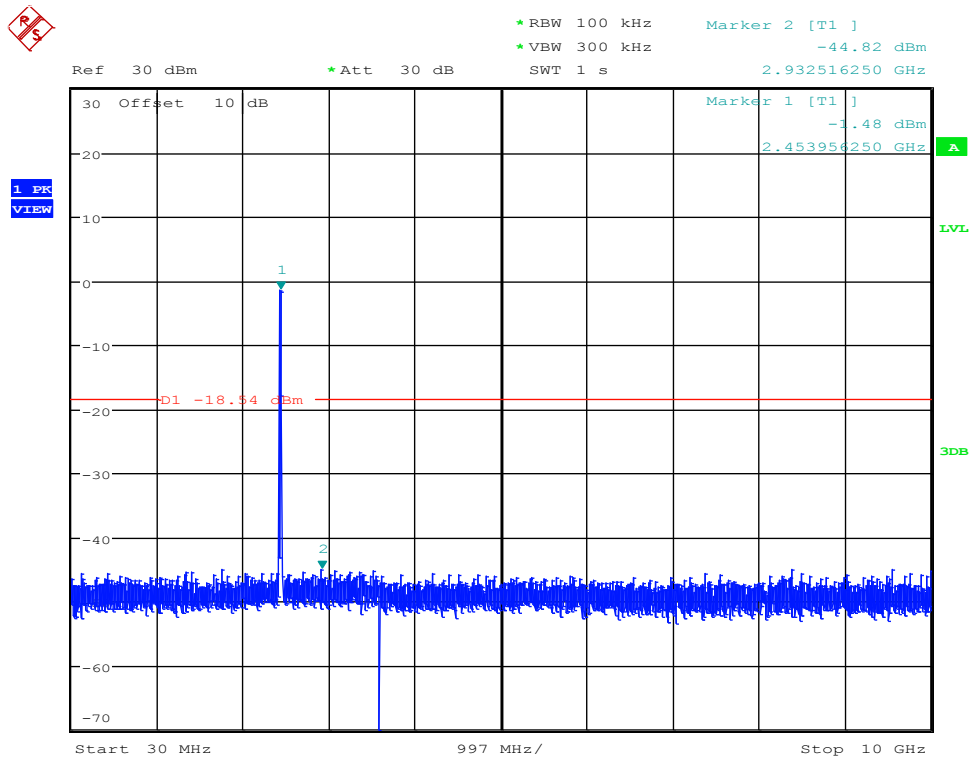


Date: 13.OCT.2017 18:40:52

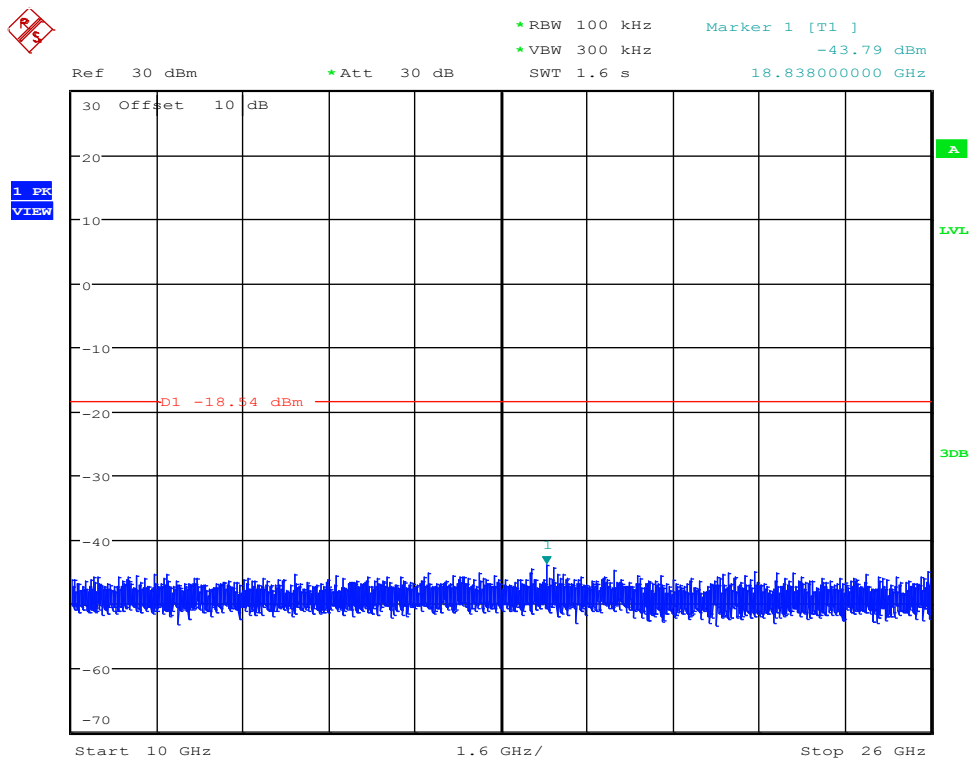


Date: 13.OCT.2017 18:41:02


RF Conducted Spurious Emissions\_11N40MIMO\_2422\_Ant1

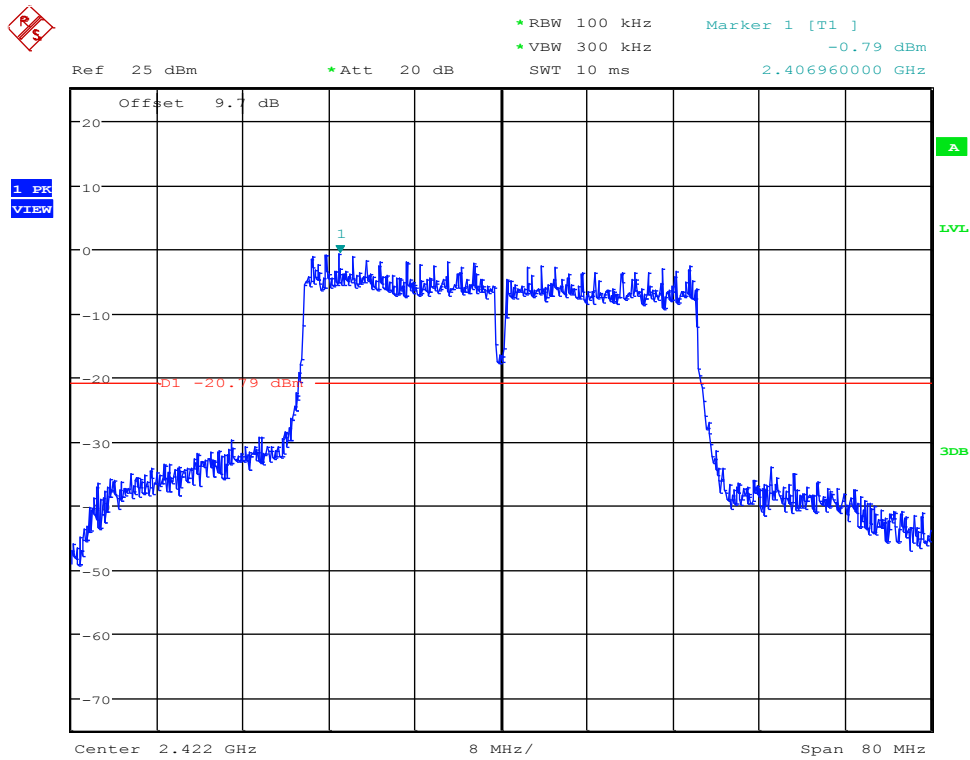

Date: 13.OCT.2017 18:44:13

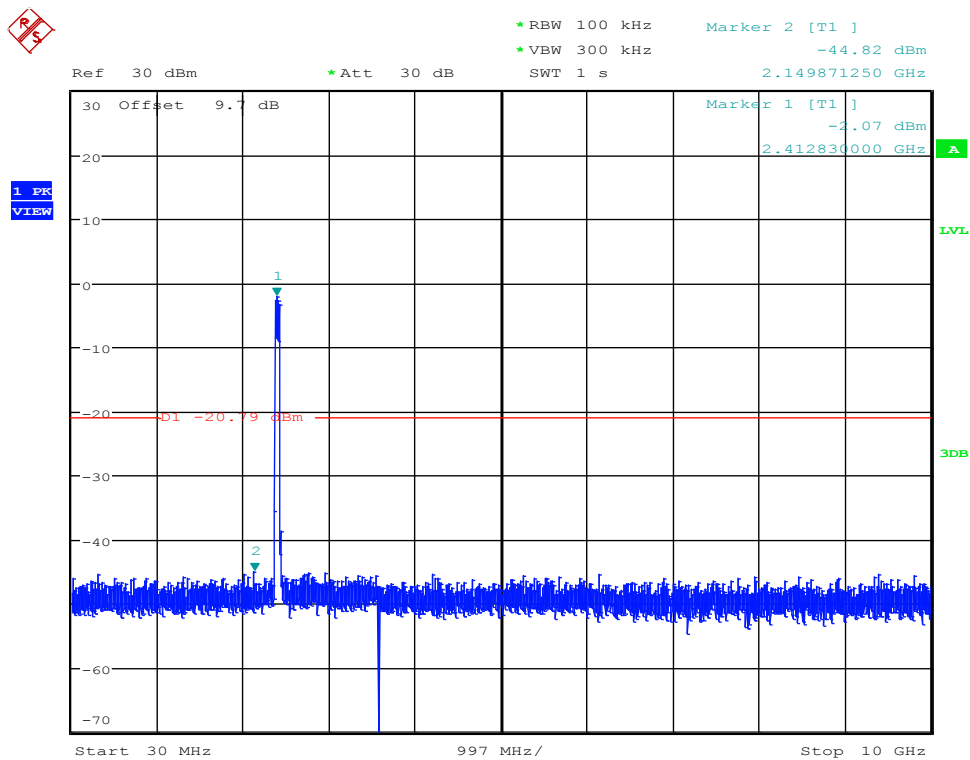


Date: 13.OCT.2017 18:44:24

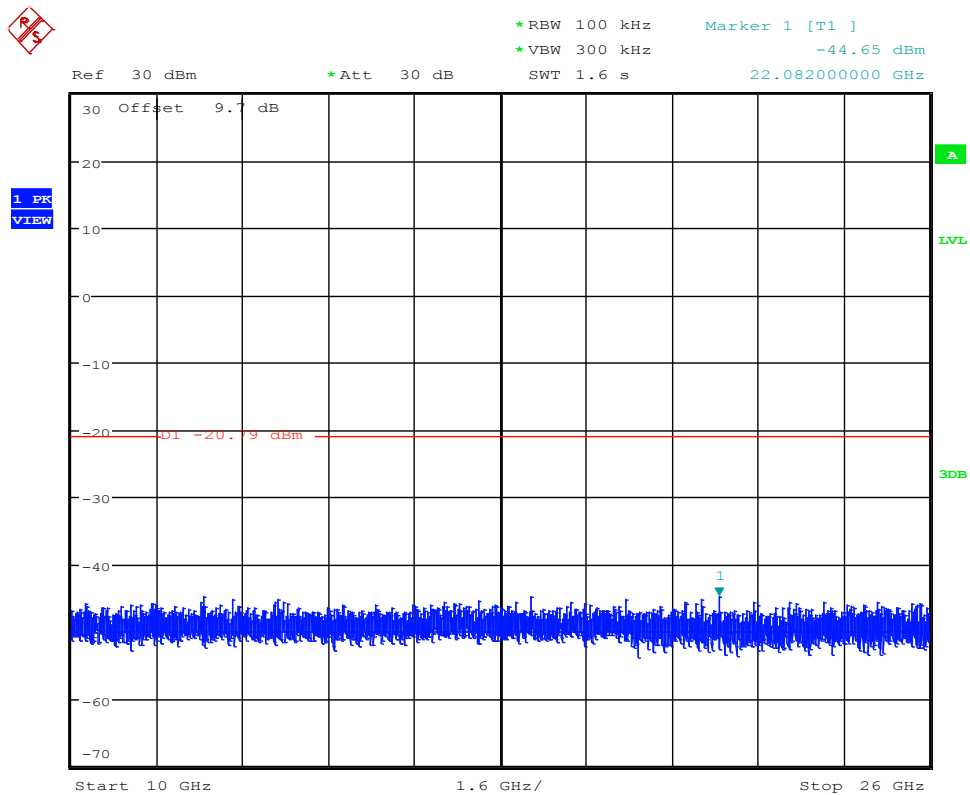


Date: 13.OCT.2017 18:44:35


RF Conducted Spurious Emissions\_11N40MIMO\_2422\_Ant2

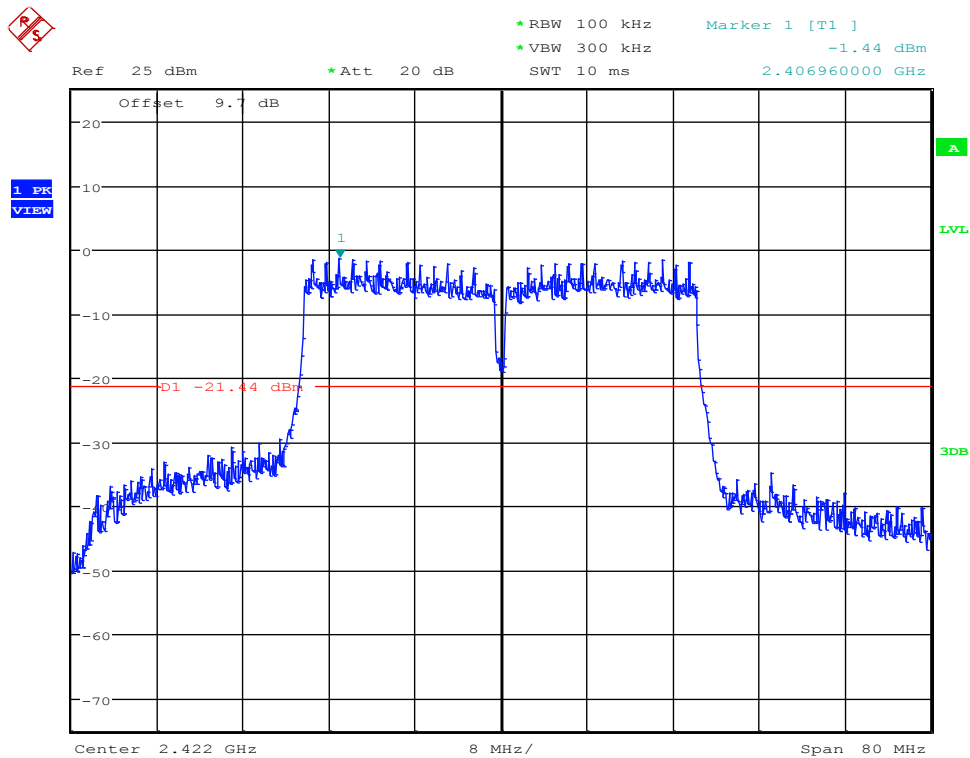

Date: 13.OCT.2017 18:46:44

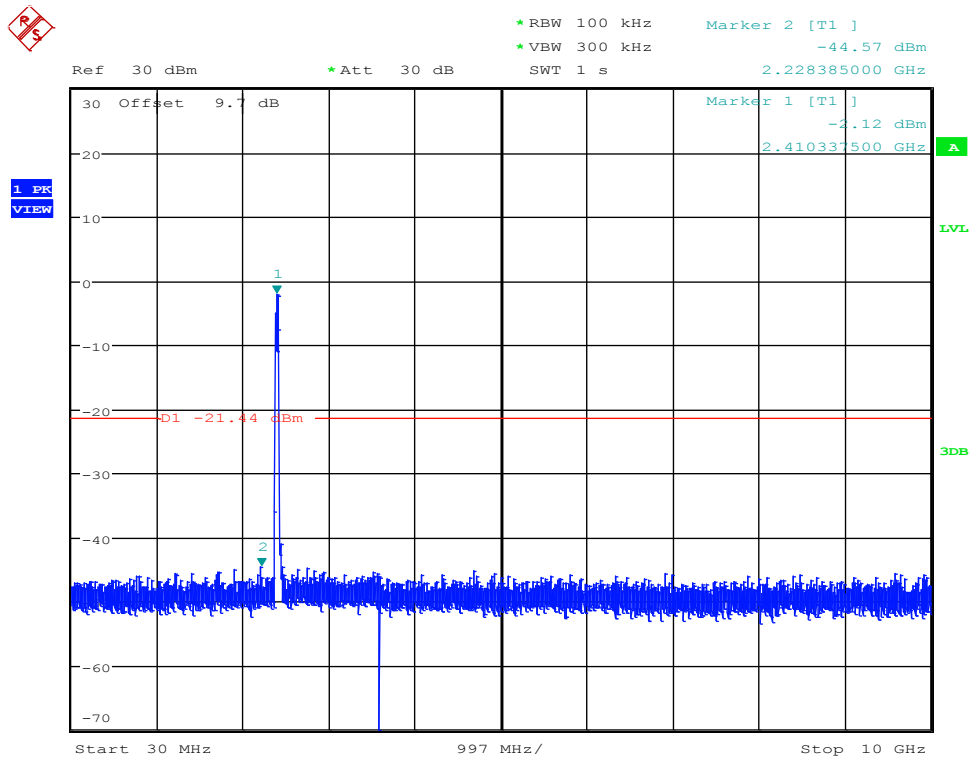


Date: 13.OCT.2017 18:46:56

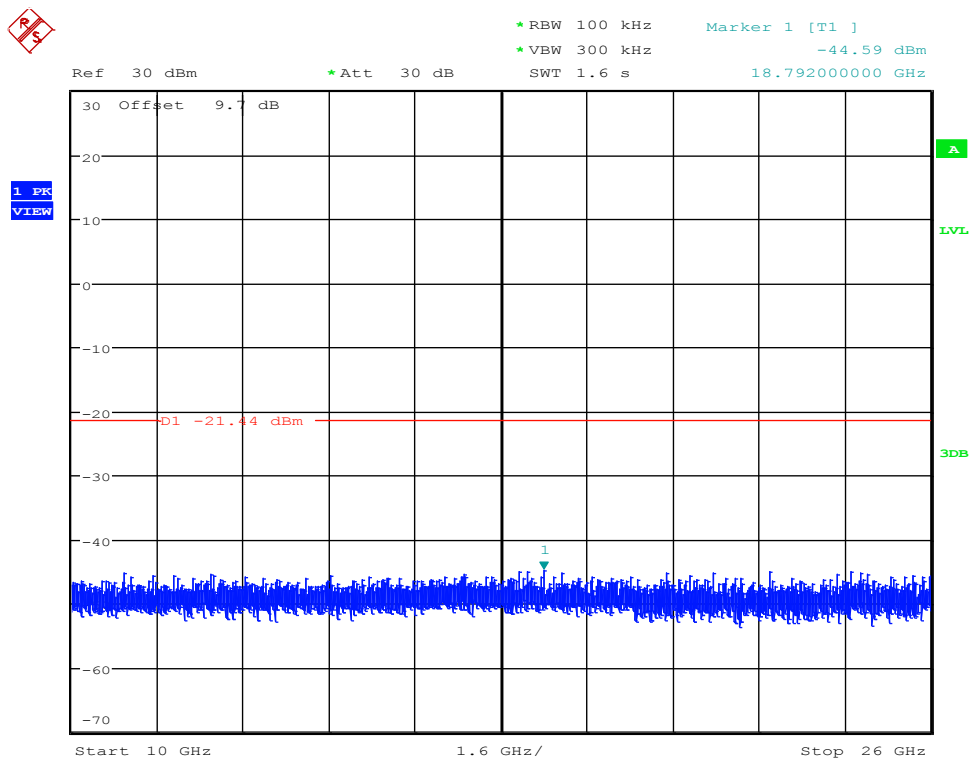


Date: 13.OCT.2017 18:47:06


RF Conducted Spurious Emissions\_11N40MIMO\_2452\_Ant1

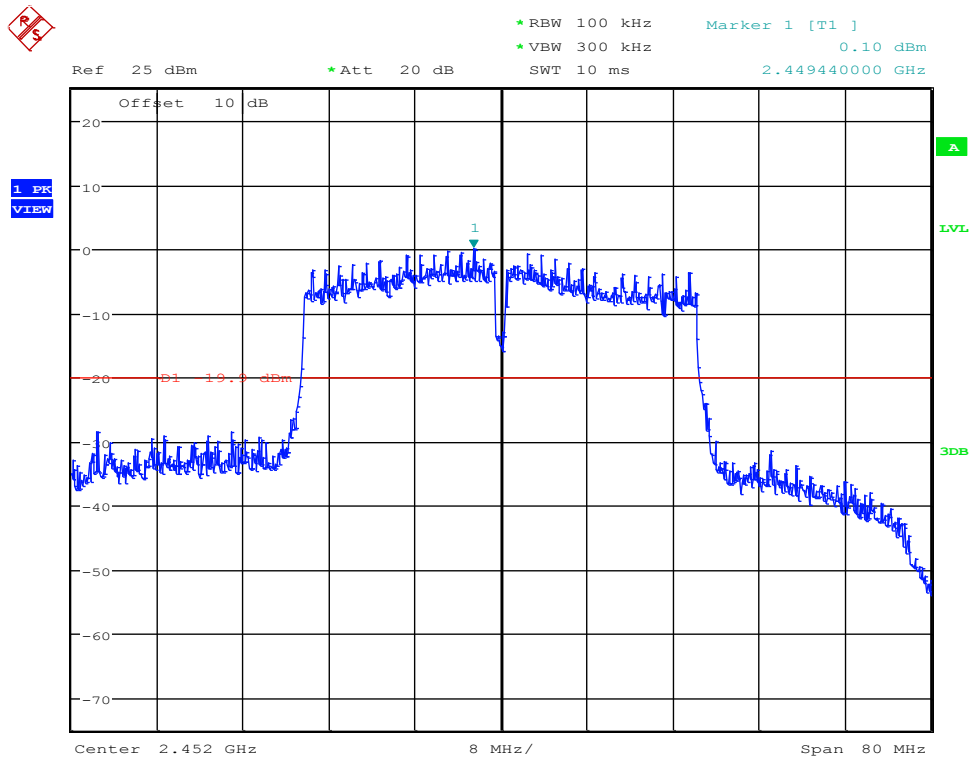

Date: 13.OCT.2017 18:54:08

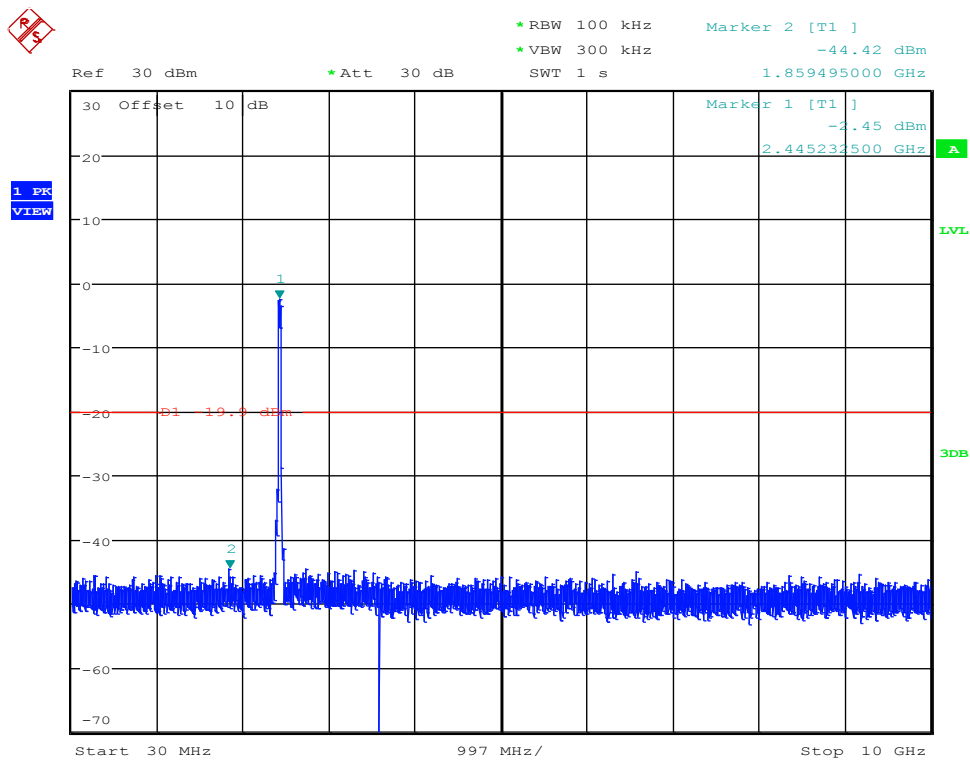


Date: 13.OCT.2017 18:54:20

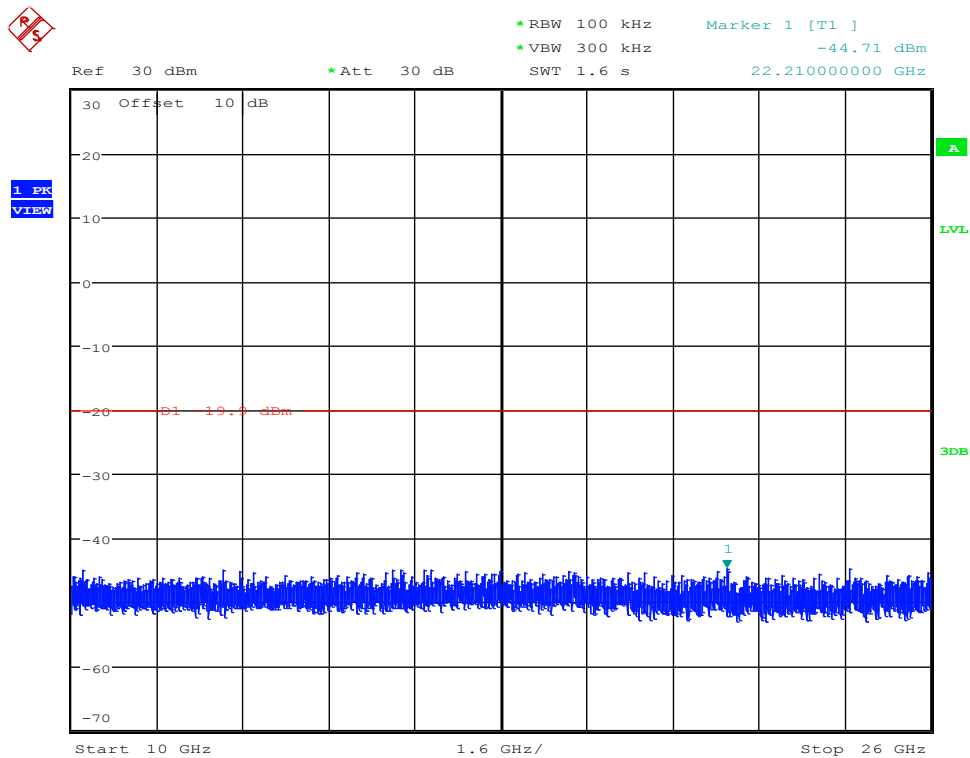


Date: 13.OCT.2017 18:54:30


RF Conducted Spurious Emissions\_11N40MIMO\_2452\_Ant2

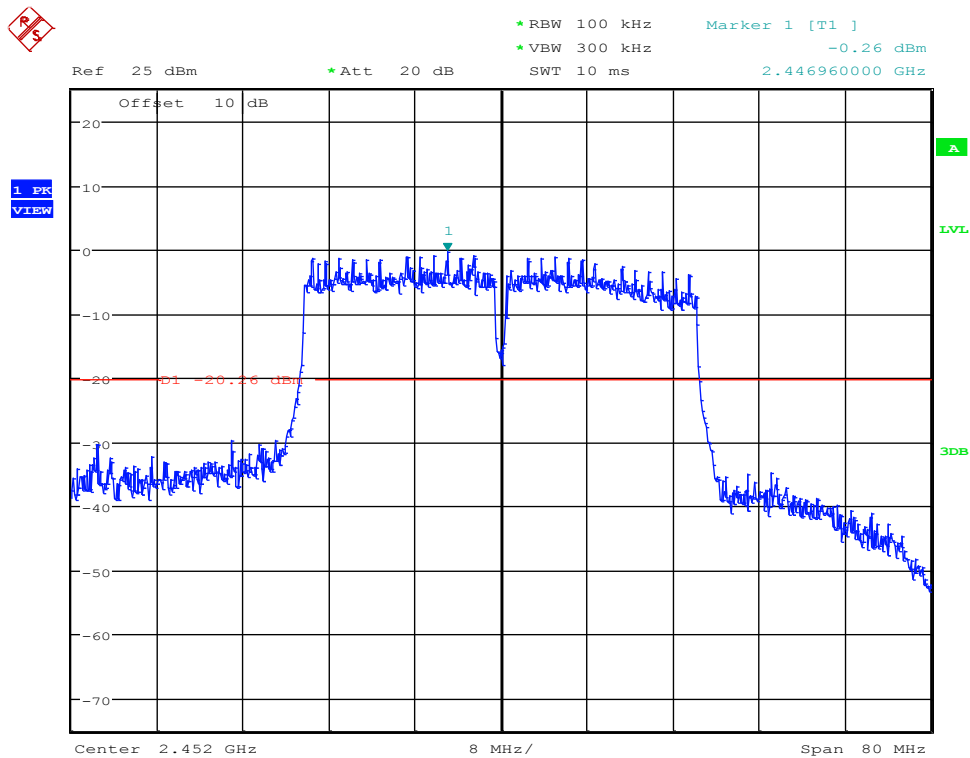

Date: 13.OCT.2017 18:56:40

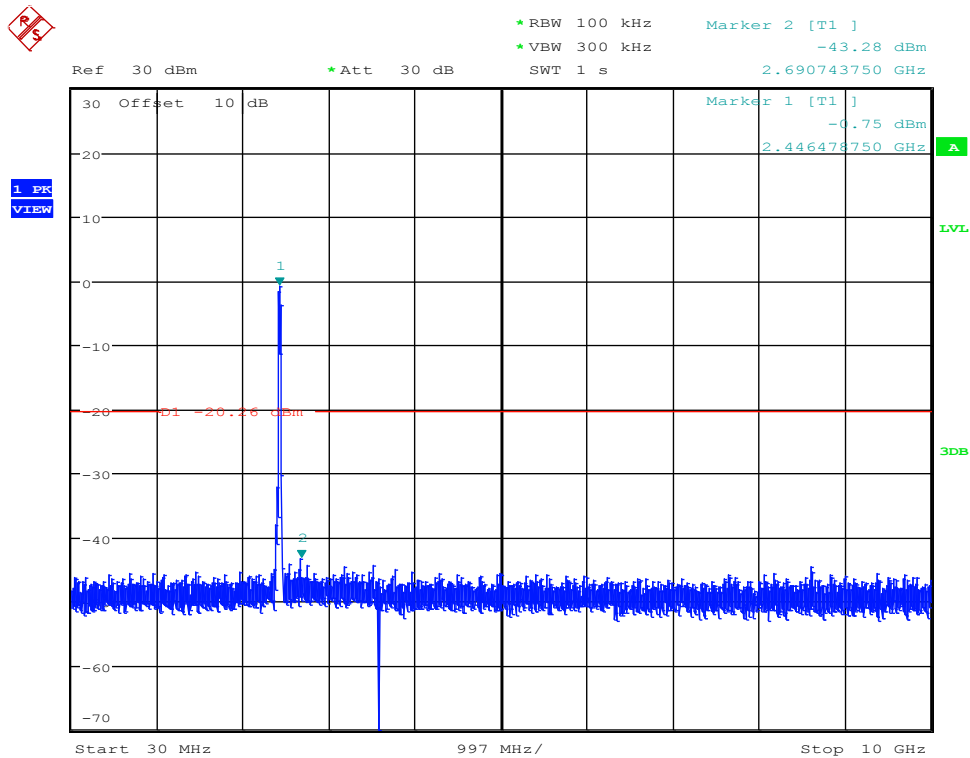


Date: 13.OCT.2017 18:56:51

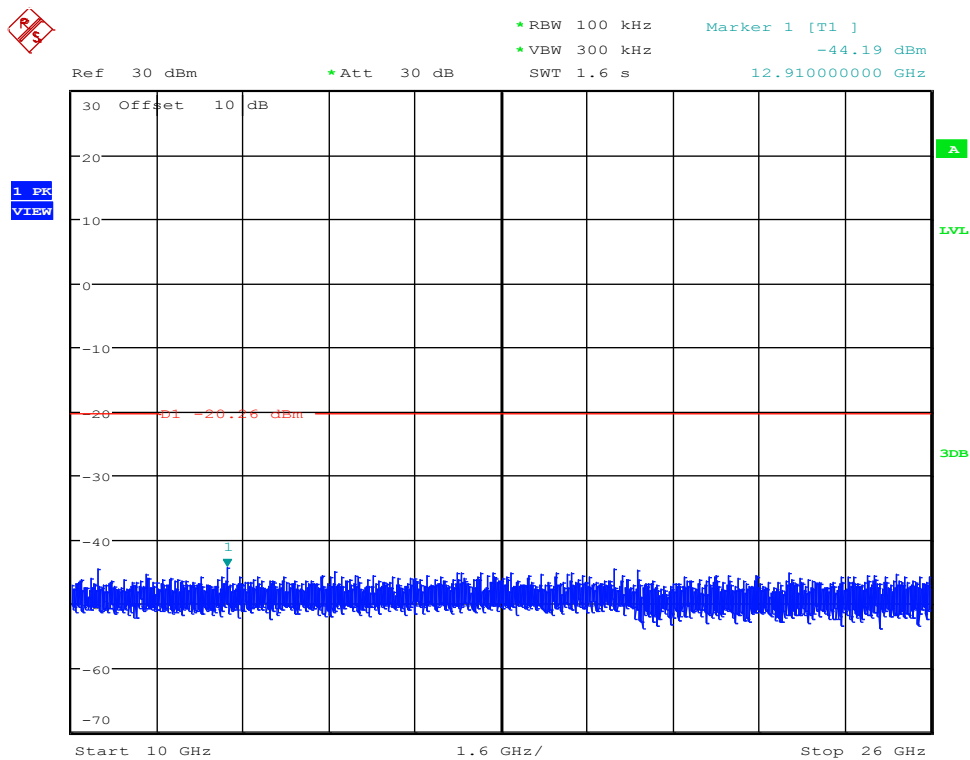


Date: 13.OCT.2017 18:57:02


RF Conducted Spurious Emissions\_11GMIMO\_2412\_Ant1

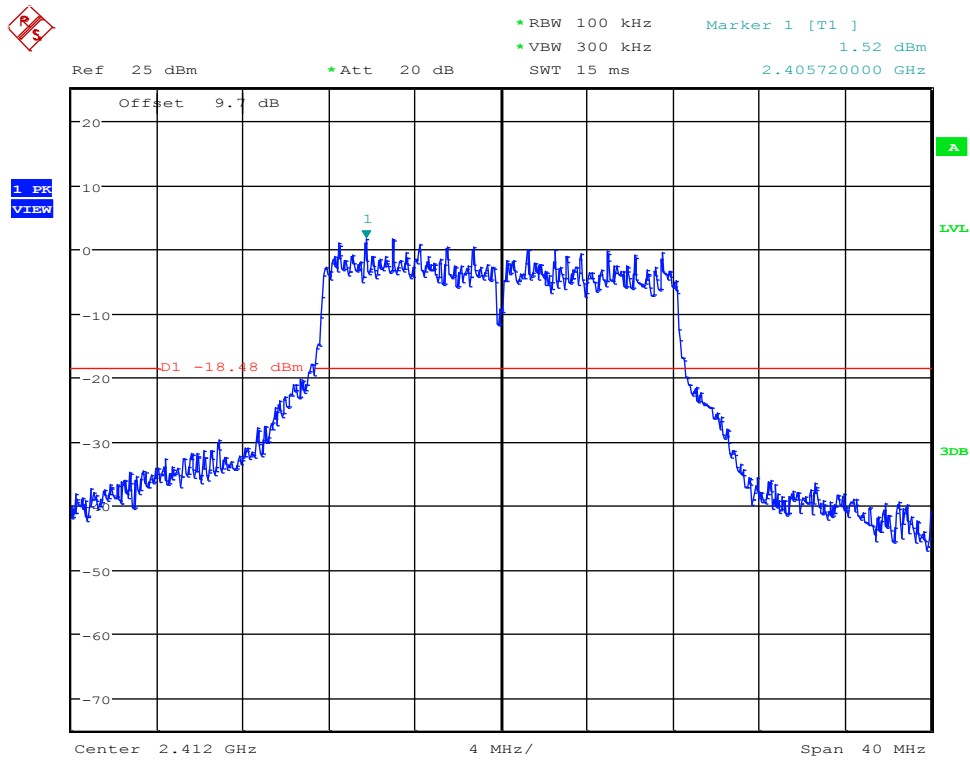

Date: 13.OCT.2017 16:51:22

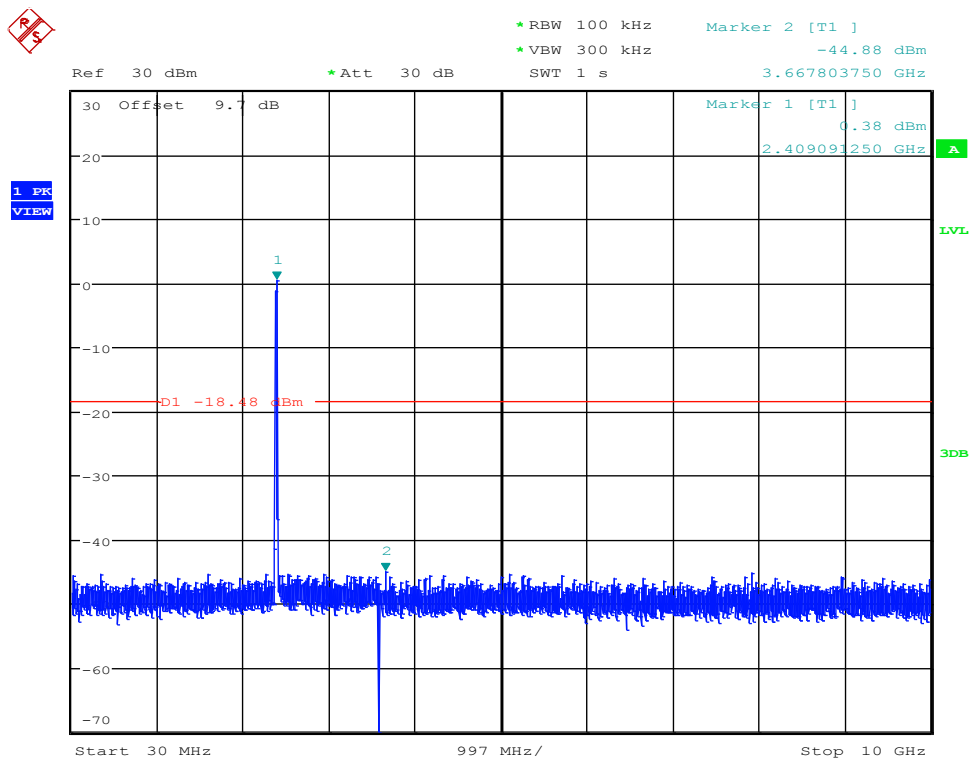


Date: 13.OCT.2017 16:51:33

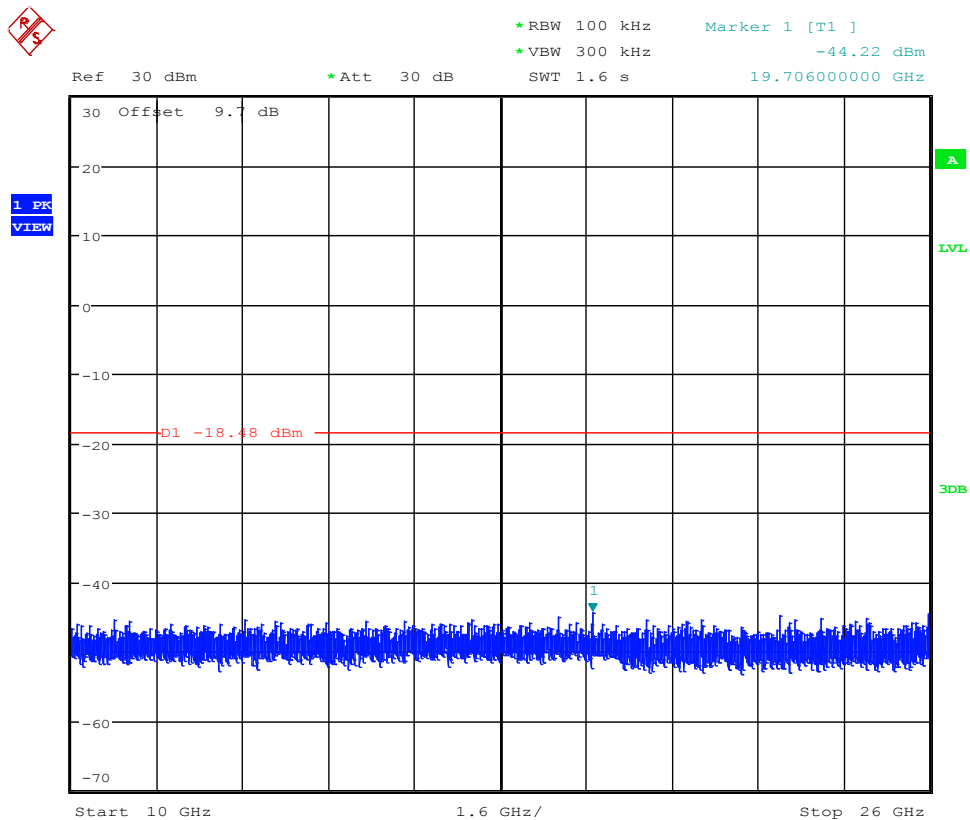


Date: 13.OCT.2017 16:51:43


RF Conducted Spurious Emissions\_11BMIMO\_2412\_Ant1

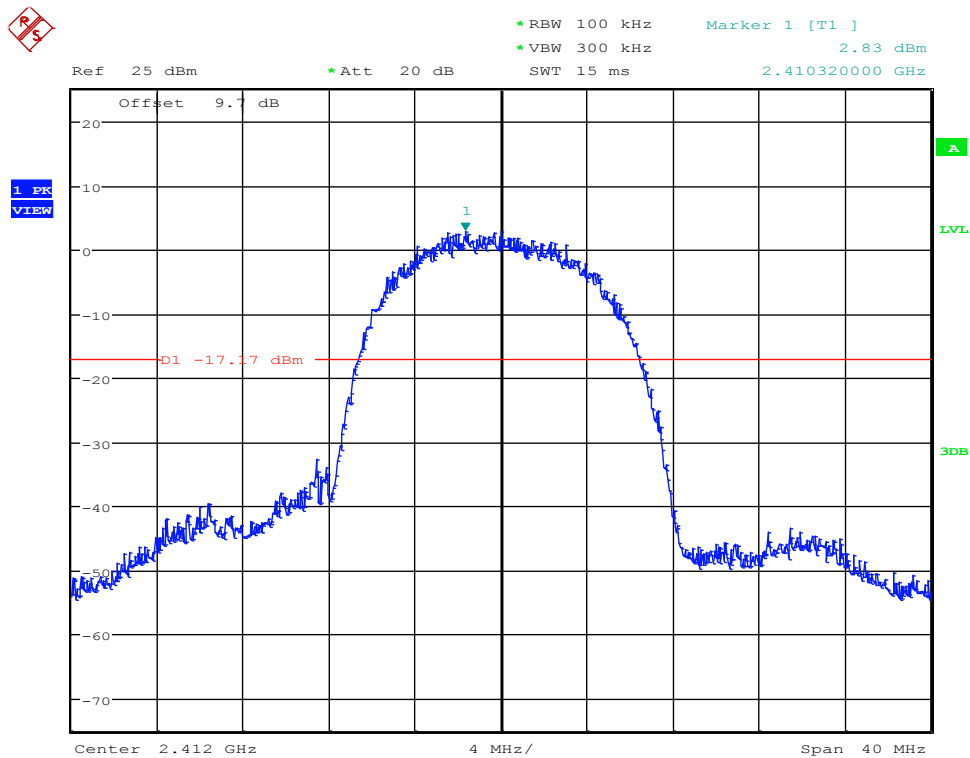

Date: 13.OCT.2017 16:29:46

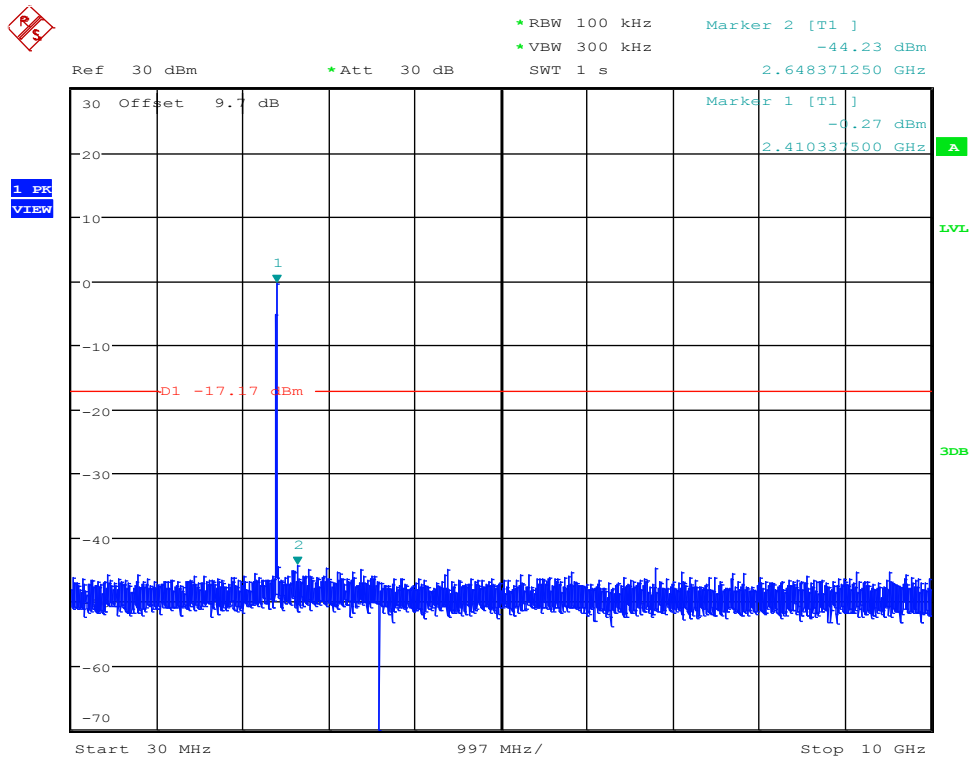


Date: 13.OCT.2017 16:29:57

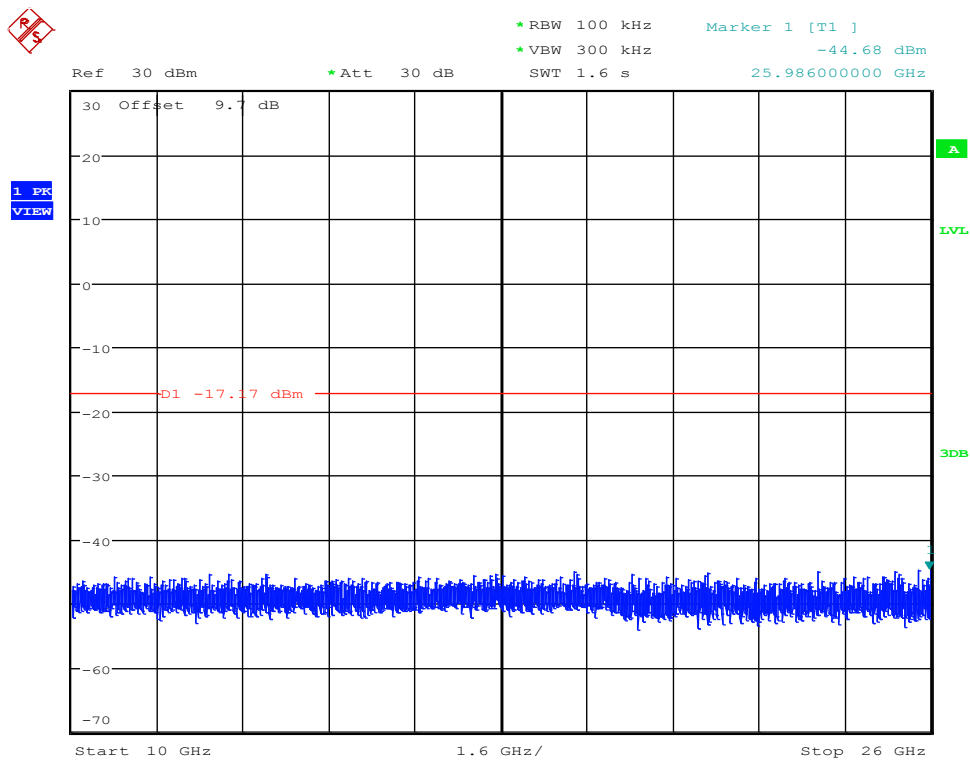


Date: 13.OCT.2017 16:30:07


RF Conducted Spurious Emissions\_11GMIMO\_2412\_Ant2

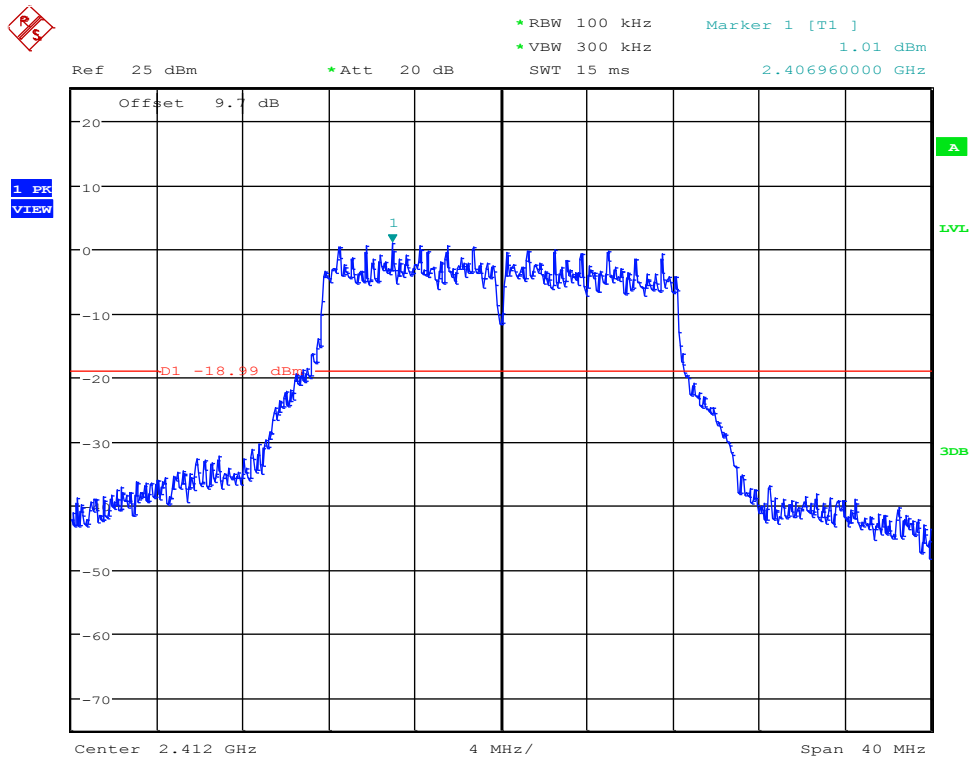

Date: 13.OCT.2017 16:53:52

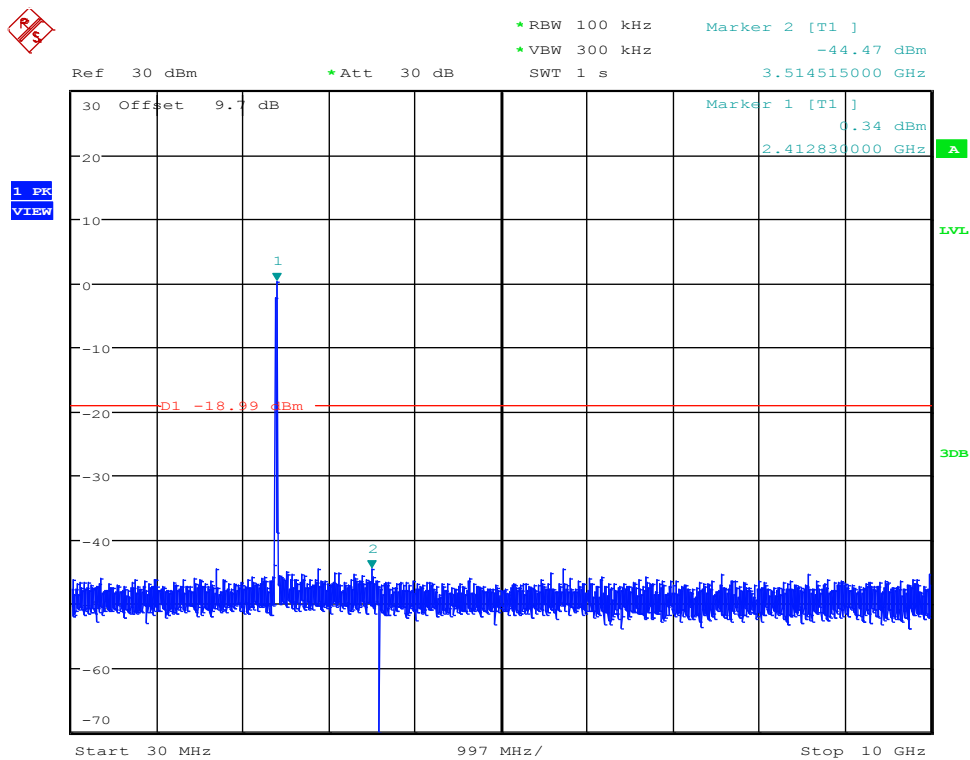


Date: 13.OCT.2017 16:54:04

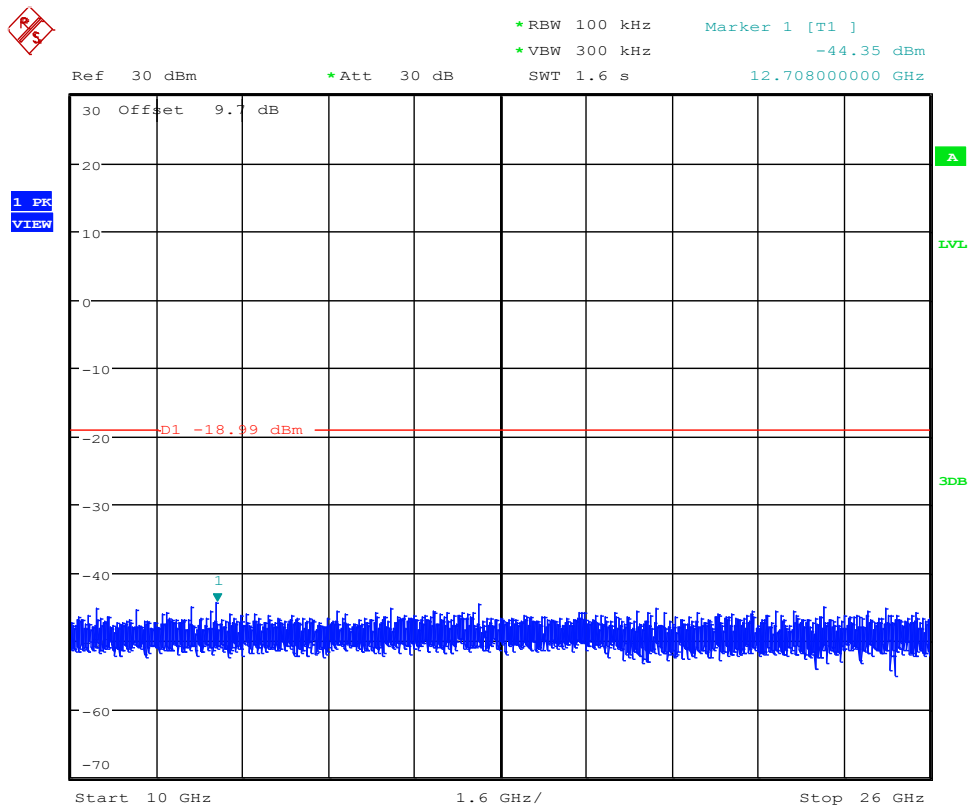


Date: 13.OCT.2017 16:54:13


RF Conducted Spurious Emissions\_11BMIMO\_2412\_Ant2

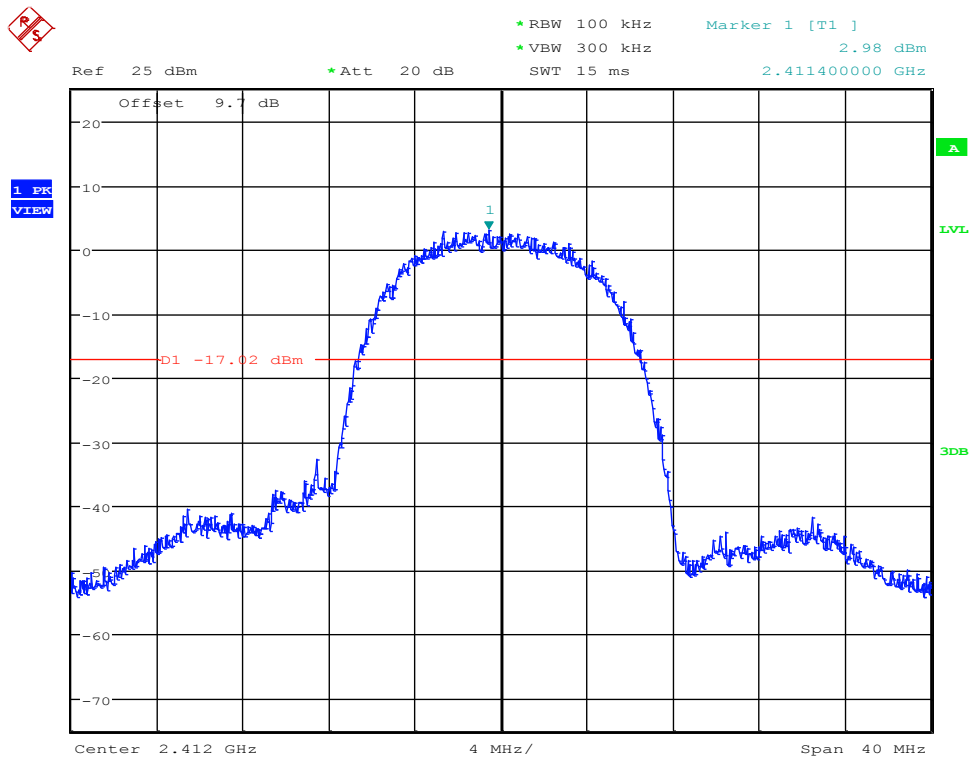

Date: 13.OCT.2017 16:32:16

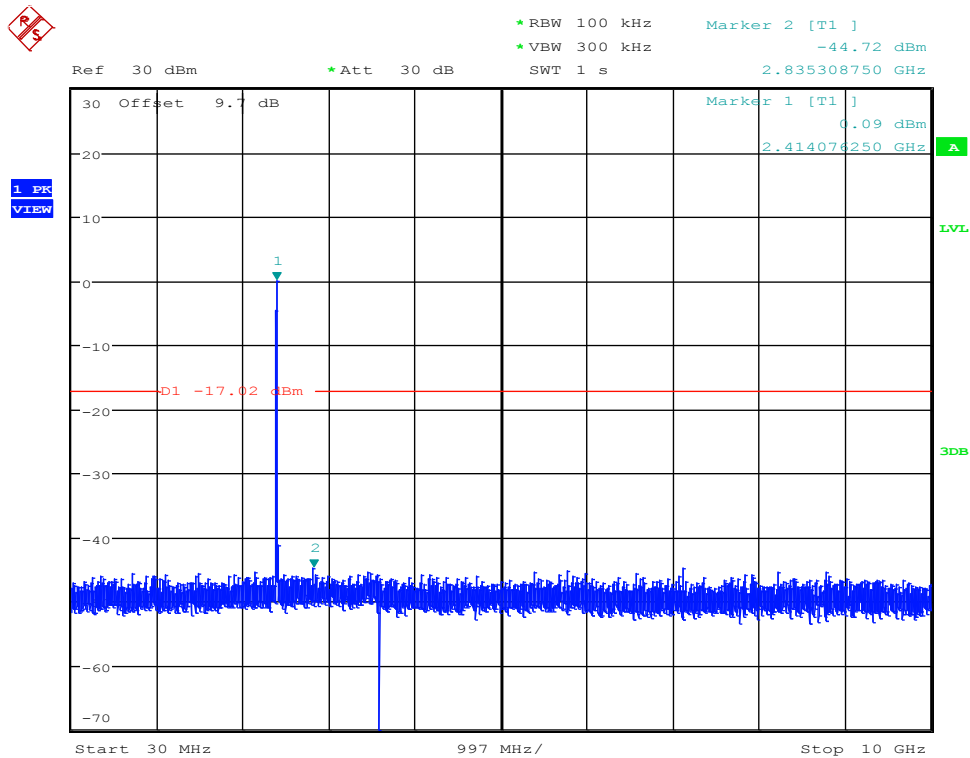


Date: 13.OCT.2017 16:32:28

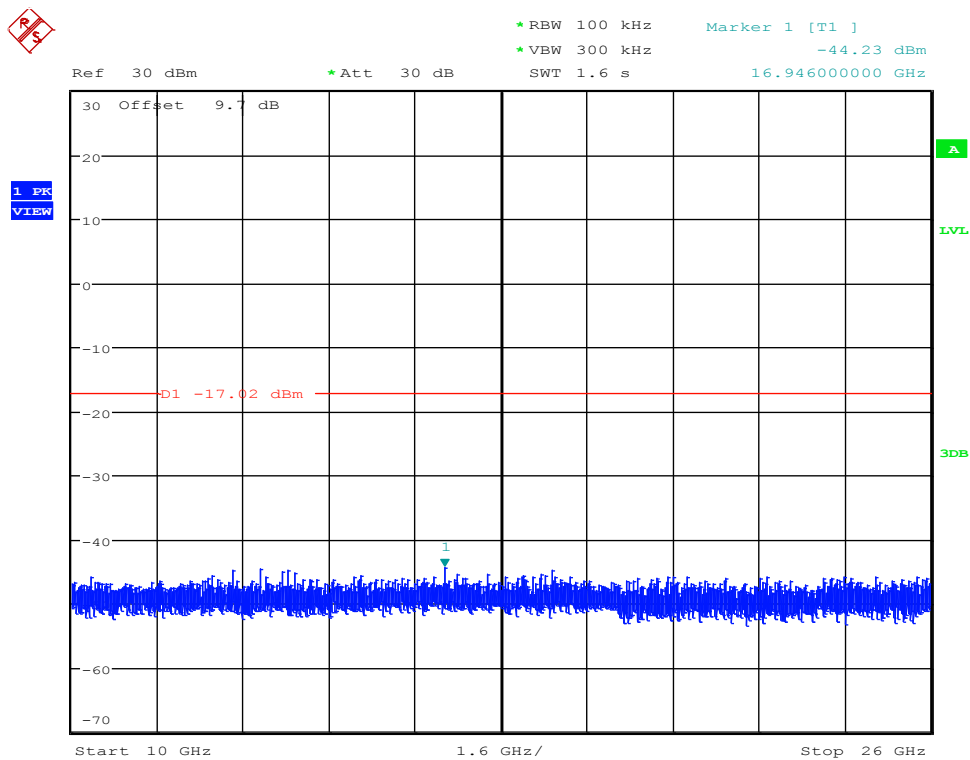


Date: 13.OCT.2017 16:32:38


RF Conducted Spurious Emissions\_11GMIMO\_2462\_Ant1

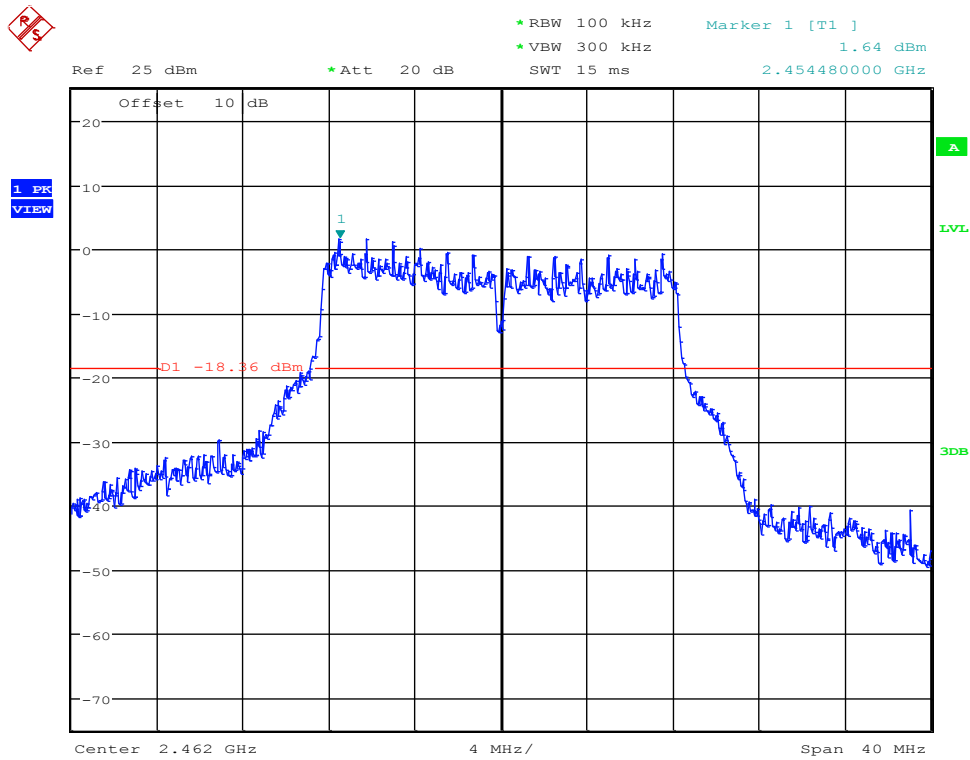

Date: 13.OCT.2017 17:41:45

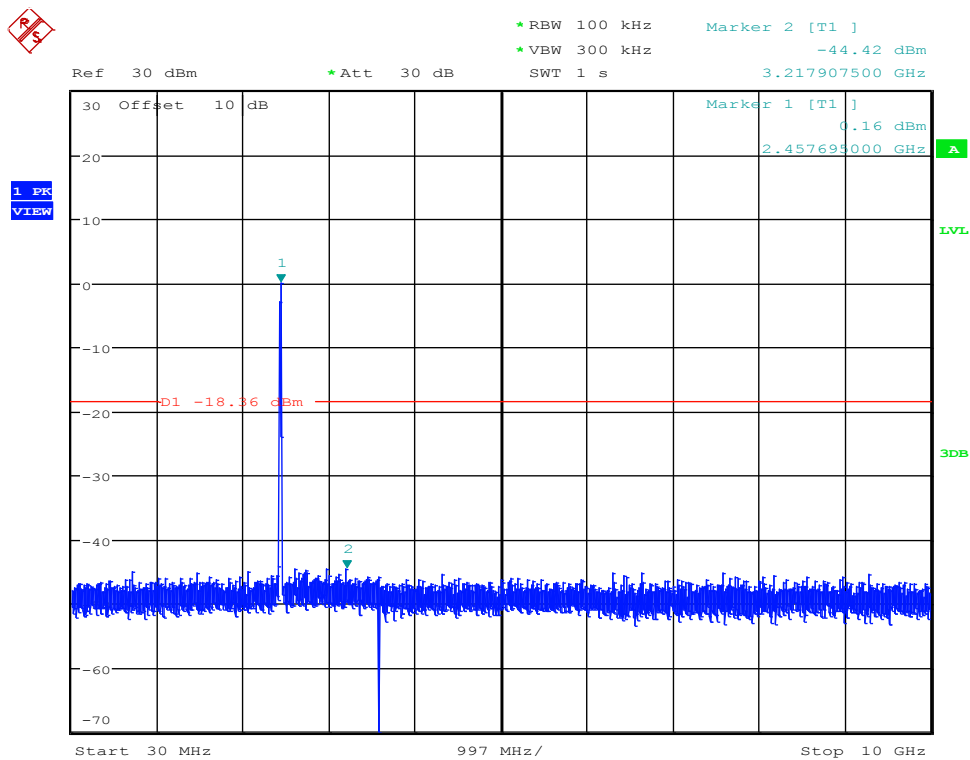


Date: 13.OCT.2017 17:41:57

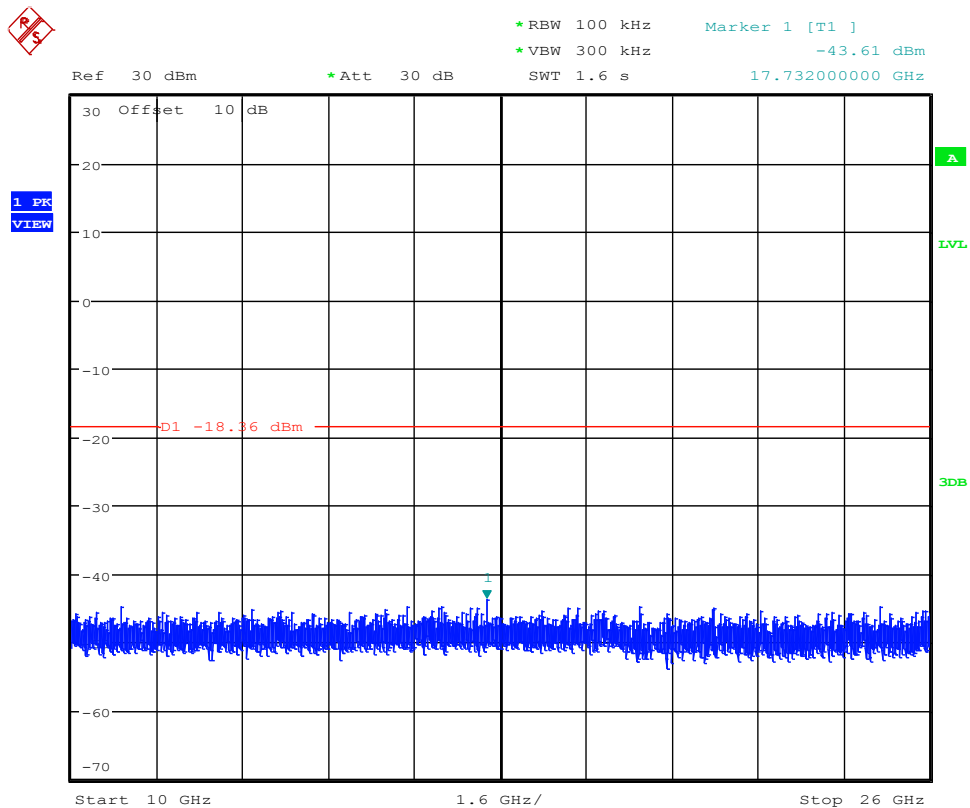


Date: 13.OCT.2017 17:42:07


RF Conducted Spurious Emissions\_11BMIMO\_2462\_Ant1

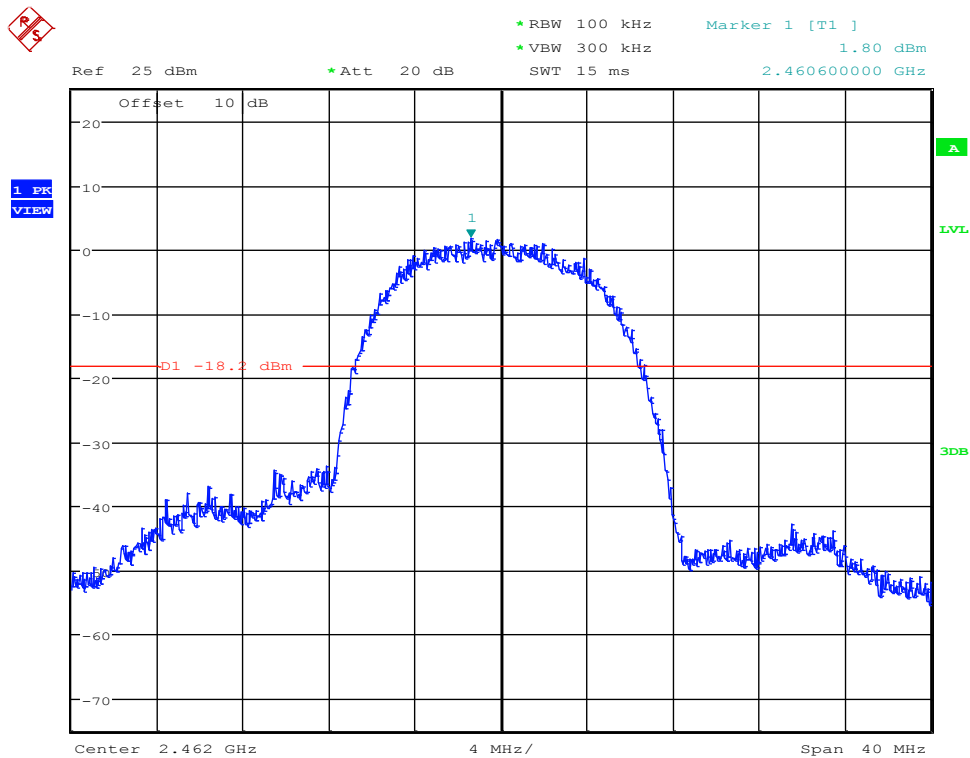

Date: 13.OCT.2017 16:44:28

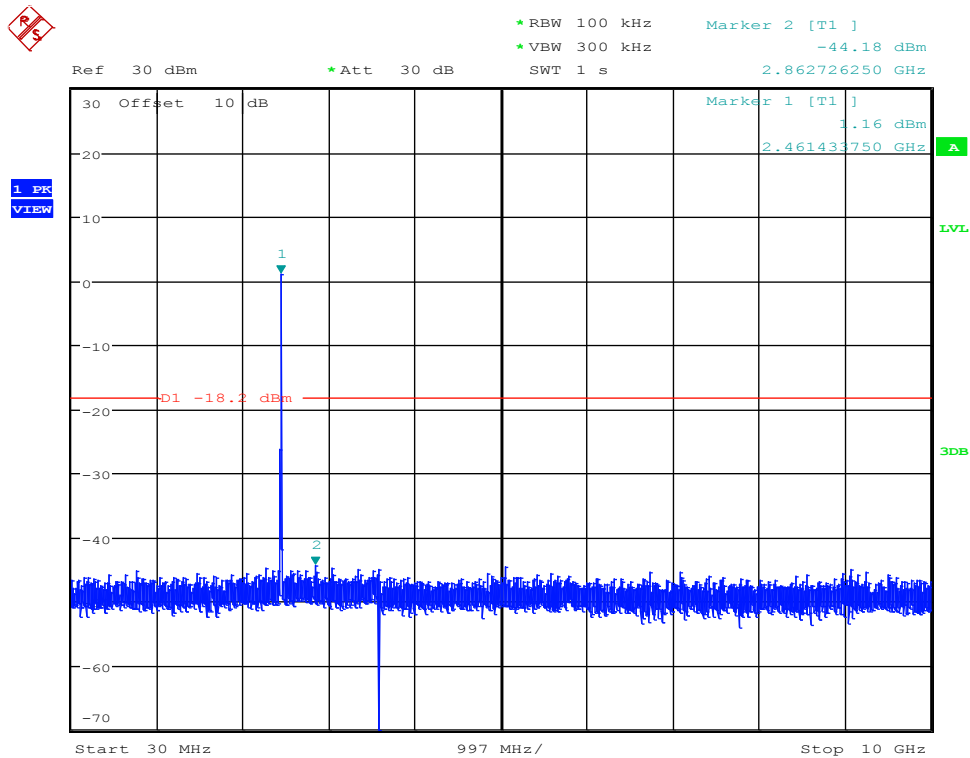


Date: 13.OCT.2017 16:44:40

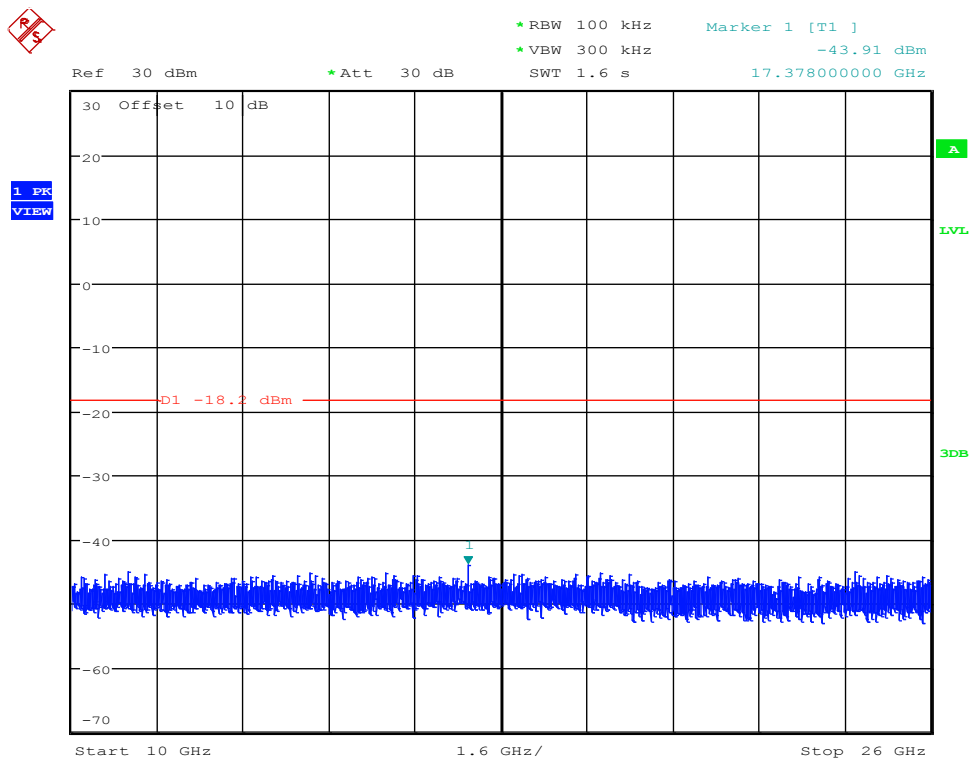


Date: 13.OCT.2017 16:44:50


RF Conducted Spurious Emissions\_11BMIMO\_2462\_Ant2

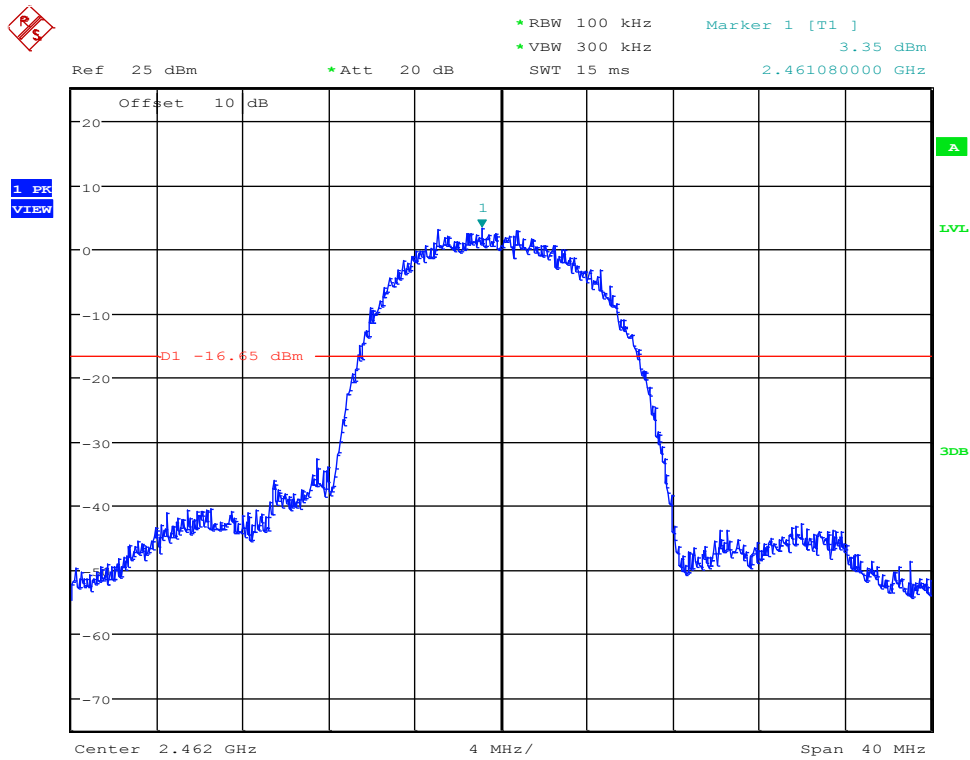

Date: 13.OCT.2017 16:46:59

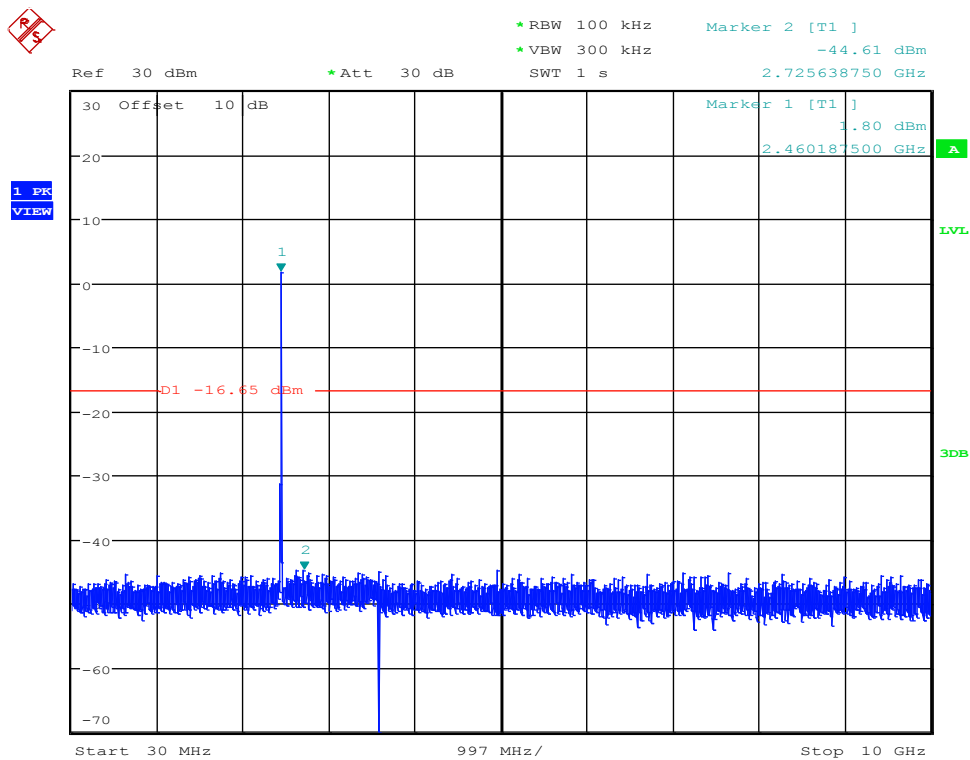


Date: 13.OCT.2017 16:47:10

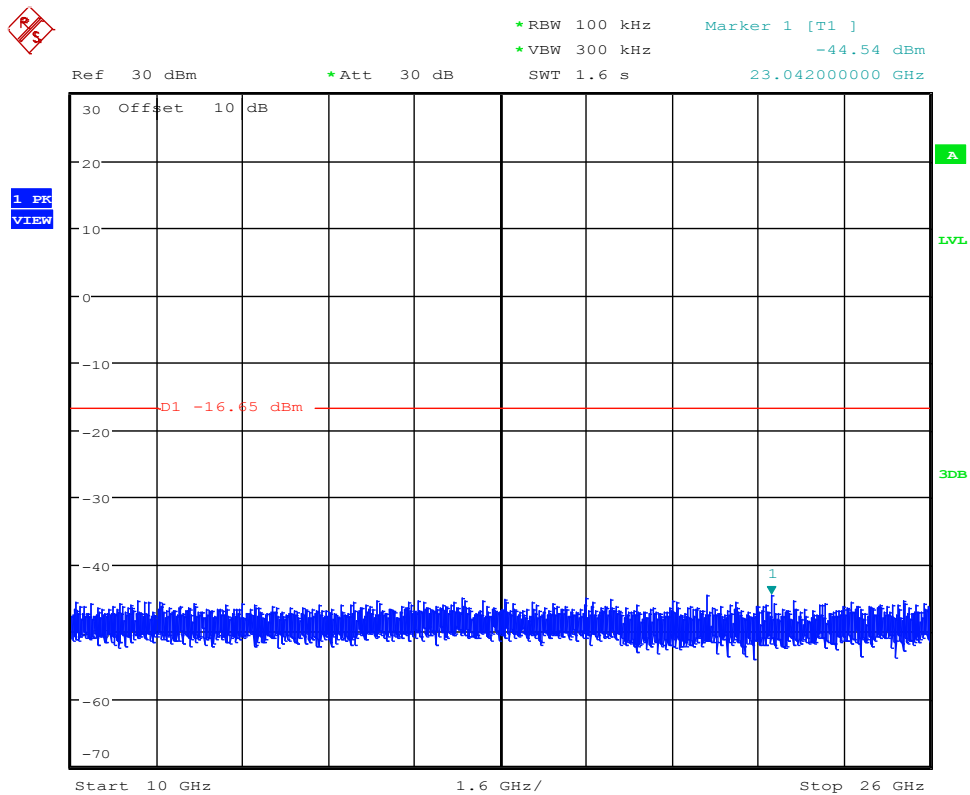


Date: 13.OCT.2017 16:47:20


RF Conducted Spurious Emissions\_11GMIMO\_2462\_Ant2

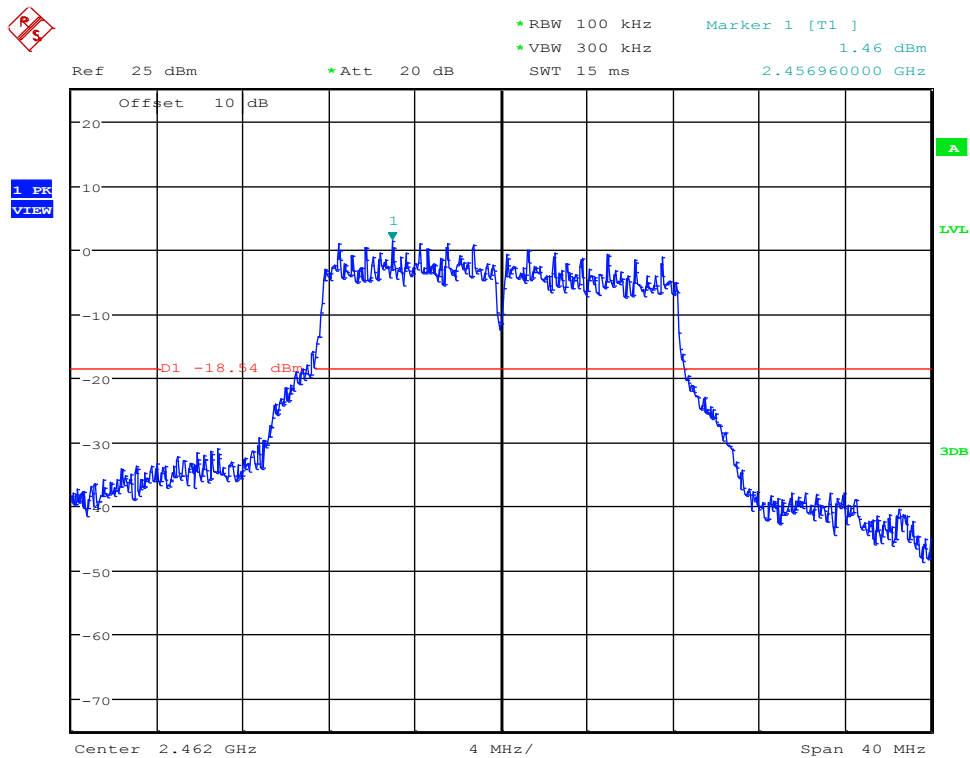

Date: 13.OCT.2017 17:44:16

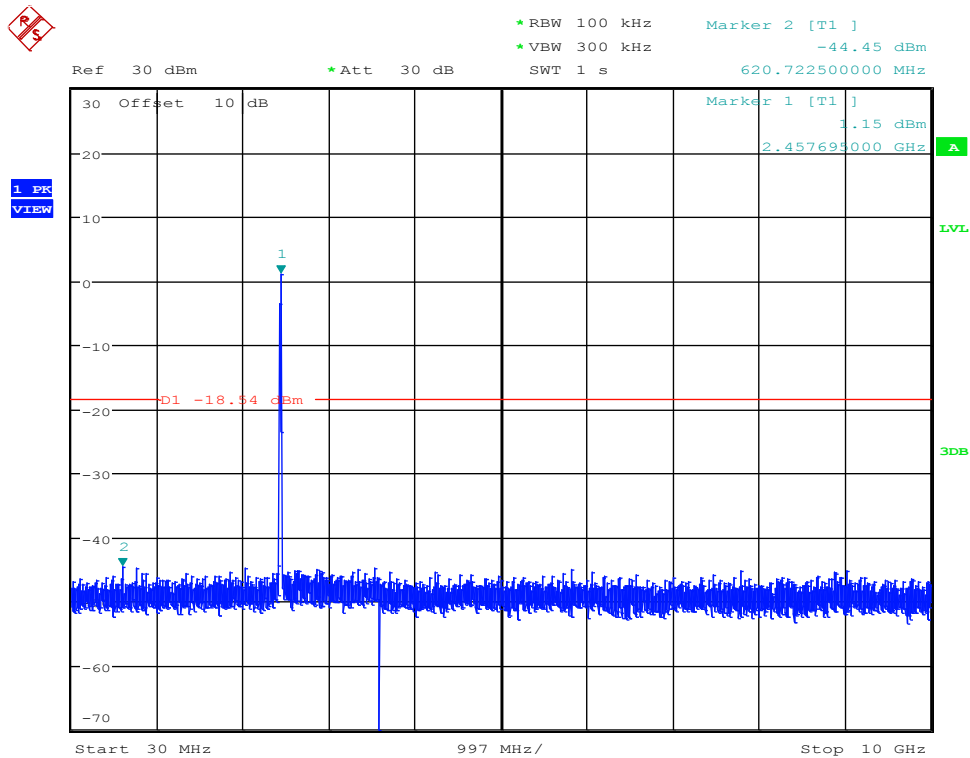

Date: 13.OCT.2017 17:44:28

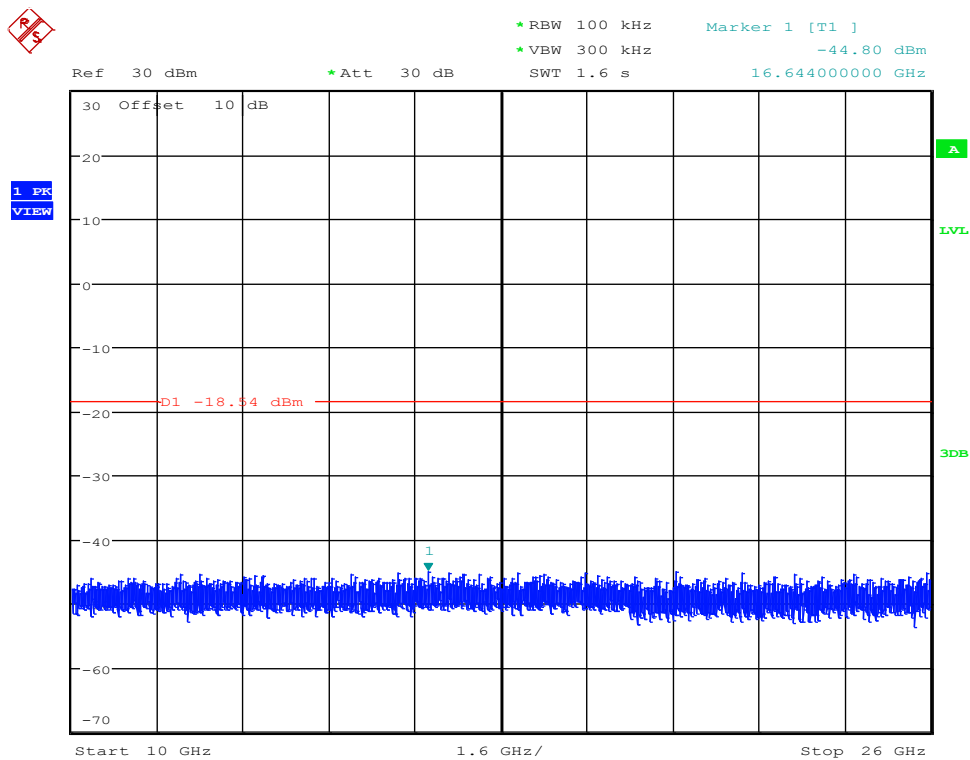


Date: 13.OCT.2017 17:44:38


## 7. Radiated Spurious Emissions

### 7.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz-30MHz

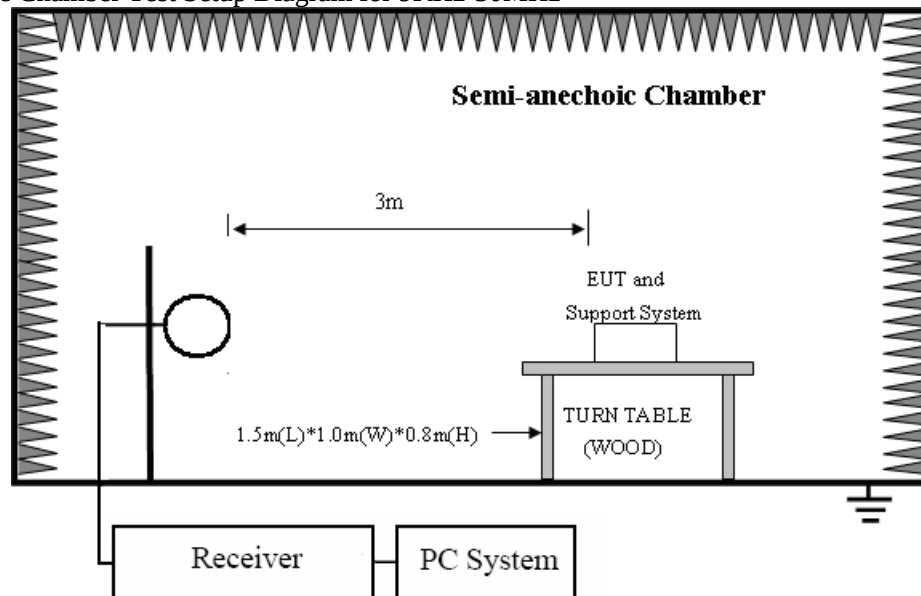

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

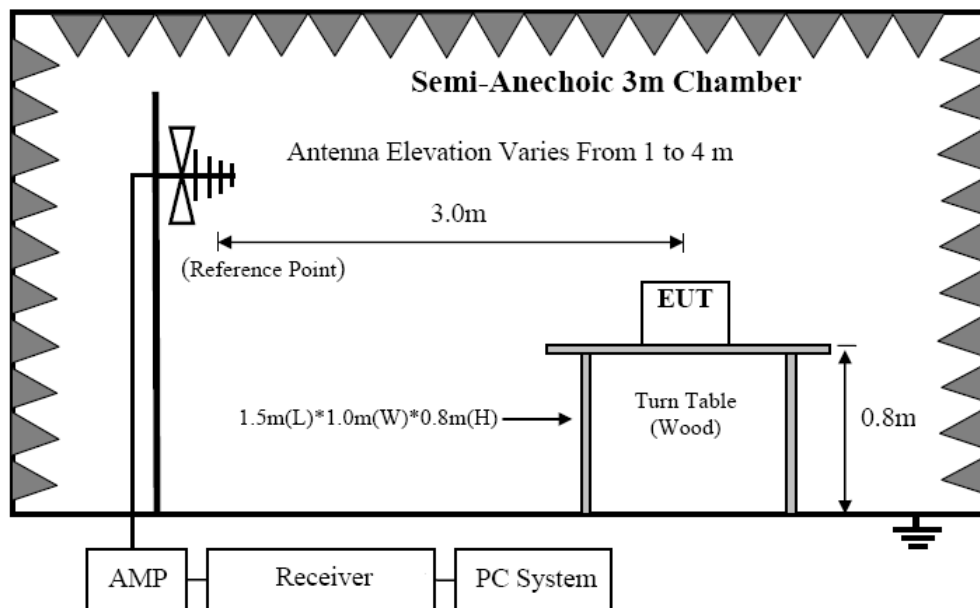

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

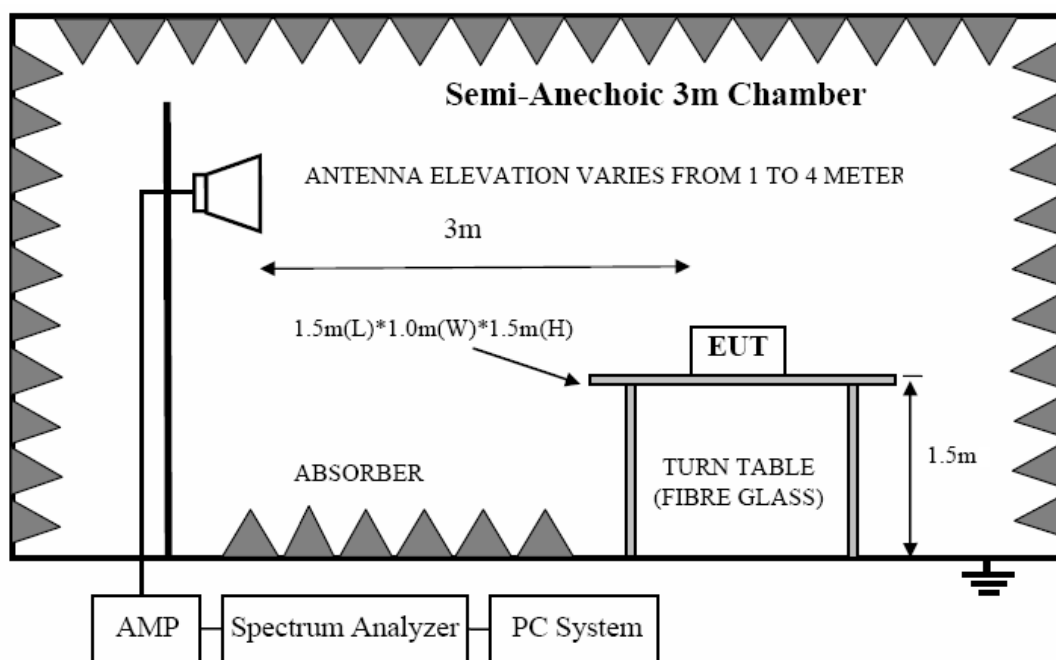

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

## 7.2. Limit

### 8.2.1 FCC 15.205 Restricted frequency band

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |

### 8.2.2 FCC 15.209 Limit.

| FREQUENCY<br>MHz | DISTANCE<br>Meters | FIELD STRENGTHS LIMIT |               |
|------------------|--------------------|-----------------------|---------------|
|                  |                    | μV/m                  | dB(μV)/m      |
| 0.009 ~ 0.490    | 300                | 2400/F(KHz)           | 67.6-20log(F) |
| 0.490 ~ 1.705    | 30                 | 24000/F(KHz)          | 87.6-20log(F) |
| 1.705 ~ 30.0     | 30                 | 30                    | 29.54         |
| 30 ~ 88          | 3                  | 100                   | 40.0          |
| 88 ~ 216         | 3                  | 150                   | 43.5          |
| 216 ~ 960        | 3                  | 200                   | 46.0          |
| 960 ~ 1000       | 3                  | 500                   | 54.0          |

|            |   |                                                 |
|------------|---|-------------------------------------------------|
| Above 1000 | 3 | 74.0 dB(μV)/m (Peak)<br>54.0 dB(μV)/m (Average) |
|------------|---|-------------------------------------------------|

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30m/3m)$$

### 8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

## 7.3. Test Procedure

(1) EUT height should be 0.8m for below 1GHz at a semi-anechoic chamber while EUT height should be 1.5m for above 1GHz at full chamber or semi-anechoic chamber ground with absorbers.

(2) The antenna used as below table.

| Test frequency range | Test antenna used                      | Measuring distance |
|----------------------|----------------------------------------|--------------------|
| 9KHz-30MHz           | Active Loop antenna                    | 3 m                |
| 30MHz-1GHz           | Trilog Broadband Antenna               | 3 m                |
| 1GHz-18GHz           | Double Ridged Horn Antenna(1GHz-18GHz) | 3 m                |
| 18GHz-40GHz          | Horn Antenna(18GHz-40GHz)              | 1 m                |

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of

Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9KHz to 25GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest

emissions.

Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9KHz to 18GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.
- (5) The emissions from 9KHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz, for emissions from 9KHz-90KHz, 110KHz-490KHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

| Frequency band | RBW    |
|----------------|--------|
| 9KHz-150KHz    | 200Hz  |
| 150KHz-30MHz   | 9KHz   |
| 30MHz-1GHz     | 120KHz |

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure(according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

#### 7.4. Test result

##### **PASS. (See below detailed test result)**

All the emissions except fundamental emission from 9KHz to 25GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1GHz, the final test was only performed with EUT working in ANT2+ANT1, 11b, Tx CH6 mode.


## Radiated Emission test (below 1GHz)

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplif  
**Power Supply** : 110V/50Hz  
**Condition** : Temp:24.5°C,Humi:55%, Press:100.1kPa  
**Memo** :

D:\2017 RE1# Report Data\Q17090505-1E\Q17090505-1E FCC 30-1G.EM6  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode  
**Antenna/Distance** : 2016 VULB9163 1#/3m/VERTICAL

Data: 5

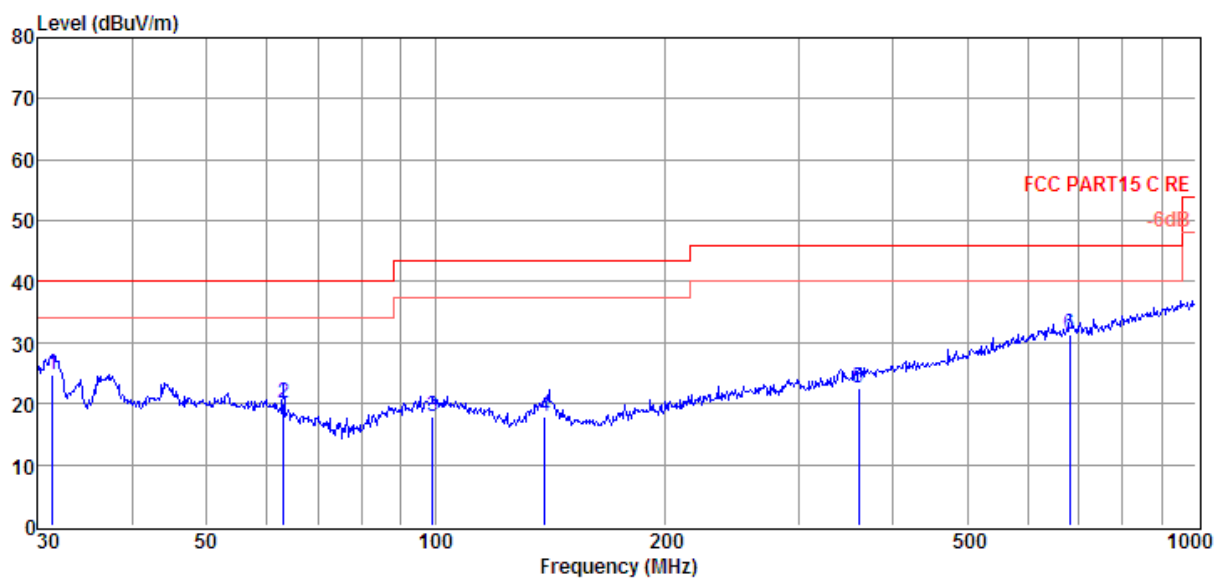

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 31.40          | 9.71                    | 11.31                       | 3.68                | 24.70                       | 40.00                     | -15.30                | QP       | VERTICAL     |
| 2              | 63.09          | 5.83                    | 10.32                       | 4.00                | 20.15                       | 40.00                     | -19.85                | QP       | VERTICAL     |
| 3              | 99.18          | 1.62                    | 11.94                       | 4.29                | 17.85                       | 43.50                     | -25.65                | QP       | VERTICAL     |
| 4              | 139.36         | 6.02                    | 7.44                        | 4.53                | 17.99                       | 43.50                     | -25.51                | QP       | VERTICAL     |
| 5              | 360.45         | 2.04                    | 15.01                       | 5.63                | 22.68                       | 46.00                     | -23.32                | QP       | VERTICAL     |
| 6              | 682.35         | 4.80                    | 19.88                       | 6.77                | 31.45                       | 46.00                     | -14.55                | QP       | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17090505-1E\Q17090505-1E FCC  
30-1G.EM6

**Test Date** : 2017-10-15

**Tested By** : TALENT

**EUT** : Wireless Adaptor and 120W Digital  
Amplif

**Model Number** : ADAPT+AMP

**Power Supply** : 110V/50Hz


**Test Mode** : TX mode

**Condition** : Temp:24.5'C,Humi:55%,  
Press:100.1kPa

**Antenna/Distance** : 2016 VULB9163 1#/3m/HORIZONTAL

**Memo** :

Data: 6

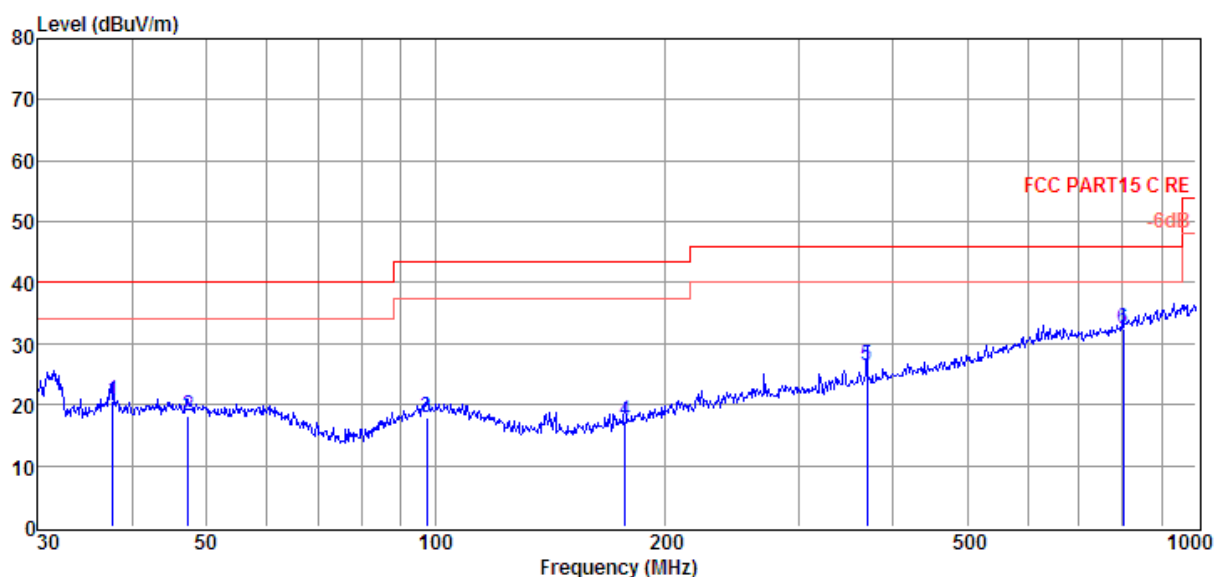

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 37.68          | 4.82                    | 12.08                       | 3.77                | 20.67                       | 40.00                     | -19.33                | QP       | HORIZONTAL   |
| 2              | 47.33          | 1.89                    | 12.27                       | 3.86                | 18.02                       | 40.00                     | -21.98                | QP       | HORIZONTAL   |
| 3              | 97.46          | 1.68                    | 11.80                       | 4.28                | 17.76                       | 43.50                     | -25.74                | QP       | HORIZONTAL   |
| 4              | 177.51         | 3.44                    | 9.05                        | 4.77                | 17.26                       | 43.50                     | -26.24                | QP       | HORIZONTAL   |
| 5              | 369.41         | 5.44                    | 15.19                       | 5.67                | 26.30                       | 46.00                     | -19.70                | QP       | HORIZONTAL   |
| 6              | 801.79         | 4.15                    | 21.20                       | 7.13                | 32.48                       | 46.00                     | -13.52                | QP       | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

**Radiated Emission test (above 1GHz)**

| Freq<br>(MHz)   | Read<br>level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Result<br>Level<br>(dBμV/m) | Limit<br>(dBμ<br>V/m) | Margin<br>(dB) | Detector<br>type | Polarization |
|-----------------|-------------------------|-----------------------------|-----------------------|-----------------------|-----------------------------|-----------------------|----------------|------------------|--------------|
| <b>11b CH1</b>  |                         |                             |                       |                       |                             |                       |                |                  |              |
| 4196.00         | 35.66                   | 33.56                       | 29.08                 | 7.83                  | 47.97                       | 74.00                 | -26.03         | Peak             | HORIZONTAL   |
| 6950.00         | 34.88                   | 36.16                       | 30.34                 | 10.39                 | 51.09                       | 74.00                 | -22.91         | Peak             | HORIZONTAL   |
| 8735.00         | 34.67                   | 36.35                       | 32.07                 | 11.73                 | 50.68                       | 74.00                 | -23.32         | Peak             | HORIZONTAL   |
| 9670.00         | 34.34                   | 36.57                       | 32.77                 | 12.39                 | 50.53                       | 74.00                 | -23.47         | Peak             | HORIZONTAL   |
| 12050.00        | 32.54                   | 37.67                       | 34.82                 | 14.26                 | 49.65                       | 74.00                 | -24.35         | Peak             | HORIZONTAL   |
| 13274.00        | 34.90                   | 39.08                       | 35.50                 | 14.74                 | 53.22                       | 74.00                 | -20.78         | Peak             | HORIZONTAL   |
| 4179.00         | 34.32                   | 33.55                       | 29.07                 | 7.81                  | 46.61                       | 74.00                 | -27.39         | Peak             | VERTICAL     |
| 4944.00         | 34.58                   | 33.71                       | 29.34                 | 8.63                  | 47.58                       | 74.00                 | -26.42         | Peak             | VERTICAL     |
| 6916.00         | 35.81                   | 36.13                       | 30.33                 | 10.37                 | 51.98                       | 74.00                 | -22.02         | Peak             | VERTICAL     |
| 8990.00         | 33.85                   | 37.46                       | 32.32                 | 11.81                 | 50.80                       | 74.00                 | -23.20         | Peak             | VERTICAL     |
| 11285.00        | 33.67                   | 37.17                       | 34.35                 | 13.54                 | 50.03                       | 74.00                 | -23.97         | Peak             | VERTICAL     |
| 13206.00        | 34.79                   | 39.01                       | 35.54                 | 14.73                 | 52.99                       | 74.00                 | -21.01         | Peak             | VERTICAL     |
| <b>11b CH6</b>  |                         |                             |                       |                       |                             |                       |                |                  |              |
| 4179.00         | 34.98                   | 33.55                       | 29.07                 | 7.81                  | 47.27                       | 74.00                 | -26.73         | Peak             | HORIZONTAL   |
| 5709.00         | 32.50                   | 34.83                       | 29.22                 | 9.38                  | 47.49                       | 74.00                 | -26.51         | Peak             | HORIZONTAL   |
| 7851.00         | 34.55                   | 36.67                       | 31.07                 | 11.05                 | 51.20                       | 74.00                 | -22.80         | Peak             | HORIZONTAL   |
| 9636.00         | 33.96                   | 36.54                       | 32.75                 | 12.38                 | 50.13                       | 74.00                 | -23.87         | Peak             | HORIZONTAL   |
| 10996.00        | 32.73                   | 37.79                       | 33.98                 | 13.48                 | 50.02                       | 74.00                 | -23.98         | Peak             | HORIZONTAL   |
| 13240.00        | 33.68                   | 39.04                       | 35.50                 | 14.73                 | 51.95                       | 74.00                 | -22.05         | Peak             | HORIZONTAL   |
| 3805.00         | 35.75                   | 32.84                       | 29.16                 | 7.49                  | 46.92                       | 74.00                 | -27.08         | Peak             | VERTICAL     |
| 4944.00         | 34.25                   | 33.71                       | 29.34                 | 8.63                  | 47.25                       | 74.00                 | -26.75         | Peak             | VERTICAL     |
| 6525.00         | 33.78                   | 35.82                       | 29.90                 | 9.96                  | 49.66                       | 74.00                 | -24.34         | Peak             | VERTICAL     |
| 8735.00         | 34.38                   | 36.35                       | 32.07                 | 11.73                 | 50.39                       | 74.00                 | -23.61         | Peak             | VERTICAL     |
| 10996.00        | 32.56                   | 37.79                       | 33.98                 | 13.48                 | 49.85                       | 74.00                 | -24.15         | Peak             | VERTICAL     |
| 12101.00        | 32.84                   | 37.74                       | 34.87                 | 14.30                 | 50.01                       | 74.00                 | -23.99         | Peak             | VERTICAL     |
| <b>11b CH11</b> |                         |                             |                       |                       |                             |                       |                |                  |              |
| 3805.00         | 35.57                   | 32.84                       | 29.16                 | 7.49                  | 46.74                       | 74.00                 | -27.26         | Peak             | HORIZONTAL   |
| 4145.00         | 35.20                   | 33.52                       | 29.07                 | 7.77                  | 47.42                       | 74.00                 | -26.58         | Peak             | HORIZONTAL   |
| 6984.00         | 34.64                   | 36.19                       | 30.38                 | 10.40                 | 50.85                       | 74.00                 | -23.15         | Peak             | HORIZONTAL   |
| 7868.00         | 33.40                   | 36.67                       | 31.08                 | 11.06                 | 50.05                       | 74.00                 | -23.95         | Peak             | HORIZONTAL   |
| 9755.00         | 32.87                   | 36.66                       | 32.82                 | 12.40                 | 49.11                       | 74.00                 | -24.89         | Peak             | HORIZONTAL   |
| 12594.00        | 33.36                   | 38.40                       | 35.36                 | 14.65                 | 51.05                       | 74.00                 | -22.95         | Peak             | HORIZONTAL   |
| 3499.00         | 35.99                   | 31.90                       | 29.54                 | 7.30                  | 45.65                       | 74.00                 | -28.35         | Peak             | VERTICAL     |
| 5284.00         | 32.75                   | 34.28                       | 29.31                 | 8.96                  | 46.68                       | 74.00                 | -27.32         | Peak             | VERTICAL     |
| 6984.00         | 34.89                   | 36.19                       | 30.38                 | 10.40                 | 51.10                       | 74.00                 | -22.90         | Peak             | VERTICAL     |
| 8225.00         | 33.91                   | 36.06                       | 31.33                 | 11.36                 | 50.00                       | 74.00                 | -24.00         | Peak             | VERTICAL     |
| 9041.00         | 33.84                   | 37.41                       | 32.34                 | 11.87                 | 50.78                       | 74.00                 | -23.22         | Peak             | VERTICAL     |
| 12084.00        | 32.31                   | 37.72                       | 34.85                 | 14.30                 | 49.48                       | 74.00                 | -24.52         | Peak             | VERTICAL     |

Note: 1.30MHz~25GHz: (Scan with 11b mode ANT 1+ ANT 2, 11g mode ANT 1+ANT 2, 11n HT20 mode ANT 1+ ANT 2, 11n HT40 mode ANT 1+ ANT 2, the worst case is 11b ANT1+ANT 2 mode)


2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

## 8. Radiated Band Edge Compliance

### 8.1. Block diagram of test setup

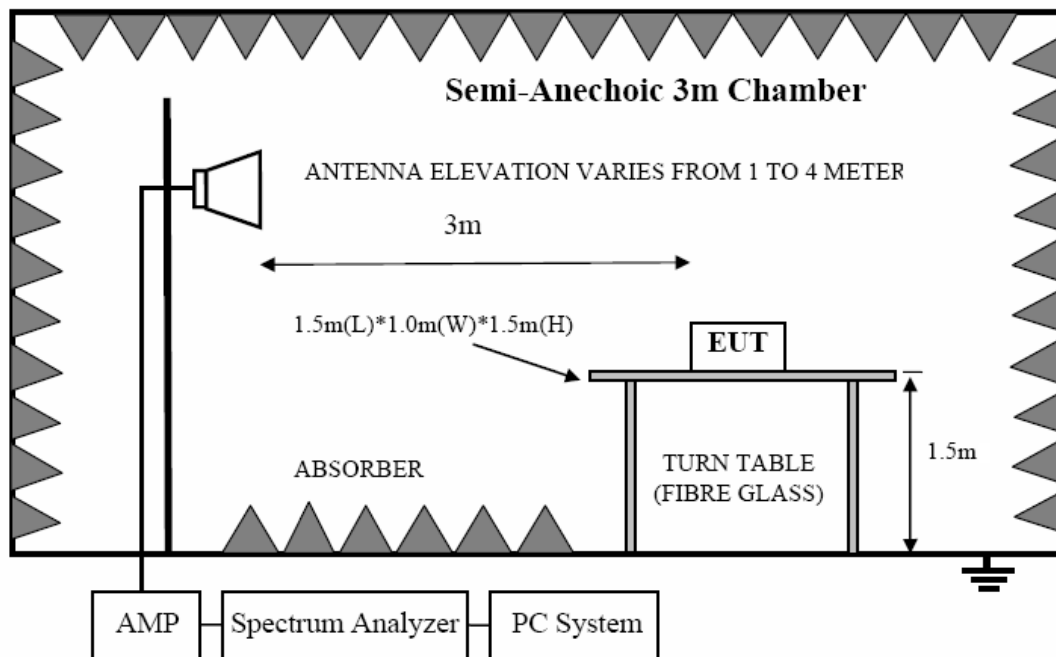

### 8.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

### 8.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2100MHz to 2450MHz and 2450MHz to 2500MHz.

Remark: All restriction band have been tested, and only the worse case is shown in report.

### 8.4. Test result


**PASS. (See below detailed test result)**

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
Press:100.1kPa  
**Memo** : 11b ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFI.EM6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2412MHz  
**Antenna/Distance** : 2016 HF907/3m/VERTICAL

Data: 13

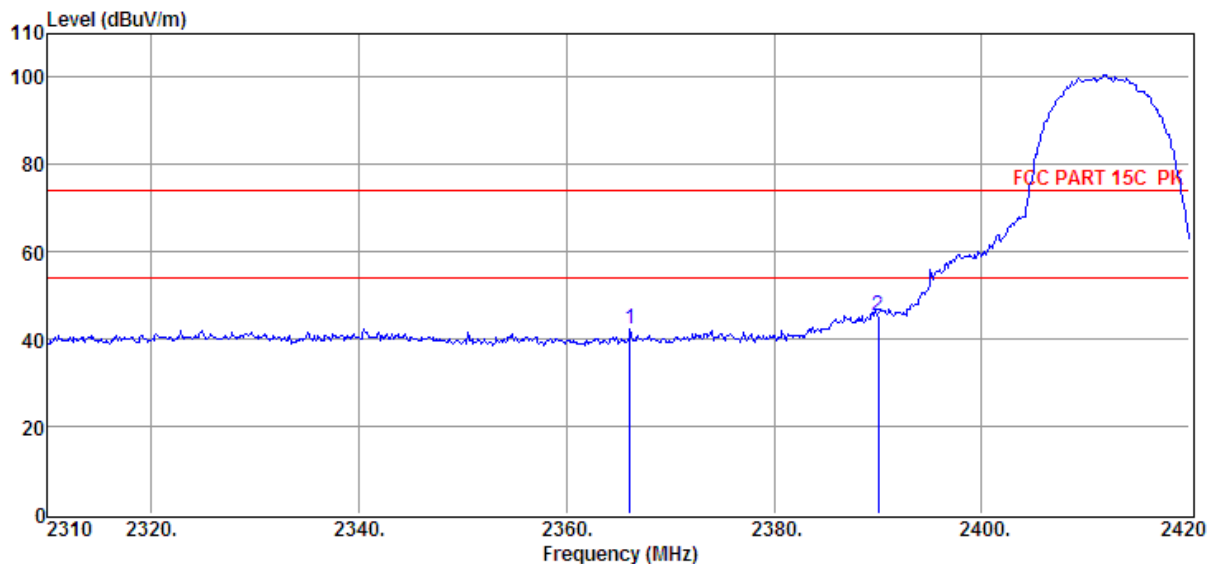

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2366.10        | 35.96                   | 29.68                       | 29.37               | 6.01                | 42.28                       | 74.00                     | -31.72                | Peak     | VERTICAL     |
| 2              | 2390.00        | 38.91                   | 29.78                       | 29.42               | 6.03                | 45.30                       | 74.00                     | -28.70                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11b ANT1+ANT2

**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2412MHz  
**Antenna/Distance** : 2016 HF907/3m/HORIZONTAL

D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G  
 2.4GWIFI.EM6

Data: 14

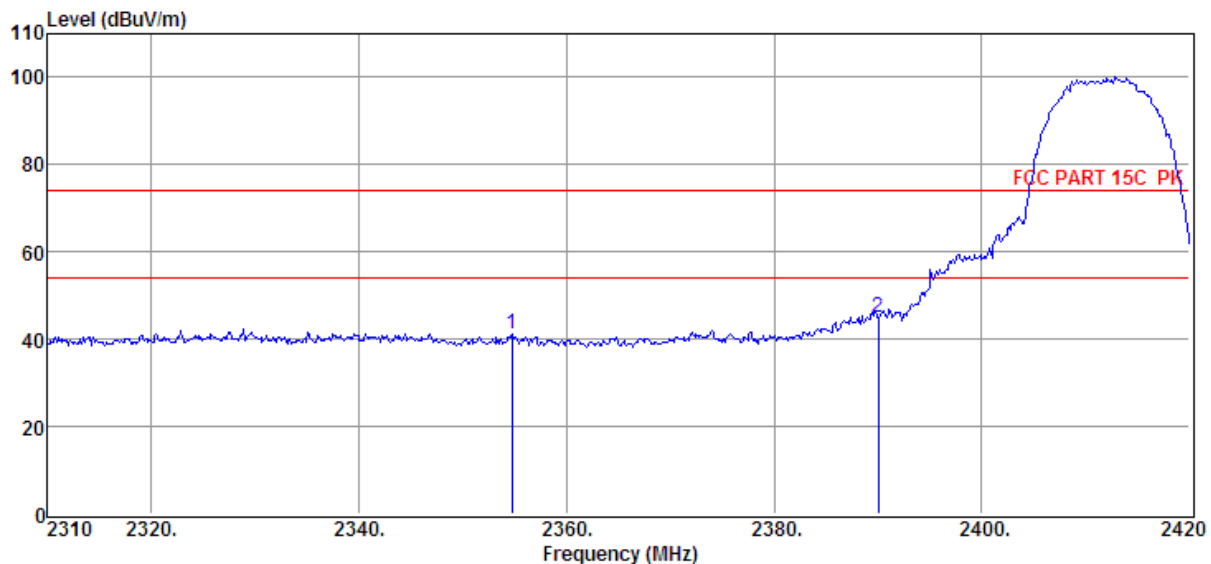

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2354.77        | 34.84                   | 29.64                       | 29.34               | 5.96                | 41.10                       | 74.00                     | -32.90                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 38.48                   | 29.78                       | 29.42               | 6.03                | 44.87                       | 74.00                     | -29.13                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11b ANT1+ANT2

**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2462MHz  
**Antenna/Distance** : 2016 HF907/3m/HORIZONTAL

D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G  
 2.4GWIFILEM6

Data: 15

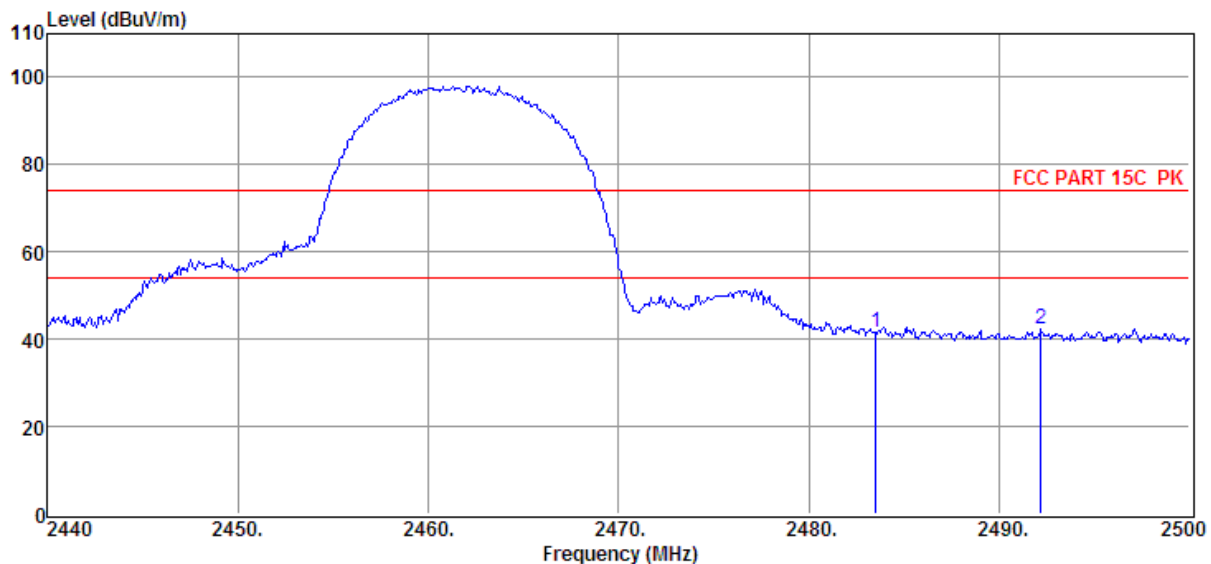

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 34.90                   | 30.14                       | 29.71               | 6.13                | 41.46                       | 74.00                     | -32.54                | Peak     | HORIZONTAL   |
| 2              | 2492.20        | 35.65                   | 30.17                       | 29.73               | 6.17                | 42.26                       | 74.00                     | -31.74                | Peak     | HORIZONTAL   |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11b ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFLE.M6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2462MHz  
**Antenna/Distance** : 2016 HF907/3m/VERTICAL

Data: 16

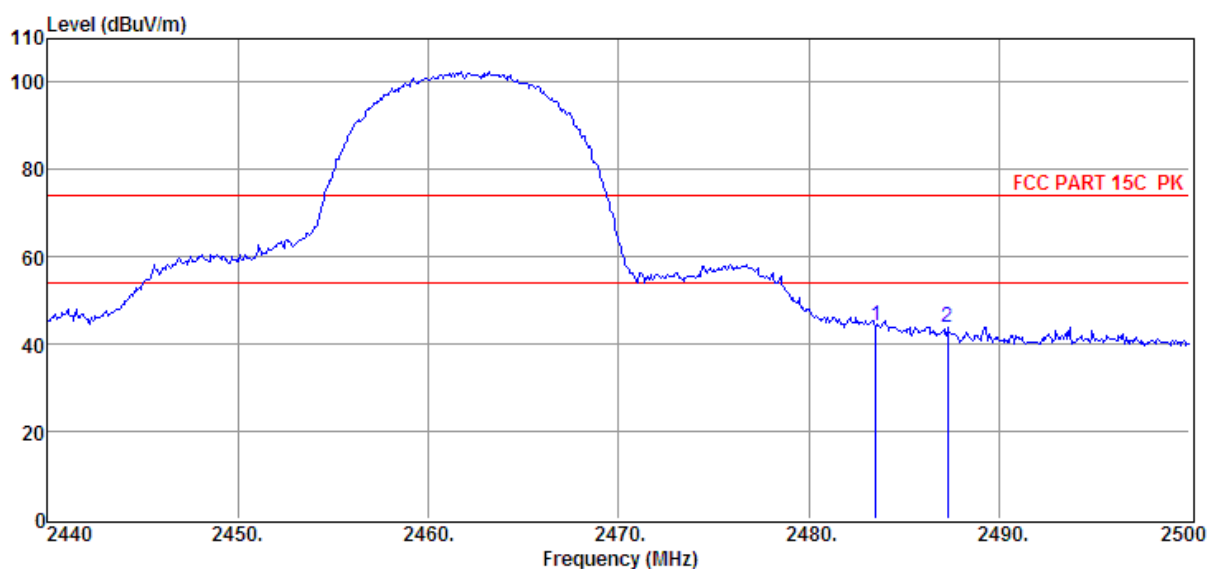

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 37.62                   | 30.14                       | 29.71               | 6.13                | 44.18                       | 74.00                     | -29.82                | Peak     | VERTICAL     |
| 2              | 2487.28        | 37.31                   | 30.15                       | 29.71               | 6.13                | 43.88                       | 74.00                     | -30.12                | Peak     | VERTICAL     |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11g ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFLE.M6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2412MHz  
**Antenna/Distance** : 2016 HF907/3m/VERTICAL

Data: 17

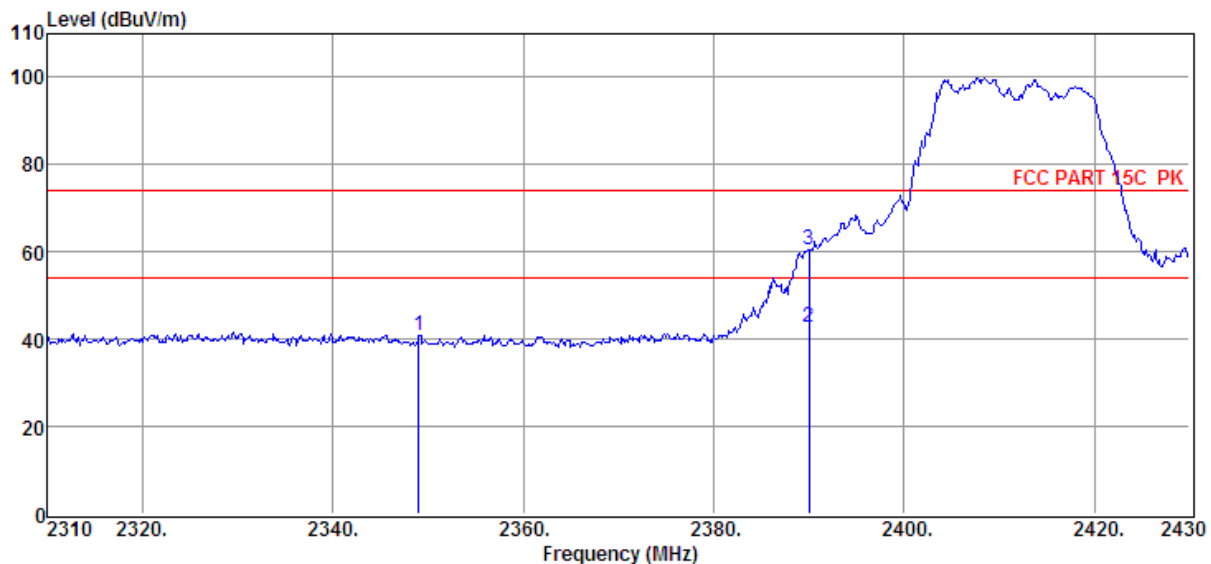

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2349.00        | 34.74                   | 29.61                       | 29.33               | 5.96                | 40.98                       | 74.00                     | -33.02                | Peak     | VERTICAL     |
| 2              | 2390.00        | 36.31                   | 29.78                       | 29.42               | 6.03                | 42.70                       | 54.00                     | -11.30                | Average  | VERTICAL     |
| 3              | 2390.00        | 53.93                   | 29.78                       | 29.42               | 6.03                | 60.32                       | 74.00                     | -13.68                | Peak     | VERTICAL     |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11g ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFLE.M6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2462MHz  
**Antenna/Distance** : 2016 HF907/3m/HORIZONTAL

Data: 18

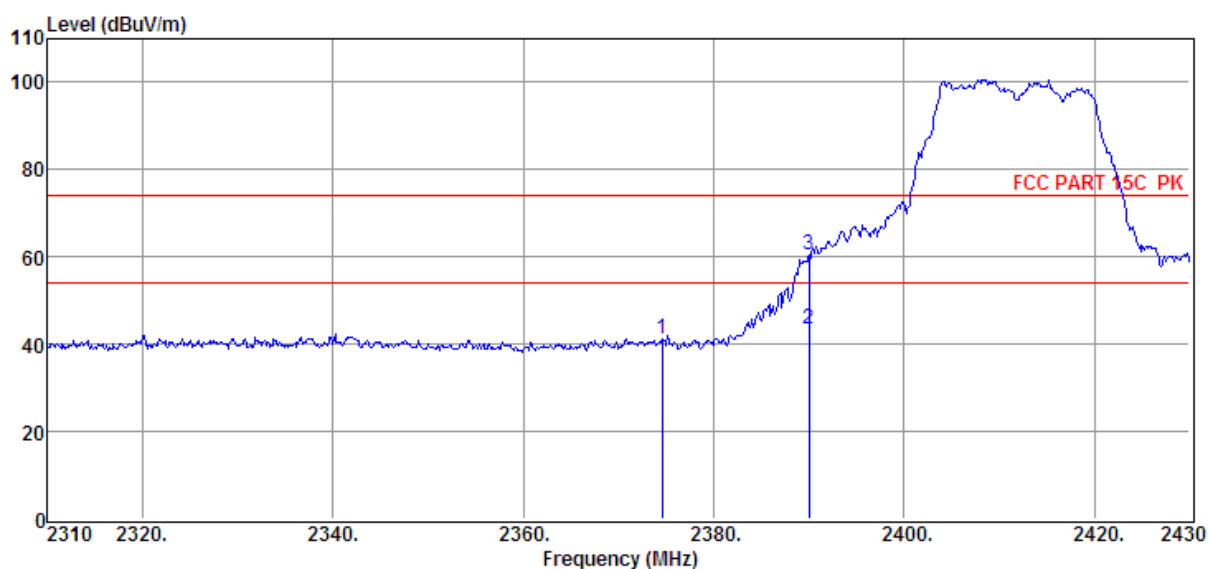

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2374.56        | 34.98                   | 29.72                       | 29.39               | 6.01                | 41.32                       | 74.00                     | -32.68                | Peak     | HORIZONTAL   |
| 2              | 2390.00        | 37.18                   | 29.78                       | 29.42               | 6.03                | 43.57                       | 54.00                     | -10.43                | Average  | HORIZONTAL   |
| 3              | 2390.00        | 54.12                   | 29.78                       | 29.42               | 6.03                | 60.51                       | 74.00                     | -13.49                | Peak     | HORIZONTAL   |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11g ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFL.EM6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2462MHz  
**Antenna/Distance** : 2016 HF907/3m/HORIZONTAL

Data: 19

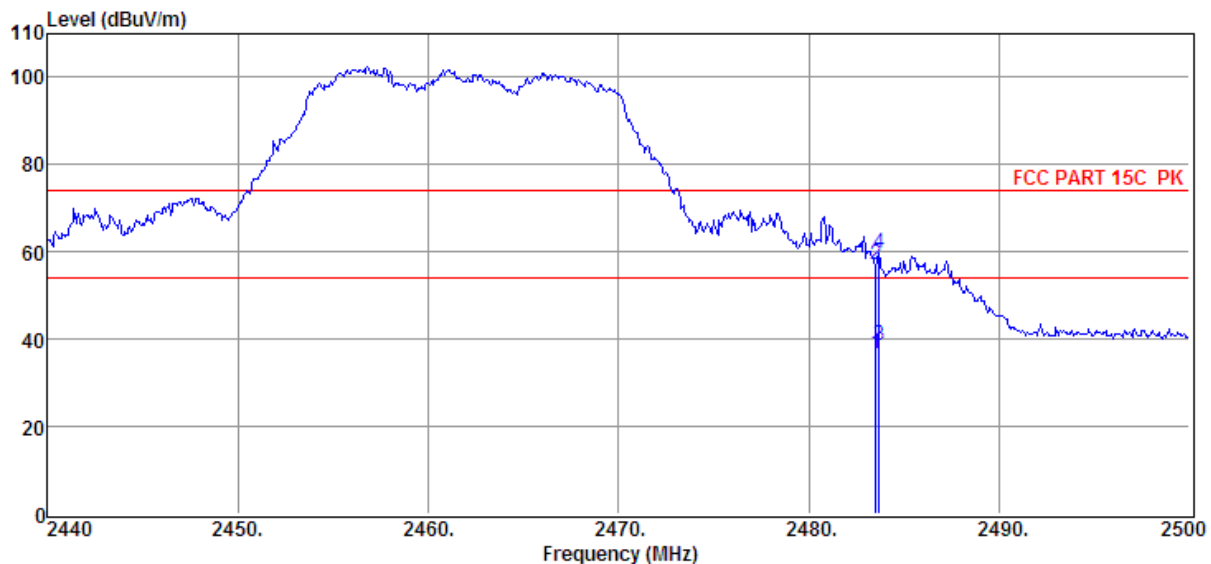

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 30.20                   | 30.14                       | 29.71               | 6.13                | 36.76                       | 54.00                     | -17.24                | Average  | HORIZONTAL   |
| 2              | 2483.50        | 50.55                   | 30.14                       | 29.71               | 6.13                | 57.11                       | 74.00                     | -16.89                | Peak     | HORIZONTAL   |
| 3              | 2483.68        | 32.12                   | 30.14                       | 29.71               | 6.13                | 38.68                       | 54.00                     | -15.32                | Average  | HORIZONTAL   |
| 4              | 2483.68        | 53.21                   | 30.14                       | 29.71               | 6.13                | 59.77                       | 74.00                     | -14.23                | Peak     | HORIZONTAL   |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11g ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFILEM6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2462MHz  
**Antenna/Distance** : 2016 HF907/3m/VERTICAL

Data: 20

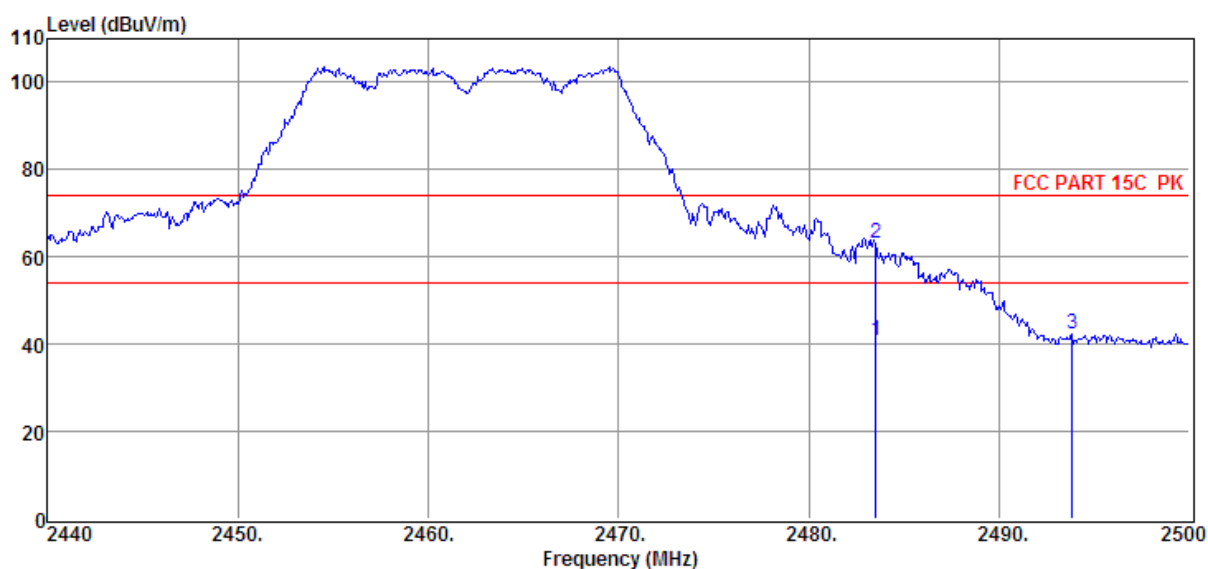

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 34.24                   | 30.14                       | 29.71               | 6.13                | 40.80                       | 54.00                     | -13.20                | Average  | VERTICAL     |
| 2              | 2483.50        | 56.57                   | 30.14                       | 29.71               | 6.13                | 63.13                       | 74.00                     | -10.87                | Peak     | VERTICAL     |
| 3              | 2493.82        | 35.73                   | 30.18                       | 29.73               | 6.17                | 42.35                       | 74.00                     | -31.65                | Peak     | VERTICAL     |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11n20 ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFLE.M6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2412MHz  
**Antenna/Distance** : 2016 HF907/3m/VERTICAL

Data: 21

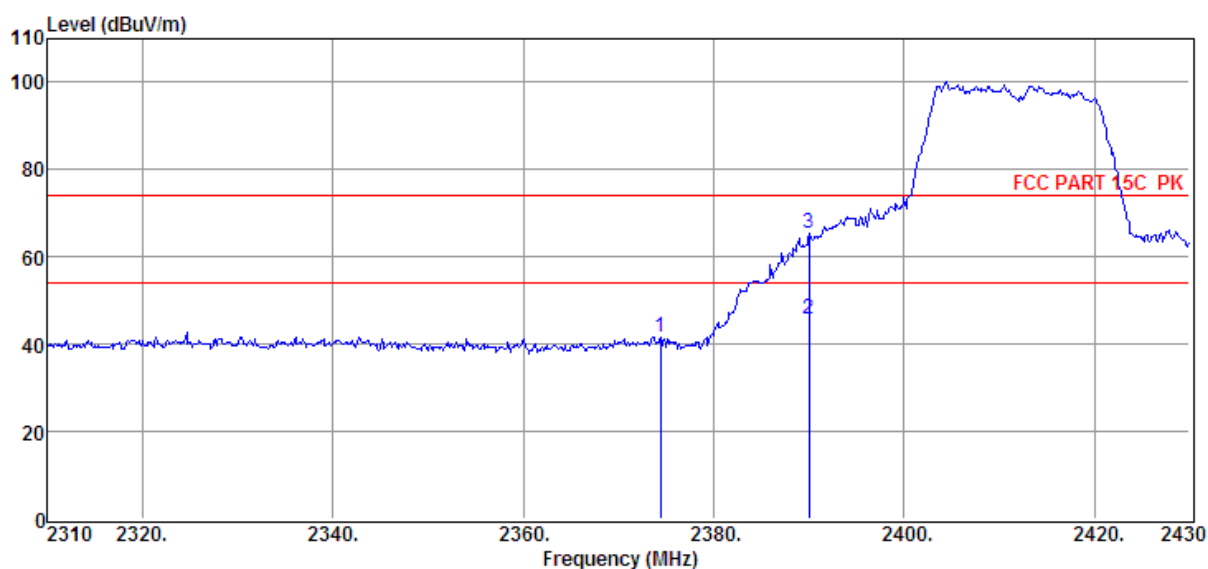

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2374.44        | 35.42                   | 29.72                       | 29.39               | 6.01                | 41.76                       | 74.00                     | -32.24                | Peak     | VERTICAL     |
| 2              | 2390.00        | 39.44                   | 29.78                       | 29.42               | 6.03                | 45.83                       | 54.00                     | -8.17                 | Average  | VERTICAL     |
| 3              | 2390.00        | 58.84                   | 29.78                       | 29.42               | 6.03                | 65.23                       | 74.00                     | -8.77                 | Peak     | VERTICAL     |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11n20 ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFILEM6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2412MHz  
**Antenna/Distance** : 2016 HF907/3m/HORIZONTAL

Data: 22

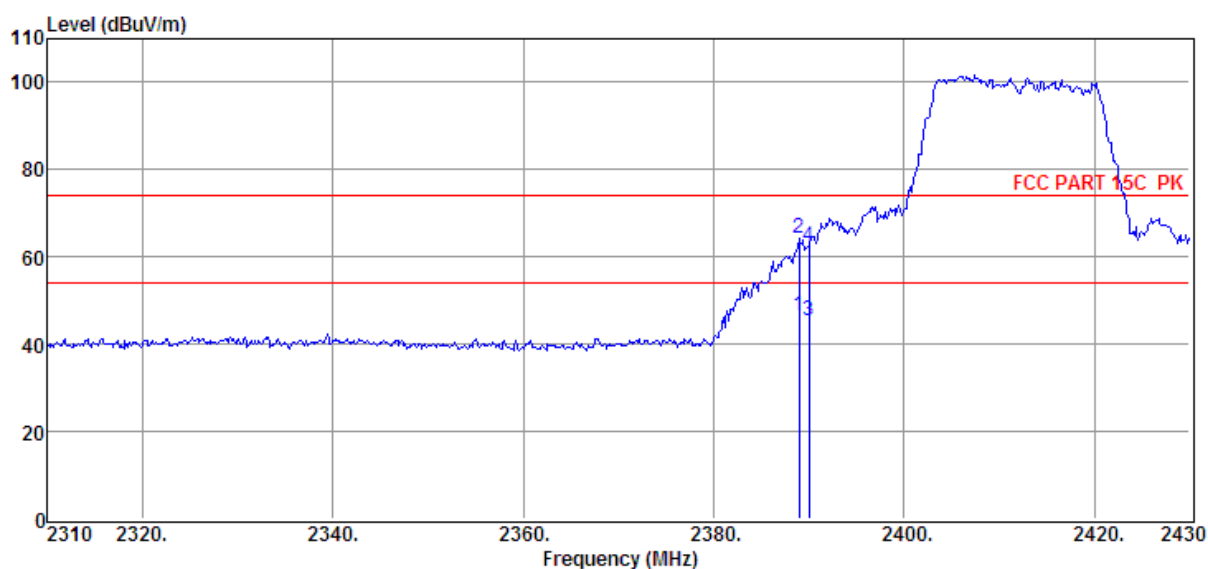

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2388.96        | 40.14                   | 29.77                       | 29.42               | 6.01                | 46.50                       | 54.00                     | -7.50                 | Average  | HORIZONTAL   |
| 2              | 2388.96        | 58.07                   | 29.77                       | 29.42               | 6.01                | 64.43                       | 74.00                     | -9.57                 | Peak     | HORIZONTAL   |
| 3              | 2390.00        | 38.80                   | 29.78                       | 29.42               | 6.03                | 45.19                       | 54.00                     | -8.81                 | Average  | HORIZONTAL   |
| 4              | 2390.00        | 55.80                   | 29.78                       | 29.42               | 6.03                | 62.19                       | 74.00                     | -11.81                | Peak     | HORIZONTAL   |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11n20 ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFILEM6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2462MHz  
**Antenna/Distance** : 2016 HF907/3m/HORIZONTAL

Data: 23

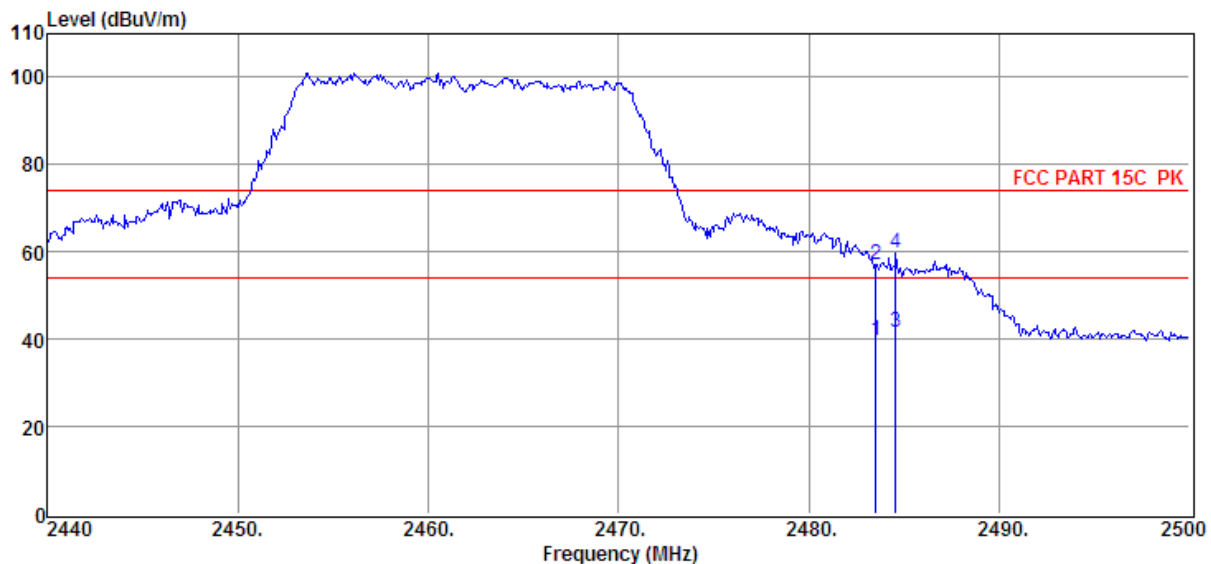

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 33.31                   | 30.14                       | 29.71               | 6.13                | 39.87                       | 54.00                     | -14.13                | Average  | HORIZONTAL   |
| 2              | 2483.50        | 50.54                   | 30.14                       | 29.71               | 6.13                | 57.10                       | 74.00                     | -16.90                | Peak     | HORIZONTAL   |
| 3              | 2484.58        | 35.14                   | 30.14                       | 29.71               | 6.13                | 41.70                       | 54.00                     | -12.30                | Average  | HORIZONTAL   |
| 4              | 2484.58        | 53.16                   | 30.14                       | 29.71               | 6.13                | 59.72                       | 74.00                     | -14.28                | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11n20 ANT1+ANT2

**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2462MHz  
**Antenna/Distance** : 2016 HF907/3m/VERTICAL

D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G  
 2.4GWIFILEM6

Data: 24

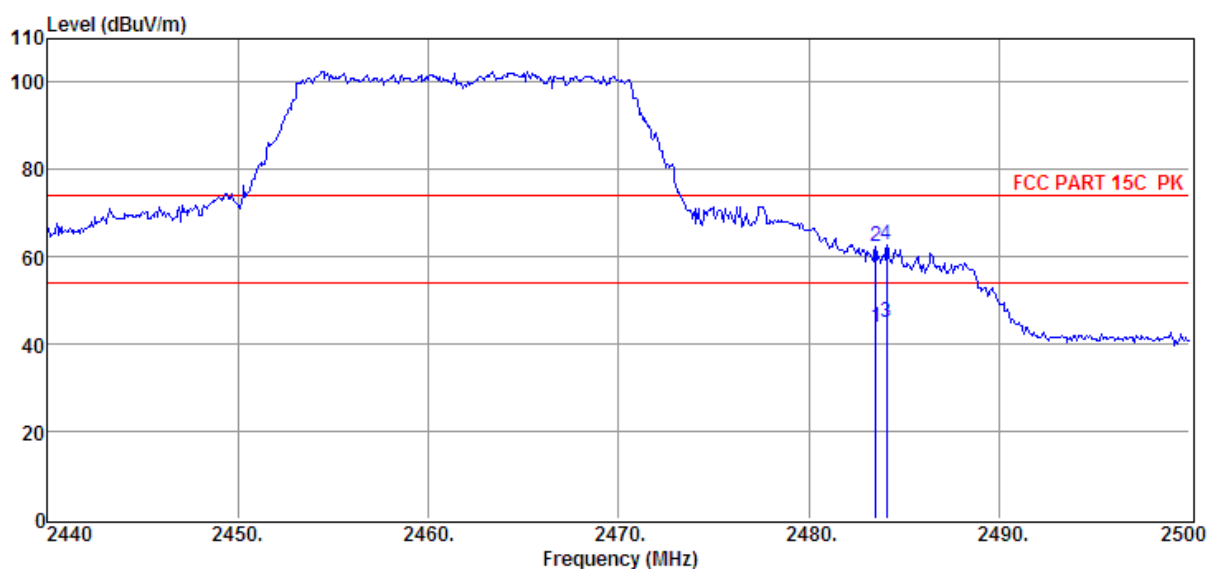

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 37.12                   | 30.14                       | 29.71               | 6.13                | 43.68                       | 54.00                     | -10.32                | Average  | VERTICAL     |
| 2              | 2483.50        | 55.99                   | 30.14                       | 29.71               | 6.13                | 62.55                       | 74.00                     | -11.45                | Peak     | VERTICAL     |
| 3              | 2484.10        | 38.24                   | 30.14                       | 29.71               | 6.13                | 44.80                       | 54.00                     | -9.20                 | Average  | VERTICAL     |
| 4              | 2484.10        | 56.31                   | 30.14                       | 29.71               | 6.13                | 62.87                       | 74.00                     | -11.13                | Peak     | VERTICAL     |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11n40 ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFI.EM6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2422MHz  
**Antenna/Distance** : 2016 HF907/3m/VERTICAL

Data: 25

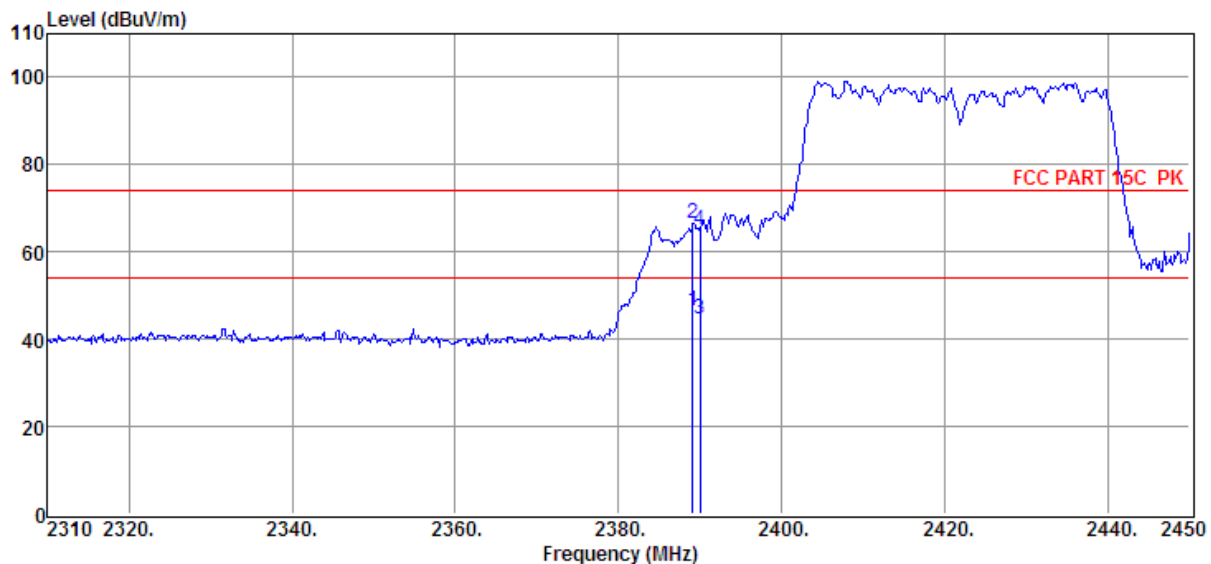

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2389.10        | 40.25                   | 29.77                       | 29.42               | 6.01                | 46.61                       | 54.00                     | -7.39                 | Average  | VERTICAL     |
| 2              | 2389.10        | 60.30                   | 29.77                       | 29.42               | 6.01                | 66.66                       | 74.00                     | -7.34                 | Peak     | VERTICAL     |
| 3              | 2390.00        | 38.11                   | 29.78                       | 29.42               | 6.03                | 44.50                       | 54.00                     | -9.50                 | Average  | VERTICAL     |
| 4              | 2390.00        | 58.62                   | 29.78                       | 29.42               | 6.03                | 65.01                       | 74.00                     | -8.99                 | Peak     | VERTICAL     |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11n40 ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFILEM6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2422MHz  
**Antenna/Distance** : 2016 HF907/3m/HORIZONTAL

Data: 26

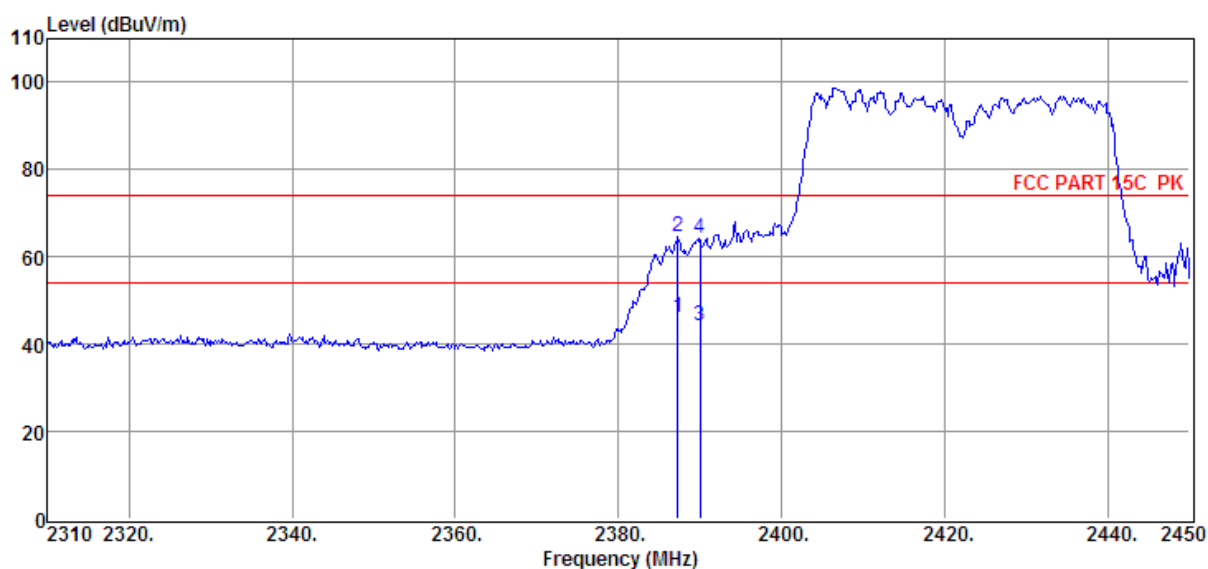

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2387.28        | 39.68                   | 29.77                       | 29.41               | 6.01                | 46.05                       | 54.00                     | -7.95                 | Average  | HORIZONTAL   |
| 2              | 2387.28        | 58.15                   | 29.77                       | 29.41               | 6.01                | 64.52                       | 74.00                     | -9.48                 | Peak     | HORIZONTAL   |
| 3              | 2390.00        | 37.79                   | 29.78                       | 29.42               | 6.03                | 44.18                       | 54.00                     | -9.82                 | Average  | HORIZONTAL   |
| 4              | 2390.00        | 58.04                   | 29.78                       | 29.42               | 6.03                | 64.43                       | 74.00                     | -9.57                 | Peak     | HORIZONTAL   |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11n40 ANT1+ANT2

**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2452MHz  
**Antenna/Distance** : 2016 HF907/3m/HORIZONTAL

D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G  
 2.4GWIFI.EM6

Data: 27

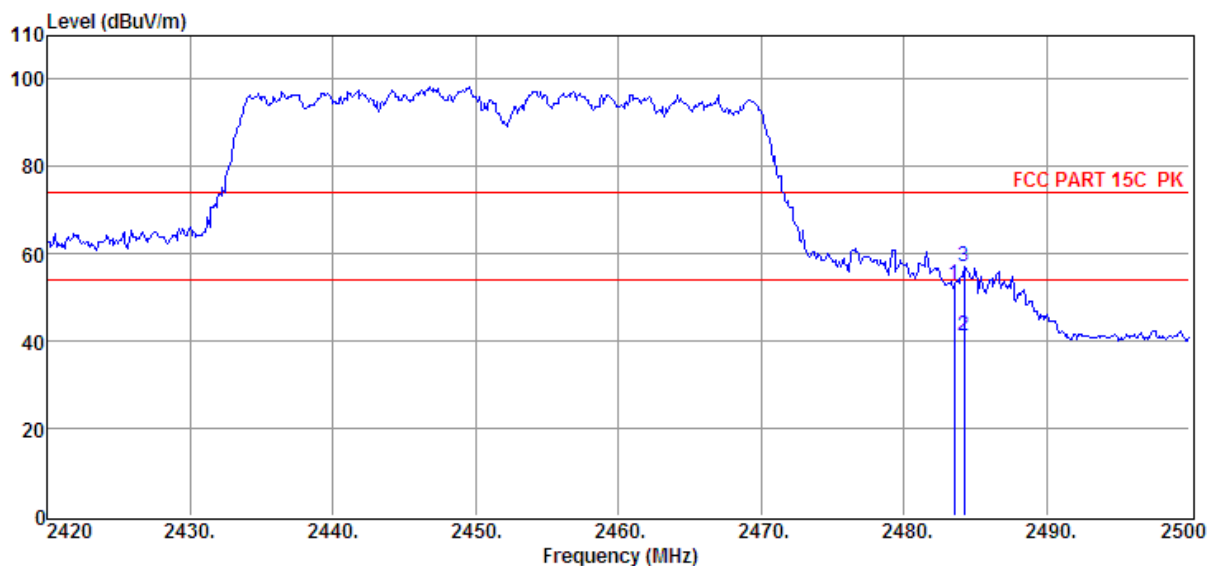

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 46.20                   | 30.14                       | 29.71               | 6.13                | 52.76                       | 74.00                     | -21.24                | Peak     | HORIZONTAL   |
| 2              | 2484.24        | 34.70                   | 30.14                       | 29.71               | 6.13                | 41.26                       | 54.00                     | -12.74                | Average  | HORIZONTAL   |
| 3              | 2484.24        | 50.38                   | 30.14                       | 29.71               | 6.13                | 56.94                       | 74.00                     | -17.06                | Peak     | HORIZONTAL   |


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 1#  
**Test Date** : 2017-10-15  
**EUT** : Wireless Adaptor and 120W Digital Amplifier  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa  
**Memo** : 11n40 ANT1+ANT2

**D:\2017 RE1# Report Data\Q17090505-1E\RF FCC 1-18G 2.4GWIFI.EM6**  
**Tested By** : TALENT  
**Model Number** : ADAPT+AMP  
**Test Mode** : TX mode 2452MHz  
**Antenna/Distance** : 2016 HF907/3m/VERTICAL

Data: 28

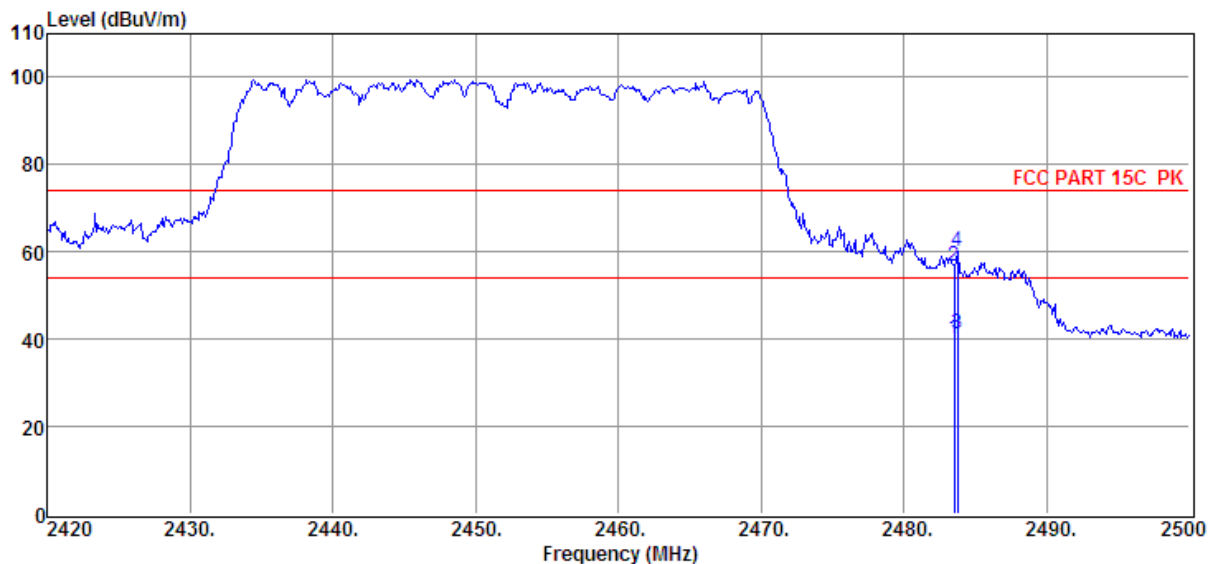


| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>(dB/m) | PRM<br>Factor<br>dB | Cable<br>Loss<br>dB | Result<br>Level<br>(dBμV/m) | Limit<br>Line<br>(dBμV/m) | Over<br>Limit<br>(dB) | Detector | Polarization |
|----------------|----------------|-------------------------|-----------------------------|---------------------|---------------------|-----------------------------|---------------------------|-----------------------|----------|--------------|
| 1              | 2483.50        | 33.52                   | 30.14                       | 29.71               | 6.13                | 40.08                       | 54.00                     | -13.92                | Average  | VERTICAL     |
| 2              | 2483.50        | 50.13                   | 30.14                       | 29.71               | 6.13                | 56.69                       | 74.00                     | -17.31                | Peak     | VERTICAL     |
| 3              | 2483.76        | 34.74                   | 30.14                       | 29.71               | 6.13                | 41.30                       | 54.00                     | -12.70                | Average  | VERTICAL     |
| 4              | 2483.76        | 53.48                   | 30.14                       | 29.71               | 6.13                | 60.04                       | 74.00                     | -13.96                | Peak     | VERTICAL     |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## 9. Power Line Conducted Emission

### 9.1. Block diagram of test setup

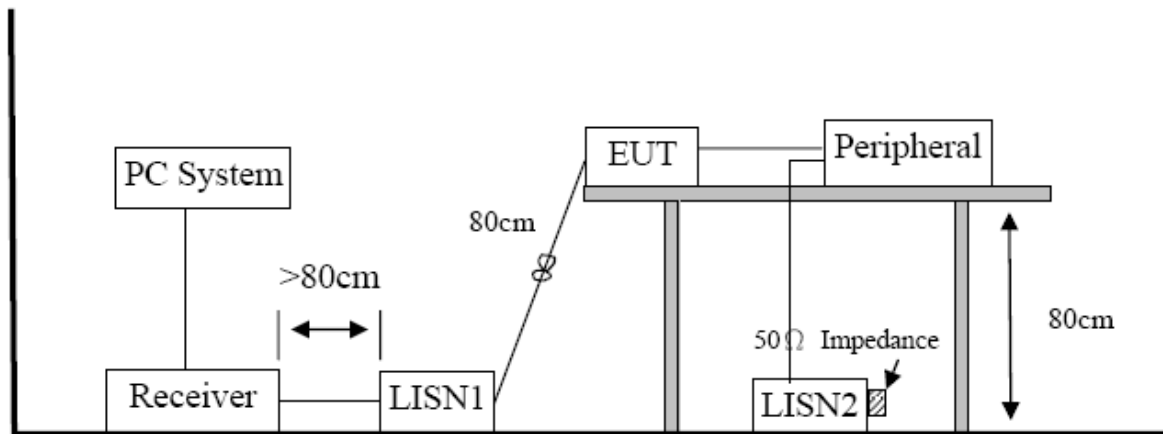

### 9.2. Power Line Conducted Emission Limits(Class B)

| Frequency       | Quasi-Peak Level<br>dB( $\mu$ V) | Average Level<br>dB( $\mu$ V) |
|-----------------|----------------------------------|-------------------------------|
| 150kHz ~ 500kHz | 66 ~ 56*                         | 56 ~ 46*                      |
| 500kHz ~ 5MHz   | 56                               | 46                            |
| 5MHz ~ 30MHz    | 60                               | 50                            |

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 9.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

#### **9.4. Test Result**

**PASS. (See below detailed test result)**

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: “----” means peak detection; “-----” means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worst case (AC 120V/60Hz).

# TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room **E:\2017 CE report data\Q17090505-1E\CE.EM6**  
**Test Date** : 2017-10-09 **Tested By** : Xian  
**EUT** : Wireless Adaptor and 120W Digital Amplifier **Model Number** : ADAPT+AMP  
**Power Supply** : AC 120V/60Hz **Test Mode** : TX mode  
**Condition** : Temp:24.5°C,Humi:55%,  
 Press:100.1kPa **LISN** : 2016 ENV216/NEUTRAL  
**Memo** :

Data: 52

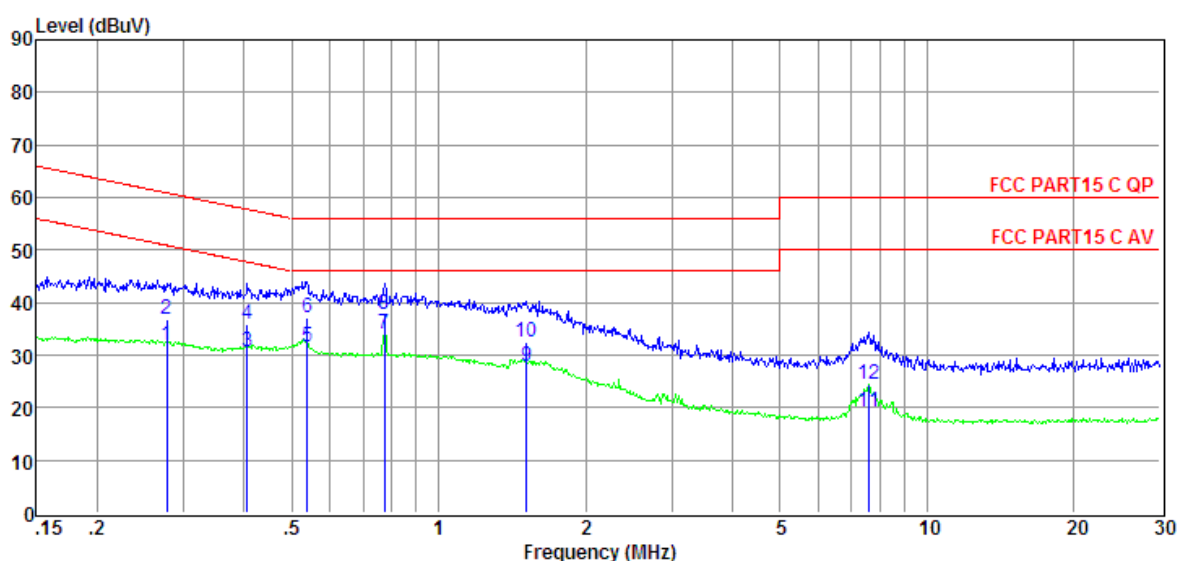

| Item   | Freq. | Read Level | LISN Factor | Cable Loss | Pulse Limiter Factor | Result Level | Limit Line | Over Limit | Detector | Phase   |
|--------|-------|------------|-------------|------------|----------------------|--------------|------------|------------|----------|---------|
| (Mark) | (MHz) | (dBμV)     | (dB)        | (dB)       | (dB)                 | (dBμV)       | (dBμV)     | (dB)       |          |         |
| 1      | 0.28  | 12.30      | 9.61        | 0.02       | 9.86                 | 31.79        | 50.90      | -19.11     | Average  | NEUTRAL |
| 2      | 0.28  | 17.20      | 9.61        | 0.02       | 9.86                 | 36.69        | 60.90      | -24.21     | QP       | NEUTRAL |
| 3      | 0.41  | 11.05      | 9.61        | 0.02       | 9.86                 | 30.54        | 47.73      | -17.19     | Average  | NEUTRAL |
| 4      | 0.41  | 16.39      | 9.61        | 0.02       | 9.86                 | 35.88        | 57.73      | -21.85     | QP       | NEUTRAL |
| 5      | 0.54  | 12.18      | 9.61        | 0.03       | 9.86                 | 31.68        | 46.00      | -14.32     | Average  | NEUTRAL |
| 6      | 0.54  | 17.53      | 9.61        | 0.03       | 9.86                 | 37.03        | 56.00      | -18.97     | QP       | NEUTRAL |
| 7      | 0.78  | 14.37      | 9.61        | 0.03       | 9.86                 | 33.87        | 46.00      | -12.13     | Average  | NEUTRAL |
| 8      | 0.78  | 18.27      | 9.61        | 0.03       | 9.86                 | 37.77        | 56.00      | -18.23     | QP       | NEUTRAL |
| 9      | 1.51  | 8.34       | 9.62        | 0.04       | 9.86                 | 27.86        | 46.00      | -18.14     | Average  | NEUTRAL |
| 10     | 1.51  | 13.07      | 9.62        | 0.04       | 9.86                 | 32.59        | 56.00      | -23.41     | QP       | NEUTRAL |
| 11     | 7.61  | -0.58      | 9.70        | 0.09       | 9.89                 | 19.10        | 50.00      | -30.90     | Average  | NEUTRAL |
| 12     | 7.61  | 4.86       | 9.70        | 0.09       | 9.89                 | 24.54        | 60.00      | -35.46     | QP       | NEUTRAL |

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

# TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room **E:\2017 CE report data\Q17090505-1E\CE.EM6**  
**Test Date** : 2017-10-09 **Tested By** : Xian  
**EUT** : Wireless Adaptor and 120W Digital Amplifier **Model Number** : ADAPT+AMP  
**Power Supply** : AC 120V/60Hz **Test Mode** : TX mode  
**Condition** : Temp:24.5°C,Humi:55%,  
Press:100.1kPa **LISN** : 2016 ENV216/LINE  
**Memo** :

Data: 54

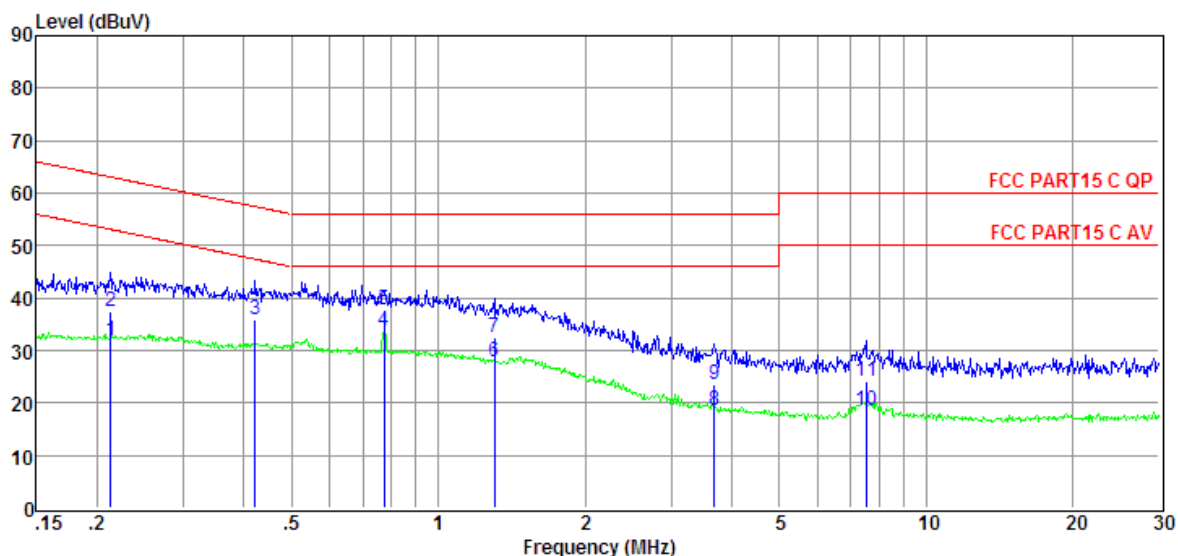

| Item<br>(Mark) | Freq.<br>(MHz) | Read<br>Level<br>(dBμV) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Pulse<br>Limiter<br>Factor<br>(dB) | Result<br>Level<br>(dBμV) | Limit<br>Line<br>(dBμV) | Over<br>Limit<br>(dB) | Detector | Phase |
|----------------|----------------|-------------------------|------------------------|-----------------------|------------------------------------|---------------------------|-------------------------|-----------------------|----------|-------|
| 1              | 0.21           | 12.44                   | 9.61                   | 0.02                  | 9.86                               | 31.93                     | 53.10                   | -21.17                | Average  | LINE  |
| 2              | 0.21           | 17.87                   | 9.61                   | 0.02                  | 9.86                               | 37.36                     | 63.10                   | -25.74                | QP       | LINE  |
| 3              | 0.42           | 16.34                   | 9.61                   | 0.02                  | 9.86                               | 35.83                     | 57.42                   | -21.59                | QP       | LINE  |
| 4              | 0.78           | 14.27                   | 9.61                   | 0.03                  | 9.86                               | 33.77                     | 46.00                   | -12.23                | Average  | LINE  |
| 5              | 0.78           | 18.32                   | 9.61                   | 0.03                  | 9.86                               | 37.82                     | 56.00                   | -18.18                | QP       | LINE  |
| 6              | 1.30           | 8.32                    | 9.62                   | 0.03                  | 9.86                               | 27.83                     | 46.00                   | -18.17                | Average  | LINE  |
| 7              | 1.30           | 12.85                   | 9.62                   | 0.03                  | 9.86                               | 32.36                     | 56.00                   | -23.64                | QP       | LINE  |
| 8              | 3.68           | -1.10                   | 9.65                   | 0.06                  | 9.87                               | 18.48                     | 46.00                   | -27.52                | Average  | LINE  |
| 9              | 3.68           | 4.00                    | 9.65                   | 0.06                  | 9.87                               | 23.58                     | 56.00                   | -32.42                | QP       | LINE  |
| 10             | 7.53           | -1.18                   | 9.70                   | 0.09                  | 9.89                               | 18.50                     | 50.00                   | -31.50                | Average  | LINE  |
| 11             | 7.53           | 4.45                    | 9.70                   | 0.09                  | 9.89                               | 24.13                     | 60.00                   | -35.87                | QP       | LINE  |

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

## **10. Antenna Requirements**

### **10.1. Limit**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **10.2. Result**

The antennas used for this product are integrated antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 4.20dBi.

**END OF REPORT**