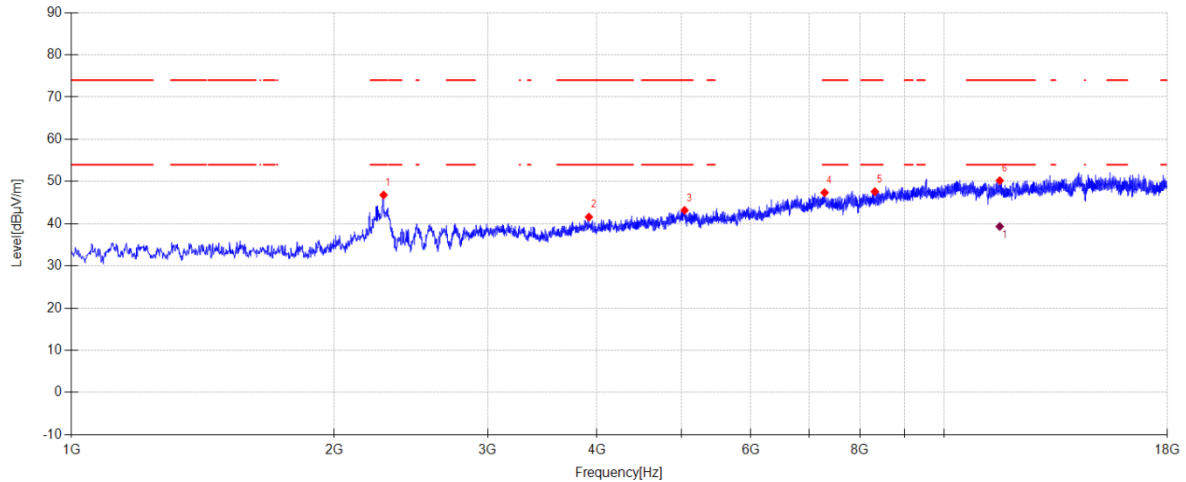


TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU4 2437MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G RU\8
Memo: Sample Number: S26081718-003

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2278.400	58.76	28.10	-40.06	46.80	74.00	27.20	PK	Vertical
2	3915.500	50.85	31.63	-40.90	41.58	74.00	32.42	PK	Vertical
3	5039.200	50.04	33.98	-40.86	43.16	74.00	30.84	PK	Vertical
4	7290.000	49.39	37.72	-39.75	47.36	74.00	26.64	PK	Vertical
5	8323.600	48.67	38.00	-39.07	47.60	74.00	26.40	PK	Vertical
6	11570.600	45.76	39.66	-35.21	50.21	74.00	23.79	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11570.600	34.90	39.66	-35.21	39.35	54.00	14.65	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU8 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G RU\9
Memo: Sample Number: S26081718-003

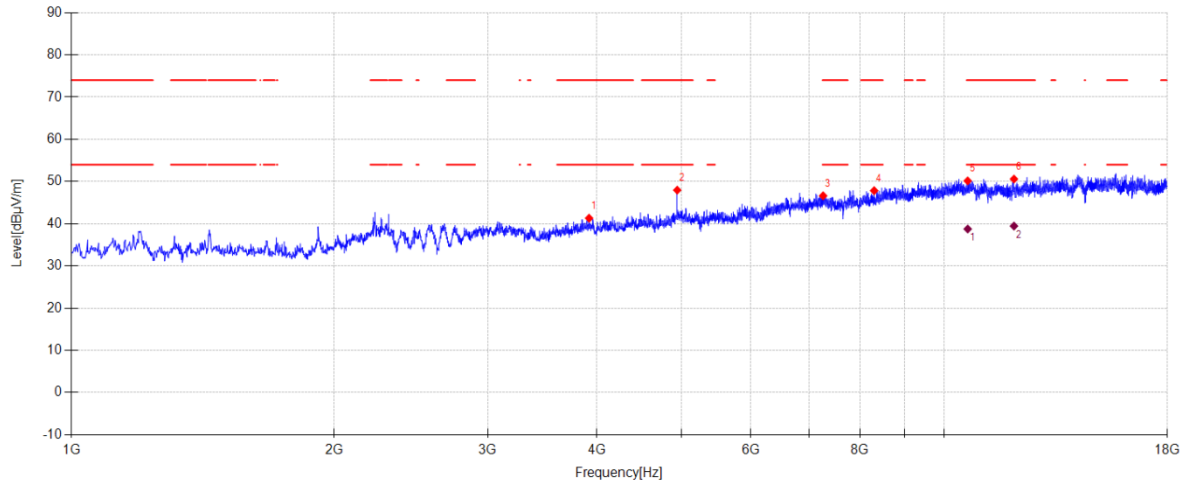**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3917.200	50.59	31.63	-40.91	41.31	74.00	32.69	PK	Horizontal
2	4942.300	55.28	33.67	-40.99	47.96	74.00	26.04	PK	Horizontal
3	7261.100	48.84	37.78	-40.01	46.61	74.00	27.39	PK	Horizontal
4	8308.300	48.91	38.00	-39.08	47.83	74.00	26.17	PK	Horizontal
5	10632.200	46.17	39.86	-35.88	50.15	74.00	23.85	PK	Horizontal
6	12012.600	45.48	39.81	-34.70	50.59	74.00	23.41	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10632.200	34.77	39.86	-35.88	38.75	54.00	15.25	AV	Horizontal
2	12012.600	34.33	39.81	-34.70	39.44	54.00	14.56	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU8 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G RU\10
Memo: Sample Number: S26081718-003

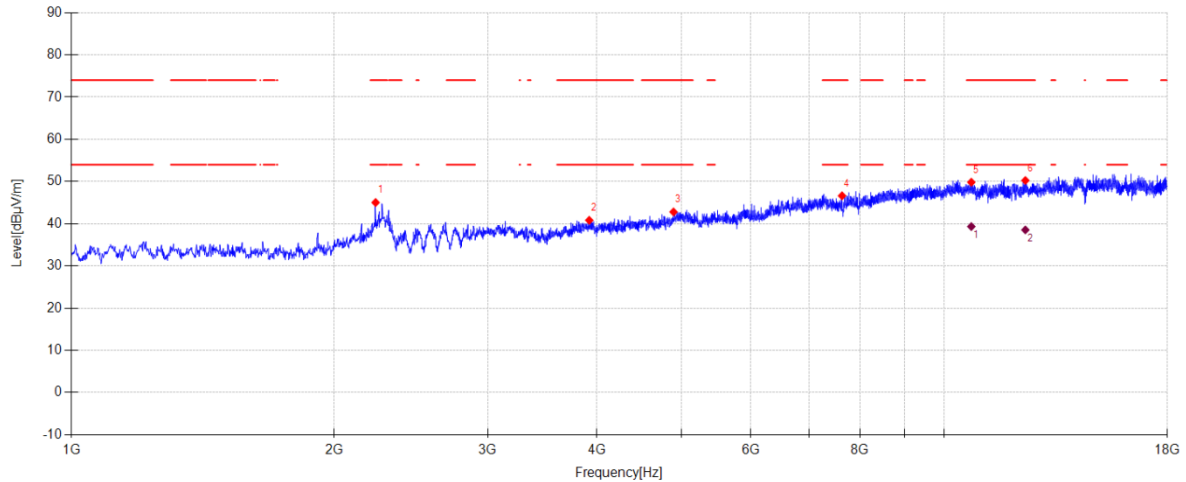**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2230.800	56.96	28.10	-40.04	45.02	74.00	28.98	PK	Vertical
2	3918.900	50.10	31.64	-40.92	40.82	74.00	33.18	PK	Vertical
3	4894.700	50.56	33.49	-41.26	42.79	74.00	31.21	PK	Vertical
4	7633.400	49.14	37.27	-39.80	46.61	74.00	27.39	PK	Vertical
5	10734.200	45.44	40.00	-35.61	49.83	74.00	24.17	PK	Vertical
6	12378.100	45.24	39.72	-34.72	50.24	74.00	23.76	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10734.200	34.94	40.00	-35.61	39.33	54.00	14.67	AV	Vertical
2	12378.100	33.53	39.72	-34.72	38.53	54.00	15.47	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\41
Memo: Sample Number: S26081718-003

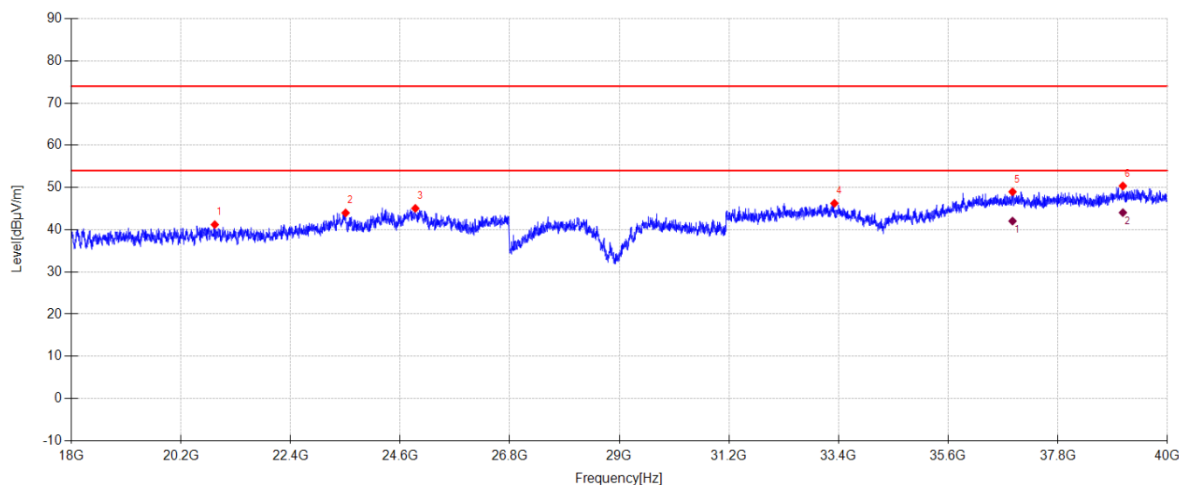

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20879.258	49.57	38.36	3.71	41.21	74.00	32.79	PK	Horizontal
2	23506.043	50.86	39.20	4.70	43.98	74.00	30.02	PK	Horizontal
3	24905.384	50.64	39.55	4.73	45.05	74.00	28.95	PK	Horizontal
4	33317.544	47.56	41.73	5.47	46.25	74.00	27.75	PK	Horizontal
5	36892.443	49.28	42.89	6.13	48.98	74.00	25.02	PK	Horizontal
6	39108.290	47.89	45.99	6.60	50.38	74.00	23.62	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36892.443	42.34	42.89	6.13	42.04	54.00	11.96	AV	Horizontal
2	39108.290	41.56	45.99	6.60	44.05	54.00	9.95	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\42
Memo: Sample Number: S26081718-003

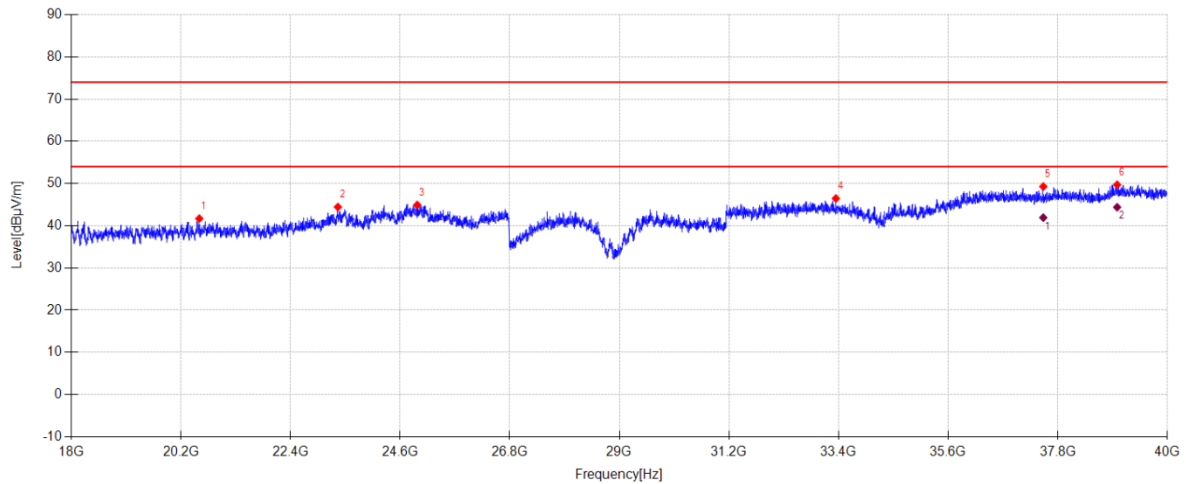**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20567.696	49.74	38.27	3.83	41.69	74.00	32.31	PK	Vertical
2	23350.262	51.54	39.23	4.64	44.43	74.00	29.57	PK	Vertical
3	24942.986	50.46	39.57	4.74	44.91	74.00	29.09	PK	Vertical
4	33347.088	47.80	41.74	5.48	46.46	74.00	27.54	PK	Vertical
5	37510.194	49.98	43.41	5.07	49.27	74.00	24.73	PK	Vertical
6	38992.797	47.16	45.89	6.58	49.70	74.00	24.30	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37510.194	42.62	43.41	5.07	41.91	54.00	12.09	AV	Vertical
2	38992.797	41.84	45.89	6.58	44.38	54.00	9.62	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU0 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G RU\11
Memo: Sample Number: S26081718-003

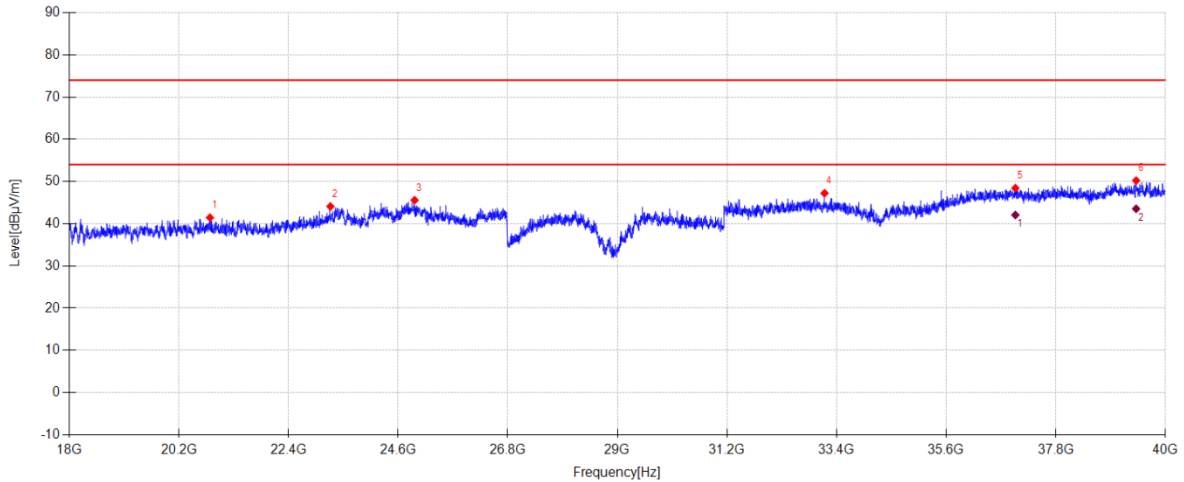**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20822.854	49.74	38.35	3.73	41.44	74.00	32.56	PK	Horizontal
2	23240.142	51.38	39.25	4.60	44.10	74.00	29.90	PK	Horizontal
3	24929.557	51.14	39.56	4.73	45.57	74.00	28.43	PK	Horizontal
4	33159.077	48.38	41.66	5.41	47.22	74.00	26.78	PK	Horizontal
5	36989.134	48.82	42.90	6.05	48.43	74.00	25.57	PK	Horizontal
6	39414.479	47.92	46.23	6.64	50.23	74.00	23.77	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36989.134	42.46	42.90	6.05	42.07	54.00	11.93	AV	Horizontal
2	39414.479	41.23	46.23	6.64	43.54	54.00	10.46	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU0 2412MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G RU\12
Memo: Sample Number: S26081718-003

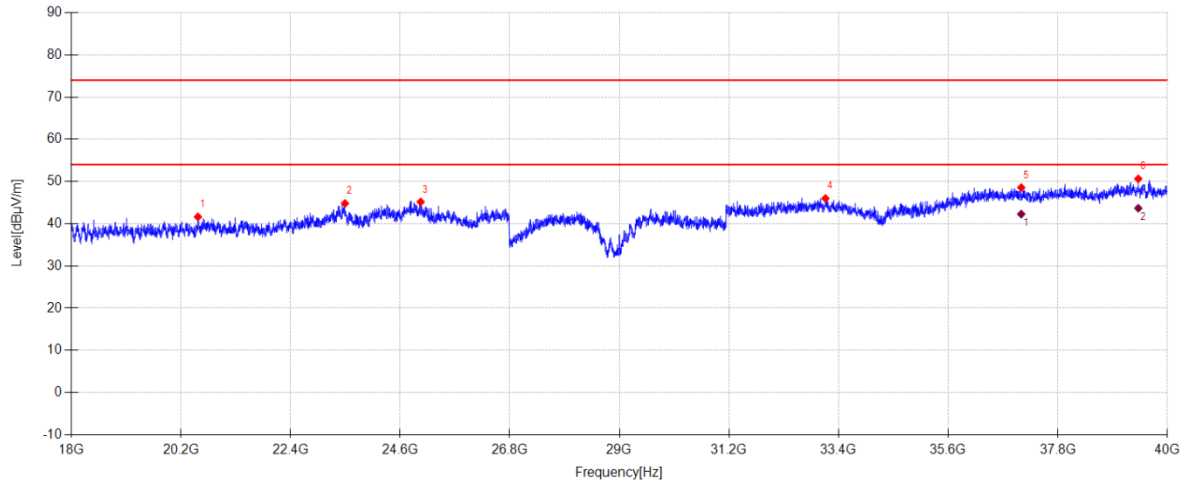

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20540.838	49.65	38.26	3.84	41.62	74.00	32.38	PK	Vertical
2	23492.614	51.70	39.20	4.70	44.80	74.00	29.20	PK	Vertical
3	25012.819	50.66	39.60	4.75	45.17	74.00	28.83	PK	Vertical
4	33137.590	47.11	41.66	5.41	45.99	74.00	28.01	PK	Vertical
5	37067.025	49.00	42.97	5.91	48.56	74.00	25.44	PK	Vertical
6	39417.165	48.33	46.23	6.64	50.63	74.00	23.37	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	37067.025	42.73	42.97	5.91	42.29	54.00	11.71	AV	Vertical
2	39417.165	41.37	46.23	6.64	43.67	54.00	10.33	AV	Vertical

Note:


1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13. Band Edge Compliance

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2027/07/10
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2027/06/25
RF Cable	Tonscend	7+1+1+0.5+0.5m	DDT-ZC05978	2027/01/29
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS-RE&RSE (V5.0.0)	DDT-ZC06466	/

13.2. Block diagram of test setup

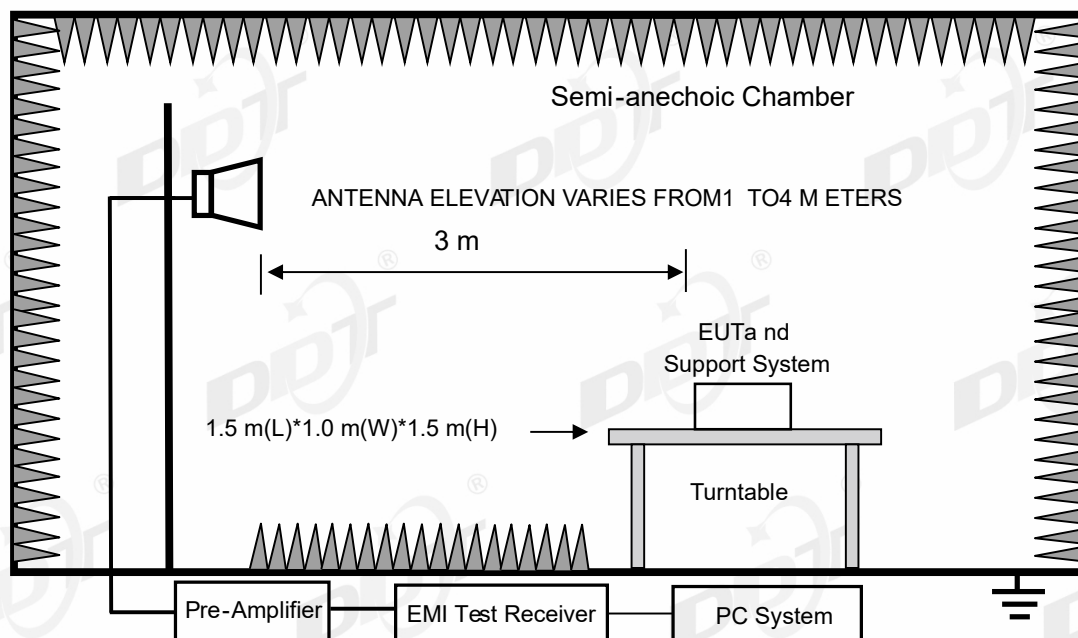

13.3. Limits

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

13.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
Remark: All restriction band have been tested, and only the worst case is shown in report.

13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result


Test Date: 2026-08-19 Tested By: Cao Jie

Test Mode: ANT1 TX 11B 2412MHz Mode Power Supply: AC 120V/60Hz

Condition: Temp:24.7°C;Humi:45.0% Test Site: 4# Fully Anechoic Room

File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\19

Memo: Sample Number: S26081718-003

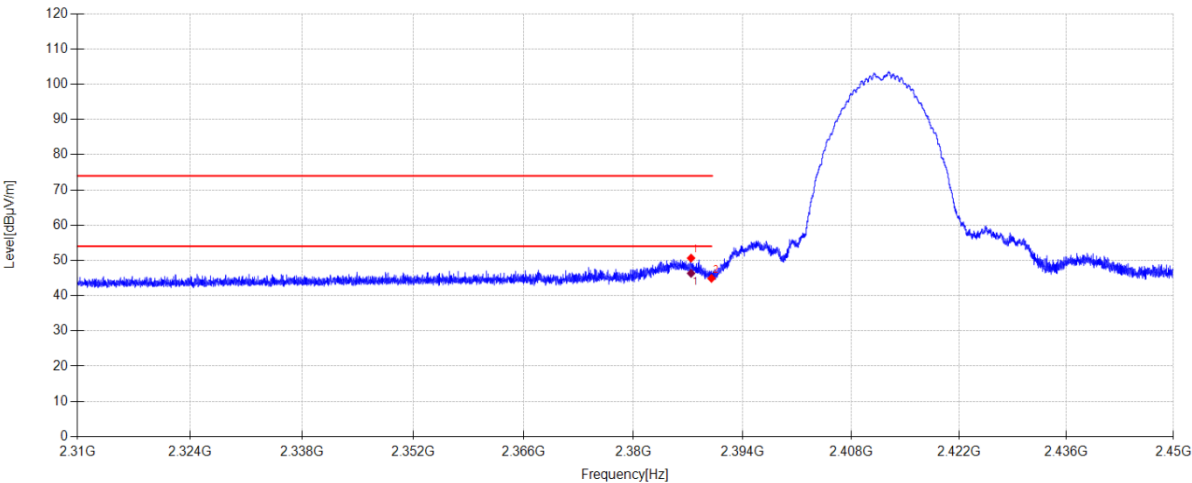

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.378	48.63	28.17	-26.15	50.65	74.00	23.35	PK	Horizontal
2	2390.000	42.86	28.18	-26.15	44.89	74.00	29.11	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.378	44.31	28.17	-26.15	46.33	54.00	7.67	AV	Horizontal


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11B 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\20
Memo: Sample Number: S26081718-003

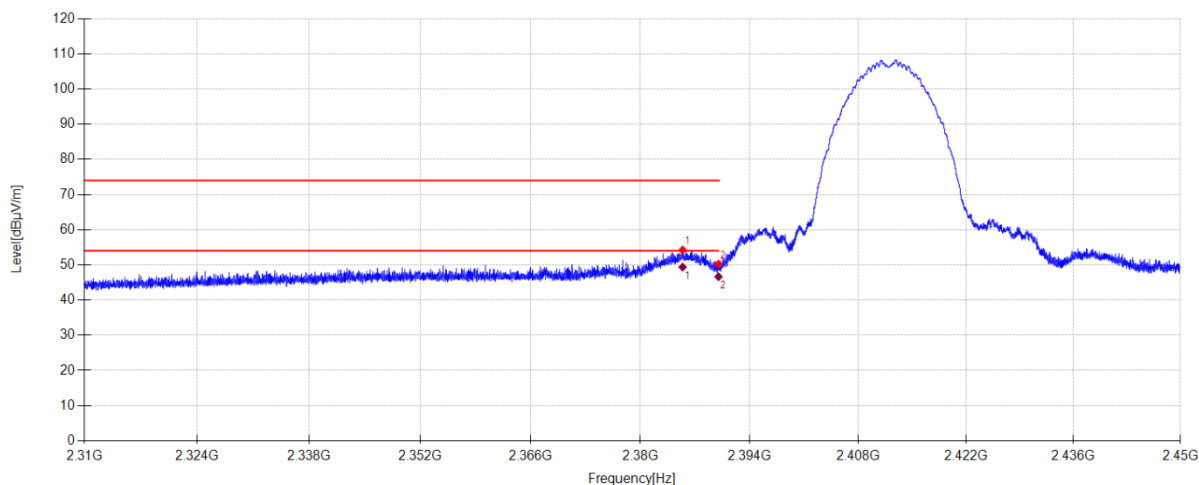**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.404	52.24	28.17	-26.15	54.26	74.00	19.74	PK	Vertical
2	2390.000	48.19	28.18	-26.15	50.22	74.00	23.78	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.404	47.36	28.17	-26.15	49.38	54.00	4.62	AV	Vertical
2	2390.000	44.61	28.18	-26.15	46.64	54.00	7.36	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-19

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11B 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\17

Memo:

Sample Number: S26081718-003

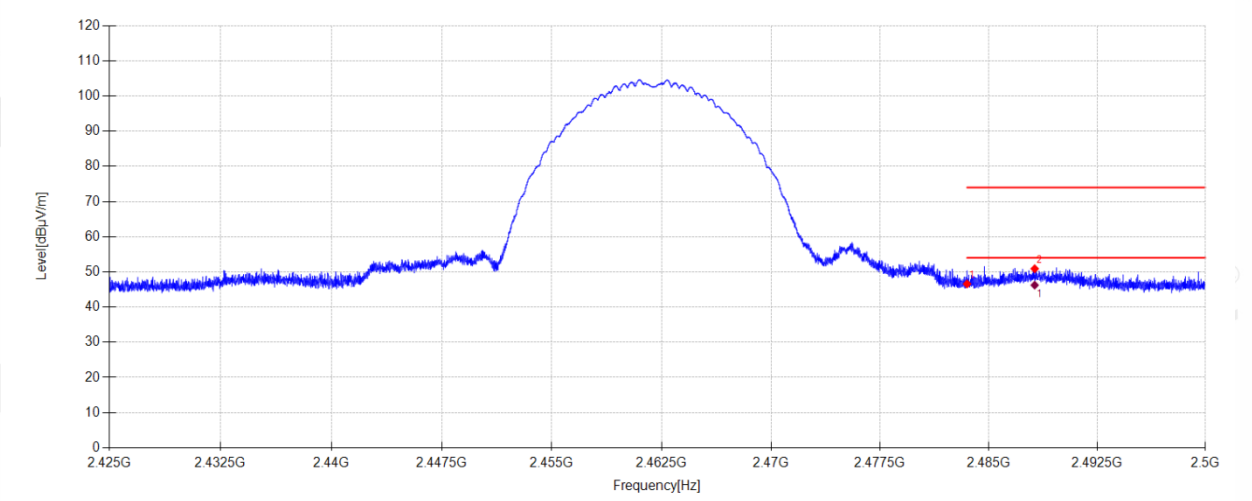

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	44.13	28.60	-26.14	46.59	74.00	27.41	PK	Horizontal
2	2488.173	48.41	28.63	-26.14	50.90	74.00	23.10	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2488.173	43.75	28.63	-26.14	46.24	54.00	7.76	AV	Horizontal


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11B 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\18
Memo: Sample Number: S26081718-003

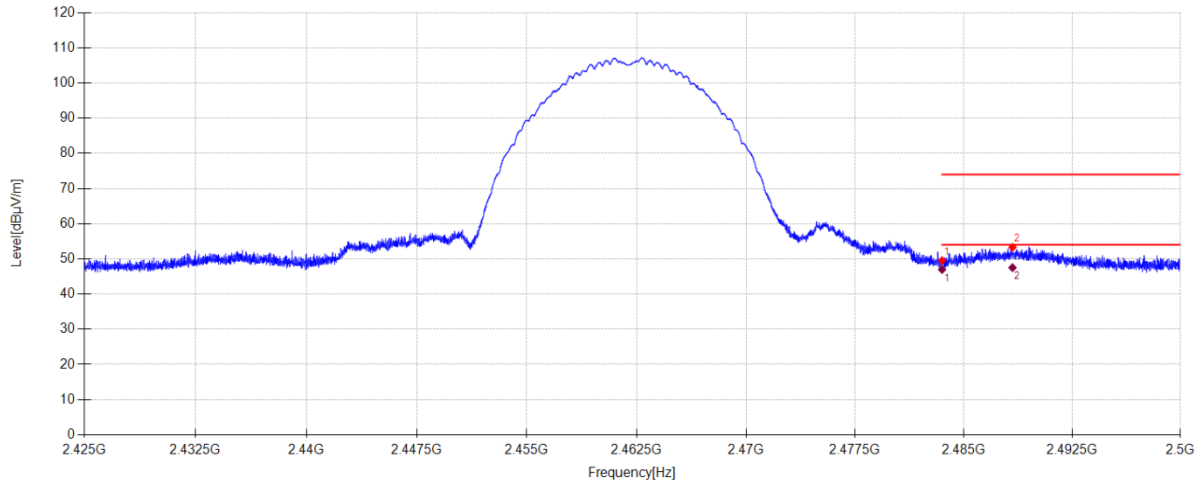

Suspected Data List

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	47.06	28.60	-26.14	49.52	74.00	24.48	PK	Vertical
2	2488.368	50.81	28.63	-26.14	53.30	74.00	20.70	PK	Vertical

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	44.51	28.60	-26.14	46.97	54.00	7.03	AV	Vertical
2	2488.368	45.03	28.63	-26.14	47.52	54.00	6.48	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11B 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\21
Memo: Sample Number: S26081718-003

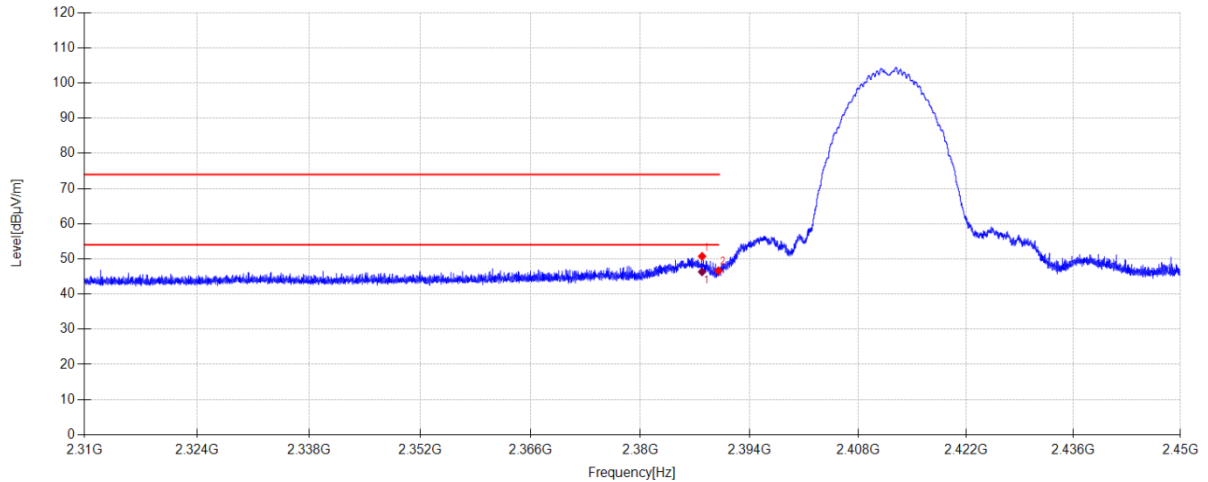**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.896	48.70	28.18	-26.15	50.73	74.00	23.27	PK	Horizontal
2	2390.000	44.60	28.18	-26.15	46.63	74.00	27.37	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.896	44.30	28.18	-26.15	46.33	54.00	7.67	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11B 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\22
Memo: Sample Number: S26081718-003

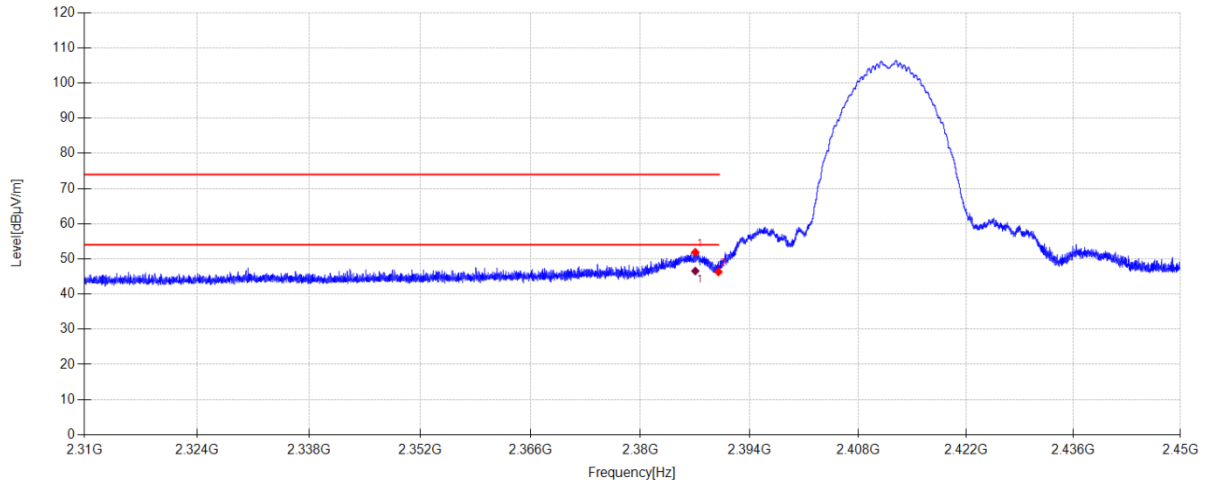**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.028	49.87	28.17	-26.15	51.89	74.00	22.11	PK	Vertical
2	2390.000	44.27	28.18	-26.15	46.30	74.00	27.70	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.028	44.53	28.17	-26.15	46.55	54.00	7.45	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-19

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11B 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\23

Memo:

Sample Number: S26081718-003

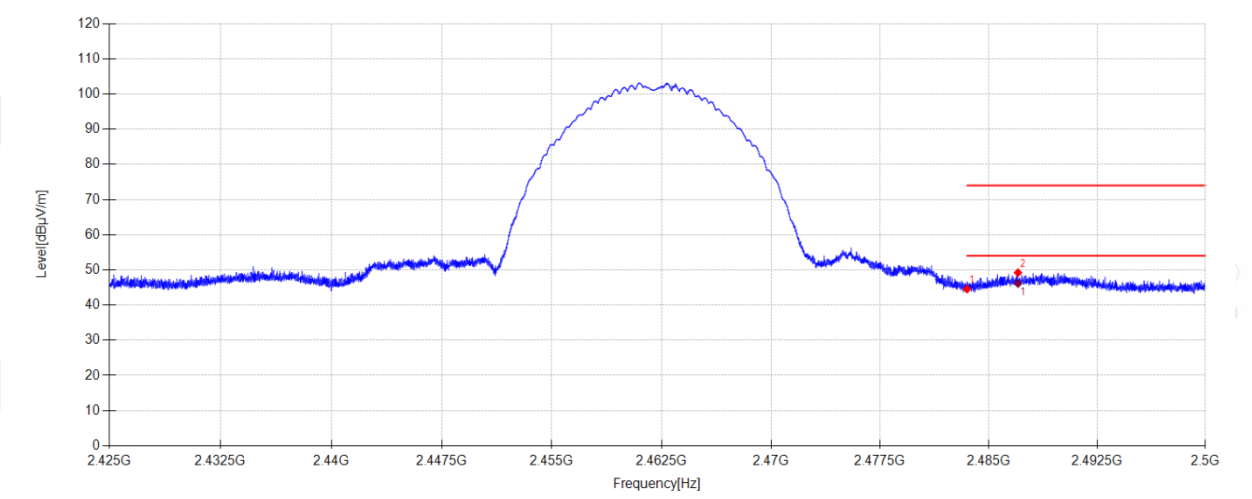

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	42.09	28.60	-26.14	44.55	74.00	29.45	PK	Horizontal
2	2487.018	46.74	28.62	-26.14	49.22	74.00	24.78	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2487.018	43.65	28.62	-26.14	46.13	54.00	7.87	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-19

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11B 2462MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\24

Memo:

Sample Number: S26081718-003

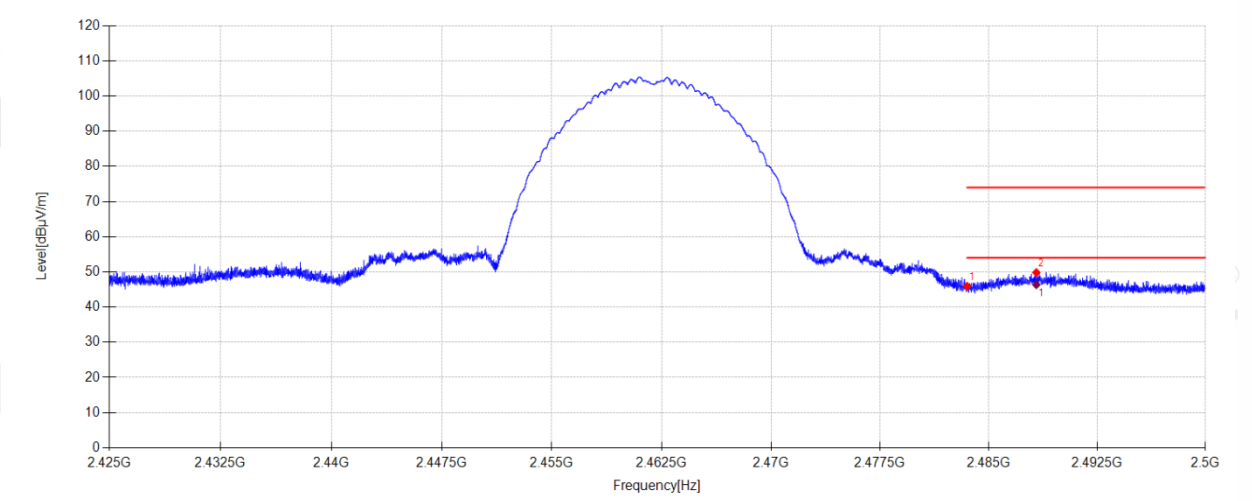

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	43.46	28.60	-26.14	45.92	74.00	28.08	PK	Vertical
2	2488.285	47.34	28.63	-26.14	49.83	74.00	24.17	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2488.285	43.86	28.63	-26.14	46.35	54.00	7.65	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11G 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\29
Memo: Sample Number: S26081718-003

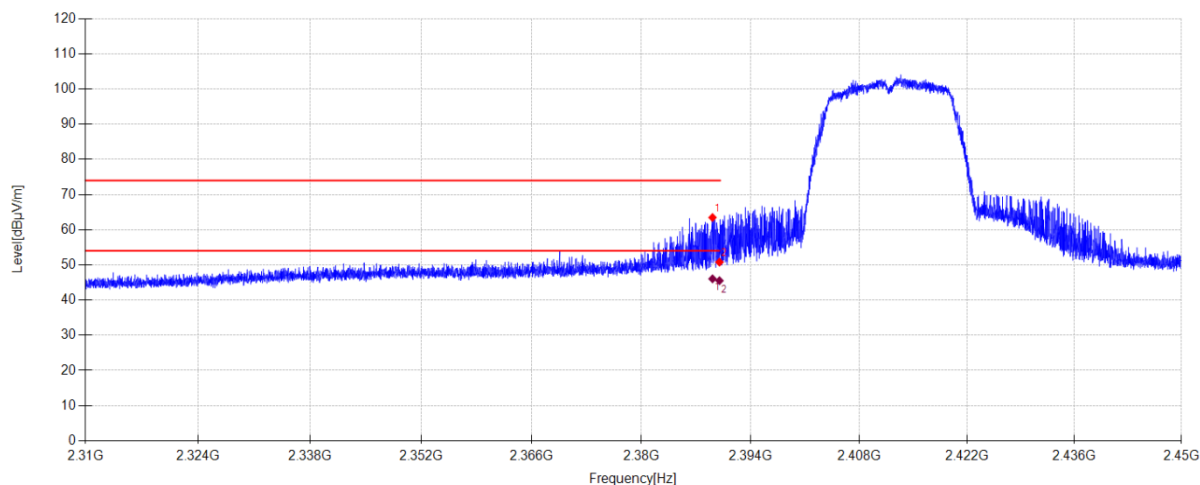**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.100	61.44	28.18	-26.15	63.47	74.00	10.53	PK	Horizontal
2	2390.000	48.76	28.18	-26.15	50.79	74.00	23.21	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.100	44.01	28.18	-26.15	46.04	54.00	7.96	AV	Horizontal
2	2390.000	43.49	28.18	-26.15	45.52	54.00	8.48	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11G 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\30
Memo: Sample Number: S26081718-003

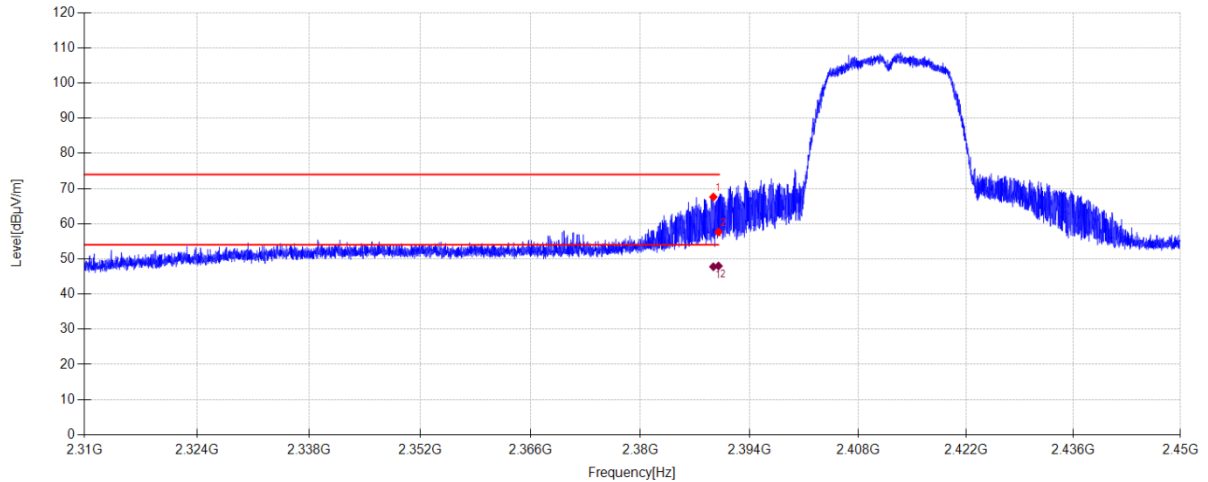**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.338	65.57	28.18	-26.15	67.60	74.00	6.40	PK	Vertical
2	2390.000	55.61	28.18	-26.15	57.64	74.00	16.36	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.338	45.73	28.18	-26.15	47.76	54.00	6.24	AV	Vertical
2	2390.002	45.96	28.18	-26.15	47.99	54.00	6.01	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11G 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\31
Memo: Sample Number: S26081718-003

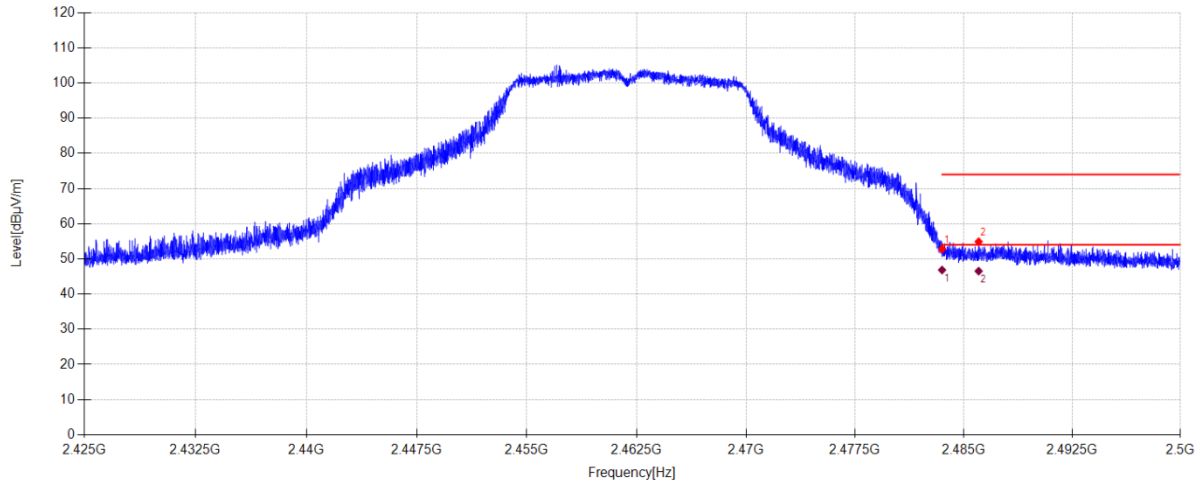**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	50.35	28.60	-26.14	52.81	74.00	21.19	PK	Horizontal
2	2486.028	52.42	28.62	-26.14	54.90	74.00	19.10	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	44.38	28.60	-26.14	46.84	54.00	7.16	AV	Horizontal
2	2486.028	44.05	28.62	-26.14	46.53	54.00	7.47	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11G 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\32
Memo: Sample Number: S26081718-003

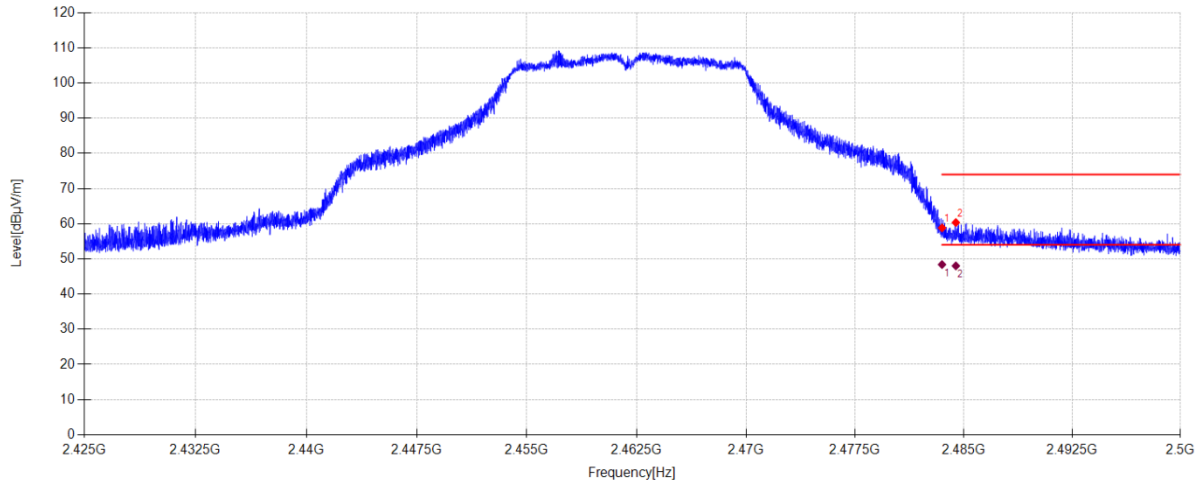

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	56.36	28.60	-26.14	58.82	74.00	15.18	PK	Vertical
2	2484.453	57.87	28.61	-26.14	60.34	74.00	13.66	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.496	45.93	28.60	-26.14	48.39	54.00	5.61	AV	Vertical
2	2484.453	45.55	28.61	-26.14	48.02	54.00	5.98	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11G 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\27
Memo: Sample Number: S26081718-003

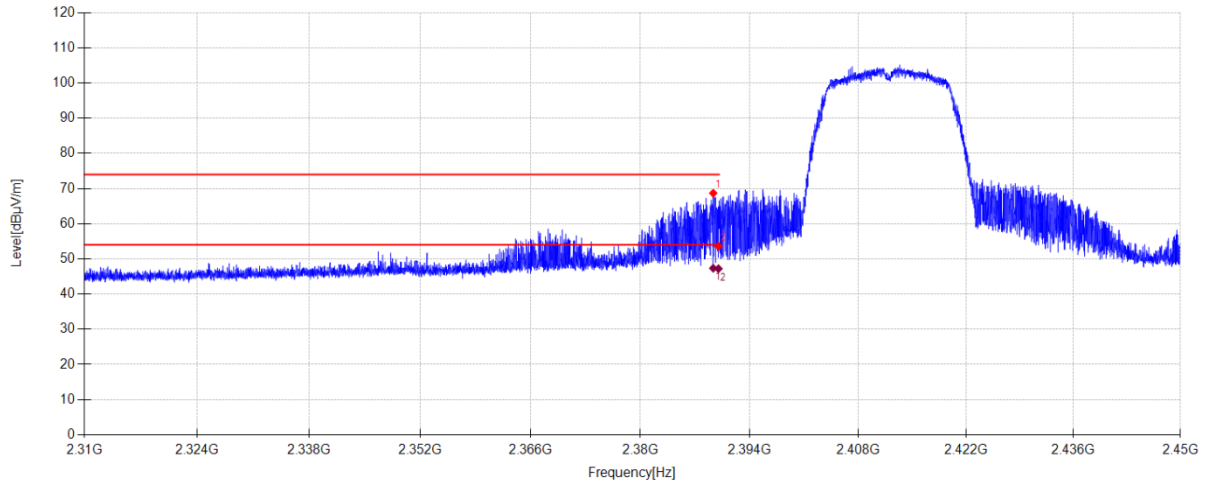**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.324	66.66	28.18	-26.15	68.69	74.00	5.31	PK	Horizontal
2	2390.000	51.57	28.18	-26.15	53.60	74.00	20.40	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.324	45.31	28.18	-26.15	47.34	54.00	6.66	AV	Horizontal
2	2390.000	45.18	28.18	-26.15	47.21	54.00	6.79	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11G 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\28
Memo: Sample Number: S26081718-003

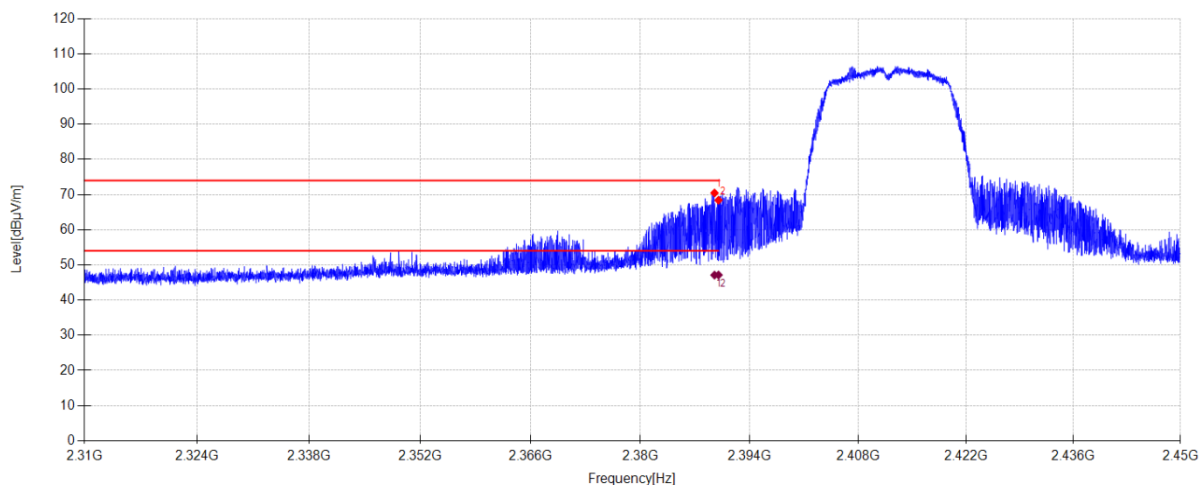

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.492	68.42	28.18	-26.15	70.45	74.00	3.55	PK	Vertical
2	2390.000	66.36	28.18	-26.15	68.39	74.00	5.61	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.488	45.07	28.18	-26.15	47.10	54.00	6.90	AV	Vertical
2	2390.000	45.11	28.18	-26.15	47.14	54.00	6.86	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11G 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\25
Memo: Sample Number: S26081718-003

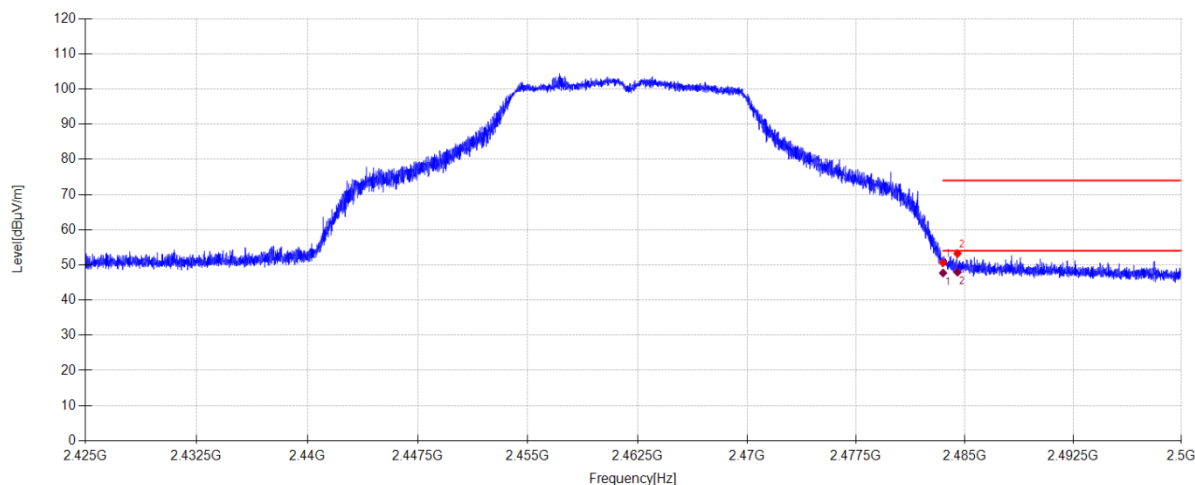

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	48.15	28.60	-26.14	50.61	74.00	23.39	PK	Horizontal
2	2484.498	50.76	28.61	-26.14	53.23	74.00	20.77	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.24	28.60	-26.14	47.70	54.00	6.30	AV	Horizontal
2	2484.498	45.47	28.61	-26.14	47.94	54.00	6.06	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11G 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\26
Memo: Sample Number: S26081718-003

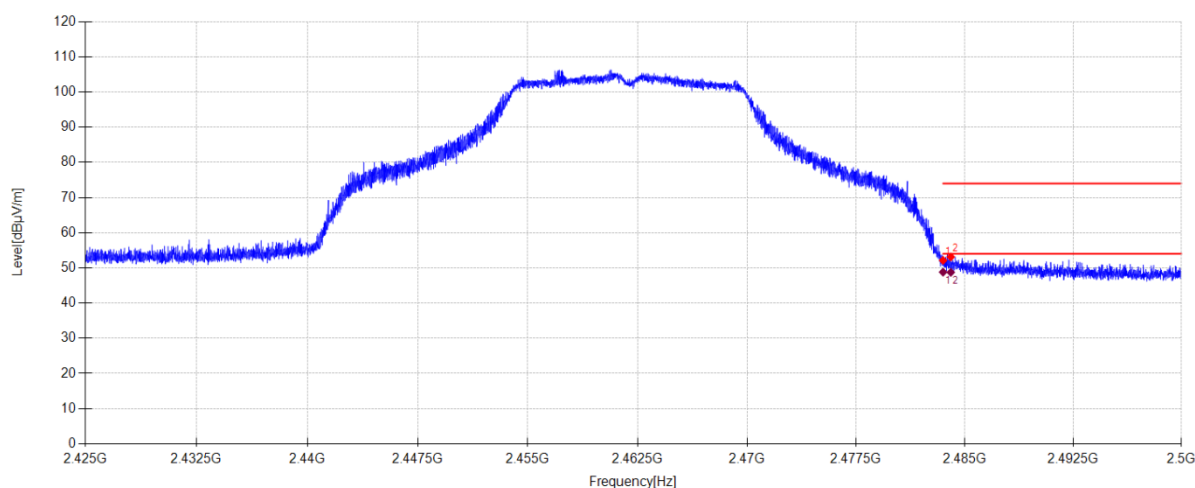

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	49.68	28.60	-26.14	52.14	74.00	21.86	PK	Vertical
2	2484.033	50.65	28.60	-26.14	53.11	74.00	20.89	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.35	28.60	-26.14	48.81	54.00	5.19	AV	Vertical
2	2484.033	46.28	28.60	-26.14	48.74	54.00	5.26	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\11
Memo: Sample Number: S26081718-003

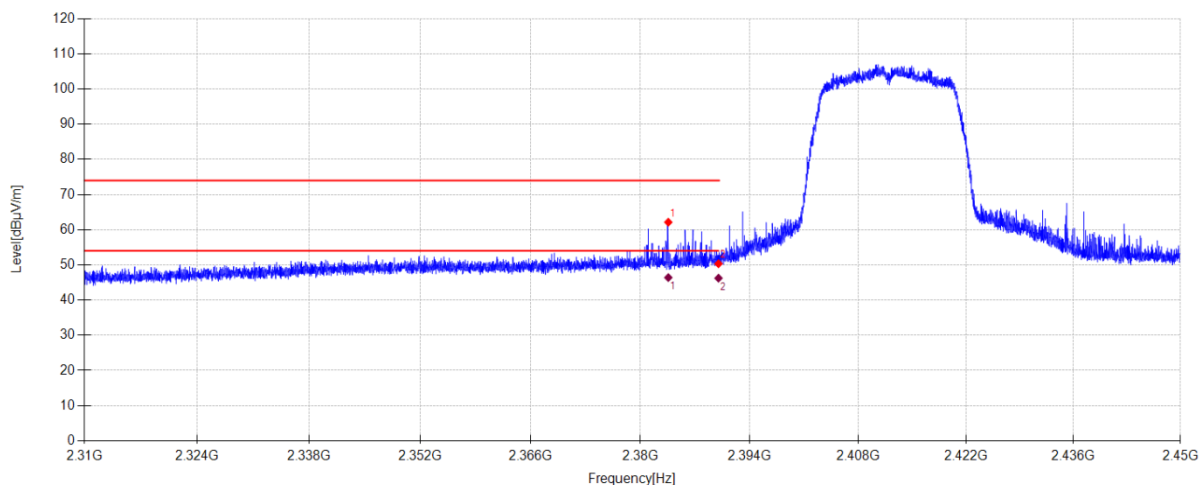

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2383.570	60.11	28.17	-26.15	62.13	74.00	11.87	PK	Horizontal
2	2390.000	48.30	28.18	-26.15	50.33	74.00	23.67	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2383.570	44.38	28.17	-26.15	46.40	54.00	7.60	AV	Horizontal
2	2390.000	44.20	28.18	-26.15	46.23	54.00	7.77	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\12
Memo: Sample Number: S26081718-003

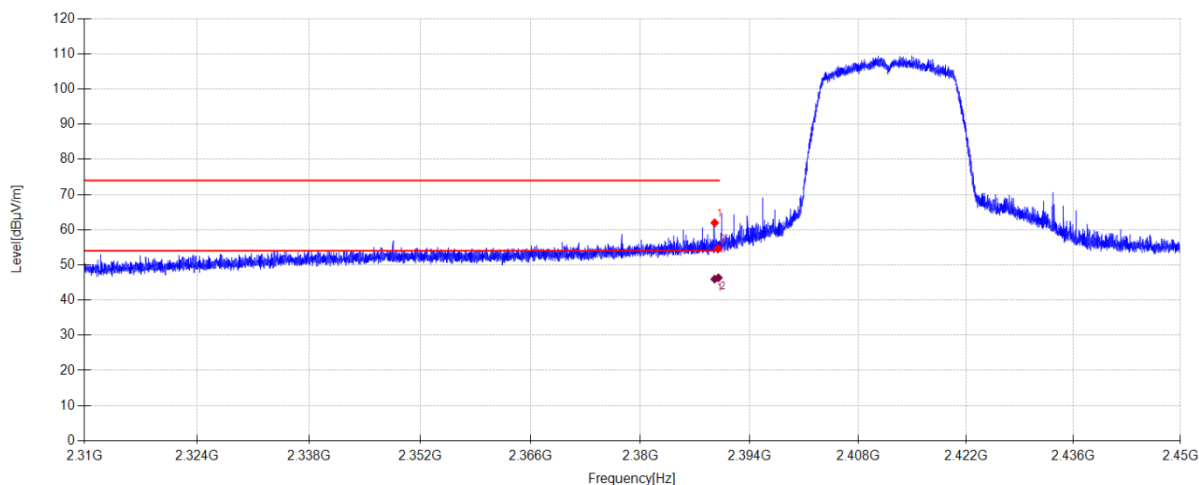

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.506	59.93	28.18	-26.15	61.96	74.00	12.04	PK	Vertical
2	2390.000	52.62	28.18	-26.15	54.65	74.00	19.35	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.506	43.94	28.18	-26.15	45.97	54.00	8.03	AV	Vertical
2	2390.000	44.30	28.18	-26.15	46.33	54.00	7.67	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\9
Memo: Sample Number: S26081718-003

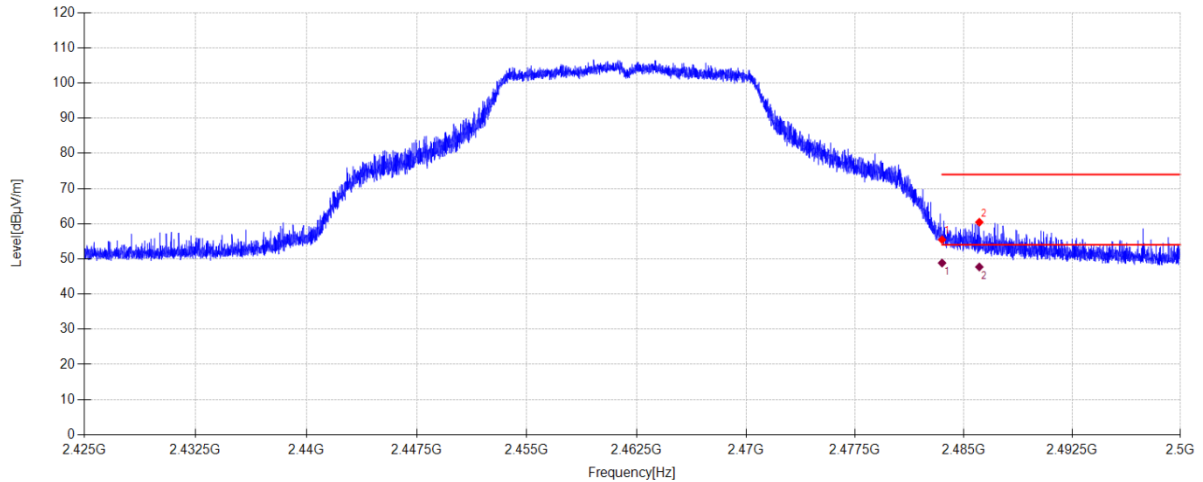**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	53.01	28.60	-26.14	55.47	74.00	18.53	PK	Horizontal
2	2486.073	57.94	28.62	-26.14	60.42	74.00	13.58	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.37	28.60	-26.14	48.83	54.00	5.17	AV	Horizontal
2	2486.073	45.23	28.62	-26.14	47.71	54.00	6.29	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\10
Memo: Sample Number: S26081718-003

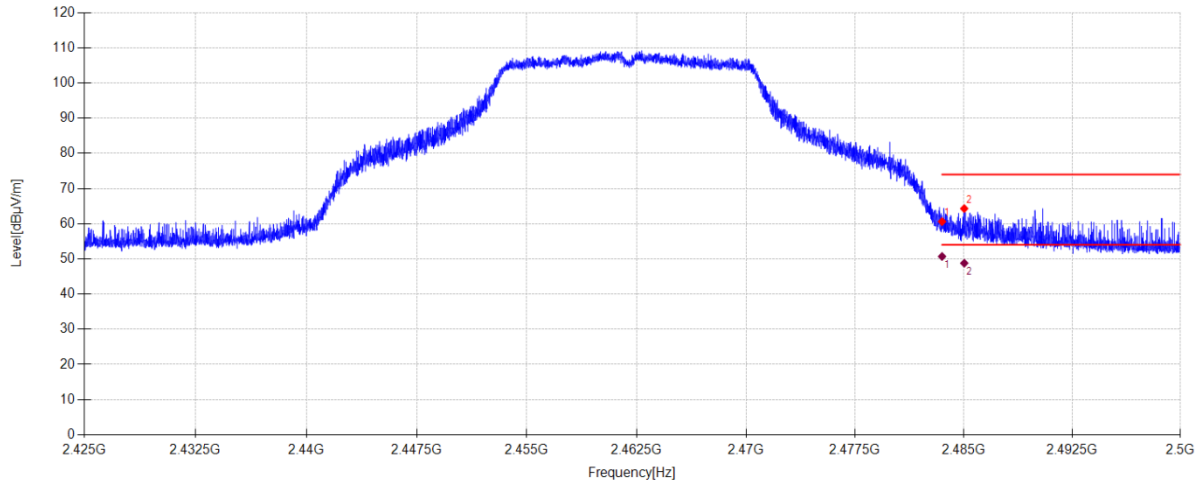

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	58.15	28.60	-26.14	60.61	74.00	13.39	PK	Vertical
2	2485.030	61.84	28.61	-26.14	64.31	74.00	9.69	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.498	48.23	28.60	-26.14	50.69	54.00	3.31	AV	Vertical
2	2485.033	46.31	28.61	-26.14	48.78	54.00	5.22	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\15
Memo: Sample Number: S26081718-003

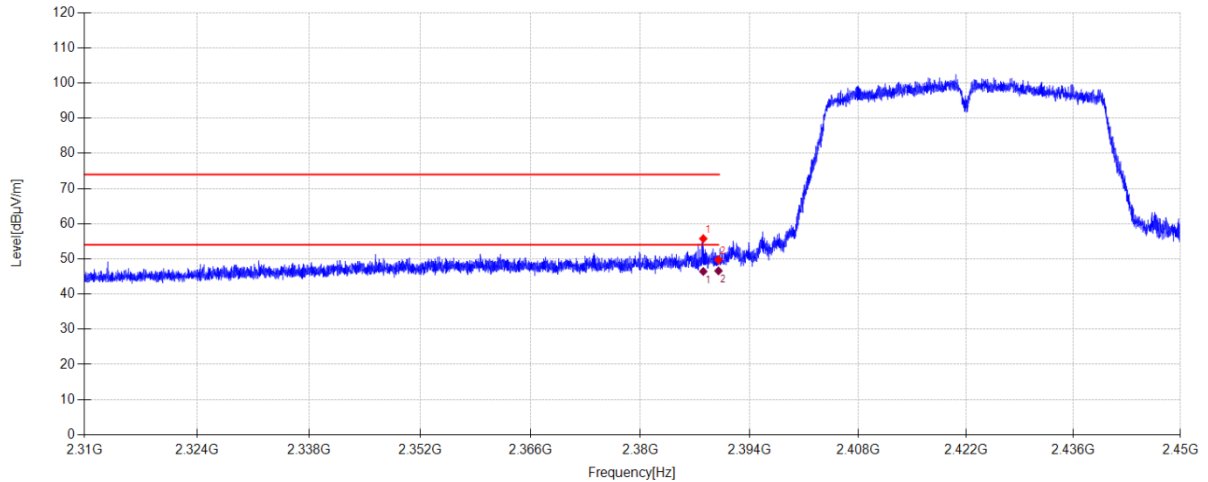**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.050	53.73	28.18	-26.15	55.76	74.00	18.24	PK	Horizontal
2	2390.000	47.70	28.18	-26.15	49.73	74.00	24.27	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.050	44.39	28.18	-26.15	46.42	54.00	7.58	AV	Horizontal
2	2390.000	44.56	28.18	-26.15	46.59	54.00	7.41	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\16
Memo: Sample Number: S26081718-003

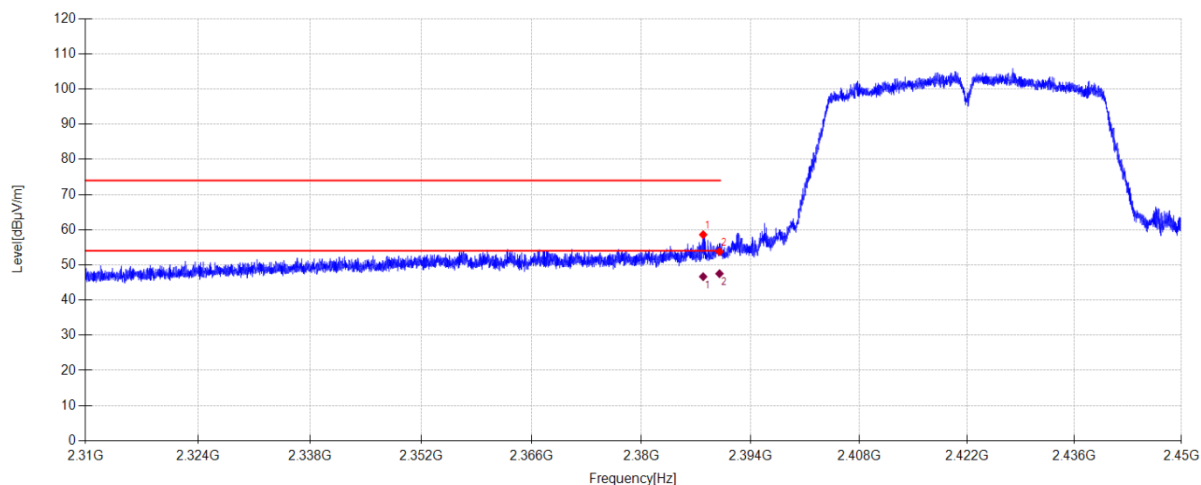**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.910	56.56	28.18	-26.15	58.59	74.00	15.41	PK	Vertical
2	2390.000	51.71	28.18	-26.15	53.74	74.00	20.26	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2387.906	44.62	28.18	-26.15	46.65	54.00	7.35	AV	Vertical
2	2390.000	45.48	28.18	-26.15	47.51	54.00	6.49	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\13
Memo: Sample Number: S26081718-003

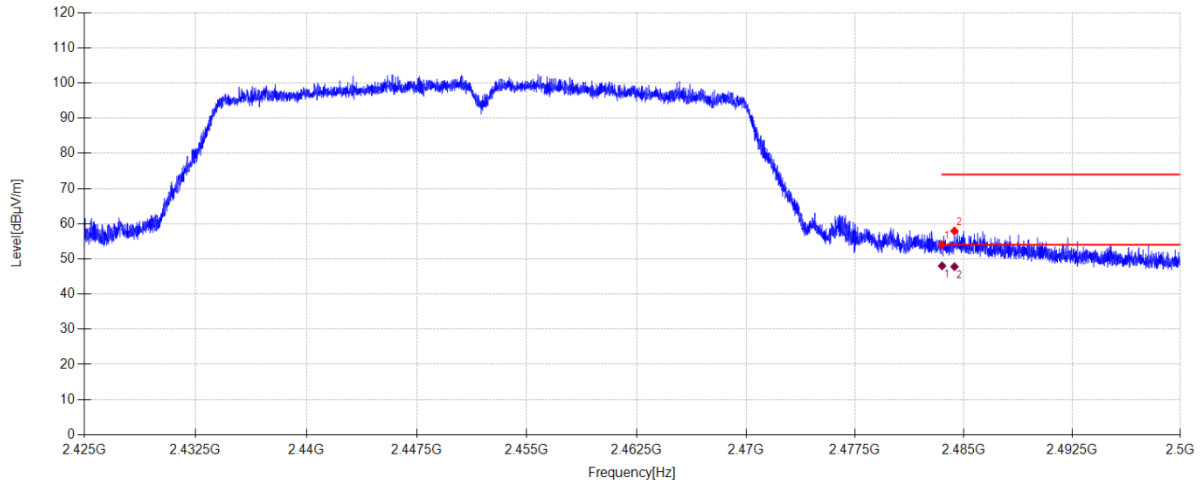

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	51.55	28.60	-26.14	54.01	74.00	19.99	PK	Horizontal
2	2484.355	55.47	28.61	-26.14	57.94	74.00	16.06	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.56	28.60	-26.14	48.02	54.00	5.98	AV	Horizontal
2	2484.355	45.32	28.61	-26.14	47.79	54.00	6.21	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\14
Memo: Sample Number: S26081718-003

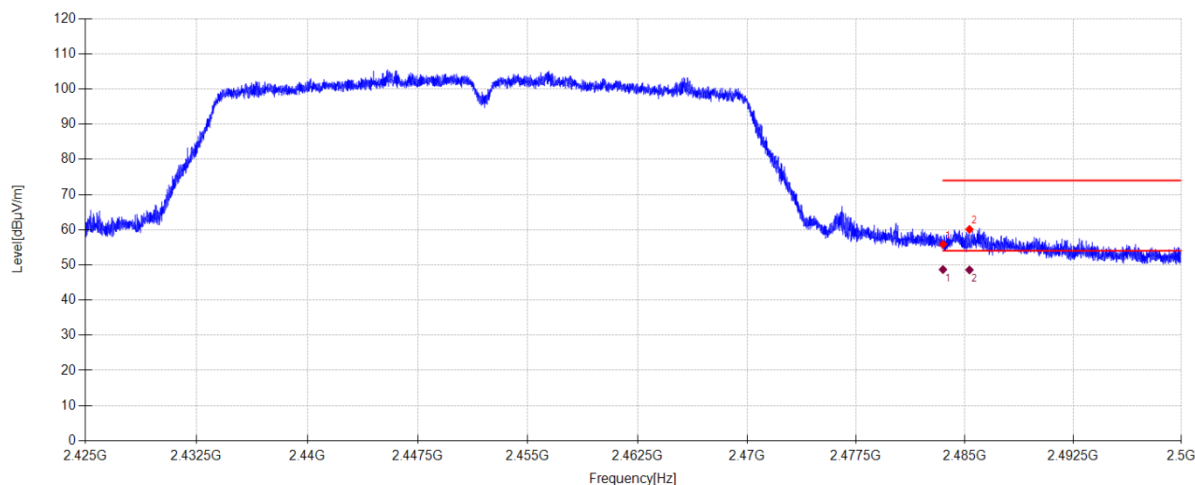**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	53.38	28.60	-26.14	55.84	74.00	18.16	PK	Vertical
2	2485.323	57.62	28.61	-26.14	60.09	74.00	13.91	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.496	46.22	28.60	-26.14	48.68	54.00	5.32	AV	Vertical
2	2485.323	46.10	28.61	-26.14	48.57	54.00	5.43	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\35
Memo: Sample Number: S26081718-003

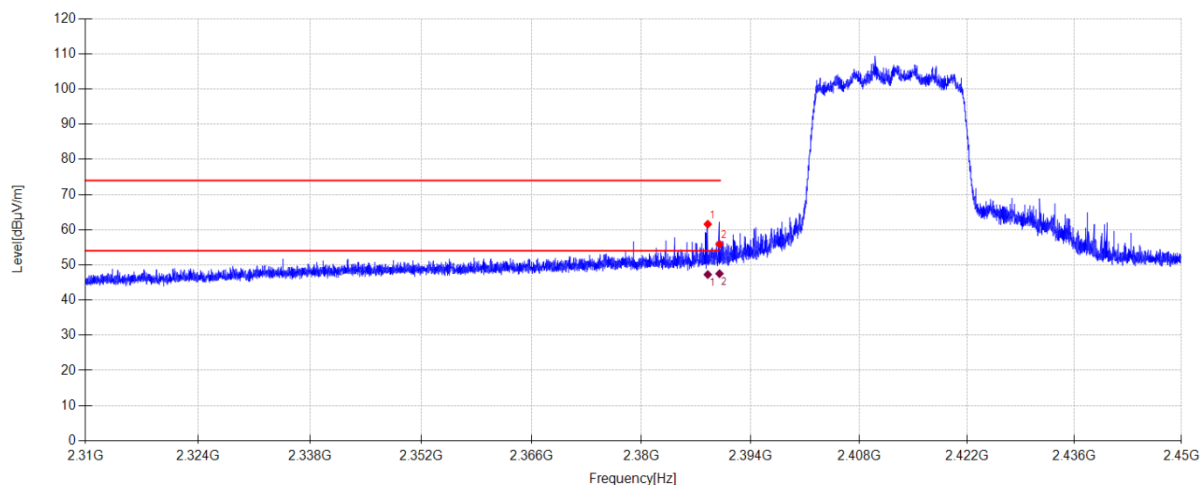

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.498	59.55	28.18	-26.15	61.58	74.00	12.42	PK	Horizontal
2	2390.000	53.86	28.18	-26.15	55.89	74.00	18.11	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.498	45.22	28.18	-26.15	47.25	54.00	6.75	AV	Horizontal
2	2390.000	45.48	28.18	-26.15	47.51	54.00	6.49	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\36
Memo: Sample Number: S26081718-003

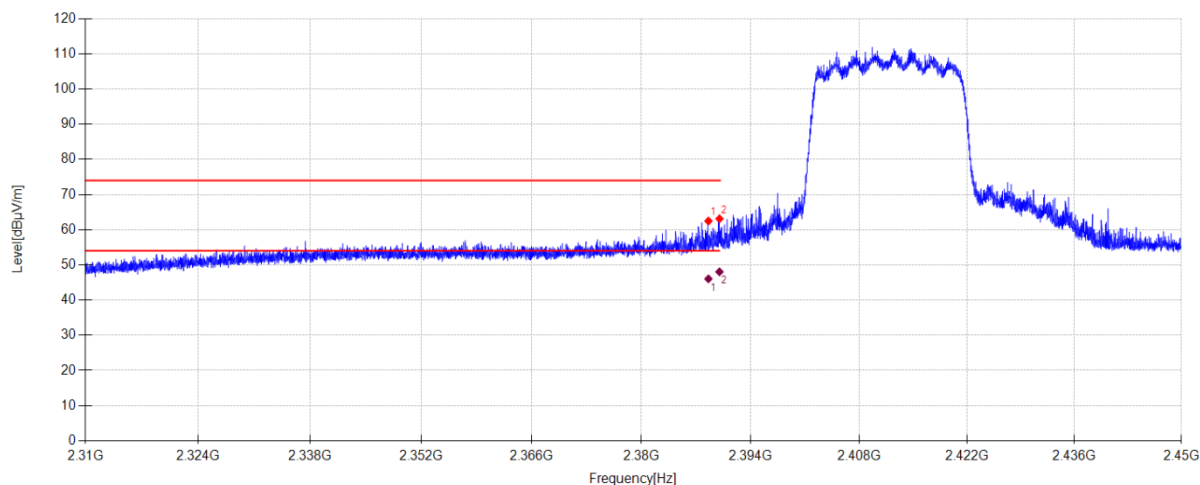

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.582	60.44	28.18	-26.15	62.47	74.00	11.53	PK	Vertical
2	2390.000	61.09	28.18	-26.15	63.12	74.00	10.88	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.580	44.00	28.18	-26.15	46.03	54.00	7.97	AV	Vertical
2	2390.000	46.00	28.18	-26.15	48.03	54.00	5.97	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\33
Memo: Sample Number: S26081718-003

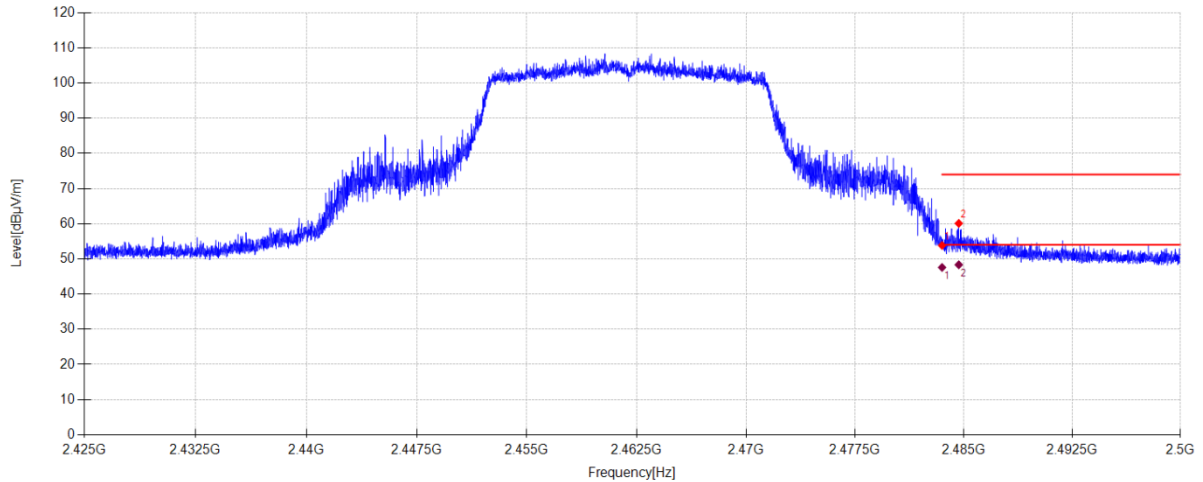

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	51.36	28.60	-26.14	53.82	74.00	20.18	PK	Horizontal
2	2484.655	57.63	28.61	-26.14	60.10	74.00	13.90	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.12	28.60	-26.14	47.58	54.00	6.42	AV	Horizontal
2	2484.655	45.87	28.61	-26.14	48.34	54.00	5.66	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\34
Memo: Sample Number: S26081718-003

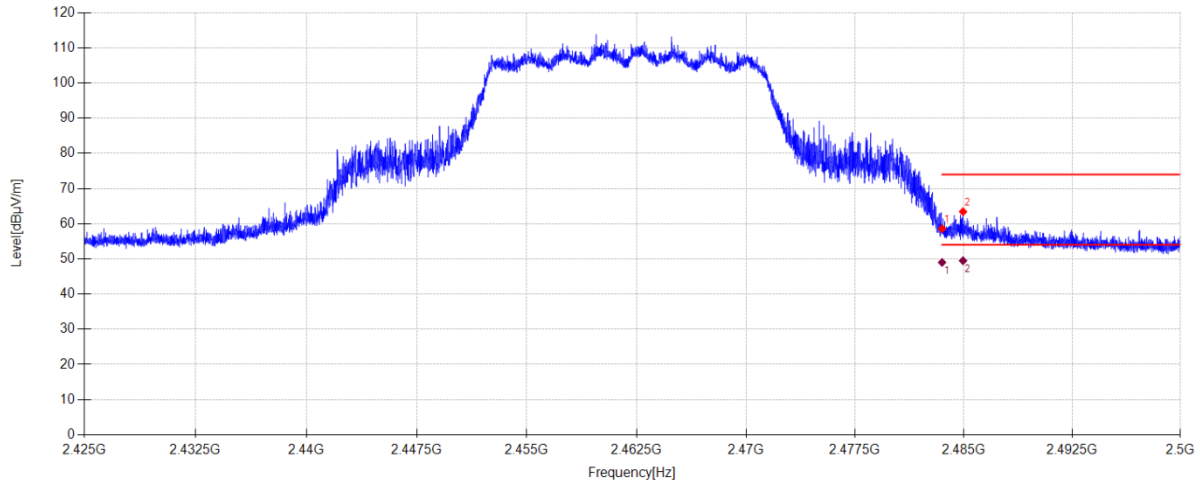

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	56.11	28.60	-26.14	58.57	74.00	15.43	PK	Vertical
2	2484.948	60.96	28.61	-26.14	63.43	74.00	10.57	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.54	28.60	-26.14	49.00	54.00	5.00	AV	Vertical
2	2484.947	47.01	28.61	-26.14	49.48	54.00	4.52	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\39
Memo: Sample Number: S26081718-003

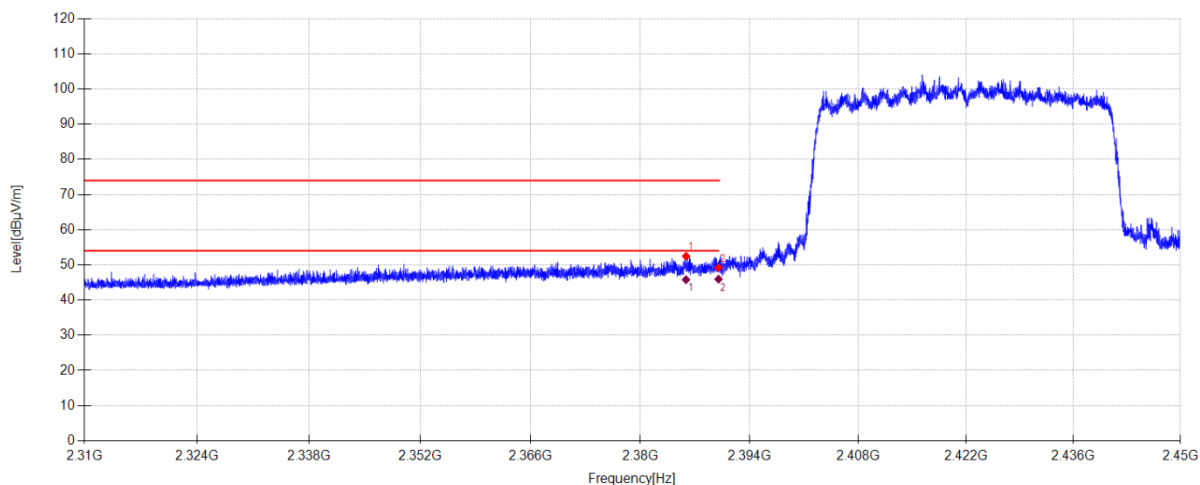**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.838	50.44	28.17	-26.15	52.46	74.00	21.54	PK	Horizontal
2	2390.000	47.21	28.18	-26.15	49.24	74.00	24.76	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.838	43.78	28.17	-26.15	45.80	54.00	8.20	AV	Horizontal
2	2390.000	43.92	28.18	-26.15	45.95	54.00	8.05	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 2422MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\40
Memo: Sample Number: S26081718-003

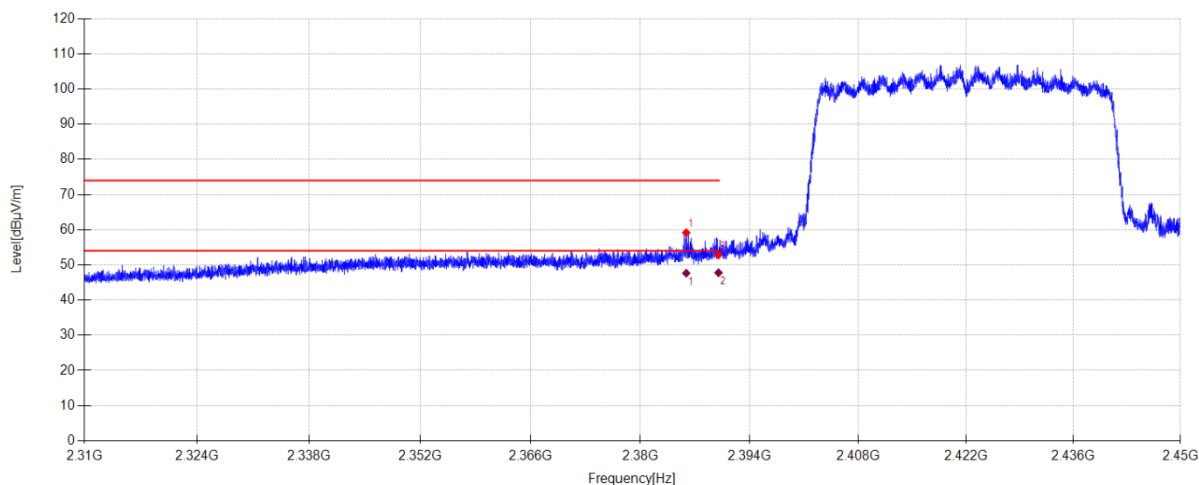

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.866	57.15	28.17	-26.15	59.17	74.00	14.83	PK	Vertical
2	2390.000	50.79	28.18	-26.15	52.82	74.00	21.18	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.866	45.63	28.17	-26.15	47.65	54.00	6.35	AV	Vertical
2	2390.000	45.74	28.18	-26.15	47.77	54.00	6.23	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\37
Memo: Sample Number: S26081718-003

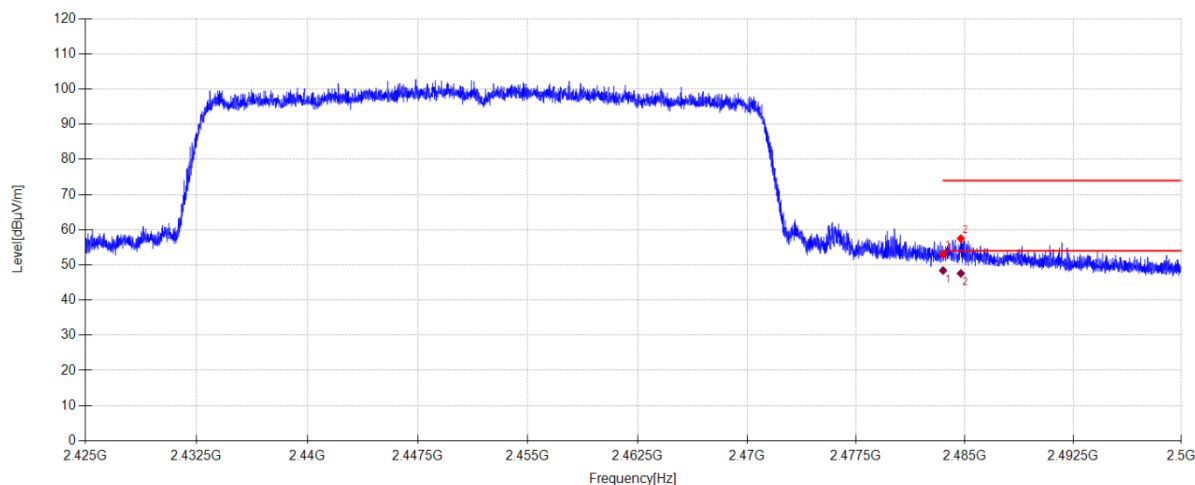

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	50.61	28.60	-26.14	53.07	74.00	20.93	PK	Horizontal
2	2484.730	55.03	28.61	-26.14	57.50	74.00	16.50	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.93	28.60	-26.14	48.39	54.00	5.61	AV	Horizontal
2	2484.730	45.10	28.61	-26.14	47.57	54.00	6.43	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 2452MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G\38
Memo: Sample Number: S26081718-003

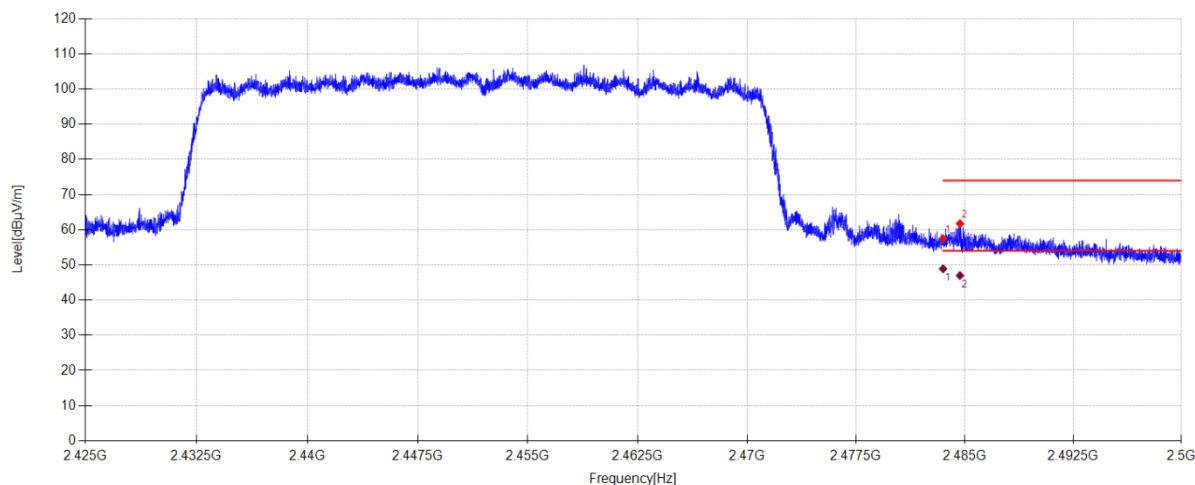

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	55.00	28.60	-26.14	57.46	74.00	16.54	PK	Vertical
2	2484.670	59.25	28.61	-26.14	61.72	74.00	12.28	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.43	28.60	-26.14	48.89	54.00	5.11	AV	Vertical
2	2484.667	44.50	28.61	-26.14	46.97	54.00	7.03	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU0 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G RU\3
Memo: Sample Number: S26081718-003

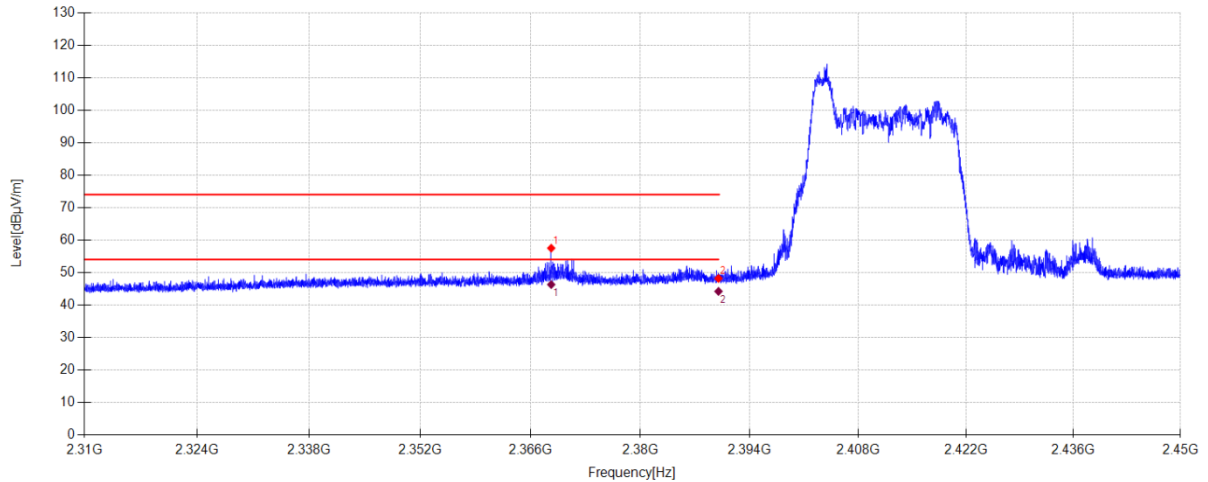

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2368.632	55.48	28.14	-26.14	57.48	74.00	16.52	PK	Horizontal
2	2390.000	46.12	28.18	-26.15	48.15	74.00	25.85	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2368.632	44.26	28.14	-26.14	46.26	54.00	7.74	AV	Horizontal
2	2390.000	42.13	28.18	-26.15	44.16	54.00	9.84	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU0 2412MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G RU\4
Memo: Sample Number: S26081718-003

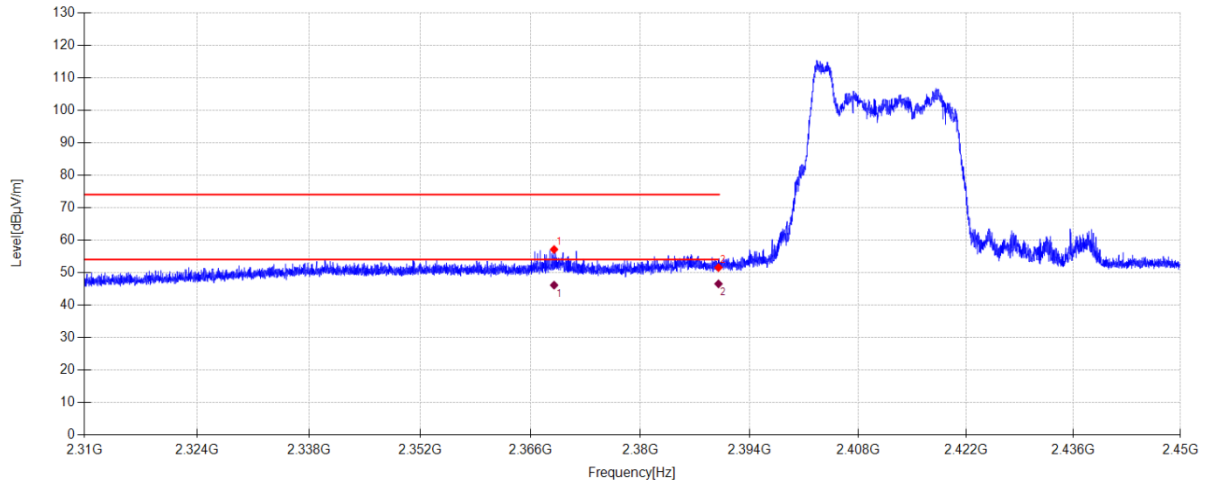

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2368.996	55.07	28.14	-26.14	57.07	74.00	16.93	PK	Vertical
2	2390.000	49.47	28.18	-26.15	51.50	74.00	22.50	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2368.996	44.08	28.14	-26.14	46.08	54.00	7.92	AV	Vertical
2	2390.000	44.45	28.18	-26.15	46.48	54.00	7.52	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU8 2462MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G RU\1
Memo: Sample Number: S26081718-003

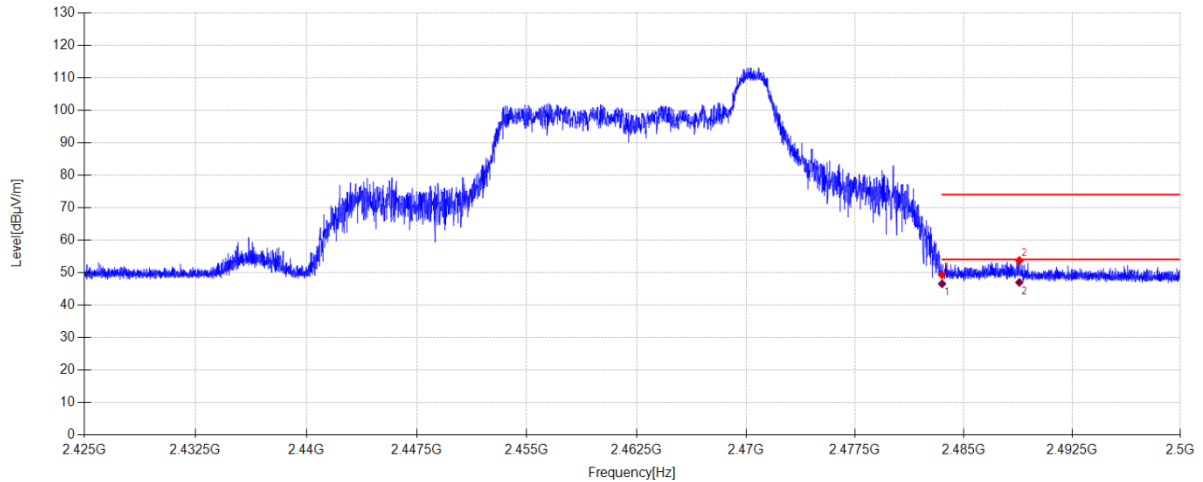**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	46.78	28.60	-26.14	49.24	74.00	24.76	PK	Horizontal
2	2488.840	51.20	28.63	-26.14	53.69	74.00	20.31	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	44.03	28.60	-26.14	46.49	54.00	7.51	AV	Horizontal
2	2488.840	44.43	28.63	-26.14	46.92	54.00	7.08	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 RU8 2462MHz **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 2.4G RU\2
Memo: Sample Number: S26081718-003

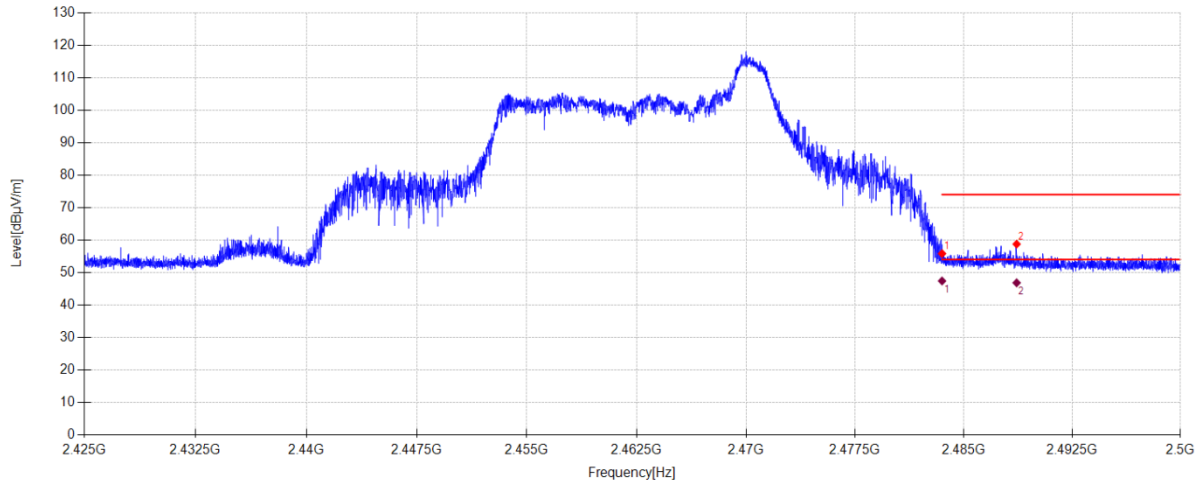**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	53.34	28.60	-26.14	55.80	74.00	18.20	PK	Vertical
2	2488.653	56.23	28.63	-26.14	58.72	74.00	15.28	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.499	44.91	28.60	-26.14	47.37	54.00	6.63	AV	Vertical
2	2488.653	44.32	28.63	-26.14	46.81	54.00	7.19	AV	Vertical

Note:


1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI 3	DDT-ZC00235	2027/06/10
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2027/06/14
Pulse Limiter	SCHWARZBECK	ESH3-Z2	DDT-ZC00539	2027/06/10
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2027/06/21
Conducted & Radiated Software	Audix	e3	DDT-ZC00562	/
Two-line V-shaped artificial network	ROHDE&SCHWARZ	ENV216	DDT-ZC05693	2026/11/04
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2027/06/09

14.2. Block diagram of test setup

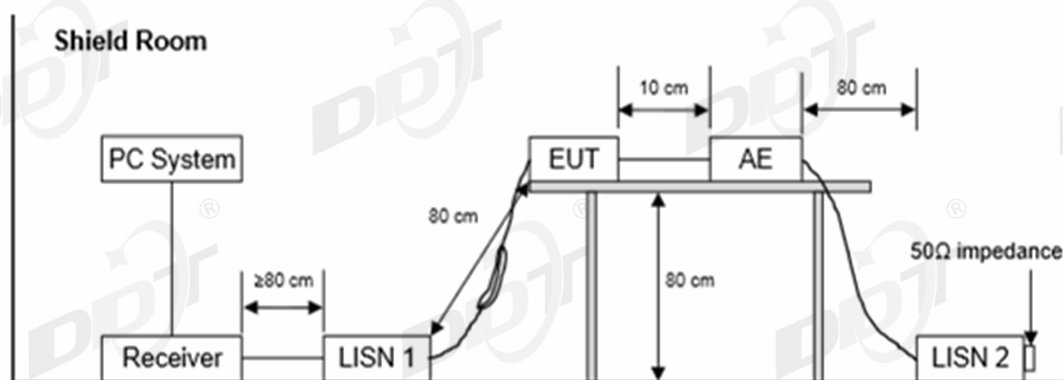

14.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means Peak detection; "----" means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2026-08-22
EUT : WIRELESS SPEAKER
Power Supply : AC 120V/60Hz
Condition : TEMP:24.5°C, RH:65.5%
Memo : Sample Number: S26081718-003

D:\2026 CE Report Data\Q26081718-2E\0822 CE\0822
CE.EM6


Tested By : Zhang Yibo

Model Number : LIORA

Test Mode : Tx mode

LISN : 2026 1# ENV 216/LINE

Data: 2

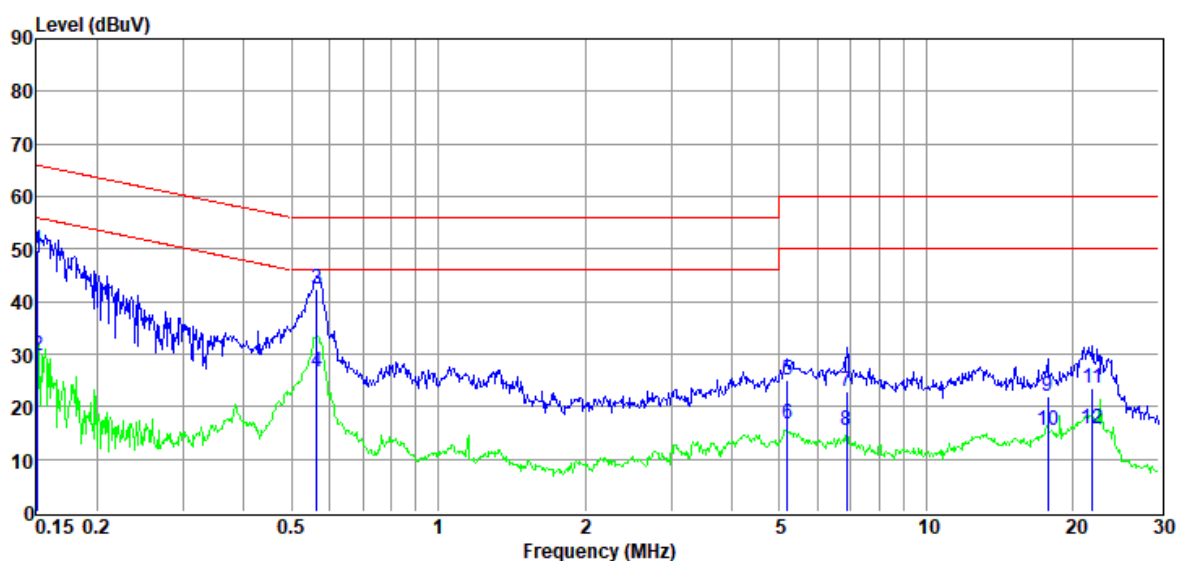

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Margin (dB)	Detector	Phase
1	0.15	30.21	9.58	0.00	9.86	49.65	65.96	16.31	QP	LINE
2	0.15	10.12	9.58	0.00	9.86	29.56	55.96	26.40	Average	LINE
3	0.56	22.84	9.58	0.00	9.87	42.29	56.00	13.71	QP	LINE
4	0.56	7.17	9.58	0.00	9.87	26.62	46.00	19.38	Average	LINE
5	5.19	5.51	9.62	0.01	9.88	25.02	60.00	34.98	QP	LINE
6	5.19	-2.91	9.62	0.01	9.88	16.60	50.00	33.40	Average	LINE
7	6.88	3.39	9.63	0.03	9.88	22.93	60.00	37.07	QP	LINE
8	6.88	-4.08	9.63	0.03	9.88	15.46	50.00	34.54	Average	LINE
9	17.76	1.82	9.99	0.08	9.93	21.82	60.00	38.18	QP	LINE
10	17.76	-4.49	9.99	0.08	9.93	15.51	50.00	34.49	Average	LINE
11	21.95	3.41	10.08	0.10	9.95	23.54	60.00	36.46	QP	LINE
12	21.95	-4.42	10.08	0.10	9.95	15.71	50.00	34.29	Average	LINE

Note:


1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2026-08-22
EUT : WIRELESS SPEAKER
Power Supply : AC 120V/60Hz
Condition : TEMP:24.5°C, RH:65.5%
Memo : Sample Number: S26081718-003

D:\2026 CE Report Data\Q26081718-2E\0822 CE\0822
CE.EM6
Tested By : Zhang Yibo
Model Number : LIORA
Test Mode : Tx mode
LISN : 2026 1# ENV 216/NEUTRAL

Data: 4

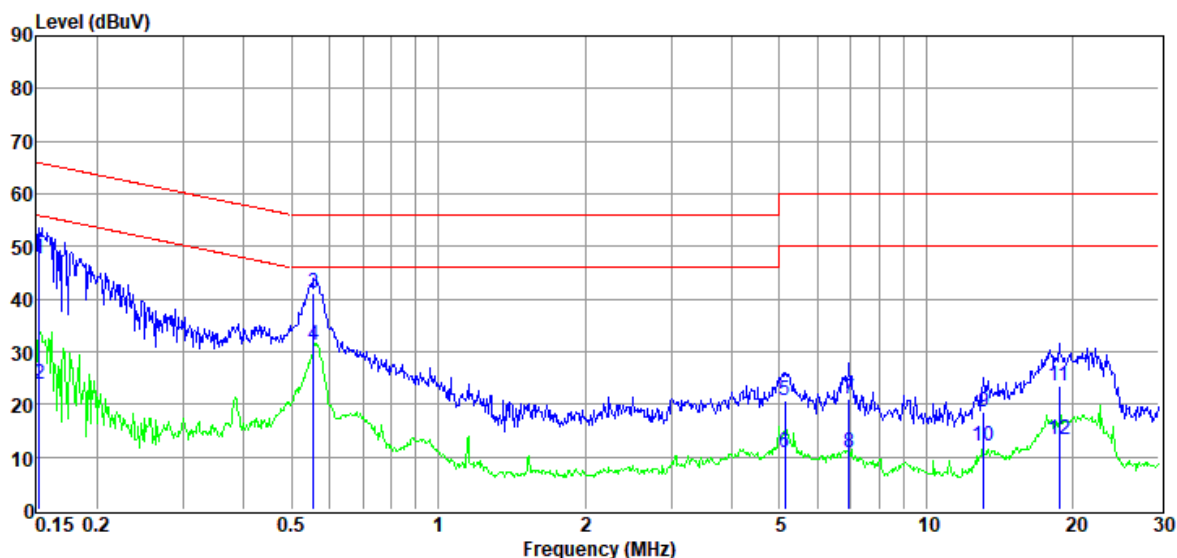

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	28.13	9.61	0.00	9.86	47.60	65.87	18.27	QP	NEUTRAL
2	0.15	4.23	9.61	0.00	9.86	23.70	55.87	32.17	Average	NEUTRAL
3	0.56	21.61	9.59	0.00	9.87	41.07	56.00	14.93	QP	NEUTRAL
4	0.56	11.87	9.59	0.00	9.87	31.33	46.00	14.67	Average	NEUTRAL
5	5.14	1.24	9.66	0.01	9.88	20.79	60.00	39.21	QP	NEUTRAL
6	5.14	-8.69	9.66	0.01	9.88	10.86	50.00	39.14	Average	NEUTRAL
7	6.95	1.57	9.68	0.03	9.88	21.16	60.00	38.84	QP	NEUTRAL
8	6.95	-8.92	9.68	0.03	9.88	10.67	50.00	39.33	Average	NEUTRAL
9	13.13	-1.18	9.89	0.07	9.91	18.69	60.00	41.31	QP	NEUTRAL
10	13.13	-7.73	9.89	0.07	9.91	12.14	50.00	37.86	Average	NEUTRAL
11	18.72	3.26	10.11	0.09	9.94	23.40	60.00	36.60	QP	NEUTRAL
12	18.72	-6.83	10.11	0.09	9.94	13.31	50.00	36.69	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q26081718-1E appendix I

-----End Report-----