

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\32

Memo:

Sample Number: S26081718-003

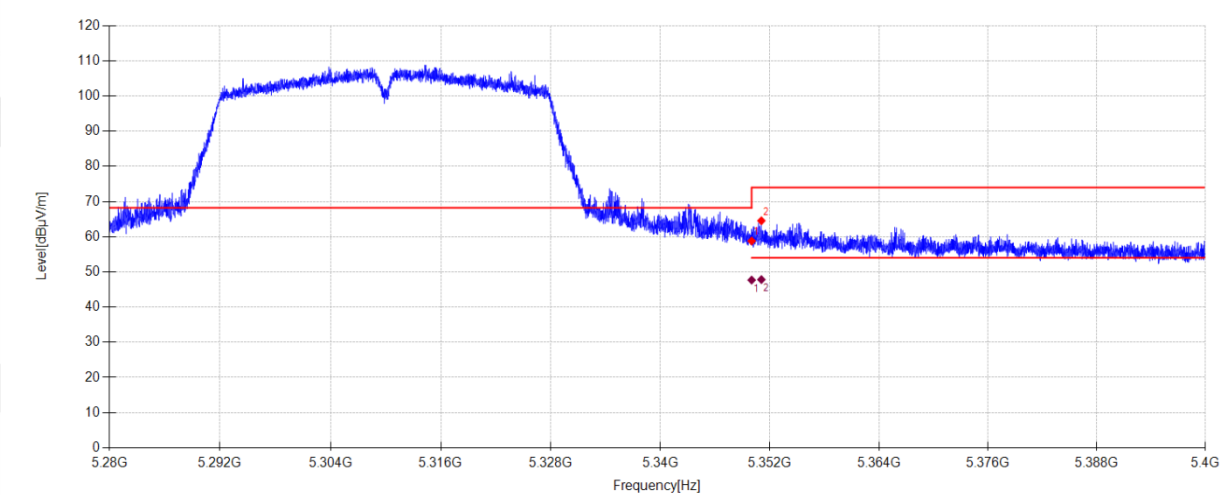

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	50.27	33.70	-25.18	58.79	68.20	9.41	PK	Vertical
2	5351.064	56.02	33.70	-25.18	64.54	74.00	9.46	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.17	33.70	-25.19	47.68	54.00	6.32	AV	Vertical
2	5351.064	39.29	33.70	-25.18	47.81	54.00	6.19	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\33
Memo: Sample Number: S26081718-003

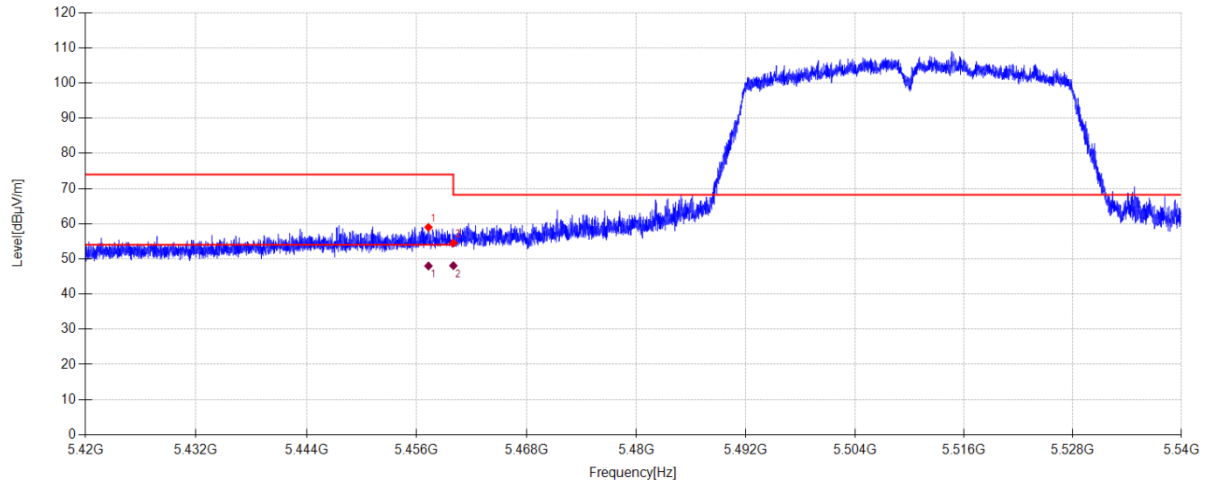**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.284	49.89	33.80	-24.70	58.99	74.00	15.01	PK	Horizontal
2	5460.000	45.41	33.80	-24.68	54.53	68.20	13.67	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.284	38.88	33.80	-24.70	47.98	54.00	6.02	AV	Horizontal
2	5460.000	38.95	33.80	-24.68	48.07	54.00	5.93	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\34
Memo: Sample Number: S26081718-003

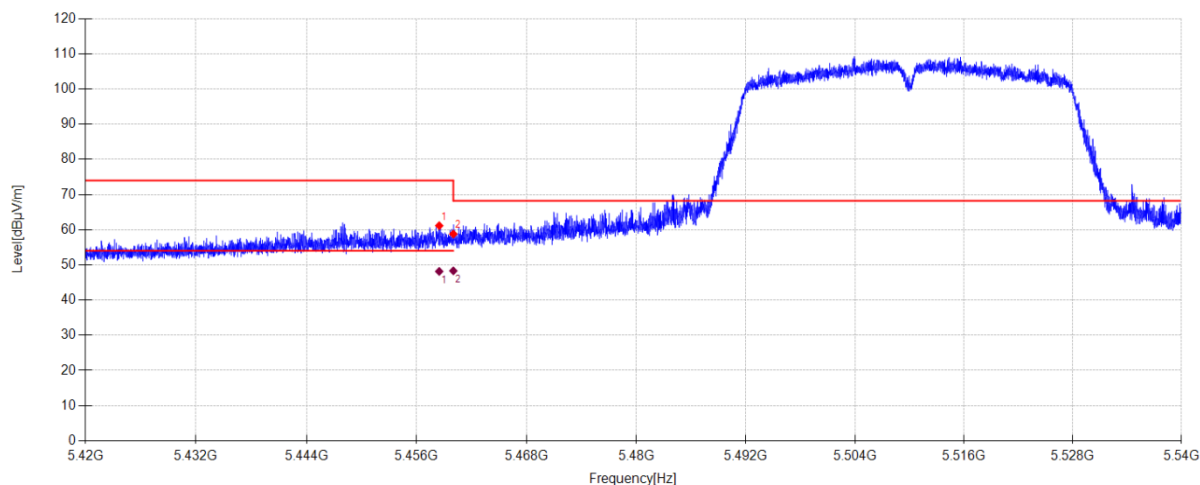

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.460	52.04	33.80	-24.69	61.15	74.00	12.85	PK	Vertical
2	5460.000	49.66	33.80	-24.68	58.78	68.20	9.42	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.460	39.04	33.80	-24.69	48.15	54.00	5.85	AV	Vertical
2	5459.999	39.19	33.80	-24.68	48.31	54.00	5.69	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\35

Memo:

Sample Number: S26081718-003

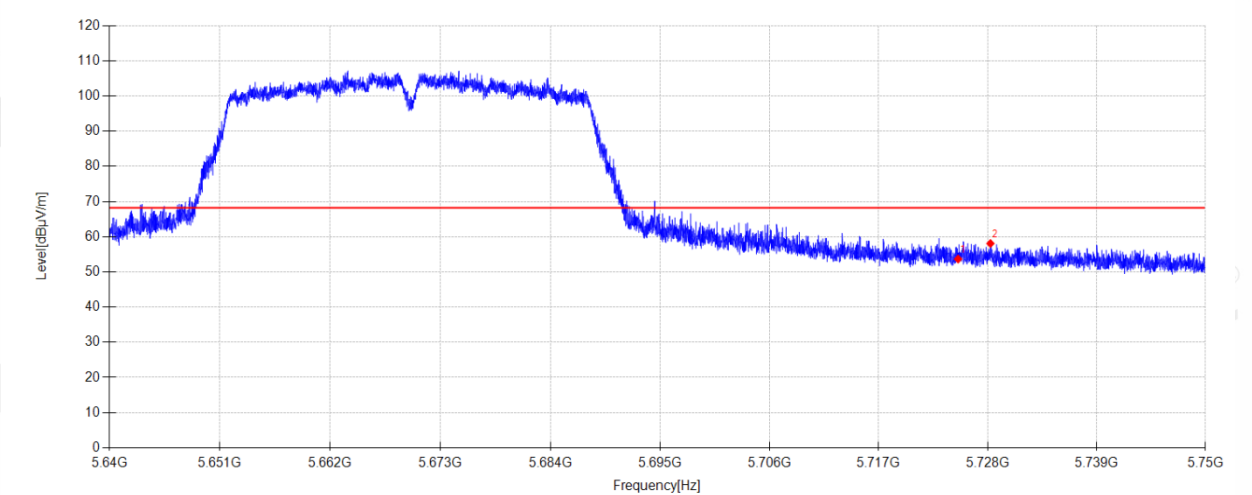

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.15	34.30	-24.79	53.66	68.20	14.54	PK	Horizontal
2	5728.264	48.56	34.31	-24.79	58.08	68.20	10.12	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\36

Memo:

Sample Number: S26081718-003

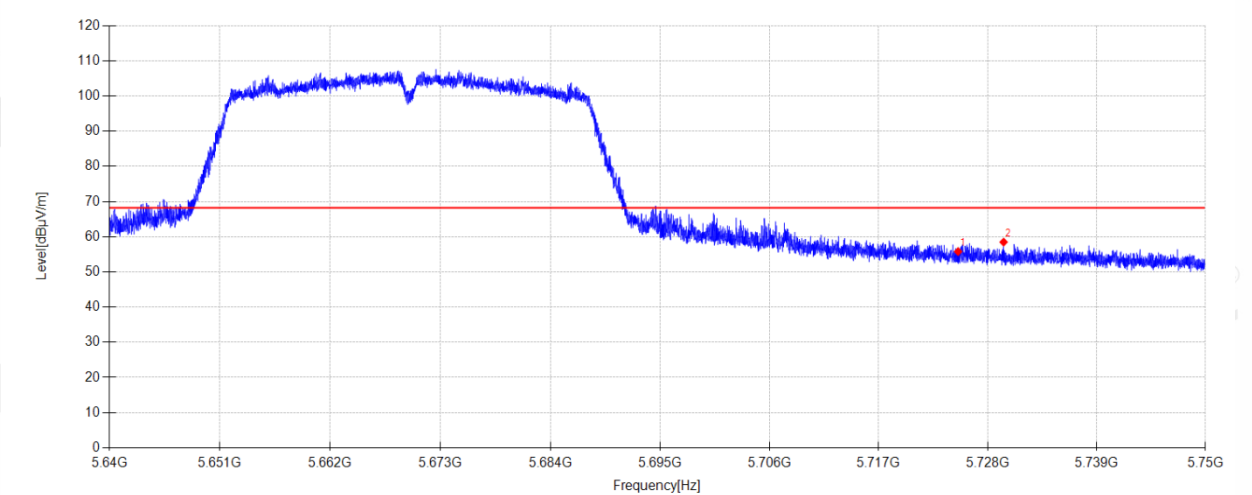

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	46.28	34.30	-24.79	55.79	68.20	12.41	PK	Vertical
2	5729.595	48.95	34.32	-24.79	58.48	68.20	9.72	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\53
Memo: Sample Number: S26081718-003

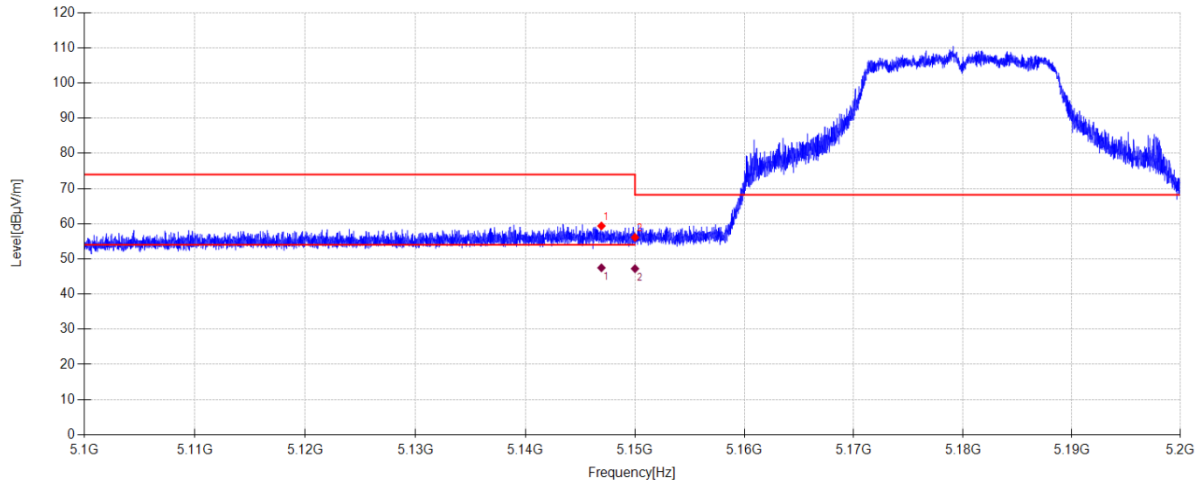

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.940	50.48	33.91	-25.02	59.37	74.00	14.63	PK	Horizontal
2	5150.000	47.22	33.90	-25.02	56.10	68.20	12.10	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.940	38.57	33.91	-25.02	47.46	54.00	6.54	AV	Horizontal
2	5150.000	38.34	33.90	-25.02	47.22	54.00	6.78	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\54
Memo: Sample Number: S26081718-003

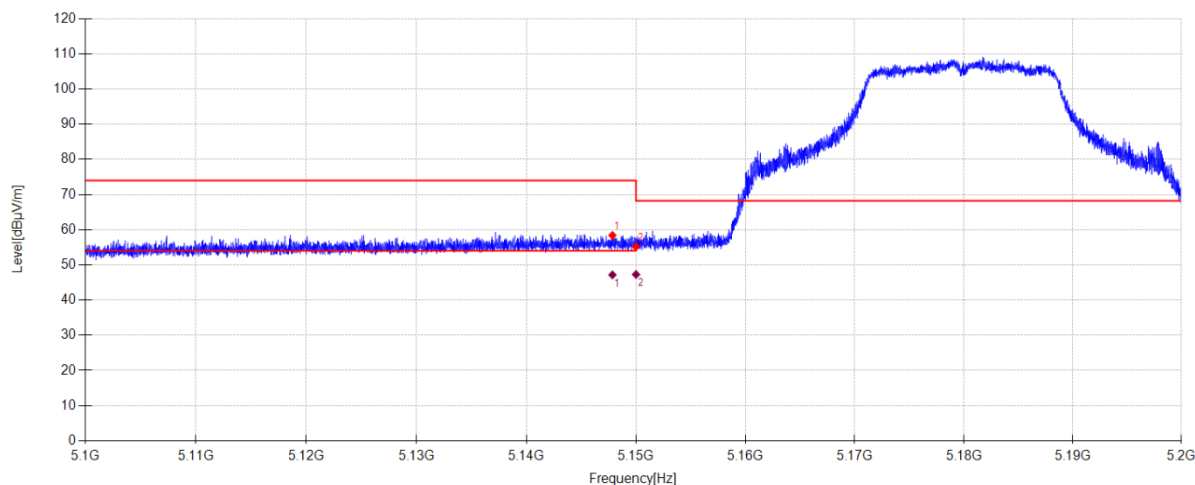

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.850	49.52	33.90	-25.02	58.40	74.00	15.60	PK	Vertical
2	5150.000	46.29	33.90	-25.02	55.17	68.20	13.03	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.850	38.28	33.90	-25.02	47.16	54.00	6.84	AV	Vertical
2	5150.002	38.40	33.90	-25.02	47.28	54.00	6.72	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\55

Memo:

Sample Number: S26081718-003

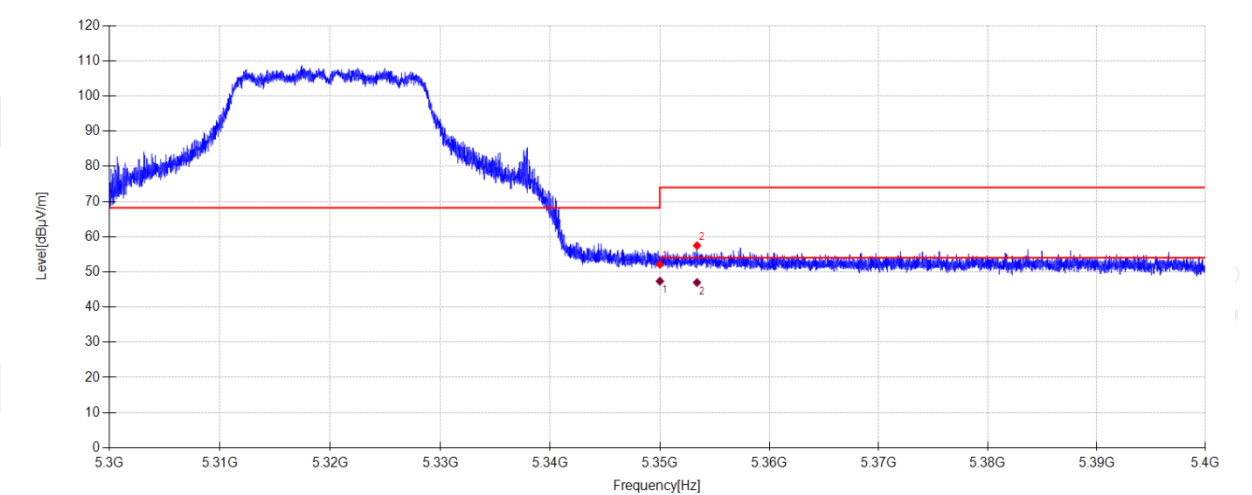

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	43.64	33.70	-25.19	52.15	68.20	16.05	PK	Horizontal
2	5353.390	48.95	33.70	-25.17	57.48	74.00	16.52	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.85	33.70	-25.19	47.36	54.00	6.64	AV	Horizontal
2	5353.390	38.45	33.70	-25.17	46.98	54.00	7.02	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\56
Memo: Sample Number: S26081718-003

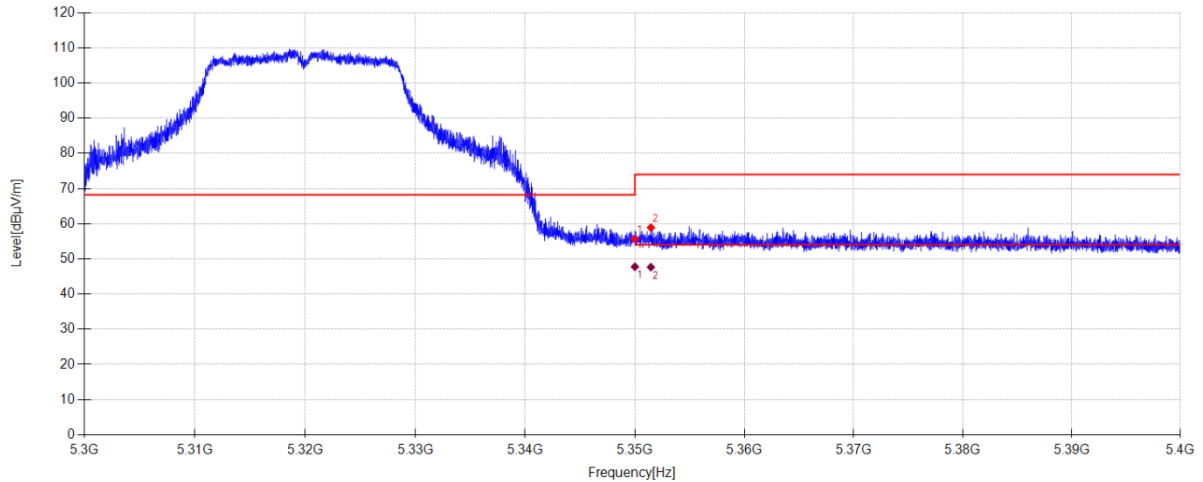**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	47.14	33.70	-25.19	55.65	68.20	12.55	PK	Vertical
2	5351.460	50.37	33.70	-25.18	58.89	74.00	15.11	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.24	33.70	-25.19	47.75	54.00	6.25	AV	Vertical
2	5351.460	39.11	33.70	-25.18	47.63	54.00	6.37	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\57

Memo:

Sample Number: S26081718-003

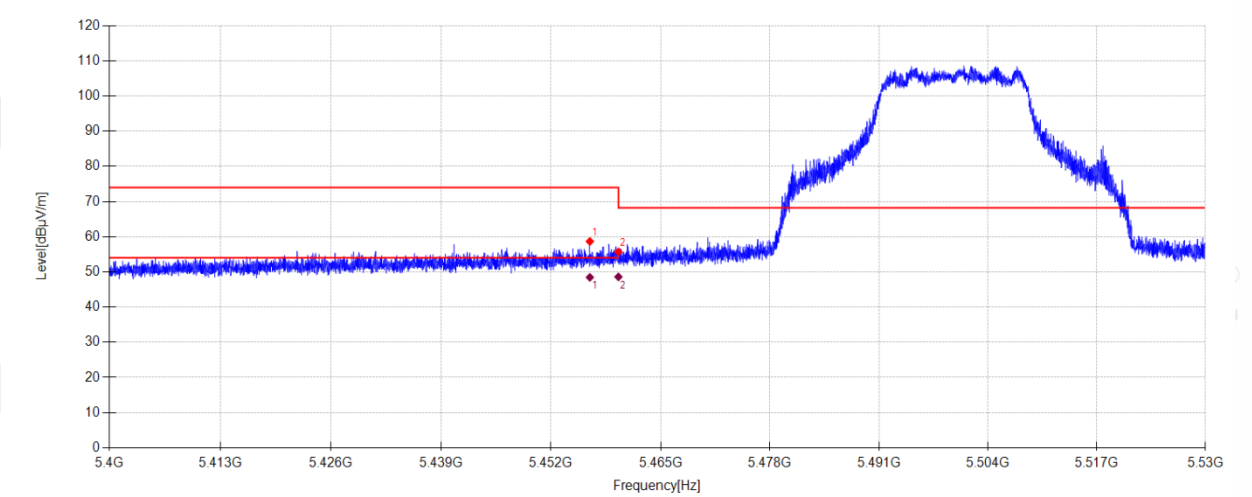

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.615	49.56	33.80	-24.70	58.66	74.00	15.34	PK	Horizontal
2	5460.000	46.55	33.80	-24.68	55.67	68.20	12.53	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.615	39.36	33.80	-24.70	48.46	54.00	5.54	AV	Horizontal
2	5460.000	39.47	33.80	-24.68	48.59	54.00	5.41	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\58

Memo:

Sample Number: S26081718-003

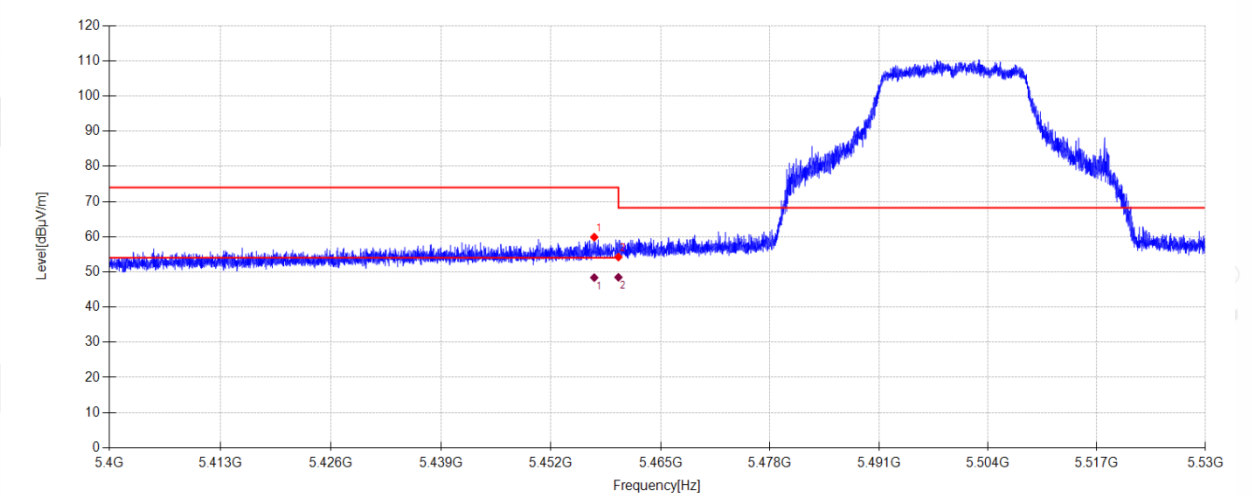

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.135	50.78	33.80	-24.70	59.88	74.00	14.12	PK	Vertical
2	5460.000	45.10	33.80	-24.68	54.22	68.20	13.98	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.135	39.27	33.80	-24.70	48.37	54.00	5.63	AV	Vertical
2	5460.000	39.35	33.80	-24.68	48.47	54.00	5.53	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\59

Memo:

Sample Number: S26081718-003

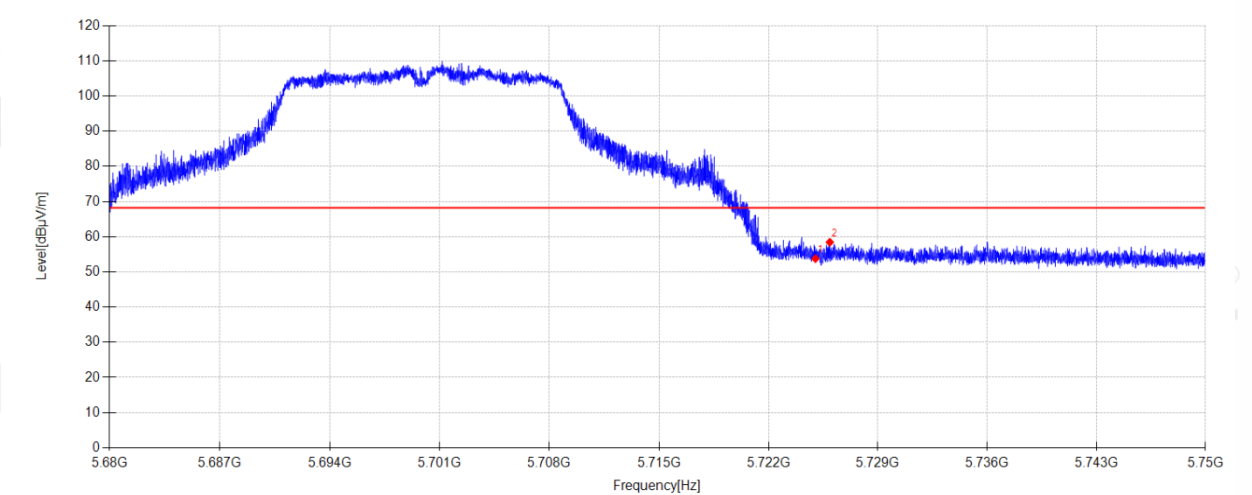

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.25	34.30	-24.79	53.76	68.20	14.44	PK	Horizontal
2	5725.920	48.93	34.30	-24.79	58.44	68.20	9.76	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\60

Memo:

Sample Number: S26081718-003

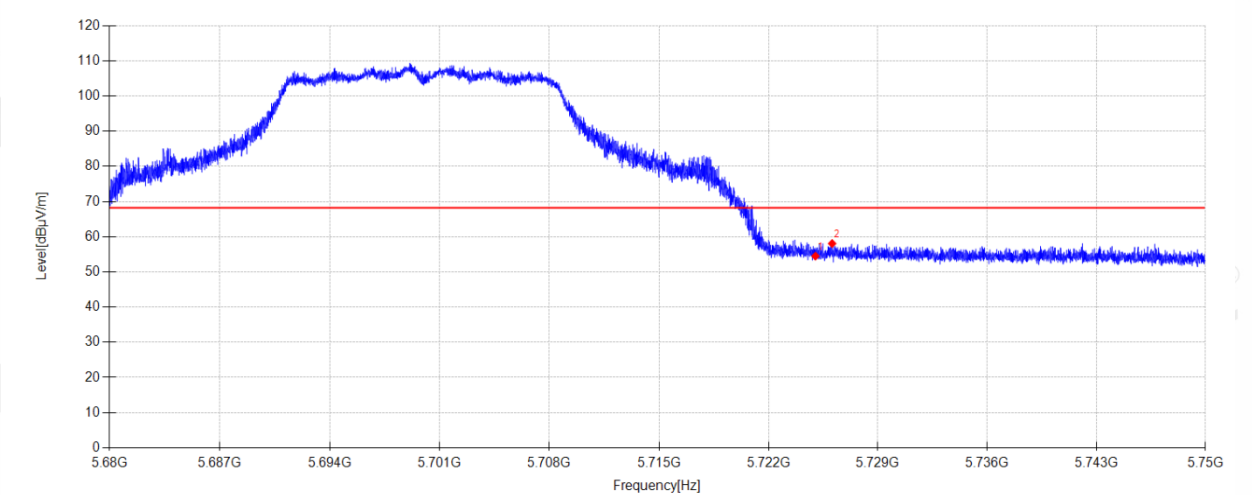

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.98	34.30	-24.79	54.49	68.20	13.71	PK	Vertical
2	5726.067	48.55	34.30	-24.79	58.06	68.20	10.14	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\61
Memo: Sample Number: S26081718-003

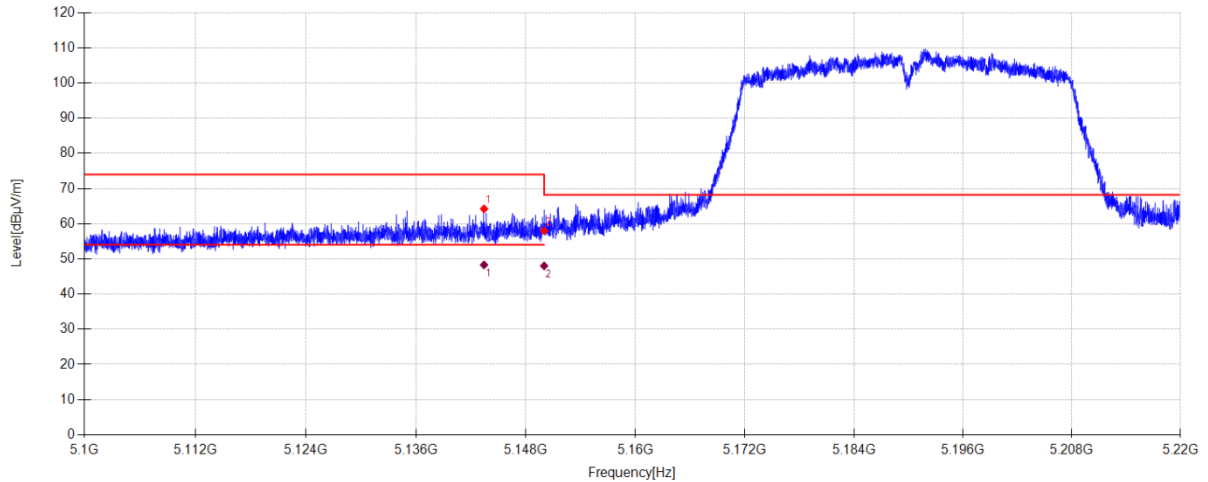**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5143.440	55.33	33.91	-25.02	64.22	74.00	9.78	PK	Horizontal
2	5150.000	49.13	33.90	-25.02	58.01	68.20	10.19	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5143.440	39.41	33.91	-25.02	48.30	54.00	5.70	AV	Horizontal
2	5150.000	39.14	33.90	-25.02	48.02	54.00	5.98	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\62
Memo: Sample Number: S26081718-003

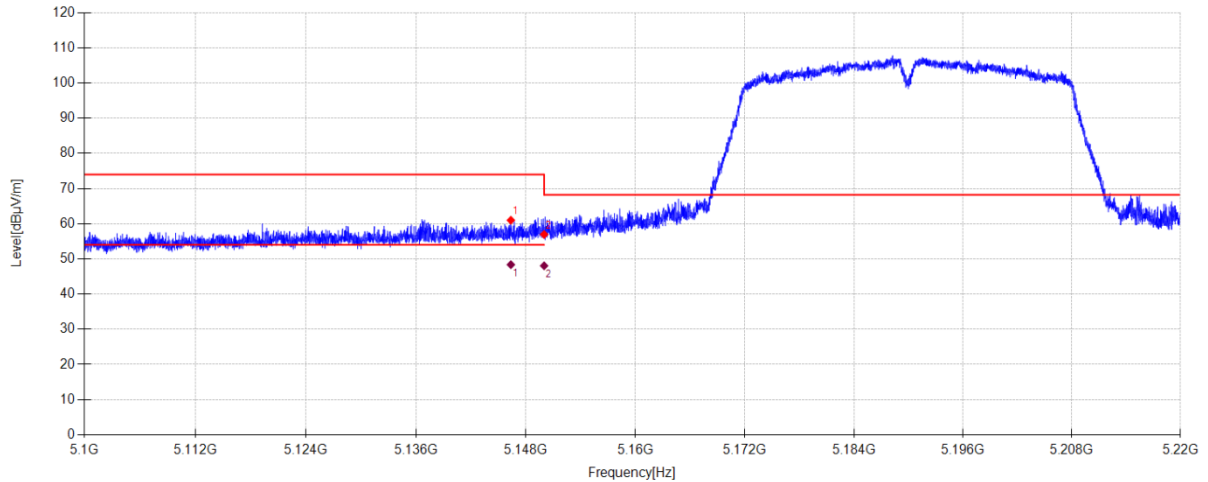

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.368	52.11	33.91	-25.02	61.00	74.00	13.00	PK	Vertical
2	5150.000	48.07	33.90	-25.02	56.95	68.20	11.25	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.368	39.47	33.91	-25.02	48.36	54.00	5.64	AV	Vertical
2	5150.000	39.16	33.90	-25.02	48.04	54.00	5.96	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5310MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\63

Memo:

Sample Number: S26081718-003

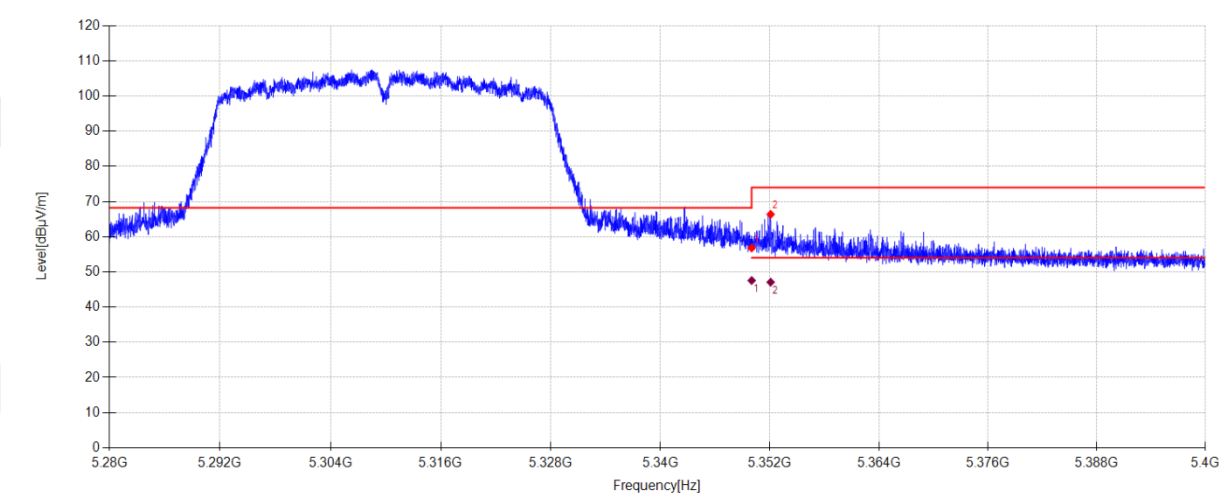

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	48.29	33.70	-25.18	56.81	68.20	11.39	PK	Horizontal
2	5352.084	57.83	33.70	-25.17	66.36	74.00	7.64	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.04	33.70	-25.19	47.55	54.00	6.45	AV	Horizontal
2	5352.084	38.55	33.70	-25.17	47.08	54.00	6.92	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\64
Memo: Sample Number: S26081718-003

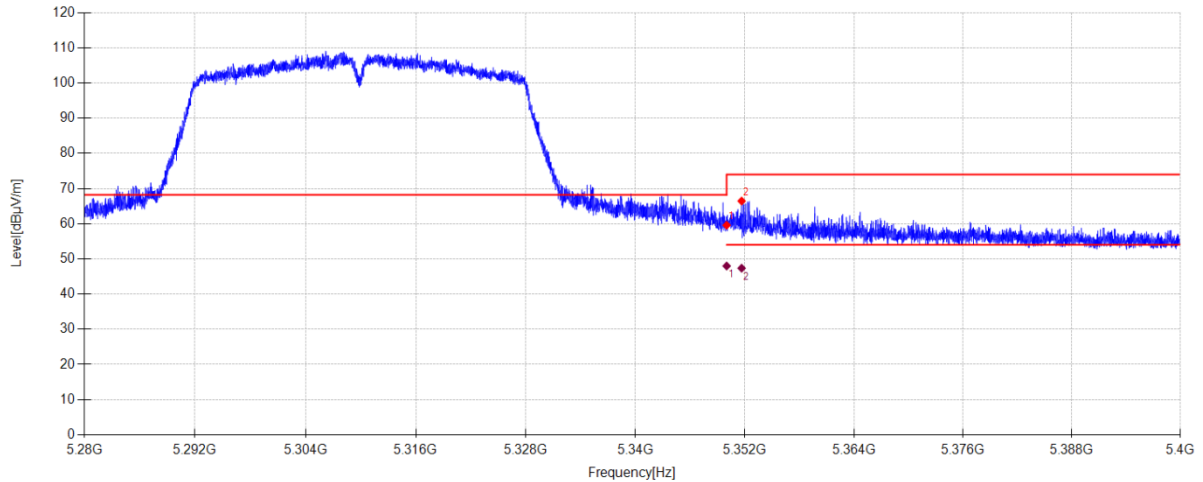**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	51.05	33.70	-25.18	59.57	68.20	8.63	PK	Vertical
2	5351.640	57.93	33.70	-25.18	66.45	74.00	7.55	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5349.999	39.48	33.70	-25.19	47.99	54.00	6.01	AV	Vertical
2	5351.639	38.84	33.70	-25.18	47.36	54.00	6.64	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\65
Memo: Sample Number: S26081718-003

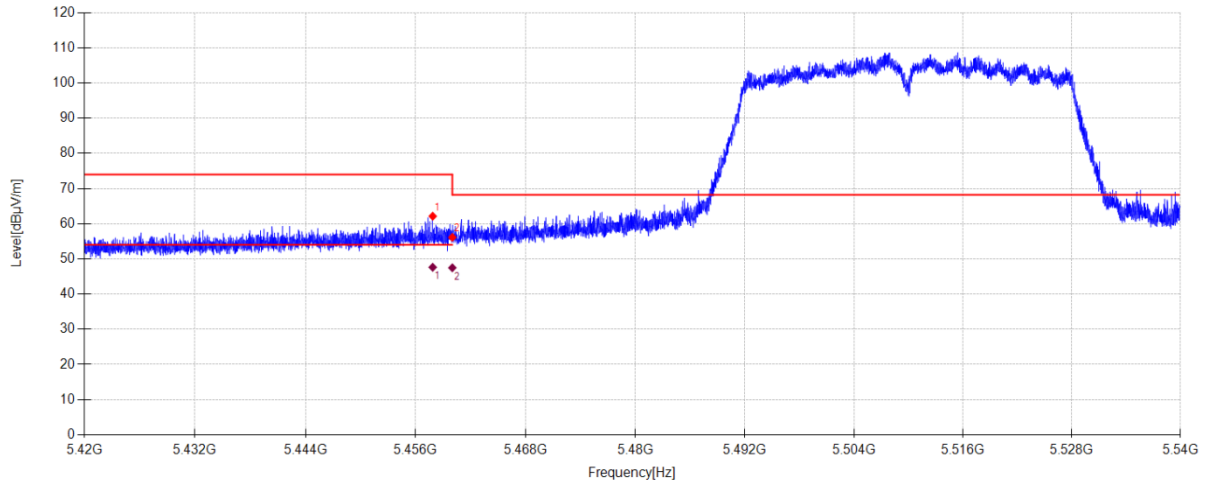**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.860	53.03	33.80	-24.69	62.14	74.00	11.86	PK	Horizontal
2	5460.000	47.01	33.80	-24.68	56.13	68.20	12.07	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.860	38.51	33.80	-24.69	47.62	54.00	6.38	AV	Horizontal
2	5460.000	38.36	33.80	-24.68	47.48	54.00	6.52	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\66
Memo: Sample Number: S26081718-003

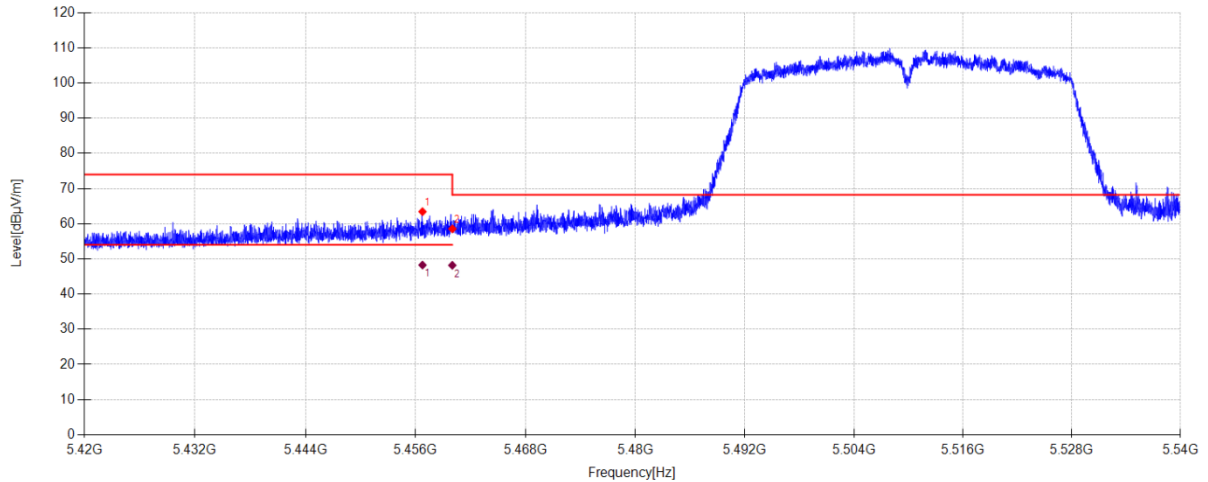**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.744	54.33	33.80	-24.70	63.43	74.00	10.57	PK	Vertical
2	5460.000	49.43	33.80	-24.68	58.55	68.20	9.65	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.744	39.15	33.80	-24.70	48.25	54.00	5.75	AV	Vertical
2	5460.000	39.06	33.80	-24.68	48.18	54.00	5.82	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\67

Memo:

Sample Number: S26081718-003

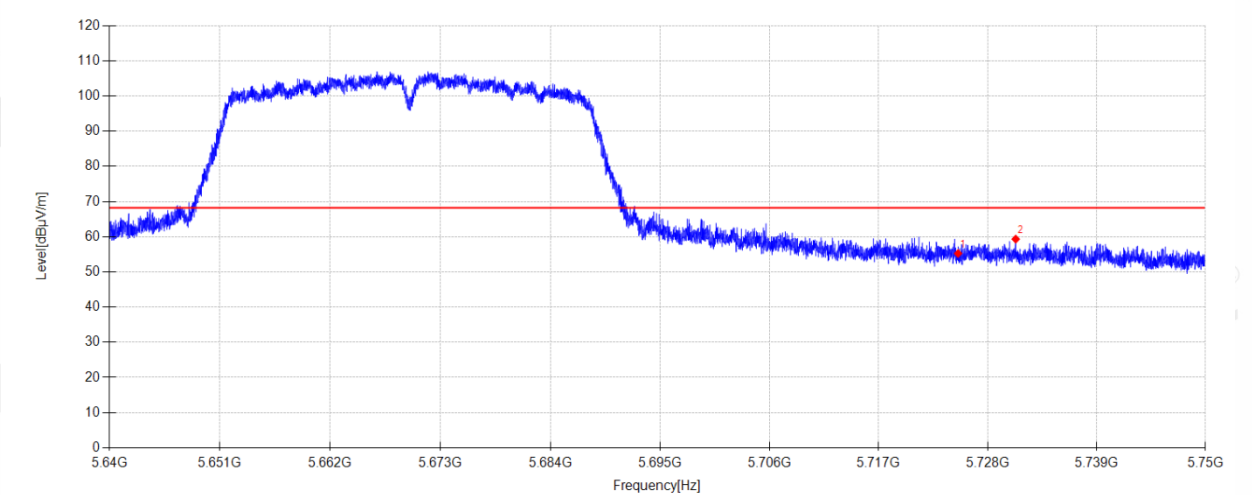

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.74	34.30	-24.79	55.25	68.20	12.95	PK	Horizontal
2	5730.816	49.79	34.32	-24.79	59.32	68.20	8.88	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\68

Memo:

Sample Number: S26081718-003

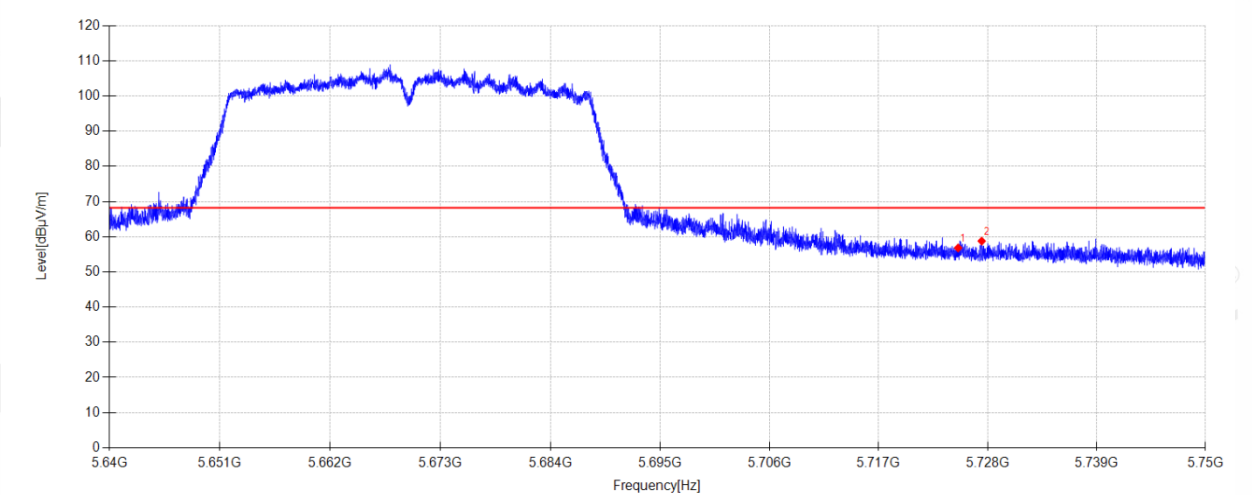

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	47.31	34.30	-24.79	56.82	68.20	11.38	PK	Vertical
2	5727.384	49.24	34.31	-24.79	58.76	68.20	9.44	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\69
Memo: Sample Number: S26081718-003

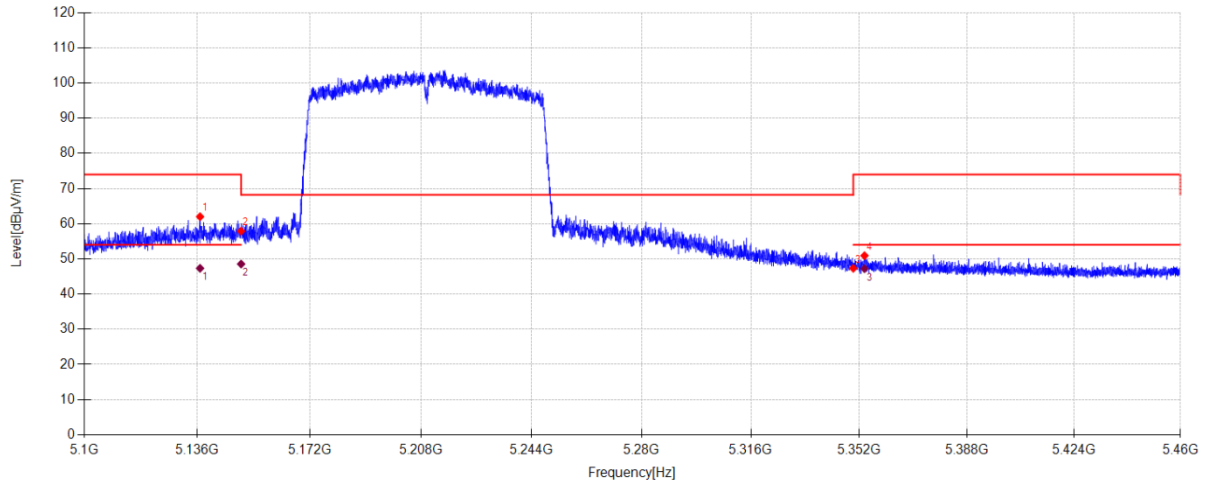

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5136.864	53.09	33.93	-25.02	62.00	74.00	12.00	PK	Horizontal
2	5150.000	49.01	33.90	-25.02	57.89	68.20	10.31	PK	Horizontal
3	5350.000	38.81	33.70	-25.18	47.33	68.20	20.87	PK	Horizontal
4	5353.728	42.39	33.70	-25.17	50.92	74.00	23.08	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5136.861	38.42	33.93	-25.02	47.33	54.00	6.67	AV	Horizontal
2	5150.002	39.67	33.90	-25.02	48.55	54.00	5.45	AV	Horizontal
3	5353.728	38.69	33.70	-25.17	47.22	54.00	6.78	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\70
Memo: Sample Number: S26081718-003

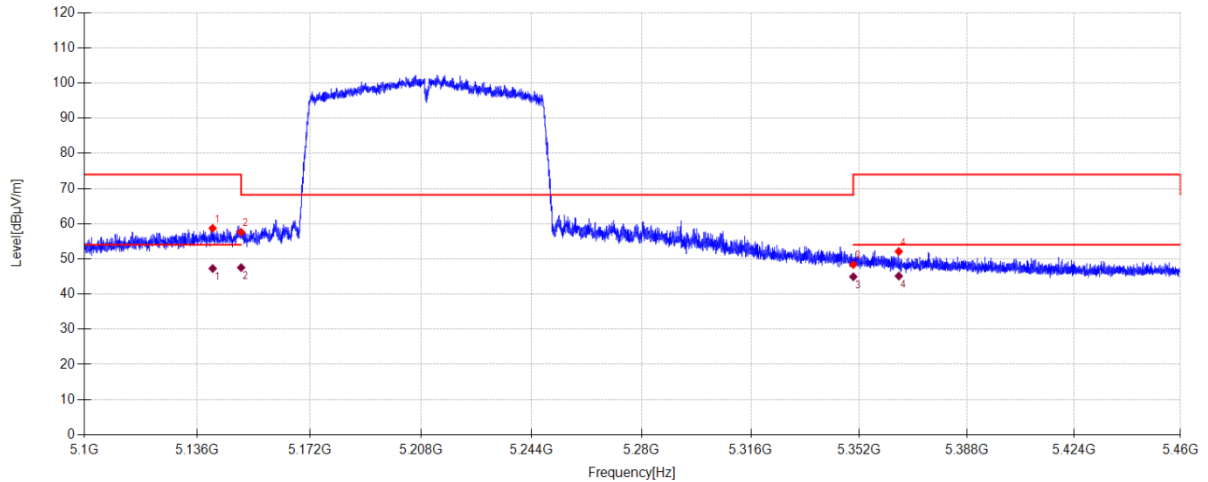

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5140.896	49.81	33.92	-25.02	58.71	74.00	15.29	PK	Vertical
2	5150.000	48.72	33.90	-25.02	57.60	68.20	10.60	PK	Vertical
3	5350.000	39.86	33.70	-25.18	48.38	68.20	19.82	PK	Vertical
4	5365.176	43.51	33.70	-25.11	52.10	74.00	21.90	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5140.899	38.37	33.92	-25.02	47.27	54.00	6.73	AV	Vertical
2	5150.000	38.65	33.90	-25.02	47.53	54.00	6.47	AV	Vertical
3	5350.000	36.41	33.70	-25.18	44.93	54.00	9.07	AV	Vertical
4	5365.176	36.53	33.70	-25.11	45.12	54.00	8.88	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5290MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\71
Memo: Sample Number: S26081718-003

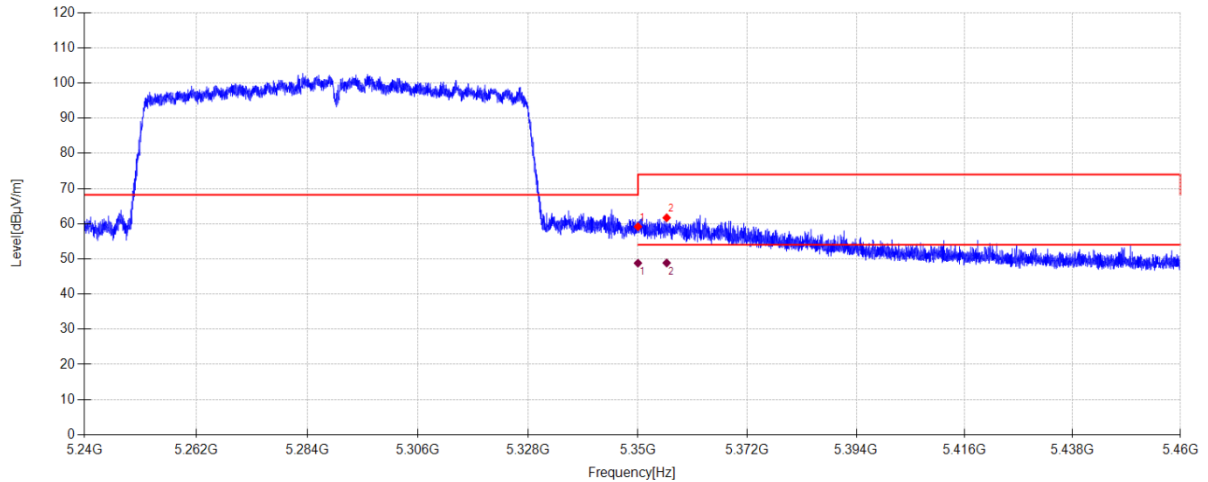**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	50.65	33.70	-25.19	59.16	68.20	9.04	PK	Horizontal
2	5355.764	53.15	33.70	-25.16	61.69	74.00	12.31	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.29	33.70	-25.19	48.80	54.00	5.20	AV	Horizontal
2	5355.764	40.31	33.70	-25.16	48.85	54.00	5.15	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\72

Memo:

Sample Number: S26081718-003

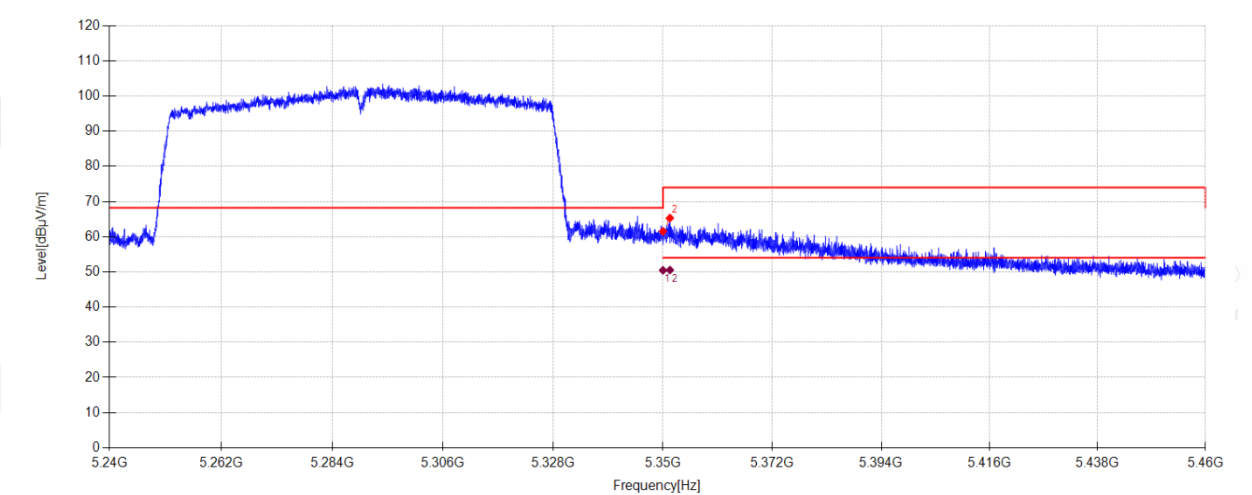

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	52.99	33.70	-25.19	61.50	68.20	6.70	PK	Vertical
2	5351.408	56.79	33.70	-25.18	65.31	74.00	8.69	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	41.95	33.70	-25.19	50.46	54.00	3.54	AV	Vertical
2	5351.410	42.01	33.70	-25.18	50.53	54.00	3.47	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\73
Memo: Sample Number: S26081718-003

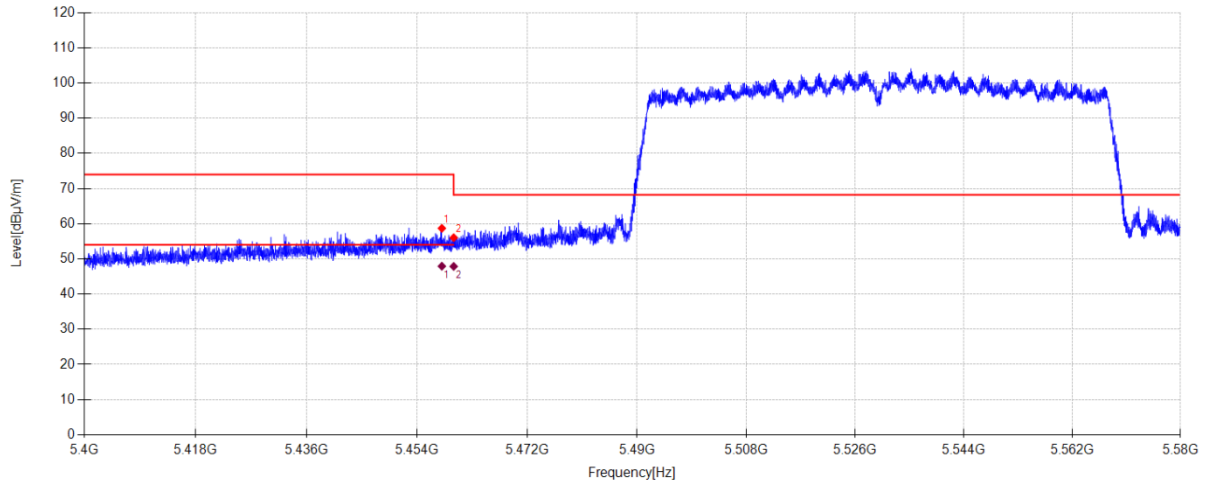**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.068	49.59	33.80	-24.69	58.70	74.00	15.30	PK	Horizontal
2	5460.000	46.90	33.80	-24.68	56.02	68.20	12.18	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.068	38.82	33.80	-24.69	47.93	54.00	6.07	AV	Horizontal
2	5460.000	38.74	33.80	-24.68	47.86	54.00	6.14	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\74
Memo: Sample Number: S26081718-003

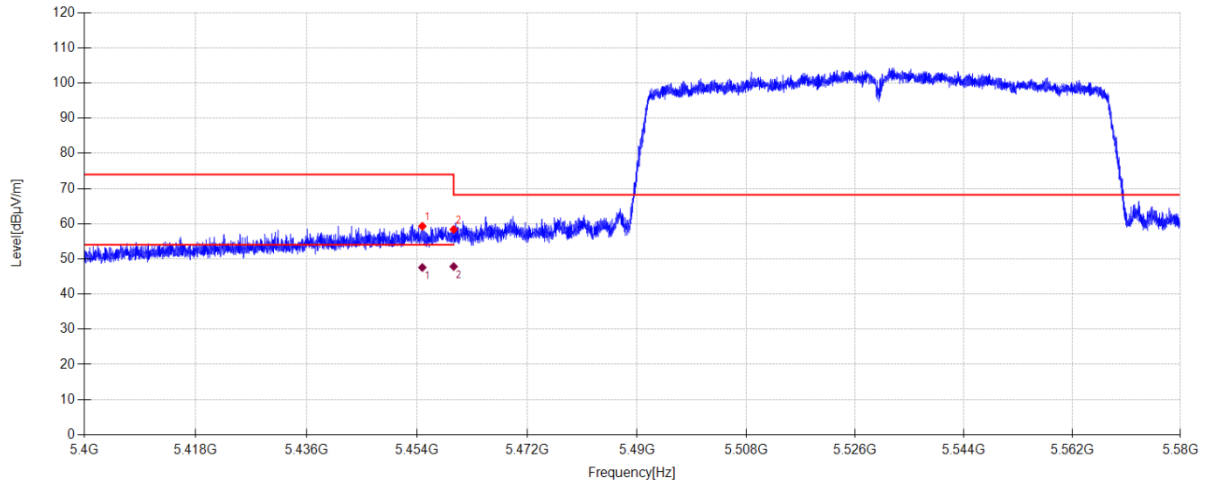

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.882	50.19	33.80	-24.70	59.29	74.00	14.71	PK	Vertical
2	5460.000	49.25	33.80	-24.68	58.37	68.20	9.83	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.882	38.45	33.80	-24.70	47.55	54.00	6.45	AV	Vertical
2	5460.000	38.70	33.80	-24.68	47.82	54.00	6.18	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\75

Memo:

Sample Number: S26081718-003

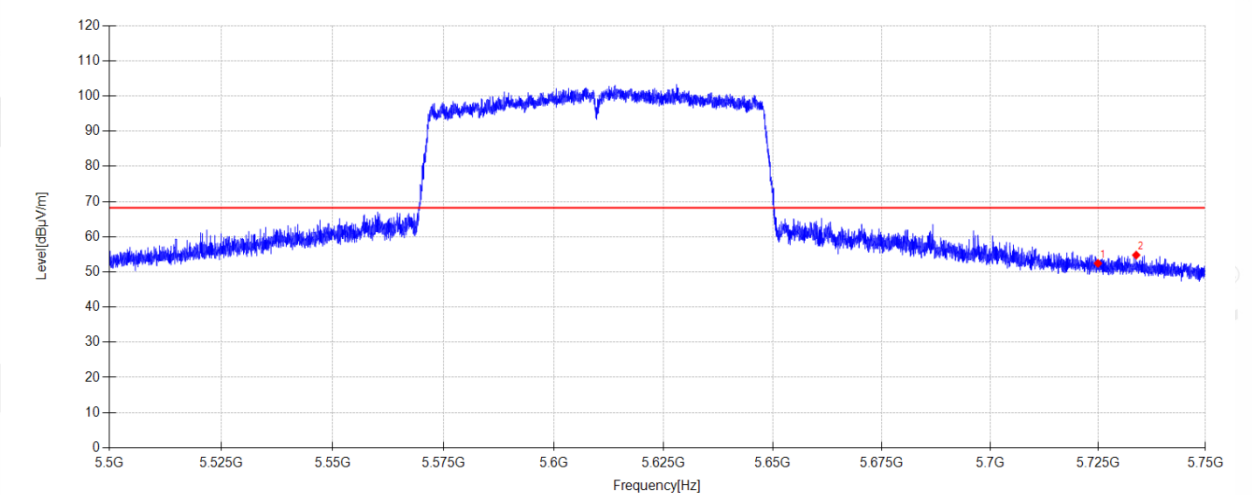

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.92	34.30	-24.79	52.43	68.20	15.77	PK	Horizontal
2	5733.900	45.22	34.34	-24.78	54.78	68.20	13.42	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\76

Memo:

Sample Number: S26081718-003

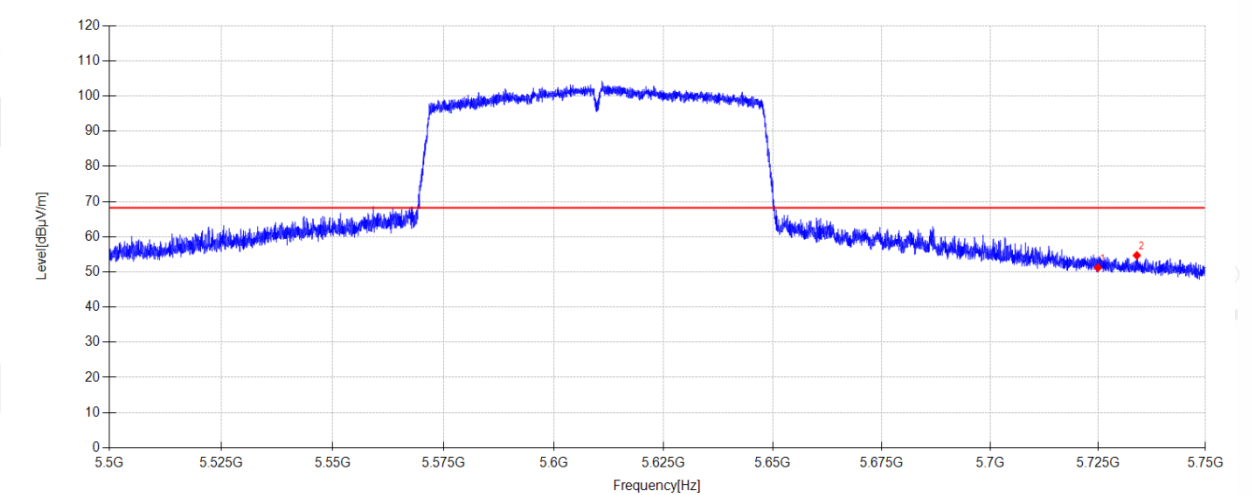

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.69	34.30	-24.79	51.20	68.20	17.00	PK	Vertical
2	5734.050	45.13	34.34	-24.78	54.69	68.20	13.51	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\77

Memo:

Sample Number: S26081718-003

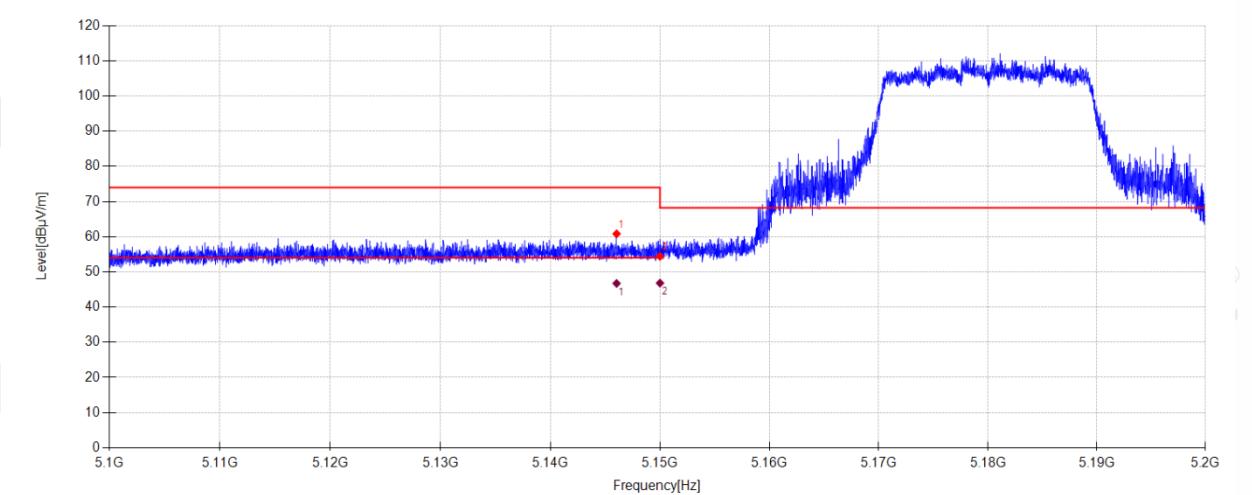

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.040	51.93	33.91	-25.02	60.82	74.00	13.18	PK	Horizontal
2	5150.000	45.52	33.90	-25.02	54.40	68.20	13.80	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.040	37.84	33.91	-25.02	46.73	54.00	7.27	AV	Horizontal
2	5150.000	37.93	33.90	-25.02	46.81	54.00	7.19	AV	Horizontal


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5180MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\78
Memo: Sample Number: S26081718-003

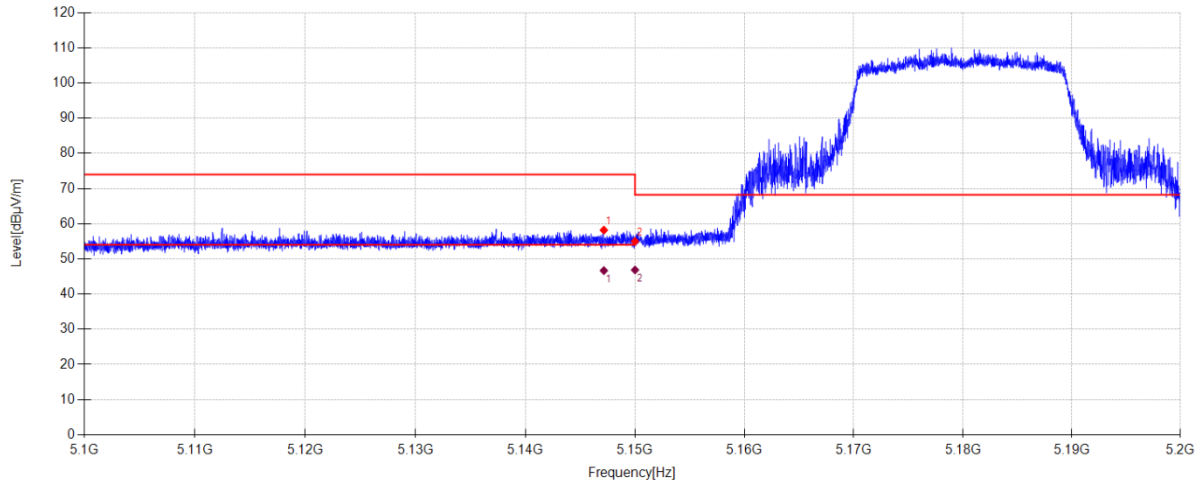**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.160	49.29	33.91	-25.02	58.18	74.00	15.82	PK	Vertical
2	5150.000	46.12	33.90	-25.02	55.00	68.20	13.20	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.160	37.79	33.91	-25.02	46.68	54.00	7.32	AV	Vertical
2	5150.000	37.98	33.90	-25.02	46.86	54.00	7.14	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\79
Memo: Sample Number: S26081718-003

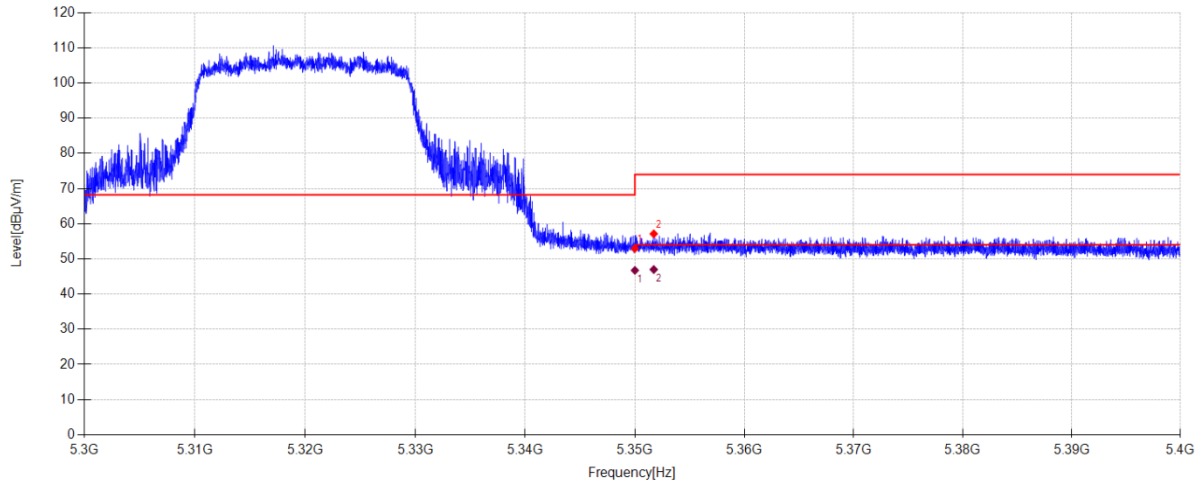**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.45	33.70	-25.19	52.96	68.20	15.24	PK	Horizontal
2	5351.720	48.61	33.70	-25.18	57.13	74.00	16.87	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.23	33.70	-25.19	46.74	54.00	7.26	AV	Horizontal
2	5351.720	38.46	33.70	-25.18	46.98	54.00	7.02	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5320MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\80
Memo: Sample Number: S26081718-003

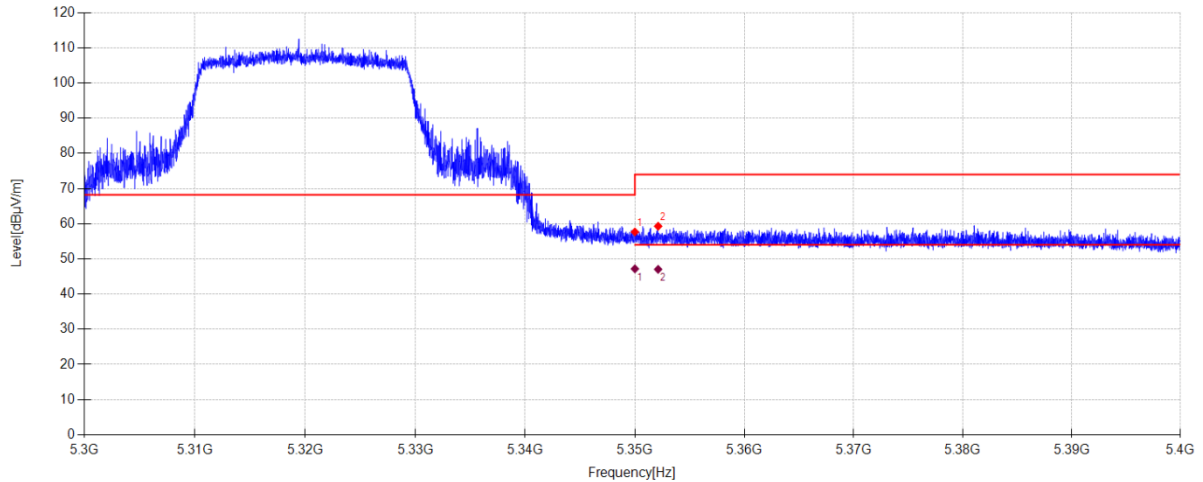

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	49.15	33.70	-25.19	57.66	68.20	10.54	PK	Vertical
2	5352.120	50.76	33.70	-25.17	59.29	74.00	14.71	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.67	33.70	-25.19	47.18	54.00	6.82	AV	Vertical
2	5352.120	38.51	33.70	-25.17	47.04	54.00	6.96	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\81

Memo:

Sample Number: S26081718-003

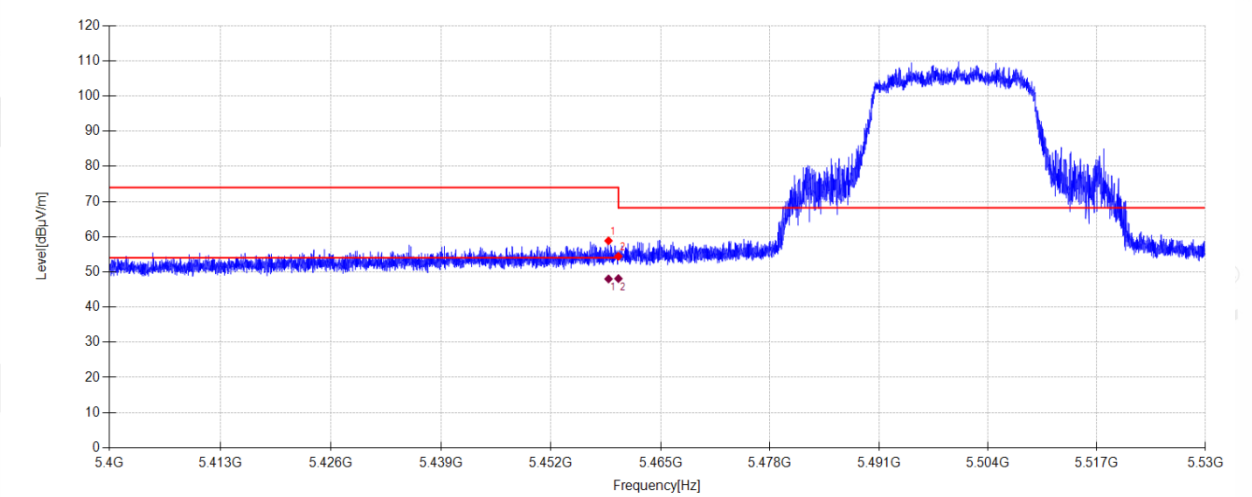

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.825	49.73	33.80	-24.69	58.84	74.00	15.16	PK	Horizontal
2	5460.000	45.31	33.80	-24.68	54.43	68.20	13.77	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.825	38.89	33.80	-24.69	48.00	54.00	6.00	AV	Horizontal
2	5460.000	38.97	33.80	-24.68	48.09	54.00	5.91	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5500MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\82
Memo: Sample Number: S26081718-003

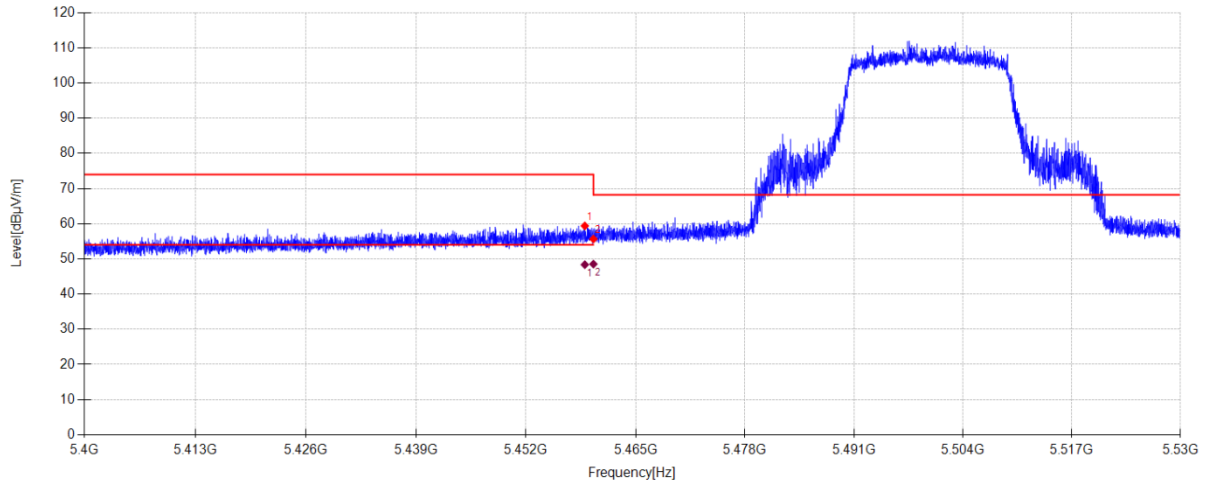**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.981	50.27	33.80	-24.69	59.38	74.00	14.62	PK	Vertical
2	5460.000	46.53	33.80	-24.68	55.65	68.20	12.55	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.981	39.26	33.80	-24.69	48.37	54.00	5.63	AV	Vertical
2	5460.000	39.41	33.80	-24.68	48.53	54.00	5.47	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\83

Memo:

Sample Number: S26081718-003

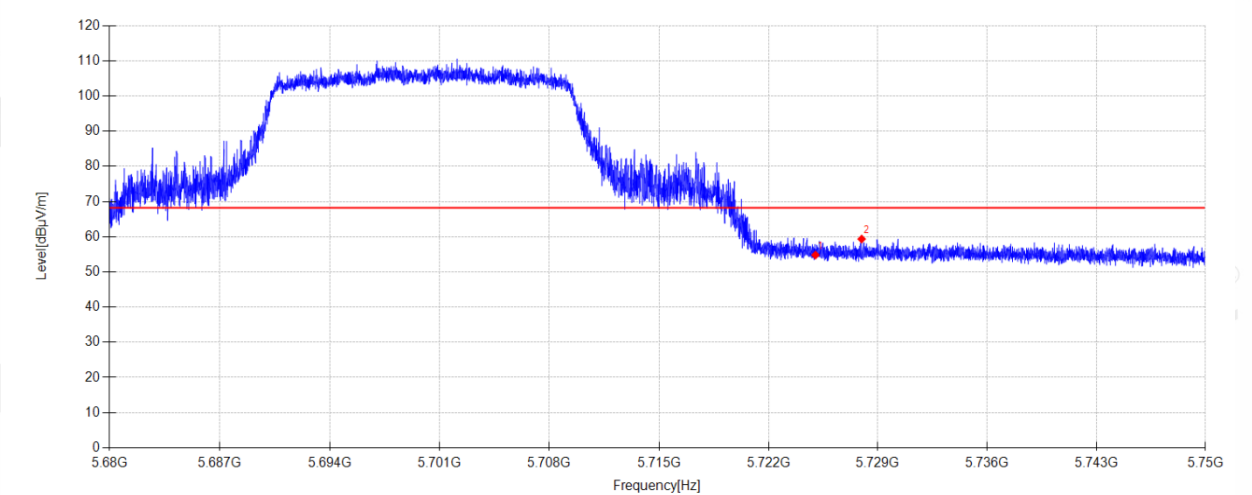

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.28	34.30	-24.79	54.79	68.20	13.41	PK	Horizontal
2	5727.957	49.82	34.31	-24.79	59.34	68.20	8.86	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\84

Memo:

Sample Number: S26081718-003

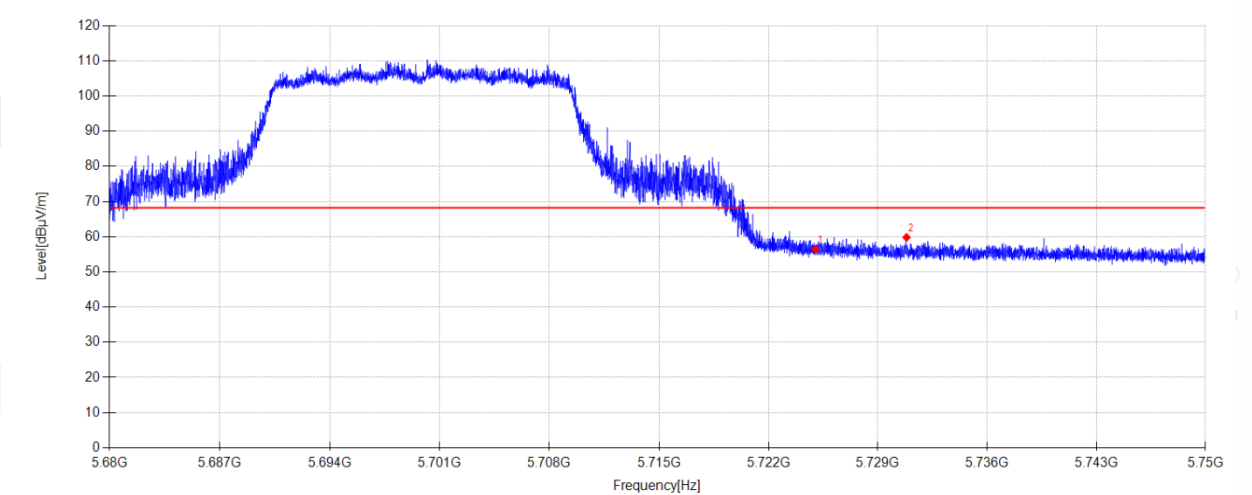

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	46.96	34.30	-24.79	56.47	68.20	11.73	PK	Vertical
2	5730.834	50.29	34.32	-24.79	59.82	68.20	8.38	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5190MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\85

Memo:

Sample Number: S26081718-003

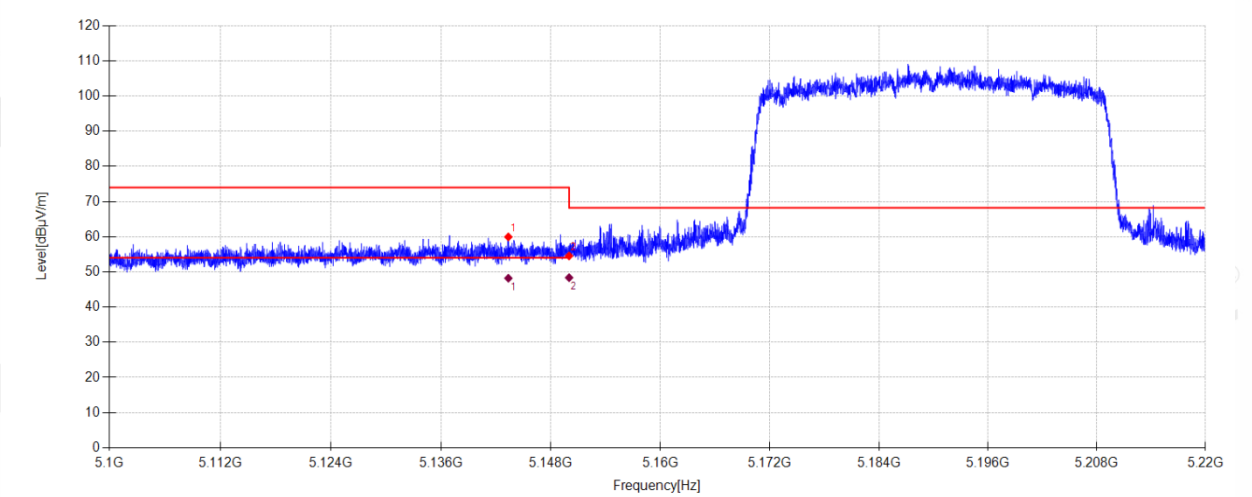

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5143.368	51.05	33.91	-25.02	59.94	74.00	14.06	PK	Horizontal
2	5150.000	45.66	33.90	-25.02	54.54	68.20	13.66	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5143.368	39.31	33.91	-25.02	48.20	54.00	5.80	AV	Horizontal
2	5150.000	39.48	33.90	-25.02	48.36	54.00	5.64	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5190MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\86
Memo: Sample Number: S26081718-003

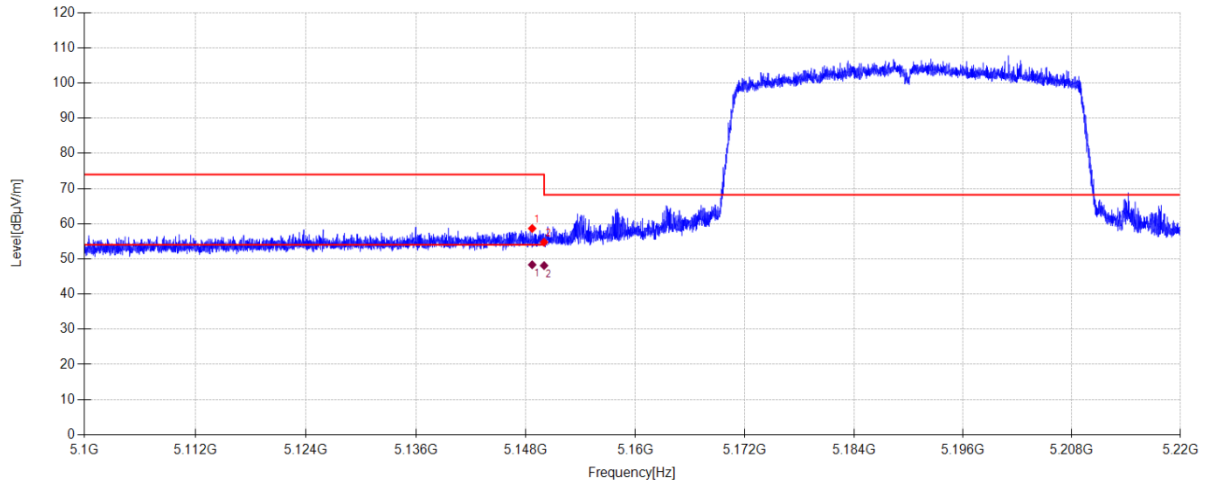**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.696	49.77	33.90	-25.02	58.65	74.00	15.35	PK	Vertical
2	5150.000	45.87	33.90	-25.02	54.75	68.20	13.45	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.696	39.45	33.90	-25.02	48.33	54.00	5.67	AV	Vertical
2	5150.000	39.22	33.90	-25.02	48.10	54.00	5.90	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\87
Memo: Sample Number: S26081718-003

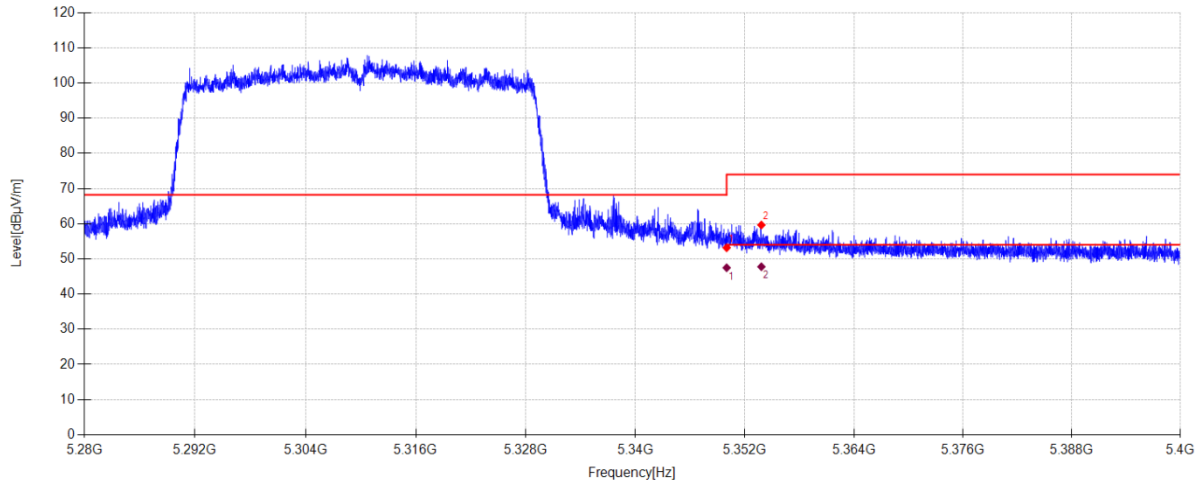**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.65	33.70	-25.18	53.17	68.20	15.03	PK	Horizontal
2	5353.812	51.11	33.70	-25.17	59.64	74.00	14.36	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.96	33.70	-25.18	47.48	54.00	6.52	AV	Horizontal
2	5353.812	39.24	33.70	-25.17	47.77	54.00	6.23	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5310MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\88
Memo: Sample Number: S26081718-003

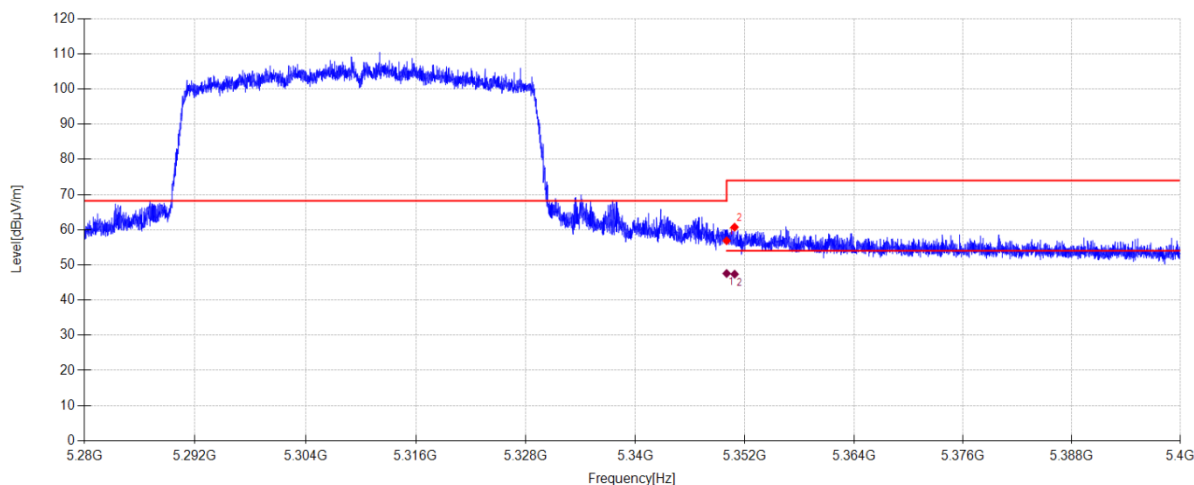

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	48.34	33.70	-25.18	56.86	68.20	11.34	PK	Vertical
2	5350.872	52.21	33.70	-25.18	60.73	74.00	13.27	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.05	33.70	-25.19	47.56	54.00	6.44	AV	Vertical
2	5350.872	38.84	33.70	-25.18	47.36	54.00	6.64	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5510MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\89

Memo:

Sample Number: S26081718-003

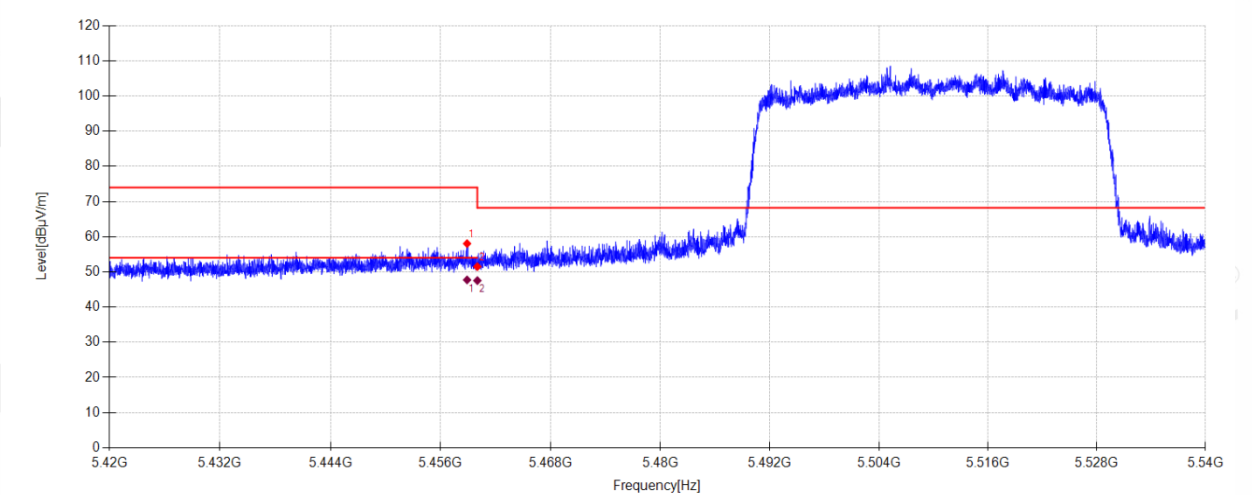

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.880	48.93	33.80	-24.69	58.04	74.00	15.96	PK	Horizontal
2	5460.000	42.37	33.80	-24.68	51.49	68.20	16.71	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.880	38.62	33.80	-24.69	47.73	54.00	6.27	AV	Horizontal
2	5460.000	38.41	33.80	-24.68	47.53	54.00	6.47	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5510MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\90
Memo: Sample Number: S26081718-003

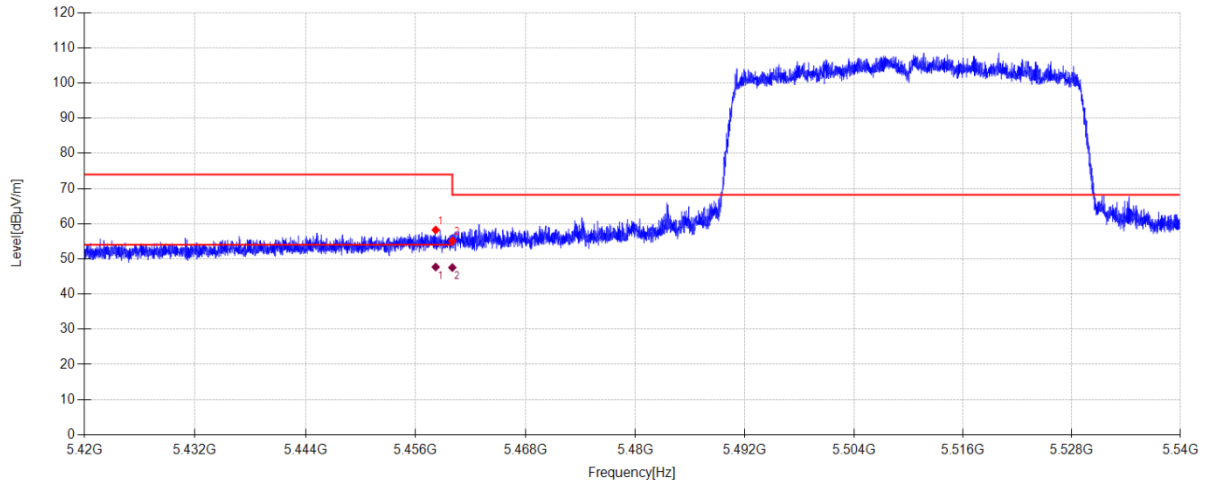**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.184	49.11	33.80	-24.69	58.22	74.00	15.78	PK	Vertical
2	5460.000	46.02	33.80	-24.68	55.14	68.20	13.06	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.184	38.59	33.80	-24.69	47.70	54.00	6.30	AV	Vertical
2	5460.000	38.42	33.80	-24.68	47.54	54.00	6.46	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.