

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\91

Memo:

Sample Number: S26081718-003

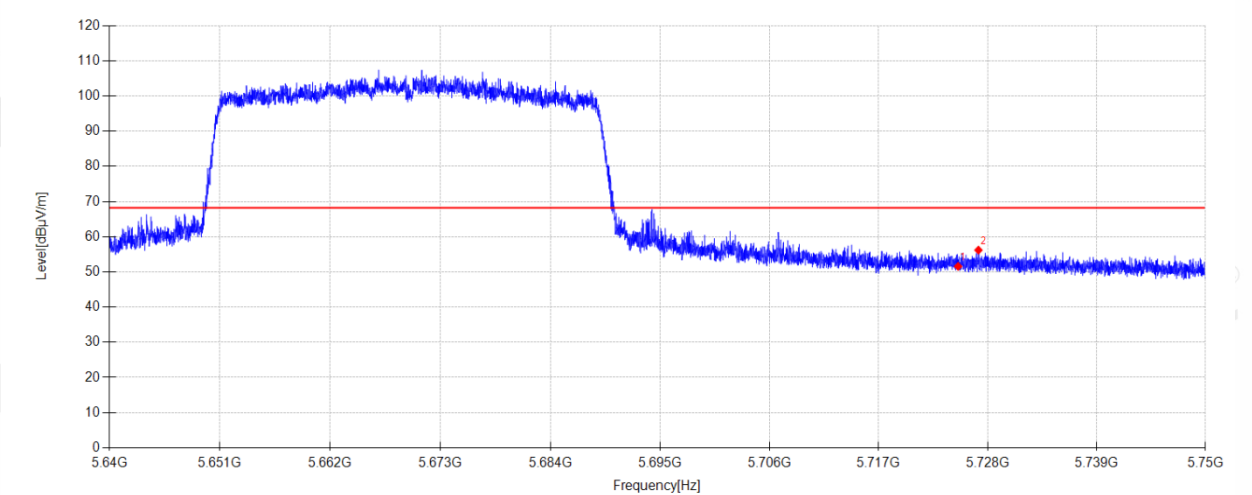

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.05	34.30	-24.79	51.56	68.20	16.64	PK	Horizontal
2	5727.054	46.68	34.31	-24.79	56.20	68.20	12.00	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\92

Memo:

Sample Number: S26081718-003

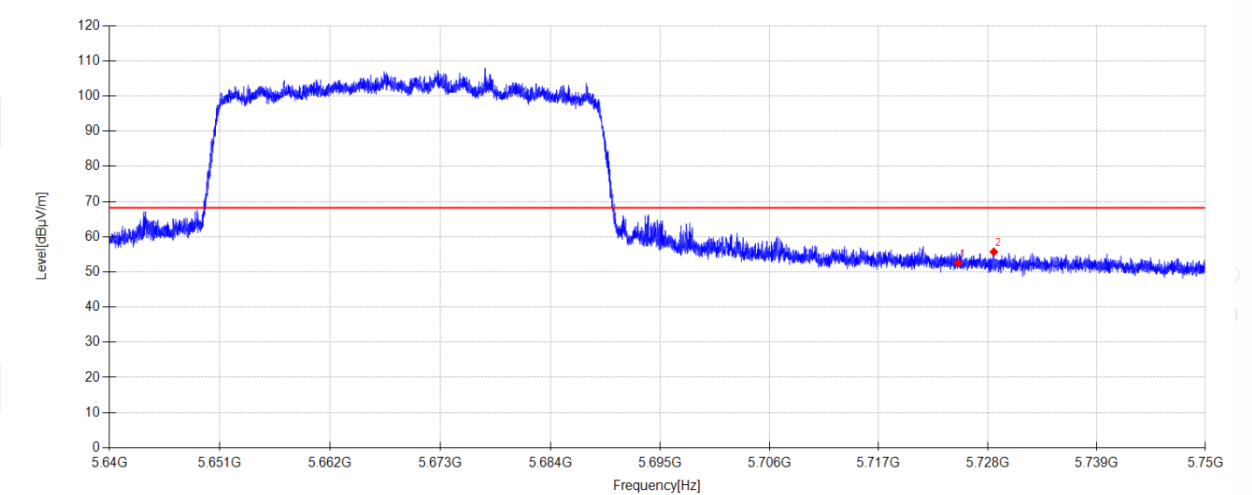

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.04	34.30	-24.79	52.55	68.20	15.65	PK	Vertical
2	5728.605	46.18	34.31	-24.79	55.70	68.20	12.50	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\93
Memo: Sample Number: S26081718-003

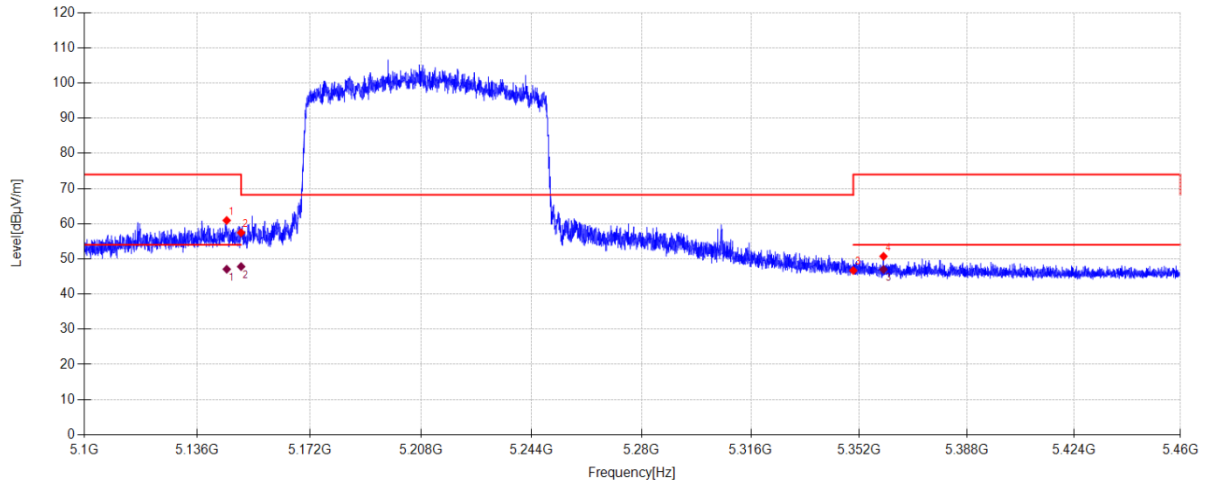

Suspected Data List

NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.396	52.04	33.91	-25.02	60.93	74.00	13.07	PK	Horizontal
2	5150.000	48.57	33.90	-25.02	57.45	68.20	10.75	PK	Horizontal
3	5350.000	38.18	33.70	-25.18	46.70	68.20	21.50	PK	Horizontal
4	5360.064	42.16	33.70	-25.13	50.73	74.00	23.27	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.393	38.18	33.91	-25.02	47.07	54.00	6.93	AV	Horizontal
2	5150.000	38.94	33.90	-25.02	47.82	54.00	6.18	AV	Horizontal
3	5360.064	38.44	33.70	-25.13	47.01	54.00	6.99	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5210MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\94
Memo: Sample Number: S26081718-003

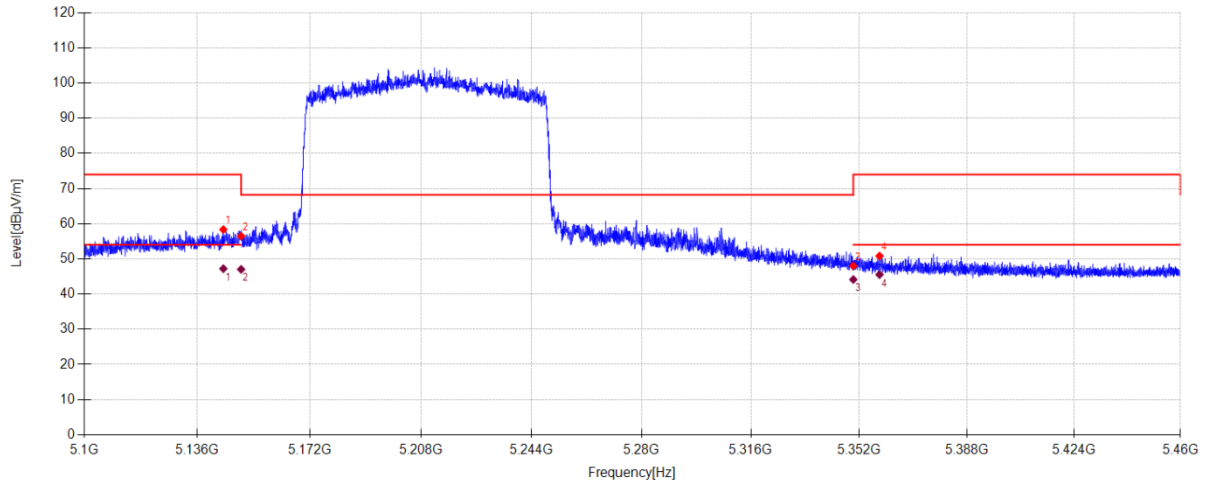**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.316	49.46	33.91	-25.02	58.35	74.00	15.65	PK	Vertical
2	5150.000	47.58	33.90	-25.02	56.46	68.20	11.74	PK	Vertical
3	5350.000	39.51	33.70	-25.18	48.03	68.20	20.17	PK	Vertical
4	5358.732	42.26	33.70	-25.14	50.82	74.00	23.18	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.316	38.33	33.91	-25.02	47.22	54.00	6.78	AV	Vertical
2	5150.000	38.14	33.90	-25.02	47.02	54.00	6.98	AV	Vertical
3	5350.000	35.62	33.70	-25.18	44.14	54.00	9.86	AV	Vertical
4	5358.732	36.98	33.70	-25.14	45.54	54.00	8.46	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\95

Memo:

Sample Number: S26081718-003

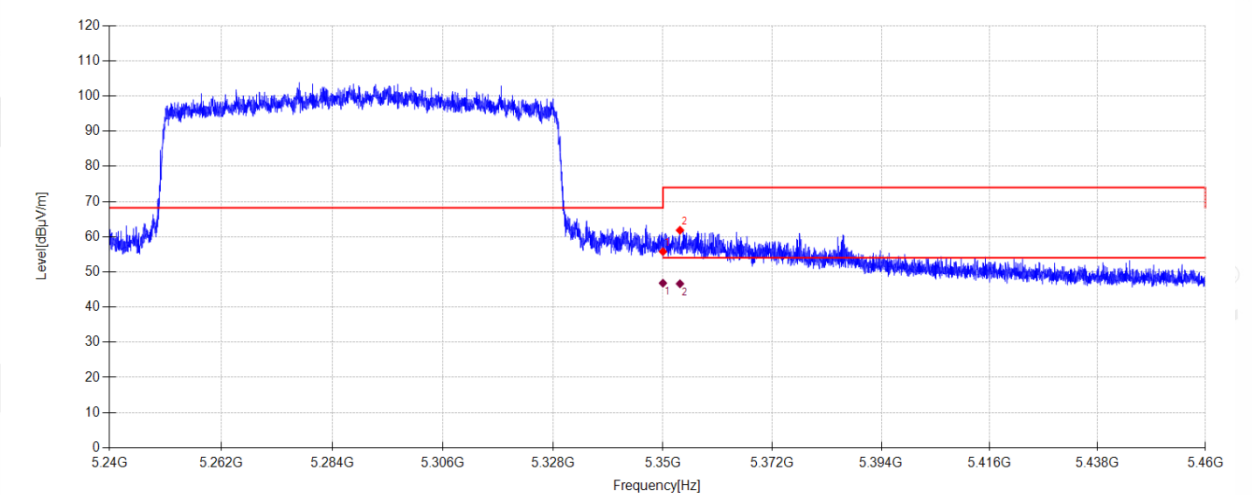

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	47.25	33.70	-25.19	55.76	68.20	12.44	PK	Horizontal
2	5353.410	53.31	33.70	-25.17	61.84	74.00	12.16	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.29	33.70	-25.19	46.80	54.00	7.20	AV	Horizontal
2	5353.410	38.10	33.70	-25.17	46.63	54.00	7.37	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5290MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\96

Memo:

Sample Number: S26081718-003

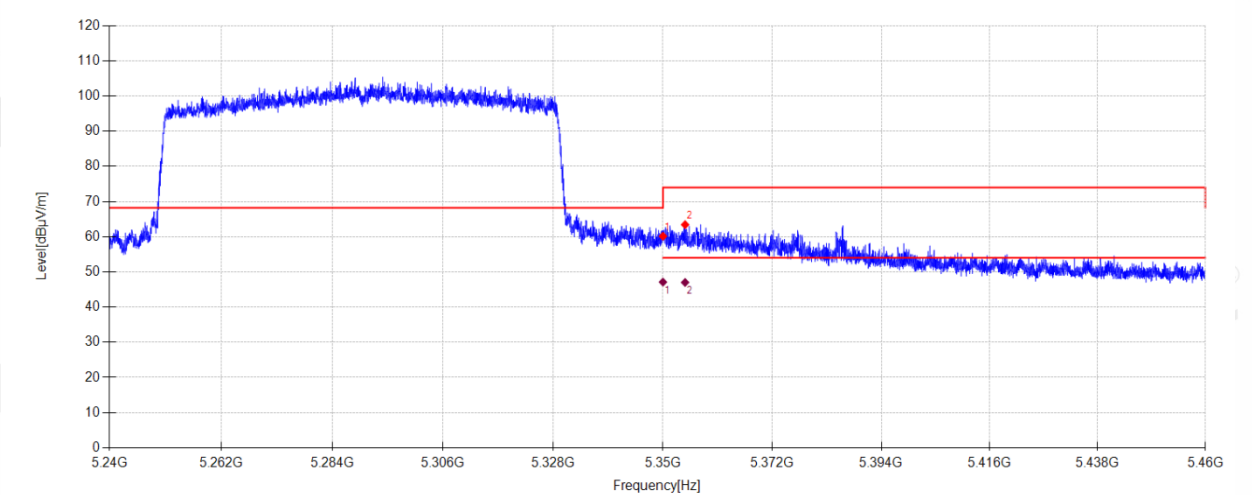

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	51.63	33.70	-25.19	60.14	68.20	8.06	PK	Vertical
2	5354.444	54.87	33.70	-25.16	63.41	74.00	10.59	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.60	33.70	-25.19	47.11	54.00	6.89	AV	Vertical
2	5354.443	38.47	33.70	-25.16	47.01	54.00	6.99	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5530MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\97

Memo:

Sample Number: S26081718-003

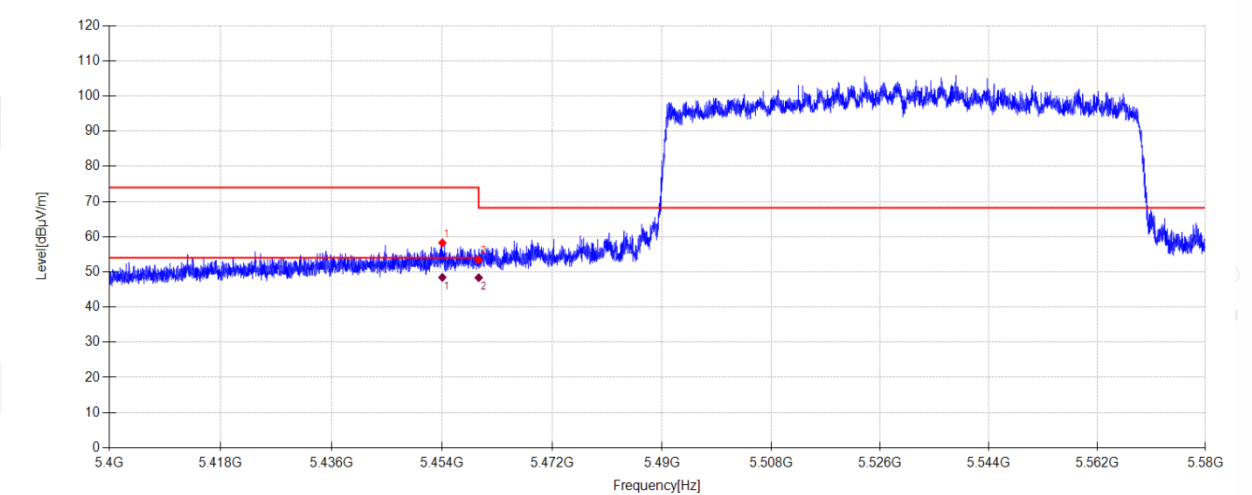

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.072	49.17	33.80	-24.71	58.26	74.00	15.74	PK	Horizontal
2	5460.000	44.31	33.80	-24.68	53.43	68.20	14.77	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.072	39.34	33.80	-24.71	48.43	54.00	5.57	AV	Horizontal
2	5460.000	39.23	33.80	-24.68	48.35	54.00	5.65	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5530MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\98
Memo: Sample Number: S26081718-003

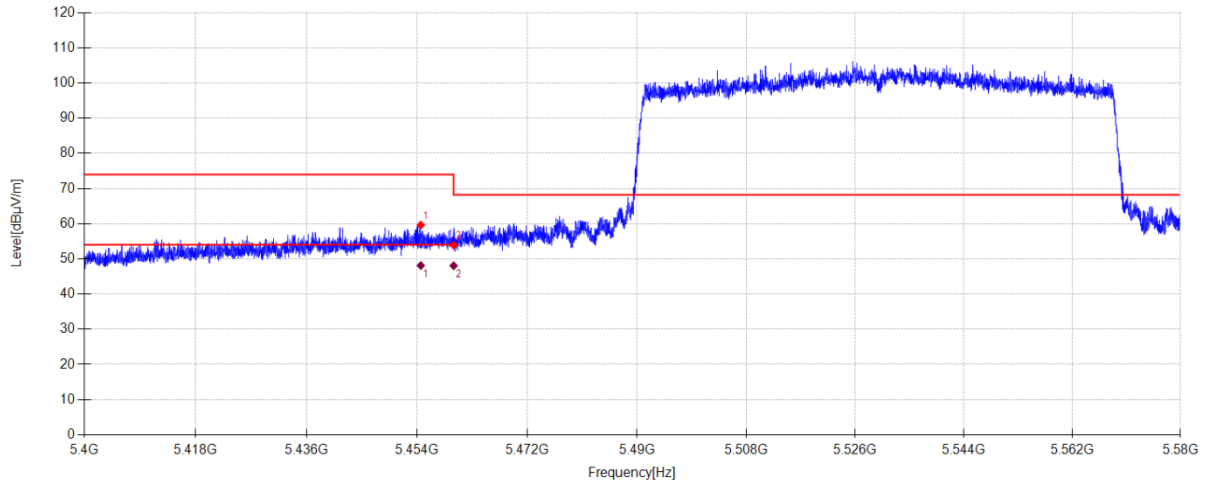**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.630	50.53	33.80	-24.71	59.62	74.00	14.38	PK	Vertical
2	5460.000	44.79	33.80	-24.68	53.91	68.20	14.29	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.630	39.02	33.80	-24.71	48.11	54.00	5.89	AV	Vertical
2	5460.000	38.94	33.80	-24.68	48.06	54.00	5.94	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\99

Memo:

Sample Number: S26081718-003

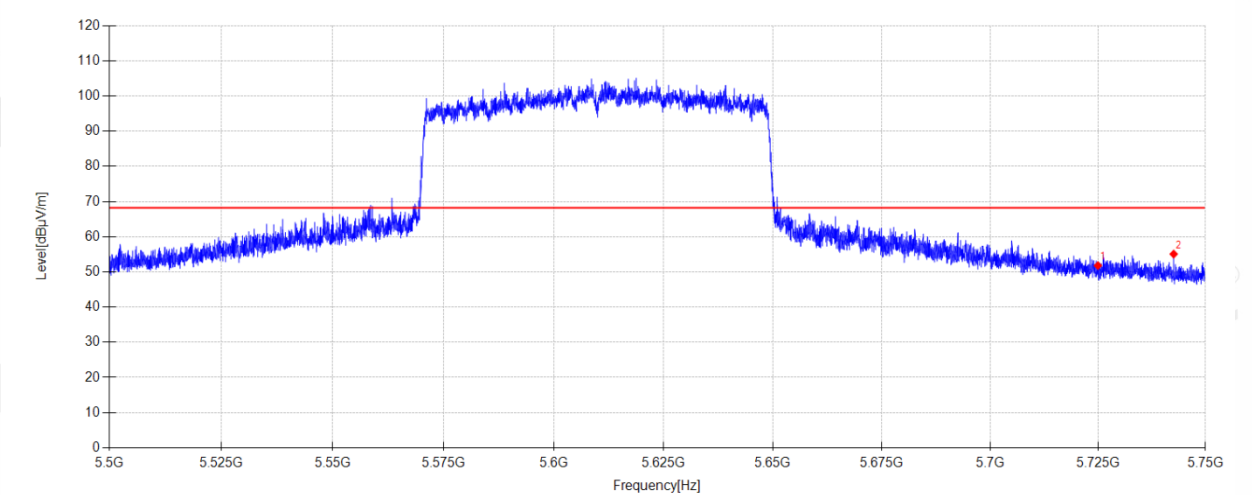

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.29	34.30	-24.79	51.80	68.20	16.40	PK	Horizontal
2	5742.625	45.48	34.37	-24.78	55.07	68.20	13.13	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G\100

Memo:

Sample Number: S26081718-003

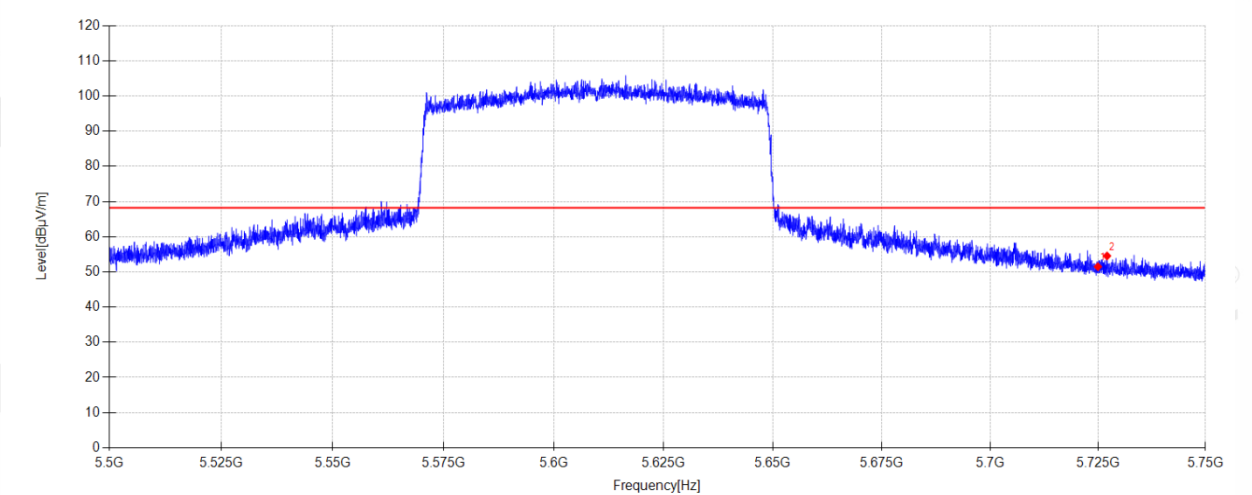

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.97	34.30	-24.79	51.48	68.20	16.72	PK	Vertical
2	5727.125	45.02	34.31	-24.79	54.54	68.20	13.66	PK	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G RU\11

Memo:

Sample Number: S26081718-003

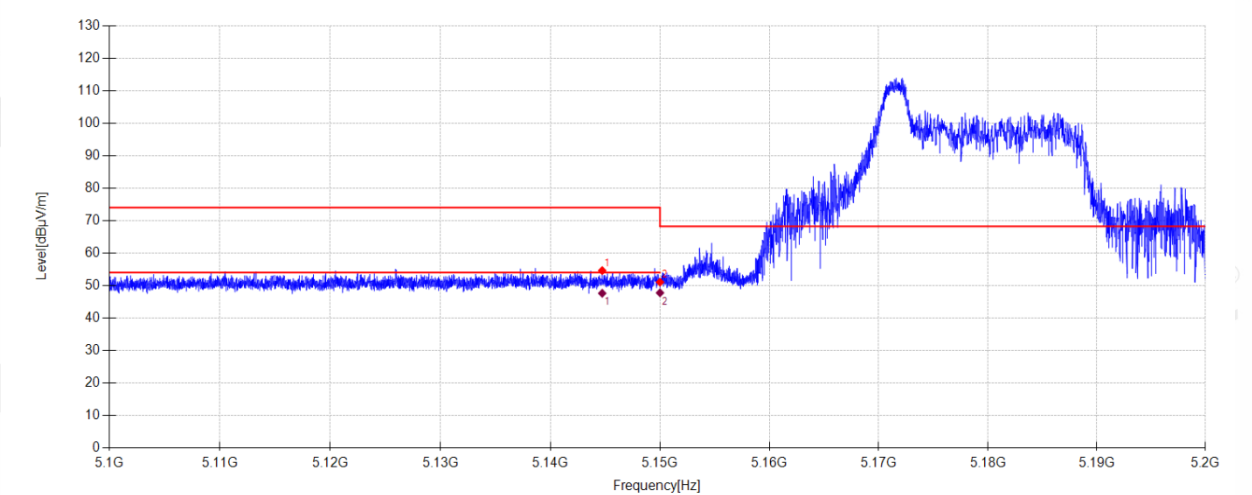

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.730	45.69	33.91	-25.02	54.58	74.00	19.42	PK	Horizontal
2	5150.000	42.14	33.90	-25.02	51.02	68.20	17.18	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.730	38.69	33.91	-25.02	47.58	54.00	6.42	AV	Horizontal
2	5150.000	38.84	33.90	-25.02	47.72	54.00	6.28	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5180MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G RU\12

Memo:

Sample Number: S26081718-003

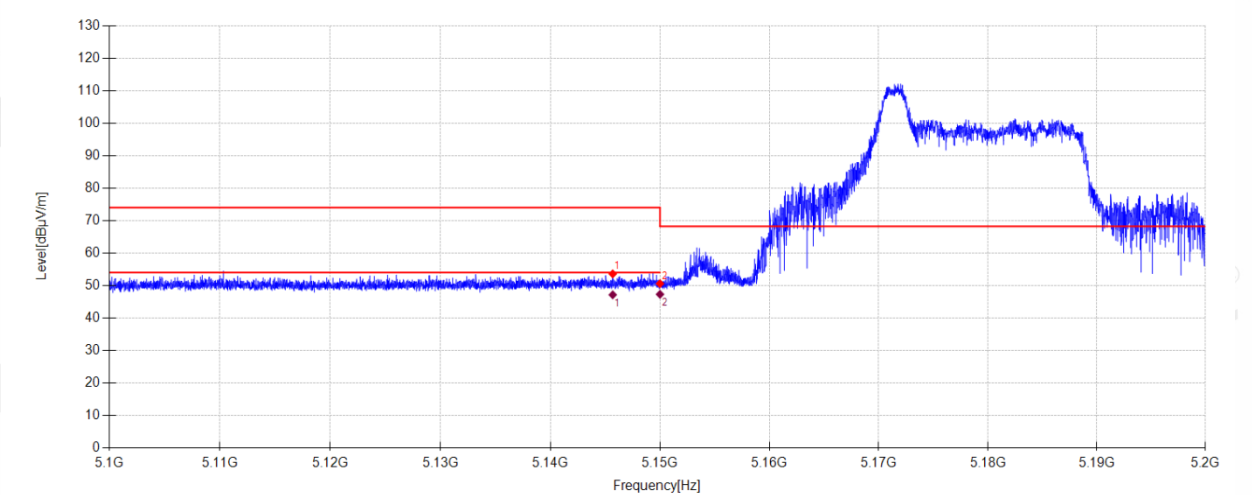

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.690	44.67	33.91	-25.02	53.56	74.00	20.44	PK	Vertical
2	5150.000	41.67	33.90	-25.02	50.55	68.20	17.65	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5145.690	38.22	33.91	-25.02	47.11	54.00	6.89	AV	Vertical
2	5150.000	38.38	33.90	-25.02	47.26	54.00	6.74	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G RU\9

Memo:

Sample Number: S26081718-003

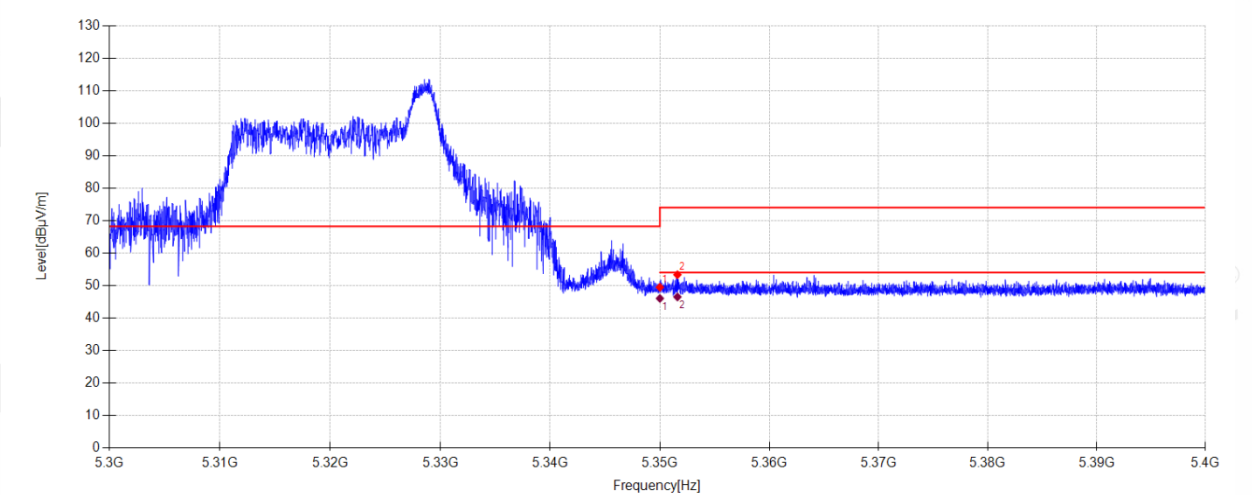

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	40.93	33.70	-25.19	49.44	68.20	18.76	PK	Horizontal
2	5351.600	44.78	33.70	-25.18	53.30	74.00	20.70	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.49	33.70	-25.19	46.00	54.00	8.00	AV	Horizontal
2	5351.600	37.93	33.70	-25.18	46.45	54.00	7.55	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5320MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G RU\10

Memo:

Sample Number: S26081718-003

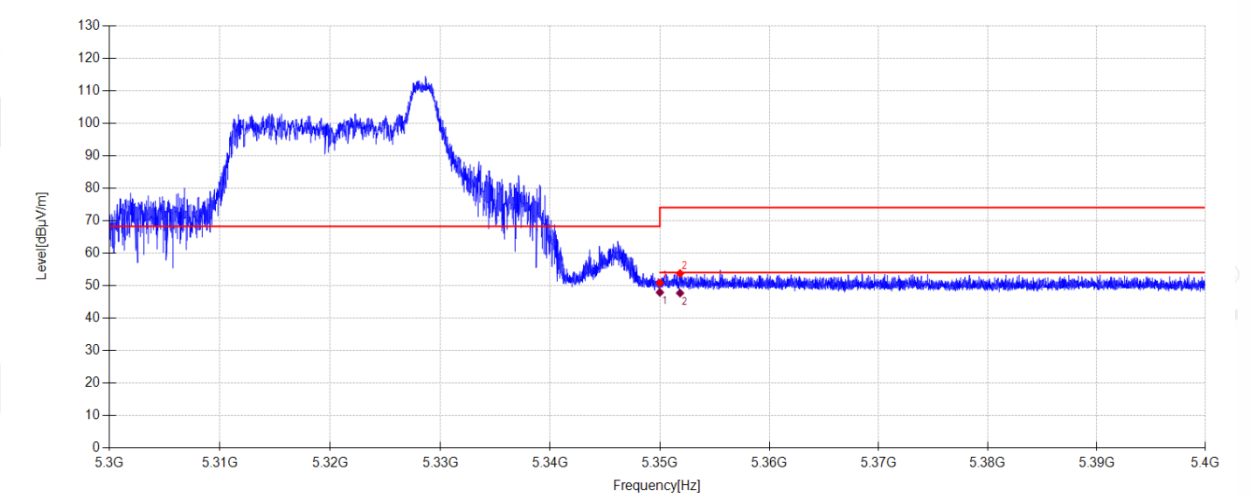

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.28	33.70	-25.19	50.79	68.20	17.41	PK	Vertical
2	5351.840	45.17	33.70	-25.18	53.69	74.00	20.31	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.35	33.70	-25.19	47.86	54.00	6.14	AV	Vertical
2	5351.840	39.13	33.70	-25.18	47.65	54.00	6.35	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G RU\7

Memo:

Sample Number: S26081718-003

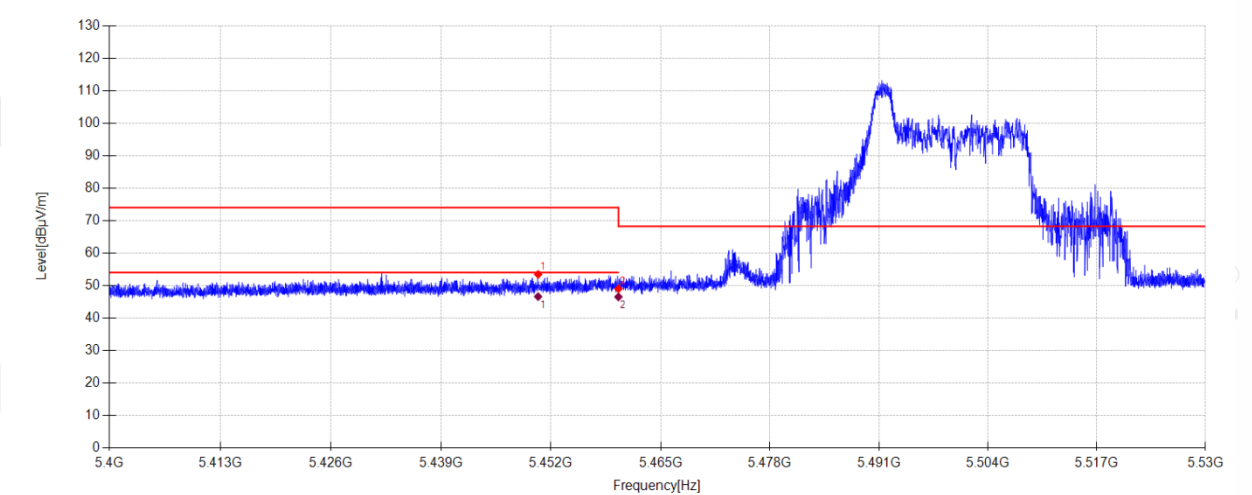

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5450.492	44.32	33.80	-24.72	53.40	74.00	20.60	PK	Horizontal
2	5460.000	39.84	33.80	-24.68	48.96	68.20	19.24	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5450.492	37.48	33.80	-24.72	46.56	54.00	7.44	AV	Horizontal
2	5460.000	37.36	33.80	-24.68	46.48	54.00	7.52	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU0 5500MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G RU\8

Memo:

Sample Number: S26081718-003

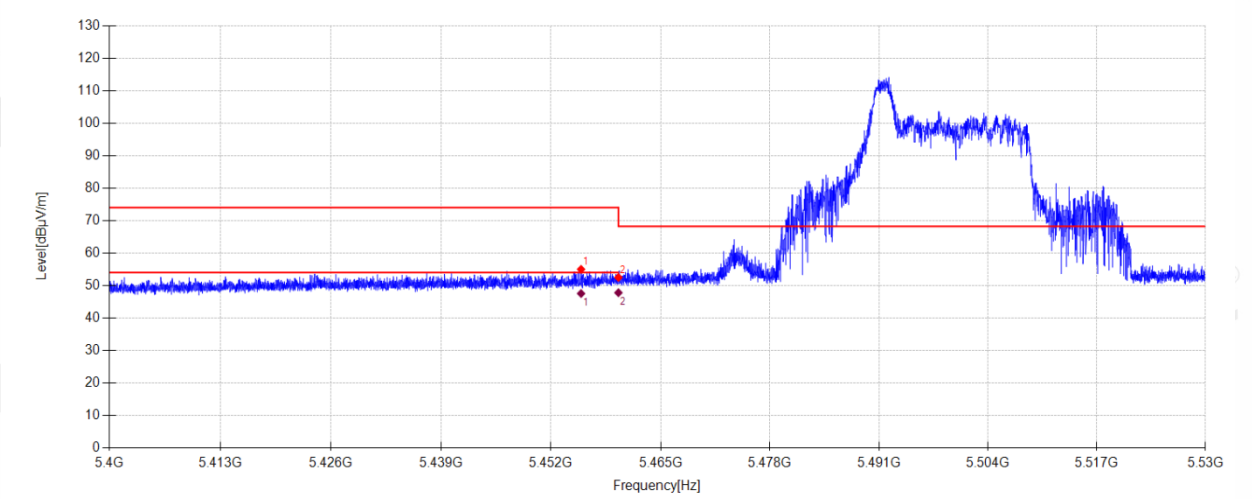

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.575	45.87	33.80	-24.70	54.97	74.00	19.03	PK	Vertical
2	5460.000	43.34	33.80	-24.68	52.46	68.20	15.74	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.575	38.40	33.80	-24.70	47.50	54.00	6.50	AV	Vertical
2	5460.000	38.64	33.80	-24.68	47.76	54.00	6.24	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G RU\5

Memo:

Sample Number: S26081718-003

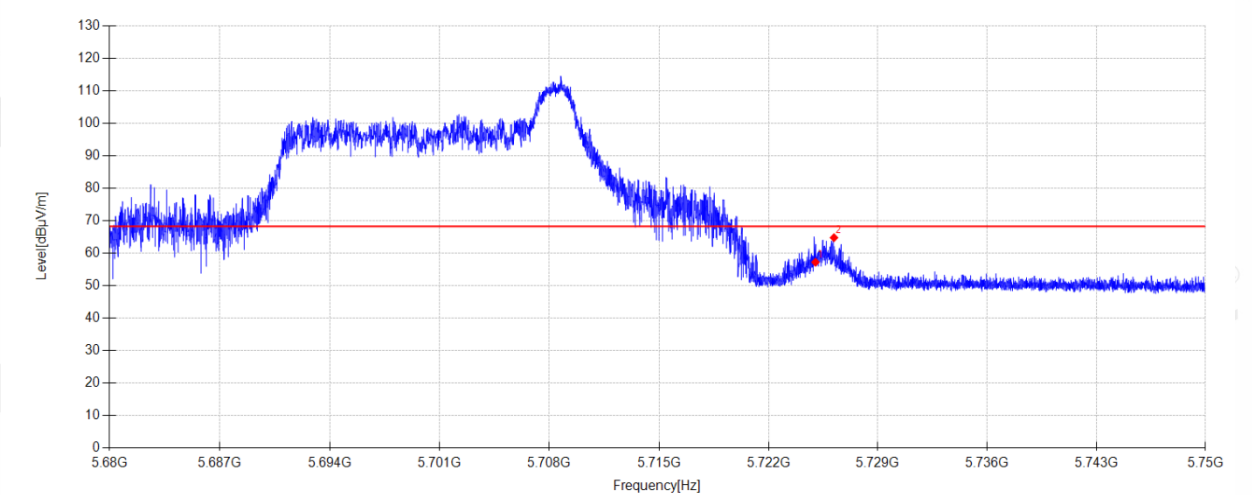

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	47.64	34.30	-24.79	57.15	68.20	11.05	PK	Horizontal
2	5726.186	55.20	34.30	-24.79	64.71	68.20	3.49	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 RU8 5700MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G RU\6

Memo:

Sample Number: S26081718-003

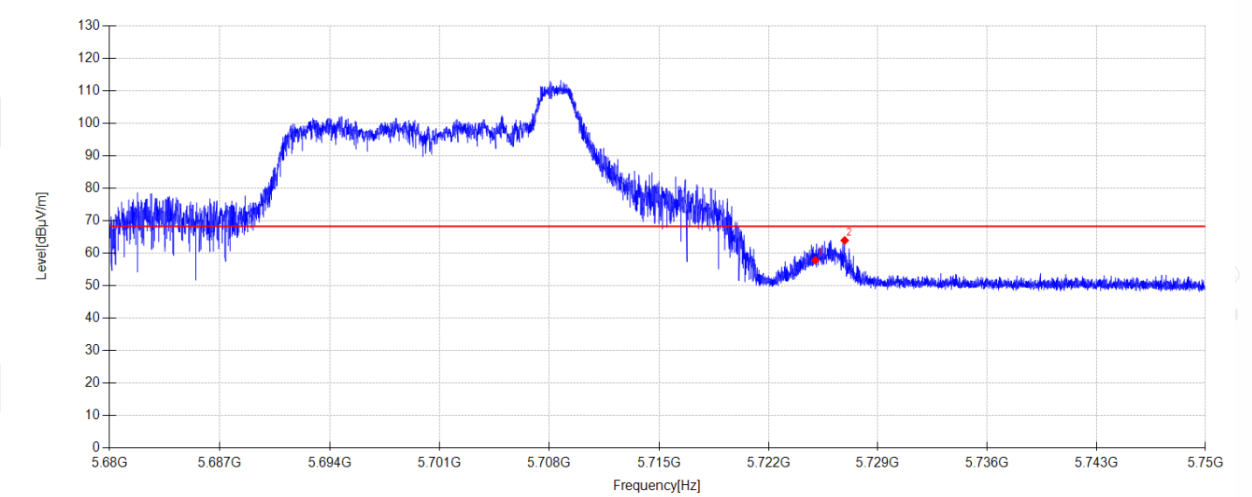

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	48.24	34.30	-24.79	57.75	68.20	10.45	PK	Vertical
2	5726.872	54.34	34.31	-24.79	63.86	68.20	4.34	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11A 5720MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\5
Memo: Sample Number: S26081718-003

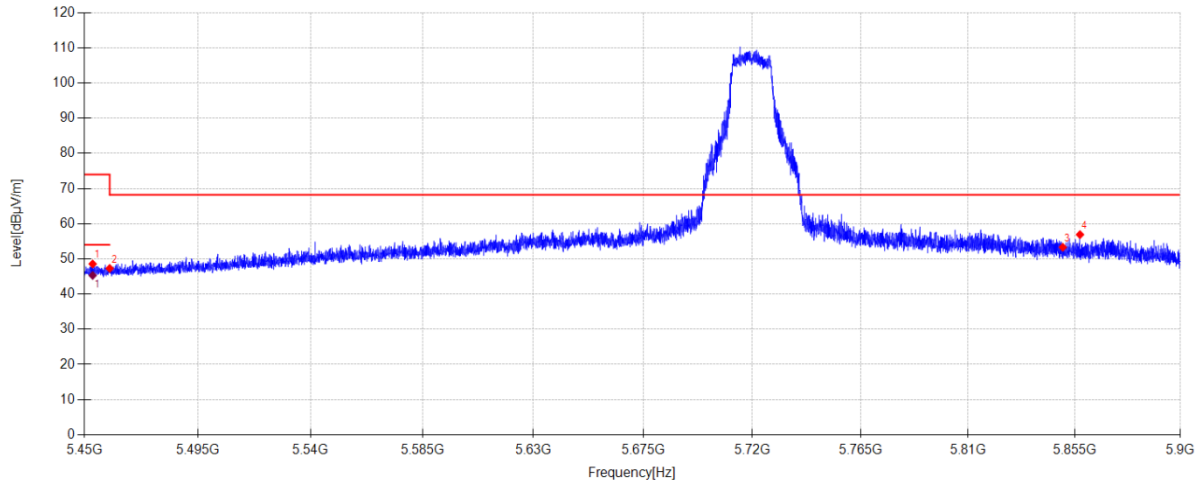**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.285	39.48	33.80	-24.71	48.57	74.00	25.43	PK	Horizontal
2	5460.000	38.18	33.80	-24.68	47.30	68.20	20.90	PK	Horizontal
3	5850.000	43.19	34.80	-24.67	53.32	68.20	14.88	PK	Horizontal
4	5857.295	46.76	34.81	-24.66	56.91	68.20	11.29	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.285	36.21	33.80	-24.71	45.30	54.00	8.70	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\6

Memo:

Sample Number: S26081718-003

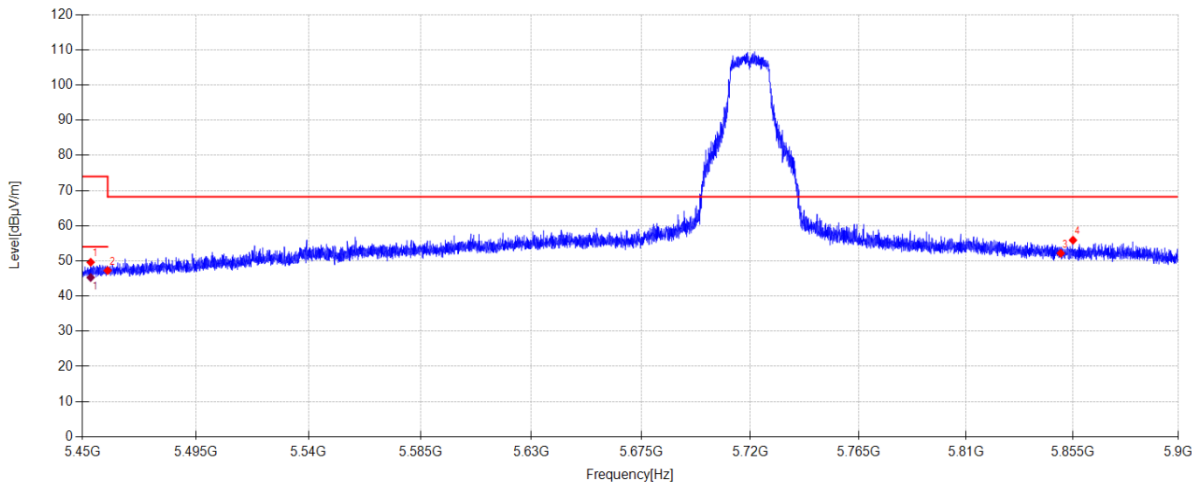

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.285	40.52	33.80	-24.71	49.61	74.00	24.39	PK	Vertical
2	5460.000	38.13	33.80	-24.68	47.25	68.20	20.95	PK	Vertical
3	5850.000	42.03	34.80	-24.67	52.16	68.20	16.04	PK	Vertical
4	5855.180	45.74	34.81	-24.66	55.89	68.20	12.31	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.285	36.18	33.80	-24.71	45.27	54.00	8.73	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\7

Memo:

Sample Number: S26081718-003

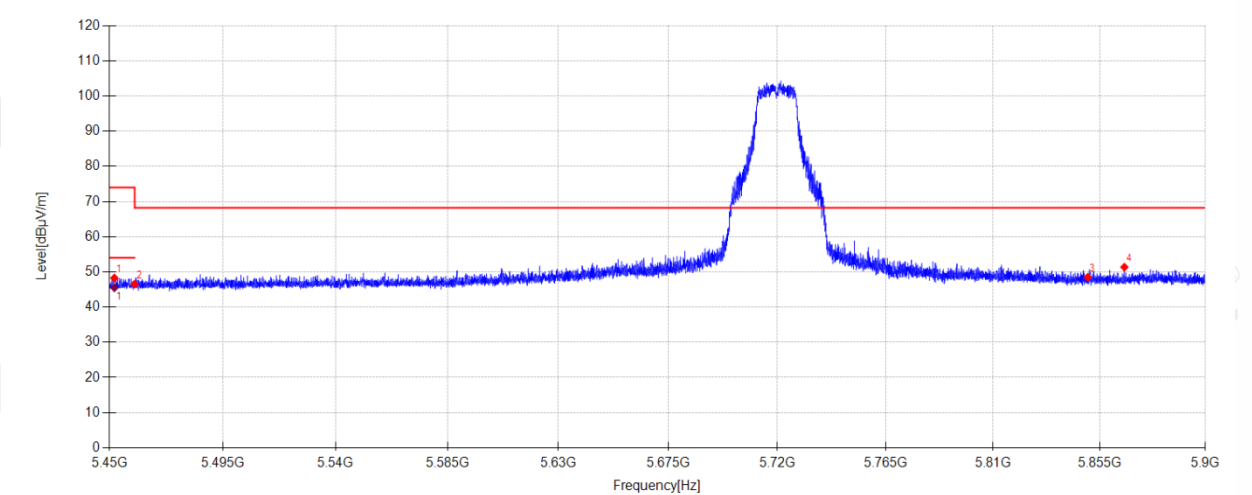

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.980	39.17	33.80	-24.72	48.25	74.00	25.75	PK	Horizontal
2	5460.000	37.39	33.80	-24.68	46.51	68.20	21.69	PK	Horizontal
3	5850.000	38.36	34.80	-24.67	48.49	68.20	19.71	PK	Horizontal
4	5865.530	41.17	34.83	-24.65	51.35	68.20	16.85	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.980	36.40	33.80	-24.72	45.48	54.00	8.52	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\8

Memo:

Sample Number: S26081718-003

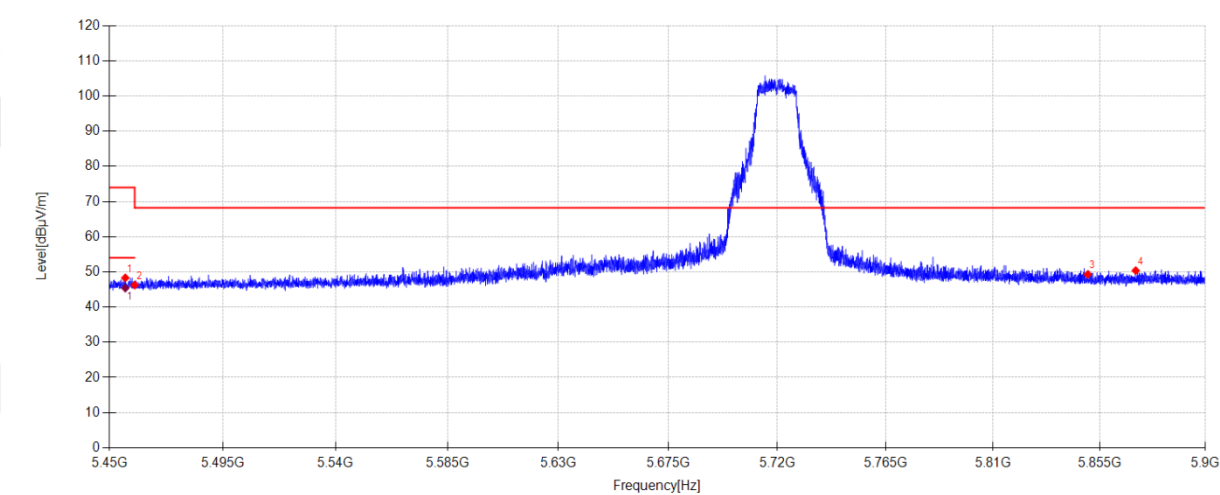

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.300	39.21	33.80	-24.70	48.31	74.00	25.69	PK	Vertical
2	5460.000	37.13	33.80	-24.68	46.25	68.20	21.95	PK	Vertical
3	5850.000	39.17	34.80	-24.67	49.30	68.20	18.90	PK	Vertical
4	5870.345	40.18	34.84	-24.65	50.37	68.20	17.83	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.300	36.31	33.80	-24.70	45.41	54.00	8.59	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\1

Memo:

Sample Number: S26081718-003

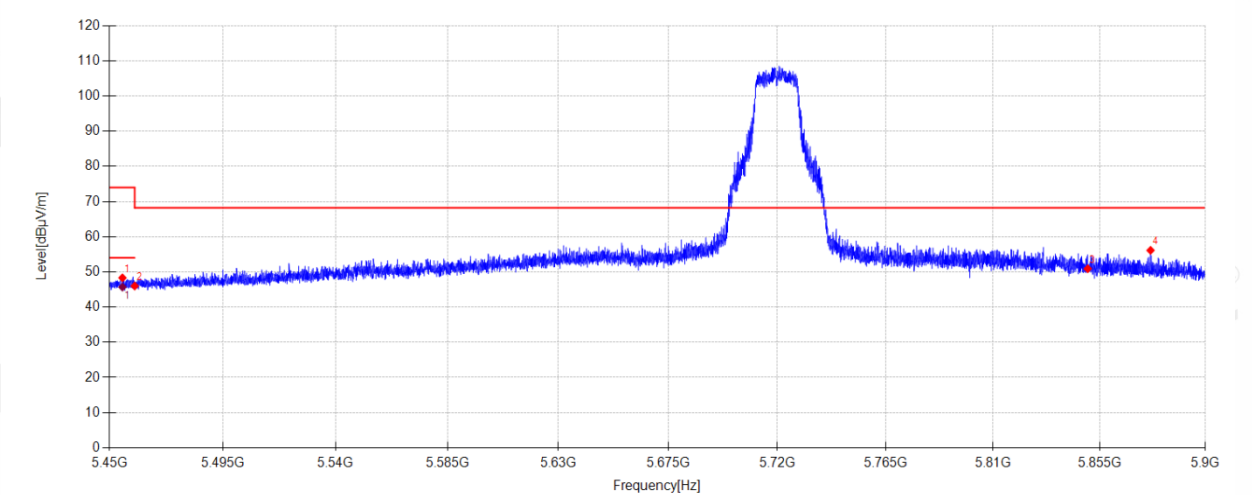

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.175	39.21	33.80	-24.70	48.31	74.00	25.69	PK	Horizontal
2	5460.000	36.88	33.80	-24.68	46.00	68.20	22.20	PK	Horizontal
3	5850.000	40.78	34.80	-24.67	50.91	68.20	17.29	PK	Horizontal
4	5876.645	45.91	34.85	-24.64	56.12	68.20	12.08	PK	Horizontal


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.175	36.59	33.80	-24.70	45.69	54.00	8.31	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N20 5720MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\2
Memo: Sample Number: S26081718-003

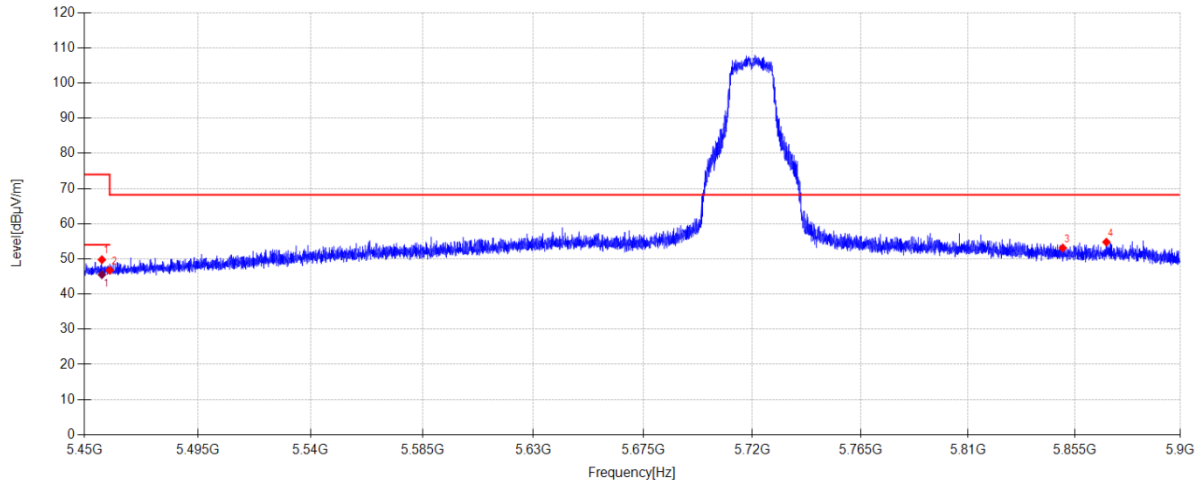**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.930	40.68	33.80	-24.70	49.78	74.00	24.22	PK	Vertical
2	5460.000	37.64	33.80	-24.68	46.76	68.20	21.44	PK	Vertical
3	5850.000	42.99	34.80	-24.67	53.12	68.20	15.08	PK	Vertical
4	5868.500	44.59	34.84	-24.65	54.78	68.20	13.42	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.930	36.42	33.80	-24.70	45.52	54.00	8.48	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5710MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\3
Memo: Sample Number: S26081718-003

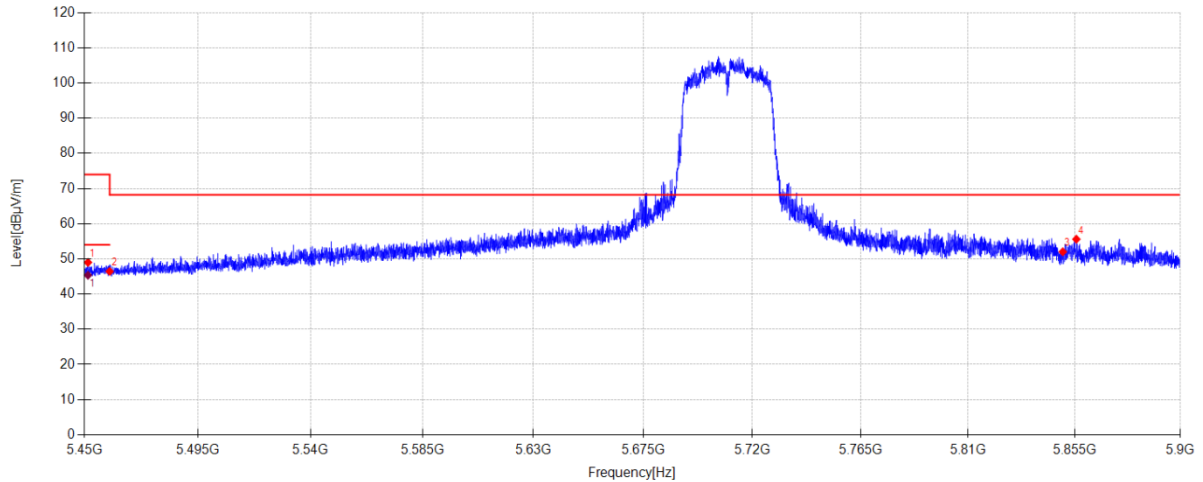**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.440	39.91	33.80	-24.72	48.99	74.00	25.01	PK	Horizontal
2	5460.000	37.32	33.80	-24.68	46.44	68.20	21.76	PK	Horizontal
3	5850.000	41.89	34.80	-24.67	52.02	68.20	16.18	PK	Horizontal
4	5855.765	45.45	34.81	-24.66	55.60	68.20	12.60	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.440	36.28	33.80	-24.72	45.36	54.00	8.64	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\4

Memo:

Sample Number: S26081718-003

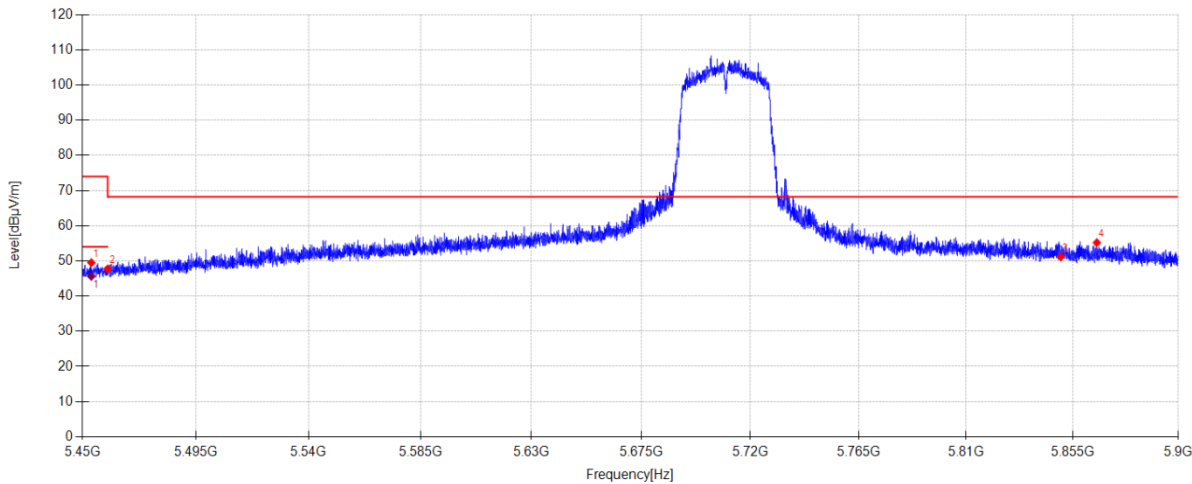

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.555	40.41	33.80	-24.71	49.50	74.00	24.50	PK	Vertical
2	5460.000	38.60	33.80	-24.68	47.72	68.20	20.48	PK	Vertical
3	5850.000	41.02	34.80	-24.67	51.15	68.20	17.05	PK	Vertical
4	5865.305	45.02	34.83	-24.65	55.20	68.20	13.00	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.555	36.51	33.80	-24.71	45.60	54.00	8.40	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\9

Memo:

Sample Number: S26081718-003

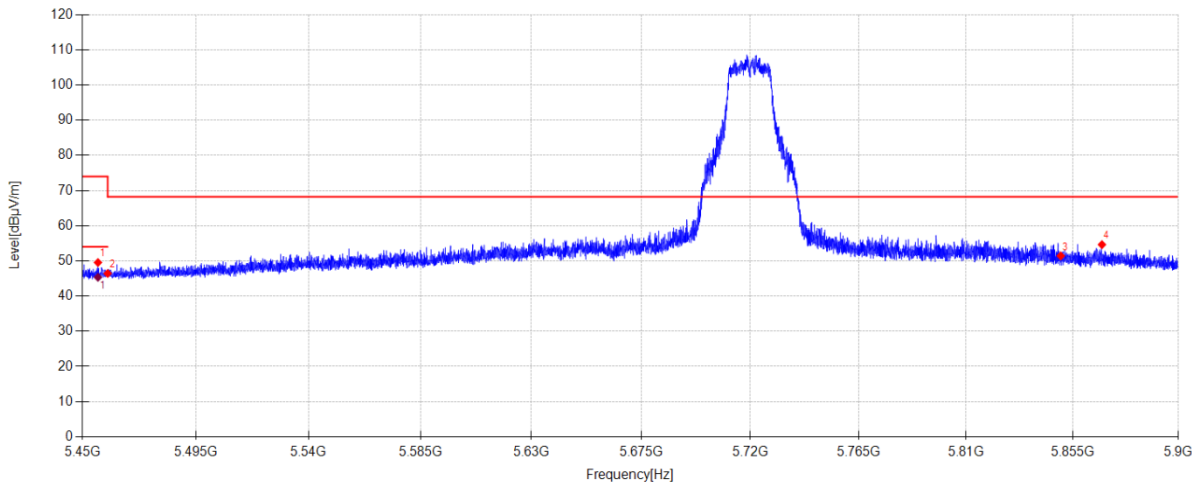

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.165	40.45	33.80	-24.70	49.55	74.00	24.45	PK	Horizontal
2	5460.000	37.31	33.80	-24.68	46.43	68.20	21.77	PK	Horizontal
3	5850.000	41.30	34.80	-24.67	51.43	68.20	16.77	PK	Horizontal
4	5867.465	44.45	34.83	-24.65	54.63	68.20	13.57	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.165	36.25	33.80	-24.70	45.35	54.00	8.65	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5720MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\10
Memo: Sample Number: S26081718-003

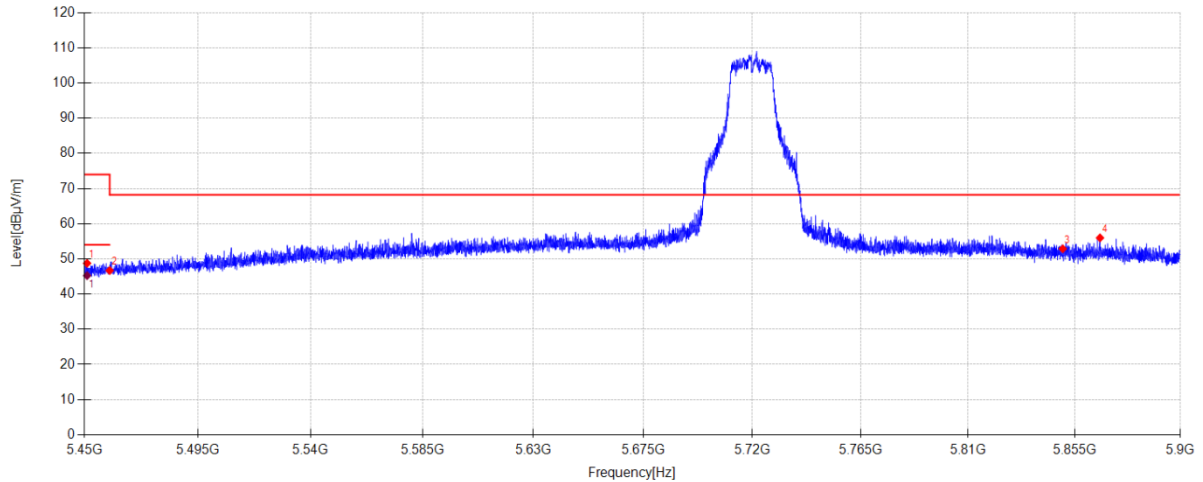**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.080	39.67	33.80	-24.72	48.75	74.00	25.25	PK	Vertical
2	5460.000	37.58	33.80	-24.68	46.70	68.20	21.50	PK	Vertical
3	5850.000	42.75	34.80	-24.67	52.88	68.20	15.32	PK	Vertical
4	5865.800	45.80	34.83	-24.65	55.98	68.20	12.22	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.080	36.17	33.80	-24.72	45.25	54.00	8.75	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5710MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\11
Memo: Sample Number: S26081718-003

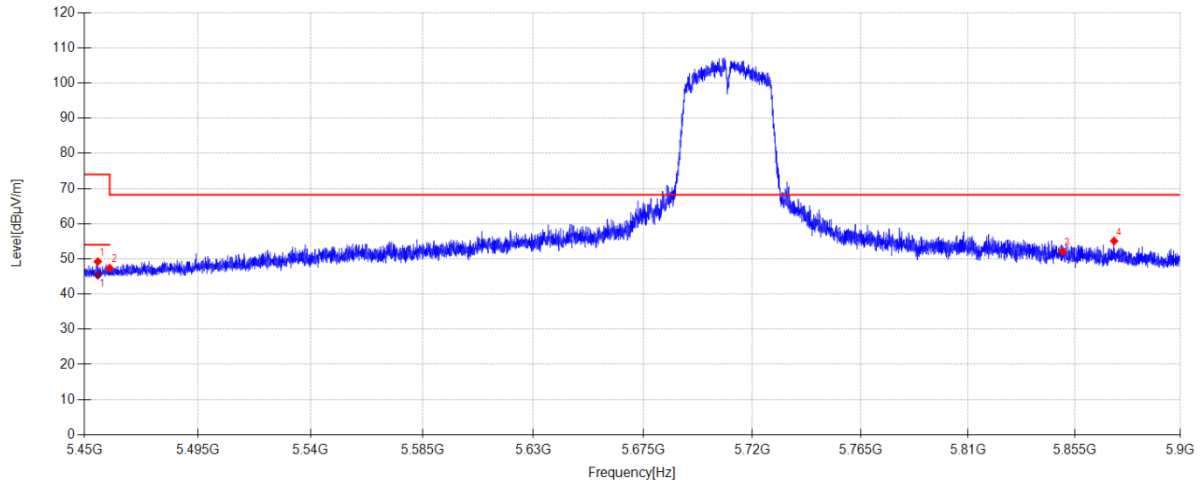**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.310	40.14	33.80	-24.70	49.24	74.00	24.76	PK	Horizontal
2	5460.000	38.26	33.80	-24.68	47.38	68.20	20.82	PK	Horizontal
3	5850.000	41.96	34.80	-24.67	52.09	68.20	16.11	PK	Horizontal
4	5871.785	44.89	34.84	-24.64	55.09	68.20	13.11	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.310	36.28	33.80	-24.70	45.38	54.00	8.62	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5710MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\12
Memo: Sample Number: S26081718-003

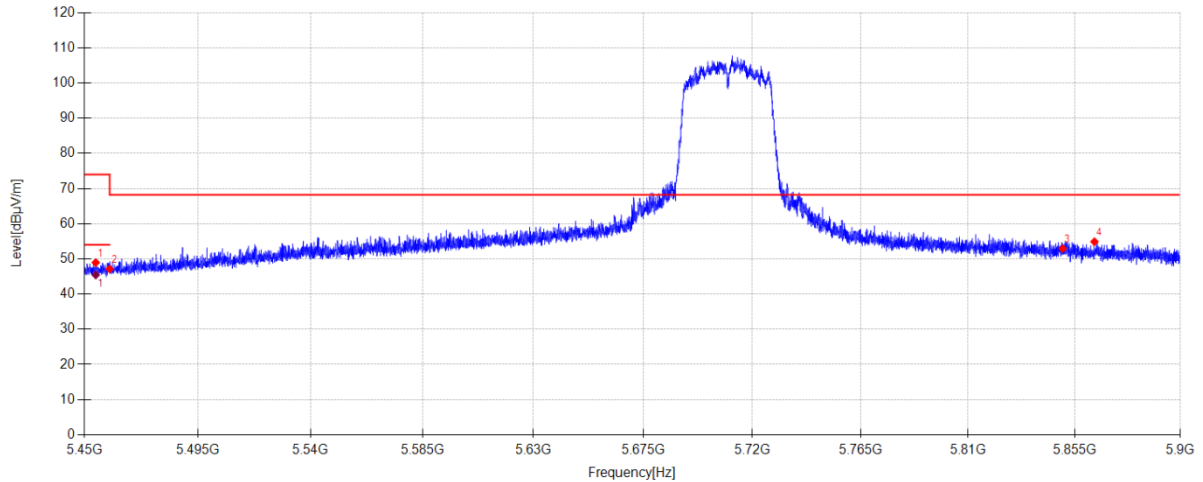**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.500	39.87	33.80	-24.71	48.96	74.00	25.04	PK	Vertical
2	5460.000	38.02	33.80	-24.68	47.14	68.20	21.06	PK	Vertical
3	5850.000	42.80	34.80	-24.67	52.93	68.20	15.27	PK	Vertical
4	5863.415	44.72	34.83	-24.65	54.90	68.20	13.30	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.500	36.34	33.80	-24.71	45.43	54.00	8.57	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-20

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5690MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\13

Memo:

Sample Number: S26081718-003

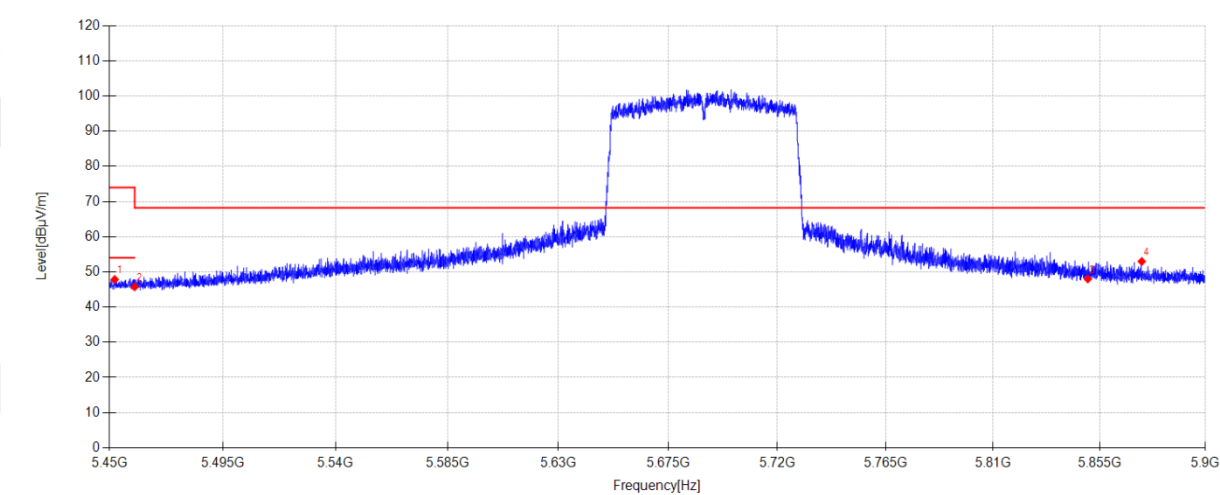


Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.115	38.76	33.80	-24.72	47.84	74.00	26.16	PK	Horizontal
2	5460.000	36.64	33.80	-24.68	45.76	68.20	22.44	PK	Horizontal
3	5850.000	37.85	34.80	-24.67	47.98	68.20	20.22	PK	Horizontal
4	5872.910	42.76	34.85	-24.64	52.97	68.20	15.23	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-20 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5690MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\14
Memo: Sample Number: S26081718-003

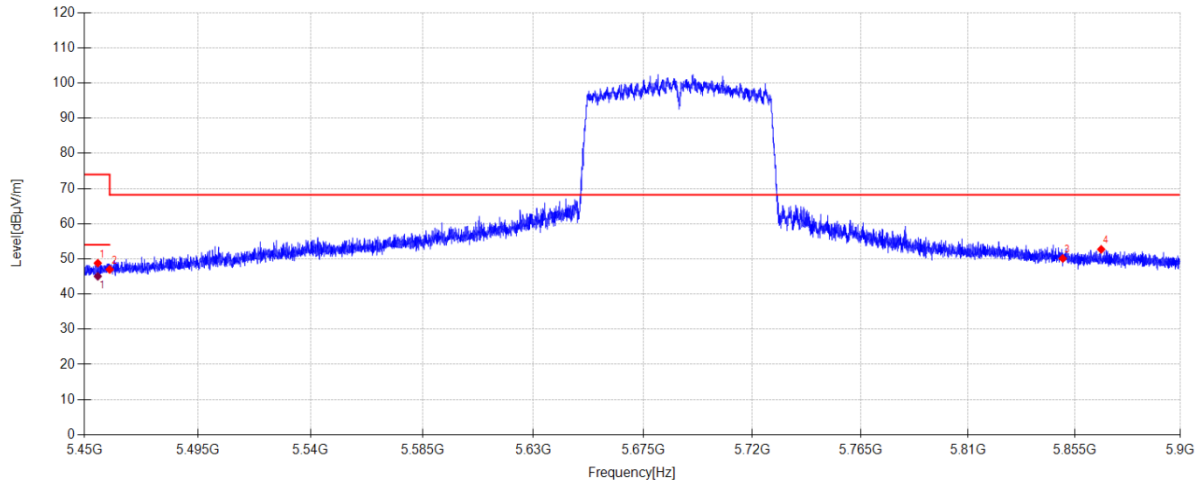**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.310	39.69	33.80	-24.70	48.79	74.00	25.21	PK	Vertical
2	5460.000	37.87	33.80	-24.68	46.99	68.20	21.21	PK	Vertical
3	5850.000	40.00	34.80	-24.67	50.13	68.20	18.07	PK	Vertical
4	5866.295	42.53	34.83	-24.65	52.71	68.20	15.49	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.310	35.96	33.80	-24.70	45.06	54.00	8.94	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5720MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\15

Memo:

Sample Number: S26081718-003

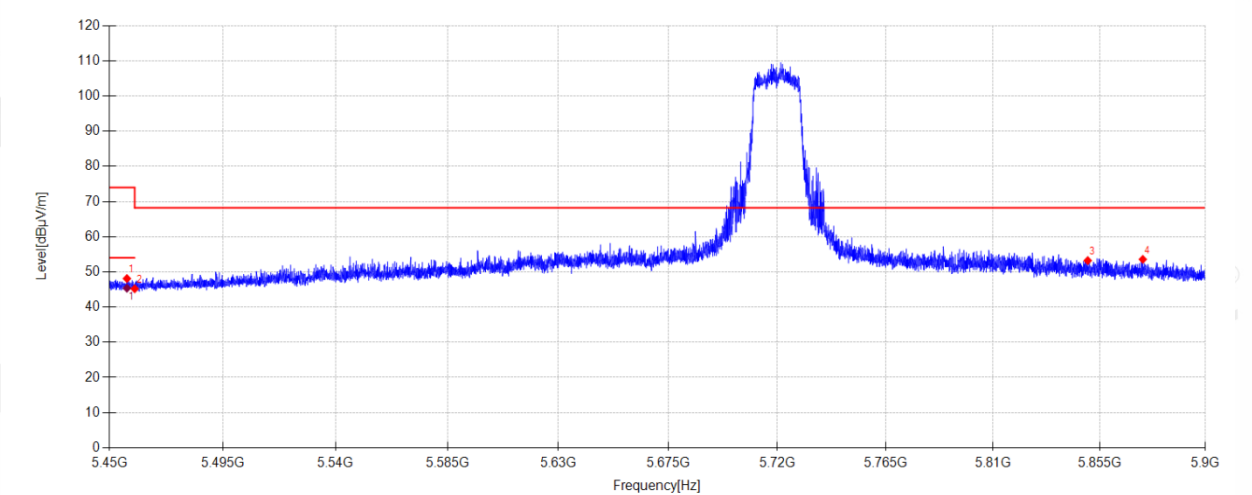

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.930	39.00	33.80	-24.70	48.10	74.00	25.90	PK	Horizontal
2	5460.000	36.09	33.80	-24.68	45.21	68.20	22.99	PK	Horizontal
3	5850.000	43.09	34.80	-24.67	53.22	68.20	14.98	PK	Horizontal
4	5873.360	43.36	34.85	-24.64	53.57	68.20	14.63	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.930	36.28	33.80	-24.70	45.38	54.00	8.62	AV	Horizontal


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5720MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\16
Memo: Sample Number: S26081718-003

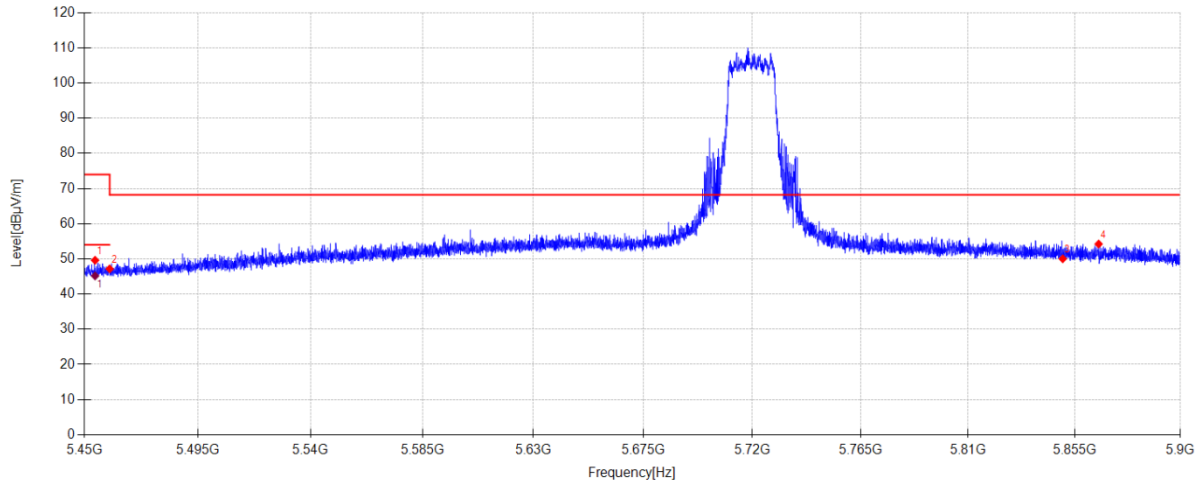**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.230	40.52	33.80	-24.71	49.61	74.00	24.39	PK	Vertical
2	5460.000	38.05	33.80	-24.68	47.17	68.20	21.03	PK	Vertical
3	5850.000	39.90	34.80	-24.67	50.03	68.20	18.17	PK	Vertical
4	5865.215	44.05	34.83	-24.65	54.23	68.20	13.97	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.230	36.08	33.80	-24.71	45.17	54.00	8.83	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5710MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\17

Memo:

Sample Number: S26081718-003

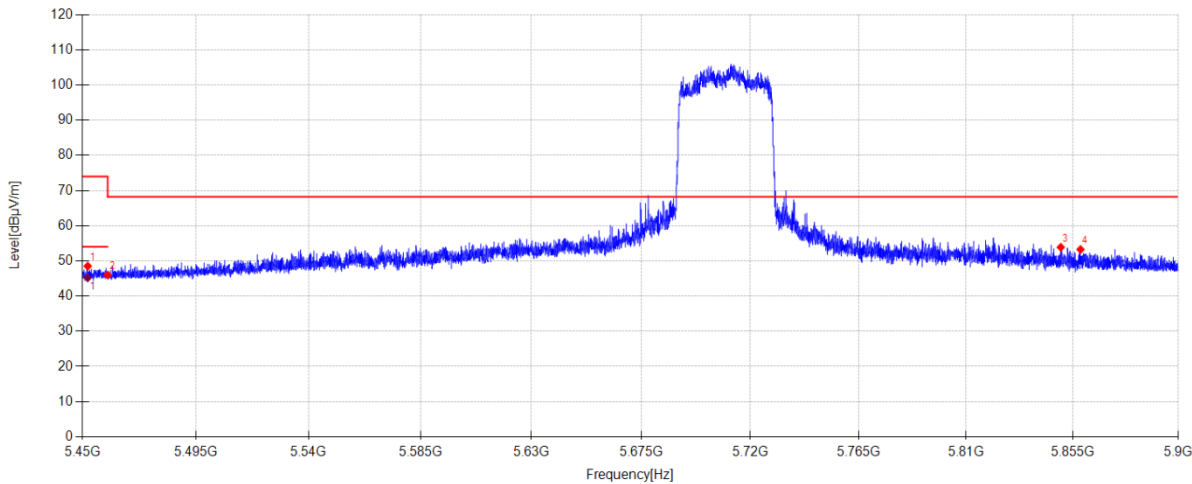

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.115	39.43	33.80	-24.72	48.51	74.00	25.49	PK	Horizontal
2	5460.000	36.86	33.80	-24.68	45.98	68.20	22.22	PK	Horizontal
3	5850.000	43.75	34.80	-24.67	53.88	68.20	14.32	PK	Horizontal
4	5858.375	43.10	34.82	-24.66	53.26	68.20	14.94	PK	Horizontal


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.115	36.11	33.80	-24.72	45.19	54.00	8.81	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5710MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\18
Memo: Sample Number: S26081718-003

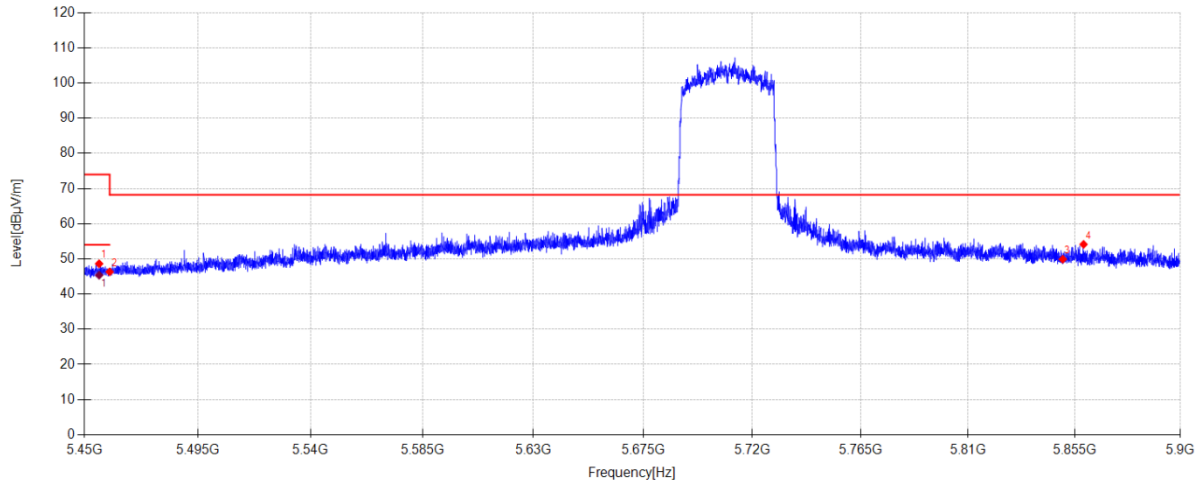**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.850	39.53	33.80	-24.70	48.63	74.00	25.37	PK	Vertical
2	5460.000	37.20	33.80	-24.68	46.32	68.20	21.88	PK	Vertical
3	5850.000	39.77	34.80	-24.67	49.90	68.20	18.30	PK	Vertical
4	5858.825	43.97	34.82	-24.66	54.13	68.20	14.07	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.850	36.27	33.80	-24.70	45.37	54.00	8.63	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-21

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5690MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.7°C;Humi:45.0%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\19

Memo:

Sample Number: S26081718-003

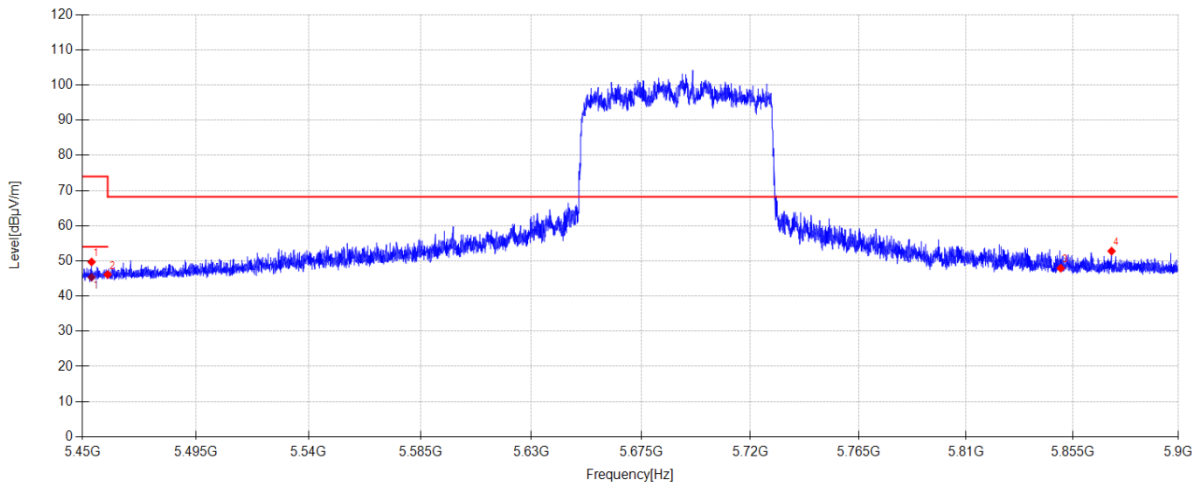

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.645	40.61	33.80	-24.71	49.70	74.00	24.30	PK	Horizontal
2	5460.000	37.01	33.80	-24.68	46.13	68.20	22.07	PK	Horizontal
3	5850.000	37.79	34.80	-24.67	47.92	68.20	20.28	PK	Horizontal
4	5871.560	42.58	34.84	-24.64	52.78	68.20	15.42	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.645	36.27	33.80	-24.71	45.36	54.00	8.64	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-21 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5690MHz Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:24.7°C;Humi:45.0% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081718-2E\FCC ABOVE 1G 5G KUAYUE\20
Memo: Sample Number: S26081718-003

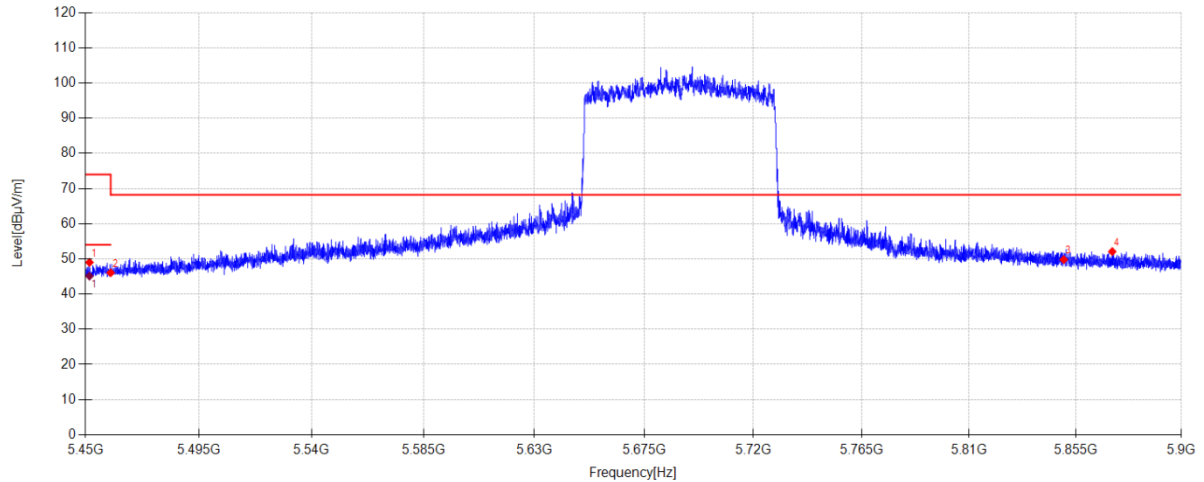**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.620	39.92	33.80	-24.72	49.00	74.00	25.00	PK	Vertical
2	5460.000	36.93	33.80	-24.68	46.05	68.20	22.15	PK	Vertical
3	5850.000	39.66	34.80	-24.67	49.79	68.20	18.41	PK	Vertical
4	5870.570	41.89	34.84	-24.65	52.08	68.20	16.12	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.620	36.03	33.80	-24.72	45.11	54.00	8.89	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT1 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\21

Memo:

Sample Number: S26070111-002

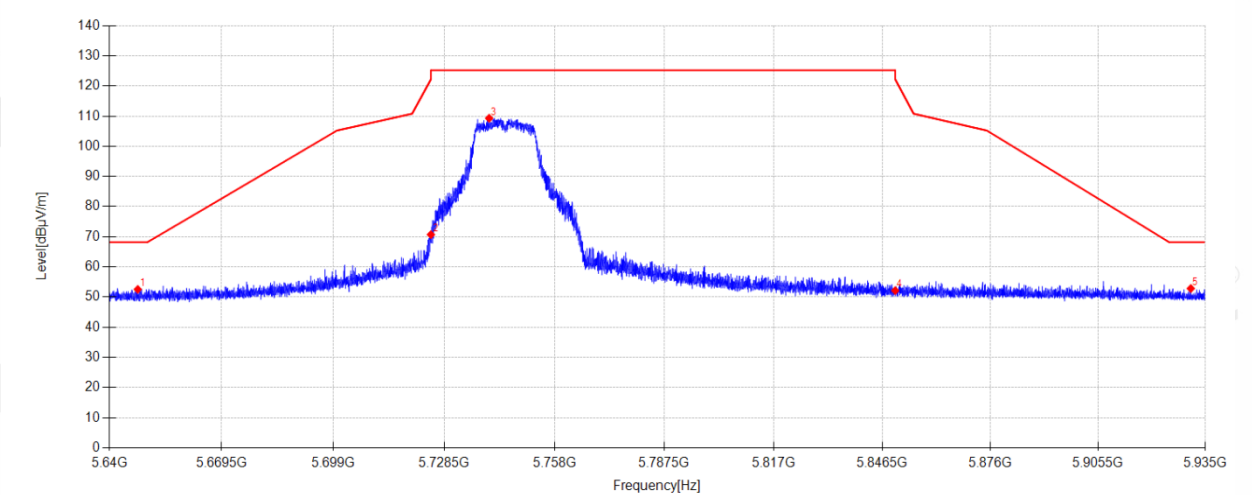

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5647.464	43.55	34.09	-25.10	52.54	68.20	15.66	PK	Horizontal
2	5725.000	61.60	34.30	-25.20	70.70	122.20	51.50	PK	Horizontal
3	5740.536	100.09	34.36	-25.16	109.29	125.20	15.91	PK	Horizontal
4	5850.000	42.29	34.80	-24.95	52.14	122.20	70.06	PK	Horizontal
5	5930.988	42.59	34.96	-24.72	52.83	68.20	15.37	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT1 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\22

Memo:

Sample Number: S26070111-002

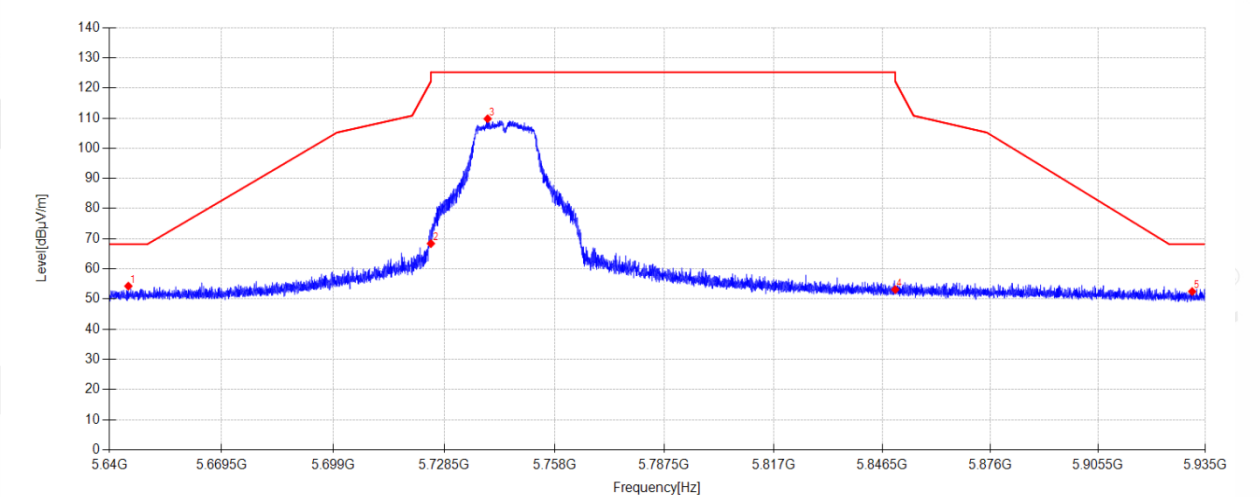

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5644.986	45.29	34.08	-25.09	54.28	68.20	13.92	PK	Vertical
2	5725.000	59.29	34.30	-25.20	68.39	122.20	53.81	PK	Vertical
3	5740.123	100.57	34.36	-25.16	109.77	125.20	15.43	PK	Vertical
4	5850.000	43.28	34.80	-24.95	53.13	122.20	69.07	PK	Vertical
5	5931.372	42.23	34.96	-24.71	52.48	68.20	15.72	PK	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT1 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\23

Memo:

Sample Number: S26070111-002

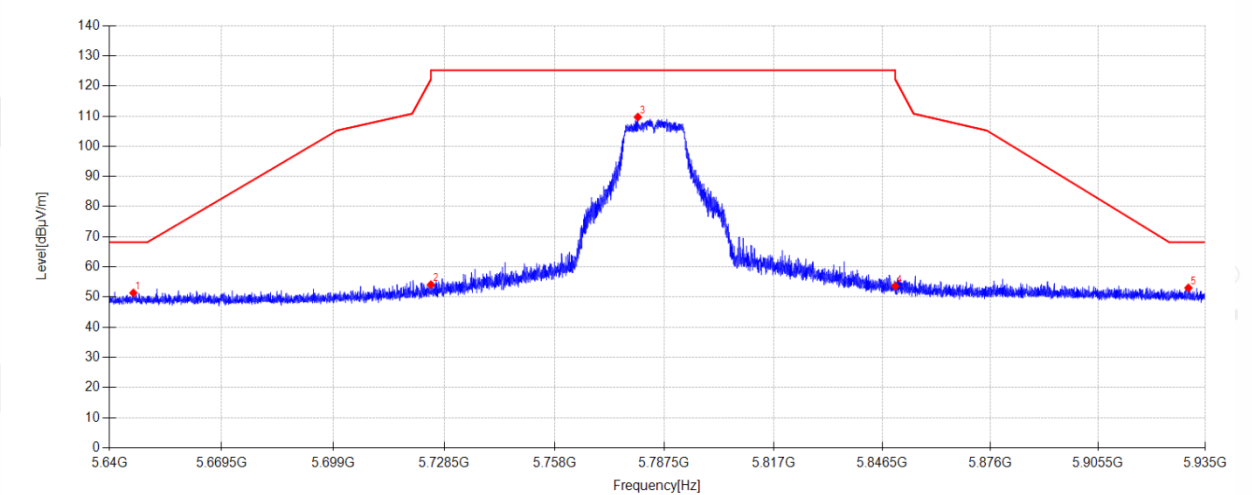

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5646.313	42.36	34.09	-25.09	51.36	68.20	16.84	PK	Horizontal
2	5725.000	44.99	34.30	-25.20	54.09	122.20	68.11	PK	Horizontal
3	5780.391	100.23	34.52	-25.07	109.68	125.20	15.52	PK	Horizontal
4	5850.000	43.75	34.80	-24.95	53.60	122.20	68.60	PK	Horizontal
5	5930.339	42.79	34.96	-24.72	53.03	68.20	15.17	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT1 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\24

Memo:

Sample Number: S26070111-002

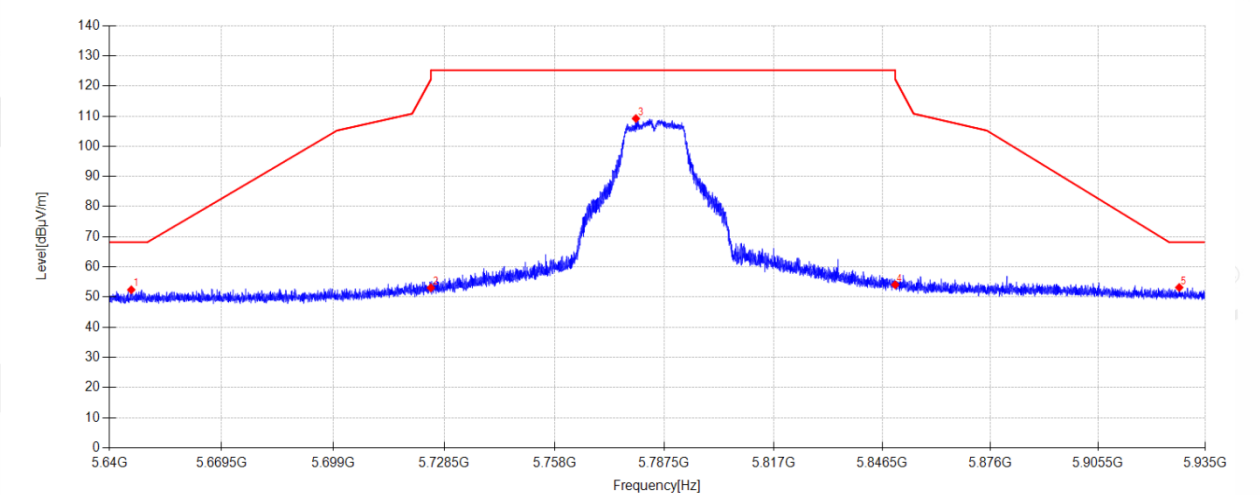

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.753	43.41	34.08	-25.09	52.40	68.20	15.80	PK	Vertical
2	5725.000	43.96	34.30	-25.20	53.06	122.20	69.14	PK	Vertical
3	5779.860	99.75	34.52	-25.07	109.20	125.20	16.00	PK	Vertical
4	5850.000	44.22	34.80	-24.95	54.07	122.20	68.13	PK	Vertical
5	5927.802	42.93	34.96	-24.73	53.16	68.20	15.04	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT1 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\25

Memo:

Sample Number: S26070111-002

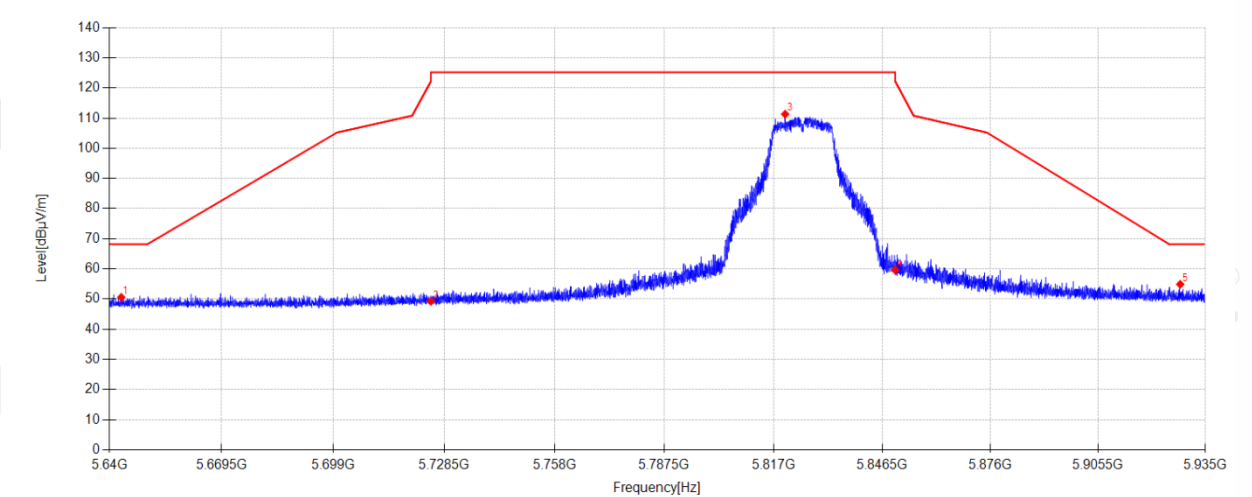

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5643.127	41.59	34.07	-25.08	50.58	68.20	17.62	PK	Horizontal
2	5725.000	40.11	34.30	-25.20	49.21	122.20	72.99	PK	Horizontal
3	5820.127	101.62	34.68	-24.99	111.31	125.20	13.89	PK	Horizontal
4	5850.000	49.77	34.80	-24.95	59.62	122.20	62.58	PK	Horizontal
5	5928.068	44.66	34.96	-24.73	54.89	68.20	13.31	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.