

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT1 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\26

Memo:

Sample Number: S26070111-002

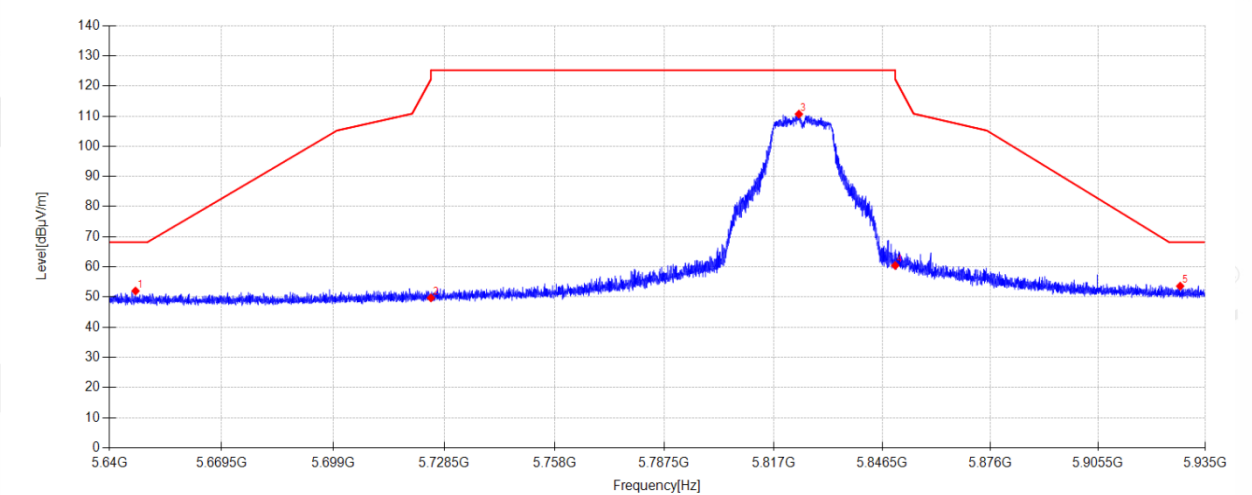

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5646.874	43.02	34.09	-25.10	52.01	68.20	16.19	PK	Vertical
2	5725.000	40.61	34.30	-25.20	49.71	122.20	72.49	PK	Vertical
3	5823.844	100.95	34.70	-24.99	110.66	125.20	14.54	PK	Vertical
4	5850.000	50.60	34.80	-24.95	60.45	122.20	61.75	PK	Vertical
5	5928.068	43.39	34.96	-24.73	53.62	68.20	14.58	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT2 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\31

Memo:

Sample Number: S26070111-002

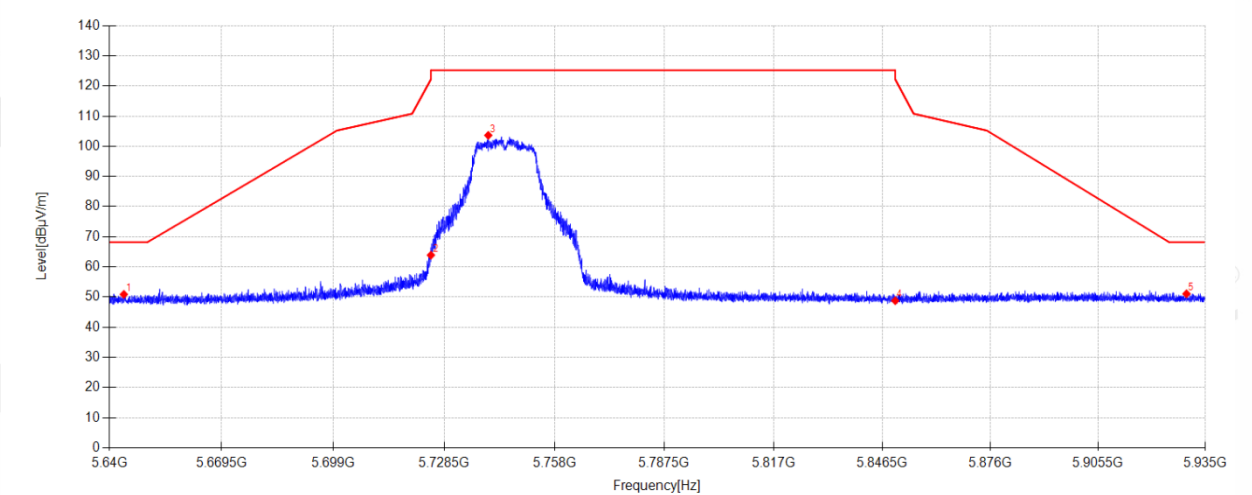

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5643.806	41.88	34.08	-25.09	50.87	68.20	17.33	PK	Horizontal
2	5725.000	54.78	34.30	-25.20	63.88	122.20	58.32	PK	Horizontal
3	5740.300	94.43	34.36	-25.16	103.63	125.20	21.57	PK	Horizontal
4	5850.000	38.92	34.80	-24.95	48.77	122.20	73.43	PK	Horizontal
5	5929.808	40.82	34.96	-24.72	51.06	68.20	17.14	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT2 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\32

Memo:

Sample Number: S26070111-002

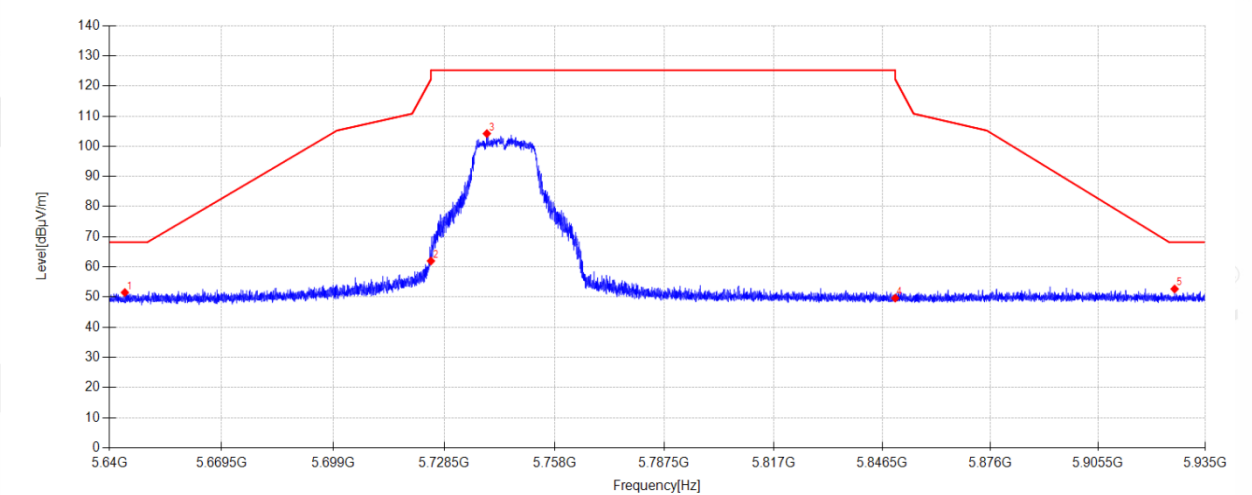

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5644.071	42.52	34.08	-25.09	51.51	68.20	16.69	PK	Vertical
2	5725.000	52.86	34.30	-25.20	61.96	122.20	60.24	PK	Vertical
3	5739.917	95.00	34.36	-25.16	104.20	125.20	21.00	PK	Vertical
4	5850.000	39.78	34.80	-24.95	49.63	122.20	72.57	PK	Vertical
5	5926.534	42.46	34.95	-24.74	52.67	68.20	15.53	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT2 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\29

Memo:

Sample Number: S26070111-002

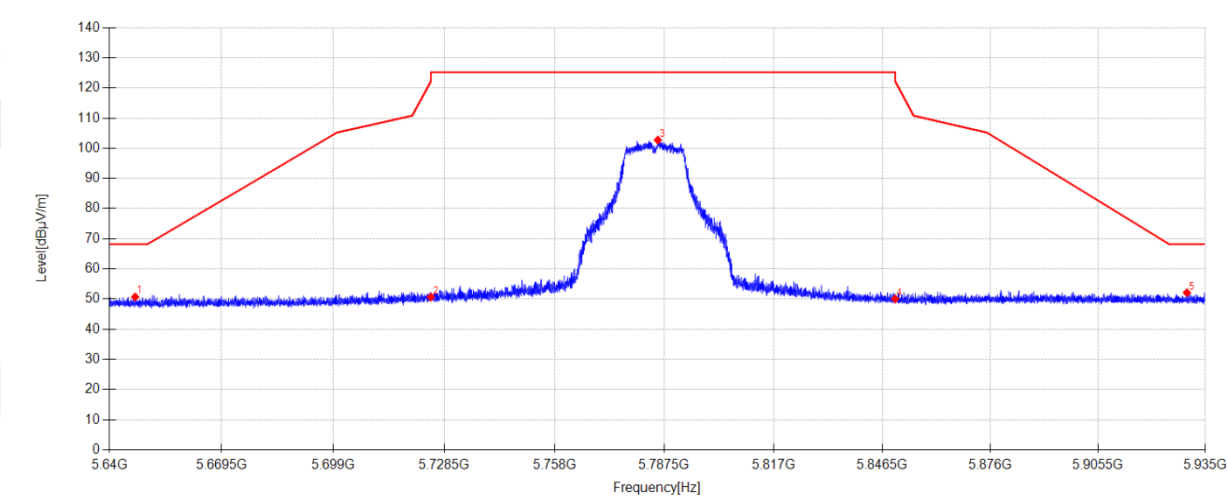

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5646.785	41.71	34.09	-25.10	50.70	68.20	17.50	PK	Horizontal
2	5725.000	41.56	34.30	-25.20	50.66	122.20	71.54	PK	Horizontal
3	5785.760	93.22	34.54	-25.05	102.71	125.20	22.49	PK	Horizontal
4	5850.000	40.18	34.80	-24.95	50.03	122.20	72.17	PK	Horizontal
5	5929.926	41.85	34.96	-24.72	52.09	68.20	16.11	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT2 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\30

Memo:

Sample Number: S26070111-002

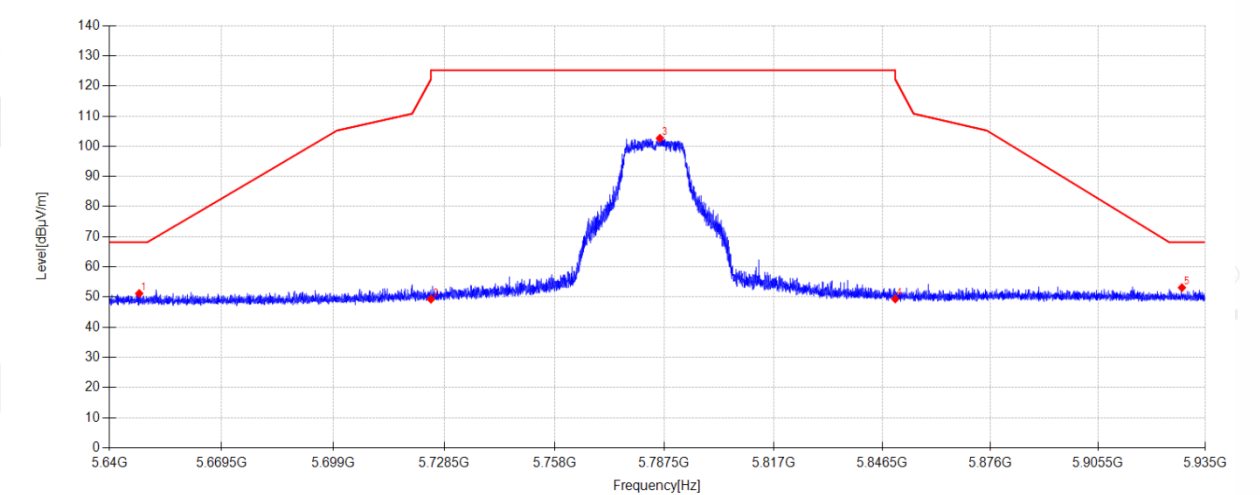

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5647.847	42.19	34.09	-25.10	51.18	68.20	17.02	PK	Vertical
2	5725.000	40.17	34.30	-25.20	49.27	122.20	72.93	PK	Vertical
3	5786.320	93.16	34.55	-25.05	102.66	125.20	22.54	PK	Vertical
4	5850.000	39.49	34.80	-24.95	49.34	122.20	72.86	PK	Vertical
5	5928.540	42.89	34.96	-24.73	53.12	68.20	15.08	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT2 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\27

Memo:

Sample Number: S26070111-002

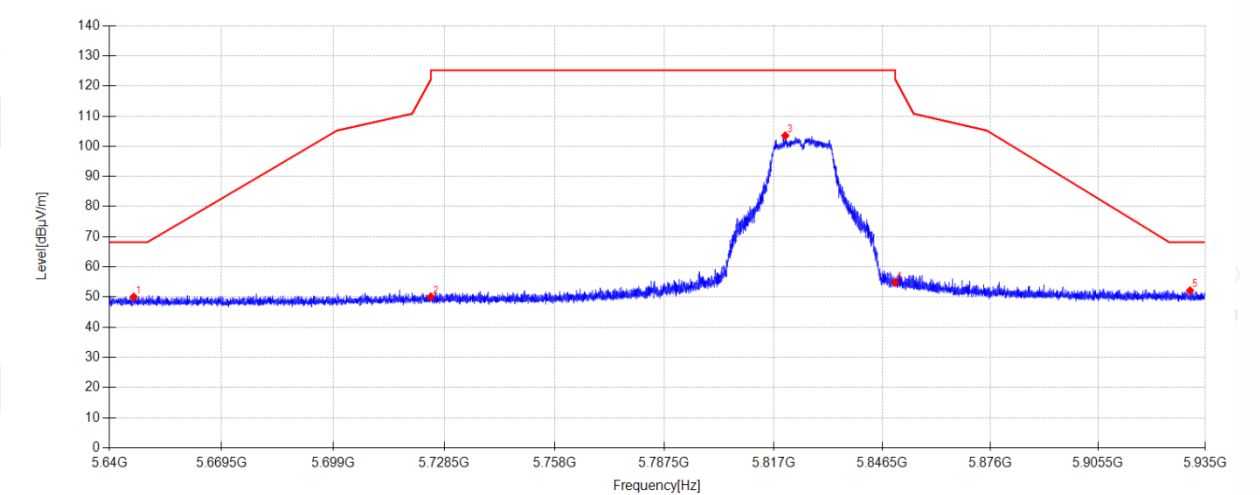

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5646.402	41.05	34.09	-25.09	50.05	68.20	18.15	PK	Horizontal
2	5725.000	40.99	34.30	-25.20	50.09	122.20	72.11	PK	Horizontal
3	5820.157	93.84	34.68	-24.99	103.53	125.20	21.67	PK	Horizontal
4	5850.000	44.93	34.80	-24.95	54.78	122.20	67.42	PK	Horizontal
5	5930.782	41.89	34.96	-24.72	52.13	68.20	16.07	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX 11A ANT2 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\28

Memo:

Sample Number: S26070111-002

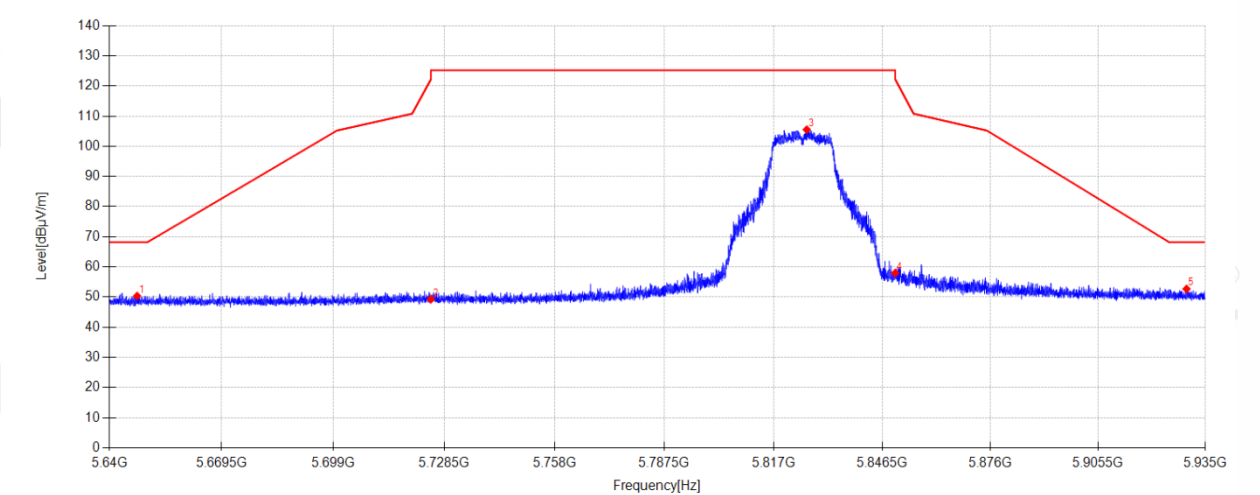

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5647.287	41.34	34.09	-25.10	50.33	68.20	17.87	PK	Vertical
2	5725.000	40.16	34.30	-25.20	49.26	122.20	72.94	PK	Vertical
3	5825.968	95.79	34.70	-24.98	105.51	125.20	19.69	PK	Vertical
4	5850.000	48.13	34.80	-24.95	57.98	122.20	64.22	PK	Vertical
5	5929.808	42.44	34.96	-24.72	52.68	68.20	15.52	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX N20 MIMO 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\11

Memo:

Sample Number: S26070111-002

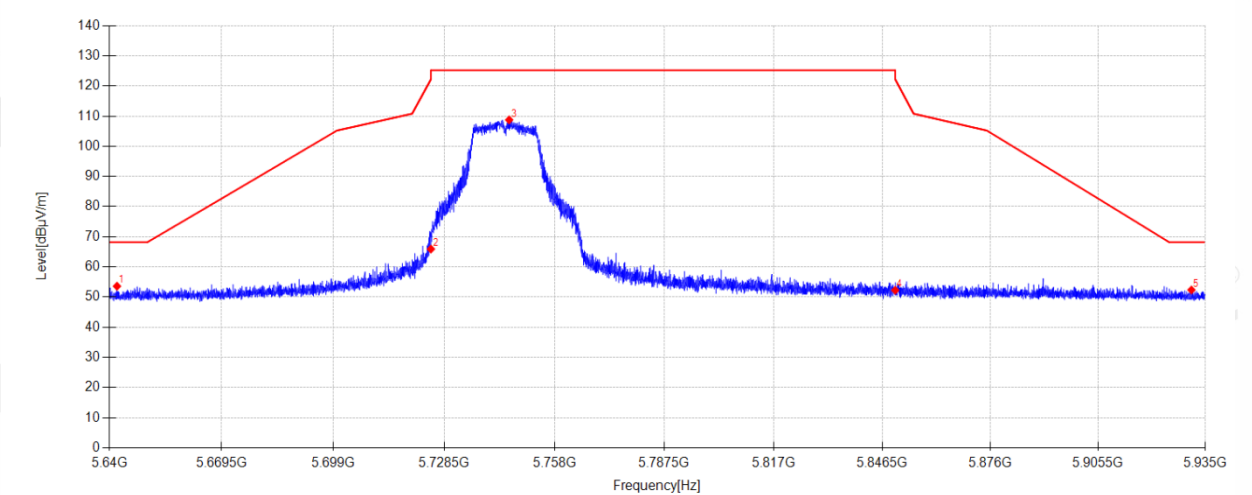

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5642.006	44.60	34.07	-25.08	53.59	68.20	14.61	PK	Horizontal
2	5725.000	56.81	34.30	-25.20	65.91	122.20	56.29	PK	Horizontal
3	5745.876	99.52	34.38	-25.15	108.75	125.20	16.45	PK	Horizontal
4	5850.000	42.39	34.80	-24.95	52.24	122.20	69.96	PK	Horizontal
5	5931.165	42.11	34.96	-24.71	52.36	68.20	15.84	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX N20 MIMO 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\12

Memo:

Sample Number: S26070111-002

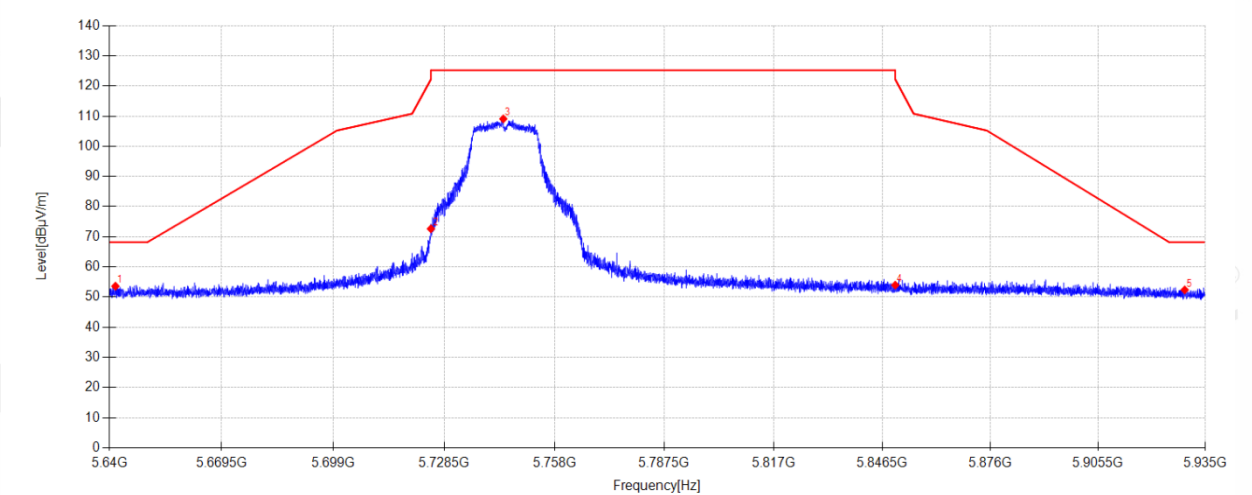

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5641.593	44.60	34.07	-25.08	53.59	68.20	14.61	PK	Vertical
2	5725.000	63.53	34.30	-25.20	72.63	122.20	49.57	PK	Vertical
3	5744.312	99.84	34.38	-25.15	109.07	125.20	16.13	PK	Vertical
4	5850.000	44.10	34.80	-24.95	53.95	122.20	68.25	PK	Vertical
5	5929.307	42.13	34.96	-24.72	52.37	68.20	15.83	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX N20 MIMO 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\13

Memo:

Sample Number: S26070111-002

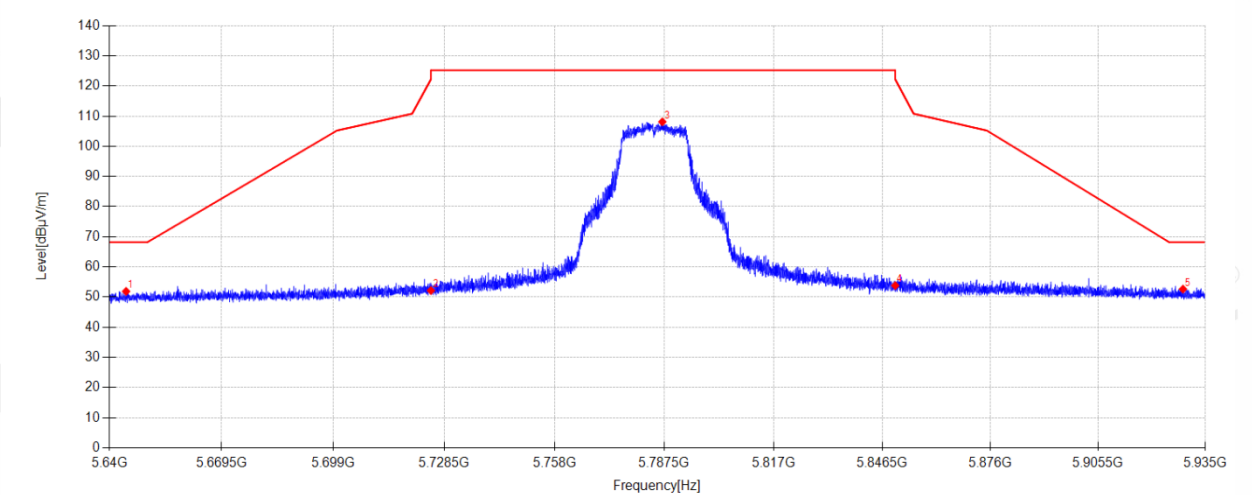

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5644.396	42.89	34.08	-25.09	51.88	68.20	16.32	PK	Horizontal
2	5725.000	43.05	34.30	-25.20	52.15	122.20	70.05	PK	Horizontal
3	5786.969	98.60	34.55	-25.05	108.10	125.20	17.10	PK	Horizontal
4	5850.000	43.96	34.80	-24.95	53.81	122.20	68.39	PK	Horizontal
5	5928.835	42.40	34.96	-24.73	52.63	68.20	15.57	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX N20 MIMO 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\14

Memo:

Sample Number: S26070111-002

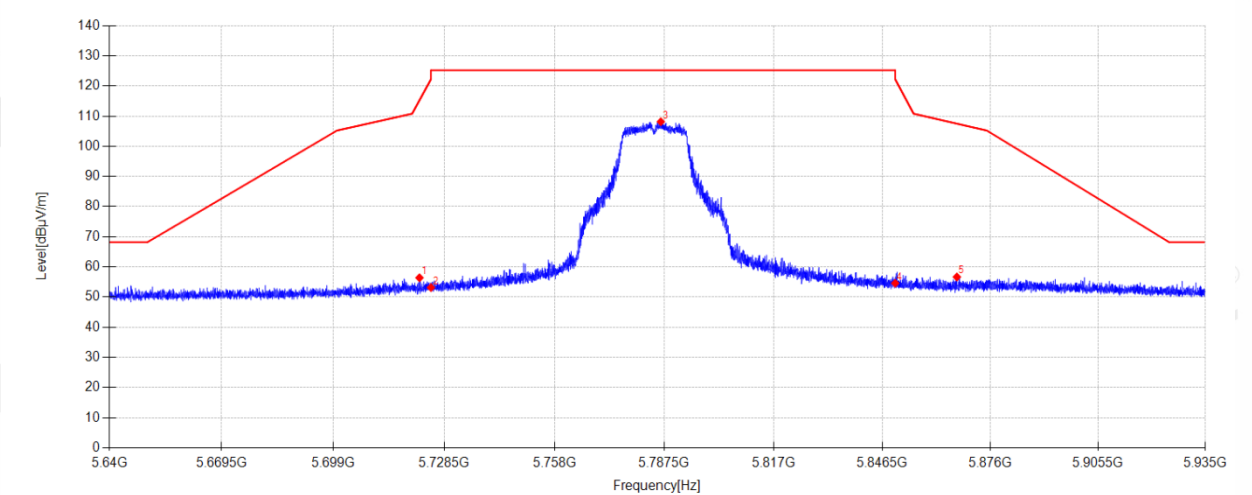

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5721.951	47.30	34.29	-25.21	56.38	115.25	58.87	PK	Vertical
2	5725.000	44.05	34.30	-25.20	53.15	122.20	69.05	PK	Vertical
3	5786.556	98.63	34.55	-25.05	108.13	125.20	17.07	PK	Vertical
4	5850.000	44.74	34.80	-24.95	54.59	122.20	67.61	PK	Vertical
5	5866.796	46.76	34.83	-24.93	56.66	107.50	50.84	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX N20 MIMO 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\15

Memo:

Sample Number: S26070111-002

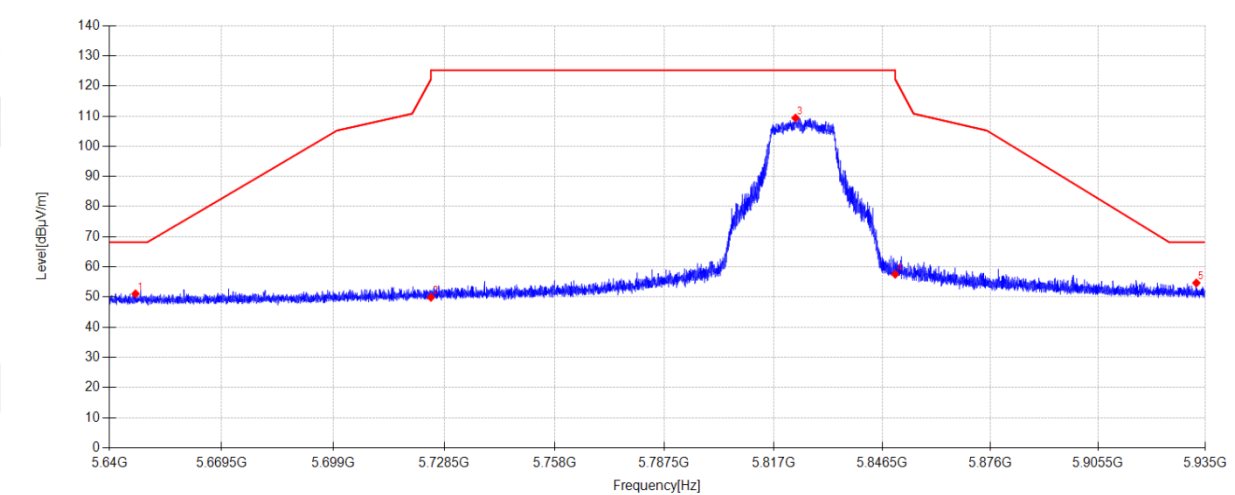

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5646.874	42.09	34.09	-25.10	51.08	68.20	17.12	PK	Horizontal
2	5725.000	40.79	34.30	-25.20	49.89	122.20	72.31	PK	Horizontal
3	5822.930	99.67	34.69	-24.99	109.37	125.20	15.83	PK	Horizontal
4	5850.000	47.67	34.80	-24.95	57.52	122.20	64.68	PK	Horizontal
5	5932.522	44.41	34.97	-24.71	54.67	68.20	13.53	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX N20 MIMO 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\16

Memo:

Sample Number: S26070111-002

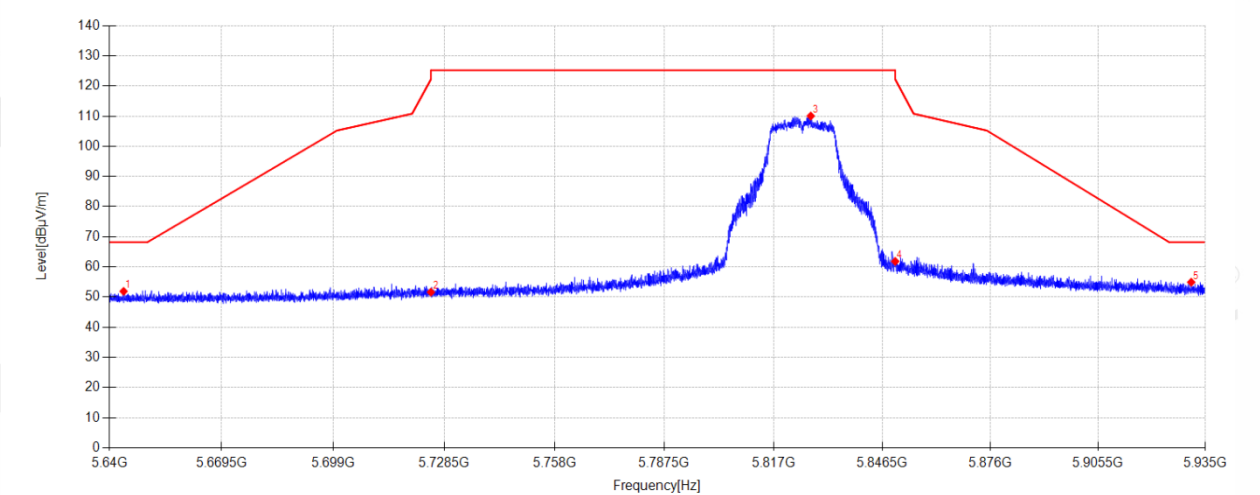

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5643.747	42.91	34.07	-25.09	51.89	68.20	16.31	PK	Vertical
2	5725.000	42.52	34.30	-25.20	51.62	122.20	70.58	PK	Vertical
3	5827.060	100.31	34.71	-24.98	110.04	125.20	15.16	PK	Vertical
4	5850.000	51.97	34.80	-24.95	61.82	122.20	60.38	PK	Vertical
5	5931.106	44.68	34.96	-24.72	54.92	68.20	13.28	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX N40 MIMO 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\17

Memo:

Sample Number: S26070111-002

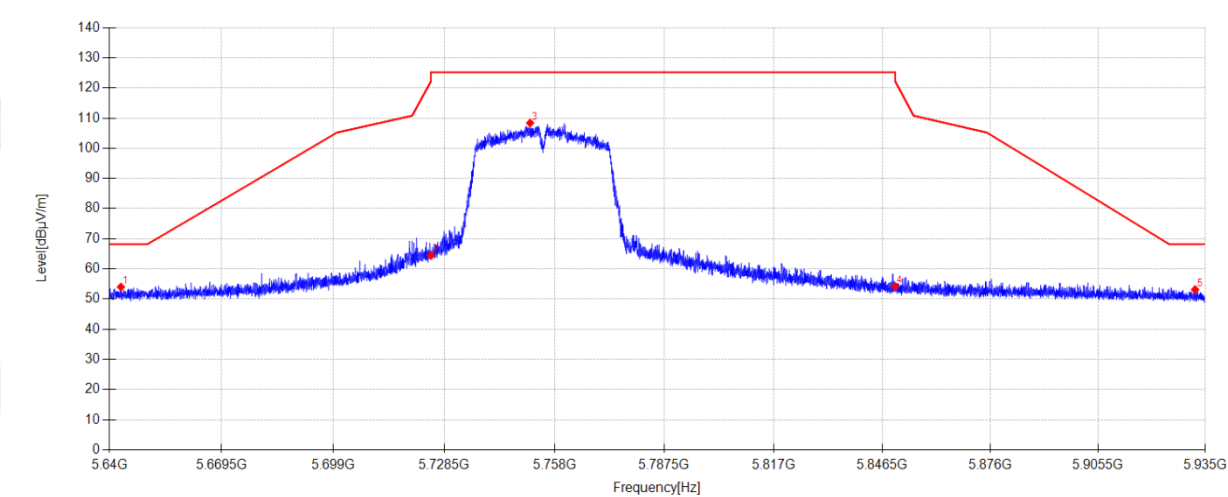

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5643.039	45.00	34.07	-25.08	53.99	68.20	14.21	PK	Horizontal
2	5725.000	55.34	34.30	-25.20	64.44	122.20	57.76	PK	Horizontal
3	5751.481	99.12	34.41	-25.14	108.39	125.20	16.81	PK	Horizontal
4	5850.000	44.28	34.80	-24.95	54.13	122.20	68.07	PK	Horizontal
5	5932.168	42.89	34.96	-24.71	53.14	68.20	15.06	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX N40 MIMO 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\18

Memo:

Sample Number: S26070111-002

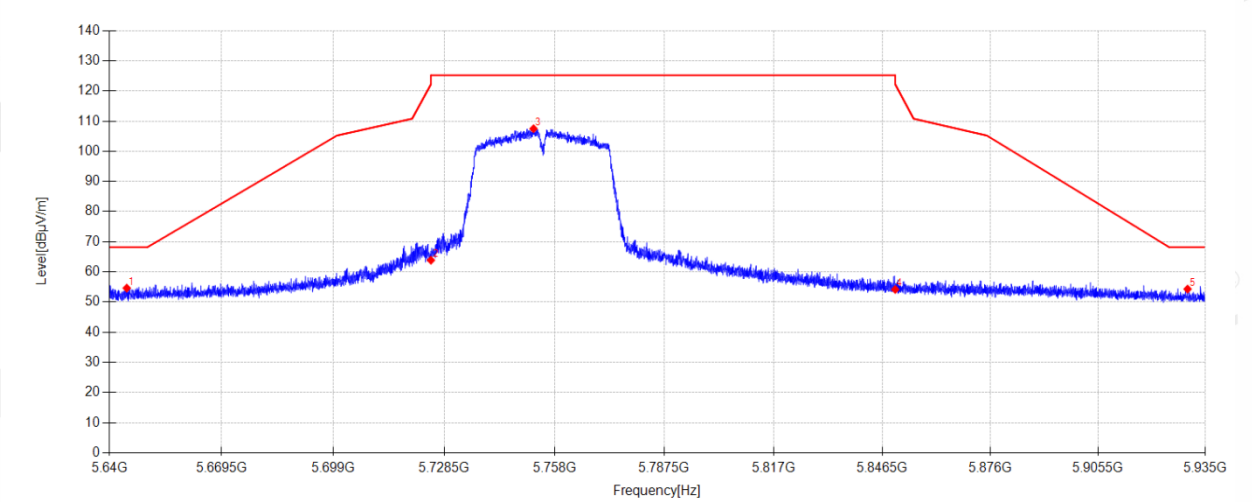

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5644.573	45.62	34.08	-25.09	54.61	68.20	13.59	PK	Vertical
2	5725.000	54.77	34.30	-25.20	63.87	122.20	58.33	PK	Vertical
3	5752.395	98.20	34.41	-25.13	107.48	125.20	17.72	PK	Vertical
4	5850.000	44.31	34.80	-24.95	54.16	122.20	68.04	PK	Vertical
5	5930.103	44.05	34.96	-24.72	54.29	68.20	13.91	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX N40 MIMO 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\19

Memo:

Sample Number: S26070111-002

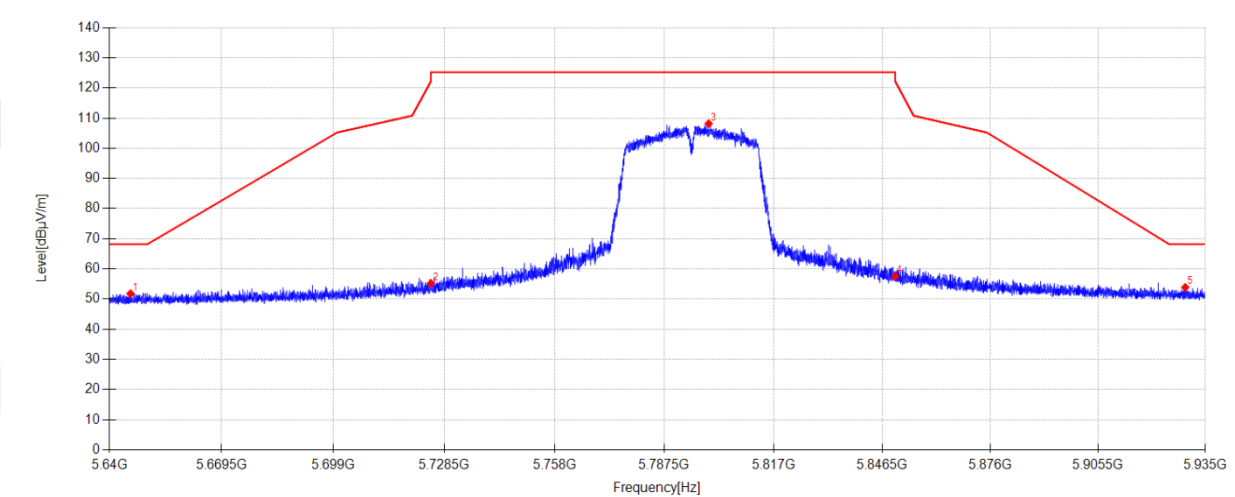

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.546	42.80	34.08	-25.09	51.79	68.20	16.41	PK	Horizontal
2	5725.000	46.10	34.30	-25.20	55.20	122.20	67.00	PK	Horizontal
3	5799.448	98.59	34.60	-25.02	108.17	125.20	17.03	PK	Horizontal
4	5850.000	47.66	34.80	-24.95	57.51	122.20	64.69	PK	Horizontal
5	5929.454	43.63	34.96	-24.72	53.87	68.20	14.33	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX N40 MIMO 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\20

Memo:

Sample Number: S26070111-002

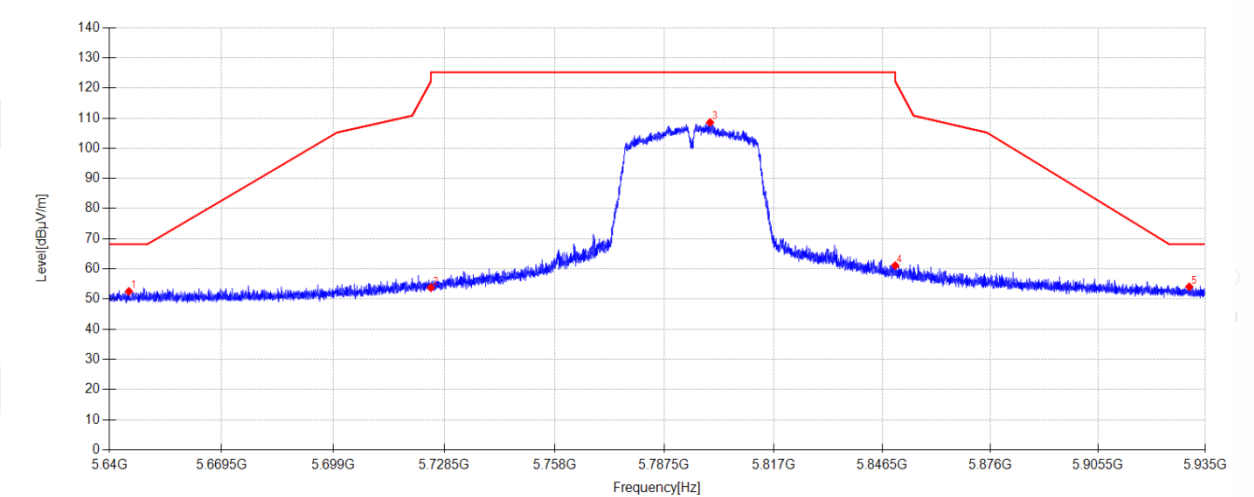

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.133	43.55	34.08	-25.09	52.54	68.20	15.66	PK	Vertical
2	5725.000	44.67	34.30	-25.20	53.77	122.20	68.43	PK	Vertical
3	5799.831	98.98	34.60	-25.02	108.56	125.20	16.64	PK	Vertical
4	5850.000	51.25	34.80	-24.95	61.10	122.20	61.10	PK	Vertical
5	5930.575	43.80	34.96	-24.72	54.04	68.20	14.16	PK	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC20 MIMO 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\33

Memo:

Sample Number: S26070111-002

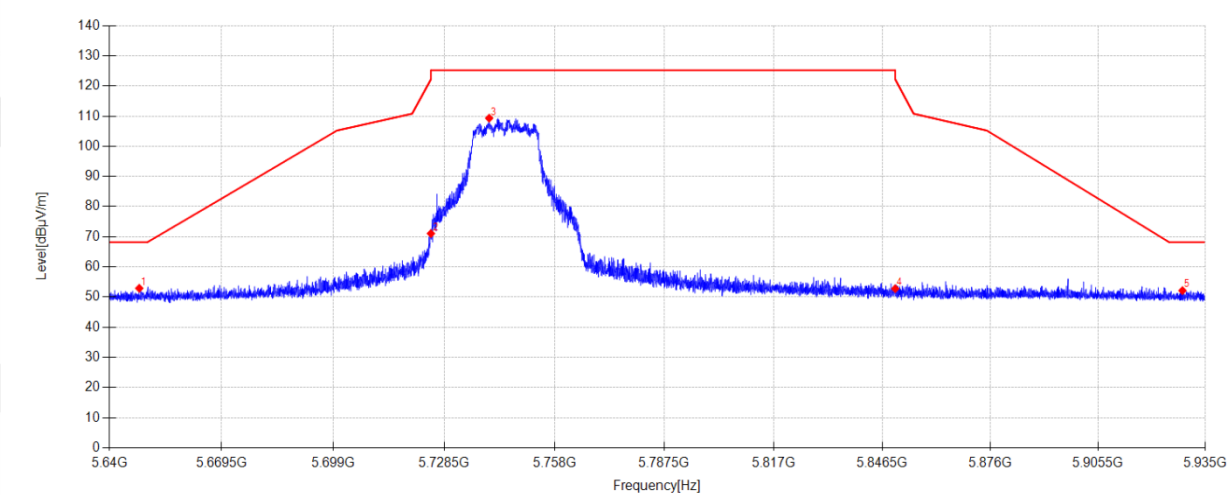

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5647.847	43.91	34.09	-25.10	52.90	68.20	15.30	PK	Horizontal
2	5725.000	61.95	34.30	-25.20	71.05	122.20	51.15	PK	Horizontal
3	5740.536	100.12	34.36	-25.16	109.32	125.20	15.88	PK	Horizontal
4	5850.000	42.93	34.80	-24.95	52.78	122.20	69.42	PK	Horizontal
5	5928.687	41.90	34.96	-24.73	52.13	68.20	16.07	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC20 MIMO 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\34

Memo:

Sample Number: S26070111-002

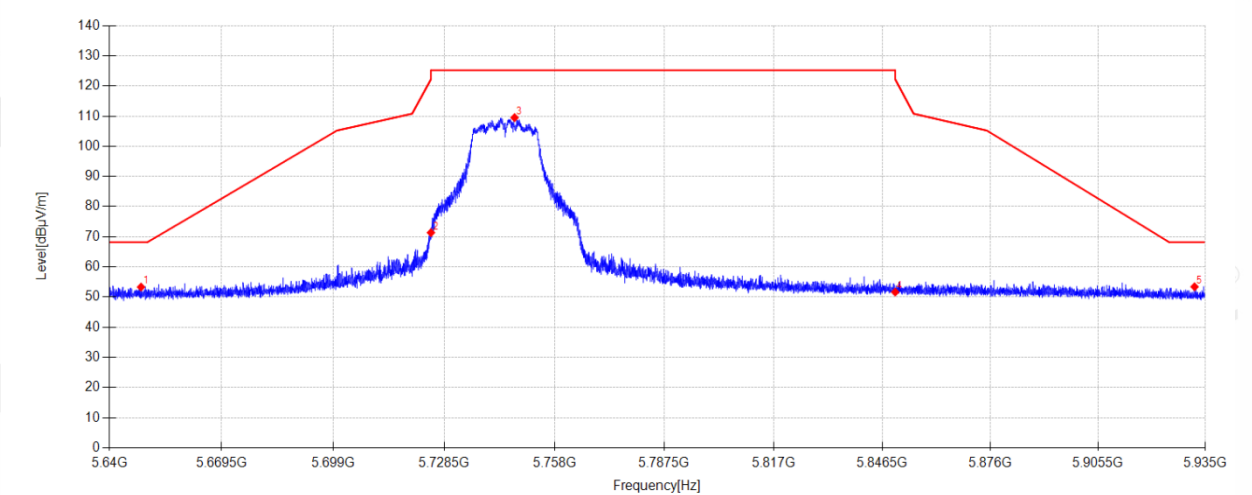

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5648.319	44.32	34.09	-25.10	53.31	68.20	14.89	PK	Vertical
2	5725.000	62.25	34.30	-25.20	71.35	122.20	50.85	PK	Vertical
3	5747.321	100.26	34.39	-25.15	109.50	125.20	15.70	PK	Vertical
4	5850.000	41.80	34.80	-24.95	51.65	122.20	70.55	PK	Vertical
5	5932.021	43.15	34.96	-24.71	53.40	68.20	14.80	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC20 MIMO 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\35

Memo:

Sample Number: S26070111-002

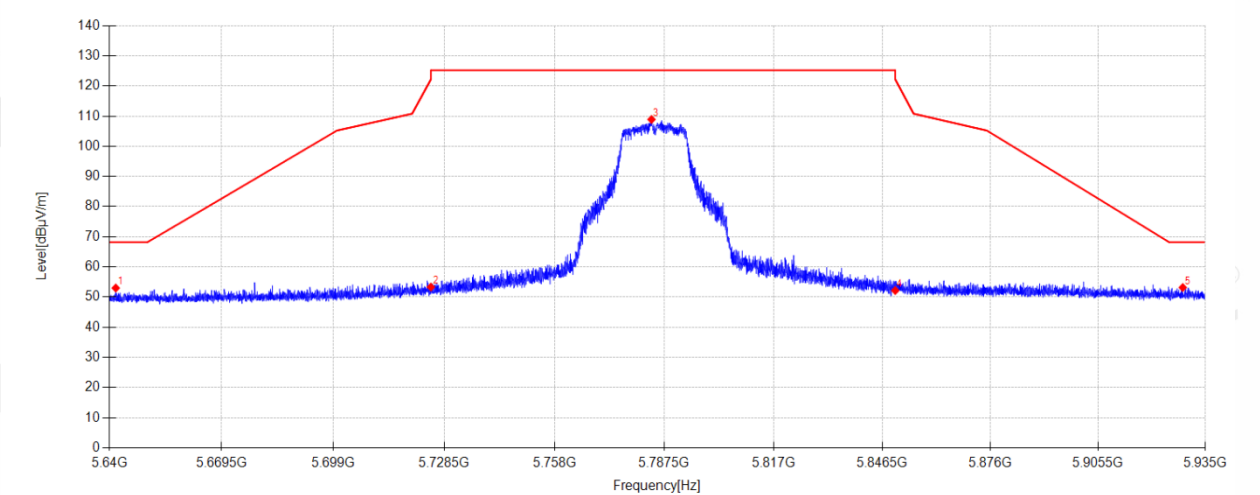

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5641.682	43.99	34.07	-25.08	52.98	68.20	15.22	PK	Horizontal
2	5725.000	44.21	34.30	-25.20	53.31	122.20	68.89	PK	Horizontal
3	5784.049	99.41	34.54	-25.06	108.89	125.20	16.31	PK	Horizontal
4	5850.000	42.30	34.80	-24.95	52.15	122.20	70.05	PK	Horizontal
5	5928.776	42.93	34.96	-24.73	53.16	68.20	15.04	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC20 MIMO 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\36

Memo:

Sample Number: S26070111-002

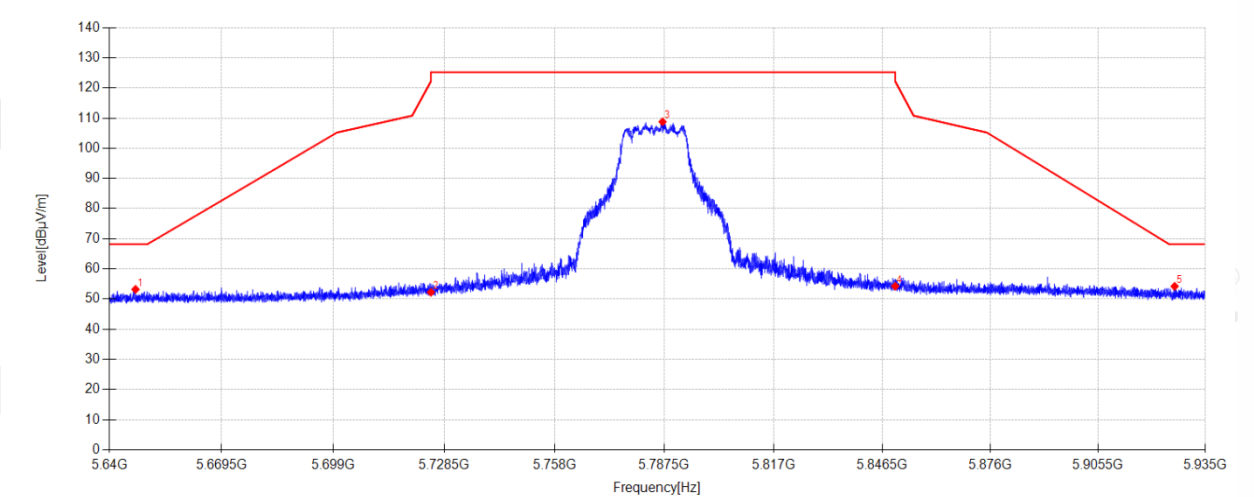

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5646.874	44.21	34.09	-25.10	53.20	68.20	15.00	PK	Vertical
2	5725.000	43.14	34.30	-25.20	52.24	122.20	69.96	PK	Vertical
3	5787.028	99.28	34.55	-25.05	108.78	125.20	16.42	PK	Vertical
4	5850.000	44.40	34.80	-24.95	54.25	122.20	67.95	PK	Vertical
5	5926.534	44.01	34.95	-24.74	54.22	68.20	13.98	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC20 MIMO 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\37

Memo:

Sample Number: S26070111-002

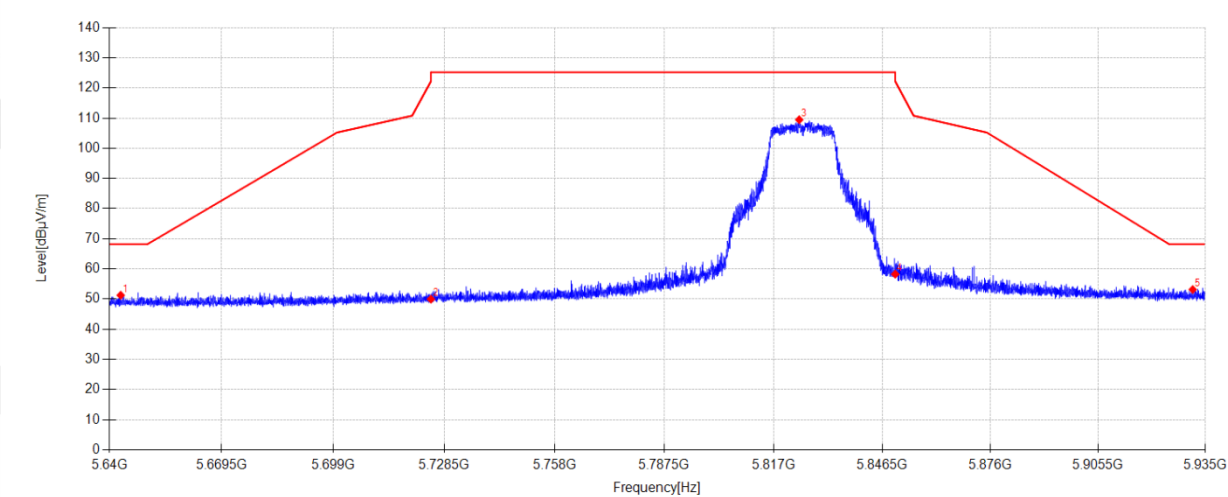

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5642.980	42.26	34.07	-25.08	51.25	68.20	16.95	PK	Horizontal
2	5725.000	40.85	34.30	-25.20	49.95	122.20	72.25	PK	Horizontal
3	5823.933	99.75	34.70	-24.99	109.46	125.20	15.74	PK	Horizontal
4	5850.000	48.39	34.80	-24.95	58.24	122.20	63.96	PK	Horizontal
5	5931.519	42.90	34.96	-24.71	53.15	68.20	15.05	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC20 MIMO 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\38

Memo:

Sample Number: S26070111-002

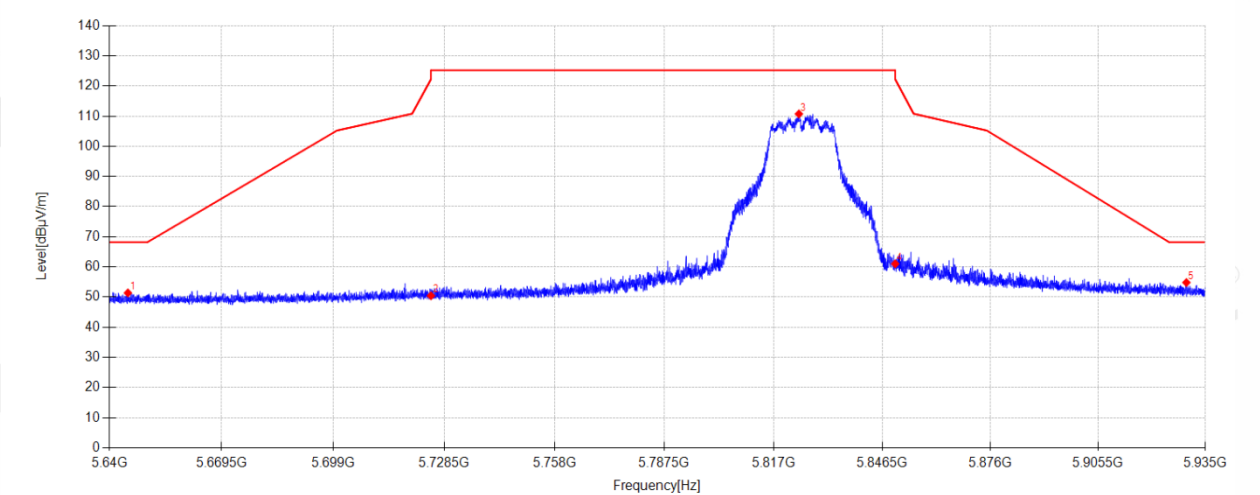

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5644.868	42.37	34.08	-25.09	51.36	68.20	16.84	PK	Vertical
2	5725.000	41.32	34.30	-25.20	50.42	122.20	71.78	PK	Vertical
3	5823.844	101.01	34.70	-24.99	110.72	125.20	14.48	PK	Vertical
4	5850.000	51.16	34.80	-24.95	61.01	122.20	61.19	PK	Vertical
5	5929.779	44.57	34.96	-24.72	54.81	68.20	13.39	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC40 MIMO 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\39

Memo:

Sample Number: S26070111-002

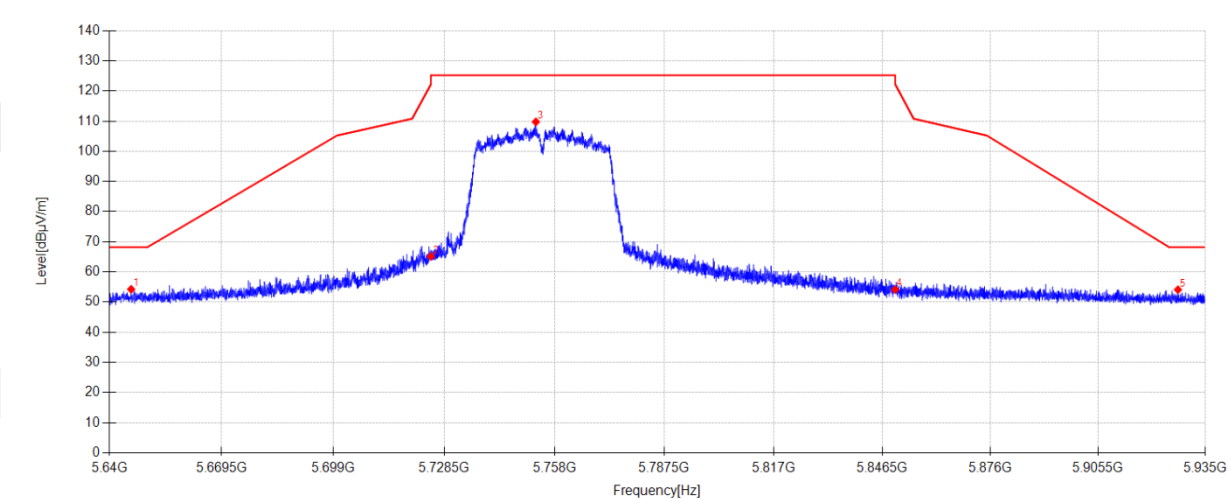

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.723	45.23	34.08	-25.09	54.22	68.20	13.98	PK	Horizontal
2	5725.000	56.02	34.30	-25.20	65.12	122.20	57.08	PK	Horizontal
3	5753.015	100.48	34.41	-25.13	109.76	125.20	15.44	PK	Horizontal
4	5850.000	44.27	34.80	-24.95	54.12	122.20	68.08	PK	Horizontal
5	5927.448	43.86	34.95	-24.73	54.08	68.20	14.12	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC40 MIMO 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\40

Memo:

Sample Number: S26070111-002

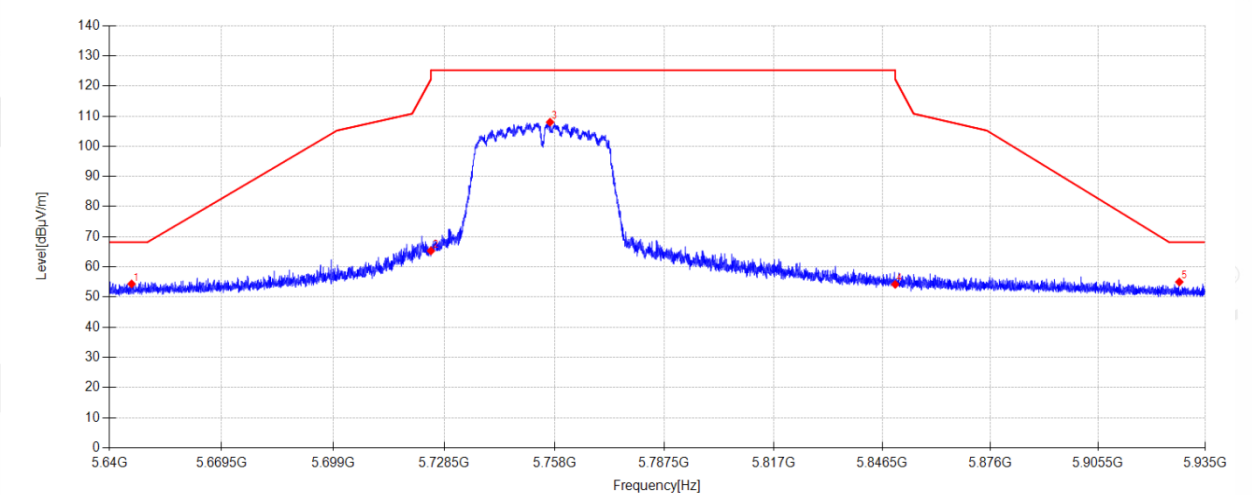

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.841	45.36	34.08	-25.09	54.35	68.20	13.85	PK	Vertical
2	5725.000	56.22	34.30	-25.20	65.32	122.20	56.88	PK	Vertical
3	5756.820	98.68	34.43	-25.12	107.99	125.20	17.21	PK	Vertical
4	5850.000	44.34	34.80	-24.95	54.19	122.20	68.01	PK	Vertical
5	5927.832	44.78	34.96	-24.73	55.01	68.20	13.19	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC40 MIMO 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\41

Memo:

Sample Number: S26070111-002

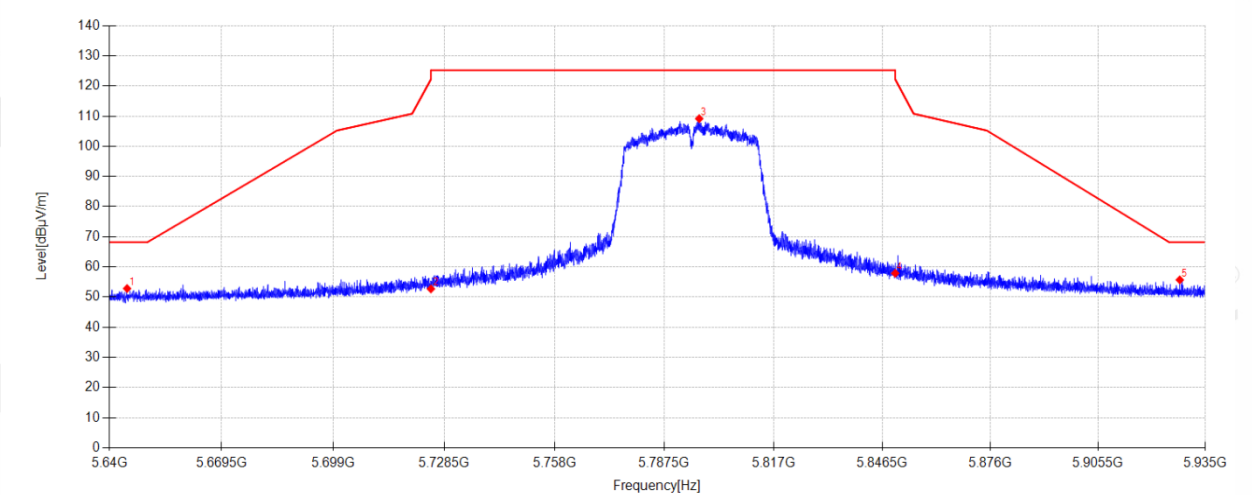

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5644.661	43.83	34.08	-25.09	52.82	68.20	15.38	PK	Horizontal
2	5725.000	43.60	34.30	-25.20	52.70	122.20	69.50	PK	Horizontal
3	5796.911	99.59	34.59	-25.03	109.15	125.20	16.05	PK	Horizontal
4	5850.000	48.03	34.80	-24.95	57.88	122.20	64.32	PK	Horizontal
5	5927.950	45.46	34.96	-24.73	55.69	68.20	12.51	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC40 MIMO 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\42

Memo:

Sample Number: S26070111-002

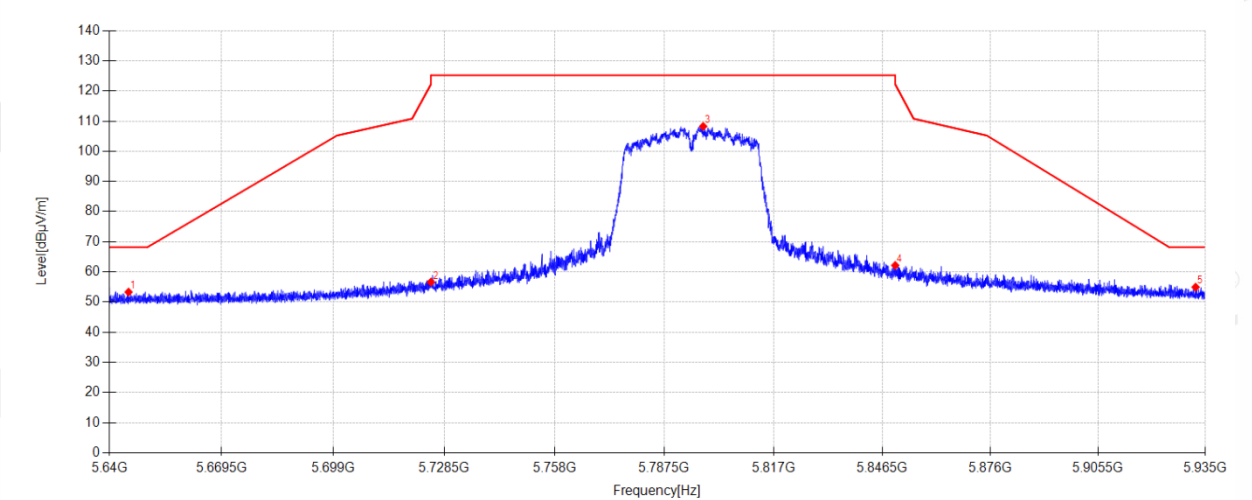

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.045	44.31	34.08	-25.09	53.30	68.20	14.90	PK	Vertical
2	5725.000	47.51	34.30	-25.20	56.61	122.20	65.59	PK	Vertical
3	5797.973	98.68	34.59	-25.02	108.25	125.20	16.95	PK	Vertical
4	5850.000	52.29	34.80	-24.95	62.14	122.20	60.06	PK	Vertical
5	5932.316	44.69	34.96	-24.71	54.94	68.20	13.26	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC80 MIMO 5775MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\43

Memo:

Sample Number: S26070111-002

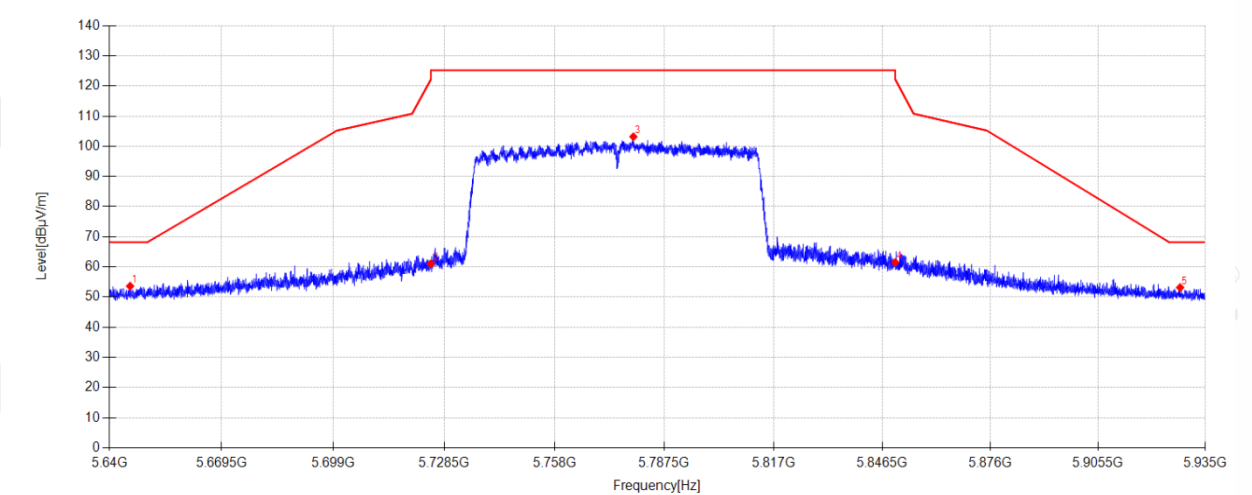

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.458	44.62	34.08	-25.09	53.61	68.20	14.59	PK	Horizontal
2	5725.000	51.89	34.30	-25.20	60.99	122.20	61.21	PK	Horizontal
3	5779.181	93.71	34.52	-25.07	103.16	125.20	22.04	PK	Horizontal
4	5850.000	51.64	34.80	-24.95	61.49	122.20	60.71	PK	Horizontal
5	5928.038	42.91	34.96	-24.73	53.14	68.20	15.06	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX AC80 MIMO 5775MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\44

Memo:

Sample Number: S26070111-002

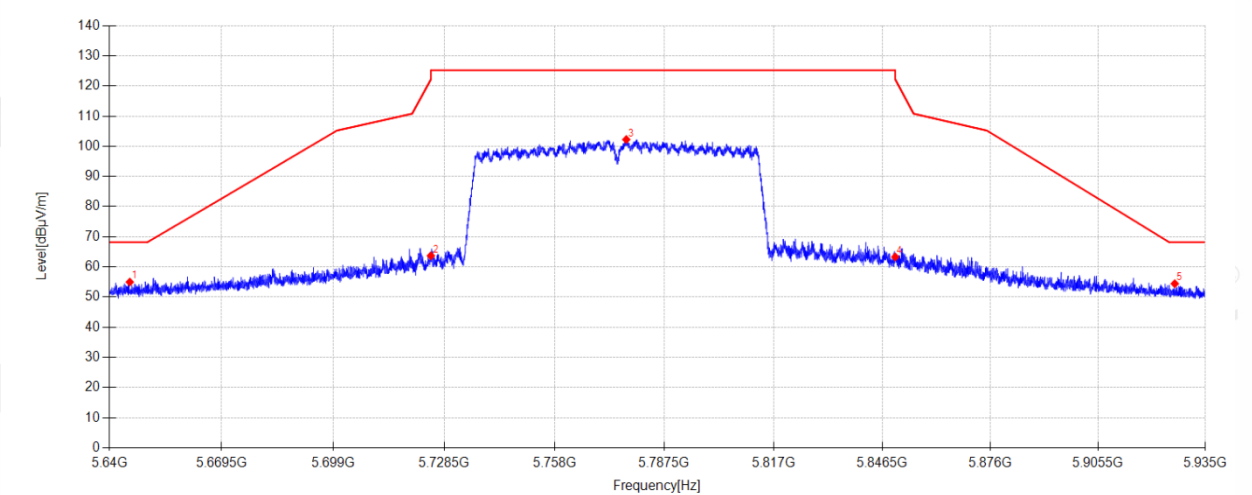

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.369	45.98	34.08	-25.09	54.97	68.20	13.23	PK	Vertical
2	5725.000	54.58	34.30	-25.20	63.68	122.20	58.52	PK	Vertical
3	5777.264	92.80	34.51	-25.07	102.24	125.20	22.96	PK	Vertical
4	5850.000	53.45	34.80	-24.95	63.30	122.20	58.90	PK	Vertical
5	5926.563	44.22	34.95	-24.74	54.43	68.20	13.77	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX SU AX20 MIMO 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\45

Memo:

Sample Number: S26070111-002

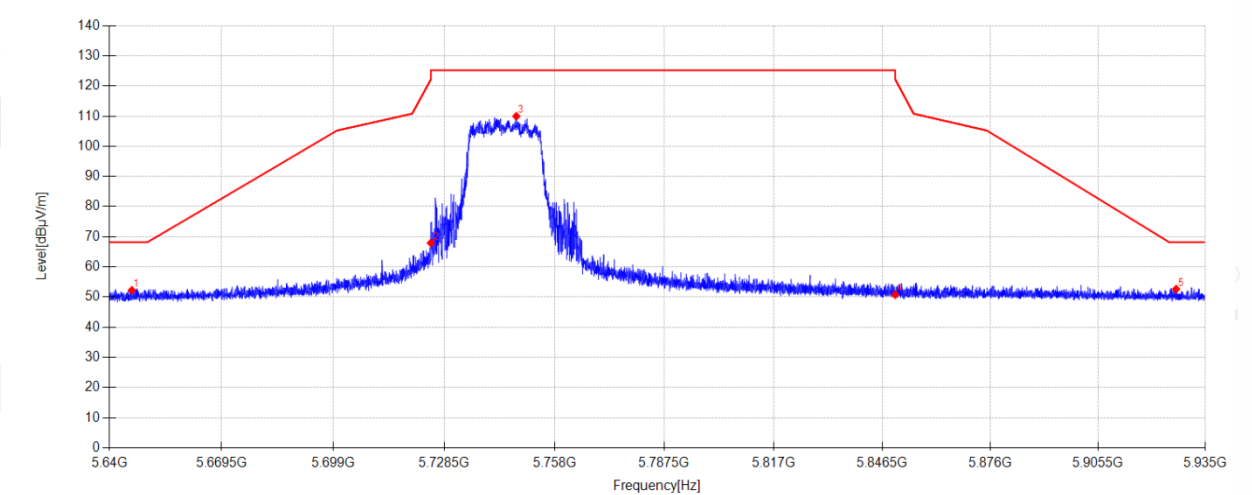

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.900	43.24	34.08	-25.09	52.23	68.20	15.97	PK	Horizontal
2	5725.000	58.83	34.30	-25.20	67.93	122.20	54.27	PK	Horizontal
3	5747.793	100.71	34.39	-25.15	109.95	125.20	15.25	PK	Horizontal
4	5850.000	40.91	34.80	-24.95	50.76	122.20	71.44	PK	Horizontal
5	5926.947	42.41	34.95	-24.74	52.62	68.20	15.58	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX SU AX20 MIMO 5745MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\46

Memo:

Sample Number: S26070111-002

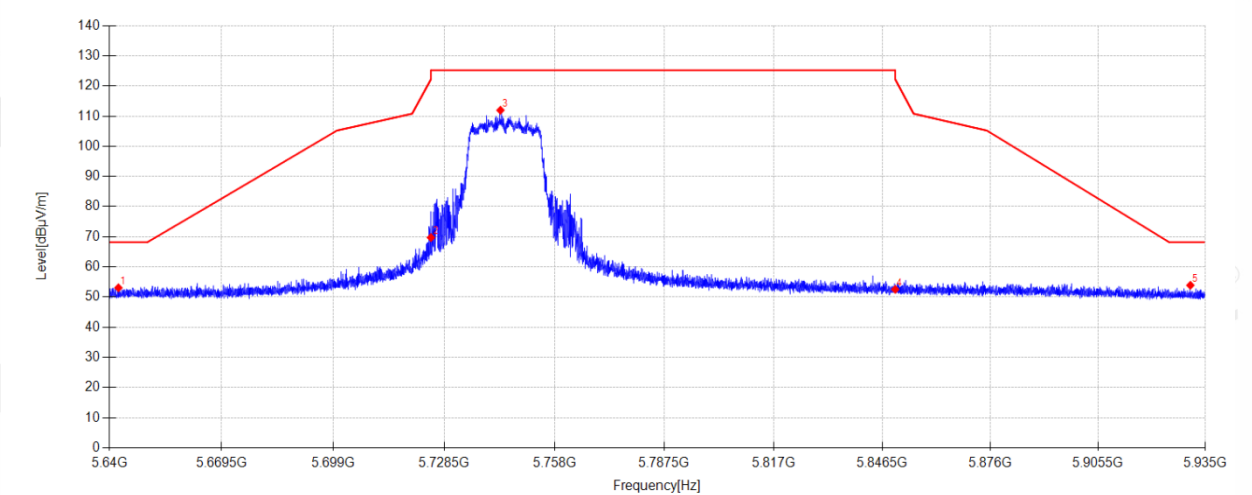

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5642.390	44.08	34.07	-25.08	53.07	68.20	15.13	PK	Vertical
2	5725.000	60.62	34.30	-25.20	69.72	122.20	52.48	PK	Vertical
3	5743.545	102.74	34.37	-25.16	111.95	125.20	13.25	PK	Vertical
4	5850.000	42.68	34.80	-24.95	52.53	122.20	69.67	PK	Vertical
5	5930.870	43.66	34.96	-24.72	53.90	68.20	14.30	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX SU AX20 MIMO 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\47

Memo:

Sample Number: S26070111-002

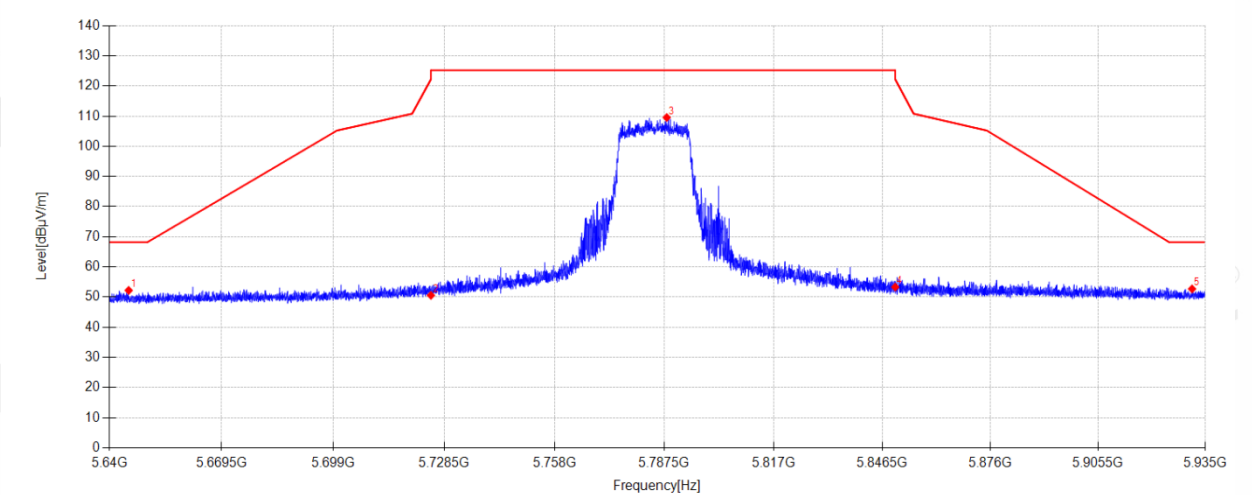

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.074	43.21	34.08	-25.09	52.20	68.20	16.00	PK	Horizontal
2	5725.000	41.46	34.30	-25.20	50.56	122.20	71.64	PK	Horizontal
3	5788.149	100.03	34.55	-25.05	109.53	125.20	15.67	PK	Horizontal
4	5850.000	43.46	34.80	-24.95	53.31	122.20	68.89	PK	Horizontal
5	5931.342	42.44	34.96	-24.71	52.69	68.20	15.51	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX SU AX20 MIMO 5785MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\48

Memo:

Sample Number: S26070111-002

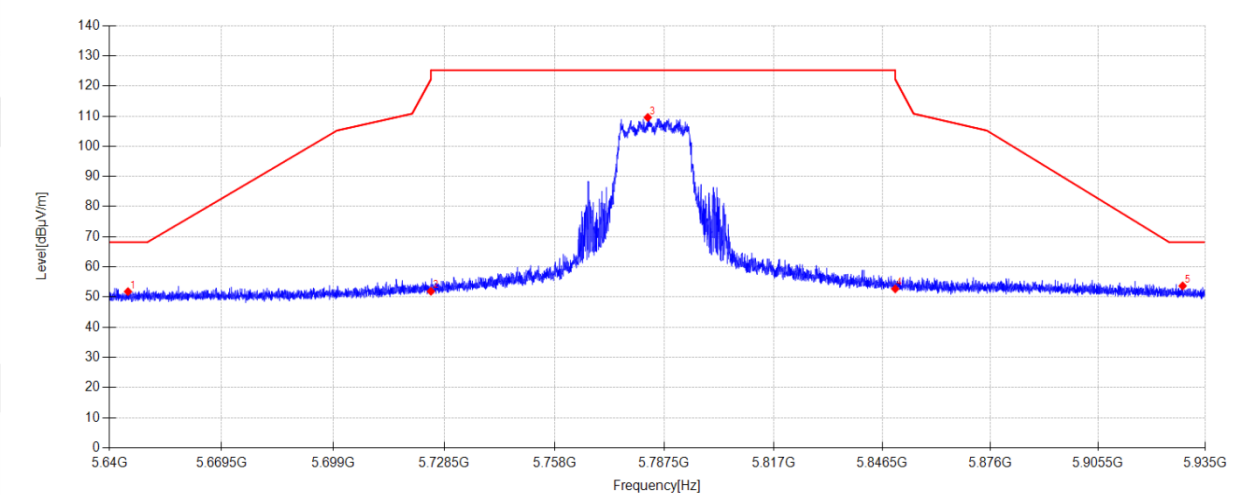

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5644.897	42.81	34.08	-25.09	51.80	68.20	16.40	PK	Vertical
2	5725.000	42.80	34.30	-25.20	51.90	122.20	70.30	PK	Vertical
3	5783.046	100.09	34.53	-25.06	109.56	125.20	15.64	PK	Vertical
4	5850.000	42.85	34.80	-24.95	52.70	122.20	69.50	PK	Vertical
5	5928.746	43.46	34.96	-24.73	53.69	68.20	14.51	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX SU AX20 MIMO 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\49

Memo:

Sample Number: S26070111-002

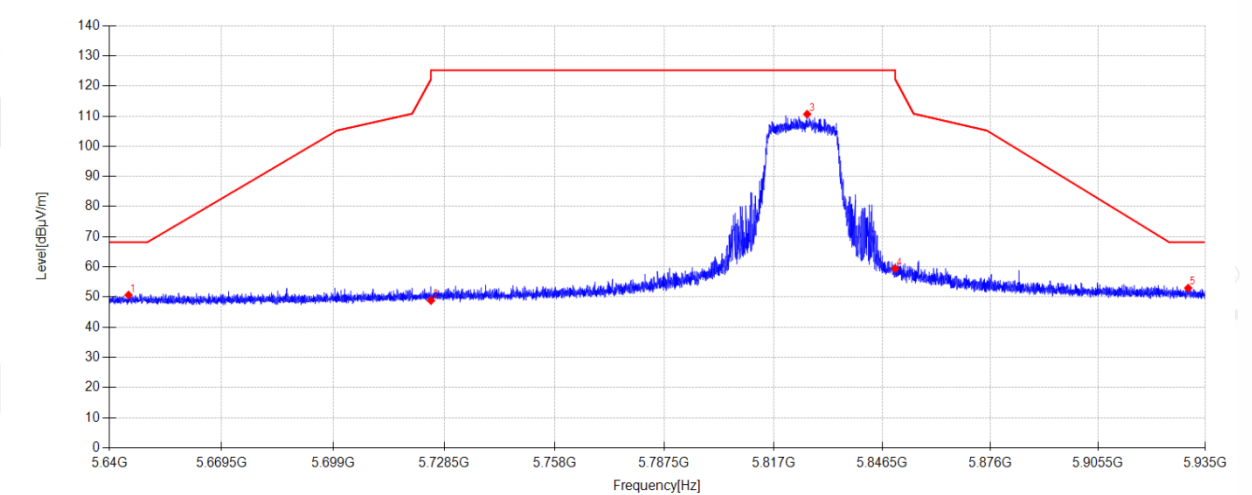

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.045	41.67	34.08	-25.09	50.66	68.20	17.54	PK	Horizontal
2	5725.000	39.73	34.30	-25.20	48.83	122.20	73.37	PK	Horizontal
3	5826.086	100.94	34.70	-24.98	110.66	125.20	14.54	PK	Horizontal
4	5850.000	49.57	34.80	-24.95	59.42	122.20	62.78	PK	Horizontal
5	5930.280	42.72	34.96	-24.72	52.96	68.20	15.24	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX SU AX20 MIMO 5825MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\50

Memo:

Sample Number: S26070111-002

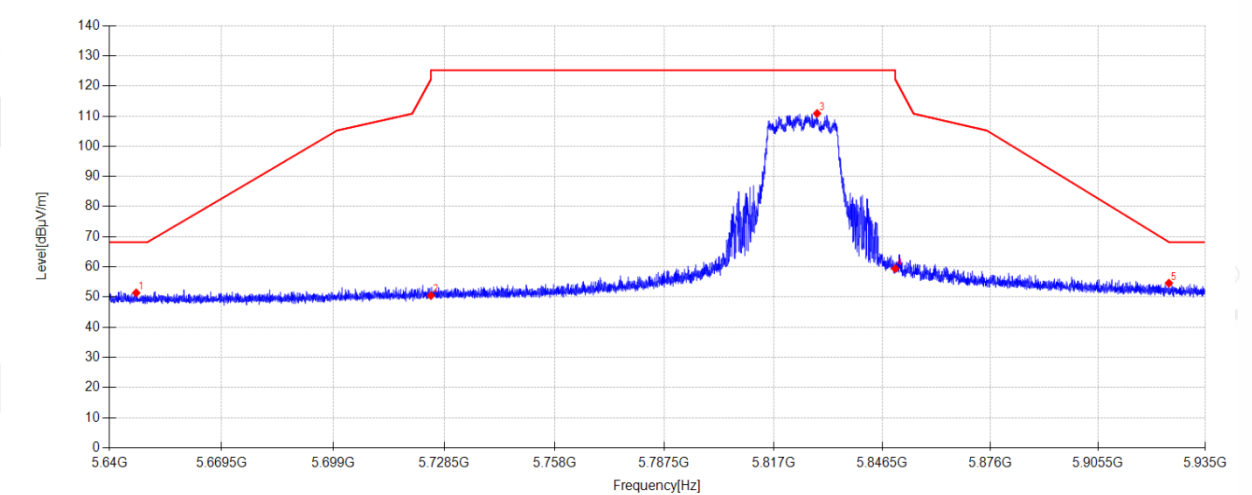

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5647.051	42.39	34.09	-25.10	51.38	68.20	16.82	PK	Vertical
2	5725.000	41.37	34.30	-25.20	50.47	122.20	71.73	PK	Vertical
3	5828.771	101.14	34.72	-24.98	110.88	125.20	14.32	PK	Vertical
4	5850.000	49.56	34.80	-24.95	59.41	122.20	62.79	PK	Vertical
5	5924.941	44.40	34.95	-24.75	54.60	68.24	13.64	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX SU AX40 MIMO 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\51

Memo:

Sample Number: S26070111-002

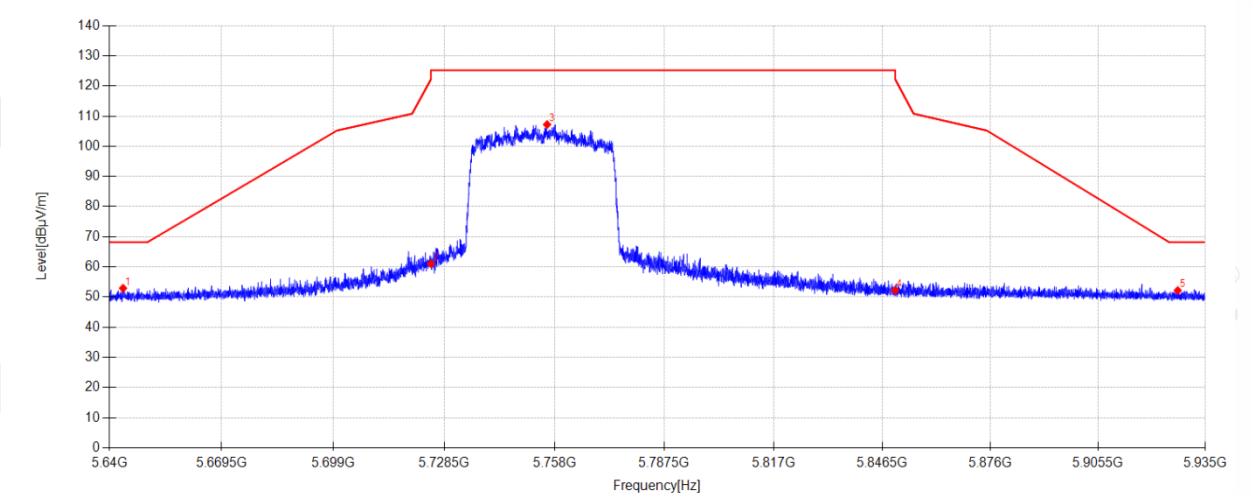

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5643.599	43.94	34.07	-25.09	52.92	68.20	15.28	PK	Horizontal
2	5725.000	51.93	34.30	-25.20	61.03	122.20	61.17	PK	Horizontal
3	5756.024	97.91	34.42	-25.13	107.20	125.20	18.00	PK	Horizontal
4	5850.000	42.37	34.80	-24.95	52.22	122.20	69.98	PK	Horizontal
5	5927.389	41.95	34.95	-24.73	52.17	68.20	16.03	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX SU AX40 MIMO 5755MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\52

Memo:

Sample Number: S26070111-002

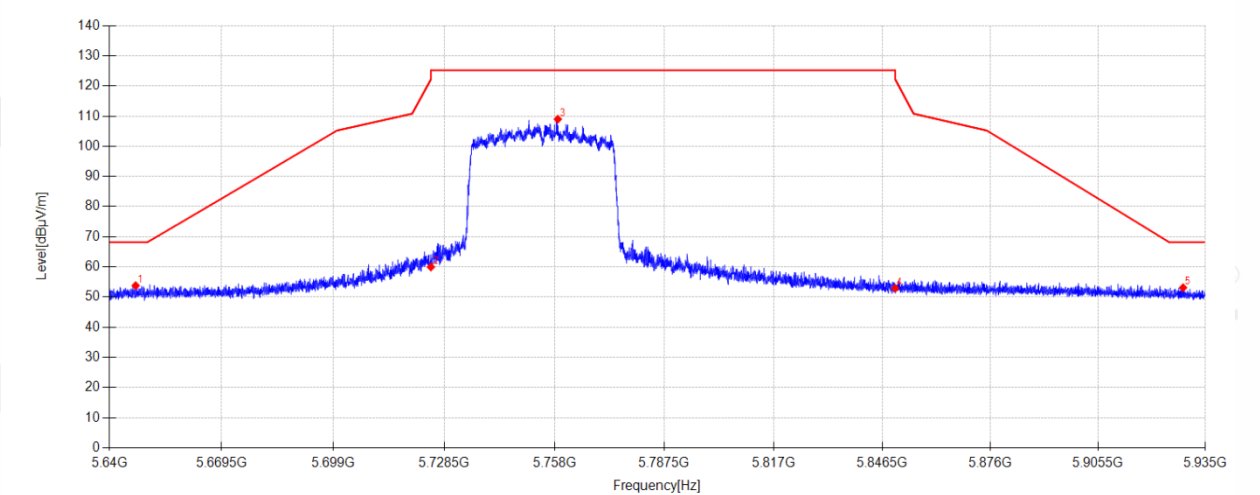

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5646.903	44.78	34.09	-25.10	53.77	68.20	14.43	PK	Vertical
2	5725.000	50.85	34.30	-25.20	59.95	122.20	62.25	PK	Vertical
3	5758.885	99.65	34.44	-25.12	108.97	125.20	16.23	PK	Vertical
4	5850.000	43.06	34.80	-24.95	52.91	122.20	69.29	PK	Vertical
5	5928.864	42.87	34.96	-24.73	53.10	68.20	15.10	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX SU AX40 MIMO 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\53

Memo:

Sample Number: S26070111-002

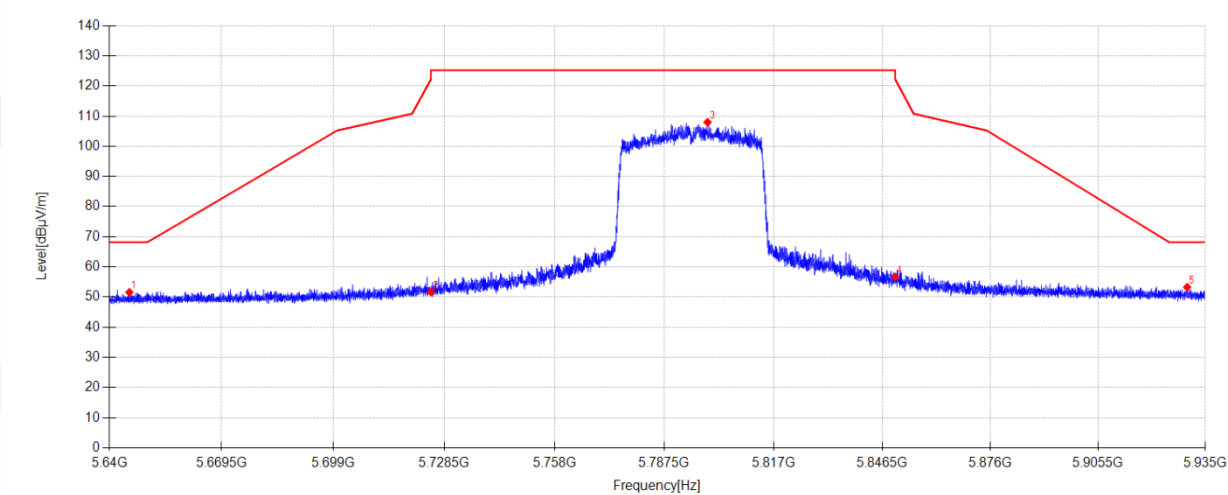

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.281	42.58	34.08	-25.09	51.57	68.20	16.63	PK	Horizontal
2	5725.000	42.55	34.30	-25.20	51.65	122.20	70.55	PK	Horizontal
3	5799.153	98.40	34.60	-25.02	107.98	125.20	17.22	PK	Horizontal
4	5850.000	46.82	34.80	-24.95	56.67	122.20	65.53	PK	Horizontal
5	5929.985	43.01	34.96	-24.72	53.25	68.20	14.95	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-25

Tested By:

Liang Rijing

Test Mode:

TX SU AX40 MIMO 5795MHz Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.8%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26070111-10\FCC ABOVE 1G 5.8\54

Memo:

Sample Number: S26070111-002

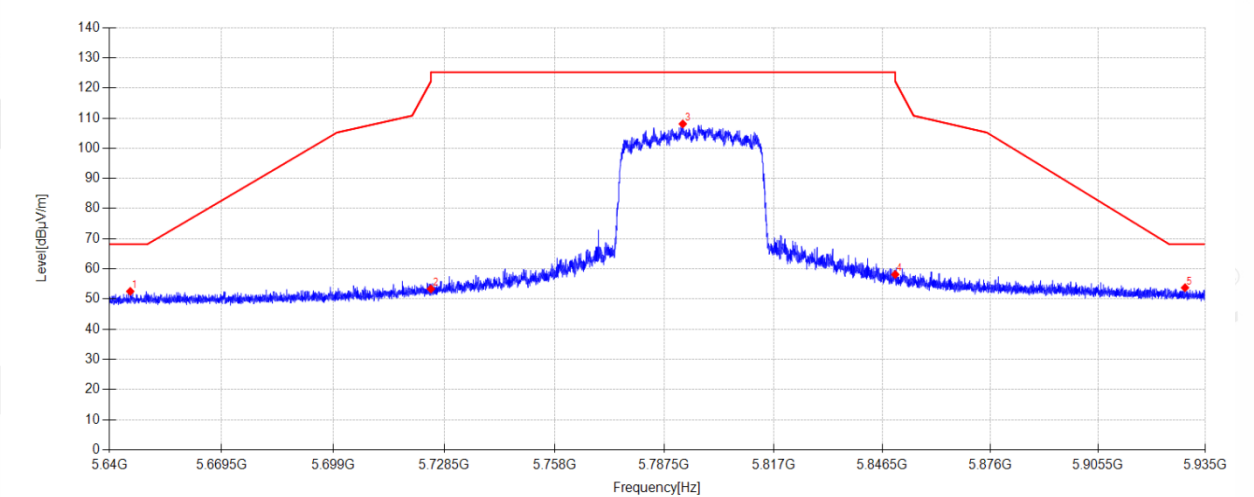

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5645.487	43.55	34.08	-25.09	52.54	68.20	15.66	PK	Vertical
2	5725.000	44.25	34.30	-25.20	53.35	122.20	68.85	PK	Vertical
3	5792.486	98.54	34.57	-25.04	108.07	125.20	17.13	PK	Vertical
4	5850.000	48.29	34.80	-24.95	58.14	122.20	64.06	PK	Vertical
5	5929.395	43.52	34.96	-24.72	53.76	68.20	14.44	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.