




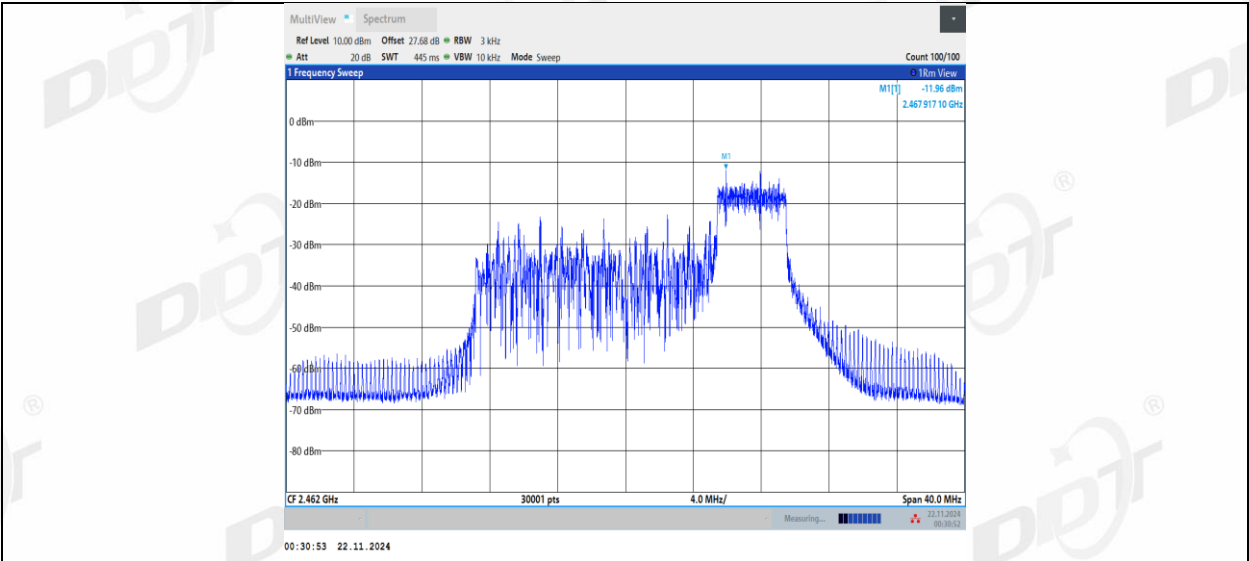


11AX20MIMO_Ant2_2462_106Tone_RU53

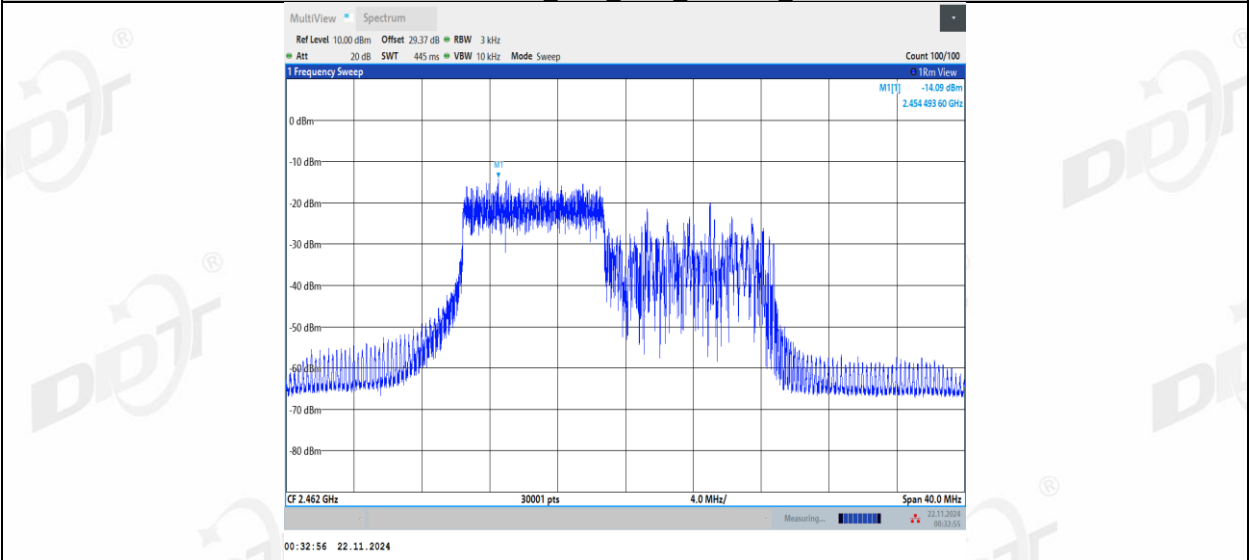


11AX20MIMO_Ant2_2462_106Tone_RU54

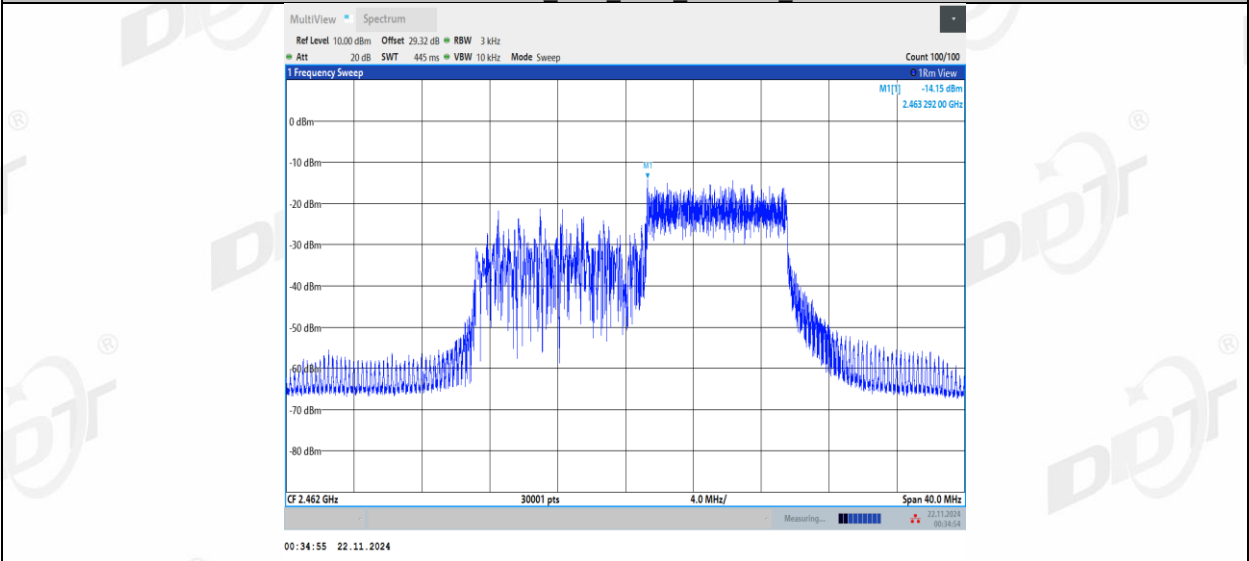


11AX40MIMO_Ant1_2422_106Tone_RU55

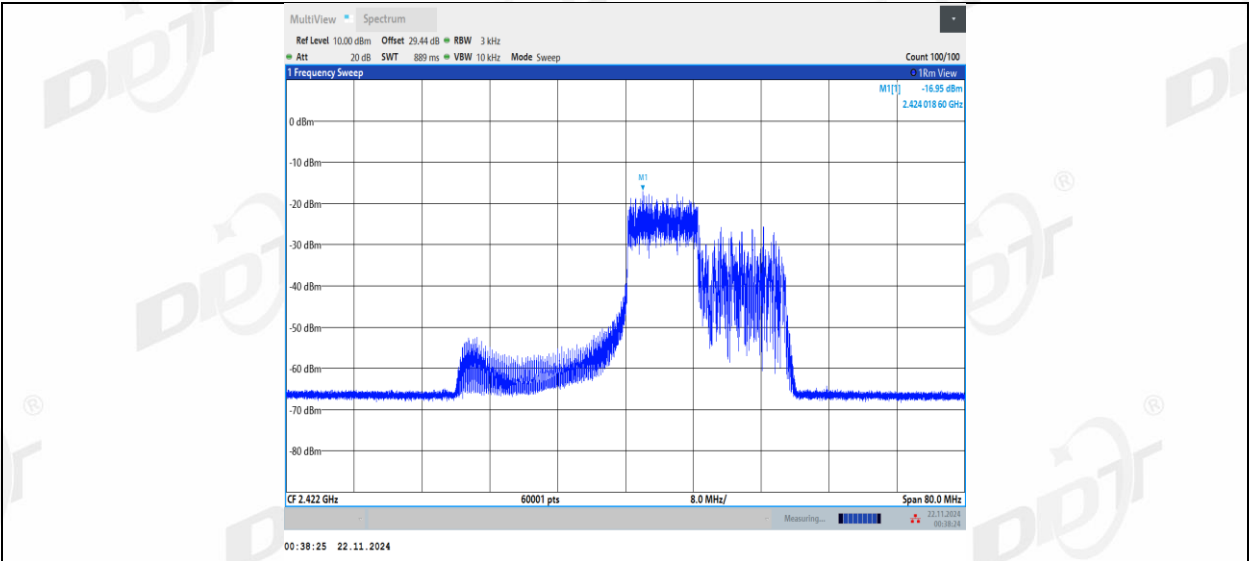


11AX40MIMO_Ant1_2422_106Tone_RU56

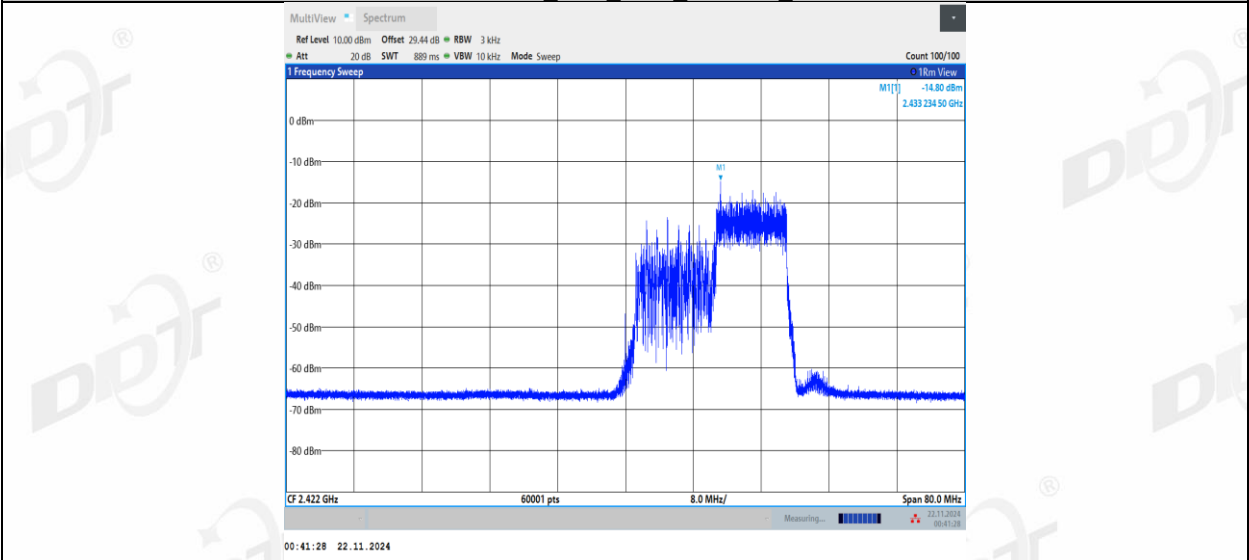


11AX40MIMO_Ant1_2422_242Tone_RU61

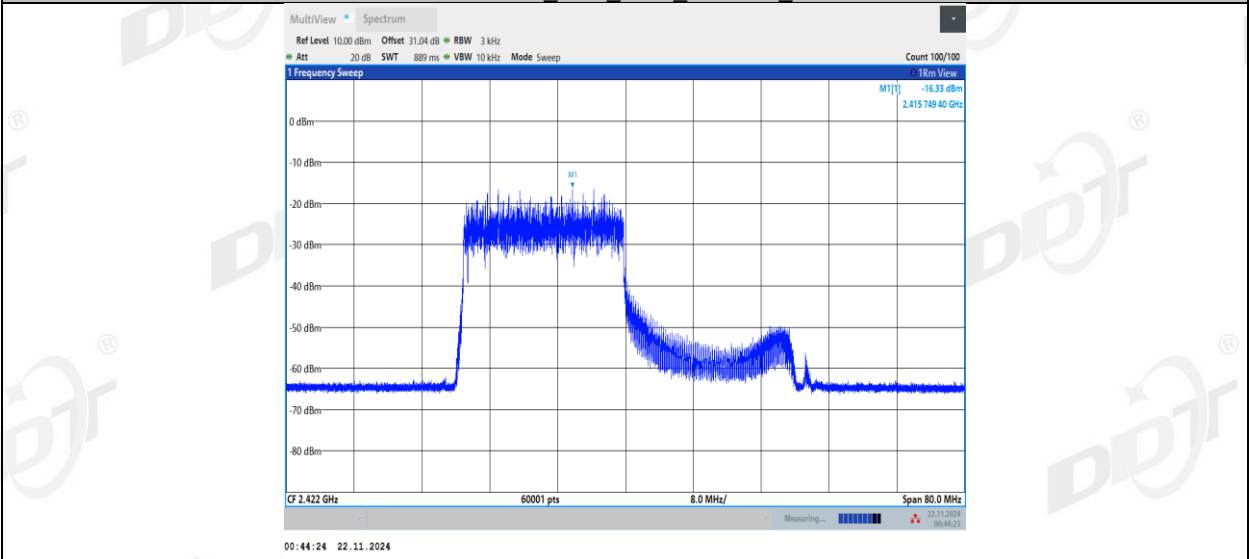


11AX40MIMO_Ant1_2422_242Tone_RU62

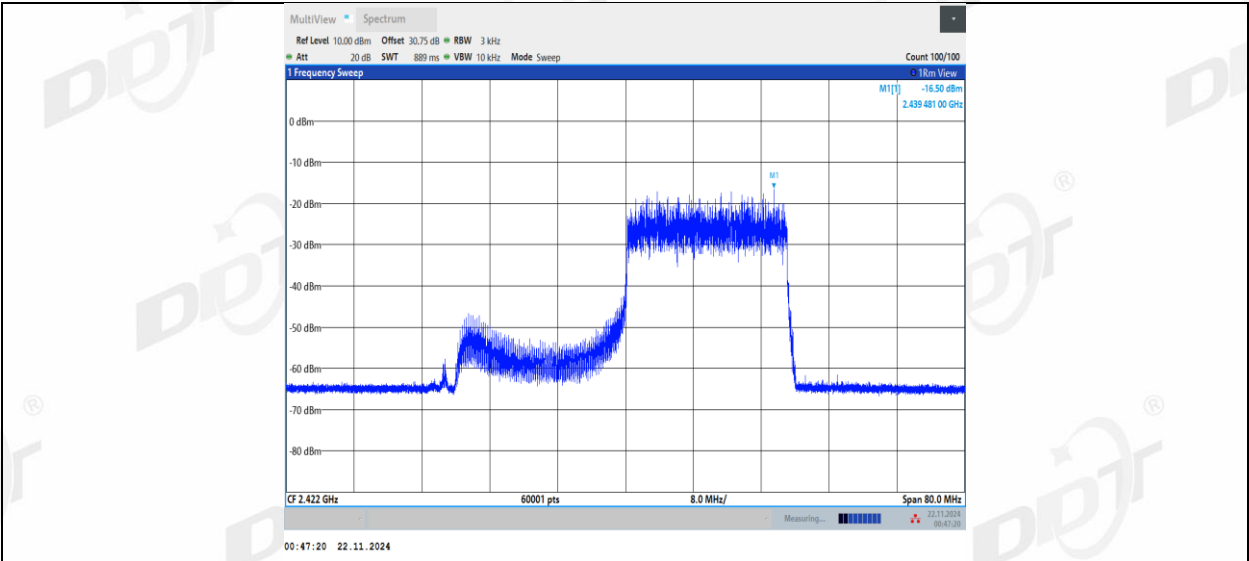


11AX40MIMO_Ant2_2422_106Tone_RU55

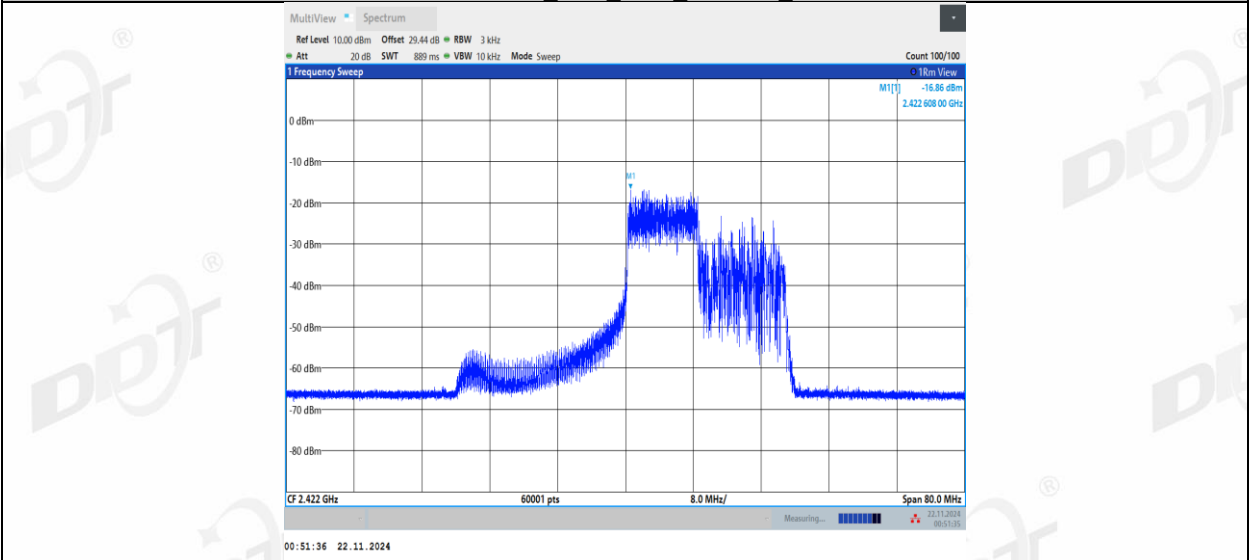


11AX40MIMO_Ant2_2422_106Tone_RU56

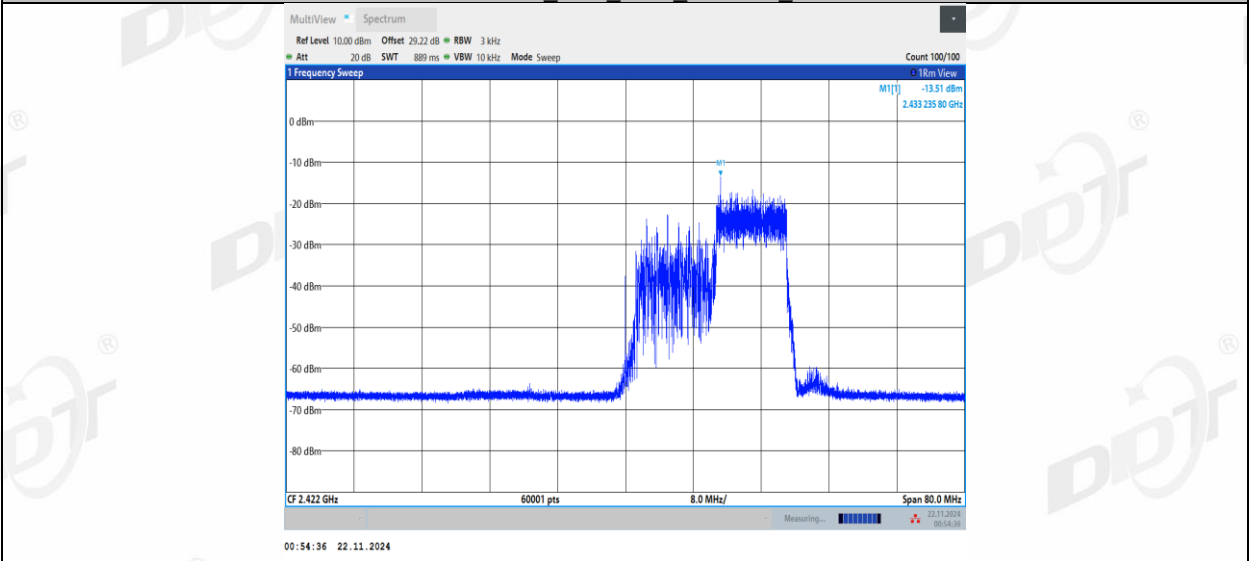


11AX40MIMO_Ant2_2422_242Tone_RU61

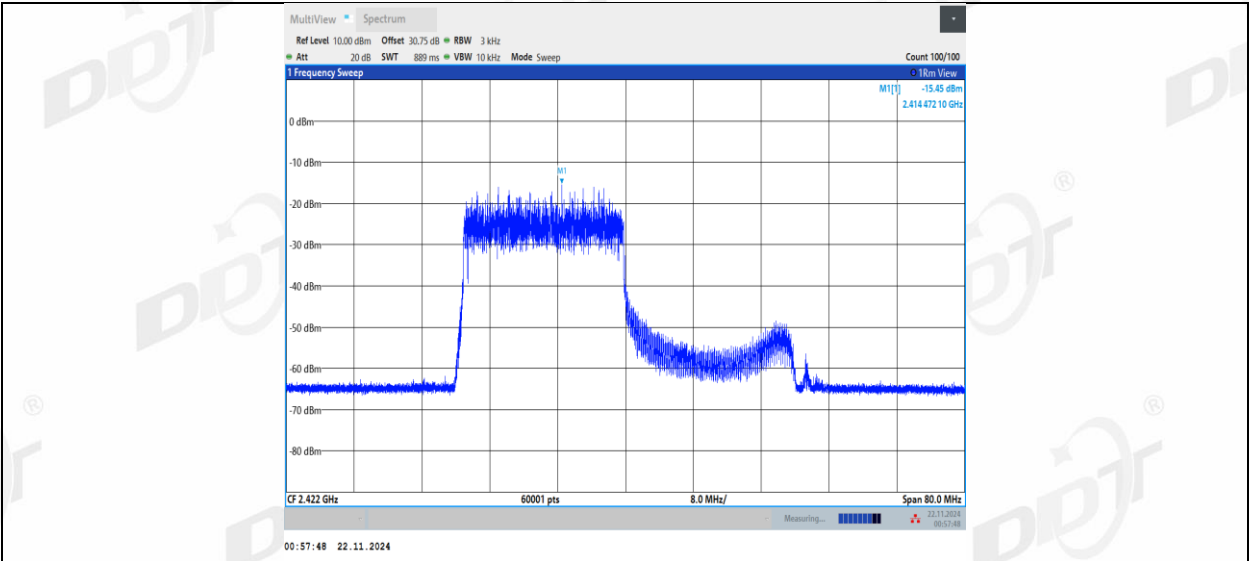


11AX40MIMO_Ant2_2422_242Tone_RU62

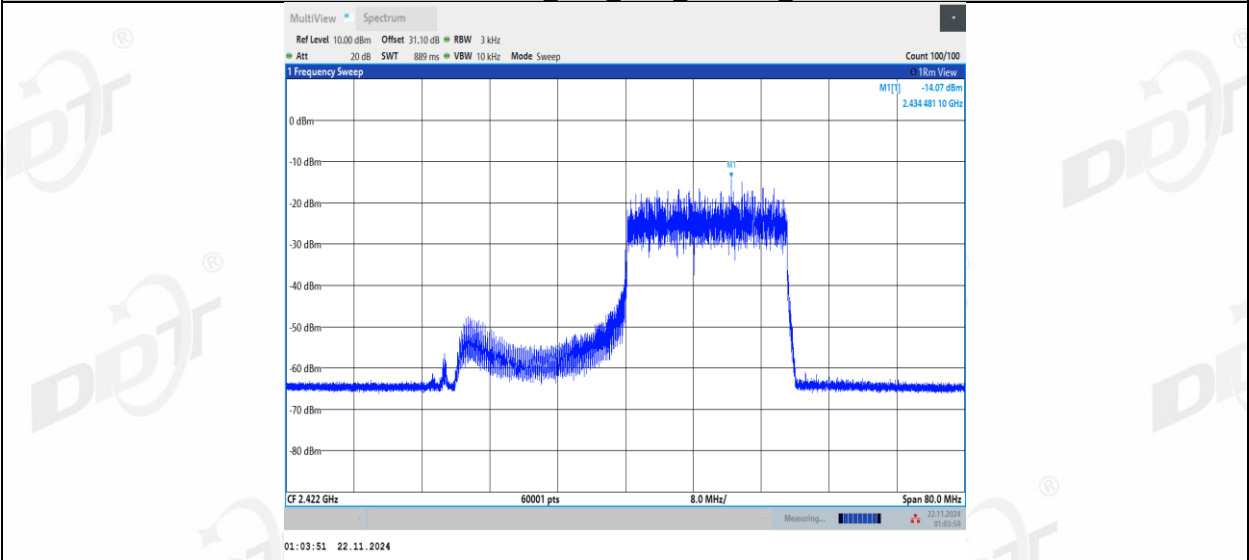


11AX40MIMO_Ant1_2437_106Tone_RU55

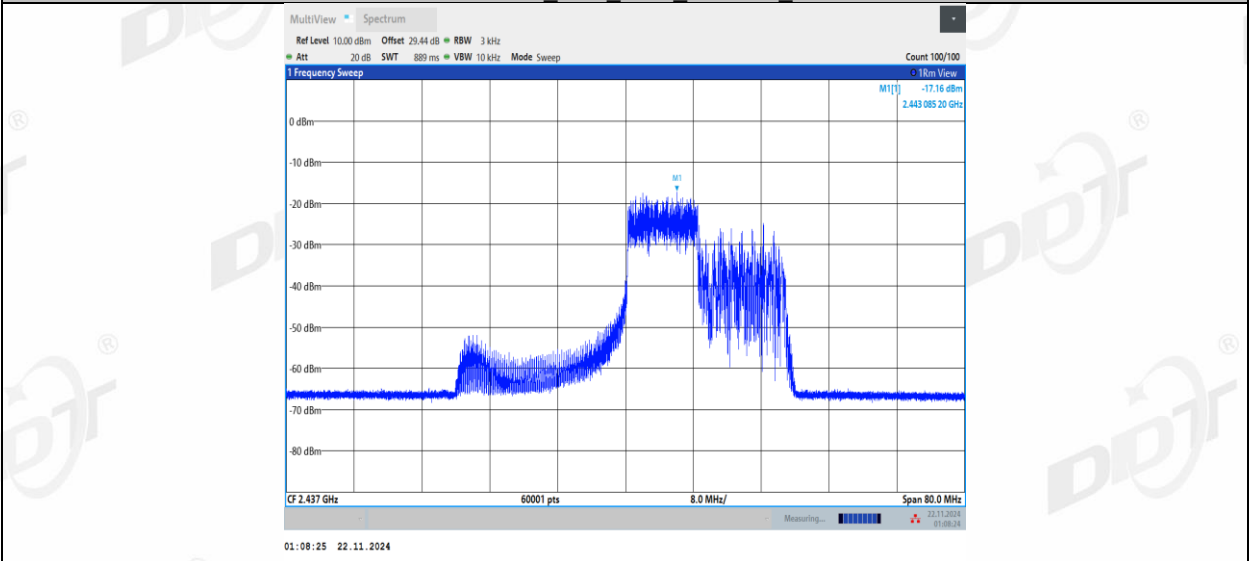


11AX40MIMO_Ant1_2437_106Tone_RU56

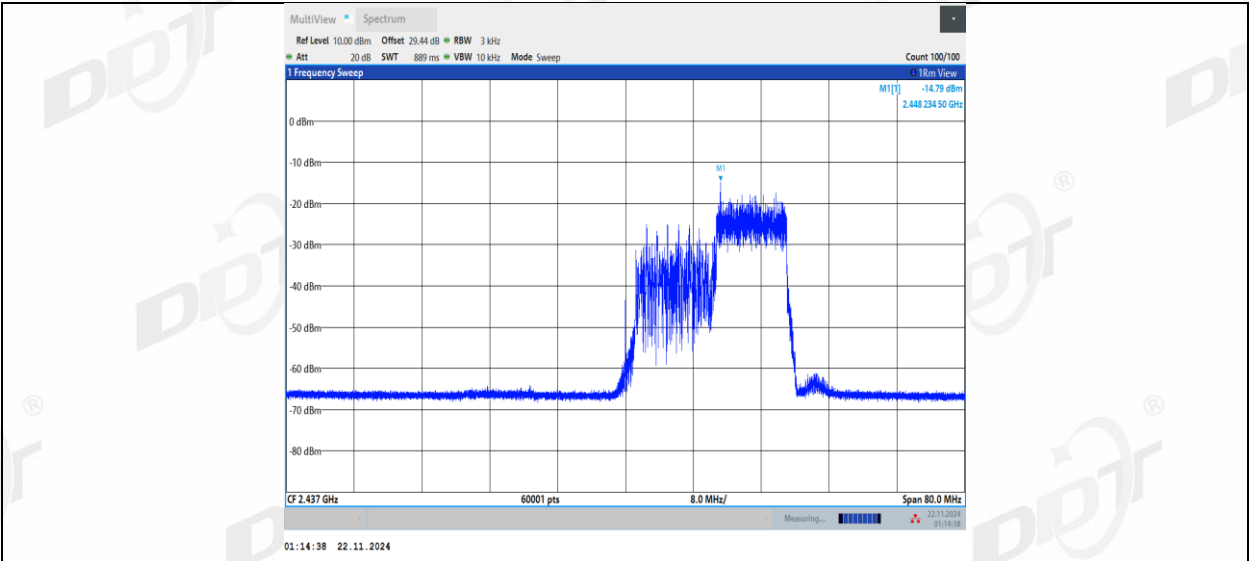


11AX40MIMO_Ant1_2437_242Tone_RU61

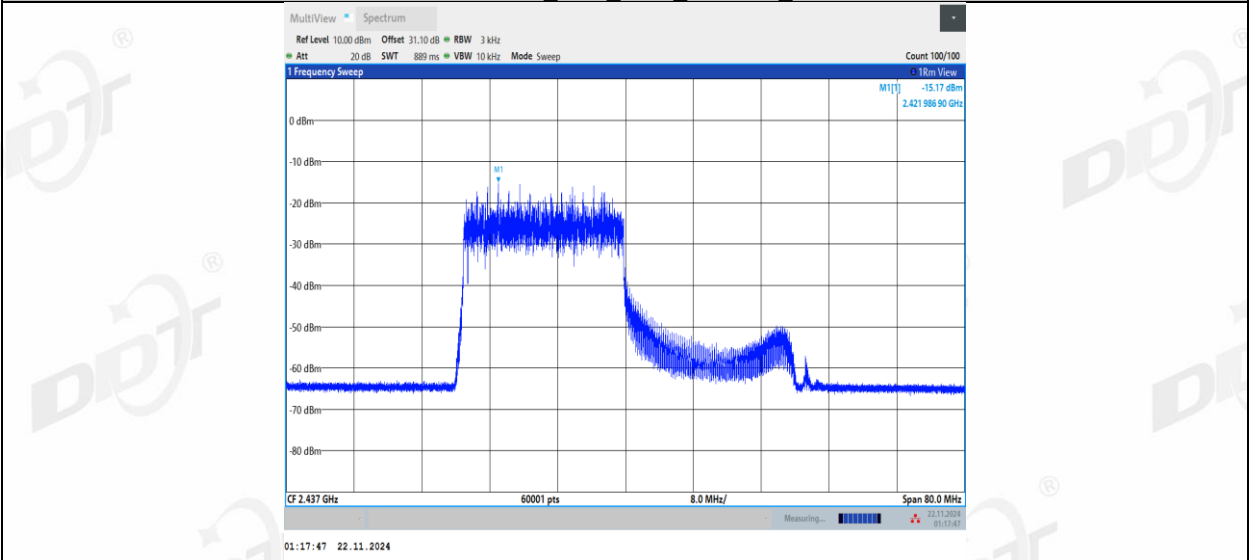


11AX40MIMO_Ant1_2437_242Tone_RU62

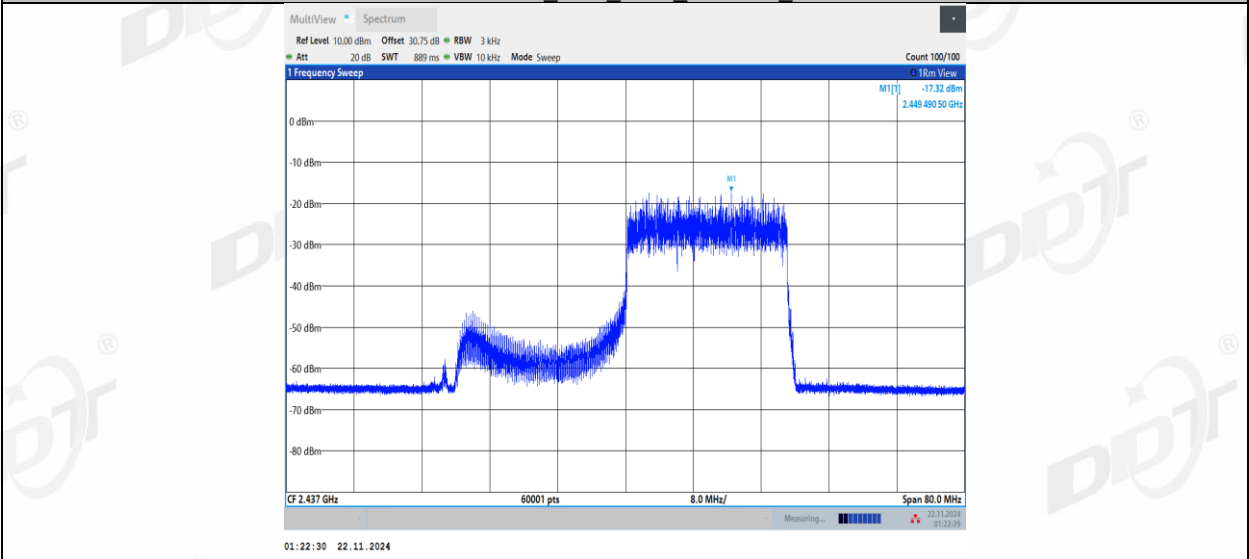


11AX40MIMO_Ant2_2437_106Tone_RU55

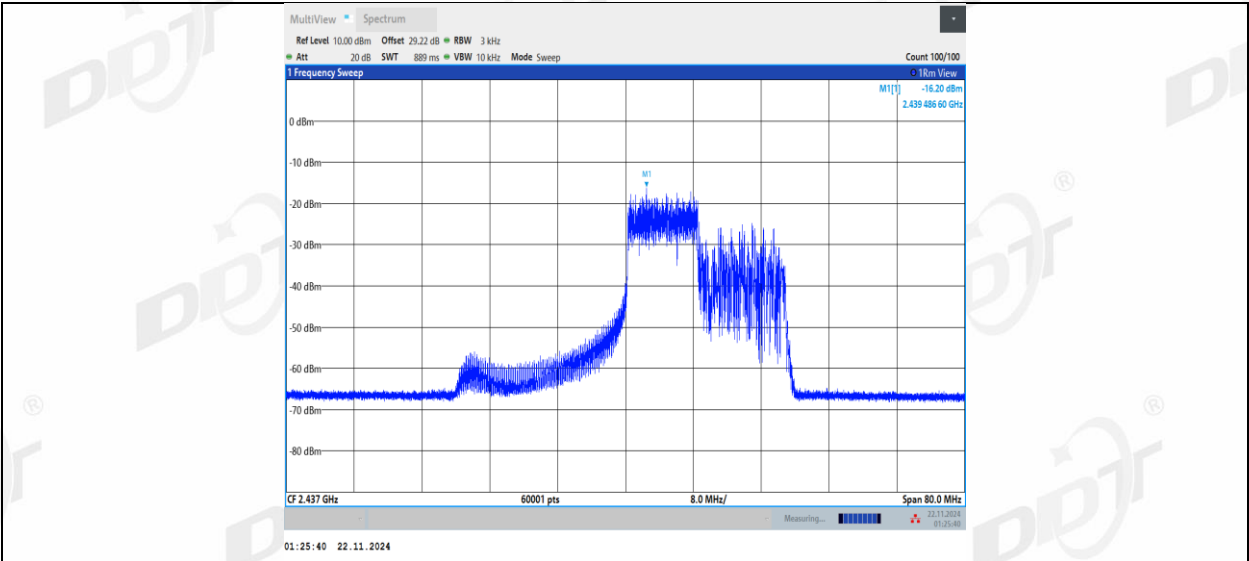


11AX40MIMO_Ant2_2437_106Tone_RU56

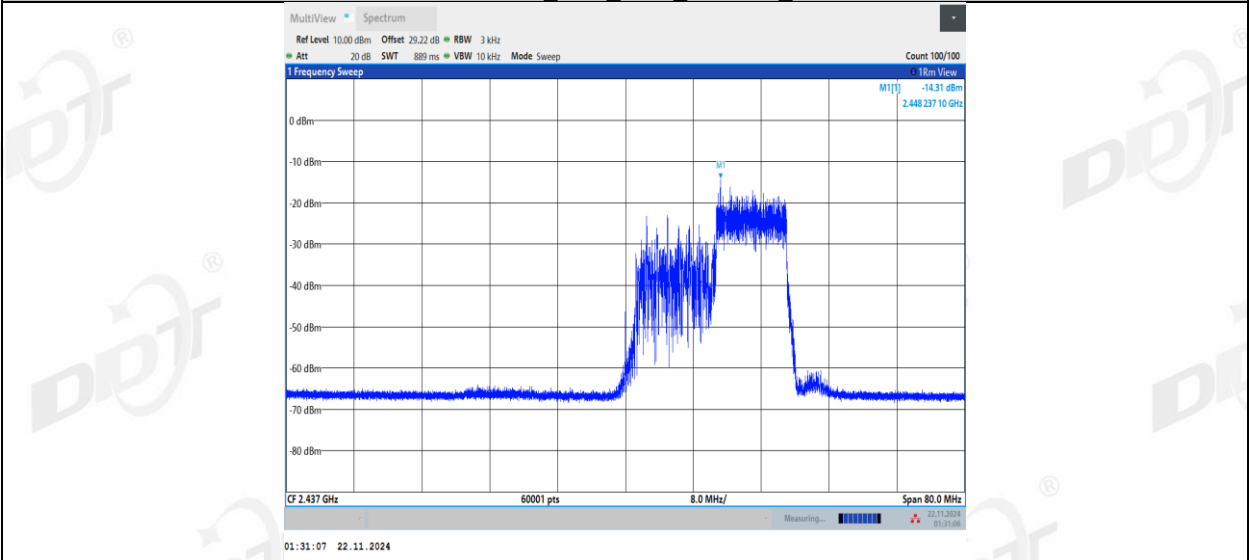


11AX40MIMO_Ant2_2437_242Tone_RU61

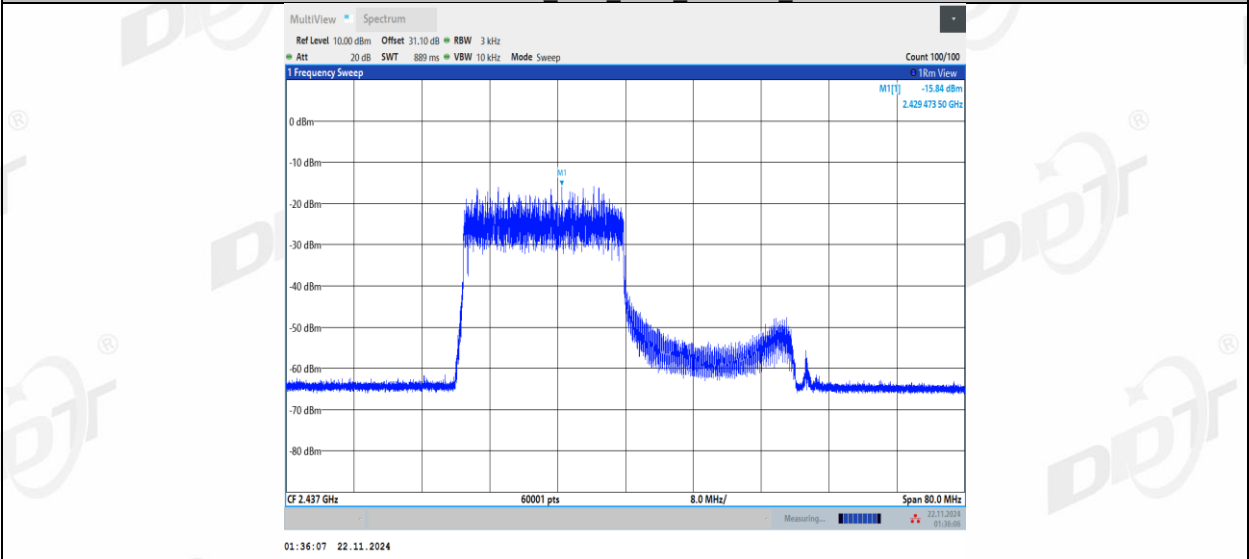


11AX40MIMO_Ant2_2437_242Tone_RU62

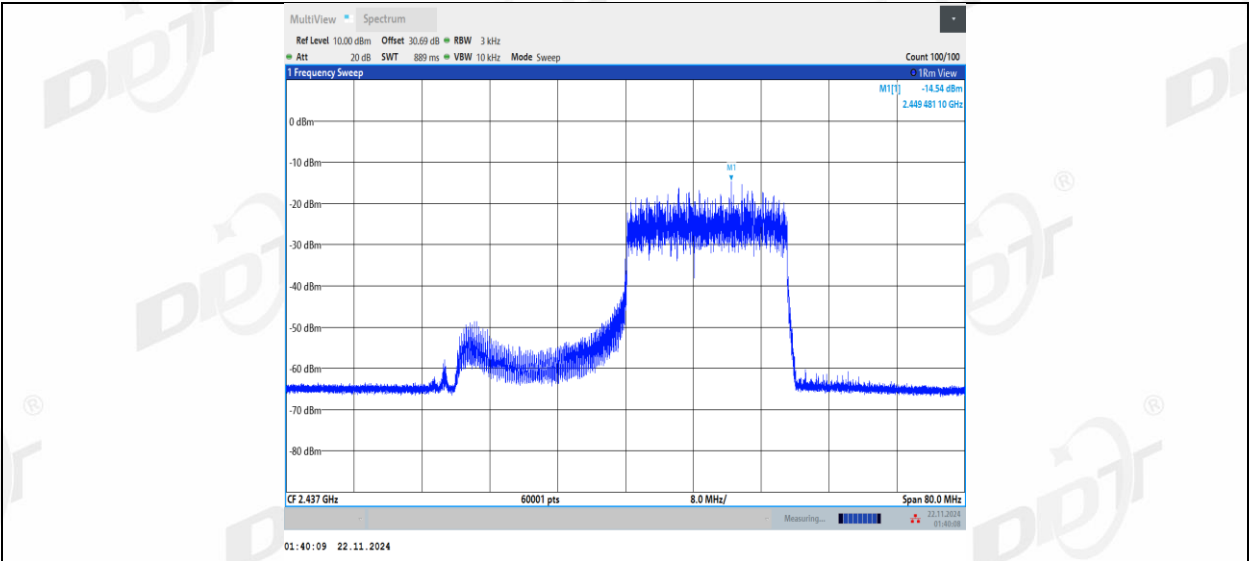


11AX40MIMO_Ant1_2452_106Tone_RU55

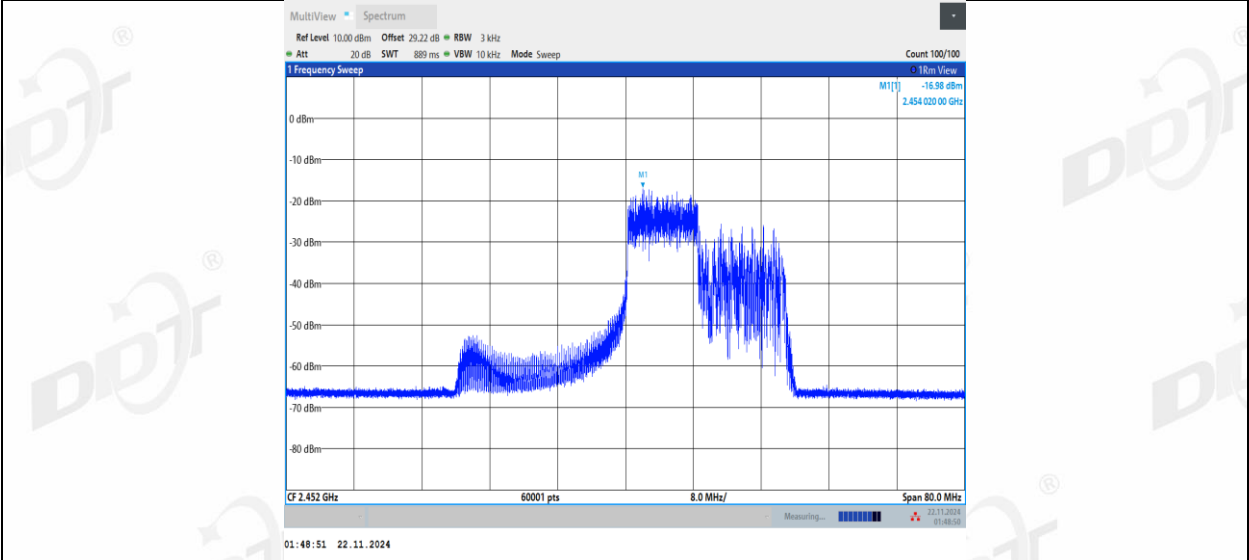


11AX40MIMO_Ant1_2452_106Tone_RU56

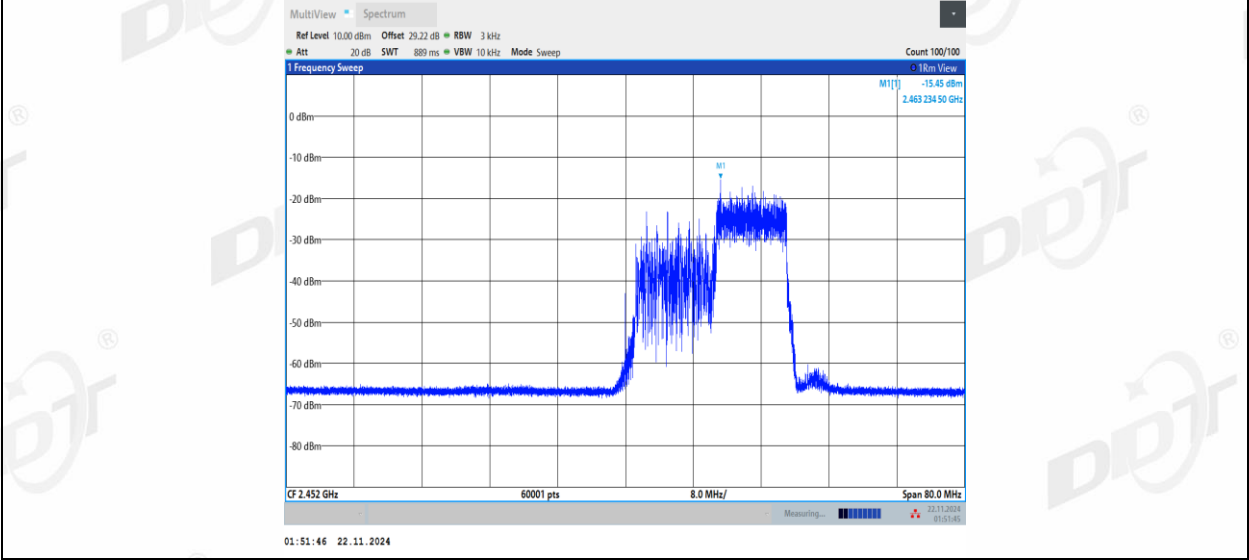


11AX40MIMO_Ant1_2452_242Tone_RU61

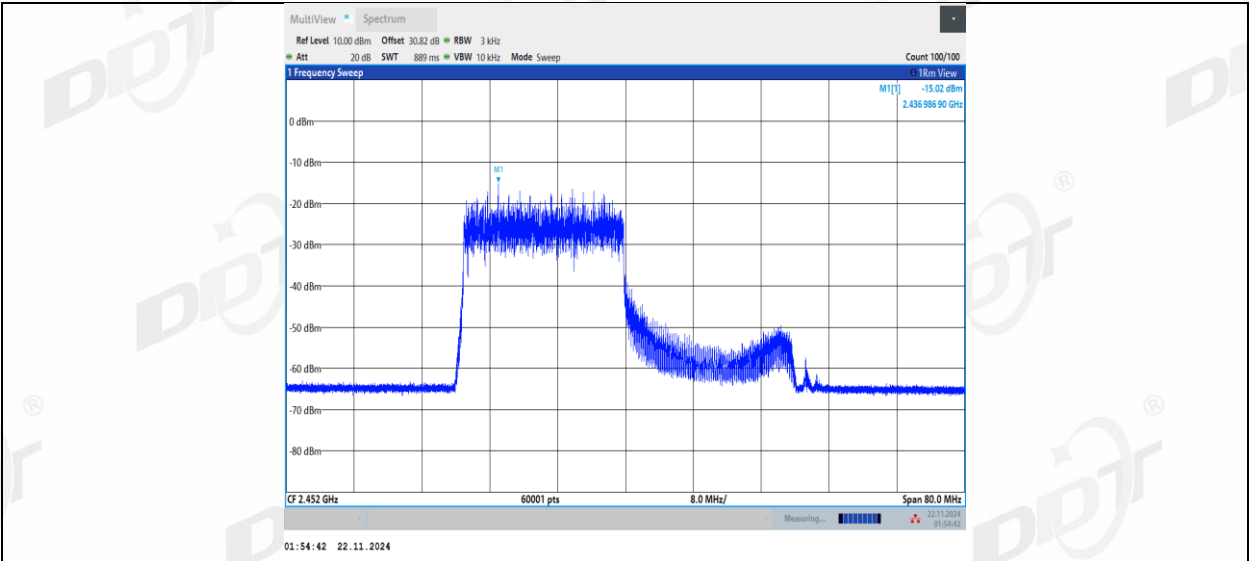


11AX40MIMO_Ant1_2452_242Tone_RU62

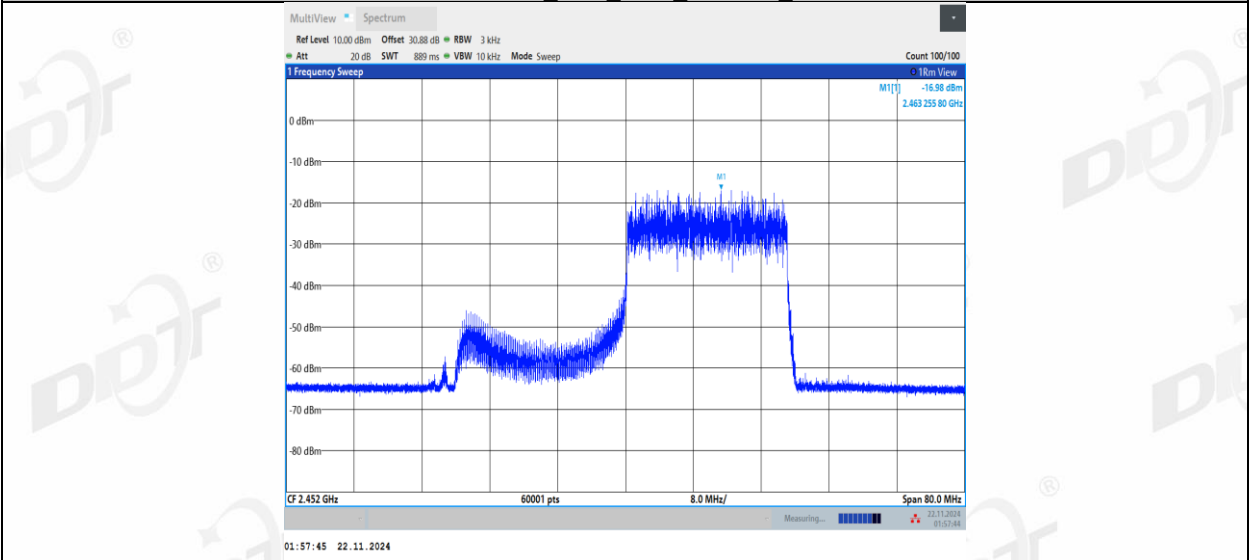


11AX40MIMO_Ant2_2452_106Tone_RU55

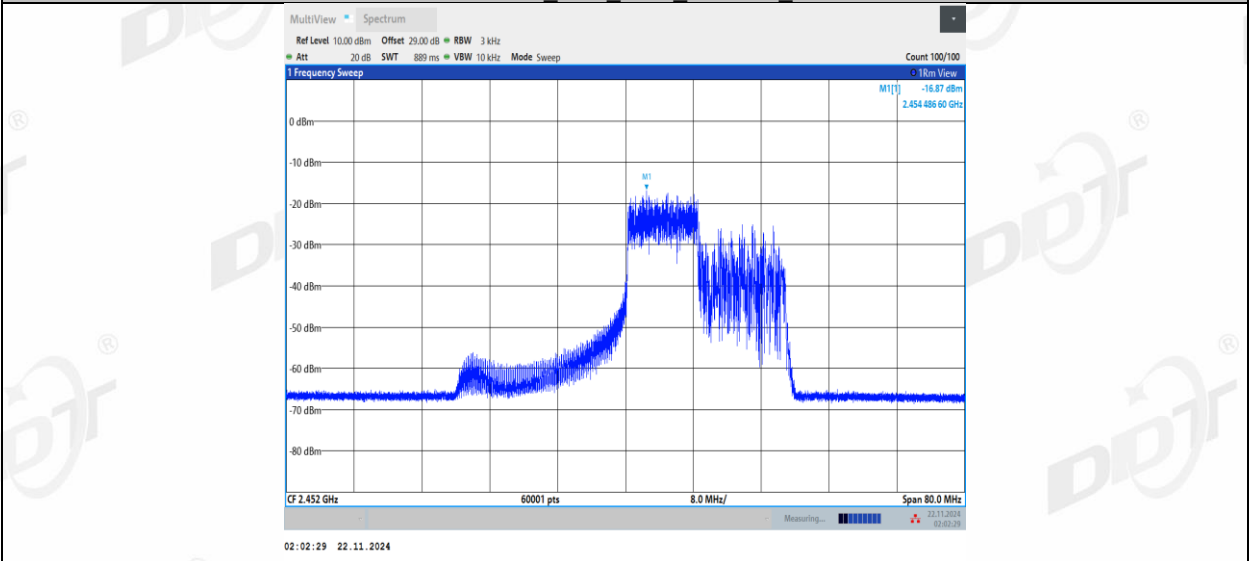


11AX40MIMO_Ant2_2452_106Tone_RU56

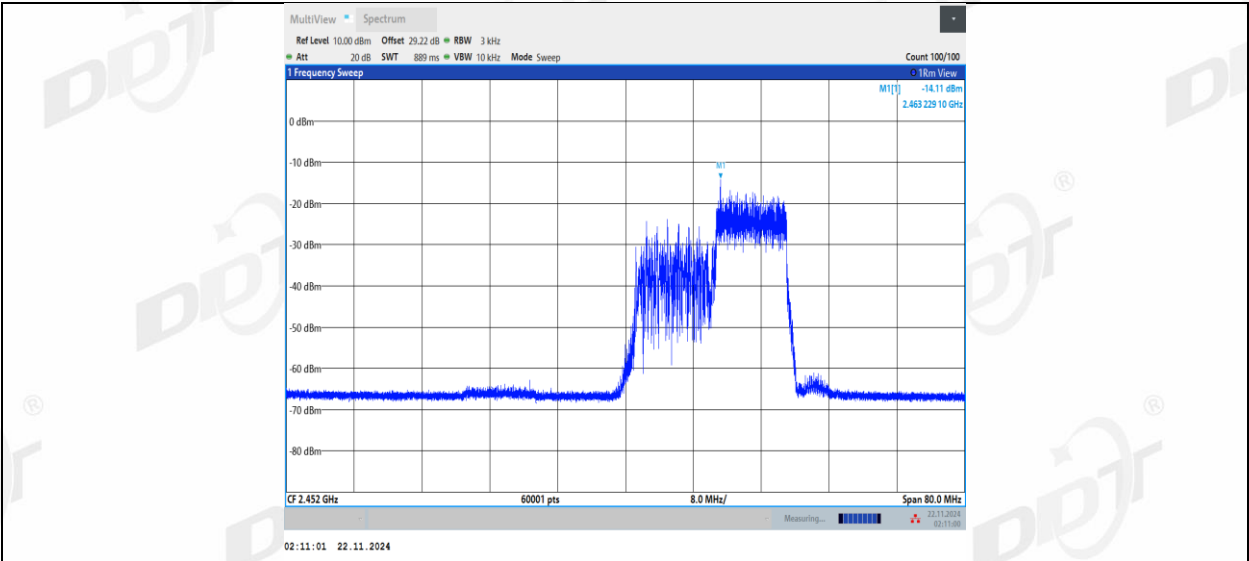

11AX40MIMO_Ant2_2452_242Tone_RU61

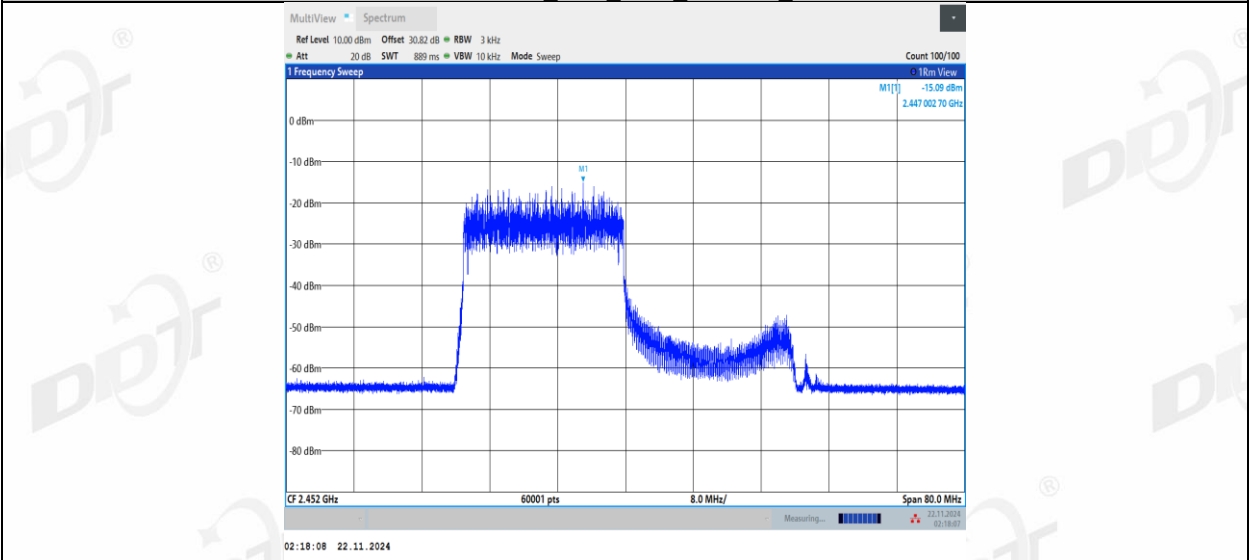


11AX40MIMO_Ant2_2452_242Tone_RU62

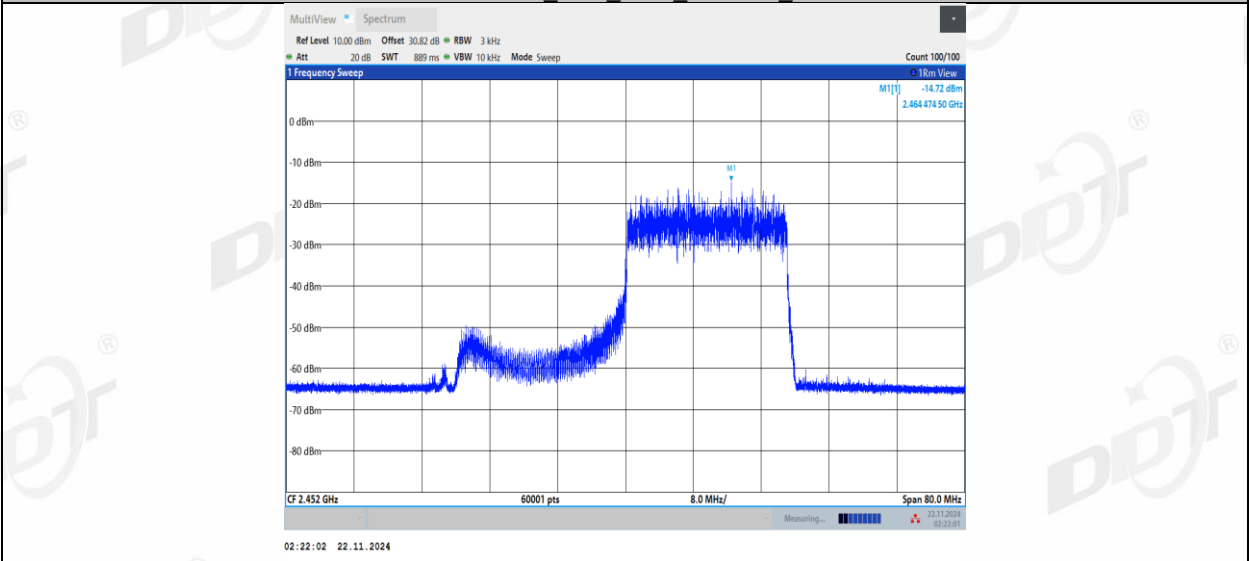

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

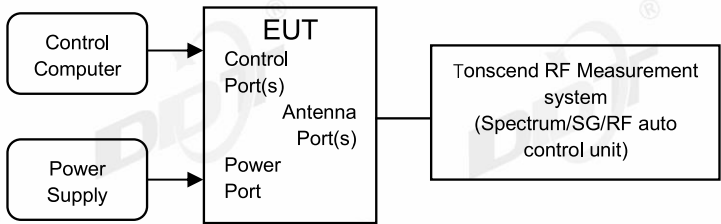

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

8.4. Test result


Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.3℃,46.1%RH	Test Date:	2024.11.07
Test Power Supply:	Battery	Sample Number:	S24121719-005

EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass


8.5. Test graphs





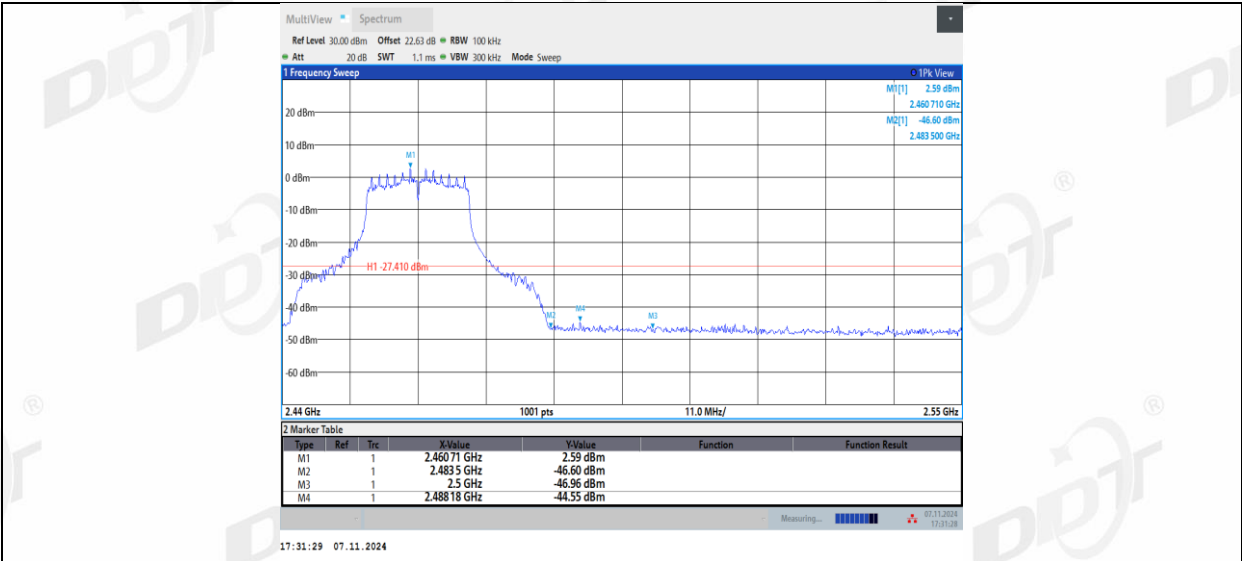


11G_Ant2_High_2462

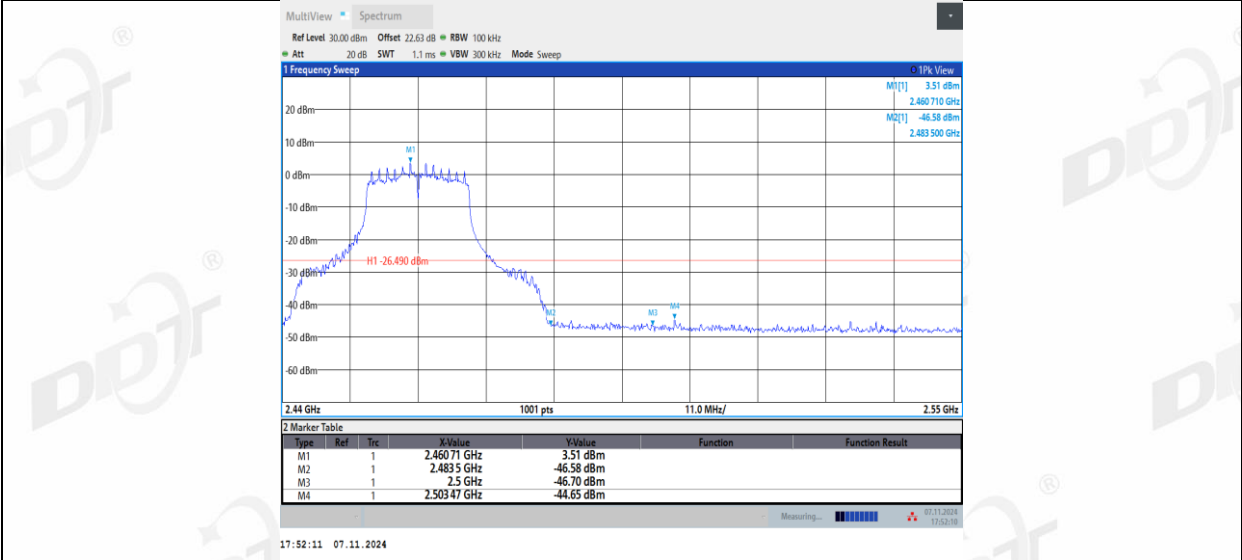

11N20MIMO_Ant1_Low_2412




11N20MIMO_Ant2_Low_2412

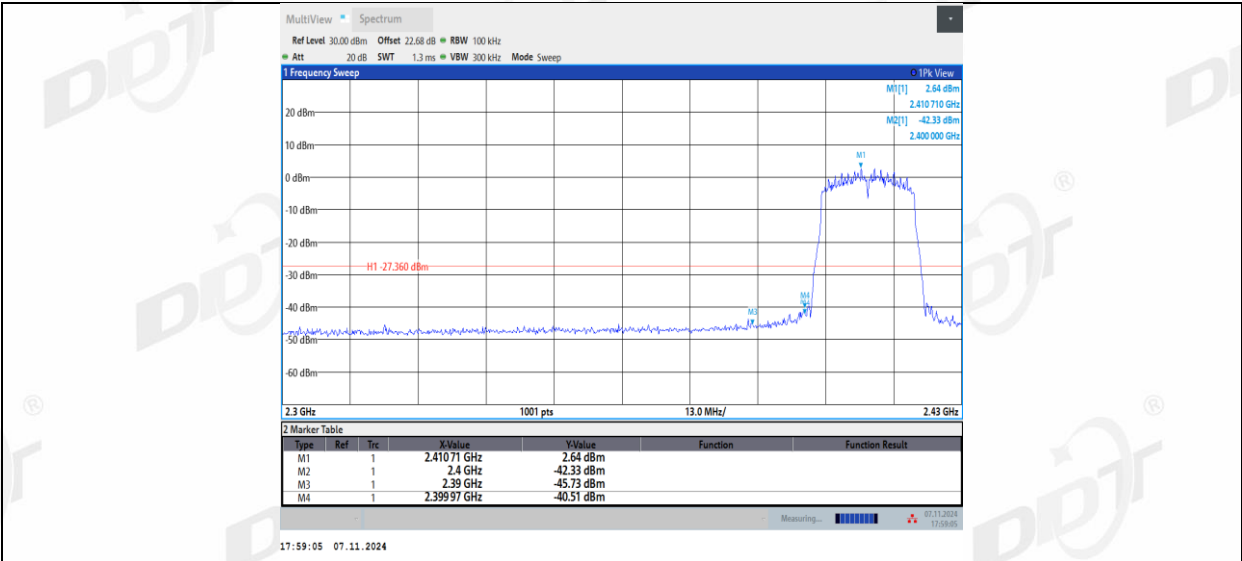


11N20MIMO_Ant1_High_2462




11N20MIMO_Ant2_High_2462

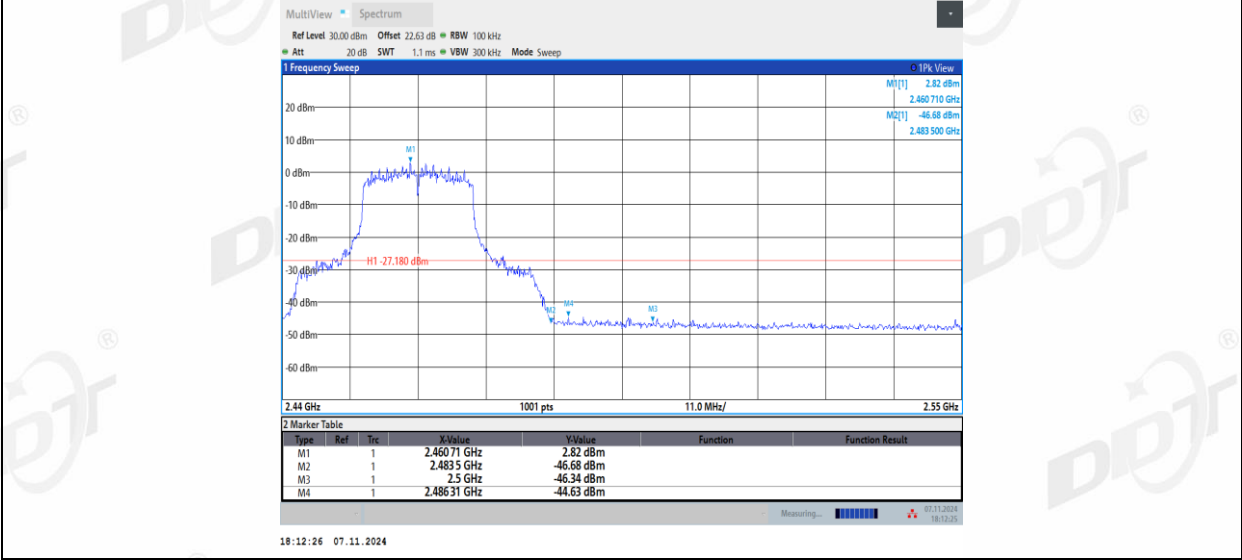


11N40MIMO_Ant1_Low_2422

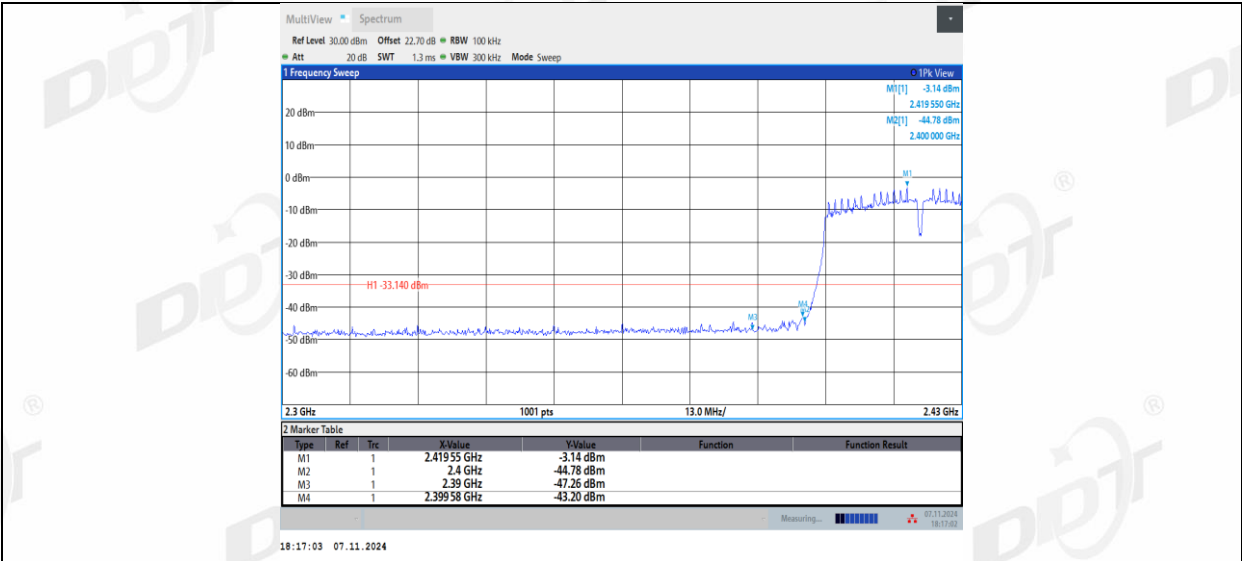


11N40MIMO_Ant2_Low_2422

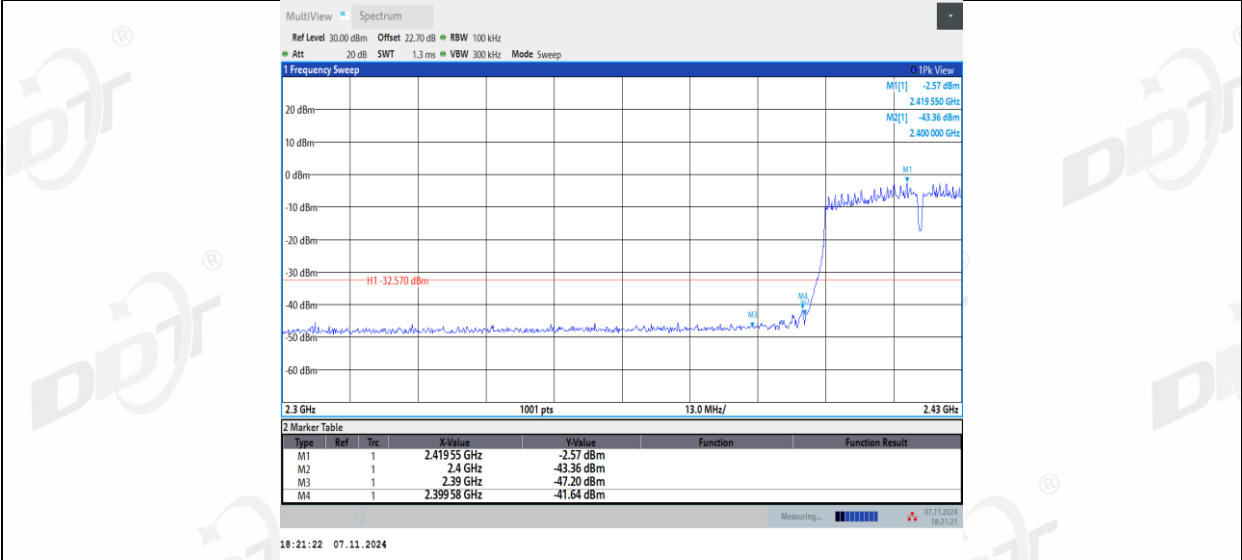

11N40MIMO_Ant1_High_2452

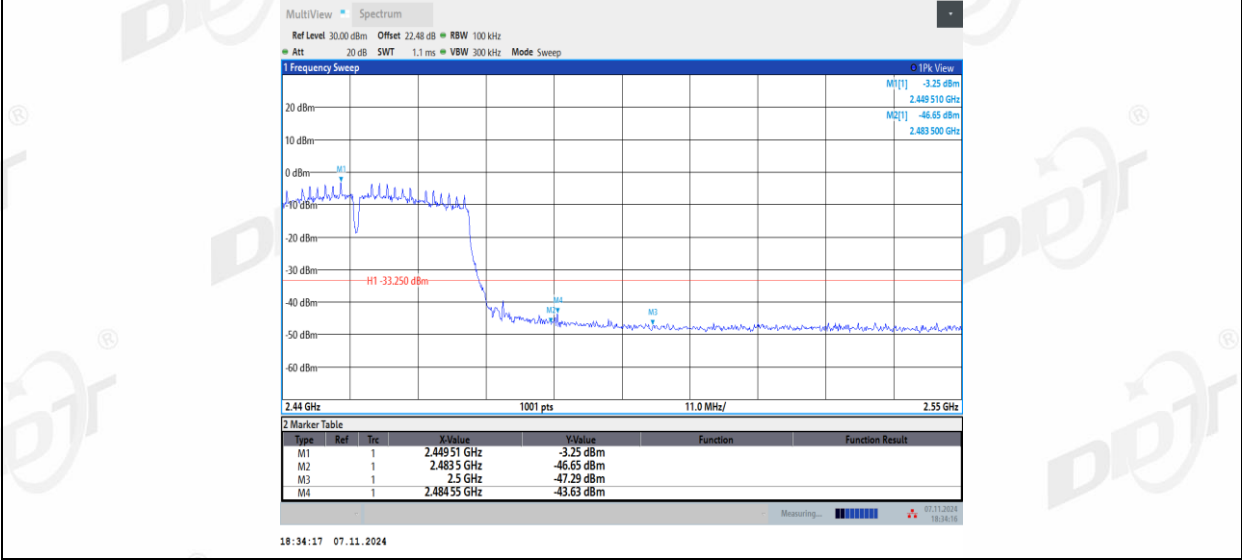

11N40MIMO_Ant2_High_2452

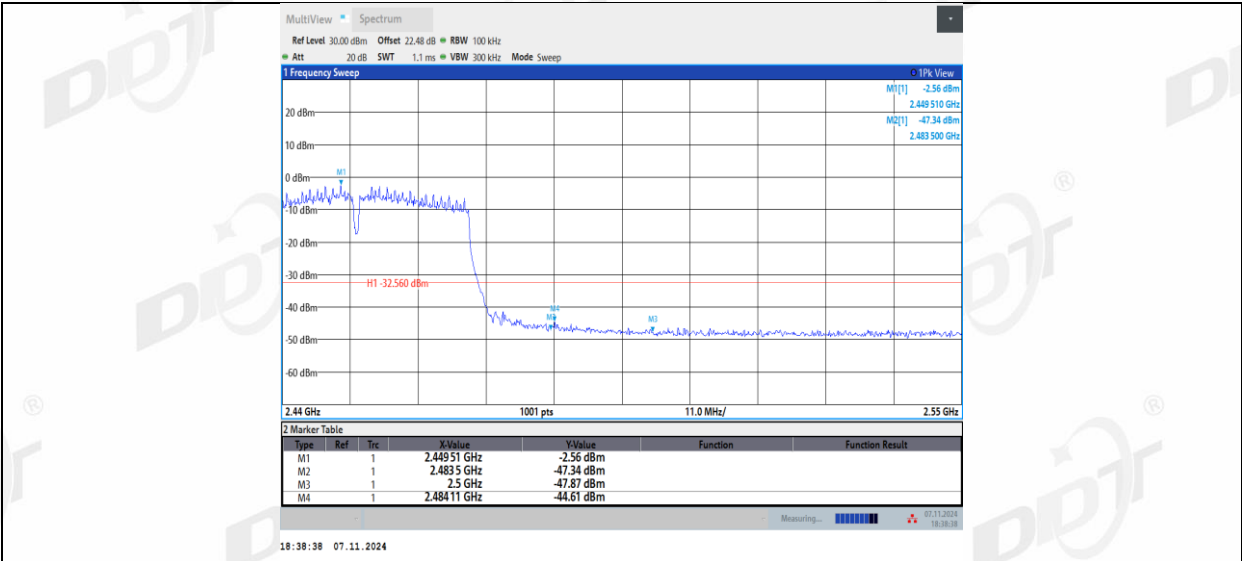

11AX20MIMO_Ant1_Low_2412



11AX20MIMO_Ant2_Low_2412




11AX20MIMO_Ant1_High_2462




11AX20MIMO_Ant2_High_2462




11AX40MIMO_Ant1_Low_2422

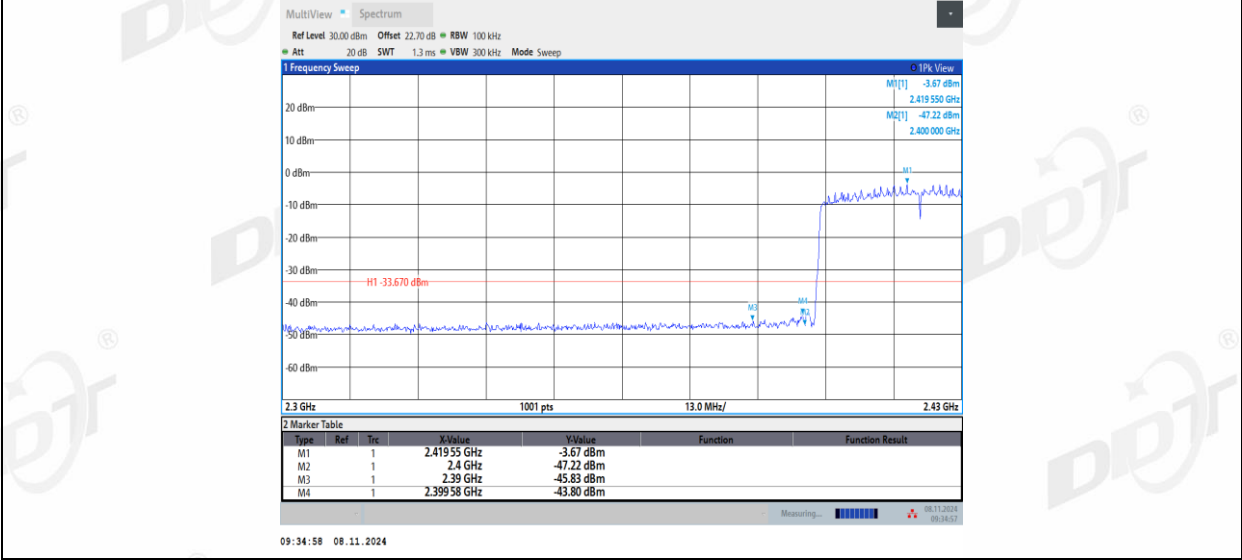


11AX40MIMO_Ant2_Low_2422

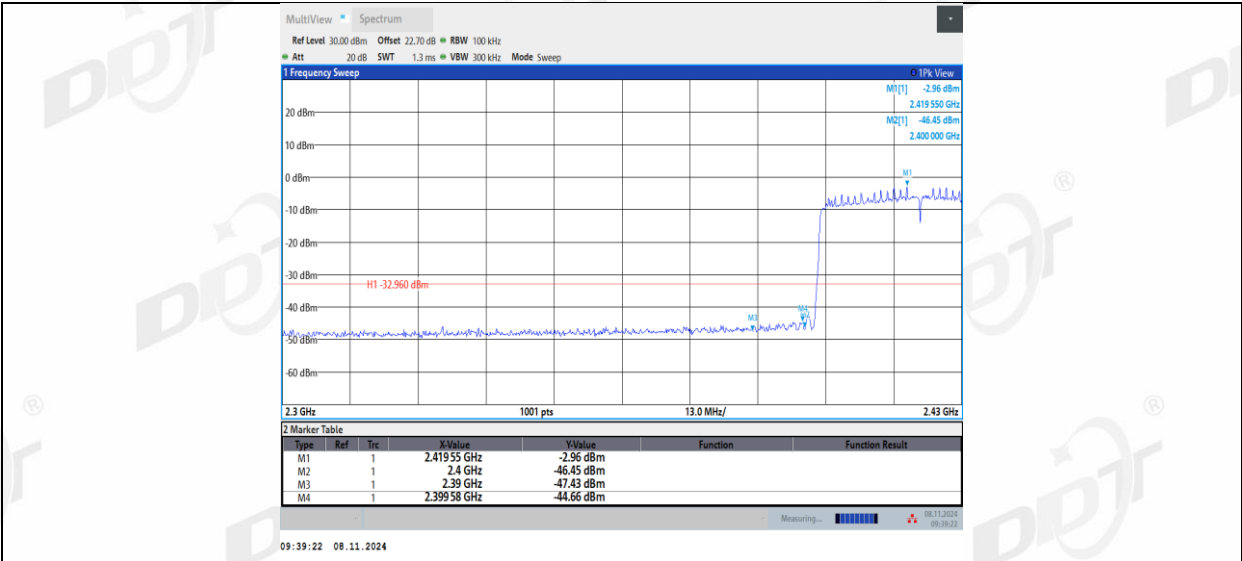

11AX40MIMO_Ant1_High_2452

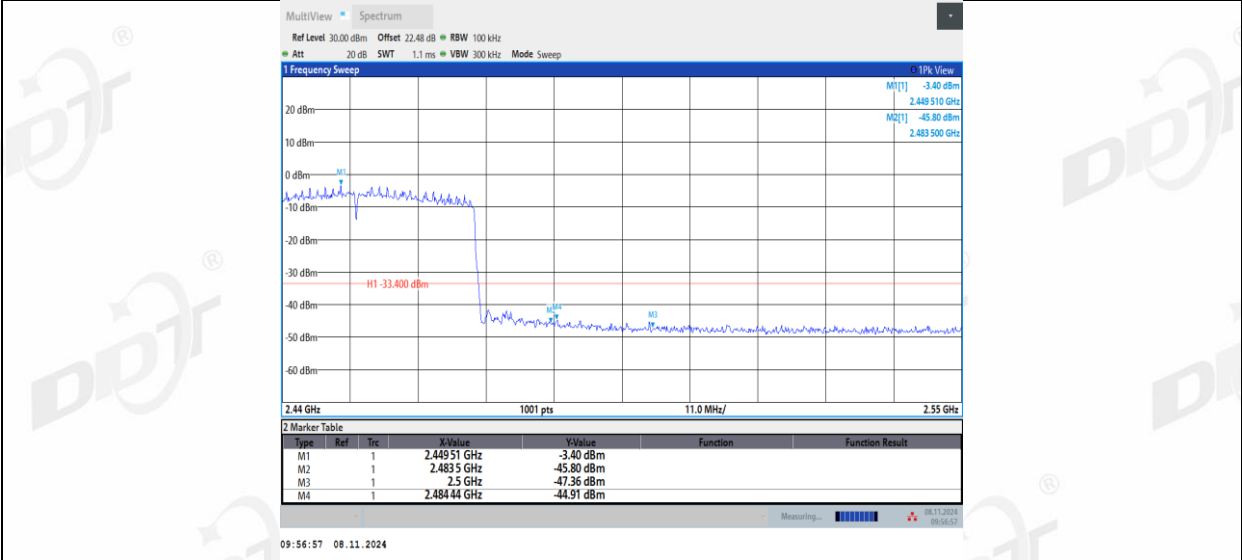


11AX40MIMO_Ant2_High_2452

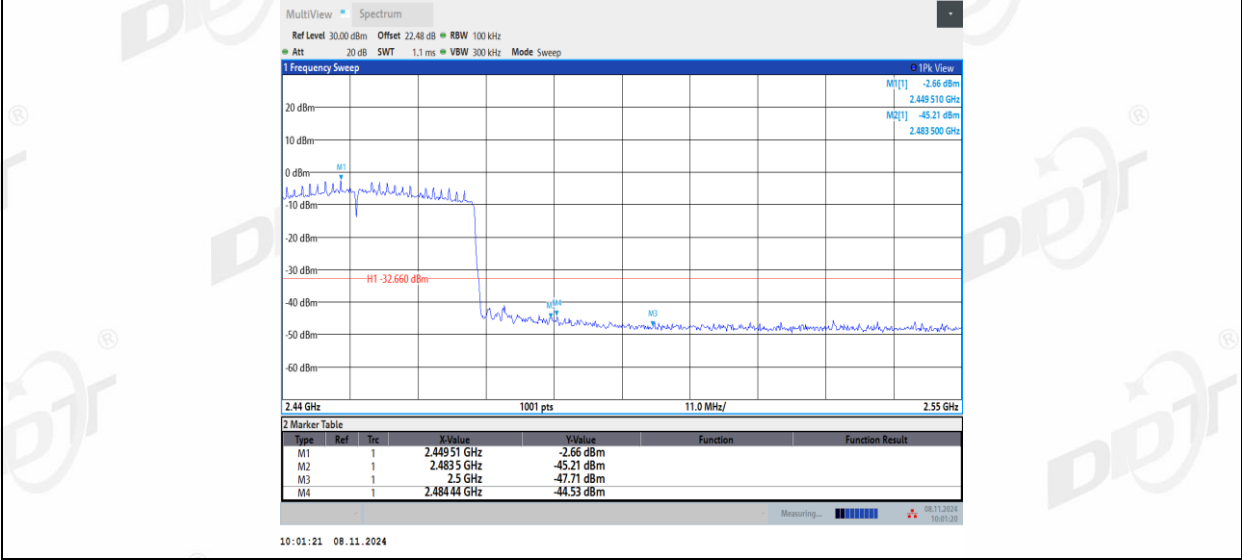

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

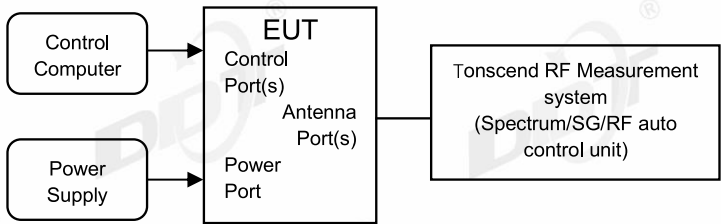

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

- Connect EUT's antenna output to spectrum analyzer by RF cable.
- Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

- (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


9.4. Test result


Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#		
Ambient Condition:	24.3℃,46.1%RH	Test Date:	2024.11.07		
Test Power Supply:	Battery	Sample Number:	S24121719-005		

EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass


9.5. Test graphs



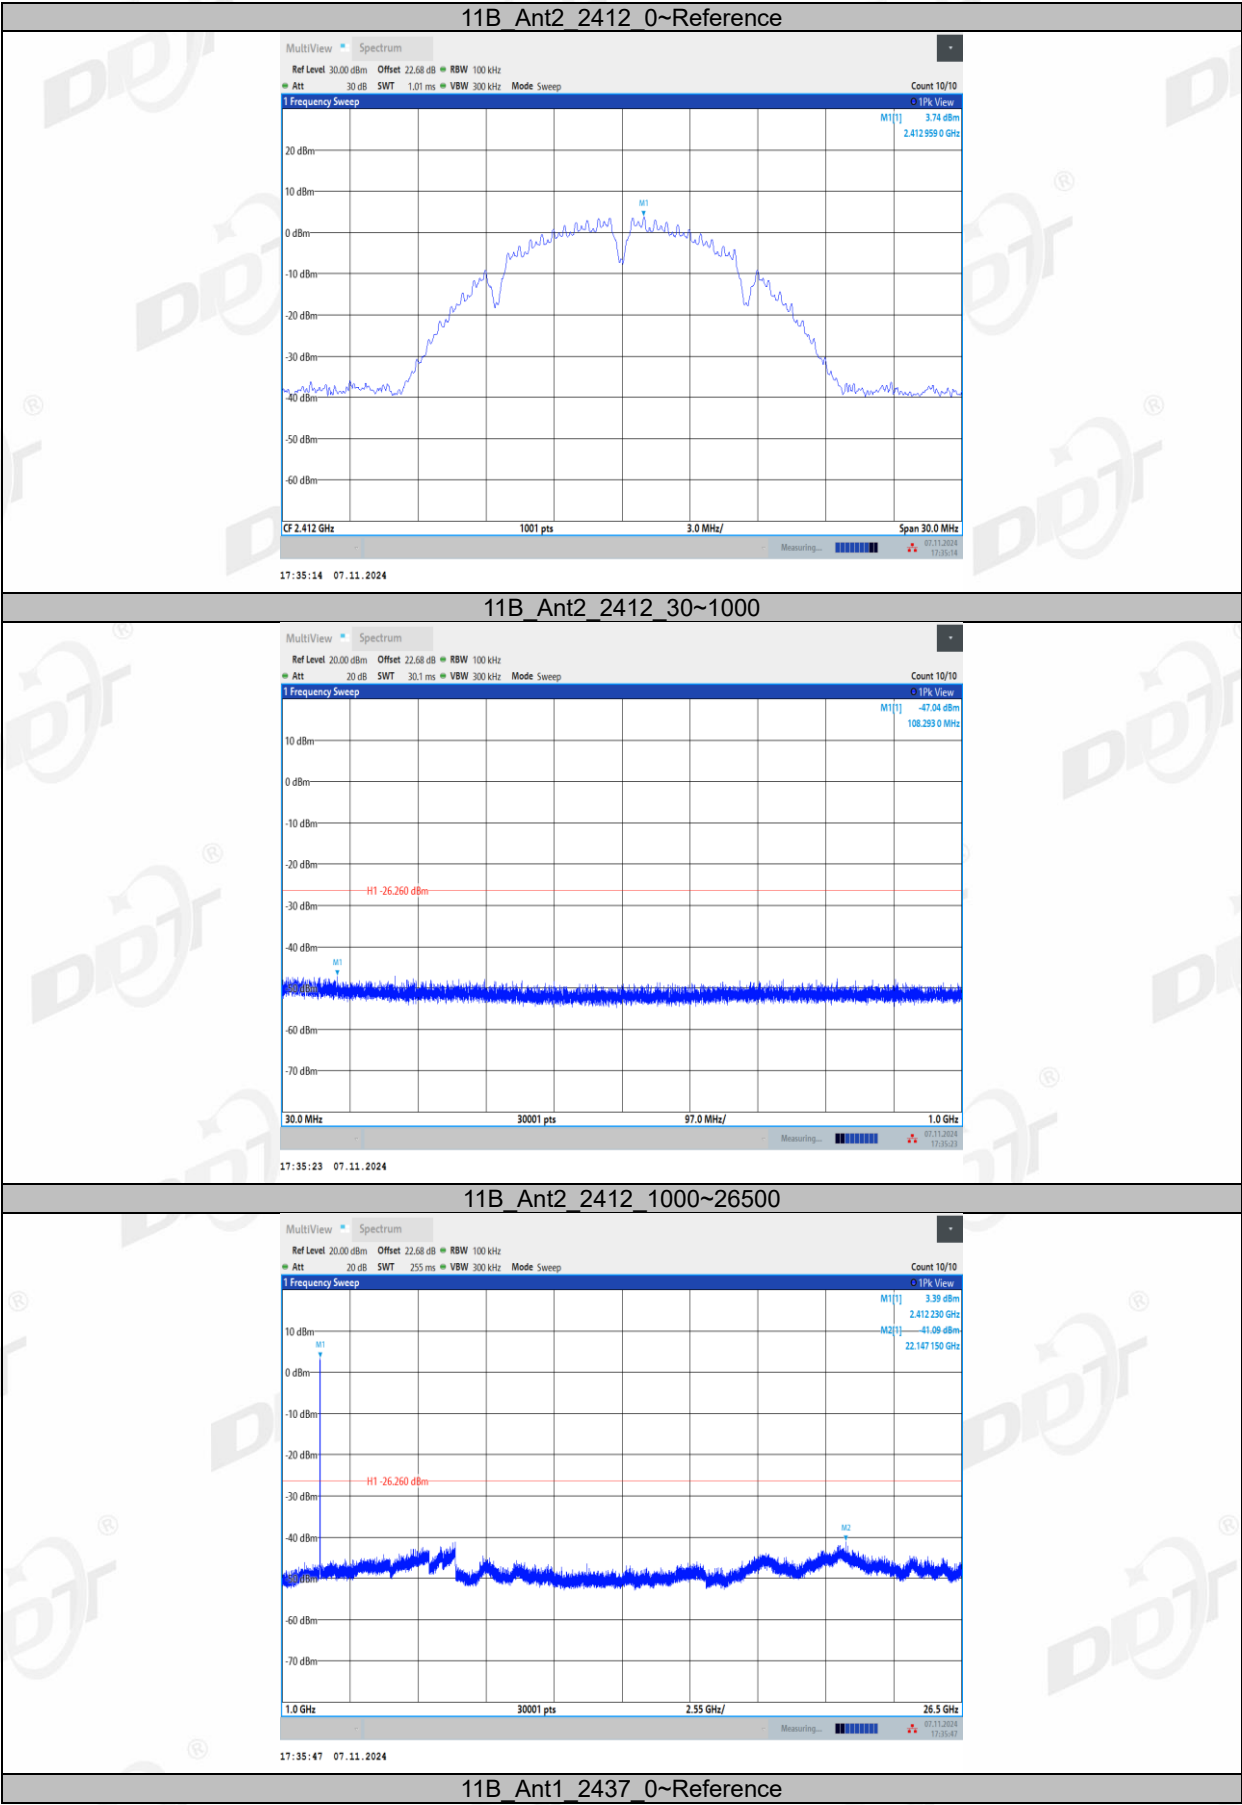


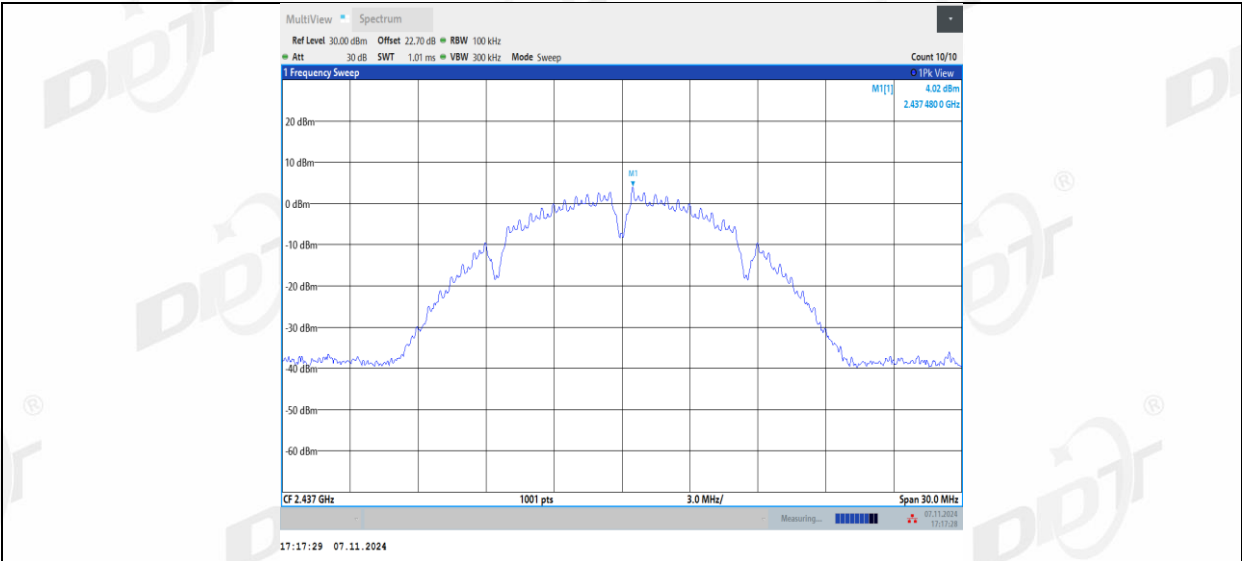


11B_Ant1_2437_30~1000

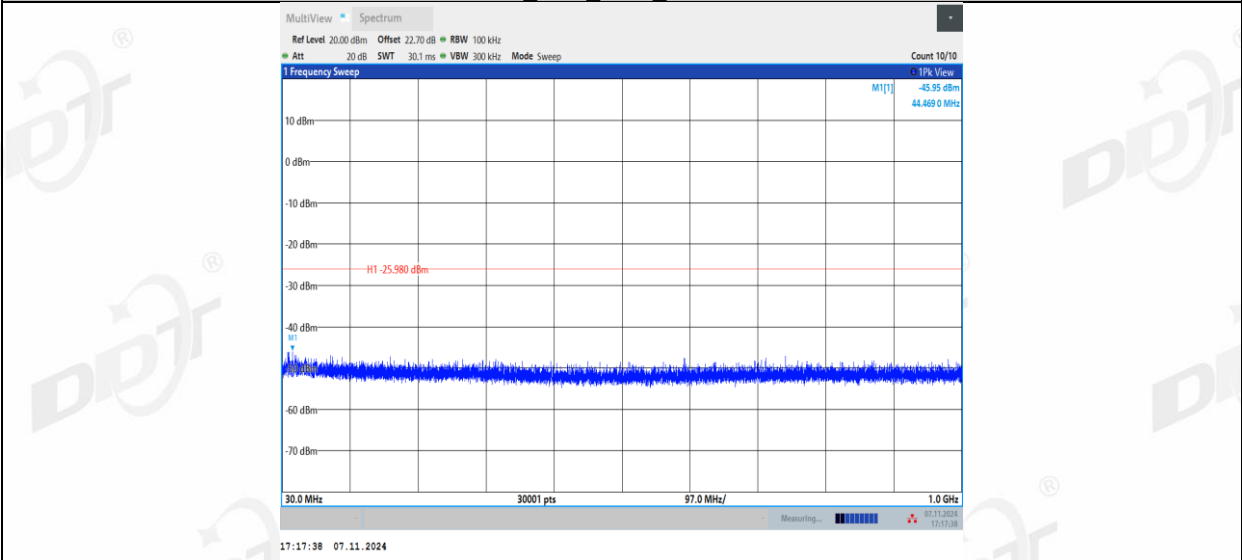


11B_Ant1_2437_1000~26500

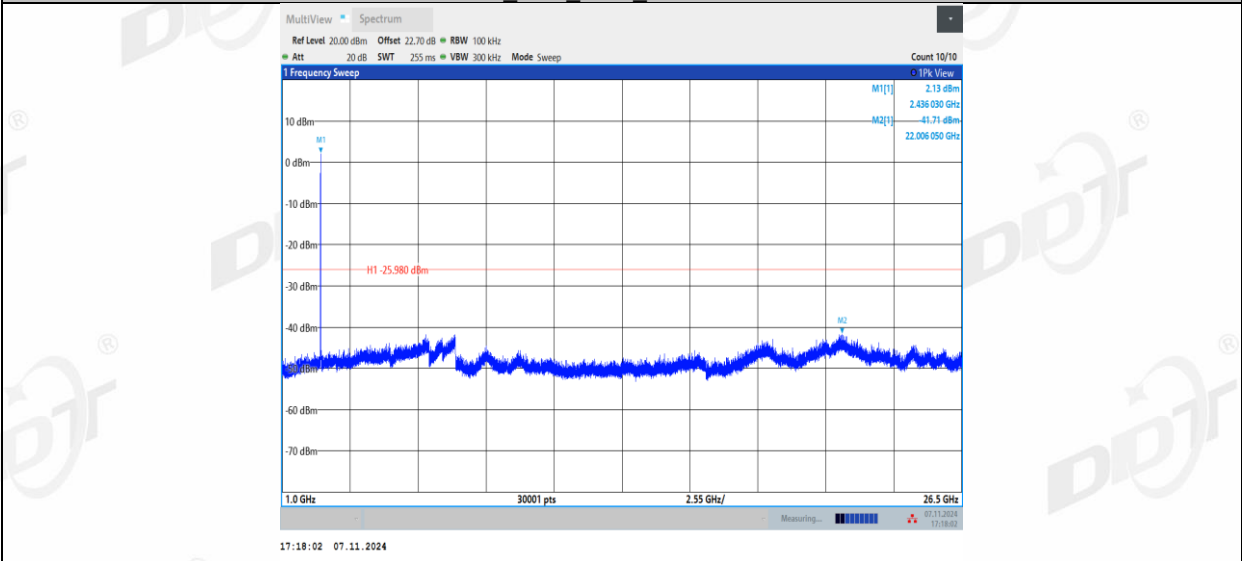


11B_Ant2_2437_0~Reference

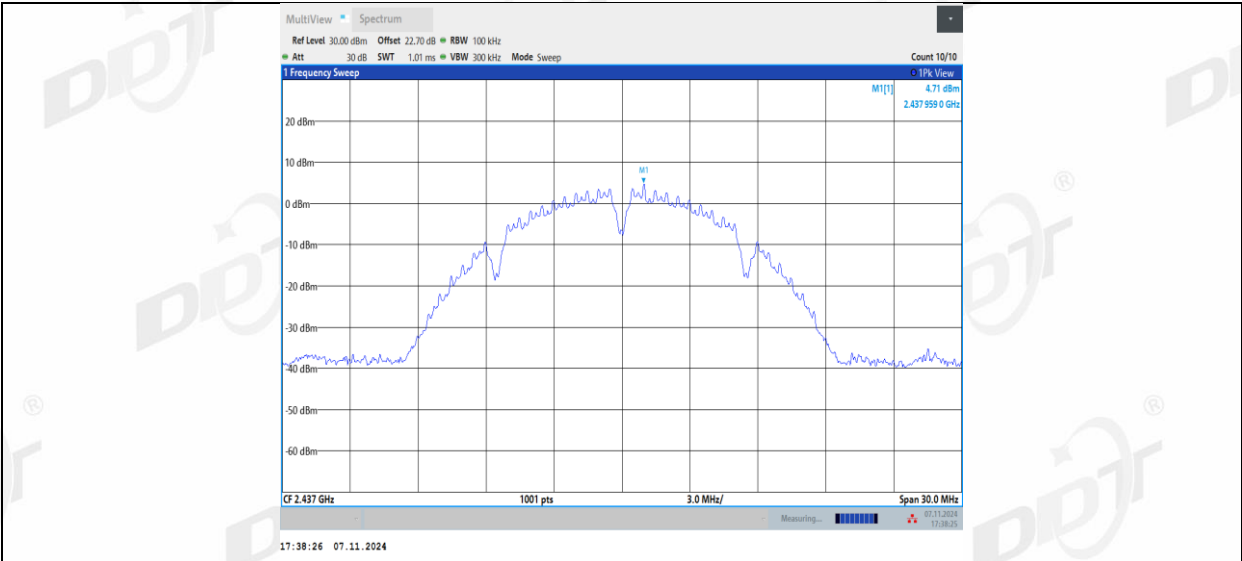


11B_Ant2_2437_30~1000

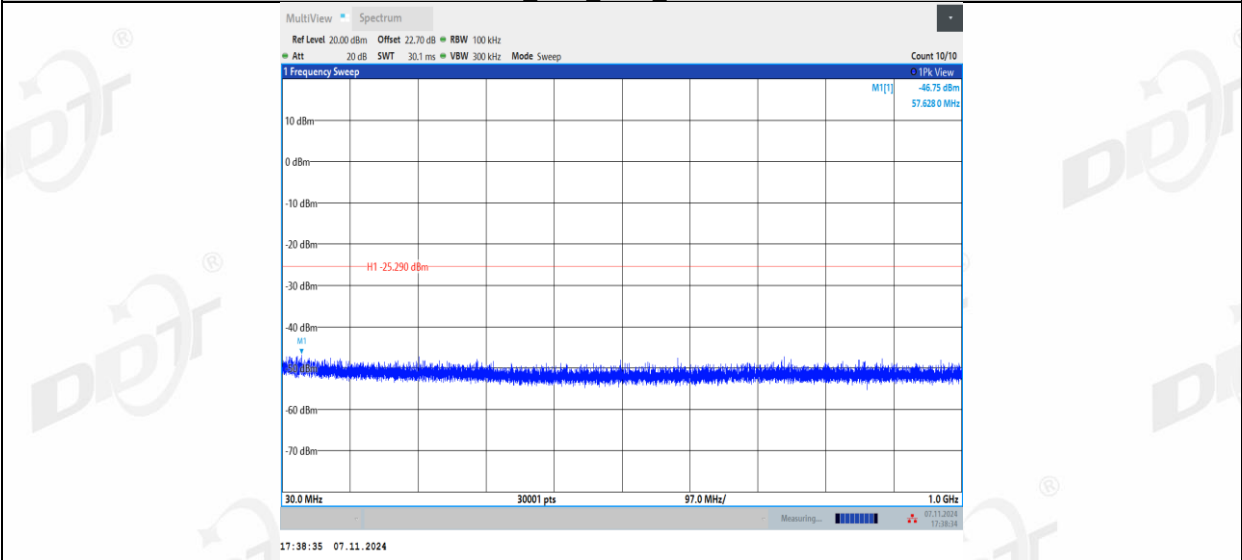


11B_Ant2_2437_1000~26500

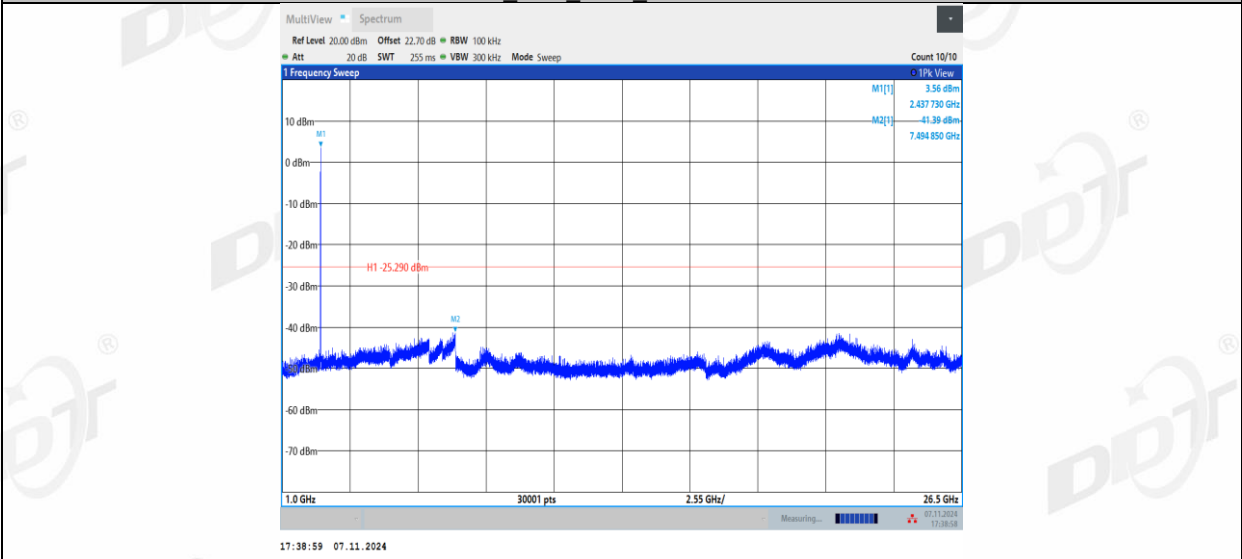


11B_Ant1_2462_0~Reference

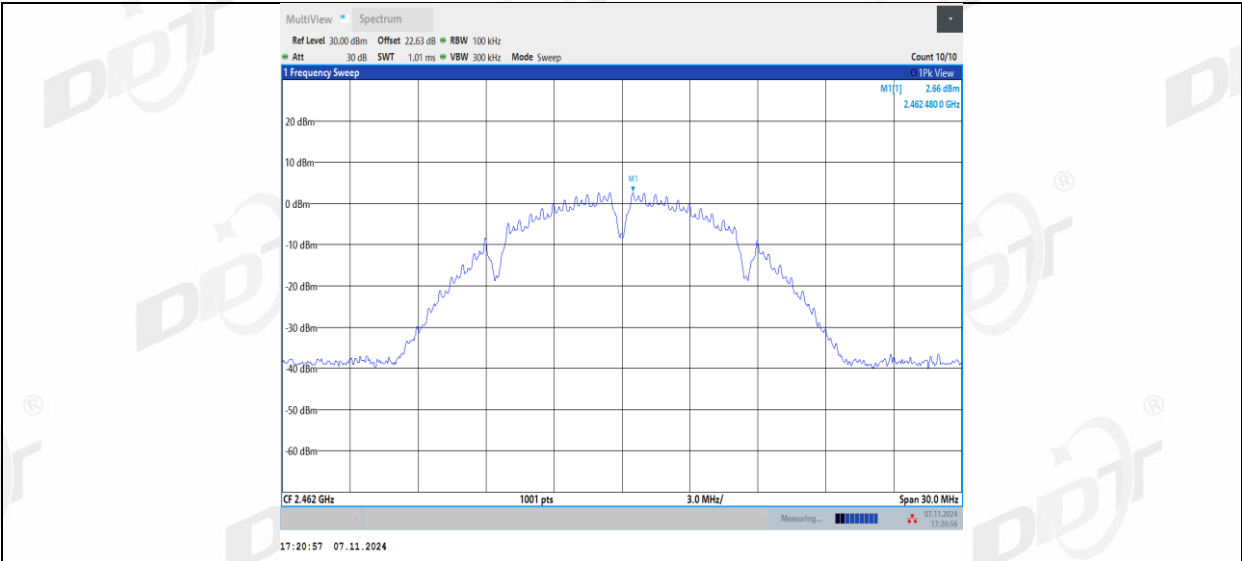


11B_Ant1_2462_30~1000

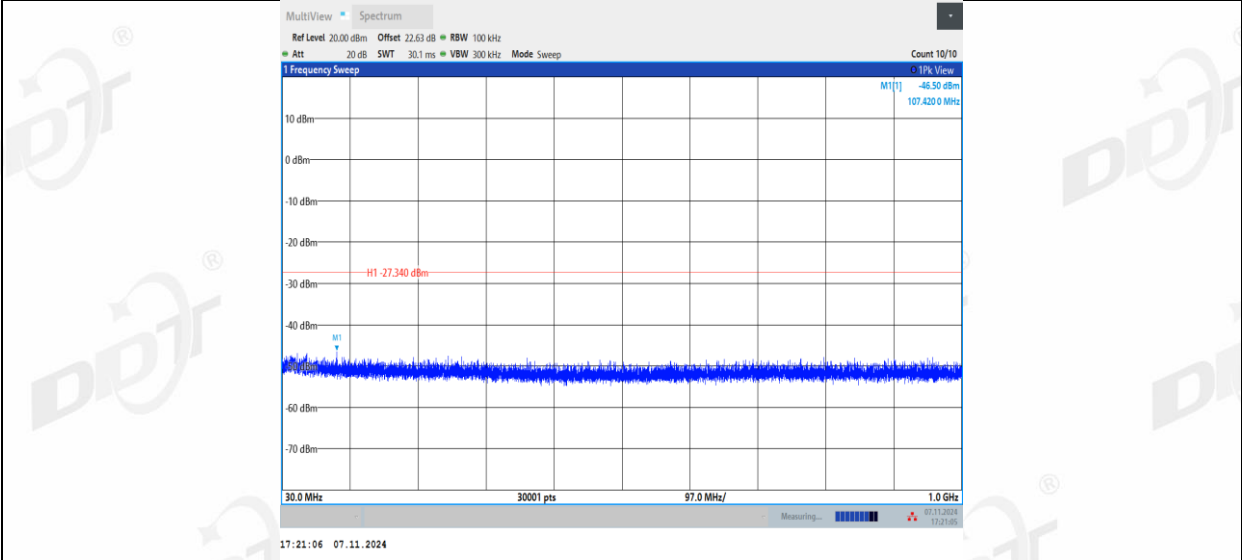


11B_Ant1_2462_1000~26500

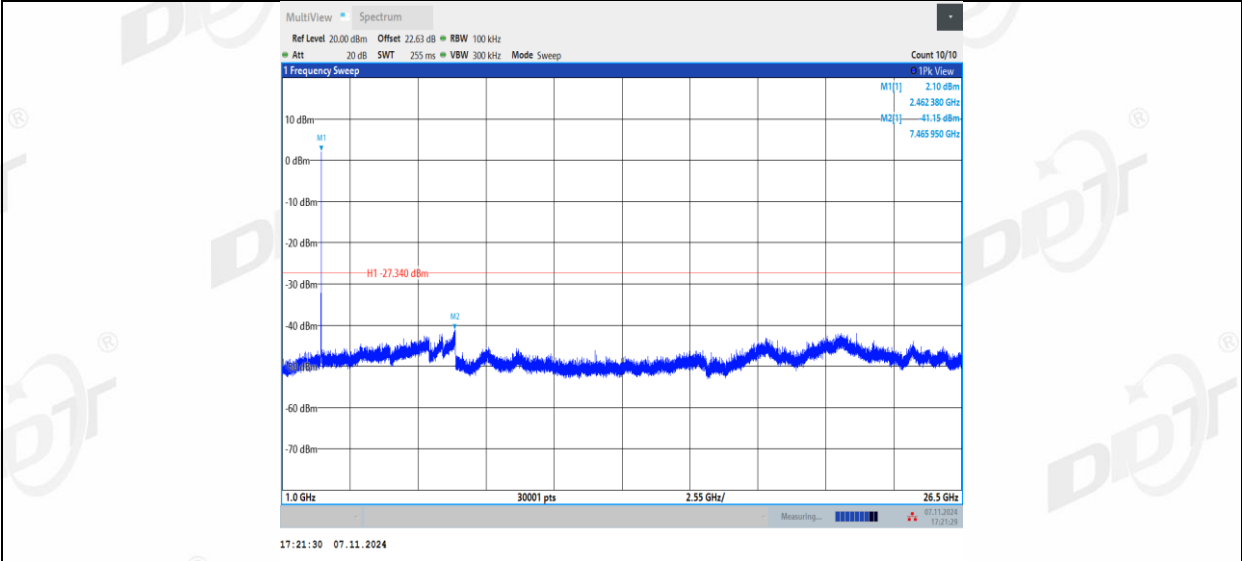


11B_Ant2_2462_0~Reference

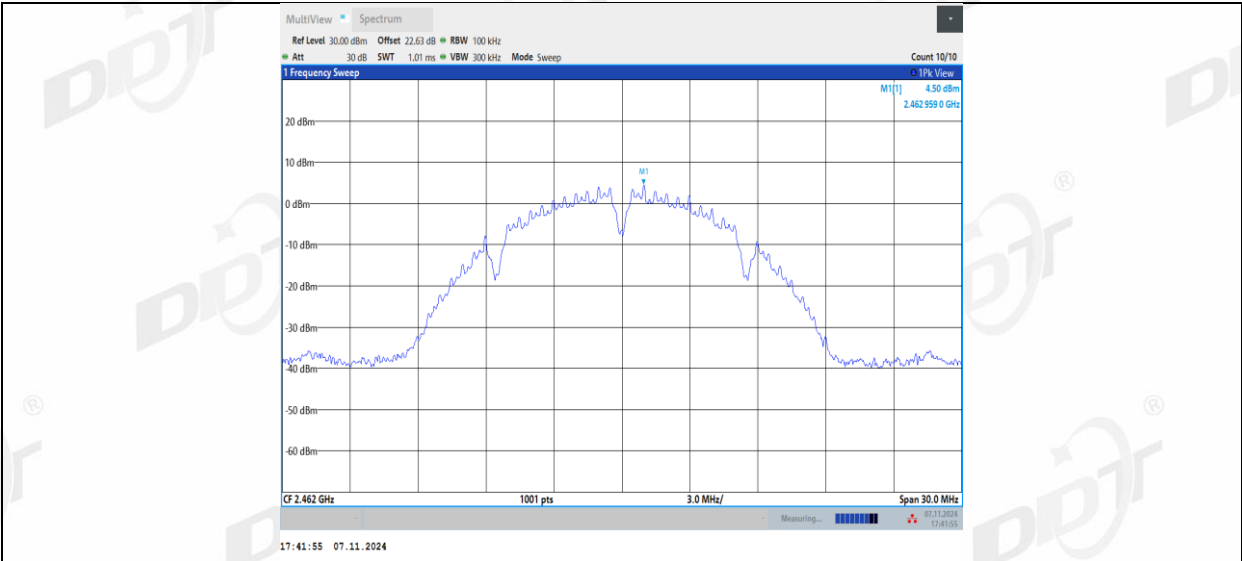


11B_Ant2_2462_30~1000

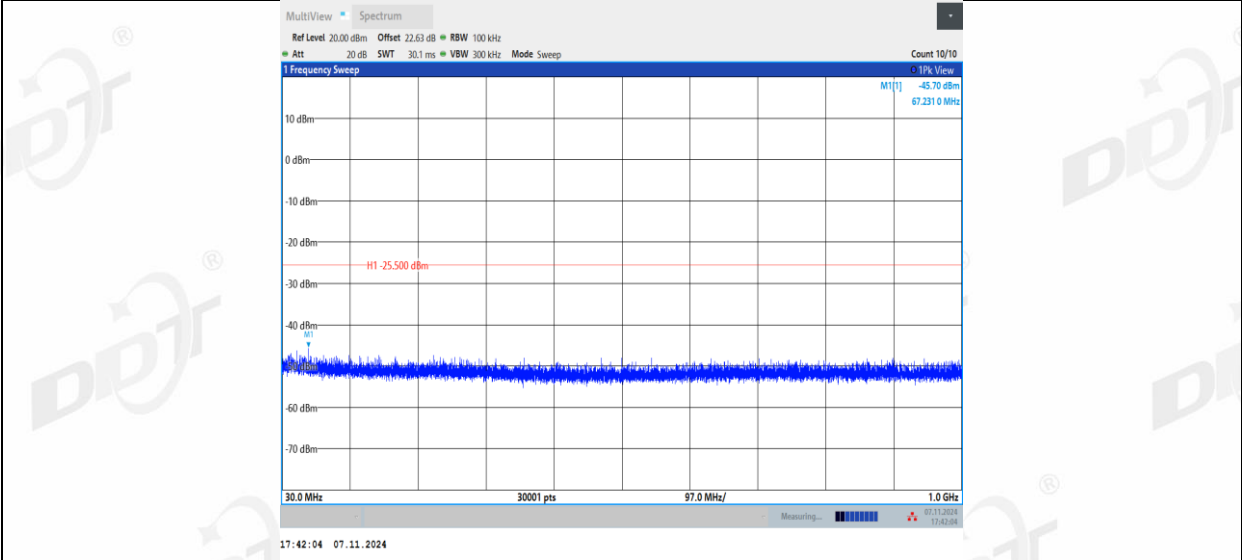


11B_Ant2_2462_1000~26500

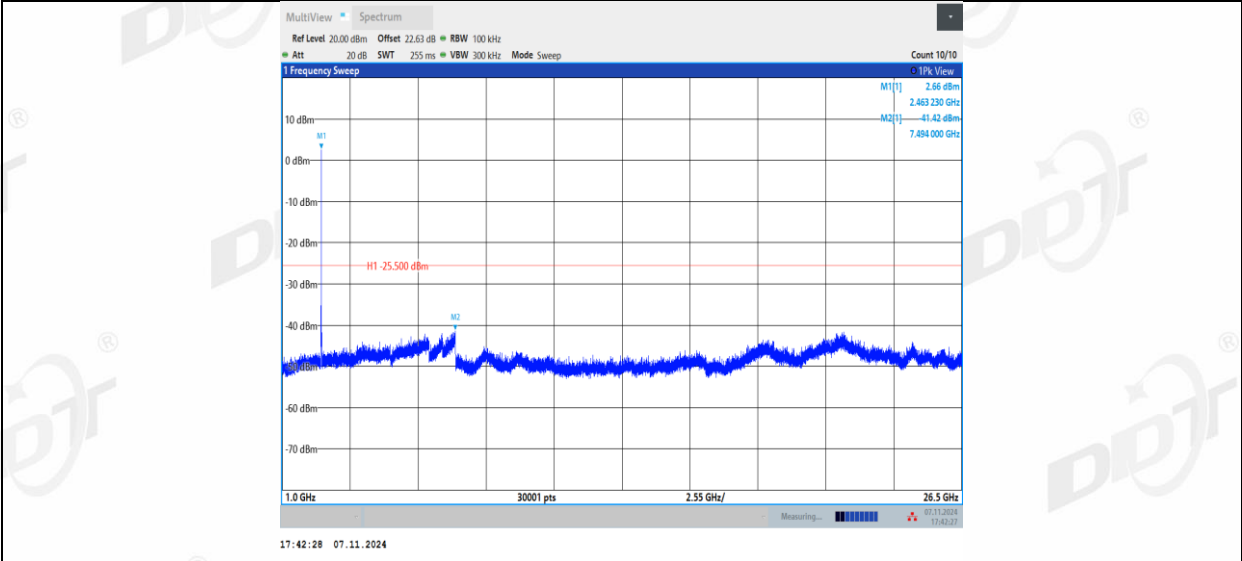


11G_Ant1_2412_0~Reference

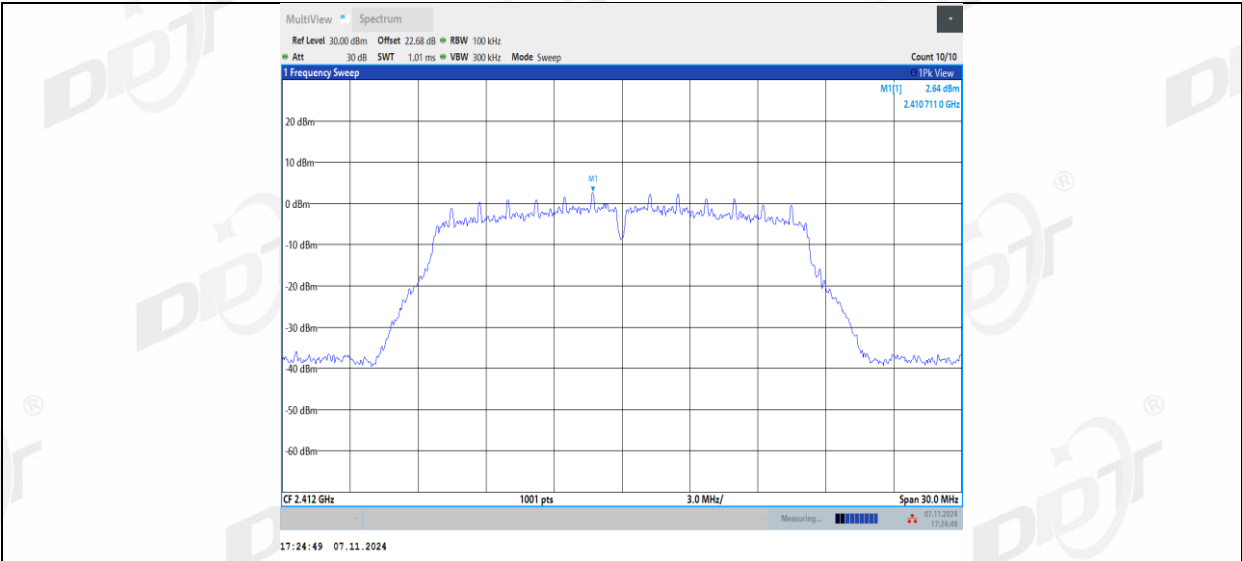


11G_Ant1_2412_30~1000

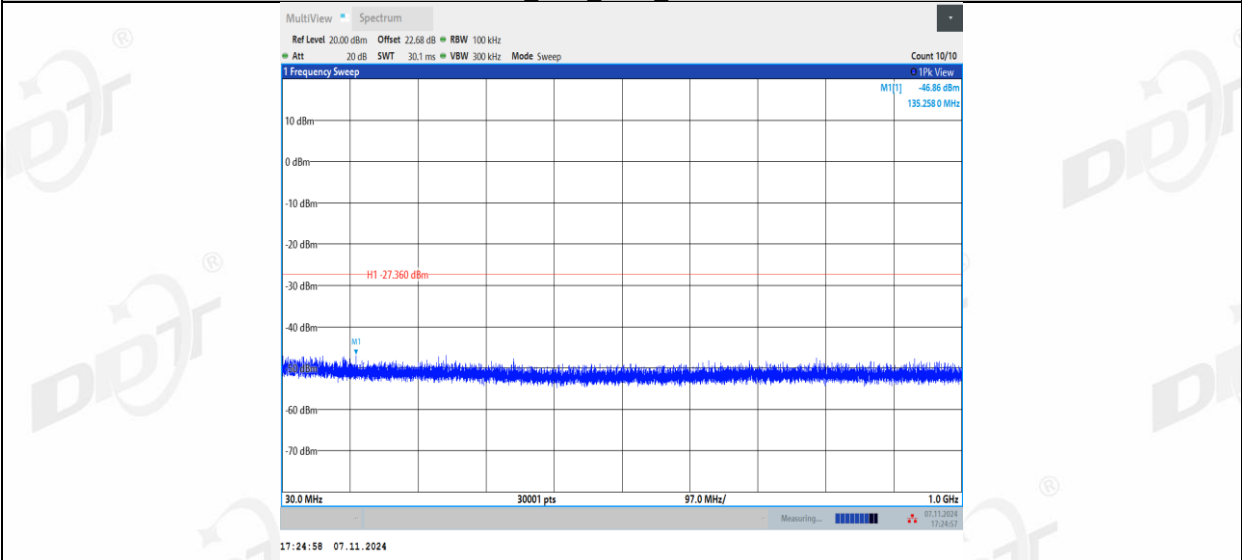


11G_Ant1_2412_1000~26500

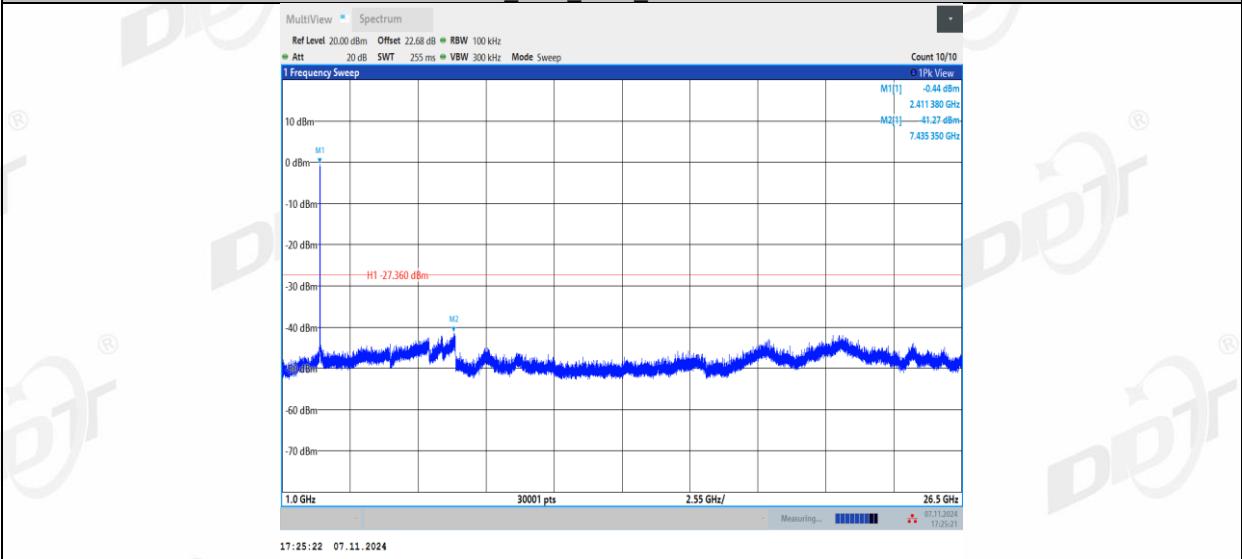


11G_Ant2_2412_0~Reference

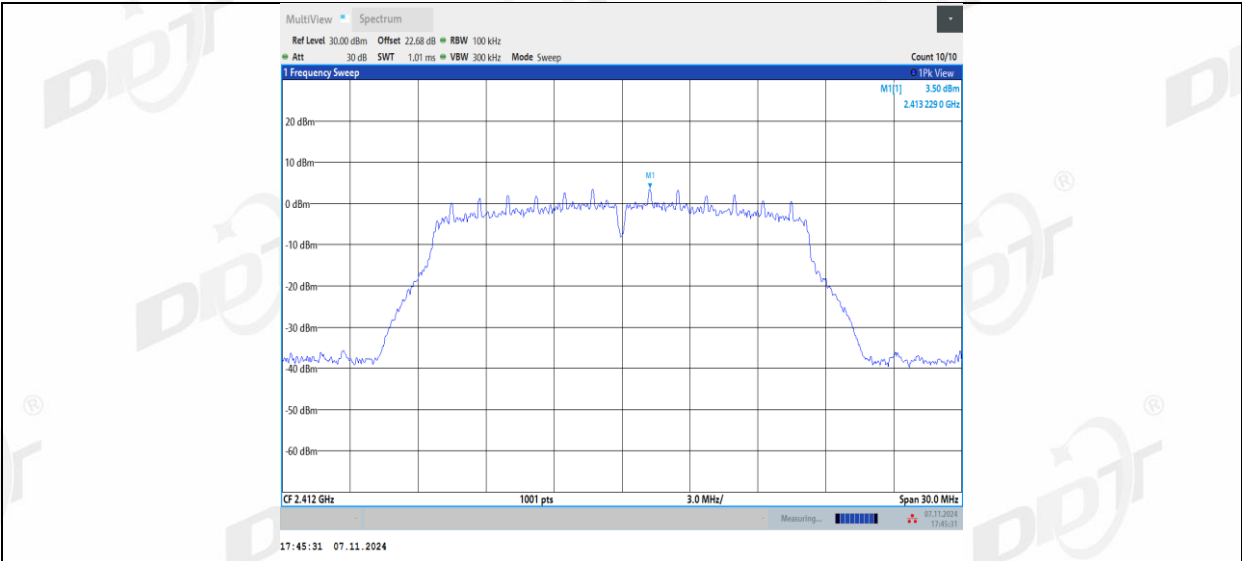


11G_Ant2_2412_30~1000

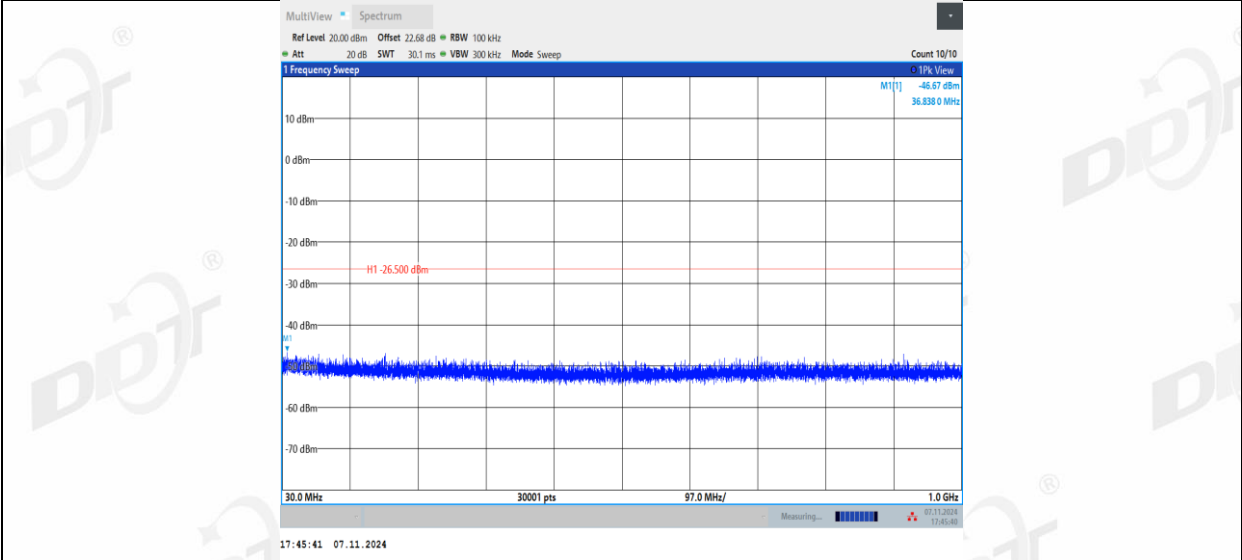


11G_Ant2_2412_1000~26500

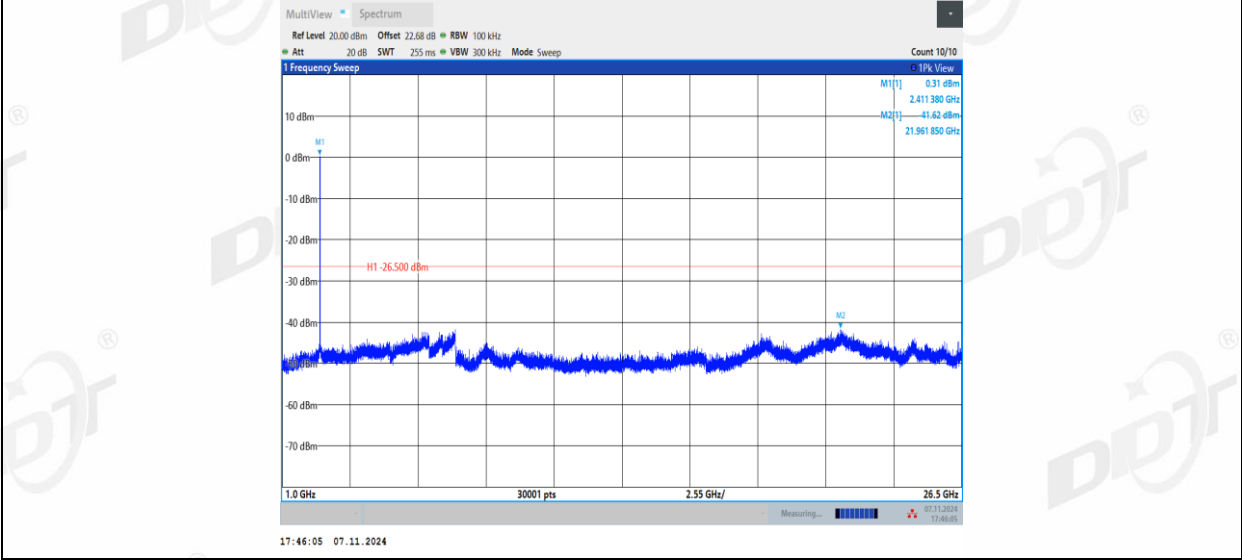


11G_Ant1_2437_0~Reference

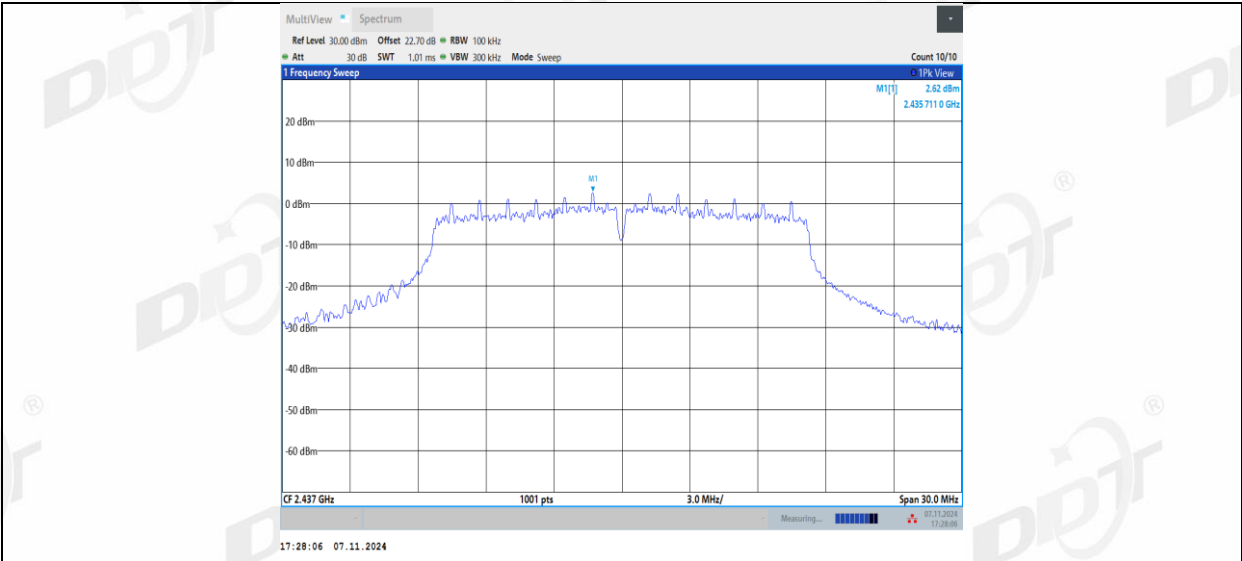


11G_Ant1_2437_30~1000

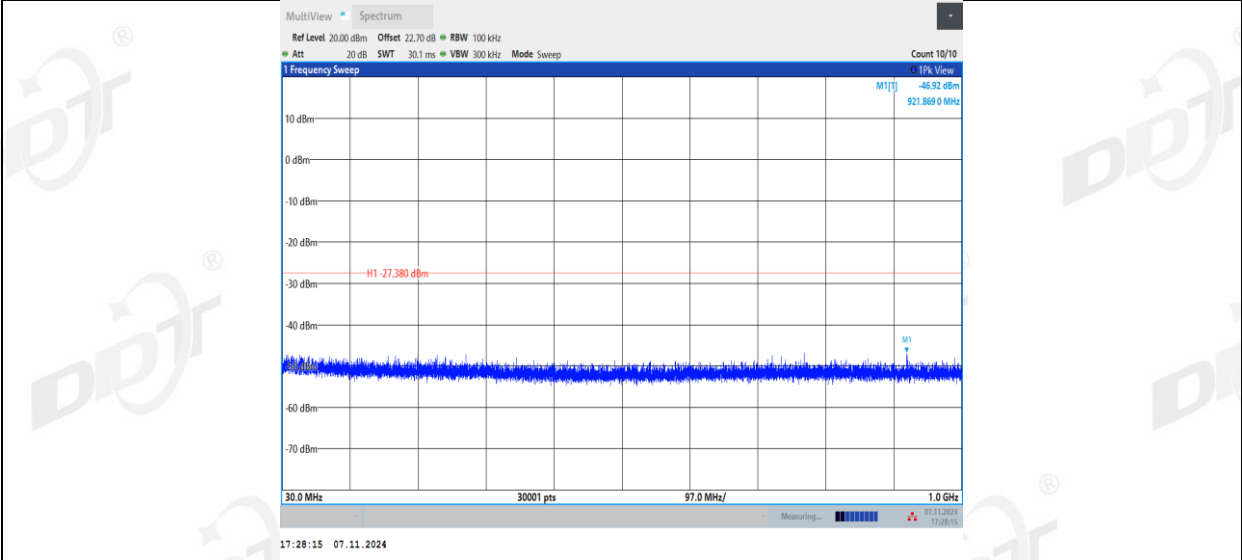


11G_Ant1_2437_1000~26500

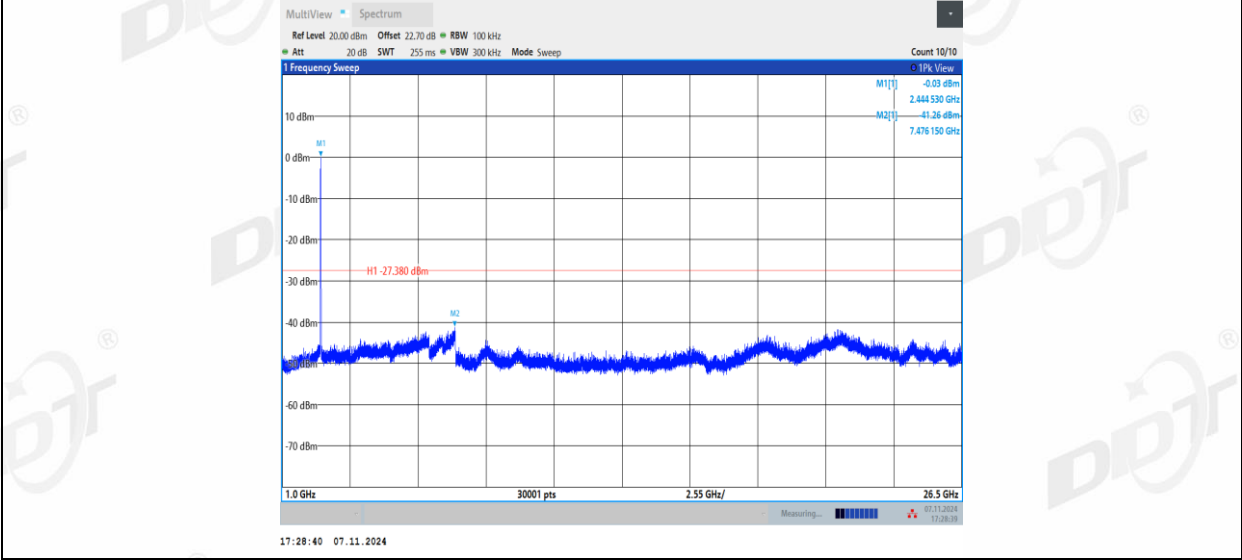


11G_Ant2_2437_0~Reference

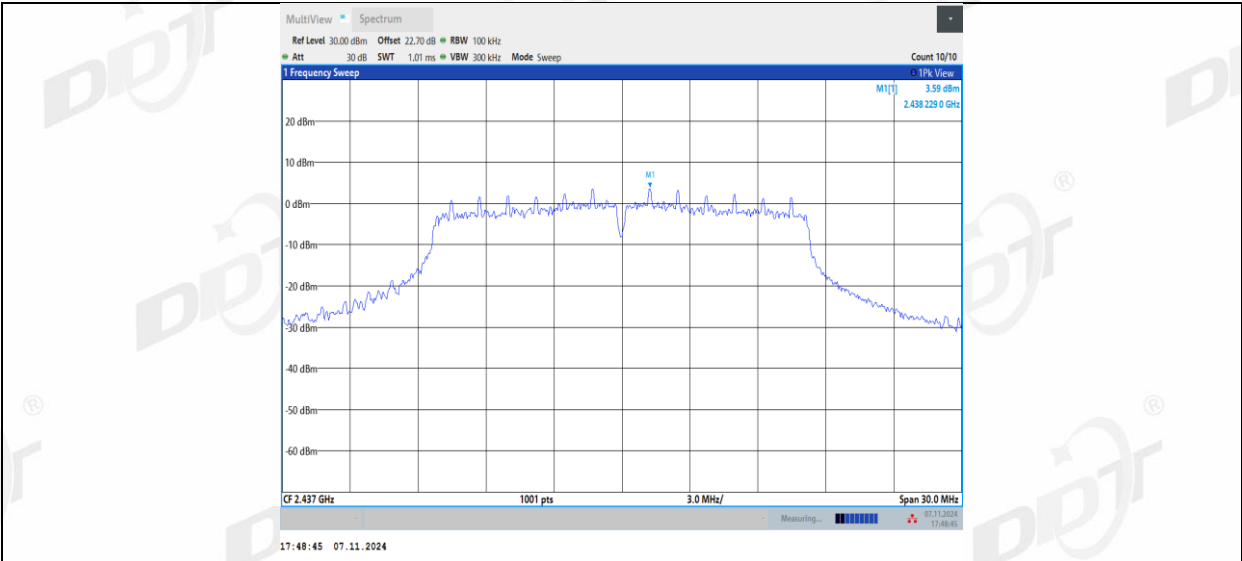


11G_Ant2_2437_30~1000

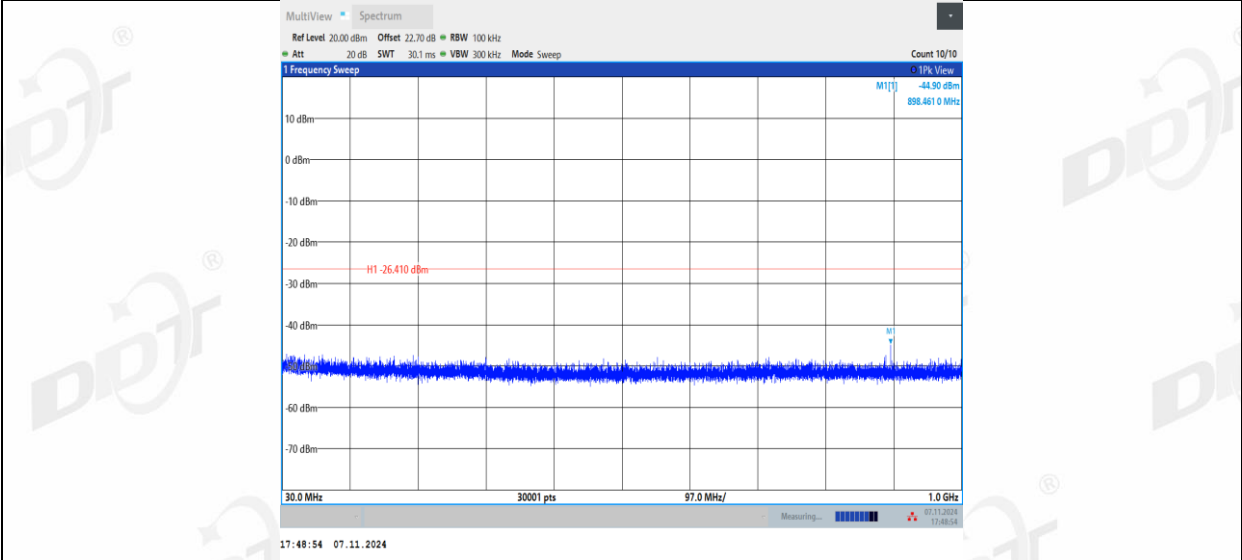


11G_Ant2_2437_1000~26500

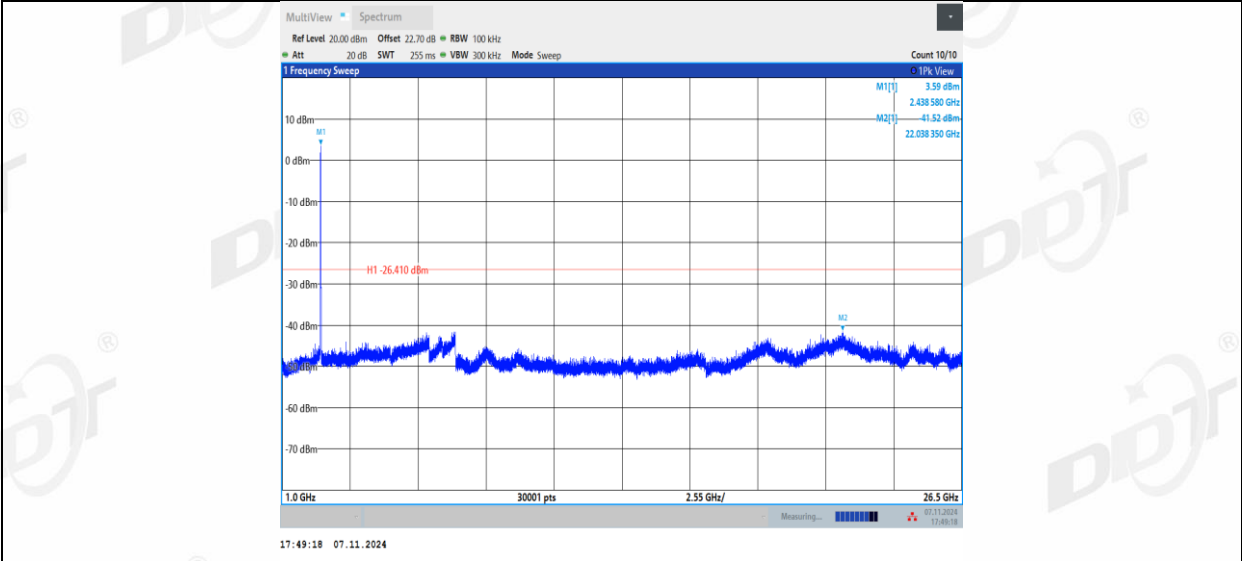


11G_Ant1_2462_0~Reference

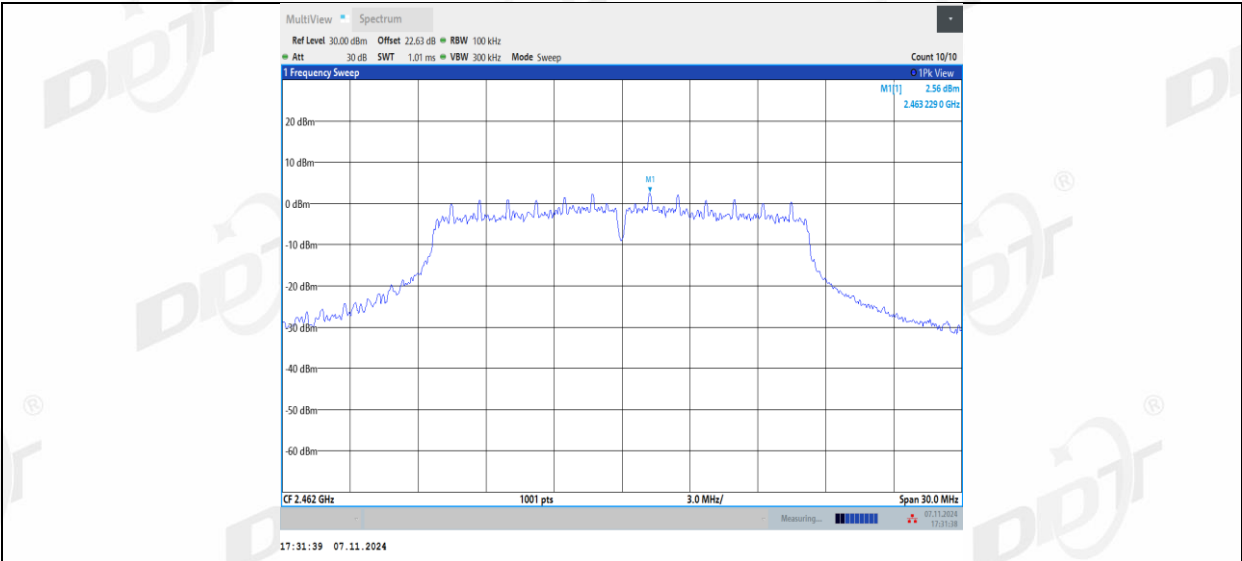


11G_Ant1_2462_30~1000

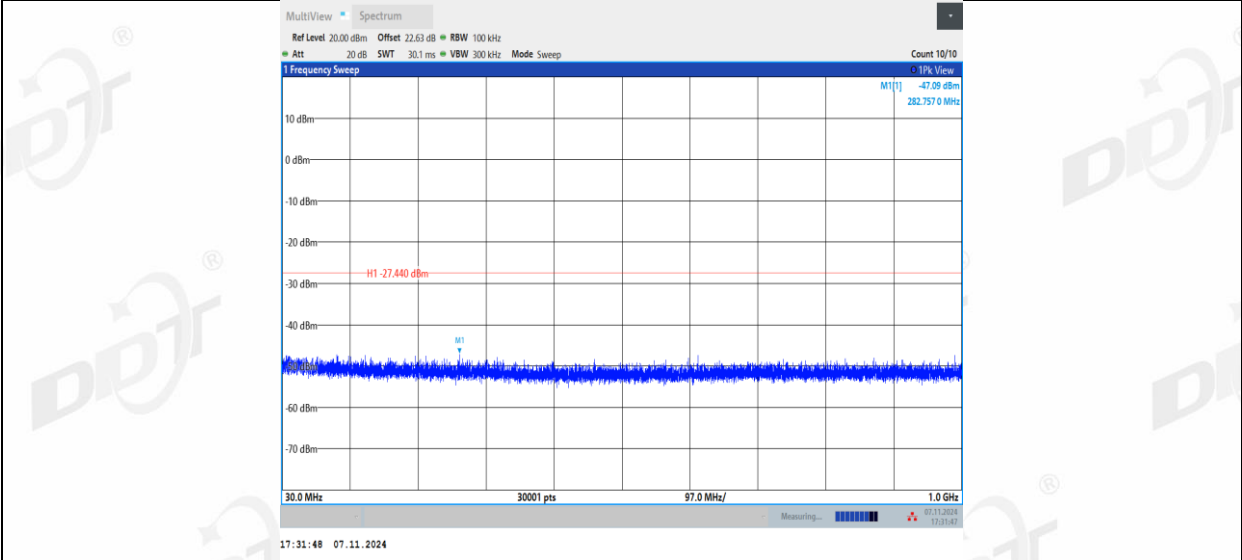


11G_Ant1_2462_1000~26500

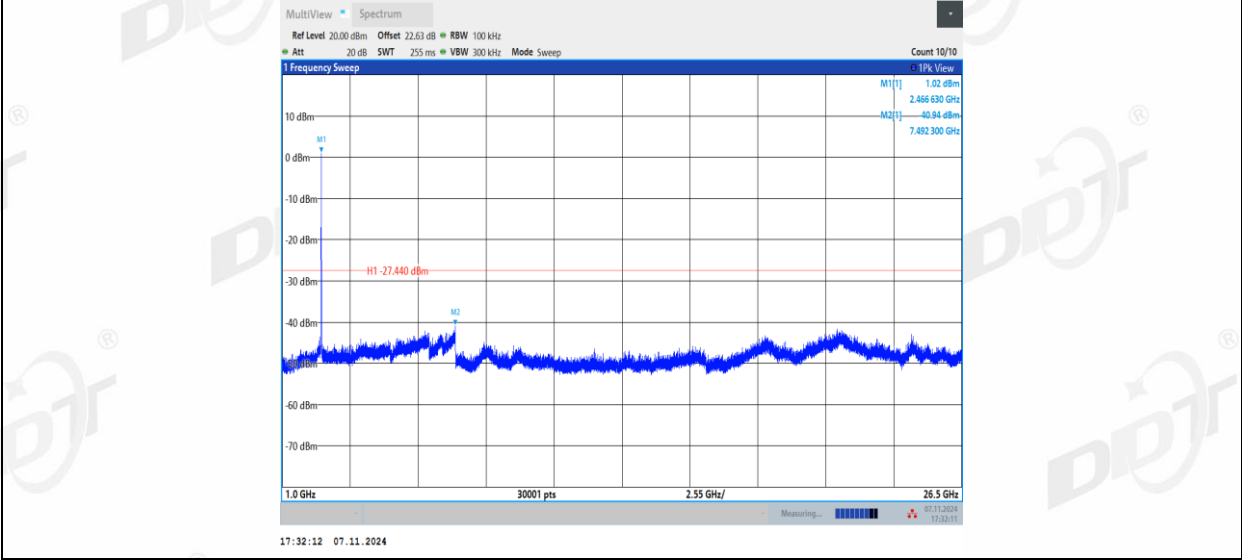


11G_Ant2_2462_0~Reference

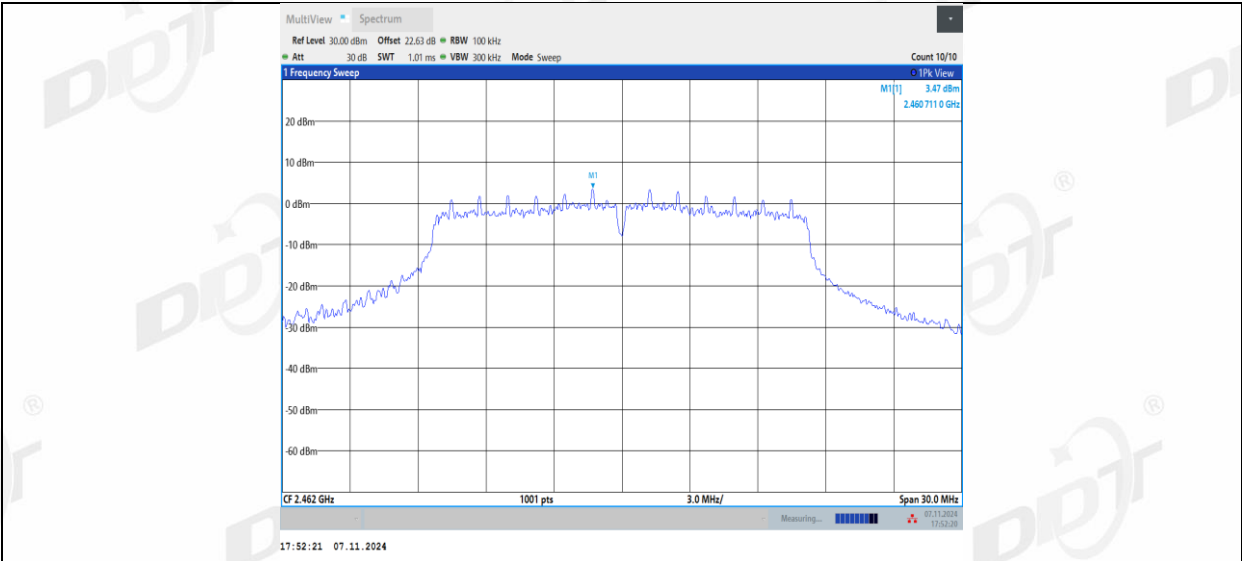


11G_Ant2_2462_30~1000

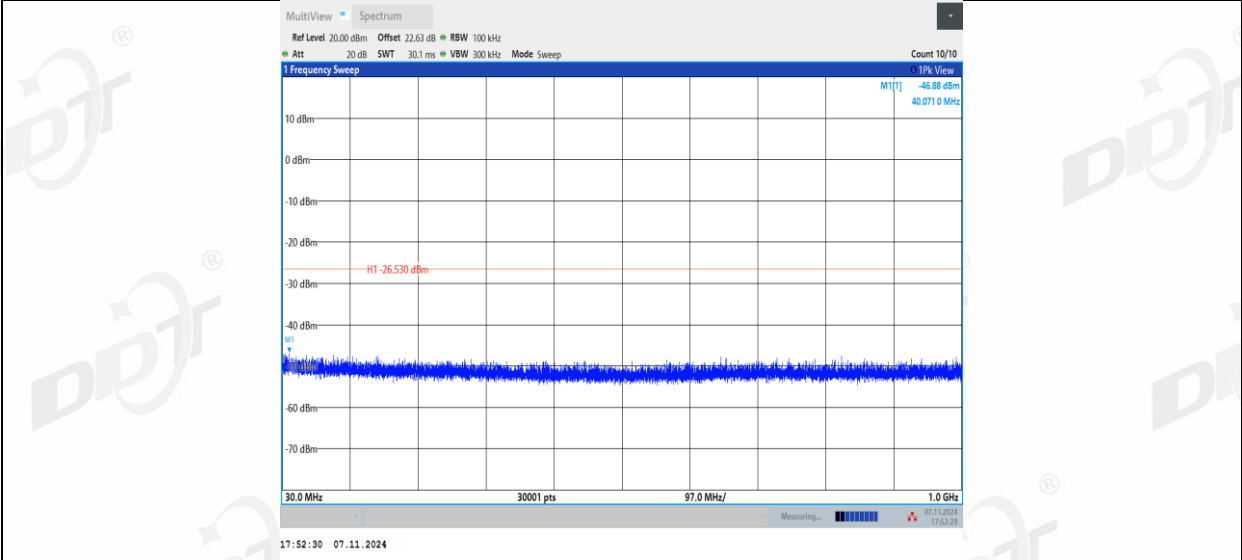


11G_Ant2_2462_1000~26500

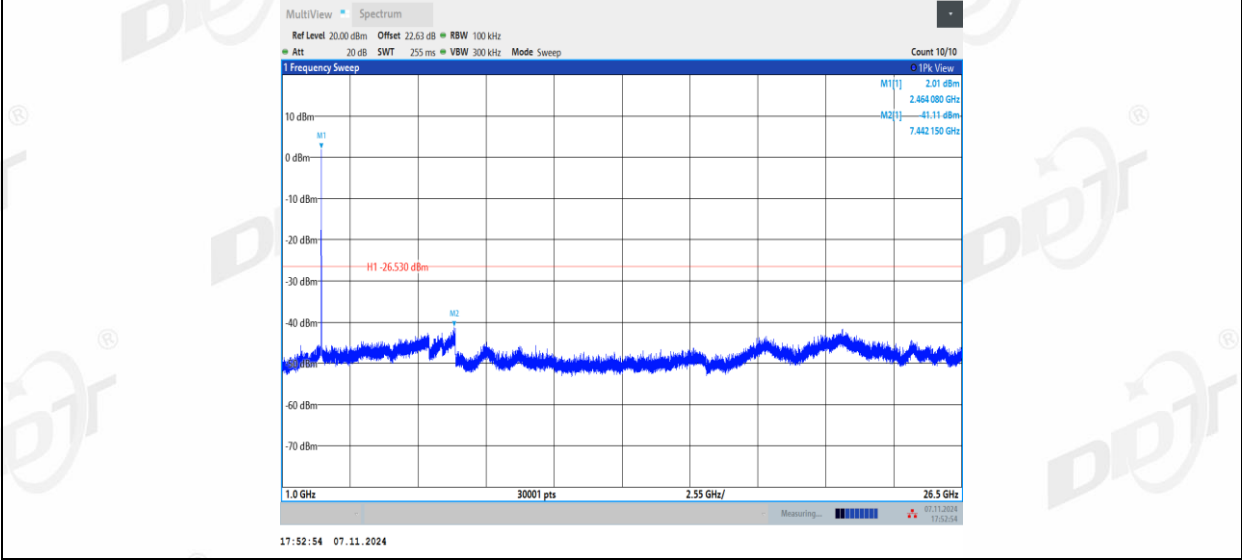


11N20MIMO_Ant1_2412_0~Reference

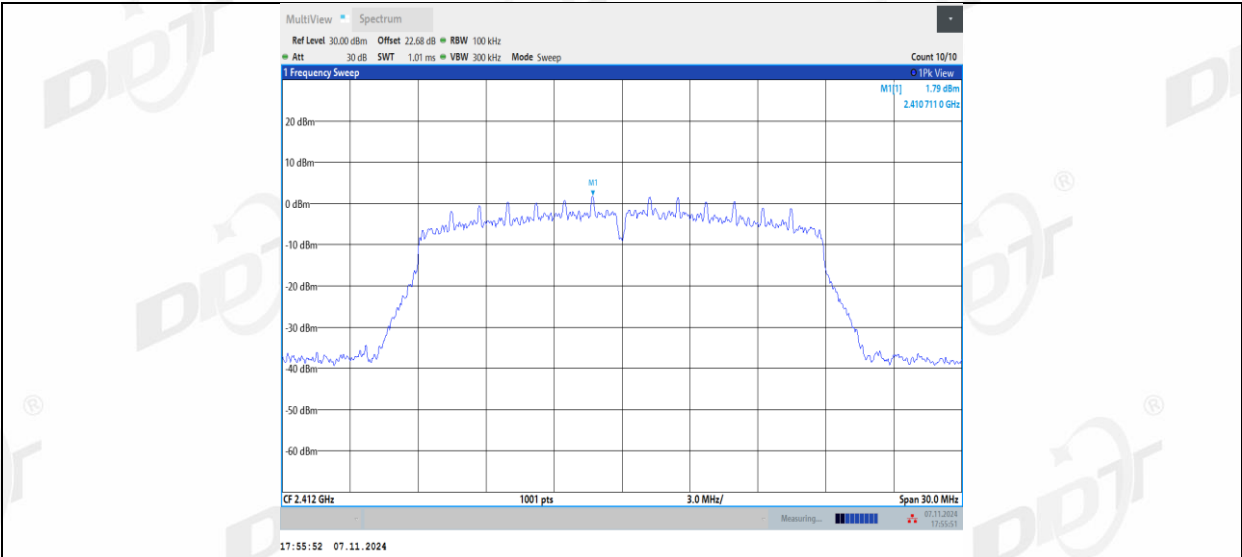


11N20MIMO_Ant1_2412_30~1000

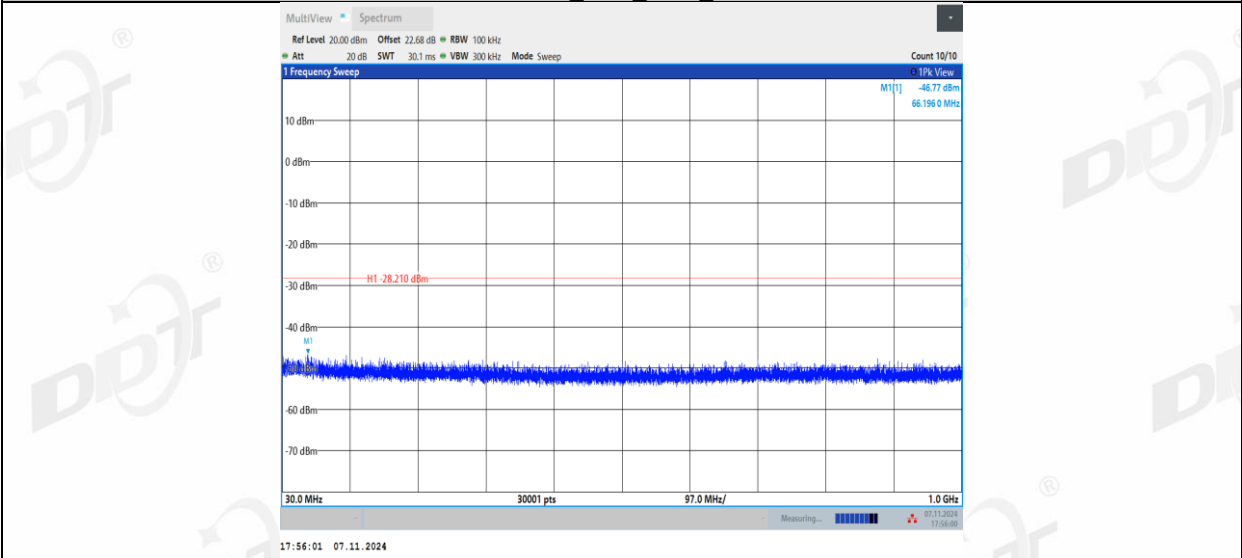


11N20MIMO_Ant1_2412_1000~26500

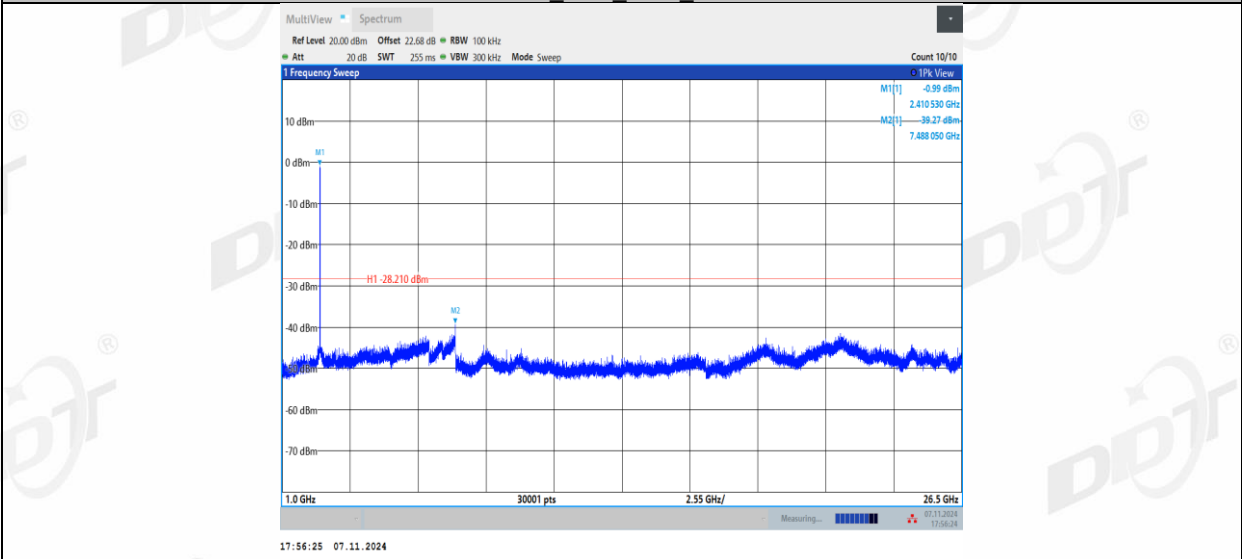


11N20MIMO_Ant2_2412_0~Reference

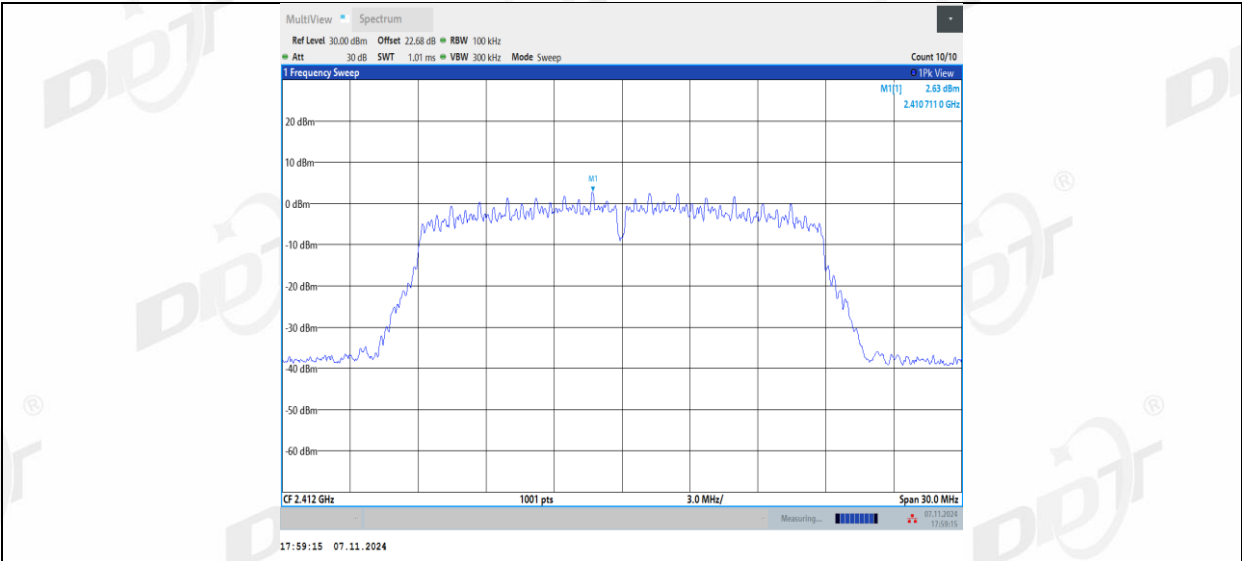


11N20MIMO_Ant2_2412_30~1000

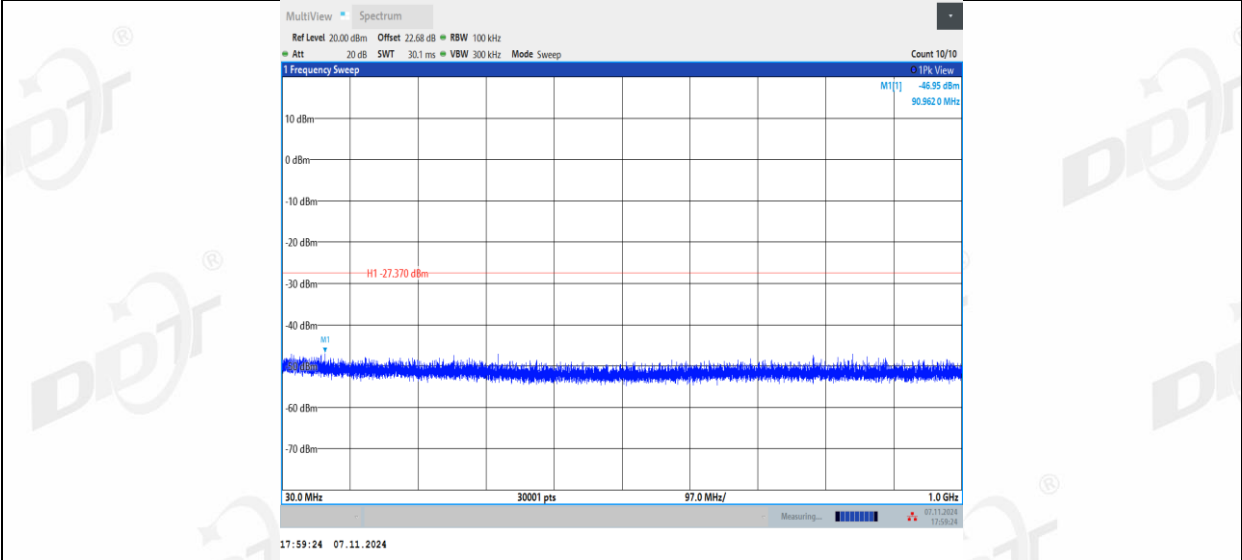


11N20MIMO_Ant2_2412_1000~26500

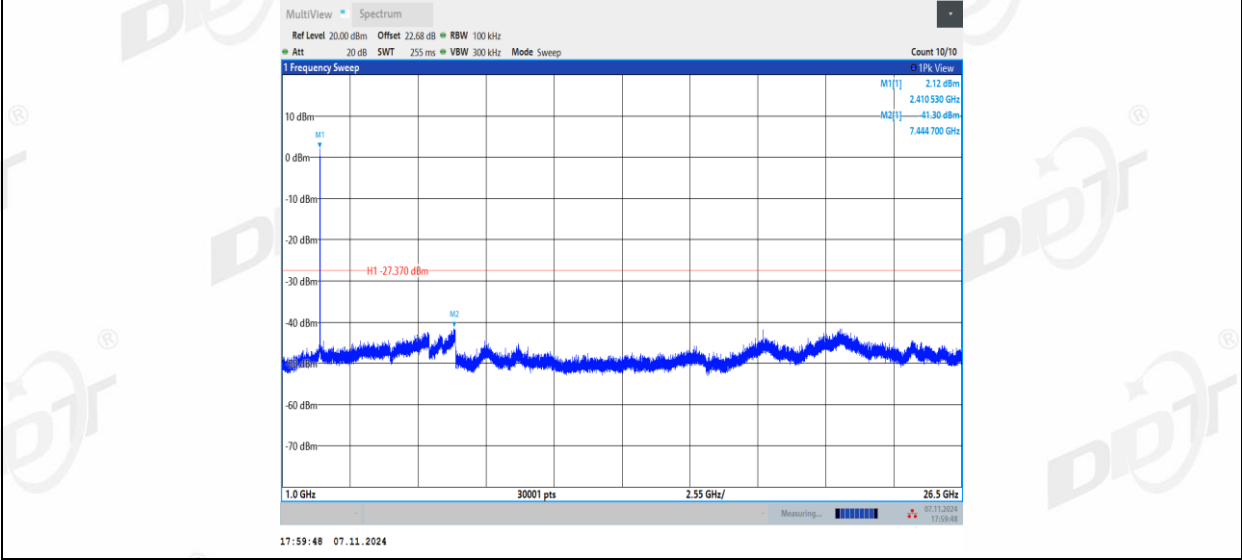


11N20MIMO_Ant1_2437_0~Reference

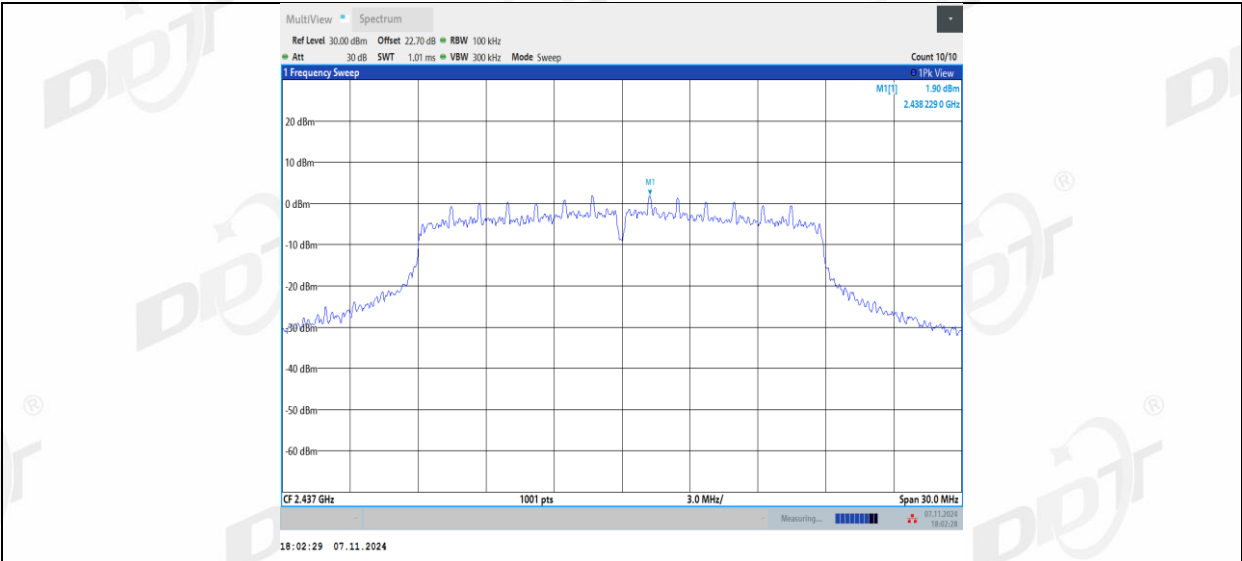


11N20MIMO_Ant1_2437_30~1000

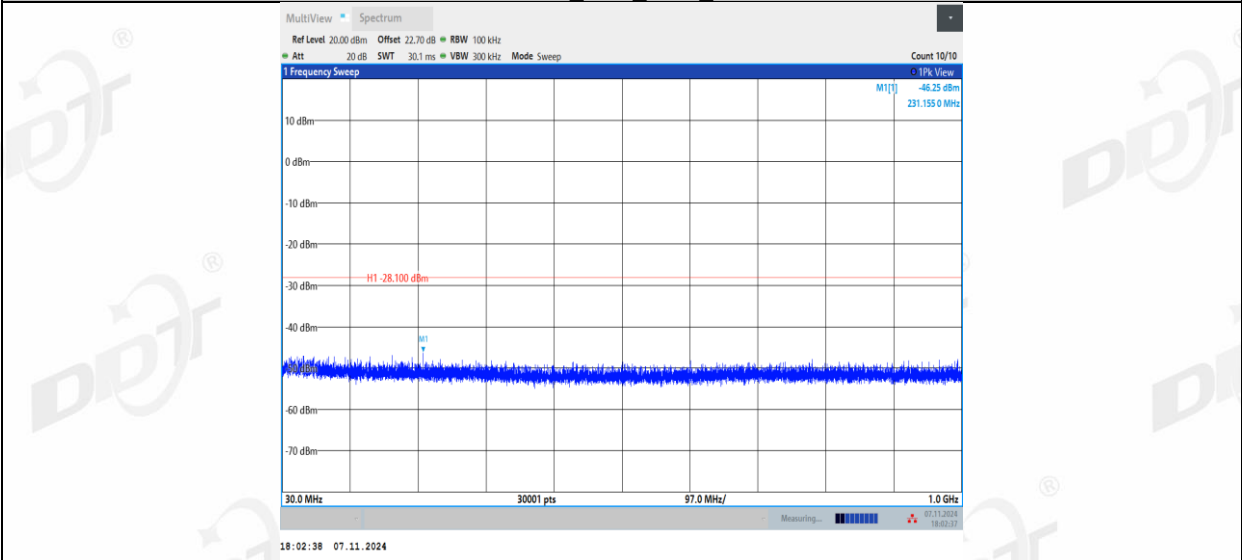


11N20MIMO_Ant1_2437_1000~26500

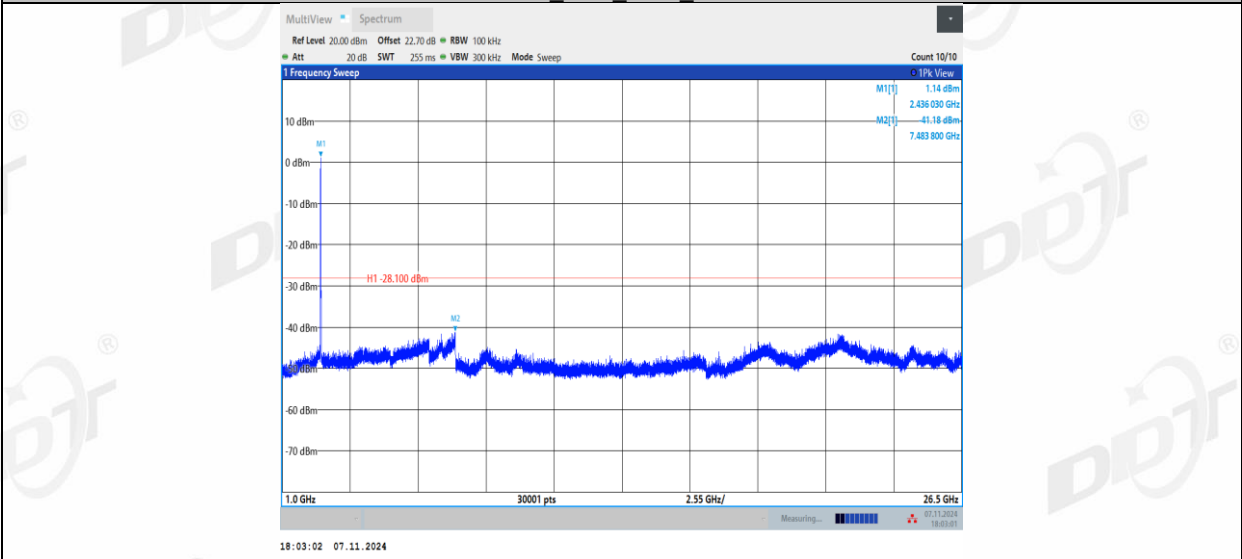


11N20MIMO_Ant2_2437_0~Reference

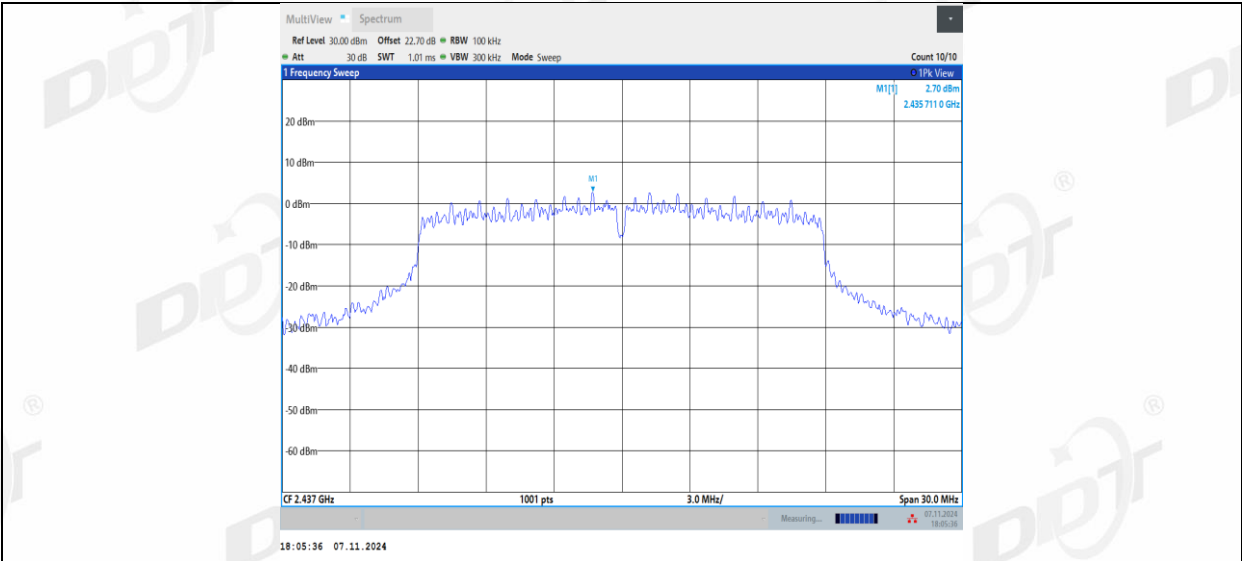

11N20MIMO_Ant2_2437_30~1000

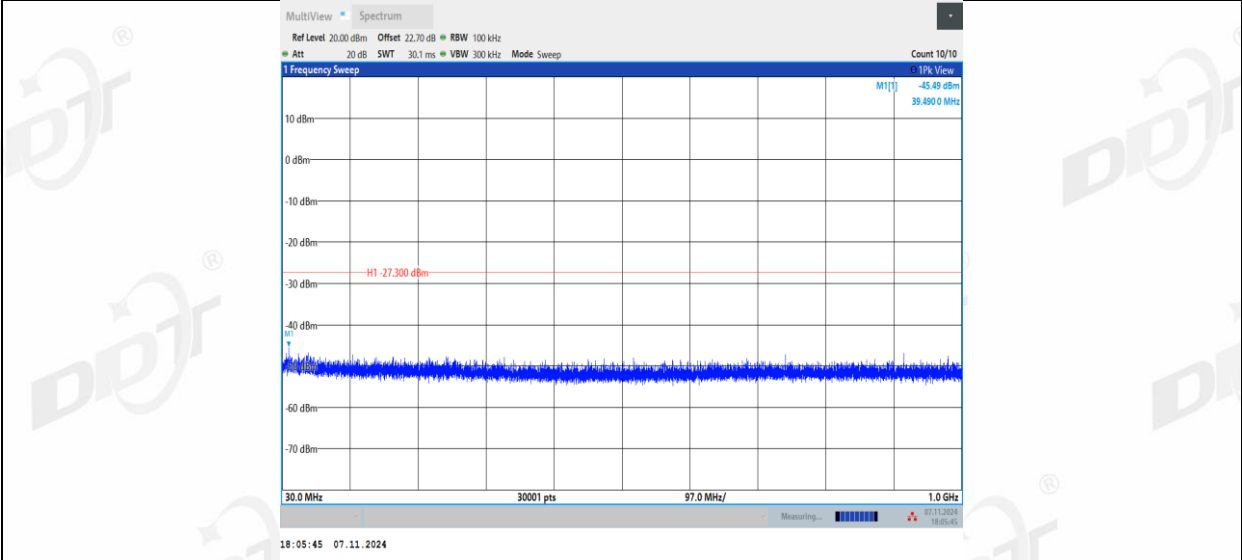

11N20MIMO_Ant2_2437_1000~26500

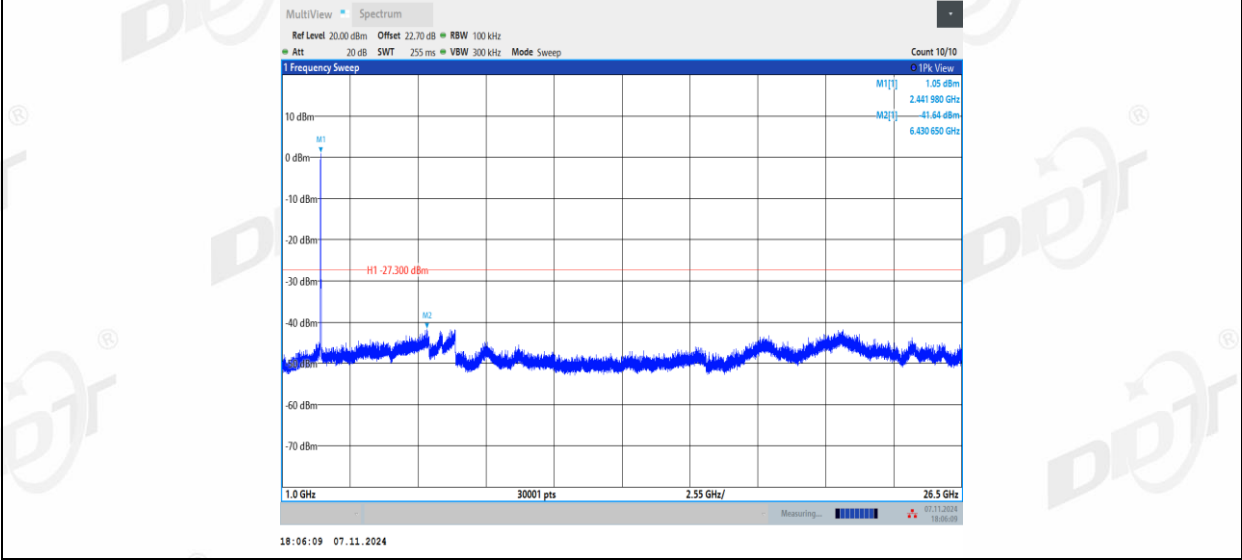

11N20MIMO_Ant1_2462_0~Reference