



■ **Report No.:** DDT-R21081603-2E01

■ **Issued Date:** Sep. 14, 2021

FCC AND ISED CERTIFICATION TEST REPORT

FOR

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Gaming Wireless Headphone
Model No.	:	QUANTUM350WIRELESST
Trade Mark	:	JBL
FCC ID	:	APIJBLQ350WLT
IC	:	6132A-JBLQ350WLT
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test	8
2.5.	Test environment conditions	8
2.6.	Deviations of test standard.....	8
2.7.	Test laboratory	9
2.8.	Measurement uncertainty.....	9
3.	Equipment Used During Test.....	10
4.	6 dB Bandwidth and 99% Bandwidth.....	12
4.1.	Block diagram of test setup.....	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	13
4.5.	Original test data	13
5.	Maximum Peak Output Power	18
5.1.	Block diagram of test setup.....	18
5.2.	Limits	18
5.3.	Test procedure	18
5.4.	Test result.....	18
5.5.	Original test data	19
6.	Power Spectral Density.....	21
6.1.	Block diagram of test setup.....	21
6.2.	Limits	21
6.3.	Test procedure	21
6.4.	Test result.....	21
6.5.	Original test data	22
7.	Band Edge Compliance (Conducted Method)	24
7.1.	Block diagram of test setup.....	24
7.2.	Limits	24
7.3.	Test procedure	24
7.4.	Test result.....	25
7.5.	Original test data	25
8.	Radiated Emission	27

8.1.	Block diagram of test setup.....	27
8.2.	Limit.....	28
8.3.	Test Procedure.....	29
8.4.	Test result.....	30
9.	RF Conducted Spurious Emissions	43
9.1.	Block diagram of test setup.....	43
9.2.	Limits	43
9.3.	Test procedure	43
9.4.	Test result.....	44
9.5.	Original test data	44
10.	Emissions in Restricted Frequency Bands	51
10.1.	Block diagram of test setup.....	51
10.2.	Limit.....	51
10.3.	Test procedure	51
10.4.	Test result.....	51
11.	Power Line Conducted Emission	60
11.1.	Block diagram of test setup.....	60
11.2.	Power line conducted emission limits	60
11.3.	Test procedure	60
11.4.	Test result.....	61
12.	Antenna Requirements	70
12.1.	Limit.....	70
12.2.	Result	70
13.	Test Setup Photograph	71
14.	Photos of the EUT	73

Test Report Declare

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Gaming Wireless Headphone
Model No.	:	QUANTUM350WIRELESST
Trade Mark	:	JBL
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021).

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No:	DDT-R21081603-2E01		
Date of Receipt:	Aug. 18, 2021	Date of Test:	Aug. 18, 2021 ~ Sep. 14, 2021

Prepared By:

Ella Gong

Ella Gong/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Sep. 14, 2021	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Verdict
6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Power Spectral Density	FCC Part 15:15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Band Edge Compliance (conducted method)	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Radiation Emission	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
RF Conducted Spurious Emissions	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Emission in Restricted Frequency Bands	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2013 RSS-Gen Issue 5	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5	Pass
Note: This report includes two types of charging IC, and according to the test results of charging IC: CW6305A, engineers judge that charging IC: CW6305B only tests Conducted Emission and Radiated emission (below 1GHz).		

2. General Test Information

2.1. Description of EUT

EUT* Name	: Gaming Wireless Headphone
Model Number	: QUANTUM350WIRELESST
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 5V from external AC Adapter : DC 3.7V Polymer Li-ion built-in battery
Radio Specification	: 2.4G Wireless transmitter
Operation Frequency	: 2402 MHz - 2480 MHz
Modulation	: GFSK
Data Rate	: 1Mbps, 2Mbps
Antenna Type	: FPC antenna, maximum PK gain: 4.99 dBi
Sample Type	: Series production
Serial Number	: S21081603-14 for conductive : S21081603-27 for radiation

Note: EUT is the ab. of equipment under test.

Channel information_1M					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

Channel information_2M					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2404	14	2430	28	2458
2	2406	15	2432	29	2460
3	2408	17	2436	30	2462
4	2410	18	2438	31	2464
5	2412	19	2440	32	2466
6	2414	20	2442	33	2468
7	2416	21	2444	34	2470
8	2418	22	2446	35	2472
9	2420	23	2448	36	2474
10	2422	24	2450	37	2476

11	2424	25	2452	38	2478
12	2426	26	2454		
13	2428	27	2456		


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model Number	Description	Remark
USB Cable	Harman	N/A	Length: 1.00m, unshielded	N/A
USB Wireless Dongle	Harman	QUANTUM350WLTMT	Input:5V/1A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	Lenovo Beijing Co. Ltd.	ThinkPad	FCC/CE	TP00015A

2.4. Block diagram of EUT configuration for test



Test software: testsuite_gui.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table:

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
1M	6	CH0	2402
	6	CH19	2440
	6	CH39	2480
2M	6	CH1	2404
	6	CH19	2440
	6	CH38	2478

2.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.6. Deviations of test standard

No deviation.

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☐ RF Connected Test (Tonscend RF Measurement System 1#)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 25, 2020	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 24, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC0290	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☒ RF Connected Test (Tonscend RF Measurement System 2#)					
Spectrum analyzer	R&S	FSU26	101472	Jun. 01, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Jan. 19, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☐ Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 13, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 28, 2020	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 24, 2020	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 30, 2020	1 Year
MI Cable	HUBSER	C10-01-01-1M	1091629	Sep. 30, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☐ Radiation 2#chamber					
EMI Test Receiver	R&S	ESCI	101364	Sep. 28, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year

Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-994	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 17, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	TERA-MW	TRLA-0040G35	101303	Sep. 28, 2020	1 Year
RF Cable	N/A	14+1.5m	06270619	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU	100472	Jun. 01, 2021	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Aug. 07, 2021	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 17, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Sep. 28, 2020	1 Year
RF Cable	N/A	14+1.5m	06270619	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 9	N/A	N/A
☑Power Line Conducted Emissions Test 1#					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101109	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 24, 2020	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☐Power Line Conducted Emissions Test 2#					
Test Receiver	R&S	ESPI	101761	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101170	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	KH43101	431011801568-12#	Jun. 01, 2021	1 Year
CE Cable 2	HUBSER	N/A	W11.02	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6 dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

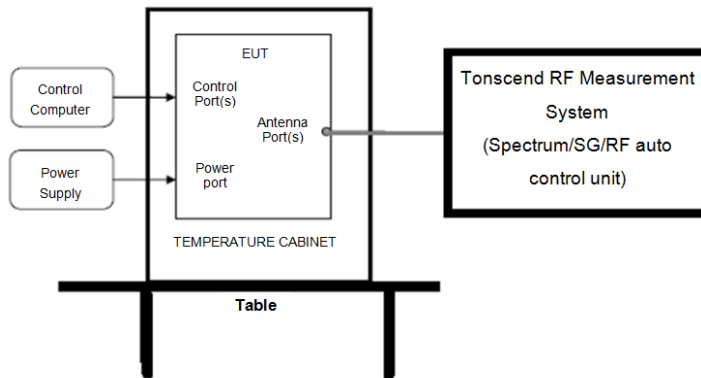

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW:	30 kHz
VBW:	100 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) 6 dB Bandwidth set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(4) Allow the trace to stabilize, measure the 6 dB and 99% bandwidth of signal.


4.4. Test result

Mode	Channel	99% bandwidth Result (MHz)	6 dB bandwidth Result (MHz)	6 dB width Limit (MHz)	Verdict
1M	CH0	1.01	0.668	>0.5	Pass
	CH19	1.02	0.672	>0.5	Pass
	CH39	1.03	0.672	>0.5	Pass
2M	CH1	2.02	1.348	>0.5	Pass
	CH19	2.02	1.376	>0.5	Pass
	CH38	2.04	1.400	>0.5	Pass

4.5. Original test data


99% bandwidth:

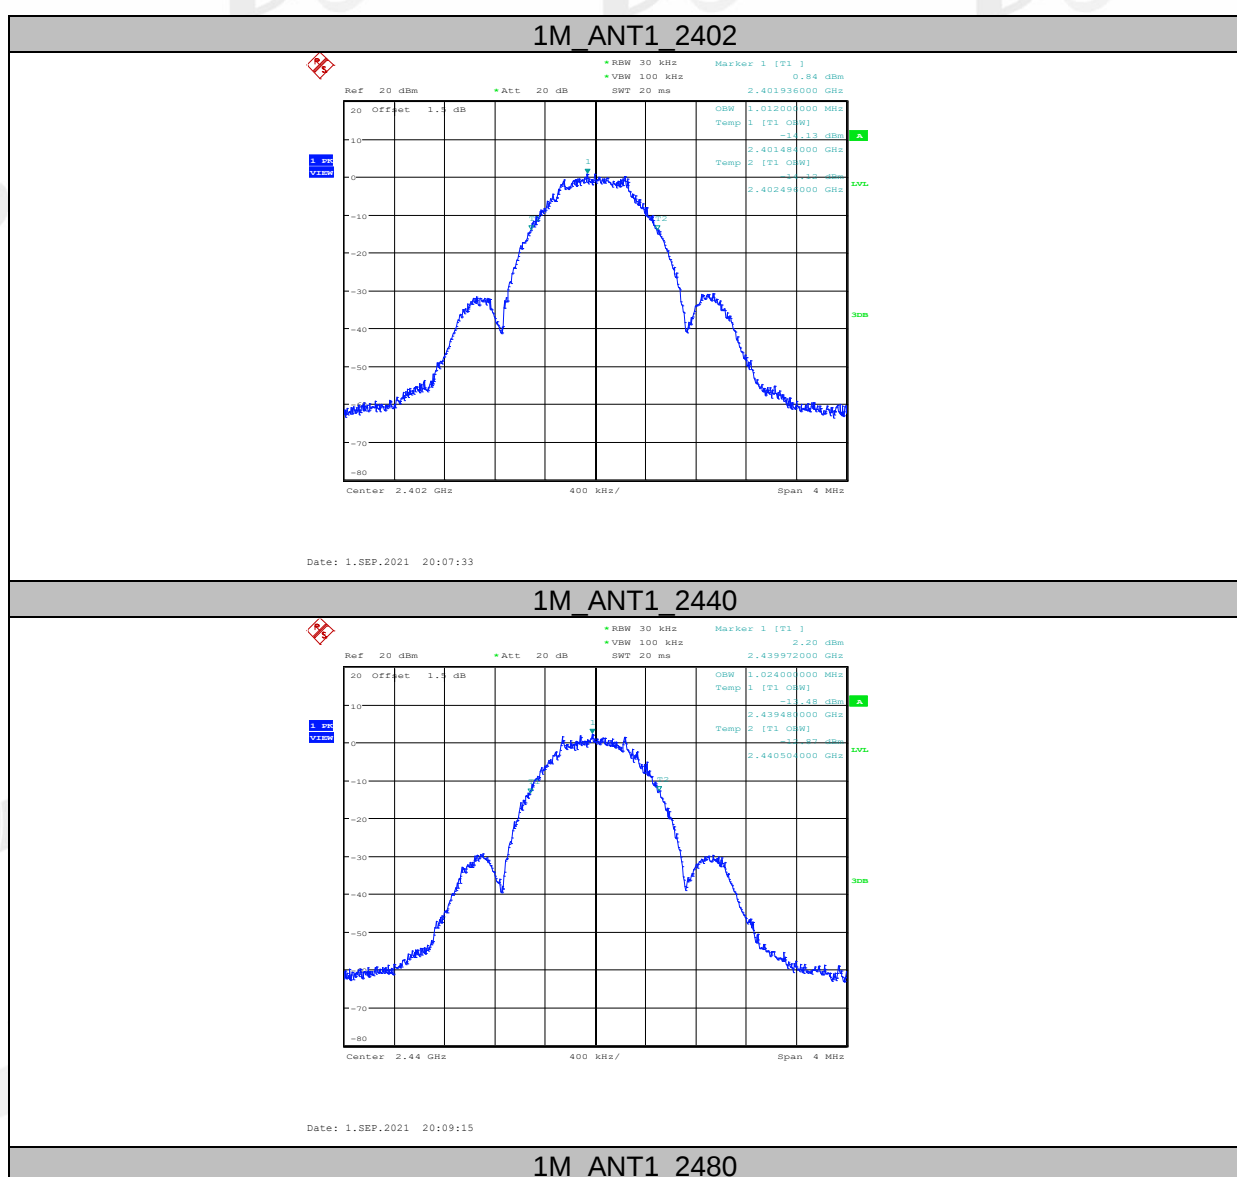

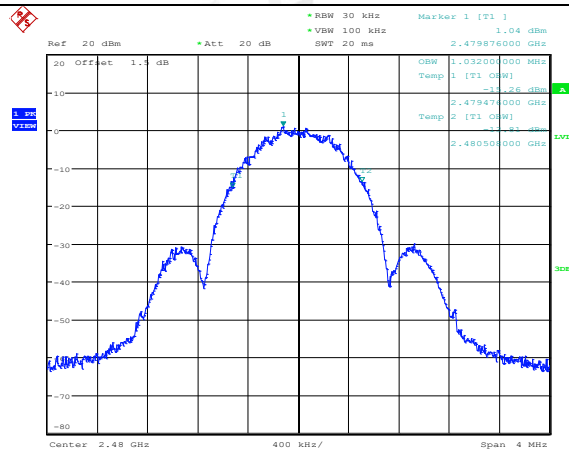


Date: 1.SEP.2021 20:10:50

2M ANT1 2404

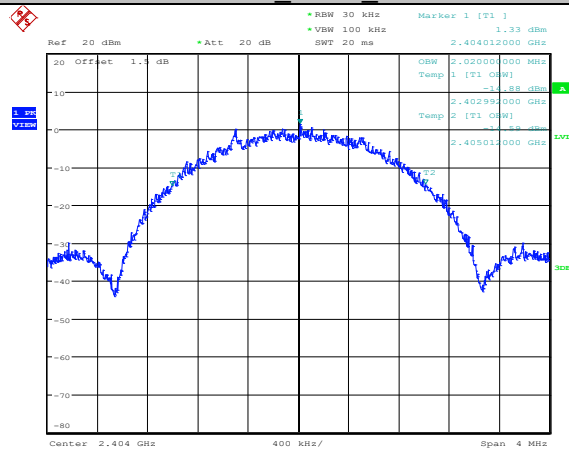


Date: 11.SEP.2021 19:46:01

2M ANT1 2440


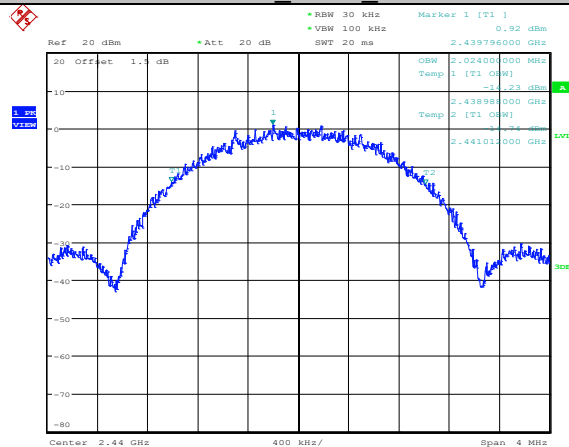


Date: 11.SEP.2021 19:47:43


2M ANT1 2478

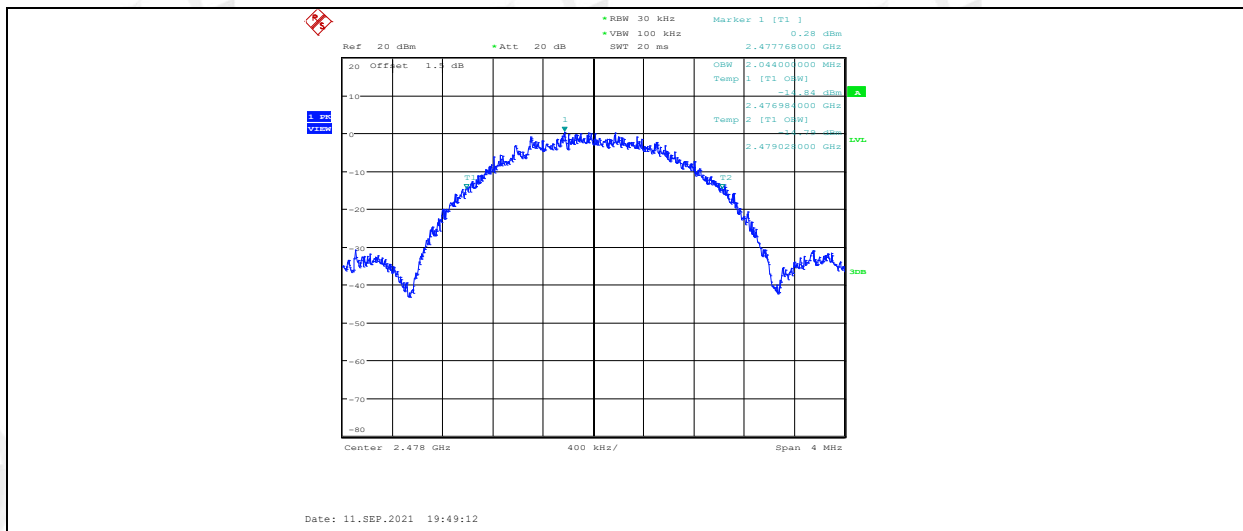

6 dB bandwidth:

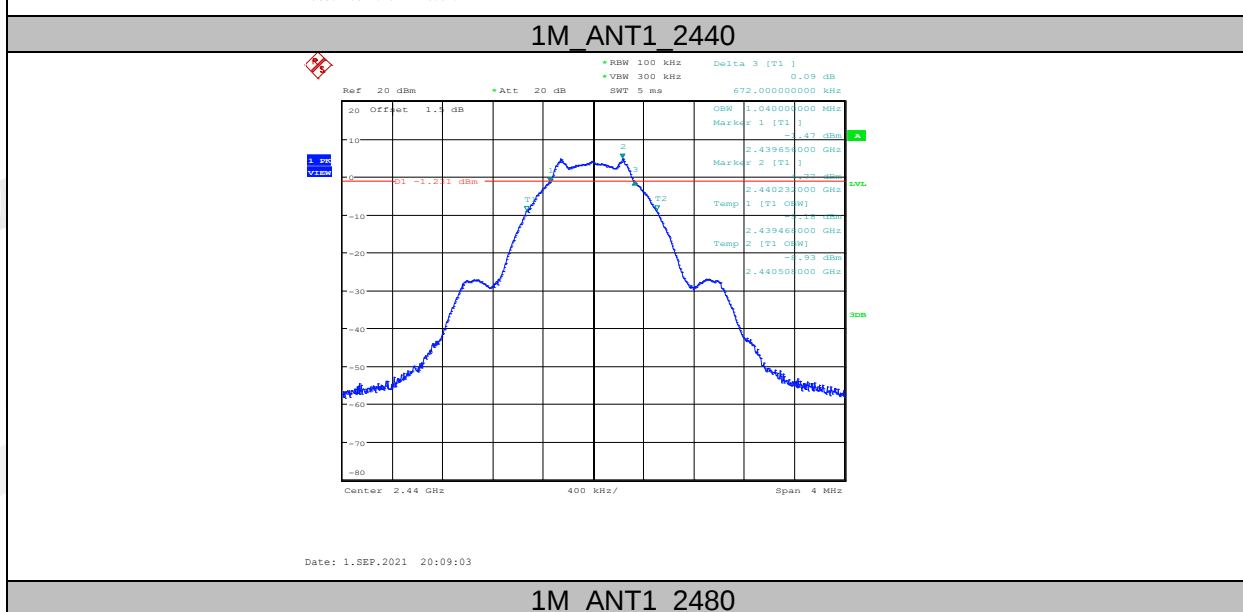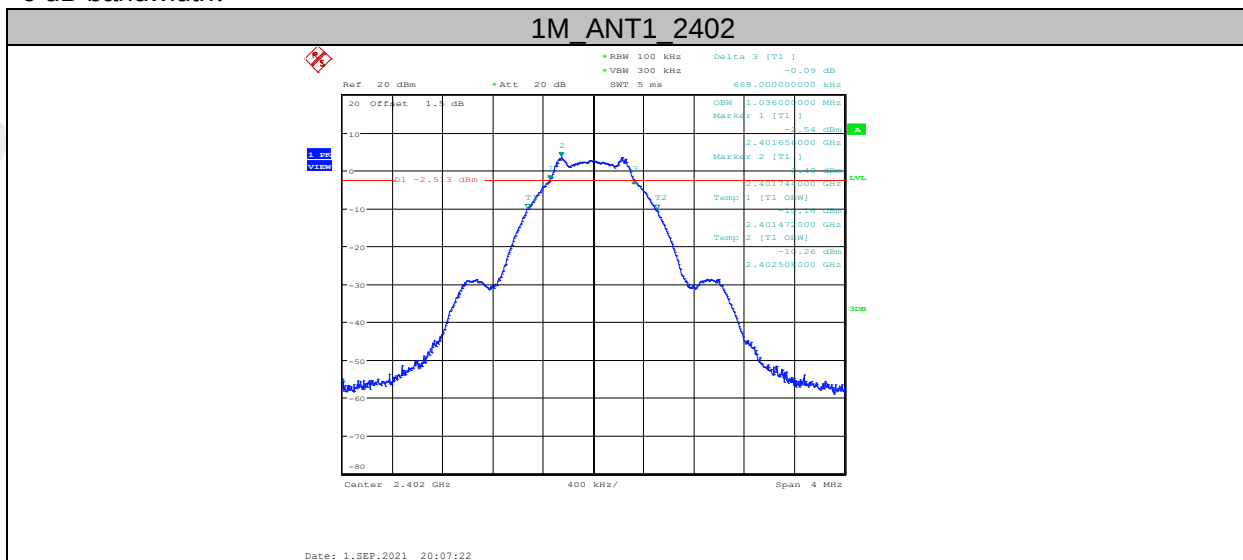


1M ANT1 2480

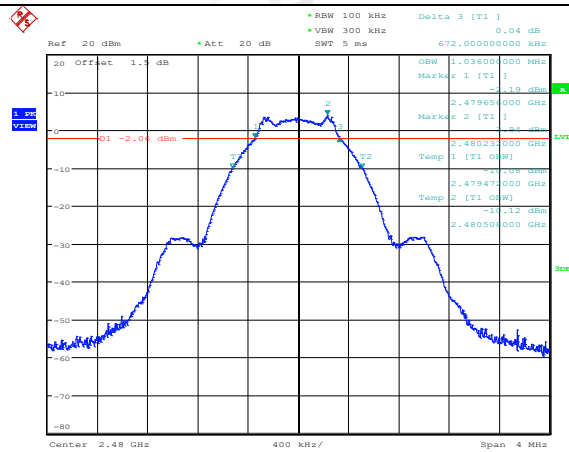


Date: 1.SEP.2021 20:10:38

2M ANT1 2404

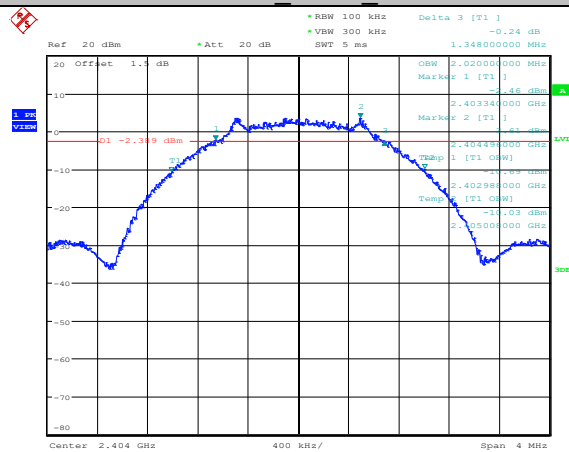


Date: 11.SEP.2021 19:45:49

2M ANT1 2440

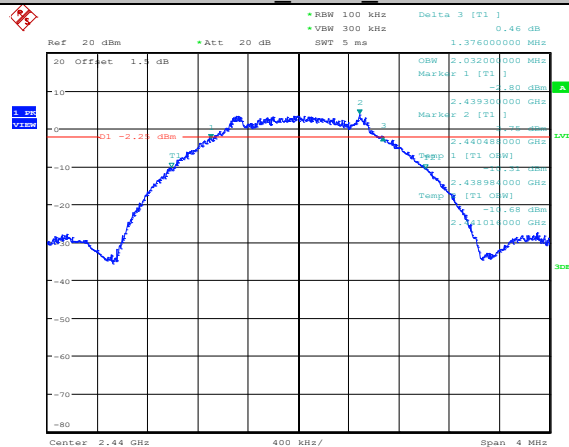

Date: 11.SEP.2021 19:47:31

2M ANT1 2478

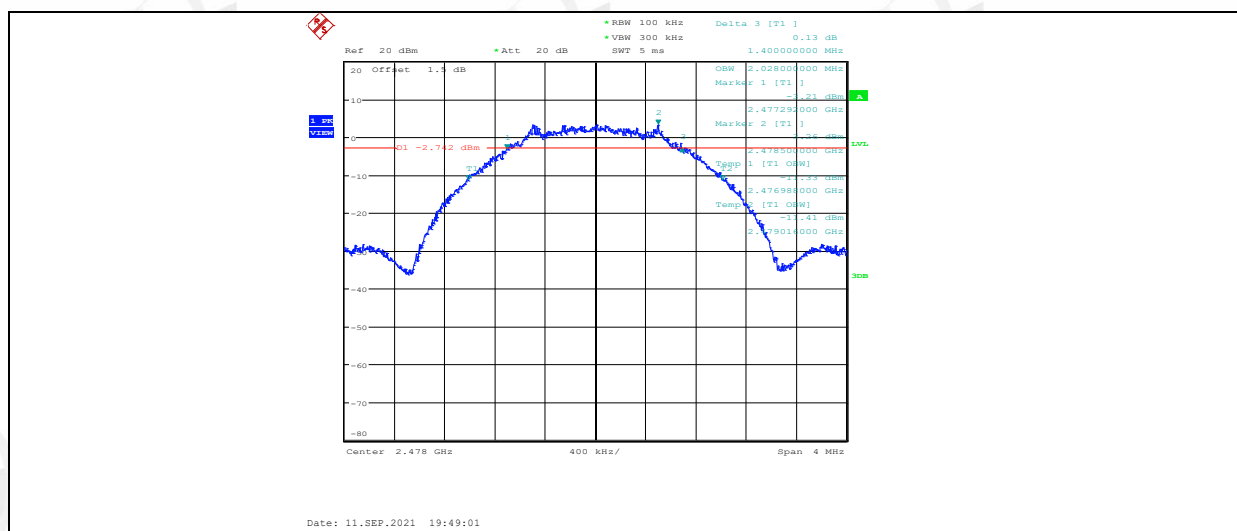

5. Maximum Peak Output Power

5.1. Block diagram of test setup

Same with 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:


RBW:	≥DTS bandwidth
VBW:	≥3 x RBW
Span	≥3 x RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges measure out the PK output power.

5.4. Test result

Mode	Freq. (MHz)	Peak Output Power (dBm)	Limit (dBm)	Verdict
1M	2402	3.71	30	Pass
	2440	4.88	30	Pass
	2480	4.14	30	Pass
2M	2404	4.98	30	Pass
	2440	5.10	30	Pass
	2478	5.05	30	Pass


5.5. Original test data

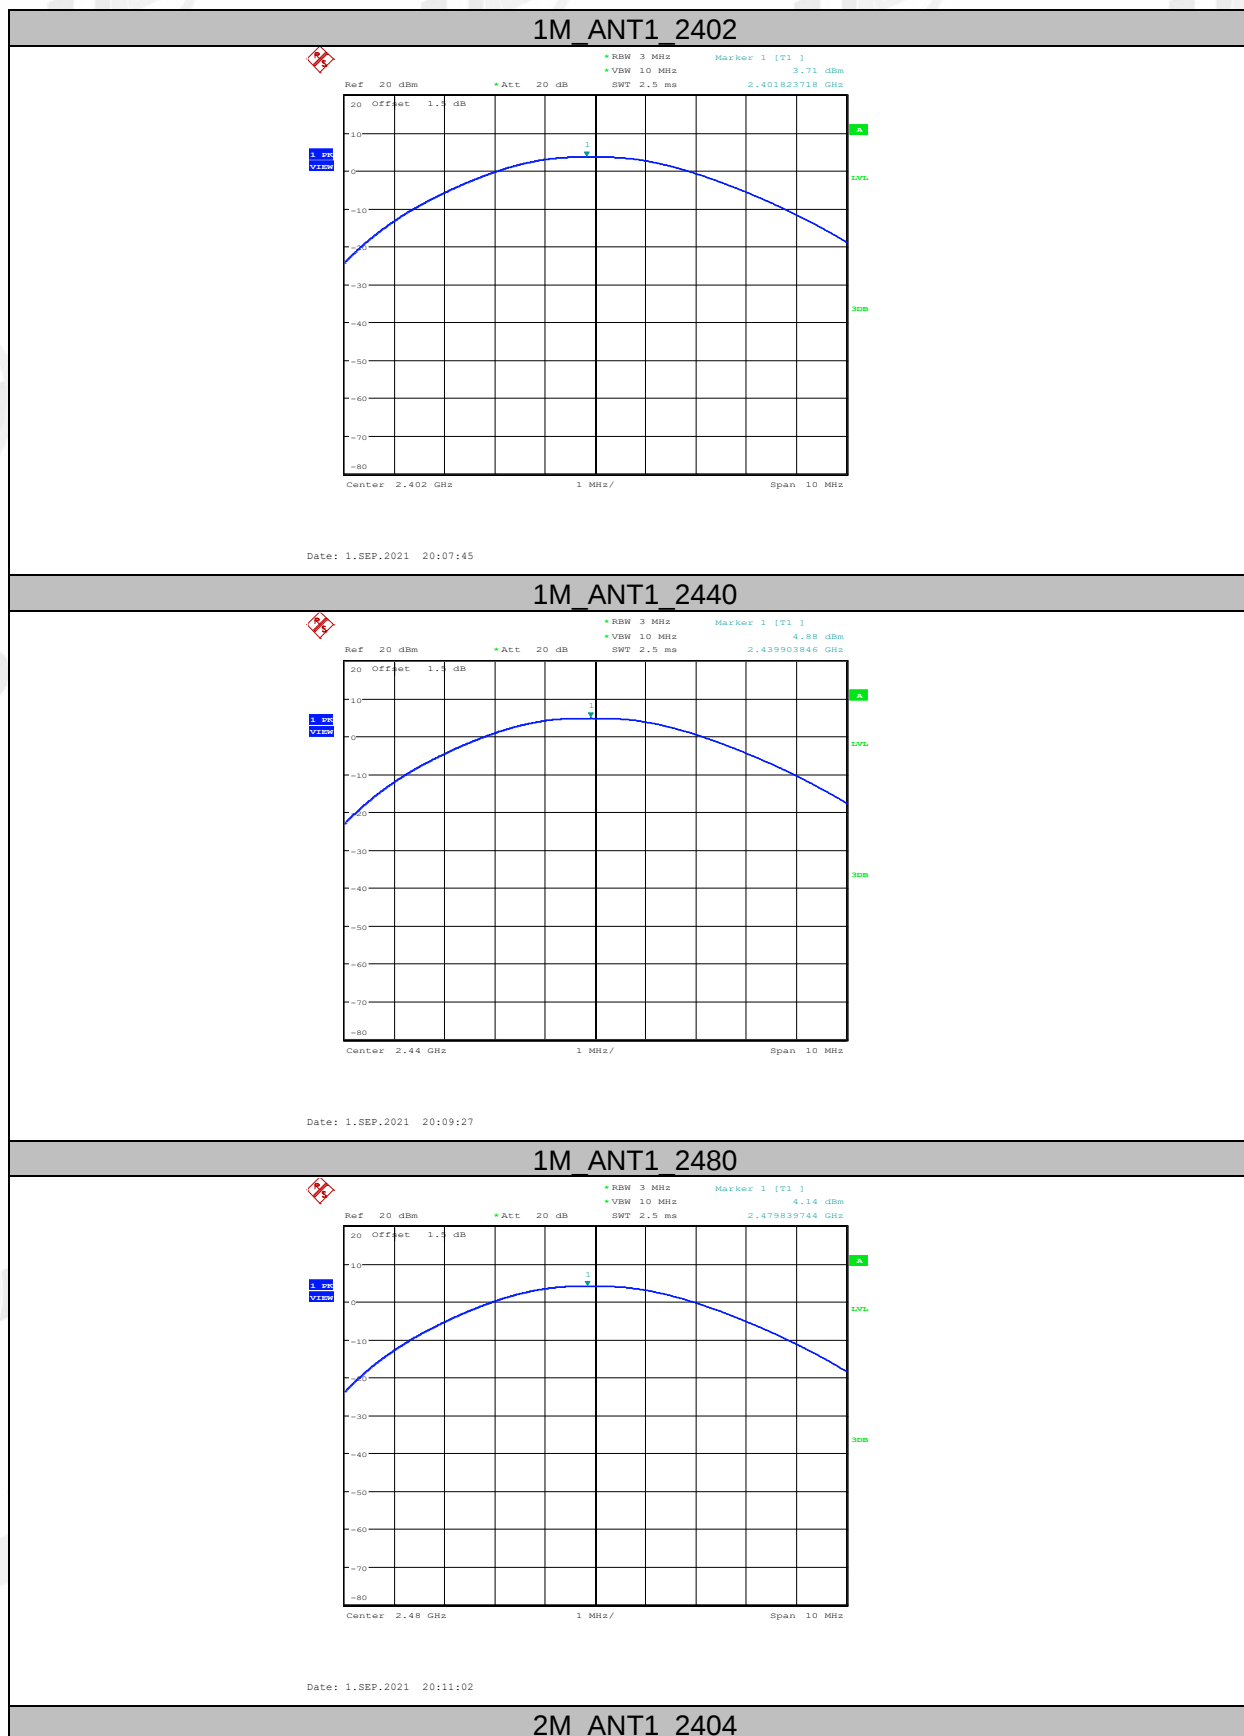

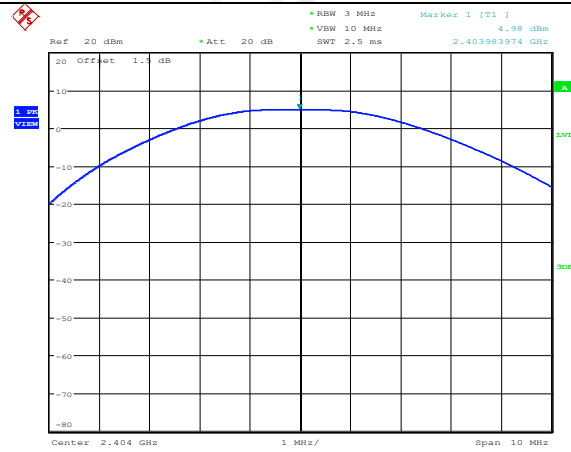


Date: 11.SEP.2021 19:46:13

2M ANT1 2440

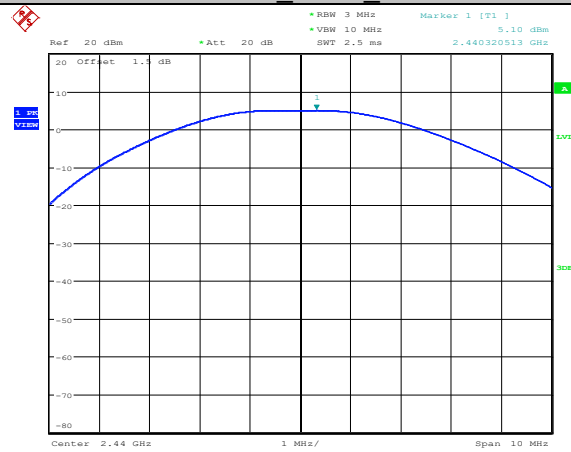

Date: 11.SEP.2021 19:47:55

2M ANT1 2478

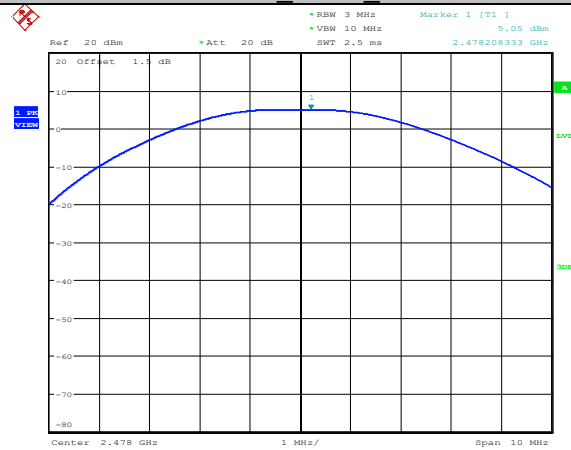

Date: 11.SEP.2021 19:49:24

6. Power Spectral Density

6.1. Block diagram of test setup

Same with 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.


(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4. Test result

EUT Set Mode	Antenna	Channel	Result (dBm/3 kHz)
1M	ANT1	CH0	-6.56
	ANT1	CH19	-6.43
	ANT1	CH39	-6.03
2M	ANT1	CH1	-9.39
	ANT1	CH19	-8.45
	ANT1	CH38	-8.01
Limit: <8 dBm/3 kHz			Verdict: Pass


6.5. Original test data

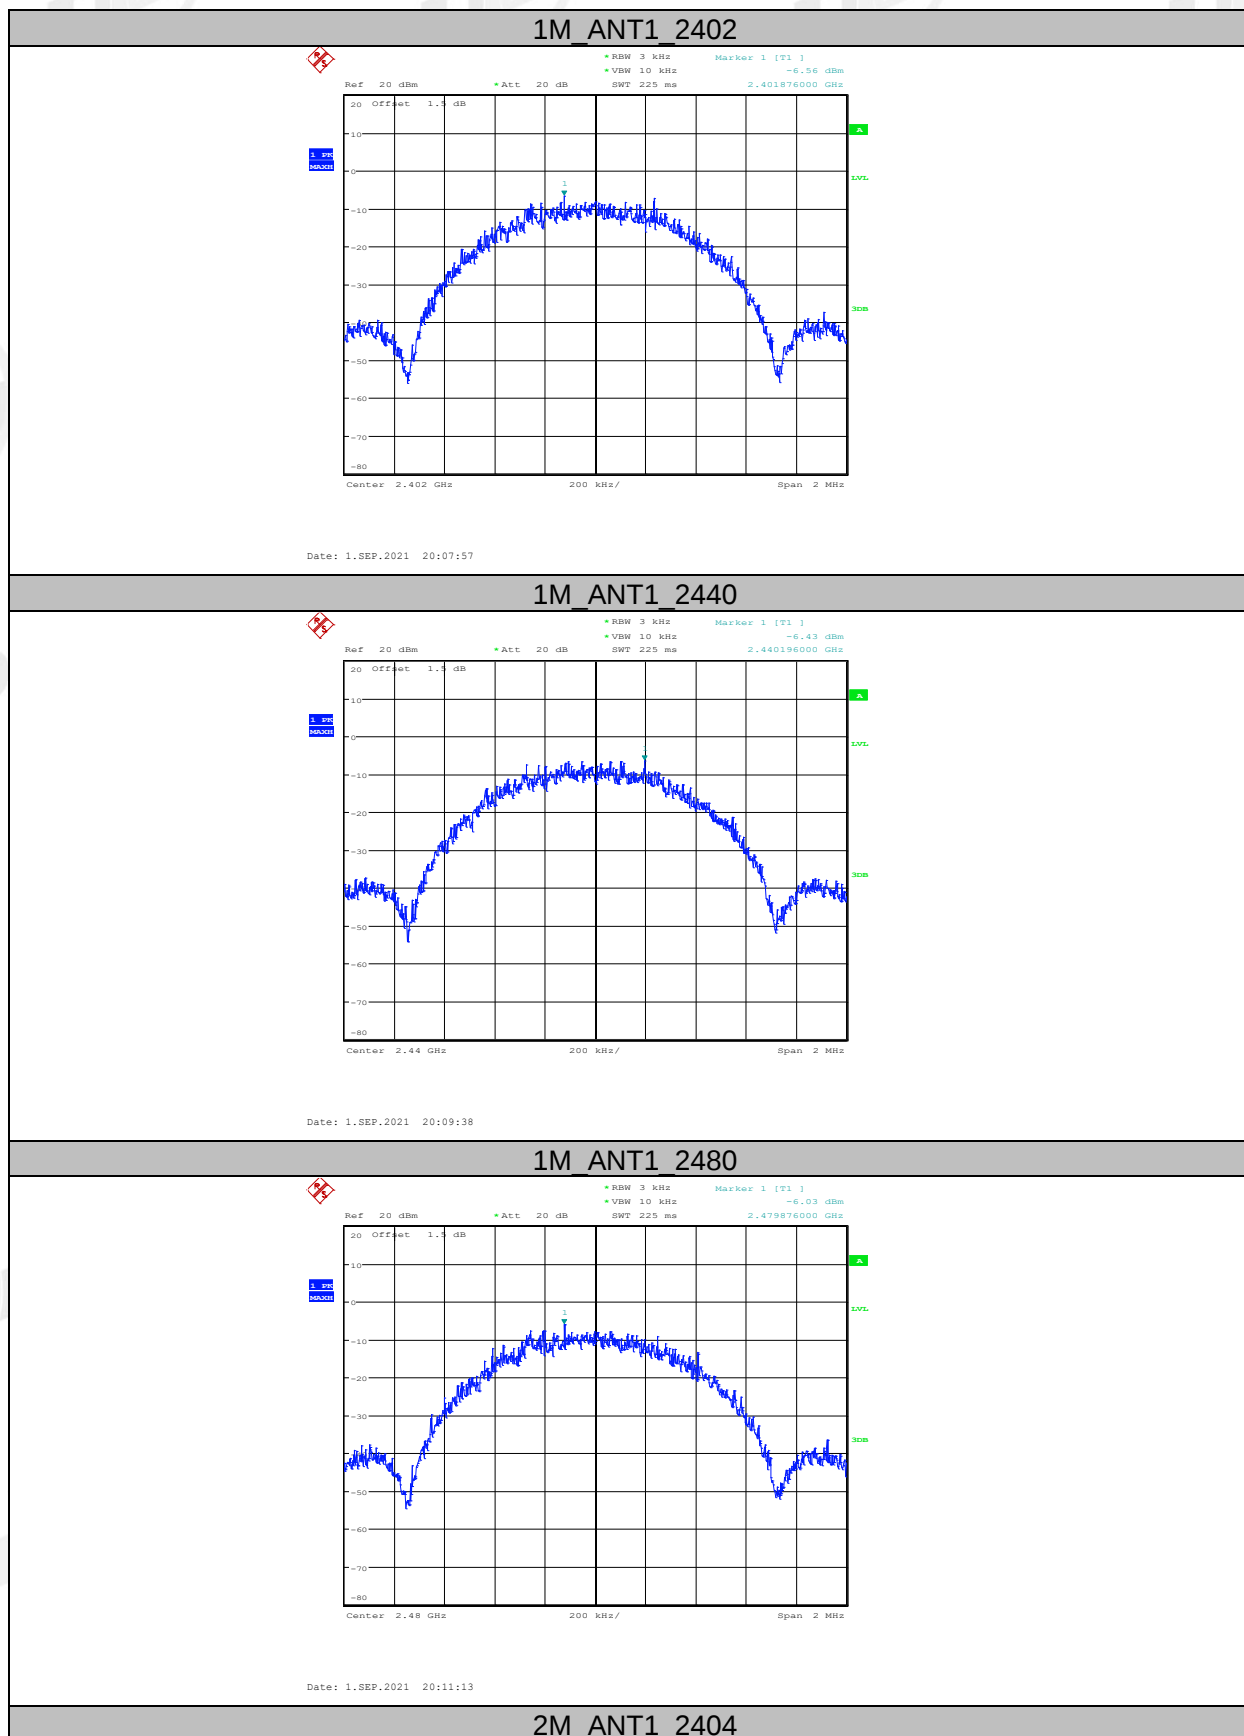

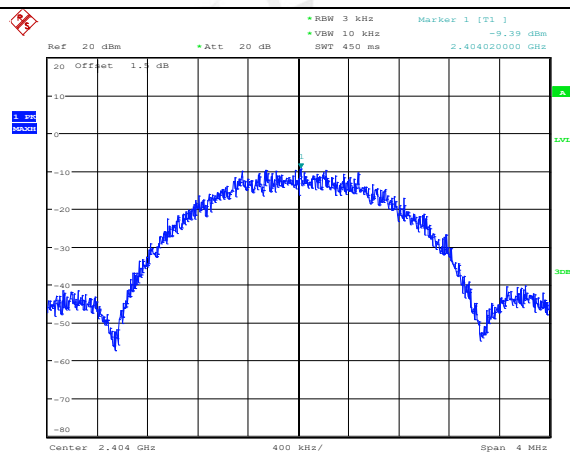


Date: 11.SEP.2021 19:46:24

2M ANT1 2440

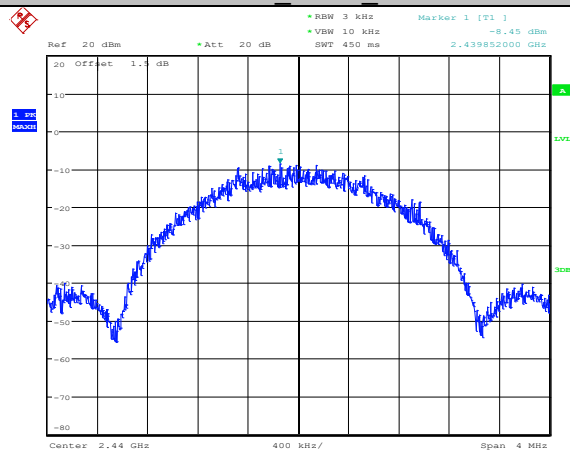

Date: 11.SEP.2021 19:48:06

2M ANT1 2478

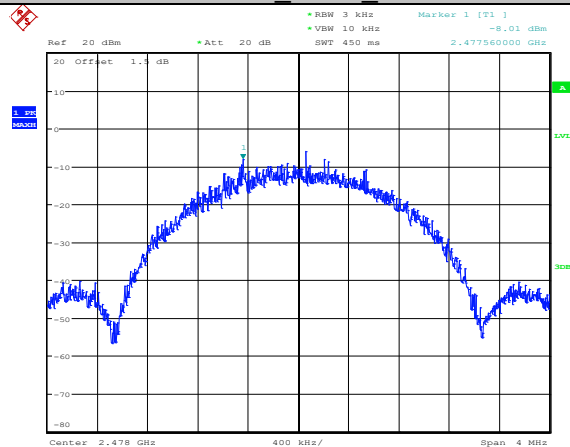

Date: 11.SEP.2021 19:49:36

7. Band Edge Compliance (Conducted Method)

7.1. Block diagram of test setup

Same with 4.1

7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100 kHz
VBW:	300 kHz
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

7.4. Test result

EUT Set Mode	CH or Frequency	Measured Range	Verdict
1M	CH0	2.310 GHz - 2.410 GHz	Pass
	CH39	2.470 GHz - 2.570 GHz	Pass
2M	CH1	2.310 GHz - 2.410 GHz	Pass
	CH38	2.470 GHz - 2.570 GHz	Pass

7.5. Original test data

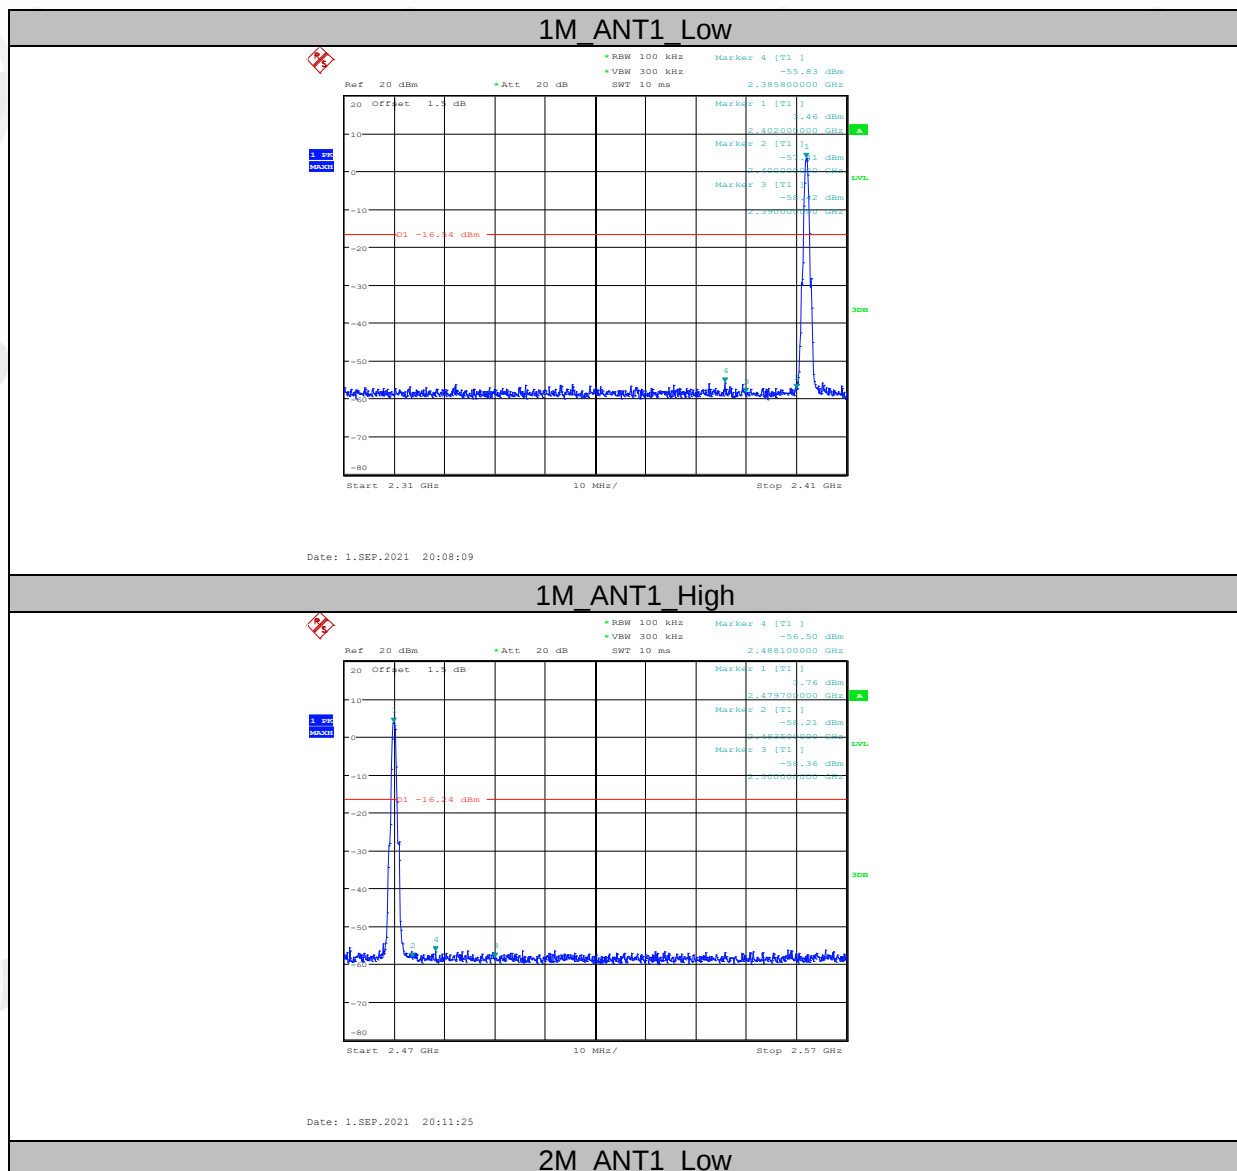


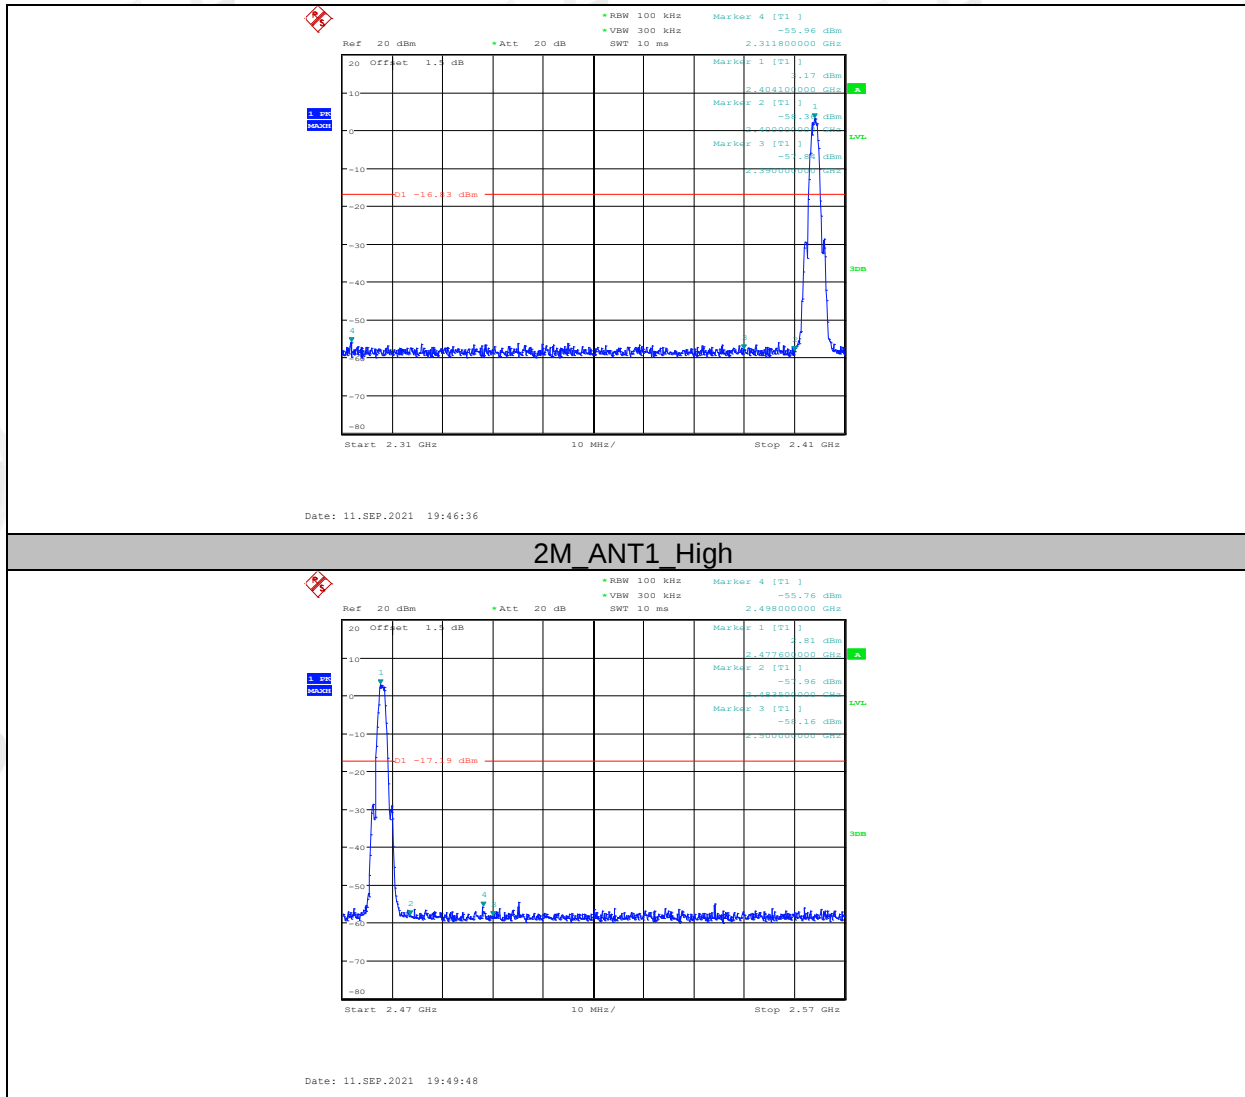


8. Radiated Emission

8.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

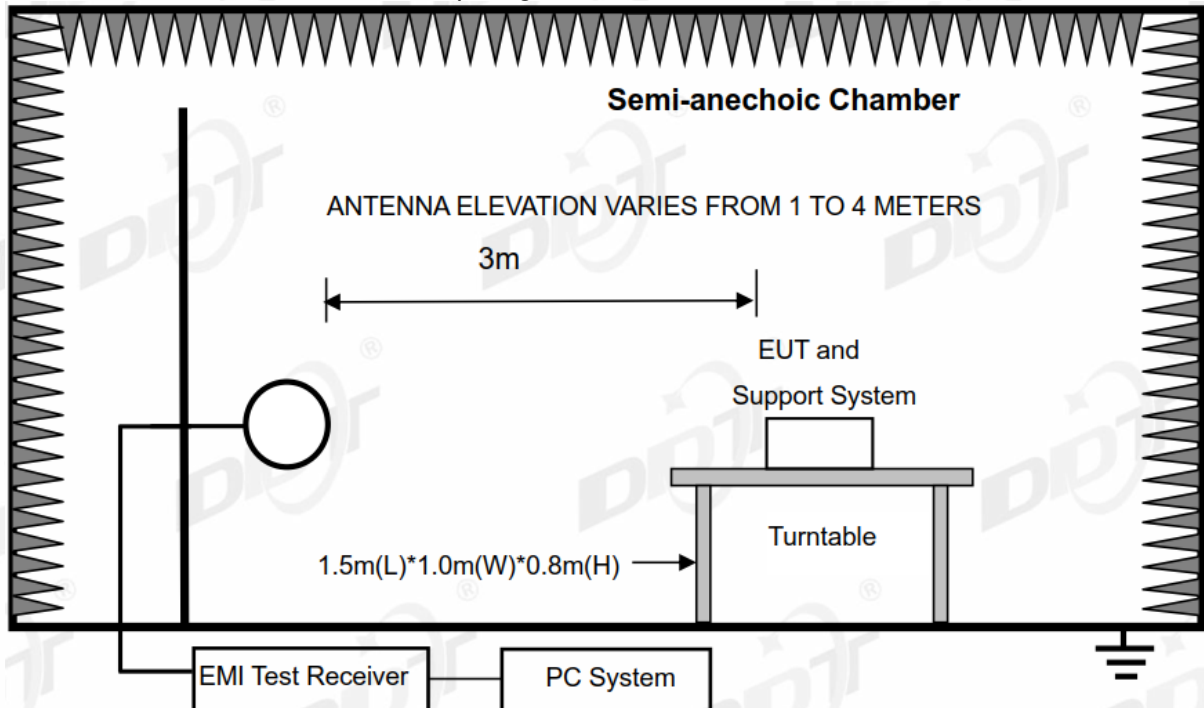

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

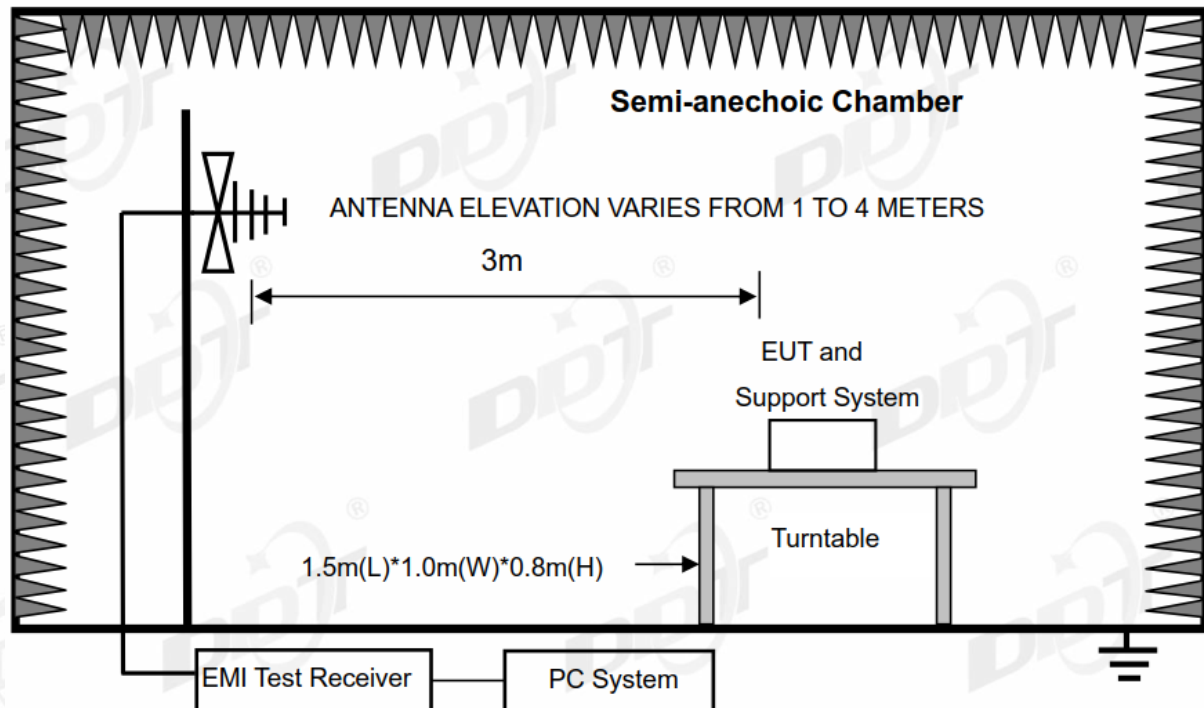

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

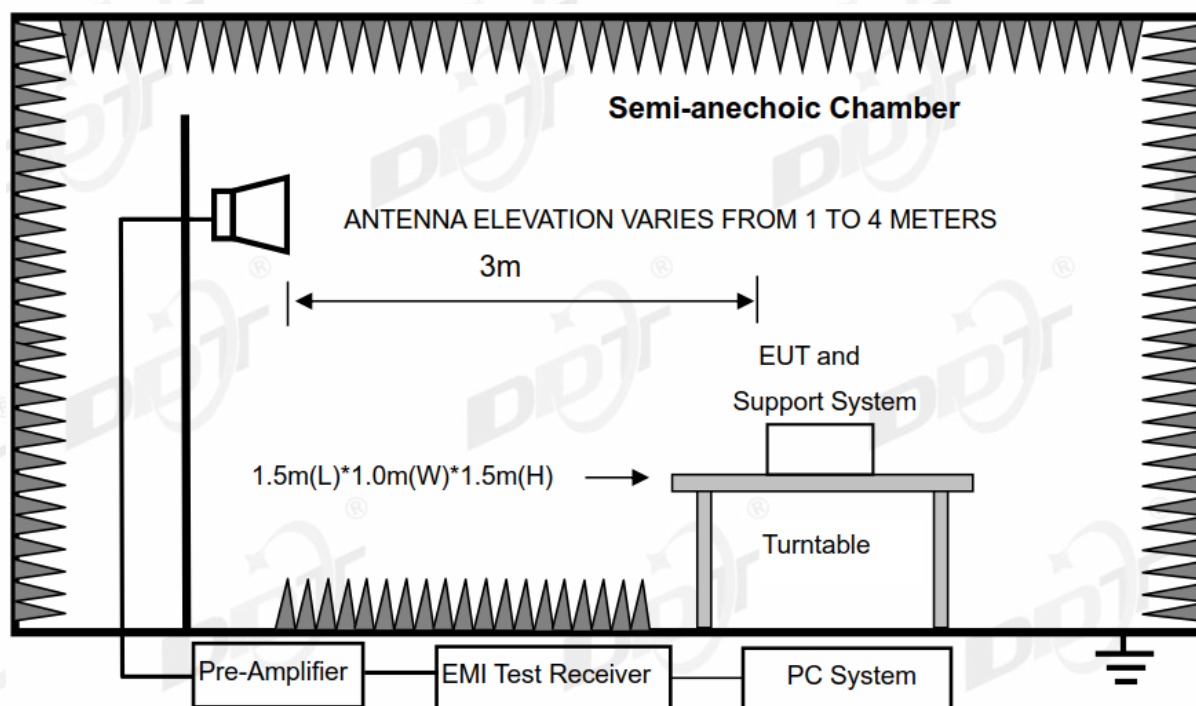

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

8.2.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$	$67.6-20\log(F)$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$	$87.6-20\log(F)$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V/m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V/m}) + 40\log(30\text{m}/3\text{m})$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1 G and 150 cm above the ground plane inside a semi-anechoic chamber for above 1 G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the Trilog Broadband Antenna or

Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so below final test was performed with frequency range from 30 MHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

8.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limit.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in GFSK, Tx 2440 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC BELOW 1G\FCC BELOW 1G_00001.EMI

Test Date : 2021-08-24

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa Antenna/Distance : VLUB 9163 3#/3m/VERTICAL

Memo : 1M with charging IC: CW6305A

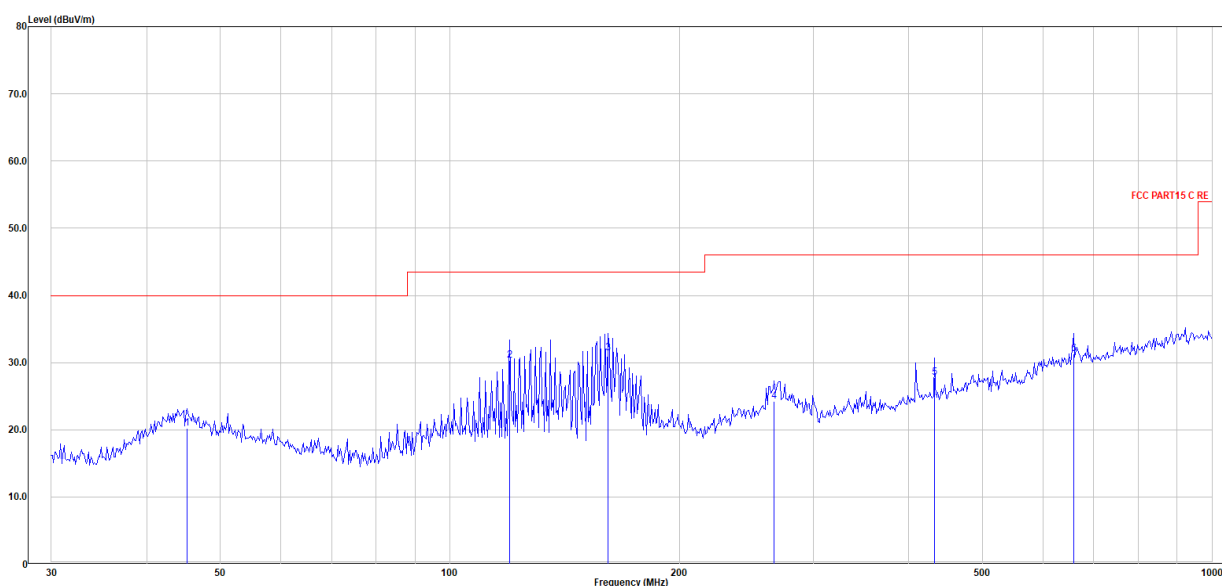

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	45.22	1.51	14.99	3.67	20.17	40.00	-19.83	QP	VERTICAL
2	119.86	17.25	9.11	3.96	30.32	43.50	-13.18	QP	VERTICAL
3	161.47	18.65	8.60	4.13	31.38	43.50	-12.12	QP	VERTICAL
4	266.61	7.08	12.60	4.58	24.26	46.00	-21.74	QP	VERTICAL
5	432.55	6.40	16.15	5.15	27.71	46.00	-18.29	QP	VERTICAL
6	658.84	6.53	19.00	5.79	31.32	46.00	-14.68	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC BELOW 1G\FCC BELOW
1G_00002.EMI

Test Date : 2021-08-24

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : VLUB 9163 3#/3m/HORIZONTAL

Memo : 1M with charging IC: CW6305A

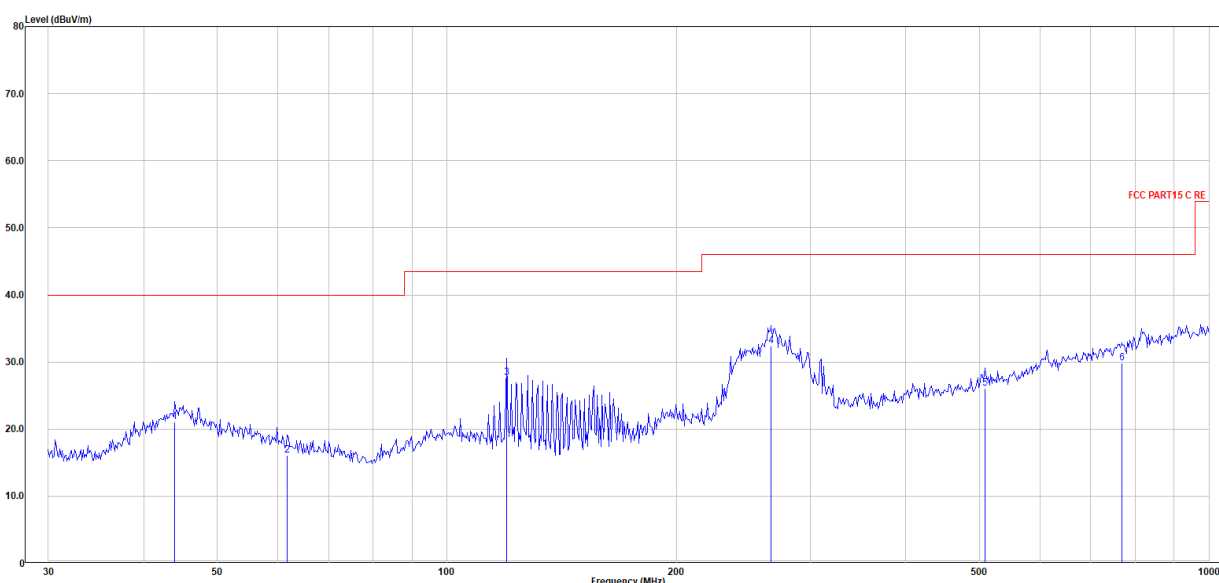

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	43.97	2.45	14.98	3.66	21.08	40.00	-18.92	QP	HORIZONTAL
2	61.78	2.28	10.19	3.66	16.13	40.00	-23.87	QP	HORIZONTAL
3	119.86	14.54	9.11	3.96	27.61	43.50	-15.89	QP	HORIZONTAL
4	266.61	15.23	12.60	4.58	32.41	46.00	-13.59	QP	HORIZONTAL
5	508.26	3.59	17.13	5.37	26.10	46.00	-19.90	QP	HORIZONTAL
6	768.75	3.20	20.60	6.08	29.88	46.00	-16.12	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC BELOW 1G\FCC BELOW
1G_00003.EMI

Test Date : 2021-08-24

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : VLUB 9163 3#/3m/HORIZONTAL

Memo : 2M with charging IC: CW6305A

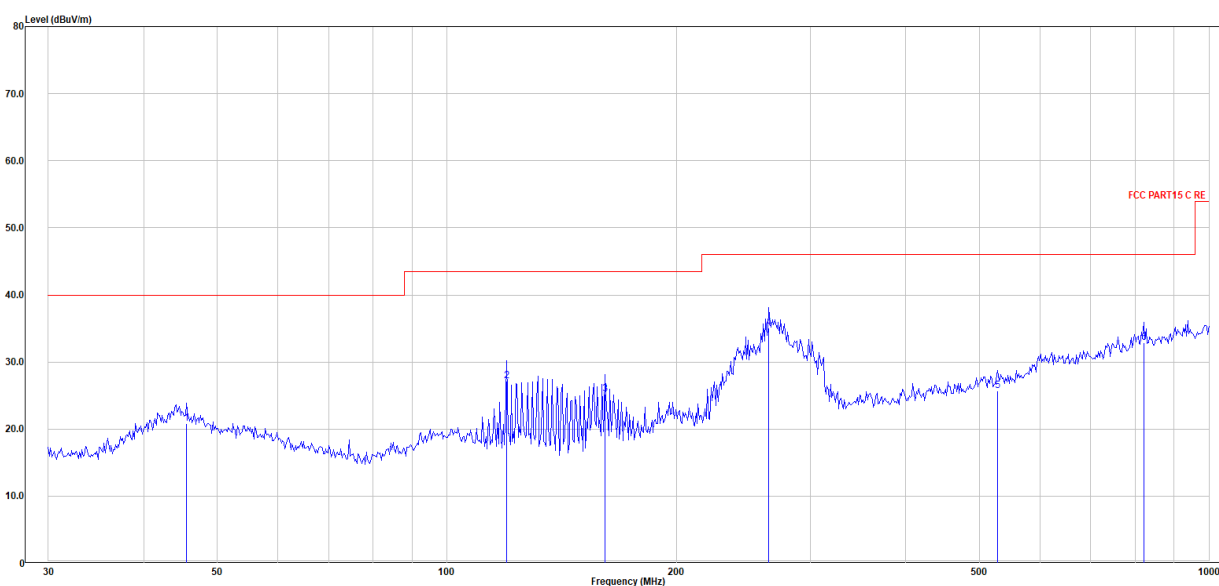

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	45.53	2.33	14.83	3.67	20.83	40.00	-19.17	QP	HORIZONTAL
2	119.86	14.10	9.11	3.96	27.17	43.50	-16.33	QP	HORIZONTAL
3	161.47	12.46	8.60	4.13	25.19	43.50	-18.31	QP	HORIZONTAL
4	264.75	17.93	12.61	4.58	35.11	46.00	-10.89	QP	HORIZONTAL
5	528.25	2.96	17.30	5.42	25.69	46.00	-20.31	QP	HORIZONTAL
6	821.71	5.78	20.90	6.22	32.89	46.00	-13.11	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC BELOW 1G\FCC BELOW
1G_00004.EMI

Test Date : 2021-08-24

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : VLUB 9163 3#/3m/VERTICAL

Memo : 2M with charging IC: CW6305A

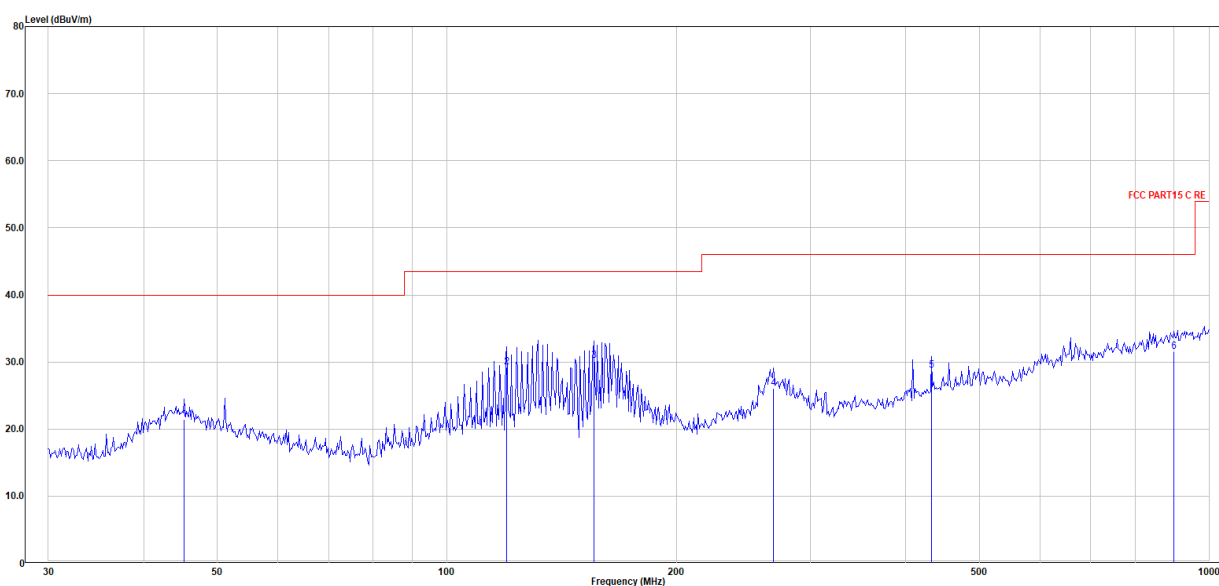

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	45.22	2.79	14.99	3.67	21.45	40.00	-18.55	QP	VERTICAL
2	119.86	16.19	9.11	3.96	29.26	43.50	-14.24	QP	VERTICAL
3	155.91	17.75	8.30	4.09	30.14	43.50	-13.36	QP	VERTICAL
4	268.49	8.92	12.60	4.59	26.11	46.00	-19.89	QP	VERTICAL
5	432.55	7.48	16.15	5.15	28.79	46.00	-17.21	QP	VERTICAL
6	900.15	3.09	22.10	6.37	31.57	46.00	-14.43	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 100 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC BELOW 1G\FCC BELOW
1G_00005.EMI

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : VLUB 9163 3#/3m/VERTICAL

Memo : 1M with charging IC: CW6305B

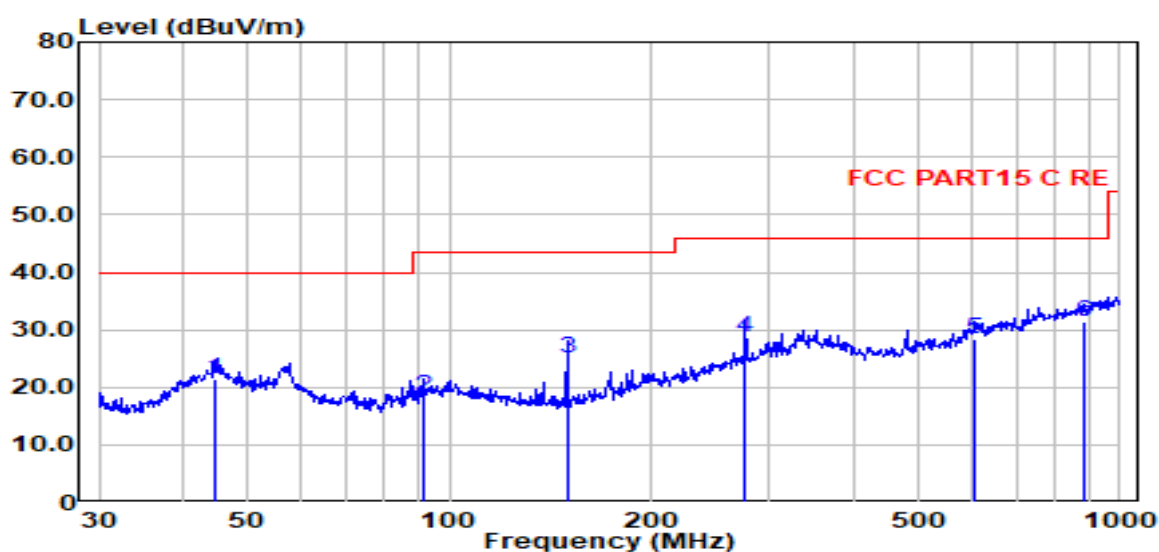

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	44.74	2.76	15.07	3.66	21.49	40.00	-18.51	QP	VERTICAL
2	91.49	4.33	10.35	3.85	18.53	43.50	-24.97	QP	VERTICAL
3	150.01	12.97	8.00	4.06	25.04	43.50	-18.46	QP	VERTICAL
4	276.12	11.32	12.72	4.62	28.66	46.00	-17.34	QP	VERTICAL
5	607.79	3.68	19.20	5.63	28.50	46.00	-17.50	QP	VERTICAL
6	881.41	3.25	21.73	6.34	31.31	46.00	-14.69	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC BELOW 1G\FCC BELOW
1G_00006.EMI

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : VLUB 9163 3#/3m/HORIZONTAL

Memo : 1M with charging IC: CW6305B

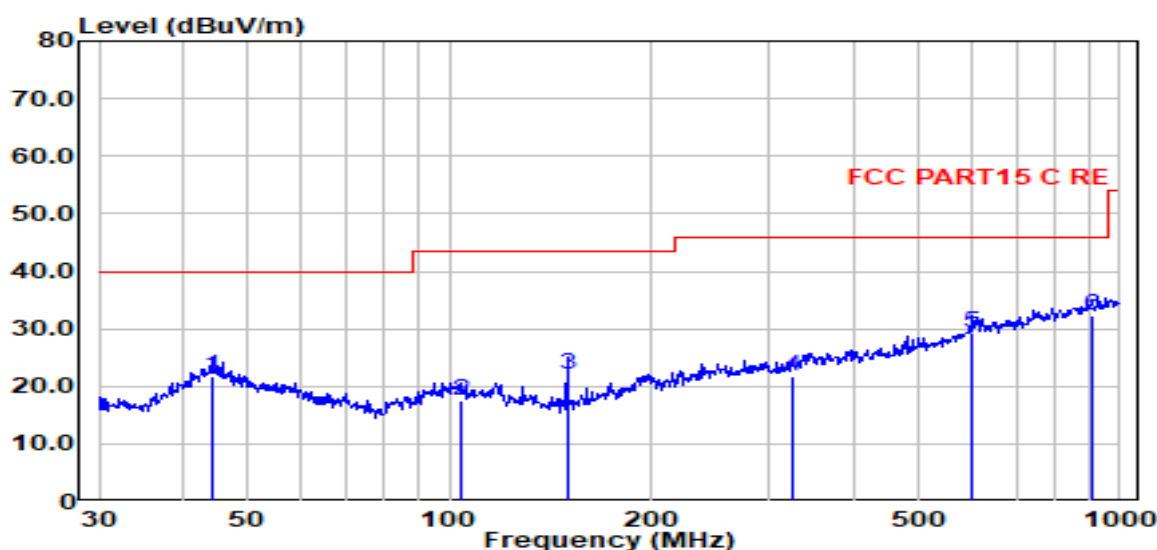

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	44.28	3.14	15.03	3.66	21.82	40.00	-18.18	QP	HORIZONTAL
2	103.81	2.28	11.34	3.90	17.52	43.50	-25.98	QP	HORIZONTAL
3	150.01	9.99	8.00	4.06	22.05	43.50	-21.45	QP	HORIZONTAL
4	324.46	3.03	13.88	4.79	21.70	46.00	-24.30	QP	HORIZONTAL
5	603.54	4.41	19.17	5.61	29.20	46.00	-16.80	QP	HORIZONTAL
6	912.86	3.40	22.36	6.41	32.16	46.00	-13.84	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC BELOW 1G\FCC BELOW
1G_00007.EMI

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : VLUB 9163 3#/3m/HORIZONTAL

Memo : 2M with charging IC: CW6305B

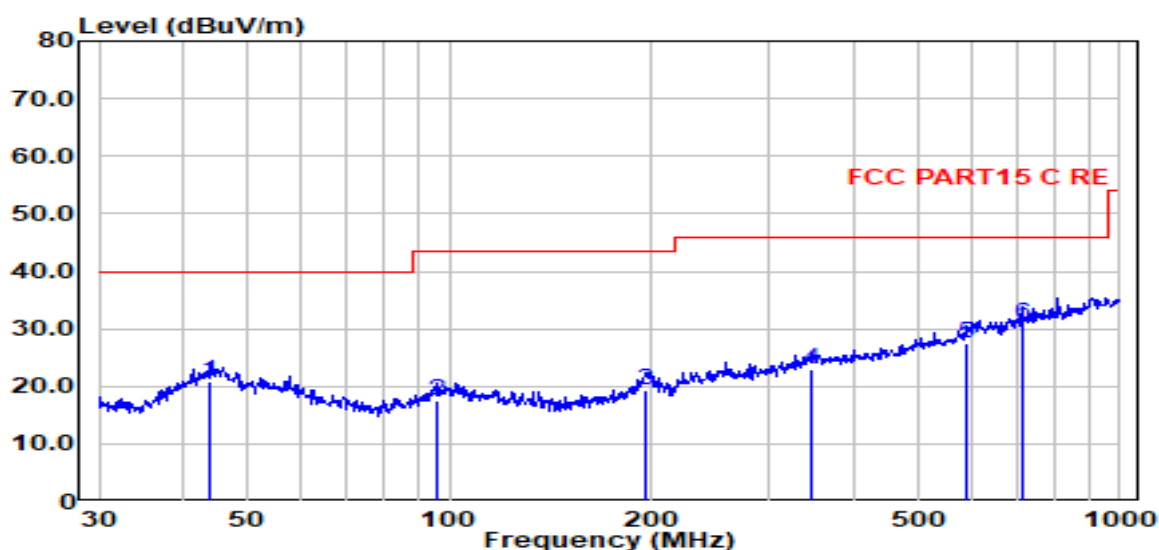

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	43.97	2.11	14.98	3.66	20.74	40.00	-19.26	QP	HORIZONTAL
2	95.43	2.52	11.14	3.87	17.53	43.50	-25.97	QP	HORIZONTAL
3	195.82	3.23	11.78	4.33	19.34	43.50	-24.16	QP	HORIZONTAL
4	345.60	3.23	14.75	4.87	22.84	46.00	-23.16	QP	HORIZONTAL
5	593.05	2.94	19.02	5.58	27.54	46.00	-18.46	QP	HORIZONTAL
6	714.17	5.04	19.70	5.92	30.66	46.00	-15.34	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC BELOW 1G\FCC BELOW 1G_00008.EMI

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : Tx mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : VLUB 9163 3#/3m/VERTICAL

Memo : 2M with charging IC: CW6305B

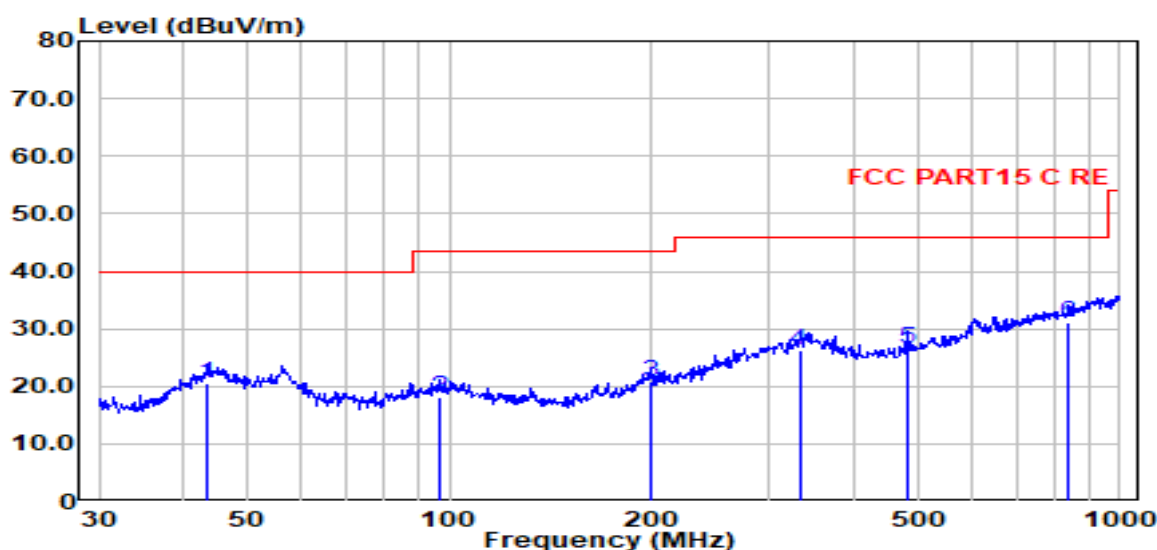

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	43.51	2.23	14.70	3.65	20.59	40.00	-19.41	QP	VERTICAL
2	96.77	2.82	11.35	3.87	18.05	43.50	-25.45	QP	VERTICAL
3	199.29	4.63	11.97	4.35	20.95	43.50	-22.55	QP	VERTICAL
4	332.52	7.42	14.15	4.82	26.39	46.00	-19.61	QP	VERTICAL
5	480.53	4.86	16.41	5.30	26.57	46.00	-19.43	QP	VERTICAL
6	839.18	3.78	21.17	6.26	31.20	46.00	-14.80	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Radiated Emission test (above 1 GHz)

Freq. (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector type	Polarization
GFSK TX 1M 2402MHz									
4961.00	46.31	31.71	6.99	43.23	41.77	74.00	-32.23	Peak	HORIZONTAL
7800.00	46.68	37.08	8.71	42.44	50.03	74.00	-23.97	Peak	HORIZONTAL
9823.00	45.58	38.76	10.06	42.13	52.28	74.00	-21.72	Peak	HORIZONTAL
12237.00	37.36	39.02	11.56	41.78	46.15	54.00	-7.85	Average	HORIZONTAL
12237.00	46.14	39.02	11.56	41.78	54.93	74.00	-19.07	Peak	HORIZONTAL
14940.00	33.97	40.74	12.96	41.75	45.93	54.00	-8.07	Average	HORIZONTAL
14940.00	44.52	40.74	12.96	41.75	56.48	74.00	-17.52	Peak	HORIZONTAL
17949.00	30.77	48.51	13.76	42.48	50.55	54.00	-3.45	Average	HORIZONTAL
17949.00	42.91	48.51	13.76	42.48	62.69	74.00	-11.31	Peak	HORIZONTAL
4893.00	46.22	31.54	6.90	43.29	41.38	74.00	-32.62	Peak	VERTICAL
7035.00	46.30	35.60	8.03	42.98	46.96	74.00	-27.04	Peak	VERTICAL
9245.00	45.38	38.24	9.59	41.90	51.31	74.00	-22.69	Peak	VERTICAL
11846.00	37.65	39.48	11.09	41.63	46.59	54.00	-7.41	Average	VERTICAL
11846.00	45.73	39.48	11.09	41.63	54.66	74.00	-19.34	Peak	VERTICAL
14940.00	34.88	40.74	12.96	41.75	46.84	54.00	-7.16	Average	VERTICAL
14940.00	44.75	40.74	12.96	41.75	56.71	74.00	-17.29	Peak	VERTICAL
17966.00	30.38	48.74	13.77	42.49	50.40	54.00	-3.60	Average	VERTICAL
17966.00	42.76	48.74	13.77	42.49	62.79	74.00	-11.21	Peak	VERTICAL
GFSK Tx 1M 2440MHz									
4417.00	46.32	30.43	6.34	43.67	39.43	74.00	-34.57	Peak	HORIZONTAL
6712.00	45.29	34.69	7.88	43.14	44.72	74.00	-29.28	Peak	HORIZONTAL
9279.00	45.39	38.30	9.60	41.91	51.38	74.00	-22.62	Peak	HORIZONTAL
12050.00	38.04	39.24	11.17	41.48	46.97	54.00	-7.03	Average	HORIZONTAL
12050.00	45.51	39.24	11.17	41.48	54.44	74.00	-19.56	Peak	HORIZONTAL
14940.00	34.25	40.74	12.96	41.75	46.21	54.00	-7.79	Average	HORIZONTAL
14940.00	44.64	40.74	12.96	41.75	56.60	74.00	-17.40	Peak	HORIZONTAL
17983.00	30.41	48.97	13.79	42.49	50.67	54.00	-3.33	Average	HORIZONTAL
17983.00	42.87	48.97	13.79	42.49	63.13	74.00	-10.87	Peak	HORIZONTAL
4587.00	47.06	30.81	6.51	43.53	40.85	74.00	-33.15	Peak	VERTICAL
6967.00	45.82	35.41	7.96	43.02	46.17	74.00	-27.83	Peak	VERTICAL
9296.00	45.69	38.33	9.60	41.92	51.71	74.00	-22.29	Peak	VERTICAL
11676.00	37.39	39.69	11.10	41.89	46.30	54.00	-7.70	Average	VERTICAL
11676.00	45.67	39.69	11.10	41.89	54.58	74.00	-19.42	Peak	VERTICAL
14634.00	34.39	41.48	12.32	41.99	46.20	54.00	-7.80	Average	VERTICAL
14634.00	44.42	41.48	12.32	41.99	56.23	74.00	-17.77	Peak	VERTICAL
17932.00	30.67	48.28	13.75	42.48	50.22	54.00	-3.78	Average	VERTICAL
17932.00	42.84	48.28	13.75	42.48	62.38	74.00	-11.62	Peak	VERTICAL
GFSK Tx 1M 2480MHz									
4366.00	46.60	30.33	6.30	43.71	39.53	74.00	-34.47	Peak	HORIZONTAL
7324.00	47.43	36.41	8.53	42.77	49.60	74.00	-24.40	Peak	HORIZONTAL
9160.00	45.59	38.09	9.56	41.86	51.37	74.00	-22.63	Peak	HORIZONTAL
12543.00	37.86	38.72	12.02	42.27	46.33	54.00	-7.67	Average	HORIZONTAL
12543.00	46.93	38.72	12.02	42.27	55.40	74.00	-18.60	Peak	HORIZONTAL

14651.00	34.77	41.44	12.36	41.98	46.59	54.00	-7.41	Average	HORIZONTAL
14651.00	44.57	41.44	12.36	41.98	56.39	74.00	-17.61	Peak	HORIZONTAL
17949.00	30.66	48.51	13.76	42.48	50.44	54.00	-3.56	Average	HORIZONTAL
17949.00	42.36	48.51	13.76	42.48	62.15	74.00	-11.85	Peak	HORIZONTAL
5029.00	46.53	31.80	7.04	43.21	42.16	74.00	-31.84	Peak	VERTICAL
7239.00	46.44	36.17	8.39	42.83	48.17	74.00	-25.83	Peak	VERTICAL
9466.00	45.46	38.64	9.65	41.99	51.77	74.00	-22.23	Peak	VERTICAL
11744.00	37.33	39.61	11.10	41.78	46.25	54.00	-7.75	Average	VERTICAL
11744.00	45.59	39.61	11.10	41.78	54.51	74.00	-19.49	Peak	VERTICAL
14923.00	34.98	40.78	12.93	41.76	46.93	54.00	-7.07	Average	VERTICAL
14923.00	44.26	40.78	12.93	41.76	56.21	74.00	-17.79	Peak	VERTICAL
17966.00	30.28	48.74	13.77	42.49	50.30	54.00	-3.70	Average	VERTICAL
17966.00	42.30	48.74	13.77	42.49	62.32	74.00	-11.68	Peak	VERTICAL

GFSK TX 2M 2404MHz									
4808.00	53.40	32.32	43.34	6.80	49.18	74.00	-24.82	Peak	HORIZONTAL
6950.00	48.04	36.18	43.02	7.95	49.15	74.00	-24.85	Peak	HORIZONTAL
8531.00	46.34	38.02	42.03	8.85	51.18	74.00	-22.82	Peak	HORIZONTAL
10809.00	44.97	39.72	42.77	10.49	52.41	74.00	-21.59	Peak	HORIZONTAL
12764.00	44.90	39.32	42.63	11.60	53.19	74.00	-20.81	Peak	HORIZONTAL
14430.00	41.62	41.33	42.15	12.07	52.87	74.00	-21.13	Peak	HORIZONTAL
4808.00	54.54	32.32	43.34	6.80	50.32	74.00	-23.68	Peak	VERTICAL
6899.00	47.92	36.06	43.05	7.94	48.87	74.00	-25.13	Peak	VERTICAL
9041.00	46.94	38.34	41.82	9.53	52.99	74.00	-21.01	Peak	VERTICAL
11370.00	45.06	39.80	42.33	10.98	53.51	74.00	-20.49	Peak	VERTICAL
12951.00	44.14	39.62	42.92	11.25	52.09	74.00	-21.91	Peak	VERTICAL
15450.00	43.11	39.68	41.97	12.45	53.27	74.00	-20.73	Peak	VERTICAL
GFSK Tx 2M 2440MHz									
4880.00	55.79	32.46	43.29	6.89	51.85	74.00	-22.15	Peak	HORIZONTAL
4880.00	49.63	32.46	43.29	6.89	45.69	54.00	-8.31	Average	HORIZONTAL
7375.00	47.16	36.90	42.73	8.63	49.96	74.00	-24.04	Peak	HORIZONTAL
9636.00	46.01	38.80	42.06	9.83	52.58	74.00	-21.42	Peak	HORIZONTAL
11336.00	44.97	39.80	42.38	10.94	53.33	74.00	-20.67	Peak	HORIZONTAL
13444.00	43.82	40.68	42.77	11.52	53.25	74.00	-20.75	Peak	HORIZONTAL
15739.00	43.44	39.31	42.15	12.51	53.11	74.00	-20.89	Peak	HORIZONTAL
4876.00	57.62	32.45	43.29	6.89	53.67	74.00	-20.33	Peak	VERTICAL
4876.00	53.09	32.45	43.29	6.89	49.14	54.00	-4.86	Average	VERTICAL
7460.00	47.27	37.04	42.67	8.77	50.41	74.00	-23.59	Peak	VERTICAL
9755.00	46.69	38.80	42.11	9.98	53.36	74.00	-20.64	Peak	VERTICAL
11285.00	45.01	39.80	42.46	10.89	53.24	74.00	-20.76	Peak	VERTICAL
13461.00	44.24	40.71	42.76	11.54	53.73	74.00	-20.27	Peak	VERTICAL
15790.00	43.99	39.25	42.18	12.54	53.60	74.00	-20.40	Peak	VERTICAL
GFSK Tx 2M 2478MHz									
4956.00	57.91	32.61	43.23	6.99	54.28	74.00	-19.72	Peak	HORIZONTAL
4956.00	50.86	32.61	43.23	6.99	47.23	54.00	-6.77	Average	HORIZONTAL
7919.00	46.36	37.77	42.35	8.66	50.44	74.00	-23.56	Peak	HORIZONTAL
10129.00	45.34	39.01	42.29	10.30	52.36	74.00	-21.64	Peak	HORIZONTAL
12441.00	44.54	38.98	42.12	11.98	53.38	74.00	-20.62	Peak	HORIZONTAL

13410.00	43.86	40.60	42.79	11.50	53.17	74.00	-20.83	Peak	HORIZONTAL
15824.00	43.85	39.21	42.20	12.56	53.42	74.00	-20.58	Peak	HORIZONTAL
4956.00	60.95	32.61	43.23	6.99	57.32	74.00	-16.68	Peak	VERTICAL
4956.00	53.95	32.61	43.23	6.99	50.32	54.00	-3.68	Average	VERTICAL
8191.00	47.62	37.94	42.20	8.70	52.06	74.00	-21.94	Peak	VERTICAL
10350.00	45.22	39.36	42.45	10.34	52.47	74.00	-21.53	Peak	VERTICAL
11710.00	44.50	39.72	41.82	11.10	53.50	74.00	-20.50	Peak	VERTICAL
12849.00	44.88	39.46	42.77	11.44	53.01	74.00	-20.99	Peak	VERTICAL
15416.00	43.06	39.73	41.95	12.50	53.34	74.00	-20.66	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

Same as section 4.1

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test result

Mode	Freq. (MHz)	Verdict
1M	2402	Pass
	2440	Pass
	2480	Pass
2M	2404	Pass
	2440	Pass
	2478	Pass


9.5. Original test data

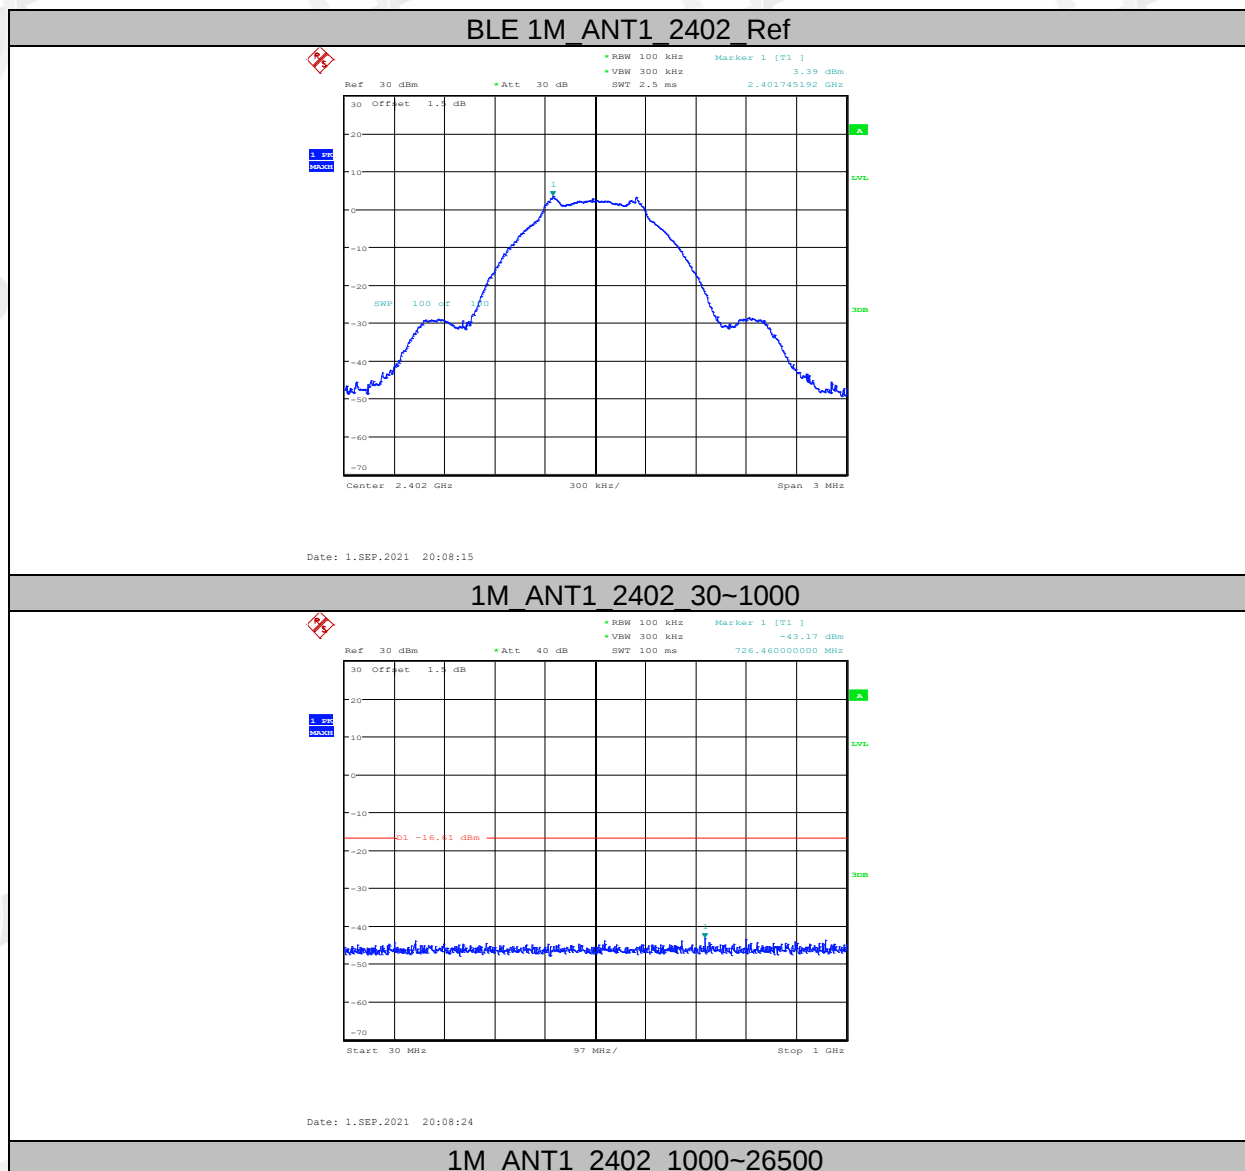

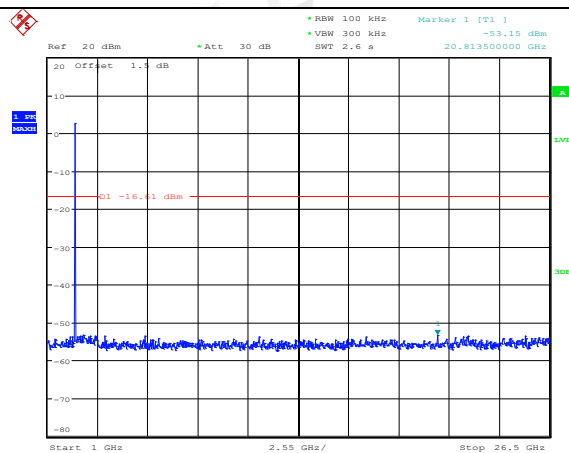


Date: 1.SEP.2021 20:08:35

1M ANT1 2440 Ref

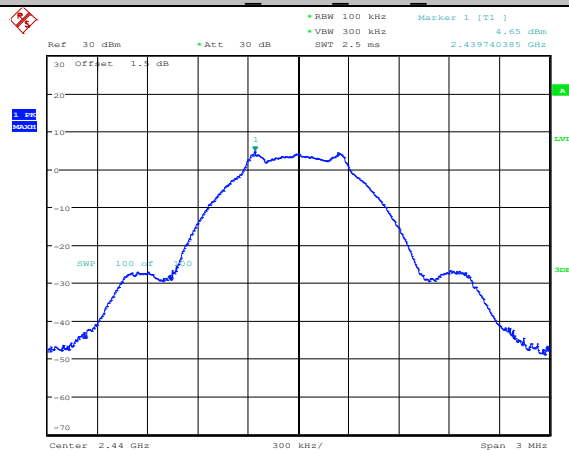


Date: 1.SEP.2021 20:09:44

1M ANT1 2440 30~1000

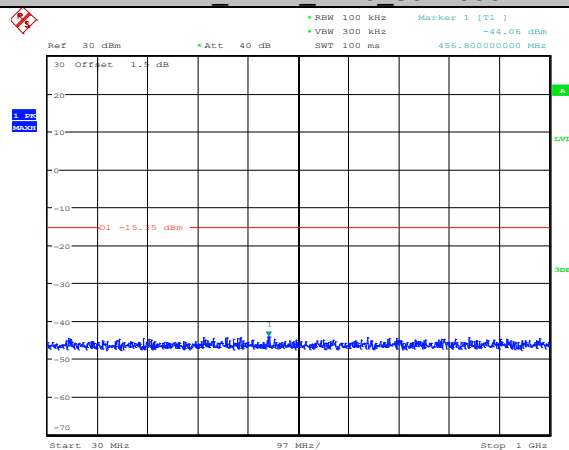


Date: 1.SEP.2021 20:09:53

1M ANT1 2440 1000~26500

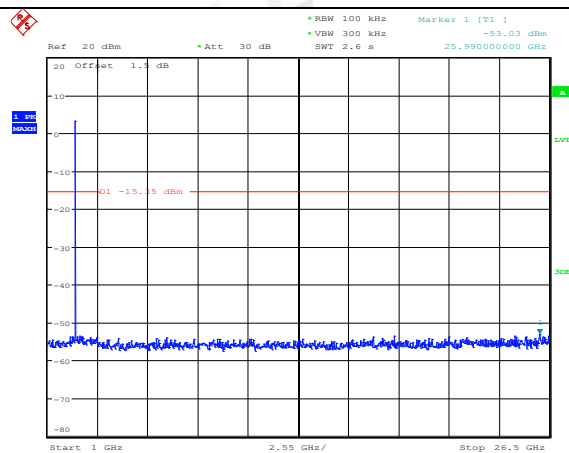


Date: 1.SEP.2021 20:10:04

1M ANT1 2480 Ref

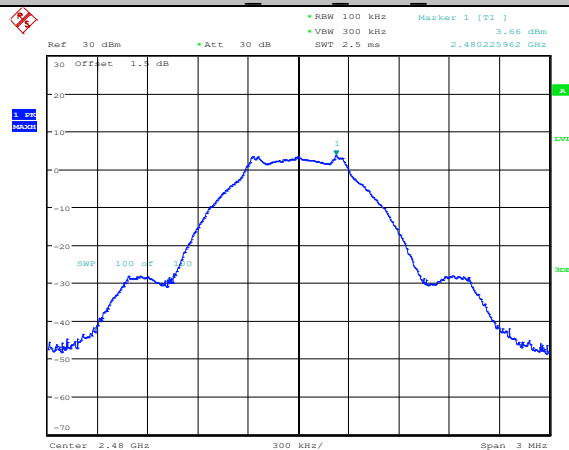


Date: 1.SEP.2021 20:11:32

1M ANT1 2480 30~1000

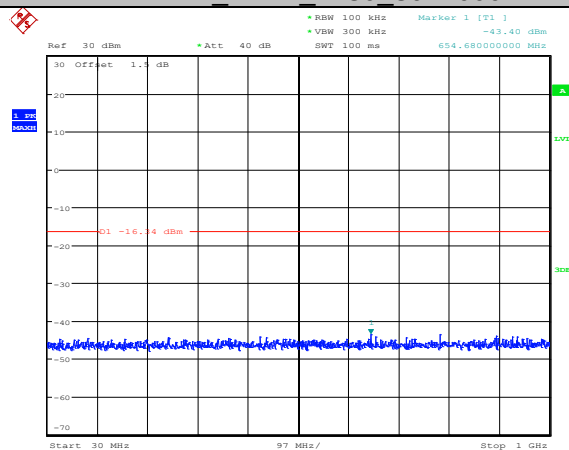


Date: 1.SEP.2021 20:11:40

1M ANT1 2480 1000~26500

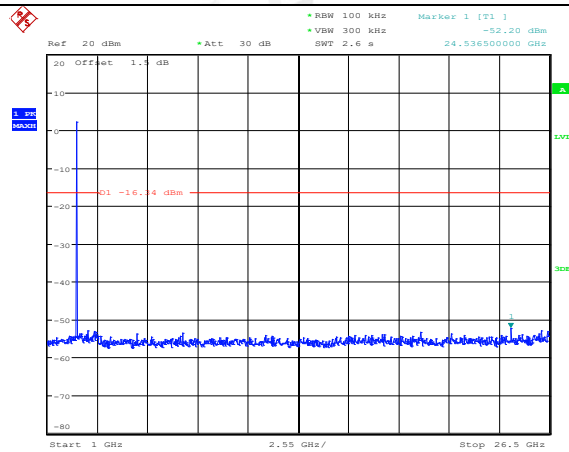


Date: 1.SEP.2021 20:11:51

2M ANT1 2404 Ref

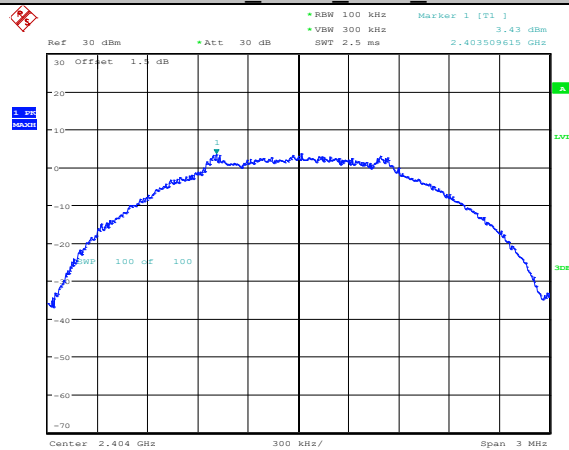


Date: 11.SEP.2021 19:46:43

2M ANT1 2404 30~1000

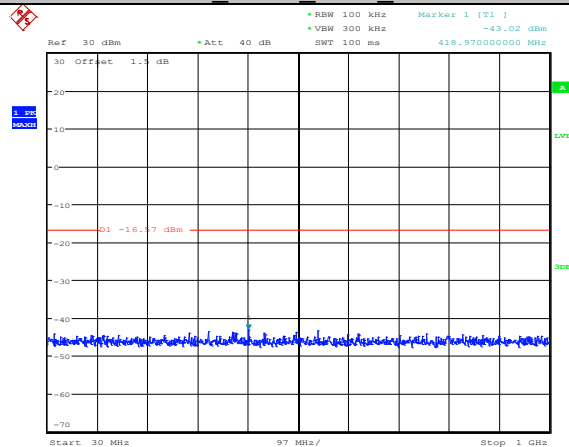


Date: 11.SEP.2021 19:46:52

2M ANT1 2404 1000~26500

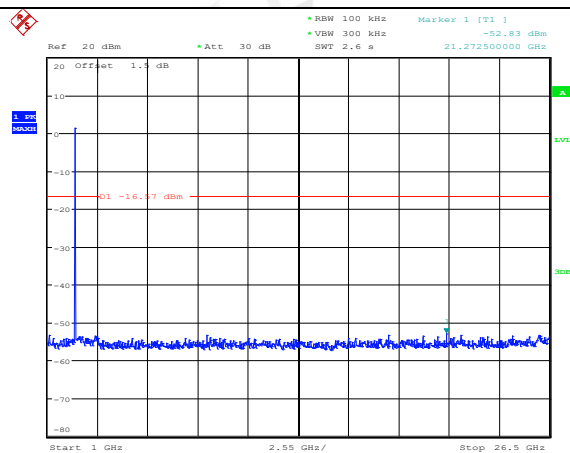


Date: 11.SEP.2021 19:47:03

2M ANT1 2440 Ref

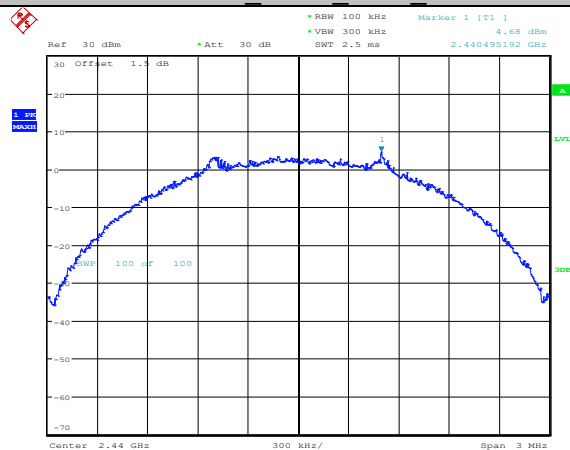


Date: 11.SEP.2021 19:48:12

2M ANT1 2440 30~1000

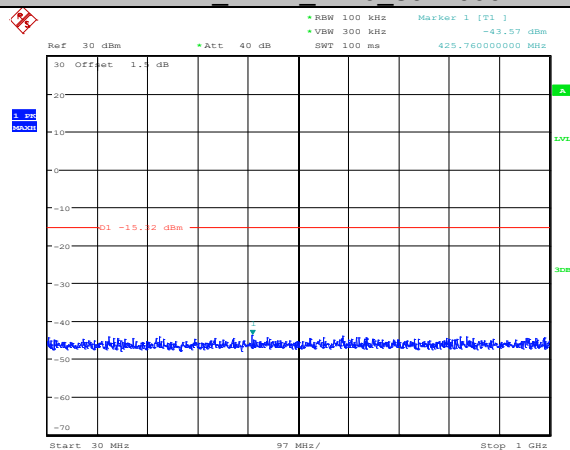


Date: 11.SEP.2021 19:48:21

2M ANT1 2440 1000~26500

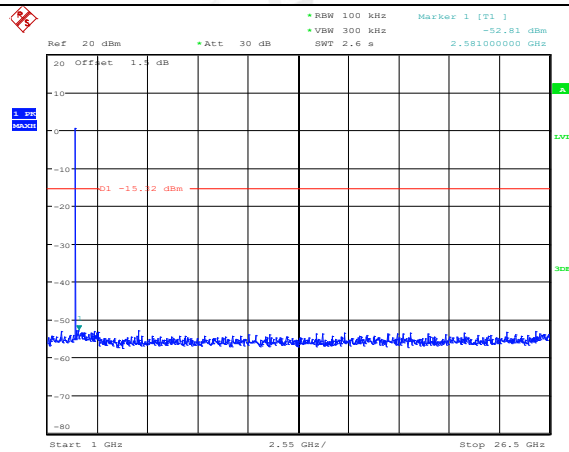


Date: 11.SEP.2021 19:48:32

2M ANT1 2478 Ref

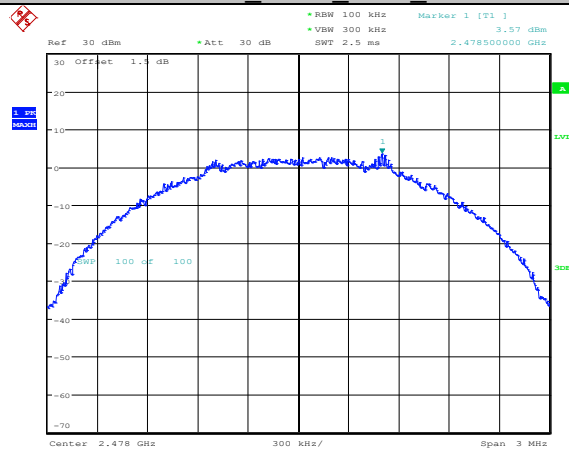


Date: 11.SEP.2021 19:49:54

2M ANT1 2478 30~1000

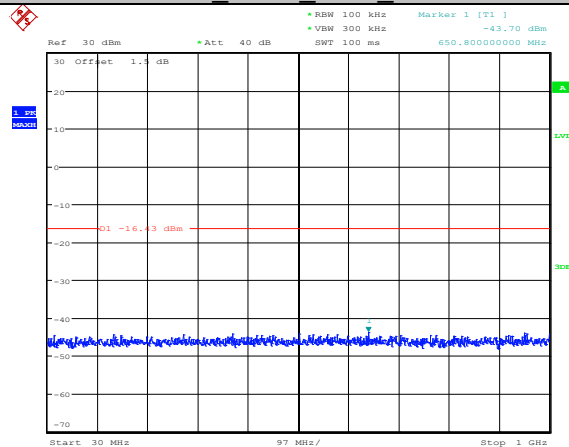


Date: 11.SEP.2021 19:50:03

2M ANT1 2478 1000~26500

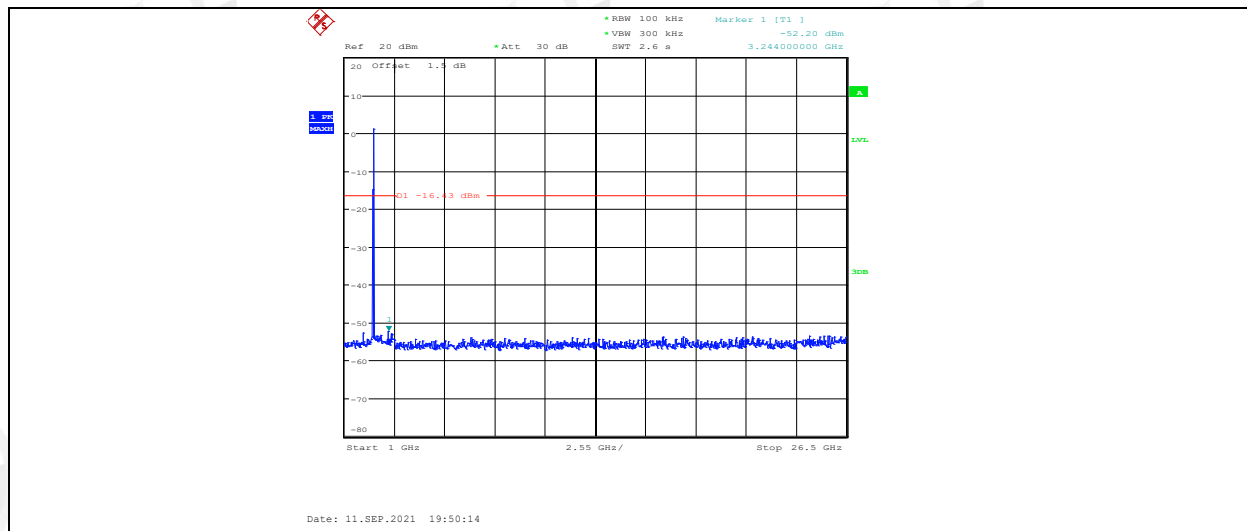

10. Emissions in Restricted Frequency Bands

10.1. Block diagram of test setup

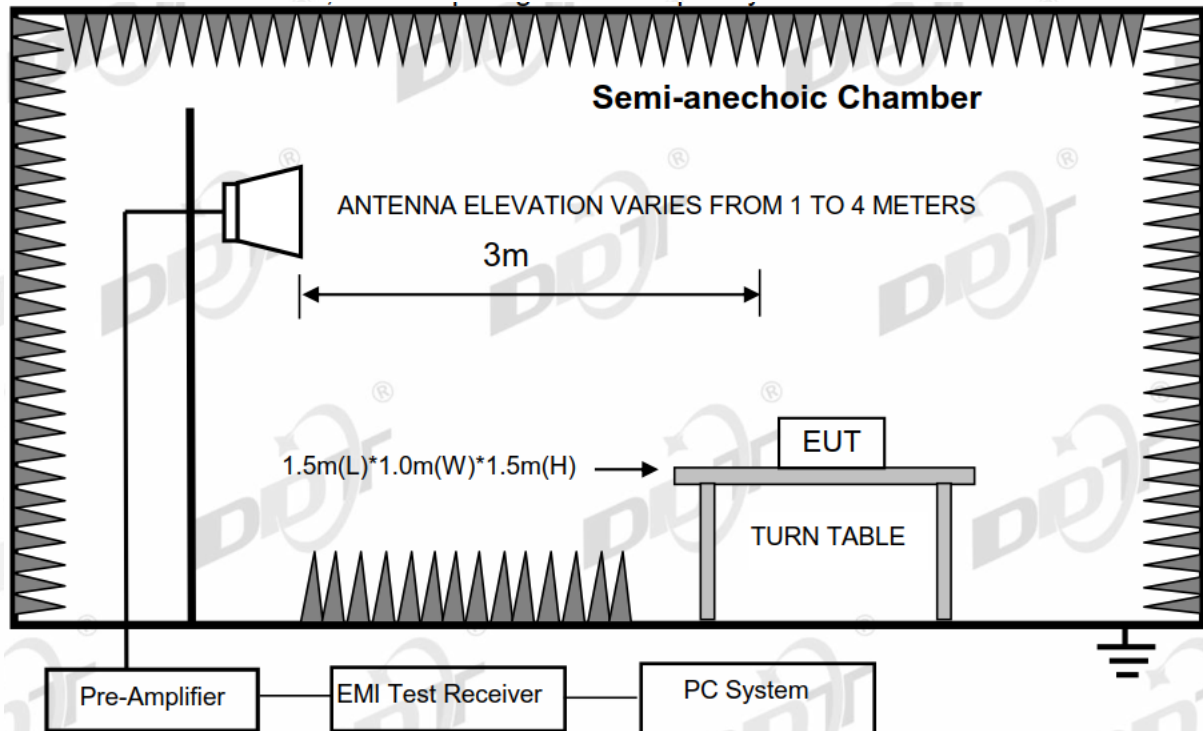

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

10.3. Test procedure

Same with clause 8.3 except change investigated frequency range from 2310 MHz to 2410 MHz and 2470 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

10.4. Test result

Pass. (See below detailed test result)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC ABOVE 1G\FCC ABOVE
1G_00015.EMI

Test Date : 2021-08-23

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : TX mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA
9120D/3m/HORIZONTAL

Memo : 1M 2402

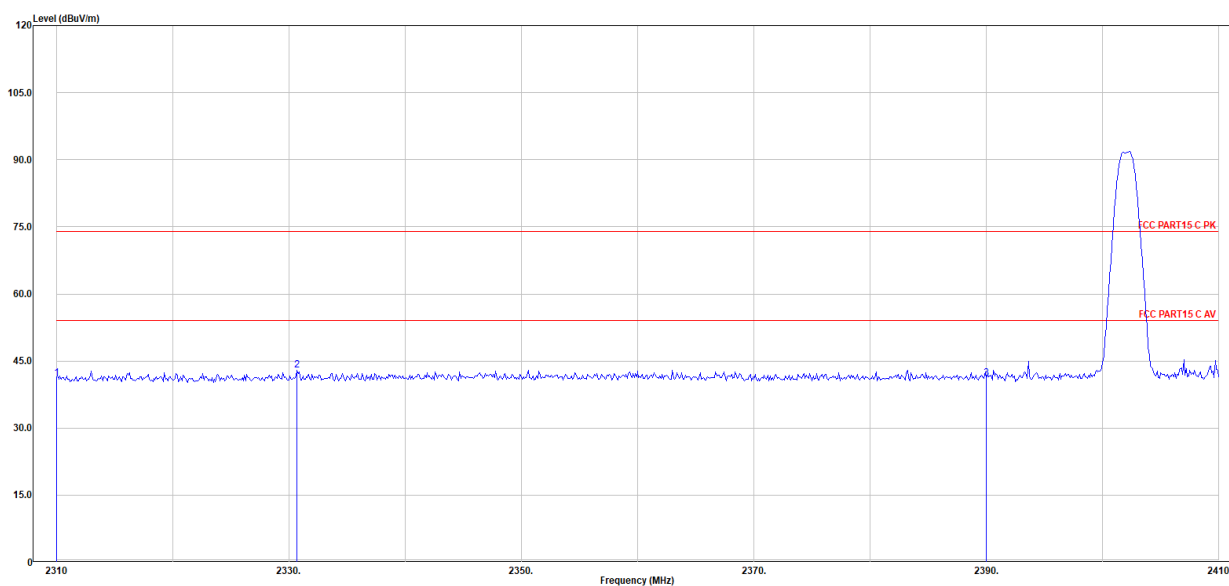

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2310.00	52.04	27.33	4.70	43.01	41.06	74.00	-32.94	Peak	HORIZONTAL
2	2330.70	53.82	27.39	4.72	43.03	42.91	74.00	-31.09	Peak	HORIZONTAL
3	2390.00	51.86	27.57	4.80	43.09	41.13	74.00	-32.87	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC ABOVE 1G\FCC ABOVE
1G_00016.EMI

Test Date : 2021-08-23

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : TX mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA 9120D/3m/VERTICAL

Memo : 1M 2402

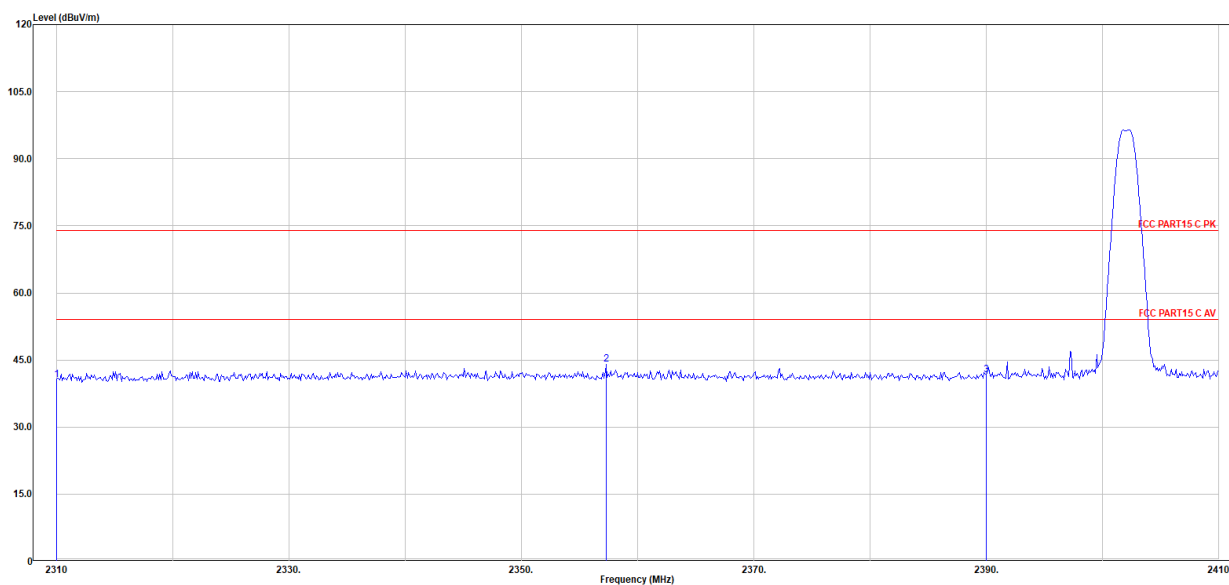

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2310.00	51.58	27.33	4.70	43.01	40.59	74.00	-33.41	Peak	VERTICAL
2	2357.30	54.82	27.47	4.76	43.06	43.99	74.00	-30.01	Peak	VERTICAL
3	2390.00	52.32	27.57	4.80	43.09	41.59	74.00	-32.41	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC ABOVE 1G\FCC ABOVE 1G_00017.EMI

Test Date : 2021-08-23

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : TX mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA 9120D/3m/VERTICAL

Memo : 1M 2480

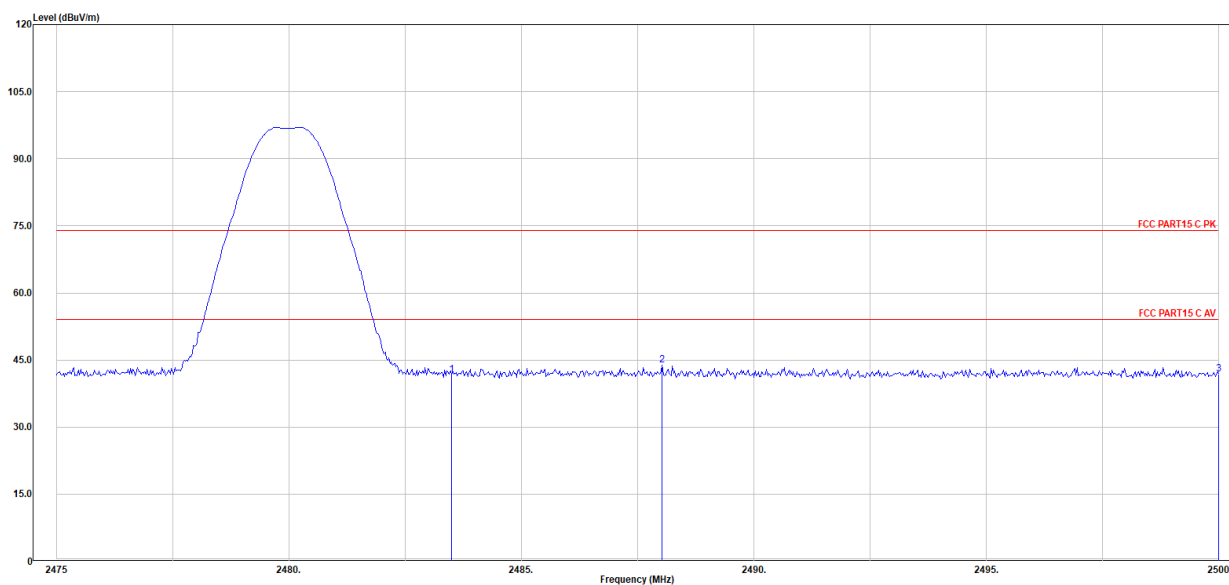

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	52.10	27.85	4.91	43.18	41.68	74.00	-32.32	Peak	VERTICAL
2	2488.03	54.25	27.86	4.92	43.19	43.84	74.00	-30.16	Peak	VERTICAL
3	2500.00	52.19	27.90	4.93	43.20	41.82	74.00	-32.18	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC ABOVE 1G\FCC ABOVE 1G_00018.EMI

Test Date : 2021-08-23

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : TX mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA
9120D/3m/HORIZONTAL

Memo : 1M 2480

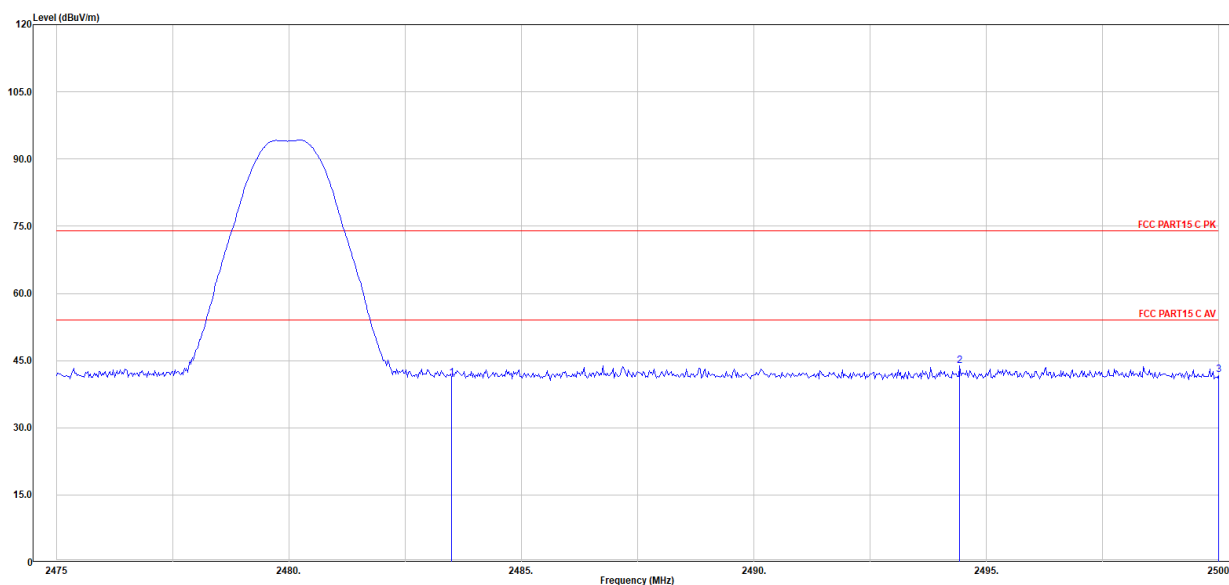

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	51.43	27.85	4.91	43.18	41.01	74.00	-32.99	Peak	HORIZONTAL
2	2494.43	54.21	27.88	4.92	43.19	43.83	74.00	-30.17	Peak	HORIZONTAL
3	2500.00	52.13	27.90	4.93	43.20	41.76	74.00	-32.24	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC ABOVE 1G\FCC ABOVE
1G_00023.EMI

Test Date : 2021-09-07

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : TX mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA
9120D/3m/HORIZONTAL

Memo : 2M 2404

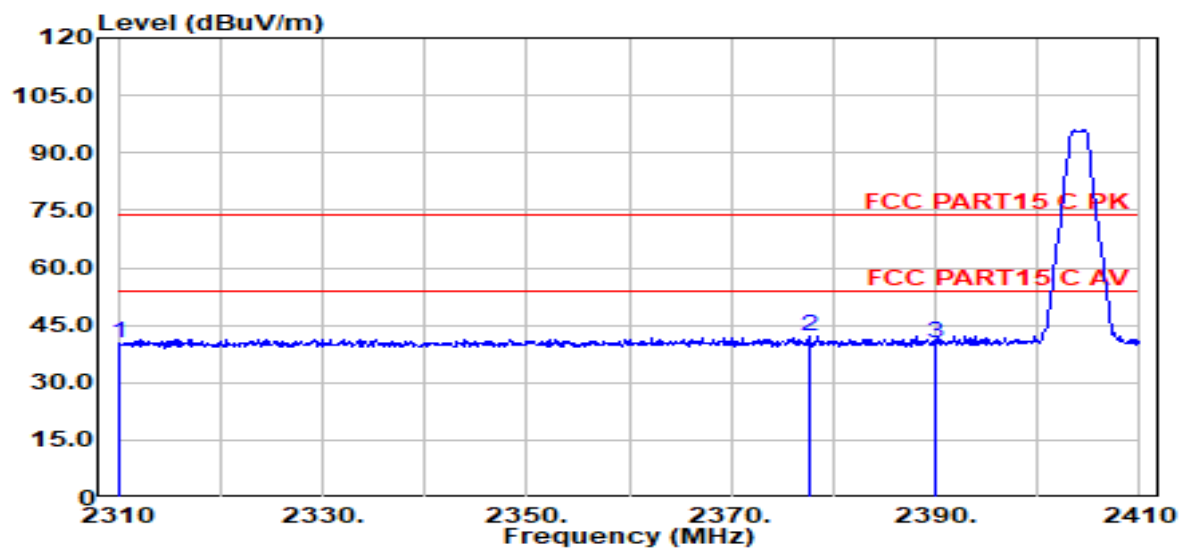

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	2310.00	51.19	27.33	4.70	43.01	40.21	74.00	-33.79	Peak	HORIZONTAL
2	2377.60	52.77	27.53	4.78	43.08	42.00	74.00	-32.00	Peak	HORIZONTAL
3	2390.00	51.06	27.57	4.80	43.09	40.34	74.00	-33.66	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC ABOVE 1G\FCC ABOVE 1G_00024.EMI

Test Date : 2021-09-07

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : TX mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA 9120D/3m/VERTICAL

Memo : 2M 2404

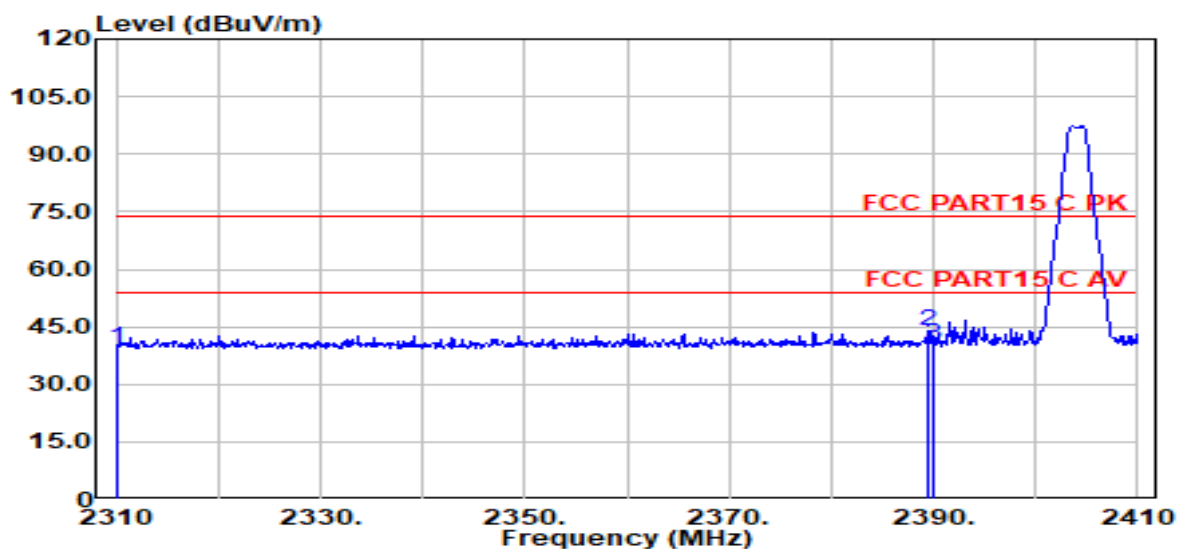

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	2310.00	50.20	27.33	4.70	43.01	39.22	74.00	-34.78	Peak	VERTICAL
2	2389.60	54.81	27.57	4.80	43.09	44.09	74.00	-29.91	Peak	VERTICAL
3	2390.00	51.09	27.57	4.80	43.09	40.37	74.00	-33.63	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC ABOVE 1G\FCC ABOVE 1G_00025.EMI

Test Date : 2021-09-07

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : TX mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA 9120D/3m/VERTICAL

Memo : 2M 2478

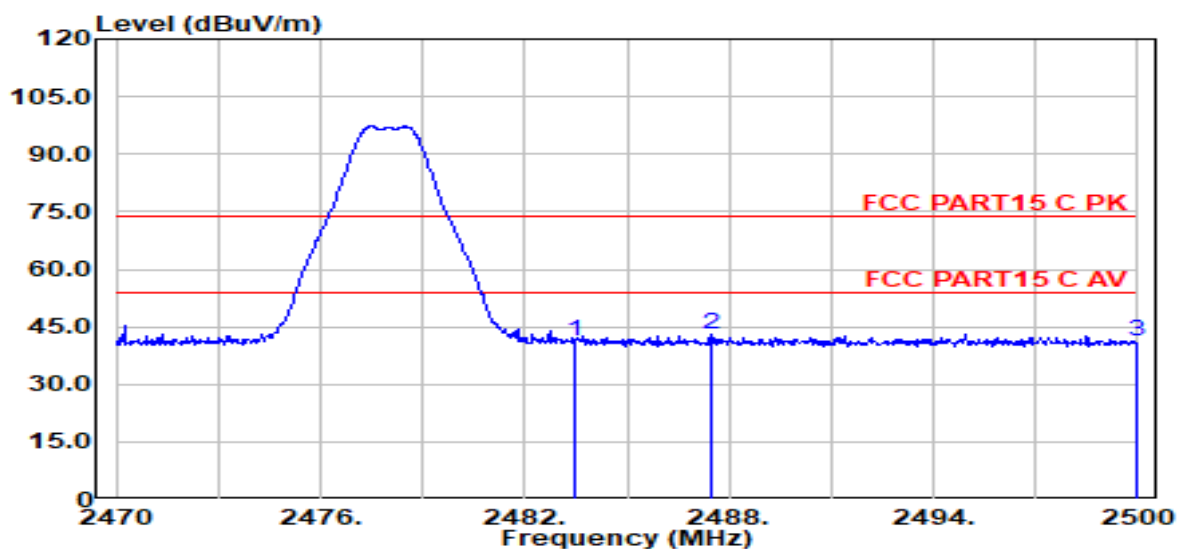

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	51.47	27.85	4.91	43.18	41.04	74.00	-32.96	Peak	VERTICAL
2	2487.46	53.52	27.86	4.91	43.19	43.11	74.00	-30.89	Peak	VERTICAL
3	2500.00	51.59	27.90	4.93	43.20	41.22	74.00	-32.78	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21081603-2E

Q350\Headphone\FCC ABOVE 1G\FCC ABOVE 1G_00026.EMI

Test Date : 2021-09-07

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone


Model Number : QUANTUM350WIRELESST

Power Supply : Battery

Test Mode : TX mode

Condition : Temp:24.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 BBHA
9120D/3m/HORIZONTAL

Memo : 2M 2478

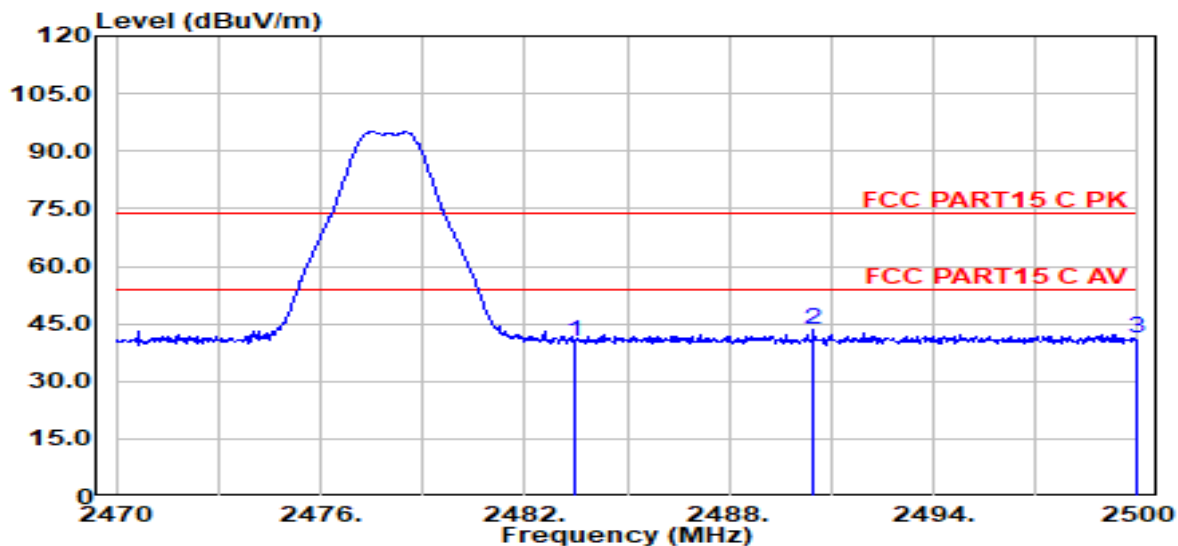

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	50.77	27.85	4.91	43.18	40.35	74.00	-33.65	Peak	HORIZONTAL
2	2490.46	53.81	27.87	4.92	43.19	43.41	74.00	-30.59	Peak	HORIZONTAL
3	2500.00	51.48	27.90	4.93	43.20	41.11	74.00	-32.89	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11. Power Line Conducted Emission

11.1. Block diagram of test setup

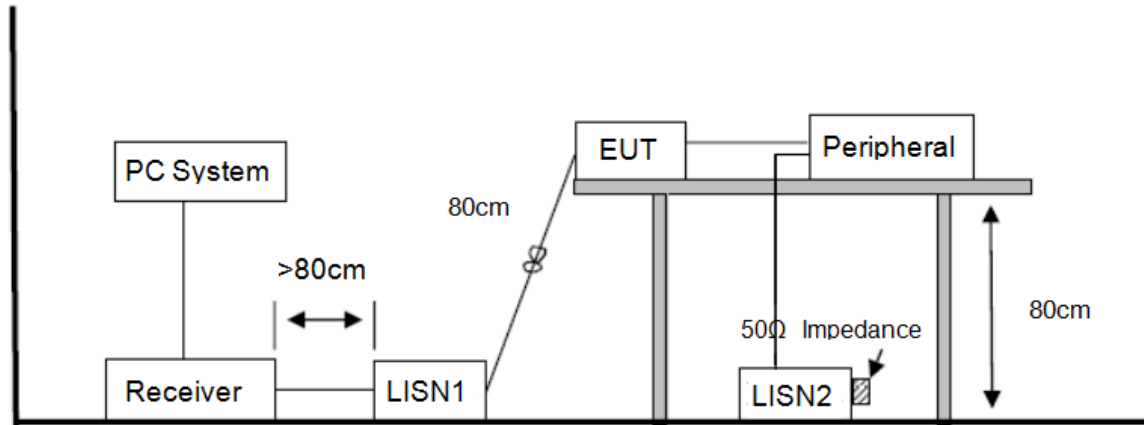

11.2. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

11.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80 cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

11.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21081603-ZC

Quantum350TWIRELESS\Headphone\FCC .EM6

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone

Model Number : QUANTUM350WIRELESST


Power Supply : AC 120V/60Hz

Test Mode : TX mode

Condition : TEMP:23.6°C, RH:52.1%, BP:101.4kPa

LISN : 2020 ENV 216 1#/NEUTRAL

Memo : 1M with charging IC: CW6305A

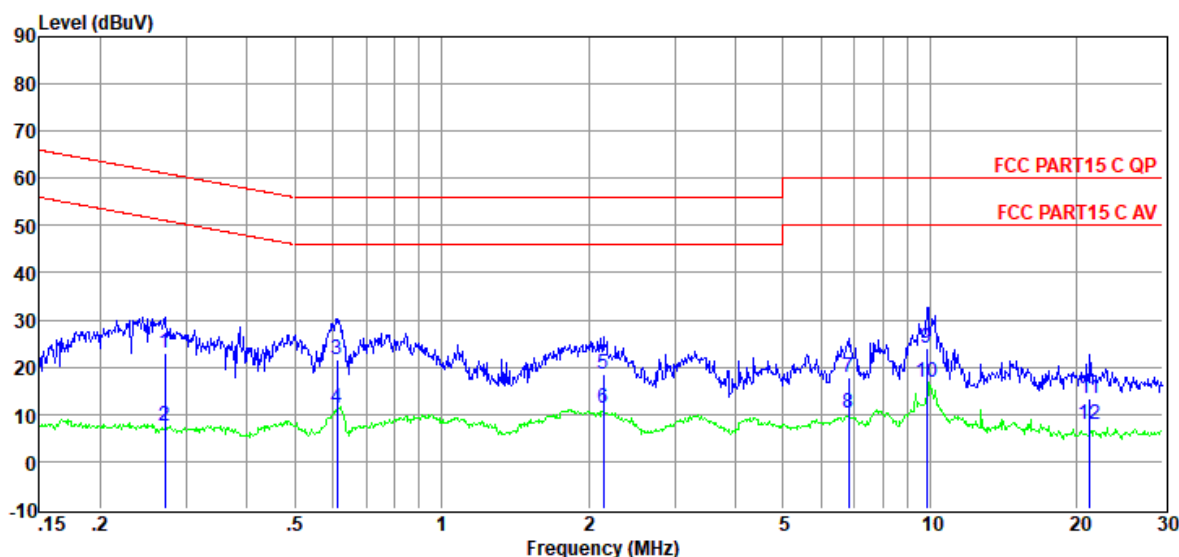

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.27	3.77	9.38	0.02	9.86	23.03	61.07	-38.04	QP	NEUTRAL
2	0.27	-11.62	9.38	0.02	9.86	7.64	51.07	-43.43	Average	NEUTRAL
3	0.61	2.38	9.39	0.02	9.86	21.65	56.00	-34.35	QP	NEUTRAL
4	0.61	-8.11	9.39	0.02	9.86	11.16	46.00	-34.84	Average	NEUTRAL
5	2.14	-0.75	9.40	0.05	9.87	18.57	56.00	-37.43	QP	NEUTRAL
6	2.14	-7.98	9.40	0.05	9.87	11.34	46.00	-34.66	Average	NEUTRAL
7	6.81	-1.54	9.51	0.09	9.88	17.94	60.00	-42.06	QP	NEUTRAL
8	6.81	-9.31	9.51	0.09	9.88	10.17	50.00	-39.83	Average	NEUTRAL
9	9.86	4.32	9.57	0.11	9.89	23.89	60.00	-36.11	QP	NEUTRAL
10	9.86	-2.79	9.57	0.11	9.89	16.78	50.00	-33.22	Average	NEUTRAL
11	21.26	-6.49	9.79	0.16	9.95	13.41	60.00	-46.59	QP	NEUTRAL
12	21.26	-12.19	9.79	0.16	9.95	7.71	50.00	-42.29	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21081603-ZC

Quantum350TWIRELESS\Headphone\FCC .EM6

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone

Model Number : QUANTUM350WIRELESST


Power Supply : AC 120V/60Hz

Test Mode : TX mode

Condition : TEMP:23.6°C, RH:52.1%, BP:101.4kPa

LISN : 2020 ENV 216 1#/LINE

Memo : 1M with charging IC: CW6305A

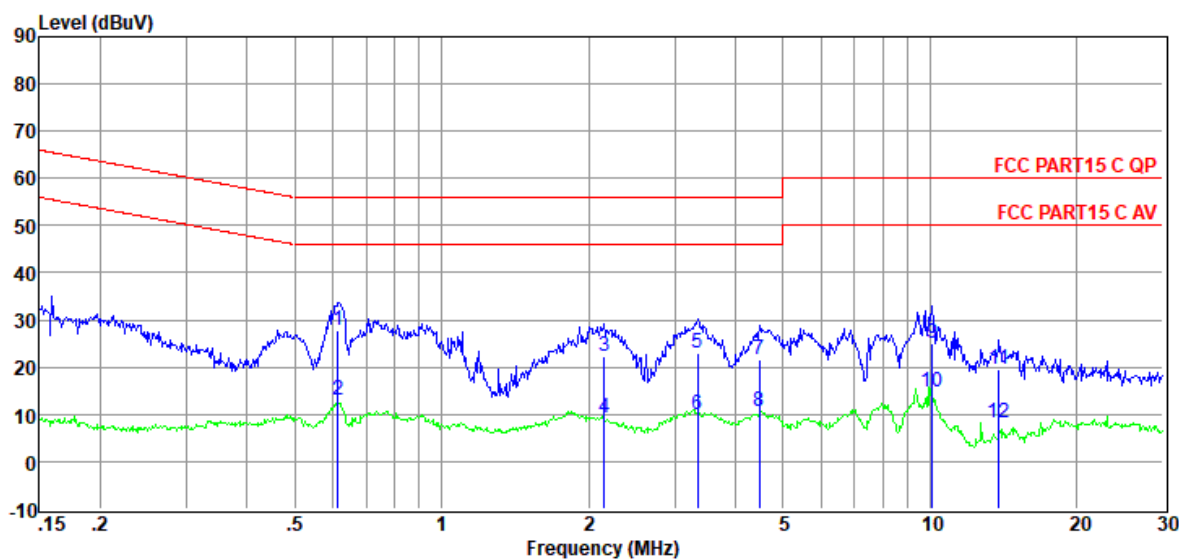

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.61	8.39	9.42	0.02	9.86	27.69	56.00	-28.31	QP	LINE
2	0.61	-6.32	9.42	0.02	9.86	12.98	46.00	-33.02	Average	LINE
3	2.16	2.93	9.42	0.05	9.87	22.27	56.00	-33.73	QP	LINE
4	2.16	-10.06	9.42	0.05	9.87	9.28	46.00	-36.72	Average	LINE
5	3.35	3.65	9.45	0.07	9.87	23.04	56.00	-32.96	QP	LINE
6	3.35	-9.58	9.45	0.07	9.87	9.81	46.00	-36.19	Average	LINE
7	4.48	2.31	9.48	0.08	9.87	21.74	56.00	-34.26	QP	LINE
8	4.48	-8.67	9.48	0.08	9.87	10.76	46.00	-35.24	Average	LINE
9	10.13	5.50	9.59	0.11	9.89	25.09	60.00	-34.91	QP	LINE
10	10.13	-4.97	9.59	0.11	9.89	14.62	50.00	-35.38	Average	LINE
11	13.84	-0.09	9.63	0.13	9.91	19.58	60.00	-40.42	QP	LINE
12	13.84	-11.37	9.63	0.13	9.91	8.30	50.00	-41.70	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21081603-ZC

Quantum350TWIRELESS\Headphone\FCC .EM6

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone

Model Number : QUANTUM350WIRELESST


Power Supply : AC 120V/60Hz

Test Mode : TX mode

Condition : TEMP:23.6°C, RH:52.1%, BP:101.4kPa

LISN : 2020 ENV 216 1#/LINE

Memo : 2M with charging IC: CW6305A

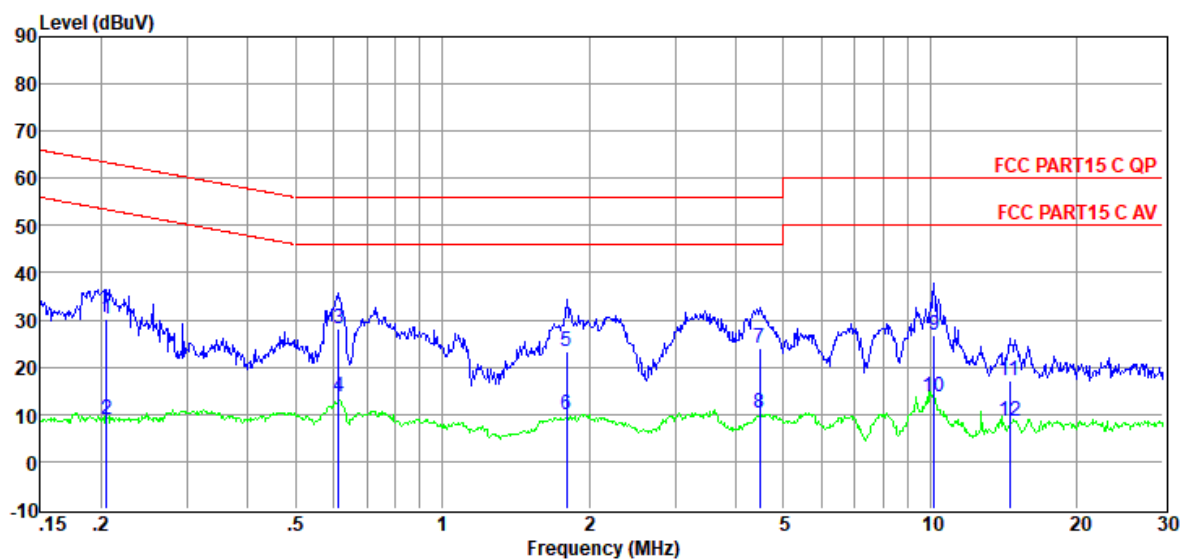

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.21	11.06	9.40	0.02	9.86	30.34	63.40	-33.06	QP	LINE
2	0.21	-10.32	9.40	0.02	9.86	8.96	53.40	-44.44	Average	LINE
3	0.61	8.71	9.42	0.02	9.86	28.01	56.00	-27.99	QP	LINE
4	0.61	-5.56	9.42	0.02	9.86	13.74	46.00	-32.26	Average	LINE
5	1.80	4.11	9.42	0.05	9.87	23.45	56.00	-32.55	QP	LINE
6	1.80	-9.36	9.42	0.05	9.87	9.98	46.00	-36.02	Average	LINE
7	4.48	4.55	9.48	0.08	9.87	23.98	56.00	-32.02	QP	LINE
8	4.48	-9.20	9.48	0.08	9.87	10.23	46.00	-35.77	Average	LINE
9	10.18	7.21	9.59	0.11	9.89	26.80	60.00	-33.20	QP	LINE
10	10.18	-5.92	9.59	0.11	9.89	13.67	50.00	-36.33	Average	LINE
11	14.52	-2.57	9.64	0.14	9.92	17.13	60.00	-42.87	QP	LINE
12	14.52	-11.13	9.64	0.14	9.92	8.57	50.00	-41.43	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21081603-ZC

Quantum350TWIRELESS\Headphone\FCC .EM6

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone

Model Number : QUANTUM350WIRELESST


Power Supply : AC 120V/60Hz

Test Mode : TX mode

Condition : TEMP:23.6°C, RH:52.1%, BP:101.4kPa **LISN**

: 2020 ENV 216 1#//NEUTRAL

Memo : 2M with charging IC: CW6305A

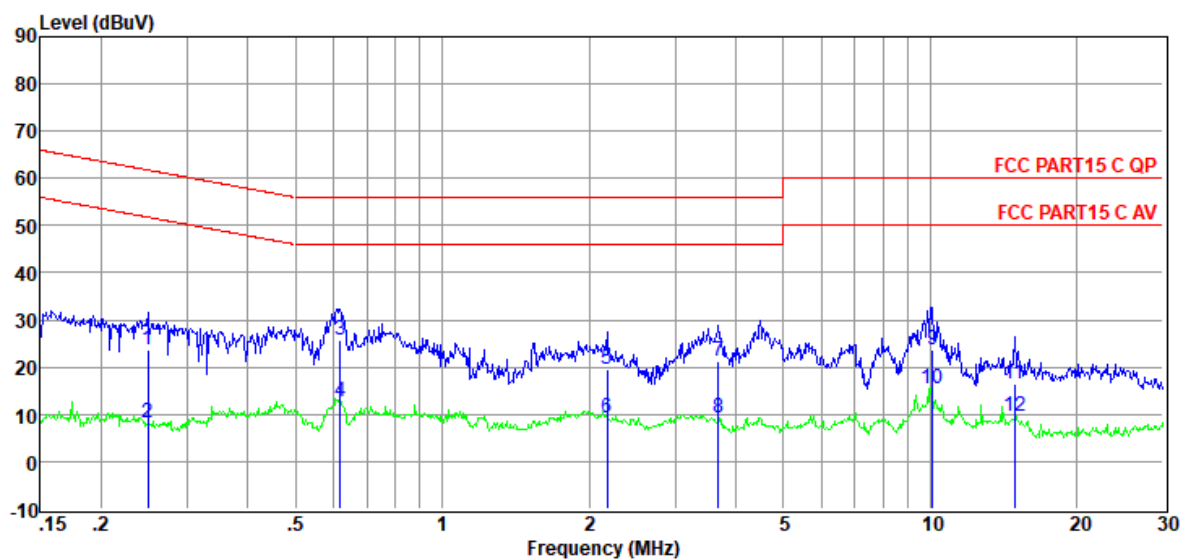

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBUV)	Limit Line (dBUV)	Over Limit (dB)	Detector	Phase
1	0.25	4.36	9.38	0.02	9.86	23.62	61.78	-38.16	QP	NEUTRAL
2	0.25	-10.88	9.38	0.02	9.86	8.38	51.78	-43.40	Average	NEUTRAL
3	0.62	6.40	9.39	0.02	9.86	25.67	56.00	-30.33	QP	NEUTRAL
4	0.62	-6.75	9.39	0.02	9.86	12.52	46.00	-33.48	Average	NEUTRAL
5	2.18	0.13	9.40	0.05	9.87	19.45	56.00	-36.55	QP	NEUTRAL
6	2.18	-9.97	9.40	0.05	9.87	9.35	46.00	-36.65	Average	NEUTRAL
7	3.68	1.98	9.43	0.07	9.87	21.35	56.00	-34.65	QP	NEUTRAL
8	3.68	-10.11	9.43	0.07	9.87	9.26	46.00	-36.74	Average	NEUTRAL
9	10.13	4.02	9.57	0.11	9.89	23.59	60.00	-36.41	QP	NEUTRAL
10	10.13	-4.02	9.57	0.11	9.89	15.55	50.00	-34.45	Average	NEUTRAL
11	14.91	-3.27	9.62	0.14	9.92	16.41	60.00	-43.59	QP	NEUTRAL
12	14.91	-10.01	9.62	0.14	9.92	9.67	50.00	-40.33	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21081603-ZC

Quantum350TWIRELESS\FCC .EM6

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone

Model Number : QUANTUM350WIRELESST


Power Supply : AC 120V/60Hz

Test Mode : TX mode

Condition : TEMP:23.6°C, RH:52.1%, BP:101.4kPa **LISN**

: 2020 ENV 216 1#//NEUTRAL

Memo : 1M with charging IC: CW6305B

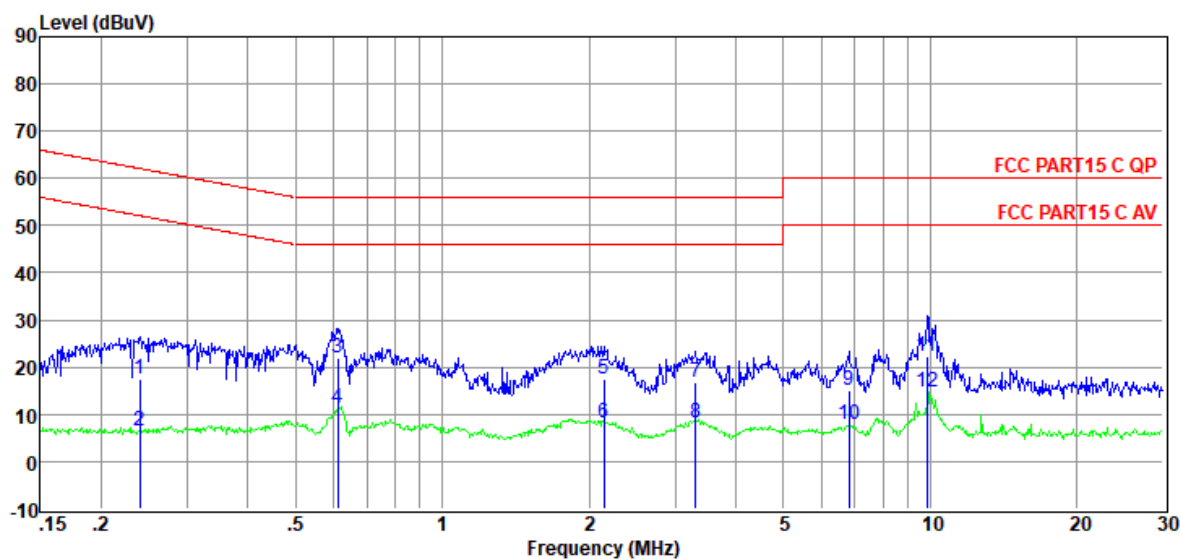

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.24	-1.65	9.37	0.02	9.86	17.60	62.08	-44.48	QP	NEUTRAL
2	0.24	-12.66	9.37	0.02	9.86	6.59	52.08	-45.49	Average	NEUTRAL
3	0.61	2.84	9.39	0.02	9.86	22.11	56.00	-33.89	QP	NEUTRAL
4	0.61	-8.00	9.39	0.02	9.86	11.27	46.00	-34.73	Average	NEUTRAL
5	2.14	-1.87	9.40	0.05	9.87	17.45	56.00	-38.55	QP	NEUTRAL
6	2.14	-11.14	9.40	0.05	9.87	8.18	46.00	-37.82	Average	NEUTRAL
7	3.31	-2.40	9.42	0.07	9.87	16.96	56.00	-39.04	QP	NEUTRAL
8	3.31	-11.20	9.42	0.07	9.87	8.16	46.00	-37.84	Average	NEUTRAL
9	6.81	-4.45	9.51	0.09	9.88	15.03	60.00	-44.97	QP	NEUTRAL
10	6.81	-11.59	9.51	0.09	9.88	7.89	50.00	-42.11	Average	NEUTRAL
11	9.86	2.62	9.57	0.11	9.89	22.19	60.00	-37.81	QP	NEUTRAL
12	9.86	-4.83	9.57	0.11	9.89	14.74	50.00	-35.26	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21081603-ZC

Quantum350TWIRELESS\FCC .EM6

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone

Model Number : QUANTUM350WIRELESST


Power Supply : AC 120V/60Hz

Test Mode : TX mode

Condition : TEMP:23.6°C, RH:52.1%, BP:101.4kPa

LISN : 2020 ENV 216 1#/LINE

Memo : 1M with charging IC: CW6305B

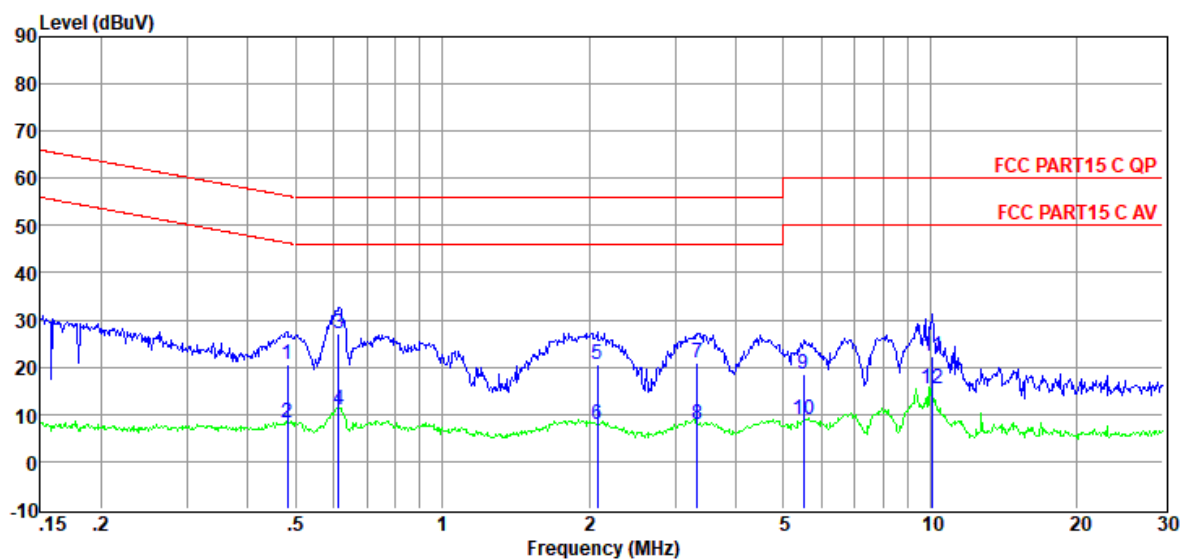

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.48	1.30	9.41	0.02	9.86	20.59	56.32	-35.73	QP	LINE
2	0.48	-10.91	9.41	0.02	9.86	8.38	46.32	-37.94	Average	LINE
3	0.61	7.64	9.42	0.02	9.86	26.94	56.00	-29.06	QP	LINE
4	0.61	-8.29	9.42	0.02	9.86	11.01	46.00	-34.99	Average	LINE
5	2.08	1.19	9.42	0.05	9.87	20.53	56.00	-35.47	QP	LINE
6	2.08	-11.46	9.42	0.05	9.87	7.88	46.00	-38.12	Average	LINE
7	3.33	1.54	9.45	0.07	9.87	20.93	56.00	-35.07	QP	LINE
8	3.33	-11.50	9.45	0.07	9.87	7.89	46.00	-38.11	Average	LINE
9	5.51	-0.86	9.51	0.08	9.87	18.60	60.00	-41.40	QP	LINE
10	5.51	-10.51	9.51	0.08	9.87	8.95	50.00	-41.05	Average	LINE
11	10.13	2.65	9.59	0.11	9.89	22.24	60.00	-37.76	QP	LINE
12	10.13	-4.17	9.59	0.11	9.89	15.42	50.00	-34.58	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21081603-ZC

Quantum350TWIRELESS\FCC .EM6

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone

Model Number : QUANTUM350WIRELESST


Power Supply : AC 120V/60Hz

Test Mode : TX mode

Condition : TEMP:23.6°C, RH:52.1%, BP:101.4kPa

LISN : 2020 ENV 216 1#/LINE

Memo : 2M with charging IC: CW6305B

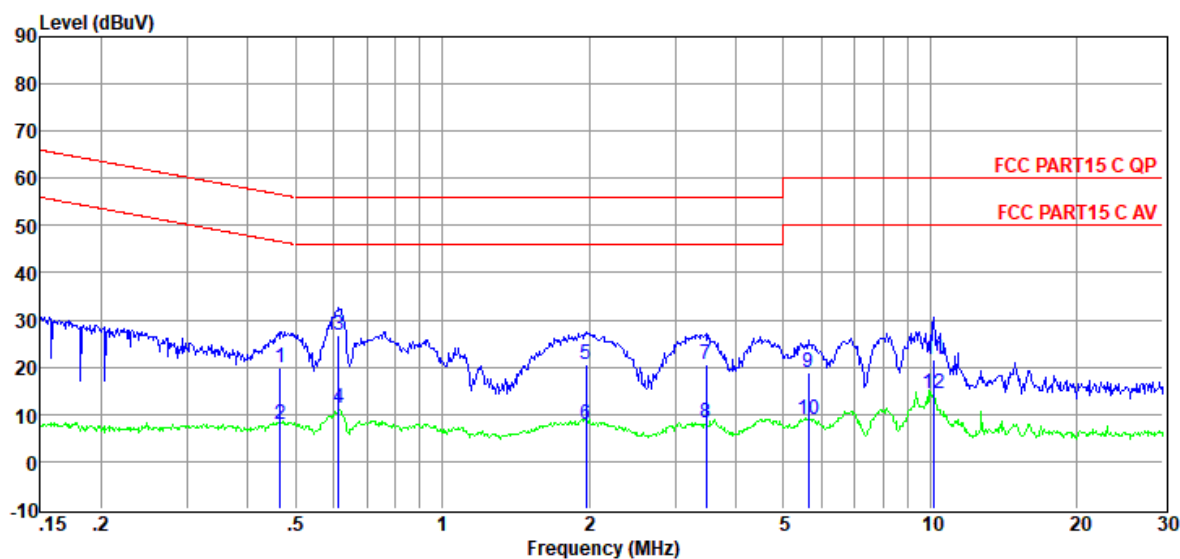

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.47	0.52	9.41	0.02	9.86	19.81	56.58	-36.77	QP	LINE
2	0.47	-11.36	9.41	0.02	9.86	7.93	46.58	-38.65	Average	LINE
3	0.61	7.53	9.42	0.02	9.86	26.83	56.00	-29.17	QP	LINE
4	0.61	-7.91	9.42	0.02	9.86	11.39	46.00	-34.61	Average	LINE
5	1.97	1.09	9.42	0.05	9.87	20.43	56.00	-35.57	QP	LINE
6	1.97	-11.33	9.42	0.05	9.87	8.01	46.00	-37.99	Average	LINE
7	3.47	1.03	9.45	0.07	9.87	20.42	56.00	-35.58	QP	LINE
8	3.47	-11.34	9.45	0.07	9.87	8.05	46.00	-37.95	Average	LINE
9	5.62	-0.70	9.51	0.08	9.87	18.76	60.00	-41.24	QP	LINE
10	5.62	-10.57	9.51	0.08	9.87	8.89	50.00	-41.11	Average	LINE
11	10.18	1.93	9.59	0.11	9.89	21.52	60.00	-38.48	QP	LINE
12	10.18	-5.23	9.59	0.11	9.89	14.36	50.00	-35.64	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2021 CE report date\Q21081603-ZC

Quantum350TWIRELESS\FCC .EM6

Test Date : 2021-09-10

Tested By : Sanvin Zheng

EUT : Gaming Wireless Headphone

Model Number : QUANTUM350WIRELESST


Power Supply : AC 120V/60Hz

Test Mode : TX mode

Condition : TEMP:23.6°C, RH:52.1%, BP:101.4kPa **LISN**

: 2020 ENV 216 1#//NEUTRAL

Memo : 2M with charging IC: CW6305B

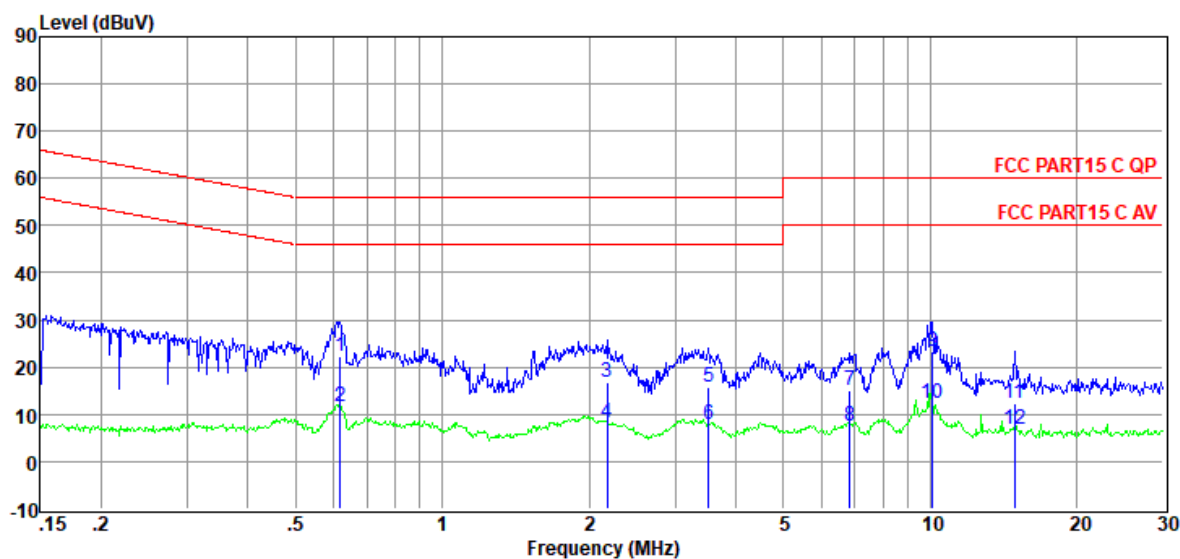

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.62	3.16	9.39	0.02	9.86	22.43	56.00	-33.57	QP	NEUTRAL
2	0.62	-7.58	9.39	0.02	9.86	11.69	46.00	-34.31	Average	NEUTRAL
3	2.18	-2.38	9.40	0.05	9.87	16.94	56.00	-39.06	QP	NEUTRAL
4	2.18	-11.14	9.40	0.05	9.87	8.18	46.00	-37.82	Average	NEUTRAL
5	3.51	-3.57	9.43	0.07	9.87	15.80	56.00	-40.20	QP	NEUTRAL
6	3.51	-11.42	9.43	0.07	9.87	7.95	46.00	-38.05	Average	NEUTRAL
7	6.84	-4.49	9.52	0.09	9.88	15.00	60.00	-45.00	QP	NEUTRAL
8	6.84	-11.85	9.52	0.09	9.88	7.64	50.00	-42.36	Average	NEUTRAL
9	10.13	3.65	9.57	0.11	9.89	23.22	60.00	-36.78	QP	NEUTRAL
10	10.13	-7.18	9.57	0.11	9.89	12.39	50.00	-37.61	Average	NEUTRAL
11	14.91	-7.20	9.62	0.14	9.92	12.48	60.00	-47.52	QP	NEUTRAL
12	14.91	-12.86	9.62	0.14	9.92	6.82	50.00	-43.18	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

12.2. Result

The antenna used for this product is FPC antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 4.99 dBi.