

SPECIFICATION



Shenzhen Daxian Technology Co., Ltd.

Risuntek TWS-2066 Right ear
Bluetooth headset antenna

Material Recognition Letter

Guest households	Risuntek	frequency band	2400MHz~2500MHz
Project name	TWS-2066	version	V22
Material No.	2W-2066-124	color	Black
R F design	Peng.Hu	structure design	RuiBin.Zhou
Quality Manager	Jin.Yang	R & D director	Lei.Zhang
Date	2024-05-06		

client confirmation:

Whether the assembly meets your requirements: ☐OK ☐NG

Shenzhen DanXian Technology Co., Ltd.

Shangshuijing Village, No. 513, ihua Road, BujiTown, Longgang District, Shenzhen (opposite to theNational Defense Training Base)reached the 7thfloor of the Industrial Park Complex

TEL:0755-28576002

FAX:0755-84276383

Shanghai Branch: Room 201, Building 8 No, 3000Longdong Avenue, Integrated Circuit IndustrialZone, Zhangjiang Hi-tech Park, Shanghai

TEL:021-61630552

FAX:755-84276383

[illegible]

Confidential requirement

Page 2

Index

I、 Project description.....	4
II、 BT antenna.....	4
1、 specifications.....	4
1.1 Electrical specification standard.....	5
1.2 Antenna composition.....	5
2、 The Equipment of Active Test.....	6
3、 test.....	7
3.1 The Test of standing Wave (VSWR).....	7
3.1.1 test connection.....	7
3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS).....	7
3.2.1 Test site.....	7
3.2.2 Test instrument.....	7
3.2.3 test data	7
4、 conclusion	7
5、 VSWR parameter diagram.....	8
6、 Loading Notes:.....	8
7、 Bill of materials	9
III、 schedule drawing.....	10

www.Topant.com.cn

Confidential requirement


Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

I、Project description

Customer name:	Risuntek
Whole machine type:	Bluetooth headset
Antenna band:	2400 ~ 2500MHz
Antenna form:	FPC
Feed form:	welding
Number of feed feet:	2 left and right ears
Hardware version:	motherboard:

II、BT antenna

This report provides a variety of measurements of the electrical performance of the TWS-2066 antenna. Figure 1 shows the antenna designed by the display.

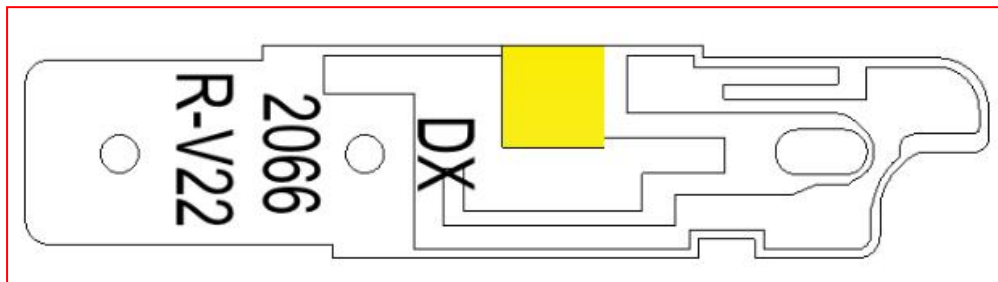

antenna appearing diagram

Figure 1

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

1.1 Electrical specification standard

The frequency range of the antenna is 2400 ~ 2500 MHz. The following table indicates the electrical performance specifications of the antenna. The antenna is designed and manufactured by a large display.

Frequency Range	Frequency (MHz)	VSWR
Roght ear BT	2400 ~ 2500	≤ 3

1.2 Antenna composition

The antenna is mainly composed of FPC.

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

2、 The Equipment of Active Test

Satimo 3D Chamber $6 \times 4 \times 4$ (m)

Agilent 8960 E5515c

Network analyzer-R&S ZVL



Figure 2

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

3 test

3.1 The Test of standing Wave (VSWR)

3.1.1 The Test of standing Wave (VSWR): In turn, the connection of the VSWR testing device is as follows: RES ZVL Network Analyzer / testing Line / testing tool

Actual measurement (with diagram)

3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS)

3.2.1 Test site:

Large-scale microwave darkroom. The test frequency range is 400MHz / 6GHz, the static range is 50cm circumferential and the reflectivity is less than -50 dB..

3.2.2 Test instrument:

Rs ZVL Network Analyzer, Agilent8960 E5515C, Standard Horn Antenna, French SATIMO-SG24SYSTEM system, Printer, etc.

3.2.3 test data : In microwave anechoic chambers, the power and sensitivity values measured are shown in the following table:

OTA Active Test:

R (right ear) free space			
BAND	CH	TRP	TIS
E6B5	0	4.61	-89.39
	39	5.12	-90.08
	78	5.37	-89.63

R (right ear) head mold			
BAND	CH	TRP	TIS
E6B5	0	-5.05	-79.56
	39	-4.71	-80.1
	78	-4.16	-79.66

Passive Test:

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	20.69	-6.84	-0.63
2410	21.57	-6.66	-0.36
2420	21.46	-6.68	-0.32
2430	22.01	-6.57	-0.45
2440	23.2	-6.34	-1.01
2450	22.52	-6.47	-1.18
2460	23.55	-6.28	-1.48
2470	24.3	-6.14	-1.96
2480	23.3	-6.33	-0.89
2490	22.17	-6.54	-0.8
2500	20.94	-6.79	-1.01

4、 conclusion:


This antenna is designed on the basis of the prototype provided by the customer, electrical parameters and structural performance have reached the technical requirements, please confirm!

www.Topant.com.cn



Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

5、 VSWR parameter diagram-Right ear

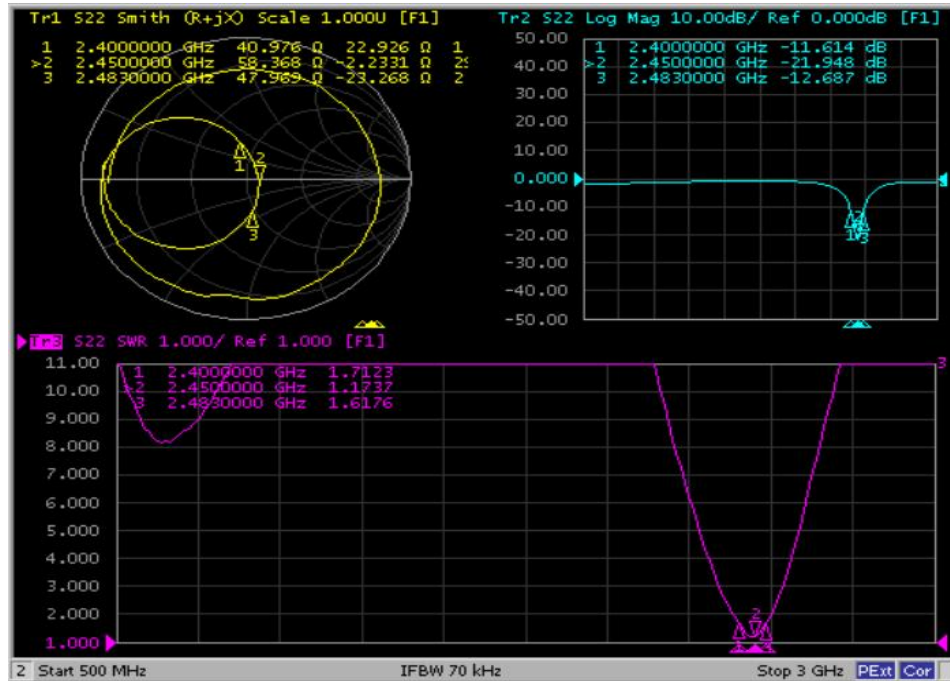

6、 Loading Notes:

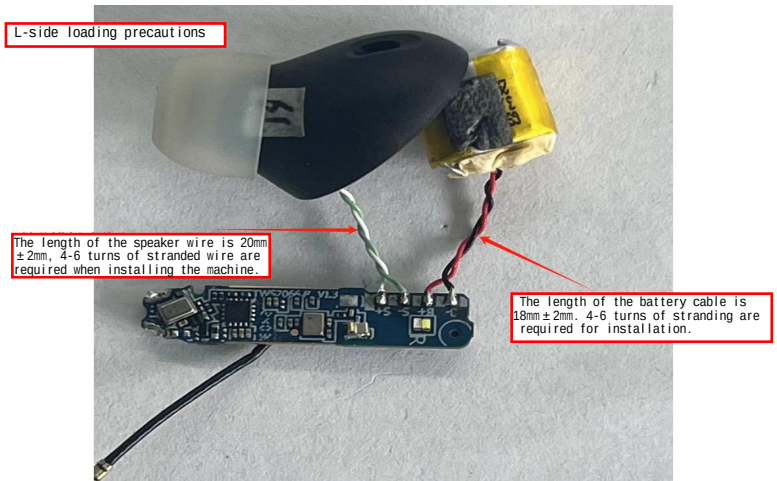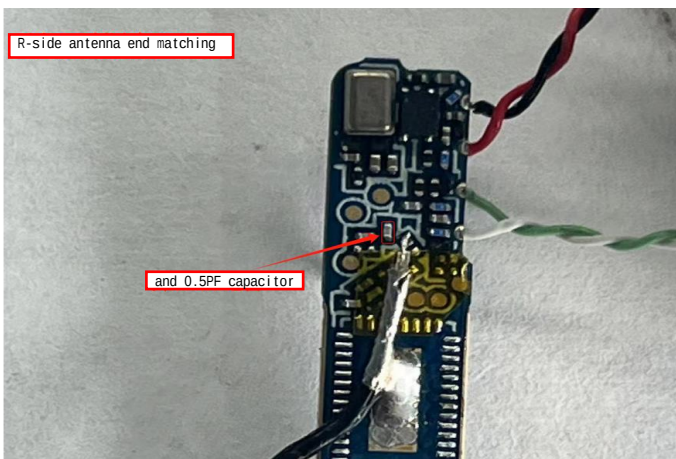

www.Topant.com.cn

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

henzhen Daxian Technology Co., Ltd.
Bill of materials

Client:Risuntek		Model:TWS-2066		Project No.:CW-2066-124		Date: March 14, 2024		No.: QR/RD-P01-10		Version: A1	
Serial Number	Material Number	Brand Name	Typology	Releases	Norm	Makings	Color	Work Unit	Dosage	Note	
1	1W-2066-124	Bluetooth Antenna-L Finished Product	Z	A							
1	1W-2066-124-1	Bluetooth Antenna-L FPC	W	A	20.44*4.5*0.13mm	Single-sided pair of half-substrate copper foil, 3M9471 adhesive backing, surface printing black oil, gold plating ≥ 0.05um	Black	PCS	1	Half-cut shipment	
2	2W-2066-124	Bluetooth Antenna-R Finished Product	Z	A							
1	2W-2066-124-1	Bluetooth Antenna-R FPC	W	A	20.44*4.5*0.13mm	Single-sided pair of half-substrate copper foil, 3M9471 adhesive backing, surface printing black oil, gold plating ≥ 0.05um	Black	PCS	1	Half-cut shipment	
Note: 1. Packaging materials and components must comply with RoHS and REACH requirements.											
Type: W: Outsourced B: Homemade Z: Finished product											

Approved by: Lei.Zhang

Reviewed by: Xin. Xu

Scheduled by: Rujian. Zhou

