


EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_High channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

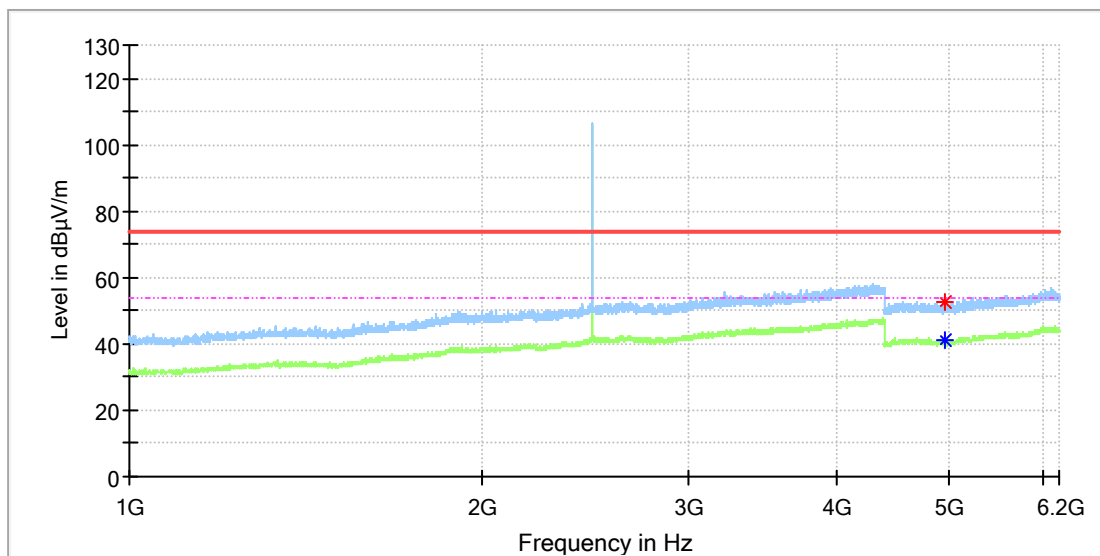


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	---	40.93	54.00	13.07	150.0	H	152.0	13.3
4963.500000	52.37	---	74.00	21.63	150.0	H	30.0	13.3

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_High channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

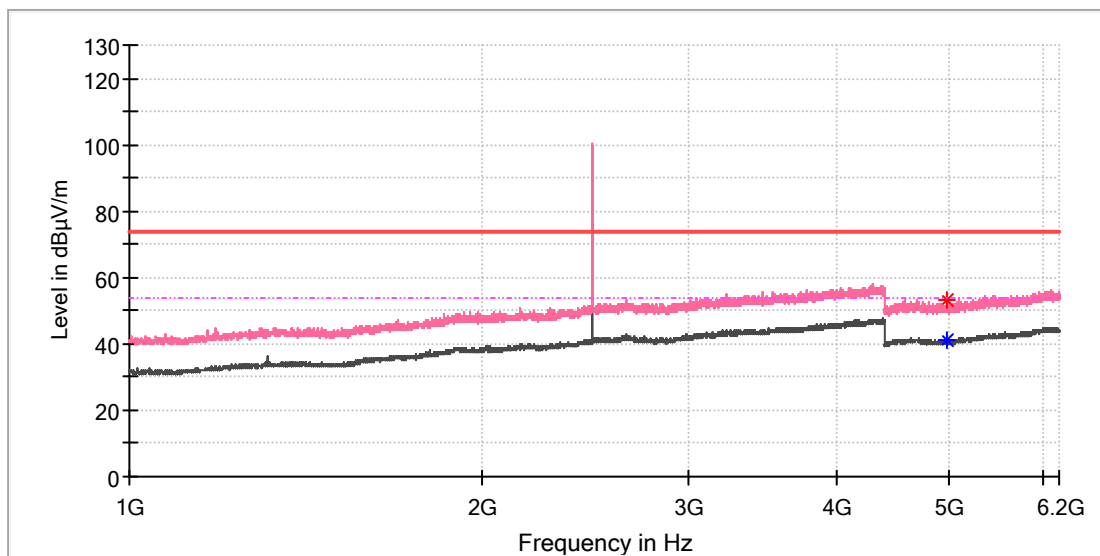


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4965.000000	---	41.14	54.00	12.86	150.0	V	266.0	13.3
4975.000000	53.03	---	74.00	20.97	150.0	V	248.0	13.3

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Low channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

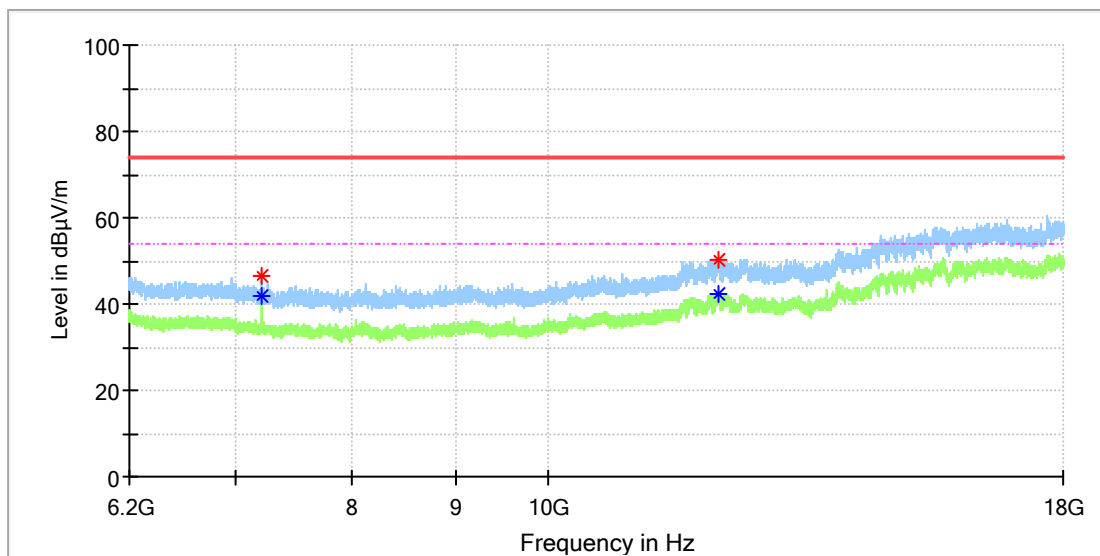


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	46.37	---	74.00	27.63	150.0	H	174.0	8.8
7205.950000	---	41.89	54.00	12.11	150.0	H	174.0	8.8
12134.908333	50.33	---	74.00	23.67	150.0	H	21.0	16.3
12153.591667	---	42.42	54.00	11.58	150.0	H	152.0	16.5

EUT Information

EUT Name:	BLUETOOTH HEADSET
Model:	VIBE BUDS 3
Test Mode:	BR DH5_Low channel
Order No/Sample No:	27235507/A004281368-011
Test Voltage:	Battery
Remark:	Temp 23.5°C Humi:54%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

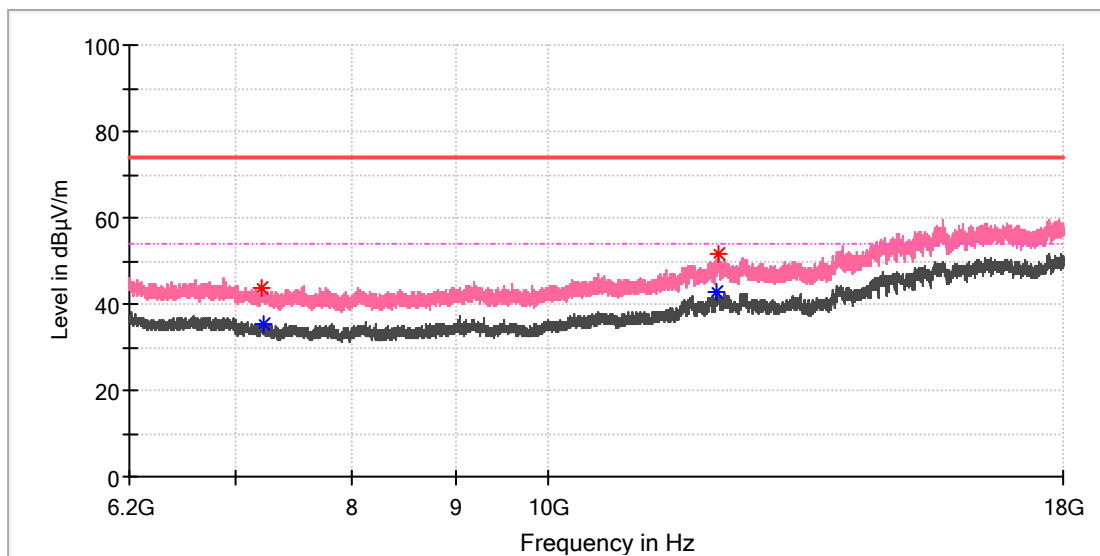


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7216.275000	43.62	---	74.00	30.38	150.0	V	8.0	8.7
7220.208333	---	35.35	54.00	18.65	150.0	V	92.0	8.7
12117.208333	---	42.75	54.00	11.25	150.0	V	114.0	15.9
12136.383333	51.56	---	74.00	22.44	150.0	V	0.0	16.4

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Mid channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

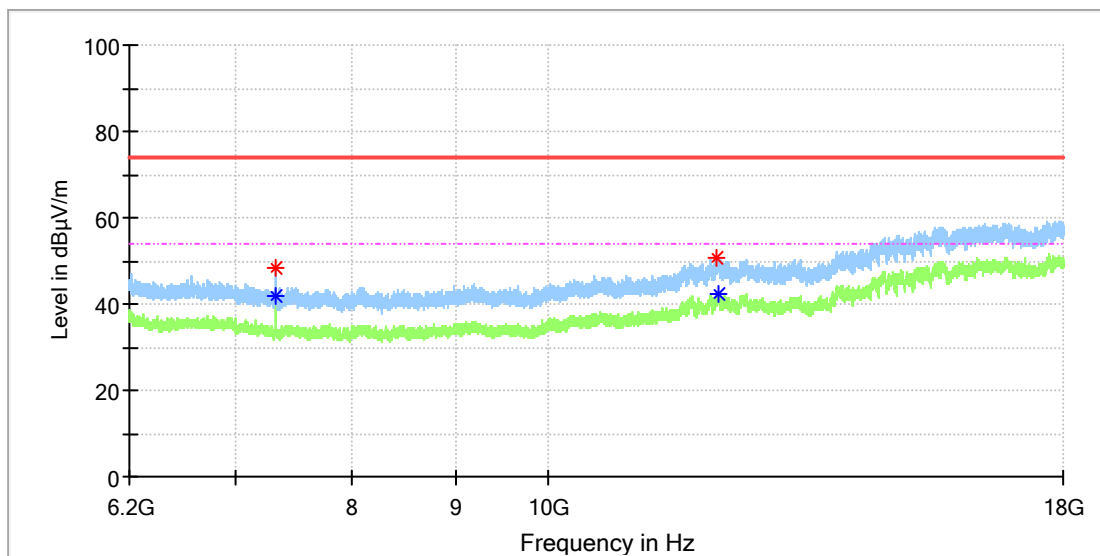


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.475000	---	41.66	54.00	12.34	150.0	H	169.0	8.2
7322.475000	48.50	---	74.00	25.50	150.0	H	169.0	8.2
12104.916667	50.60	---	74.00	23.40	150.0	H	33.0	15.6
12146.216667	---	42.46	54.00	11.54	150.0	H	169.0	16.6

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Mid channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

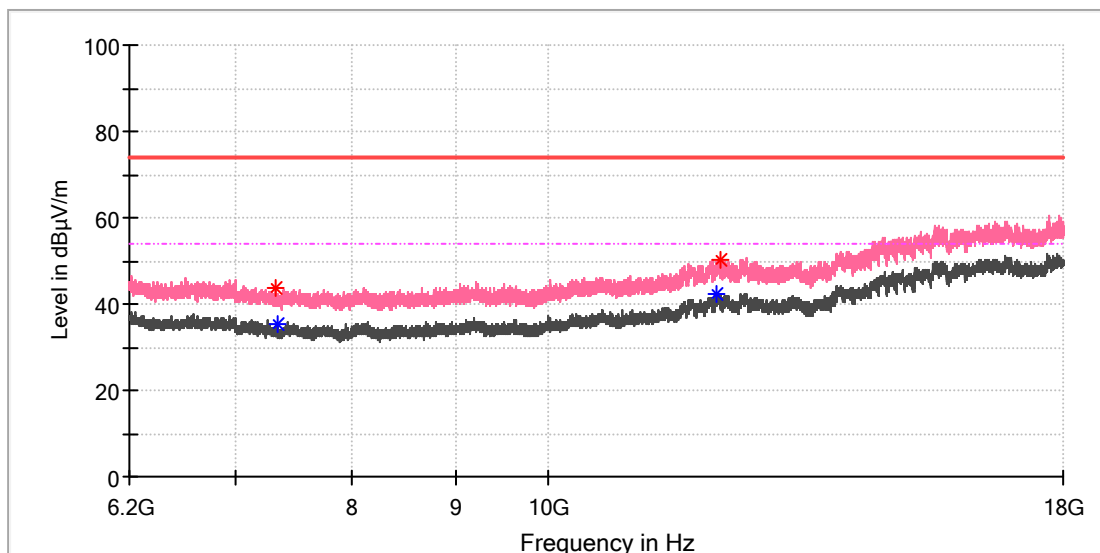


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7323.458333	43.95	---	74.00	30.05	150.0	V	14.0	8.2
7337.225000	---	35.56	54.00	18.44	150.0	V	103.0	8.1
12128.025000	---	42.34	54.00	11.66	150.0	V	125.0	16.2
12160.475000	50.41	---	74.00	23.59	150.0	V	48.0	16.2

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_High channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

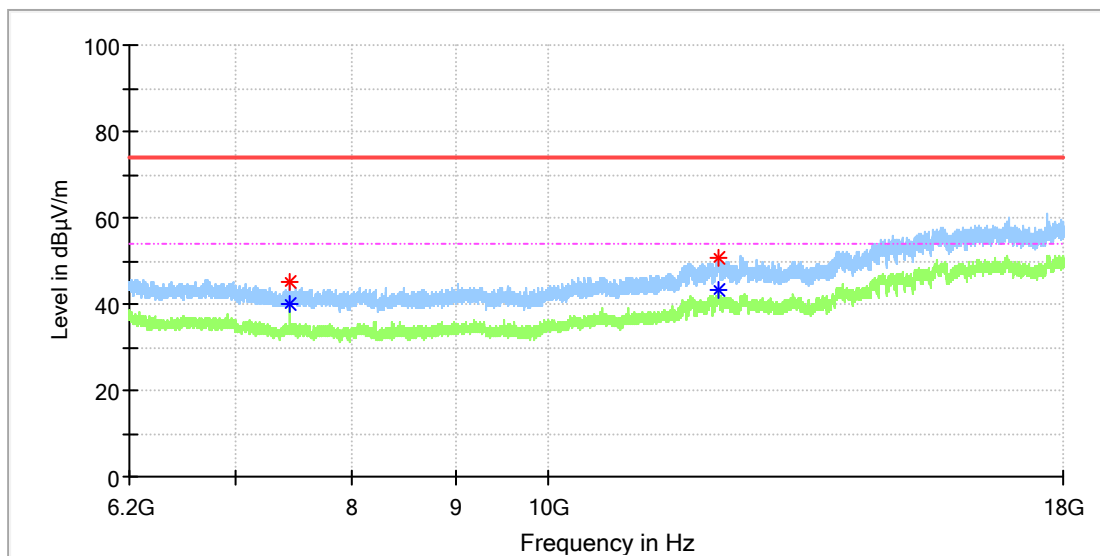


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.491667	---	39.96	54.00	14.04	150.0	H	0.0	8.4
7440.475000	45.31	---	74.00	28.69	150.0	H	183.0	8.4
12146.708333	50.48	---	74.00	23.52	150.0	H	194.0	16.6
12156.541667	---	43.26	54.00	10.74	150.0	H	70.0	16.4

EUT Information

EUT Name:	BLUETOOTH HEADSET
Model:	VIBE BUDS 3
Test Mode:	BR DH5_High channel
Order No/Sample No:	27235507/A004281368-011
Test Voltage:	Battery
Remark:	Temp 23.5°C Humi:54%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

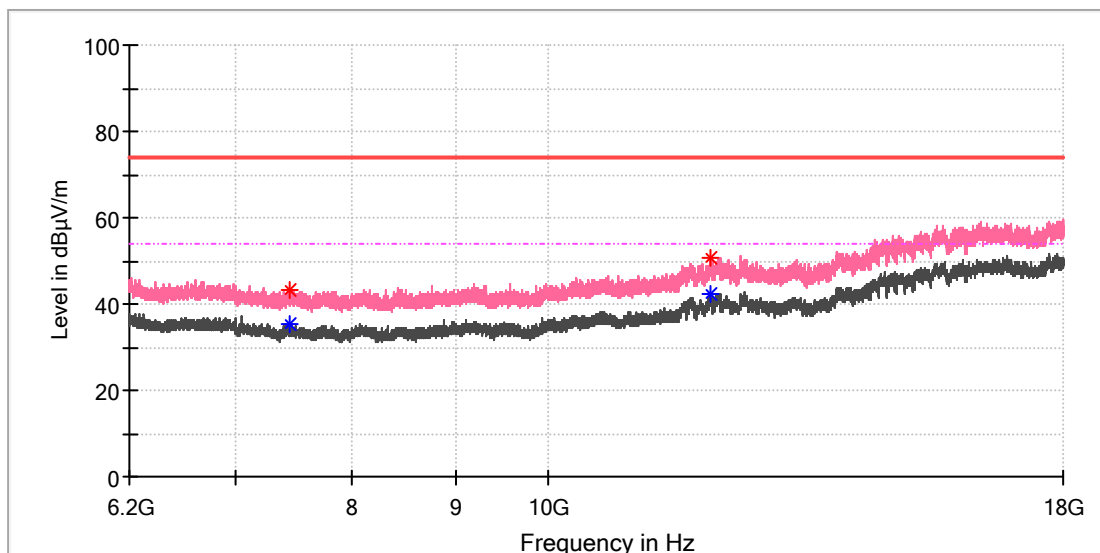


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7440.475000	---	35.42	54.00	18.58	150.0	V	61.0	8.4
7445.391667	43.29	---	74.00	30.71	150.0	V	20.0	8.5
12040.016667	50.76	---	74.00	23.24	150.0	V	357.0	16.2
12040.016667	---	42.47	54.00	11.53	150.0	V	357.0	16.2

Appendix B.9: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	BLUETOOTH HEADSET
Model:	VIBE BUDS 3
Test Mode:	BR DH5_Low channel
Order No/Sample No:	27235507/A004281368-011
Test Voltage:	Battery
Remark:	Temp 23.5°C Humi:54%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

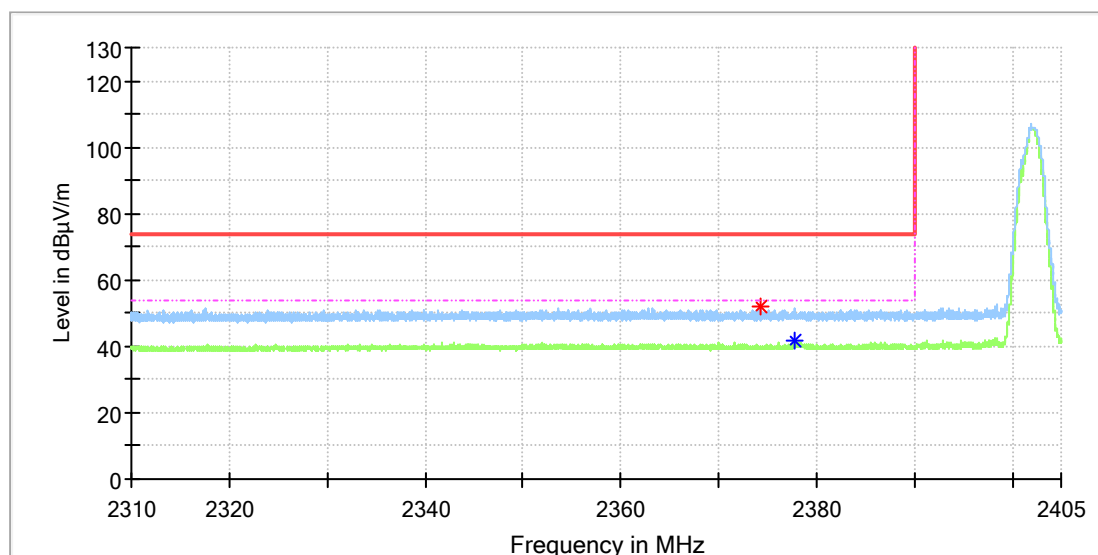


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2374.276471	51.78	---	74.00	22.22	150.0	H	356.0	8.5
2377.735294	---	41.51	54.00	12.49	150.0	H	147.0	8.5

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Low channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

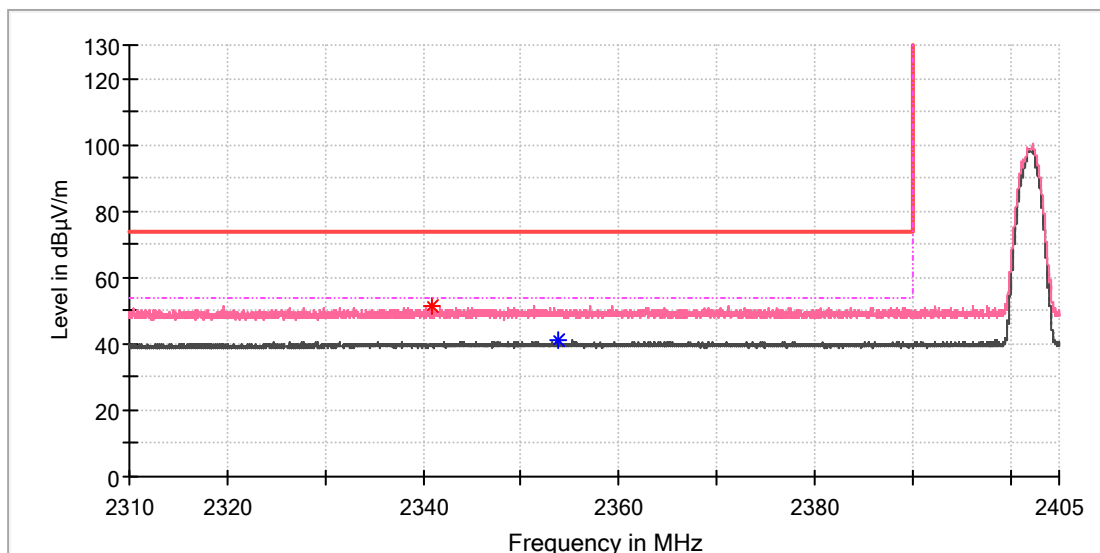


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2340.898824	51.64	---	74.00	22.36	150.0	V	216.0	8.4
2353.782941	---	40.83	54.00	13.17	150.0	V	121.0	8.5

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_High channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

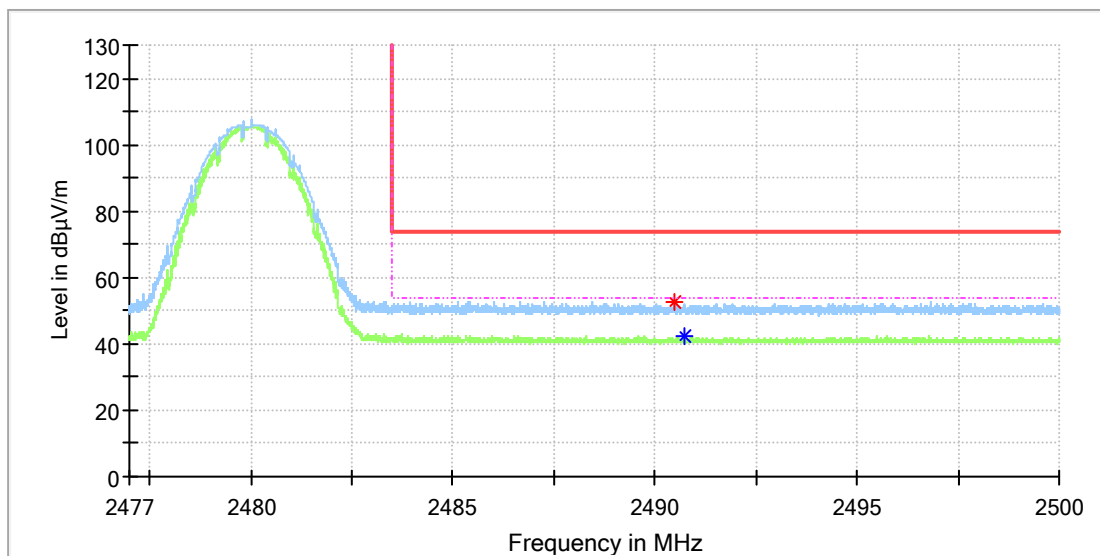


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2490.488971	52.90	---	74.00	21.10	150.0	H	247.0	9.0
2490.724265	---	42.04	54.00	11.96	150.0	H	0.0	9.0

EUT Information

EUT Name:	BLUETOOTH HEADSET
Model:	VIBE BUDS 3
Test Mode:	BR DH5_High channel
Order No/Sample No:	27235507/A004281368-011
Test Voltage:	Battery
Remark:	Temp 23.5°C Humi:54%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

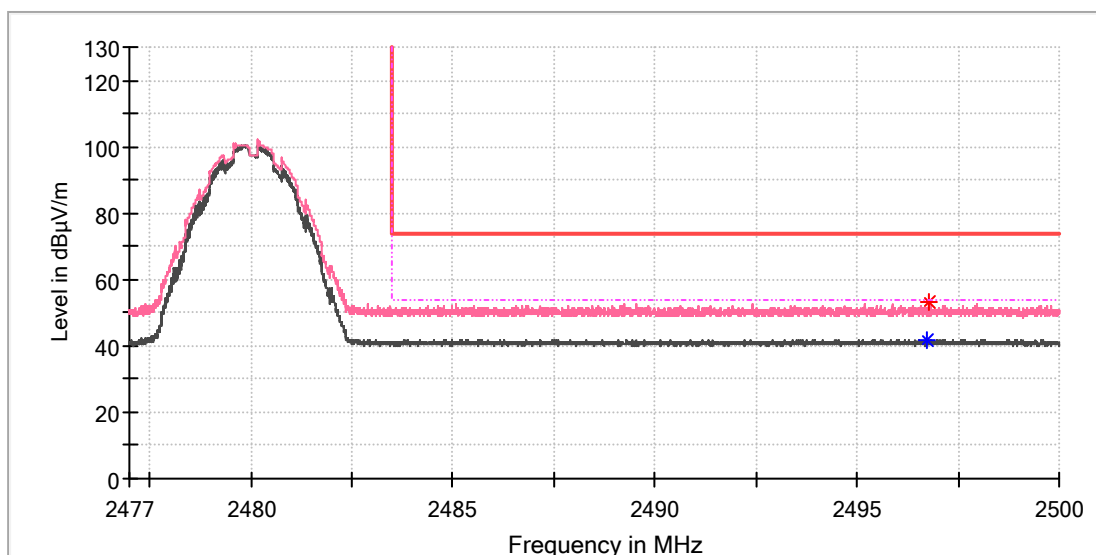

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2496.742647	---	42.01	54.00	11.99	150.0	V	122.0	9.0
2496.768382	53.36	---	74.00	20.64	150.0	V	178.0	9.0


Appendix C: Test Results of Classic Bluetooth, Right earbud

APPENDIX C: TEST RESULTS OF CLASSIC BLUETOOTH, RIGHT EARBUD	1
APPENDIX C.1: TEST RESULTS OF 99% BANDWIDTH.....	2
APPENDIX C.2: TEST RESULTS OF 20dB BANDWIDTH	5
APPENDIX C.3: TEST RESULTS OF FREQUENCY STABILITY.....	8
APPENDIX C.4: TEST RESULTS OF CARRIER FREQUENCY SEPARATION.....	10
APPENDIX C.5: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	11
APPENDIX C.6: TEST RESULTS OF TIME OF OCCUPANCY	12
APPENDIX C.7: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	17
CONDUCTED SPURIOUS EMISSION	17
BAND EDGE MEASUREMENTS.	24
APPENDIX C.8: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	28
30MHz - 1GHz	28
1GHz - 18GHz	30
APPENDIX C.9: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	42


Appendix C.1: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.93506	2401.5235	2402.4585	---	---
		2441	0.93506	2440.5175	2441.4525	---	---
		2480	0.93806	2479.5175	2480.4555	---	---
2DH5	Ant1	2402	1.1898	2401.3886	2402.5784	---	---
		2441	1.1898	2440.3886	2441.5784	---	---
		2480	1.1928	2479.3856	2480.5784	---	---


DH5_Ant1_2402

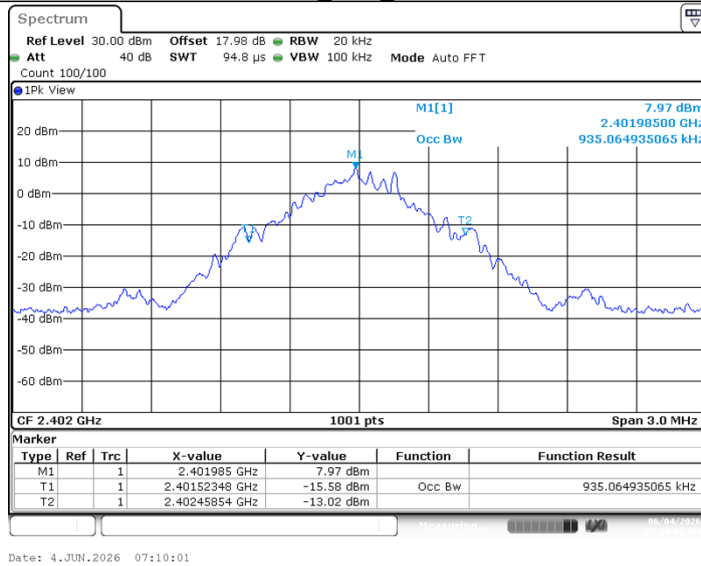


DH5_Ant1_2441

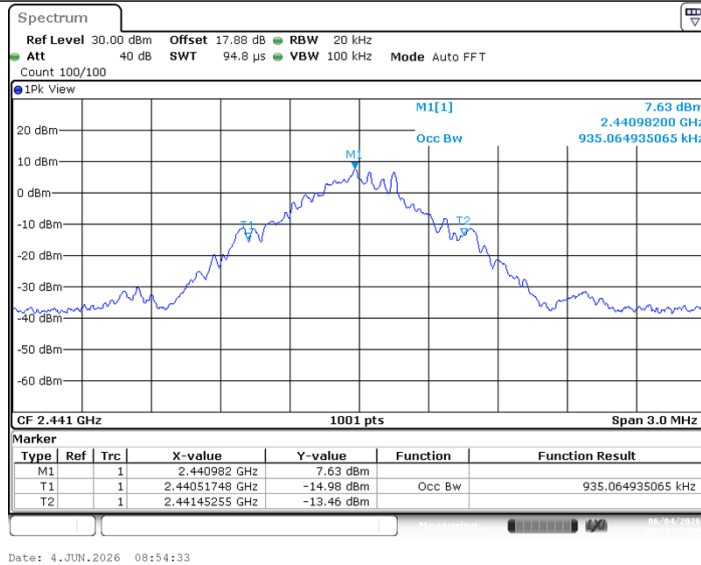


DH5_Ant1_2480

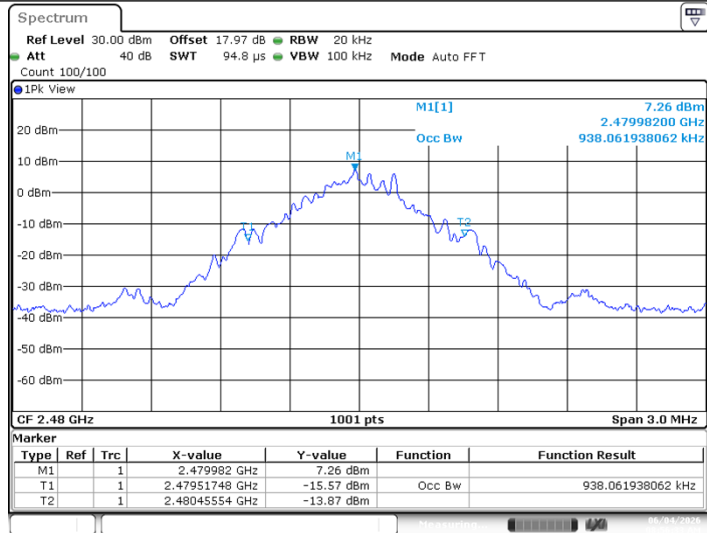


2DH5_Ant1_2402

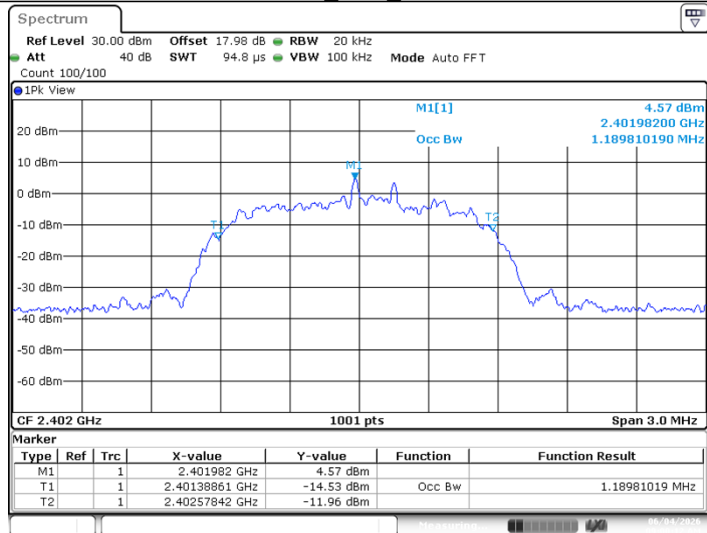

2DH5_Ant1_2441

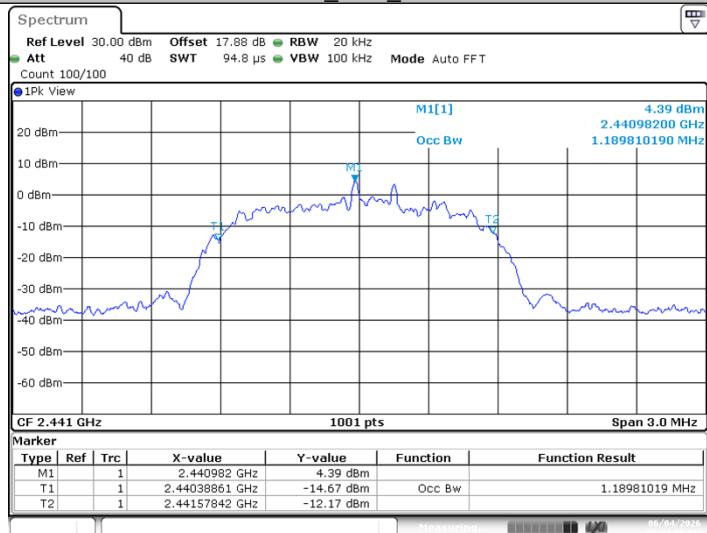

2DH5_Ant1_2480

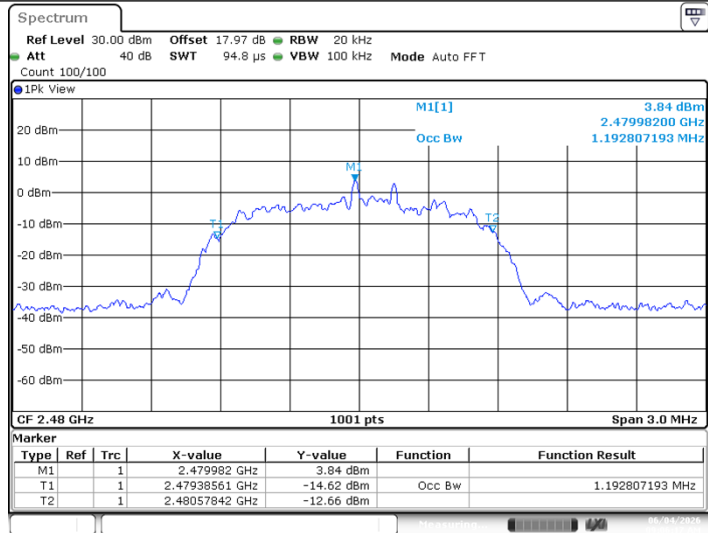


Date: 4.JUN.2026 09:06:18


Appendix C.2: Test Results of 20dB Bandwidth

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	1.03	2401.48	2402.50	---	---
		2441	1.03	2440.48	2441.50	---	---
		2480	1.03	2479.48	2480.50	---	---
2DH5	Ant1	2402	1.26	2401.35	2402.60	---	---
		2441	1.26	2440.34	2441.60	---	---
		2480	1.26	2479.35	2480.60	---	---


DH5_Ant1_2402

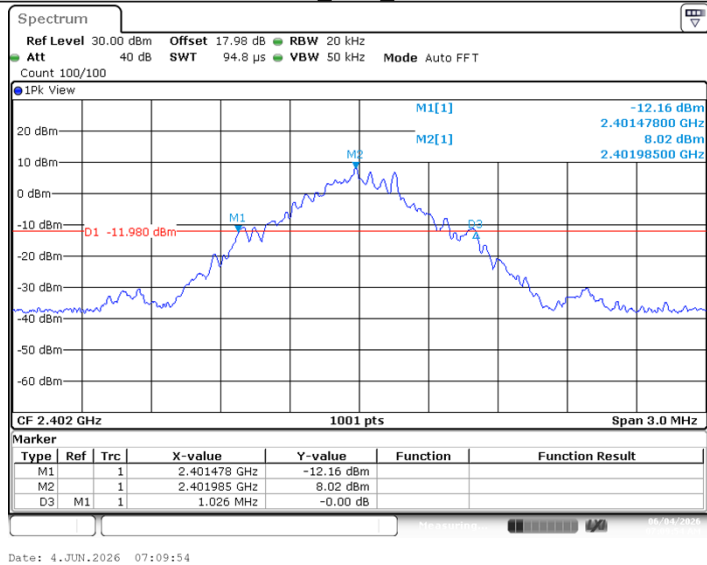

DH5_Ant1_2441

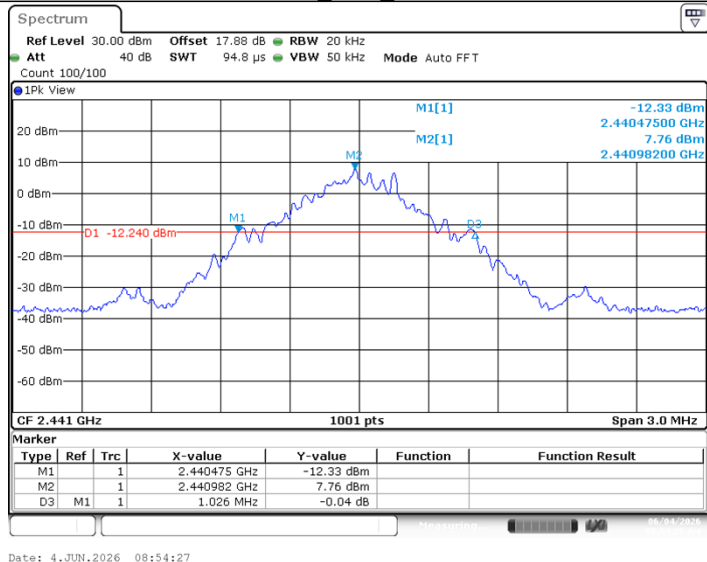


DH5_Ant1_2480

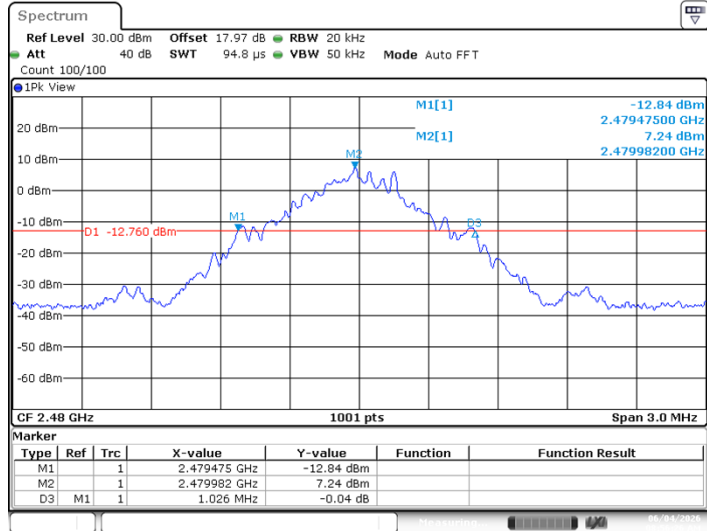


Date: 4.JUN.2026 08:56:27

2DH5_Ant1_2402

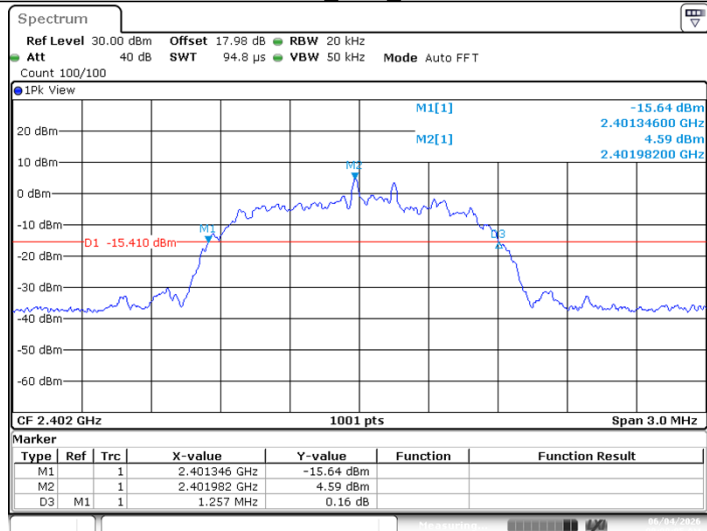


Date: 4.JUN.2026 09:00:06

2DH5_Ant1_2441

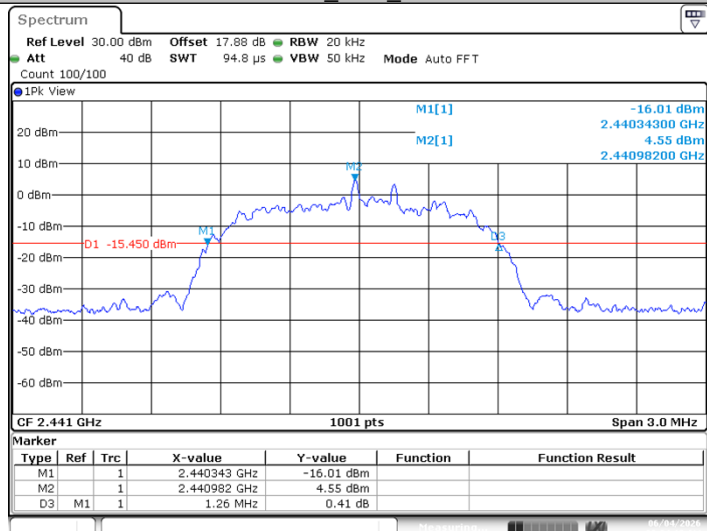

Date: 4.JUN.2026 09:04:19

2DH5_Ant1_2480

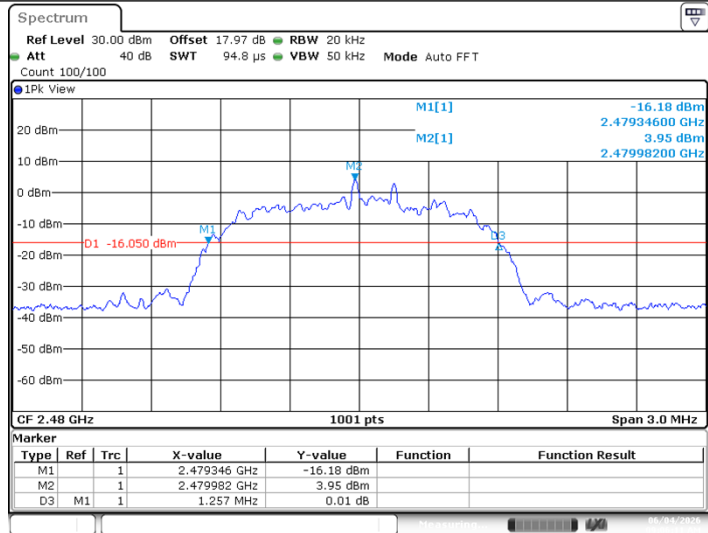

Date: 4.JUN.2026 09:06:11

Appendix C.3: Test Results of Frequency stability

Test Channel (MHz)	2402
-----------------------	------

Test result of frequency tolerance of voltage variation

Voltage	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
DC 3.85V	2401.990	-10	-4.16	10
DC 3.465V	2401.989	-11	-4.58	
DC 4.235V	2401.991	-9	-3.75	

Test result of frequency tolerance of temperature variation

Temperature (°C)	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
-30	2401.989	-11	-4.58	10
-20	2401.988	-12	-5.00	
-10	2401.987	-13	-5.41	
0	2401.989	-11	-4.58	
10	2401.991	-9	-3.75	
20	2401.987	-13	-5.41	
30	2401.986	-14	-5.83	
40	2401.987	-13	-5.41	
50	2401.986	-14	-5.83	
55	2401.985	-15	-6.24	

Test Channel (MHz)	2441
-----------------------	------

Test result of frequency tolerance of voltage variation

Voltage	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
DC 3.85V	2440.988	-12	-4.92	10
DC 3.465V	2440.987	-13	-5.33	
DC 4.235V	2440.989	-11	-4.51	

Test result of frequency tolerance of temperature variation

Temperature (°C)	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
-30	2440.987	-13	-5.33	10
-20	2440.986	-14	-5.74	
-10	2440.985	-15	-6.15	
0	2440.983	-17	-6.96	
10	2440.986	-14	-5.74	
20	2440.984	-16	-6.55	
30	2440.985	-15	-6.15	
40	2440.988	-12	-4.92	
50	2440.993	-7	-2.87	
55	2440.987	-13	-5.33	

Test Channel (MHz)	2480
-----------------------	------

Test result of frequency tolerance of voltage variation



Voltage	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
DC 3.85V	2479.982	-18	-7.26	10
DC 3.465V	2479.986	-14	-5.65	
DC 4.235V	2479.986	-14	-5.65	

Test result of frequency tolerance of temperature variation

Temperature (°C)	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
-30	2479.988	-12	-4.84	10
-20	2479.985	-15	-6.05	
-10	2479.987	-13	-5.24	
0	2479.985	-15	-6.05	
10	2479.984	-16	-6.45	
20	2479.989	-11	-4.44	
30	2479.991	-9	-3.63	
40	2479.990	-10	-4.03	
50	2479.989	-11	-4.44	
55	2479.991	-9	-3.63	



Appendix C.4: Test Results of Carrier Frequency Separation

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.003	≥ 0.687	PASS
2DH5	Ant1	Hop	0.983	≥ 0.840	PASS

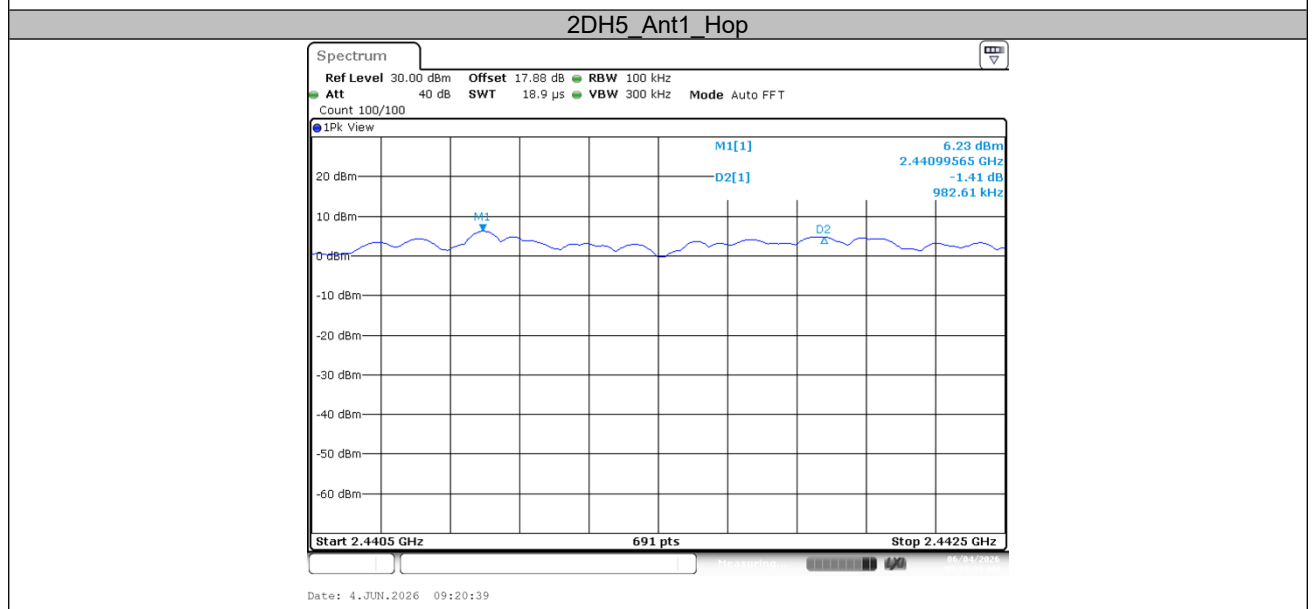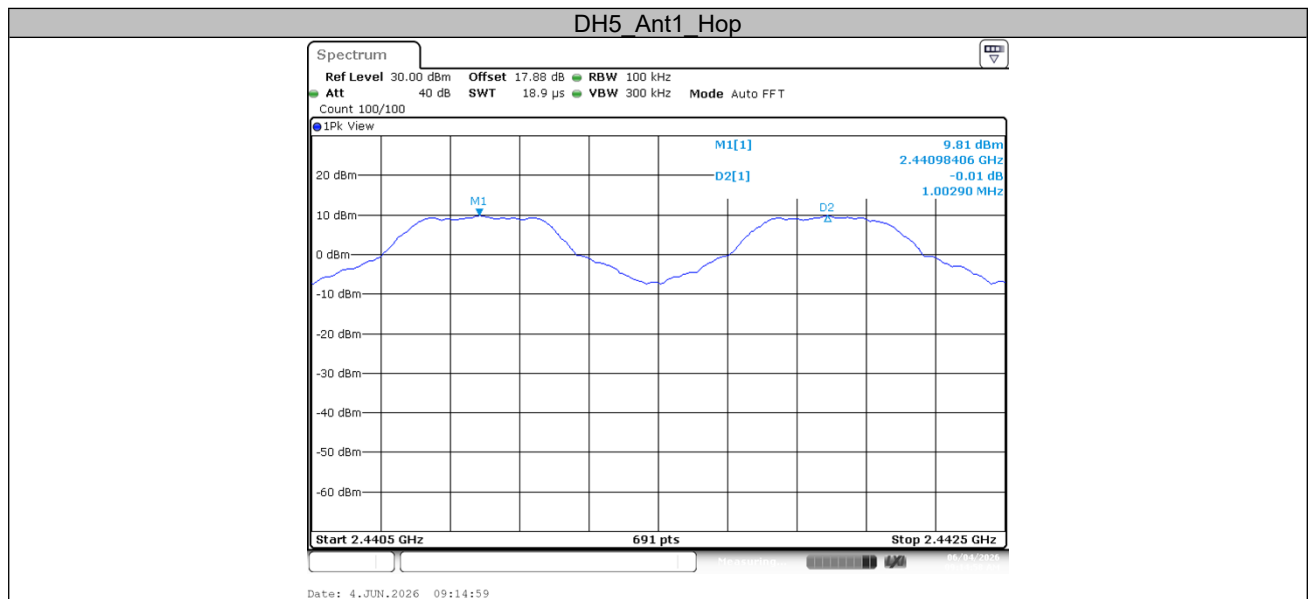


Appendix C.5: Test Results of Number of Hopping Frequency

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS

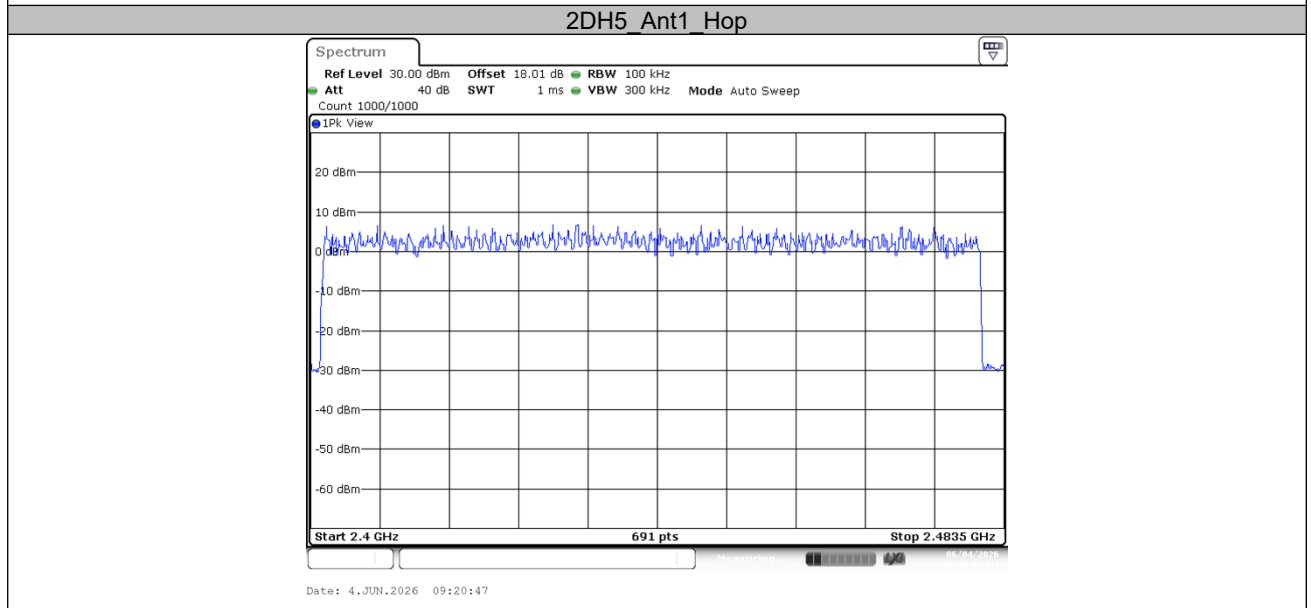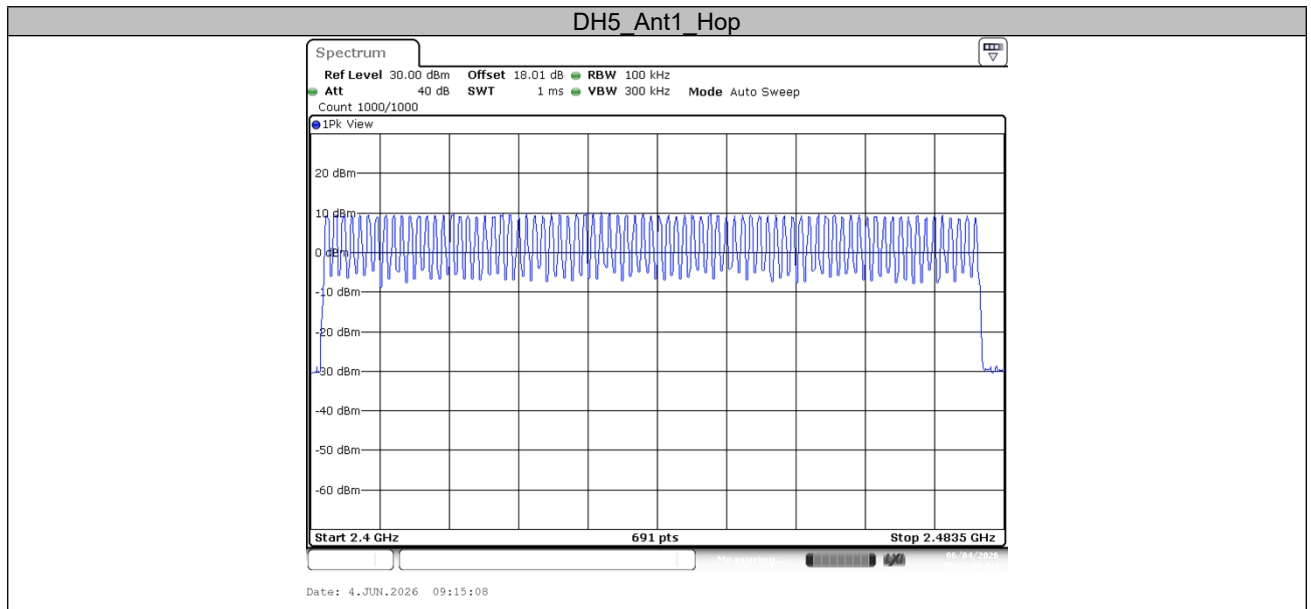


Appendix C.6: Test Results of Time of Occupancy


TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.375	156	0.059	≤0.4	PASS
DH3	Ant1	Hop	1.624	112	0.182	≤0.4	PASS
DH5	Ant1	Hop	2.864	86	0.246	≤0.4	PASS
2DH1	Ant1	Hop	0.384	165	0.063	≤0.4	PASS
2DH3	Ant1	Hop	1.626	113	0.184	≤0.4	PASS
2DH5	Ant1	Hop	2.869	78	0.224	≤0.4	PASS

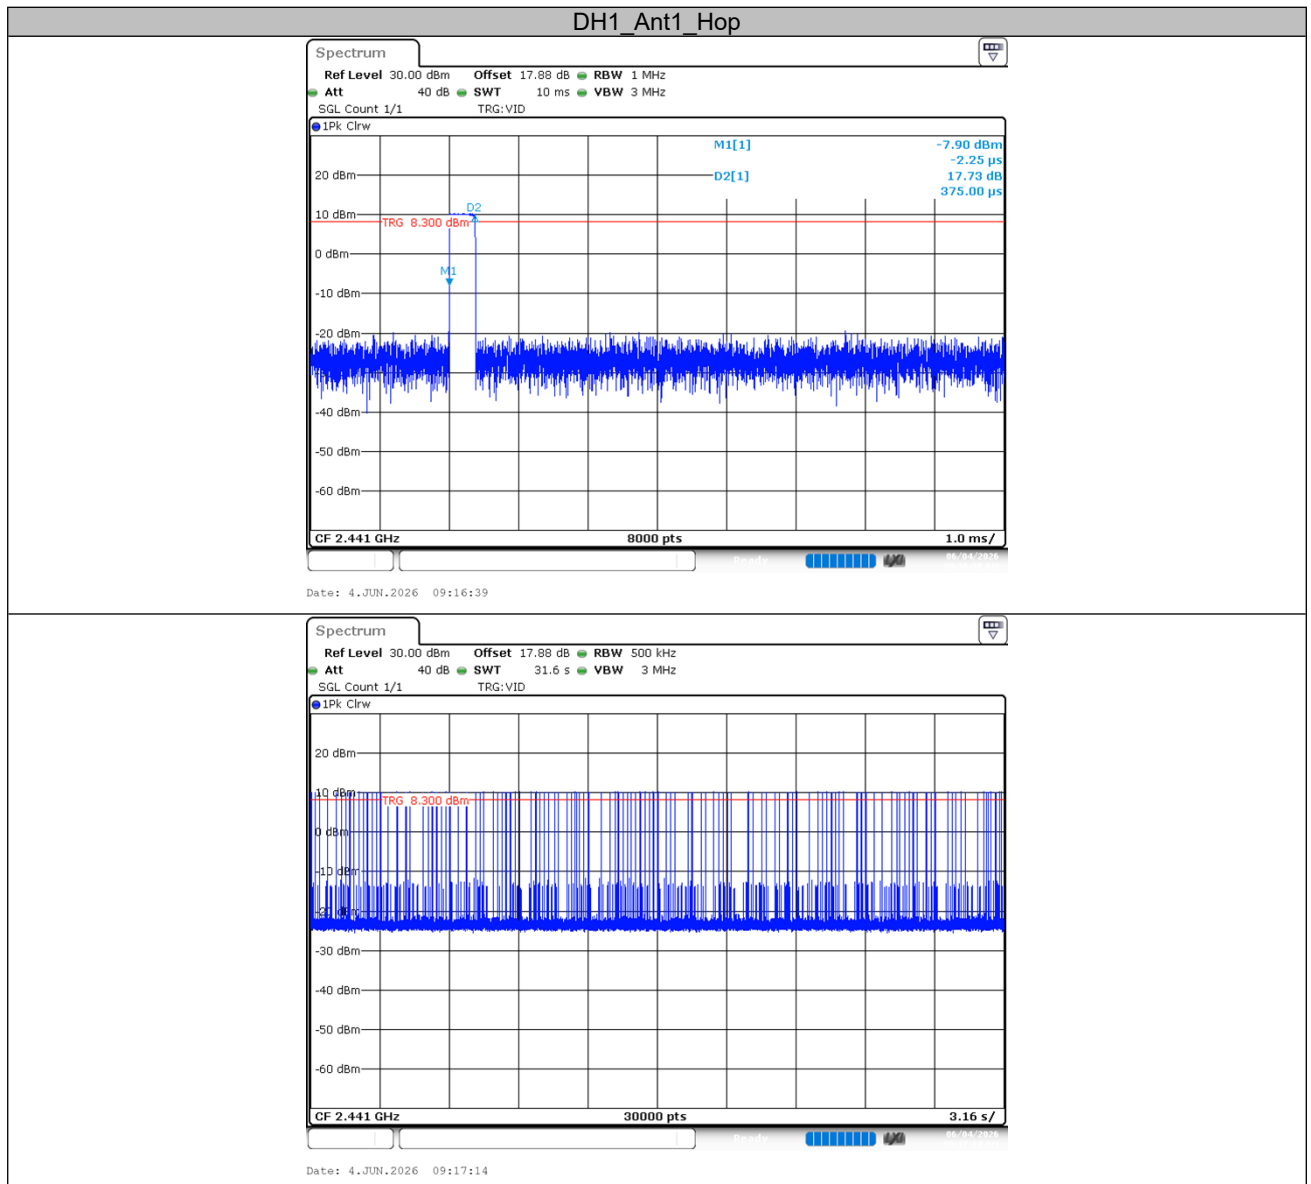

DH3_Ant1_Hop

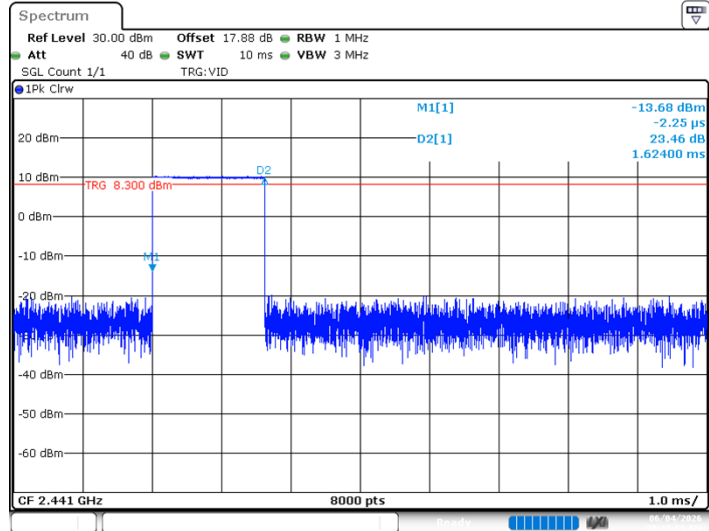


Date: 4.JUN.2026 09:17:51

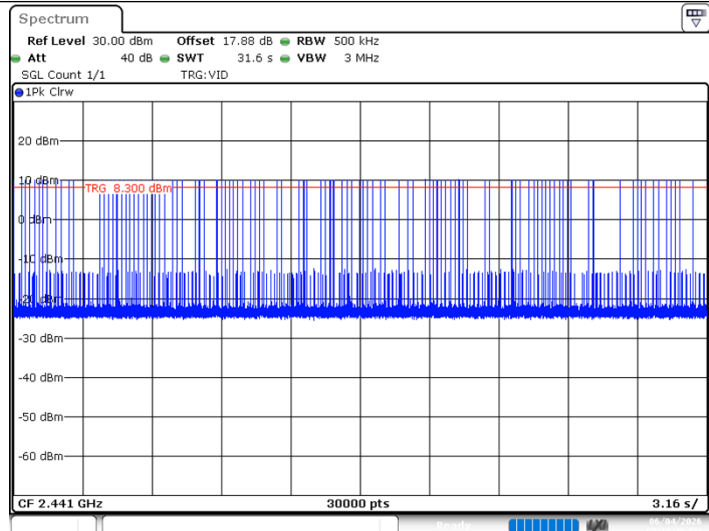


Date: 4.JUN.2026 09:18:27



DH5_Ant1_Hop

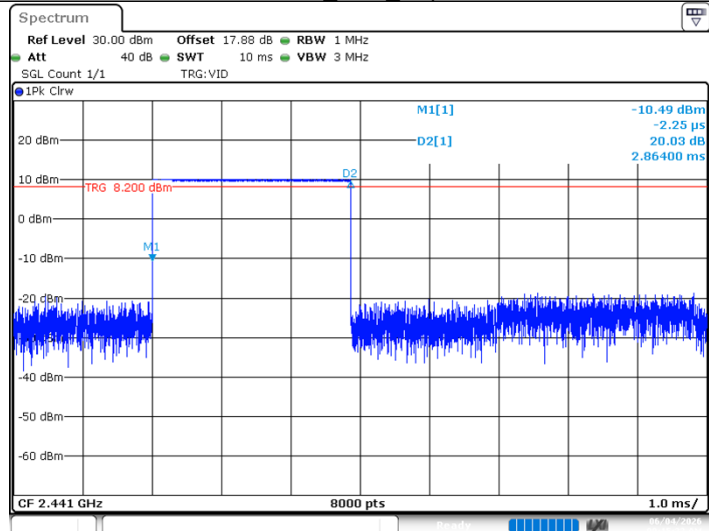


Date: 4.JUN.2026 09:15:24

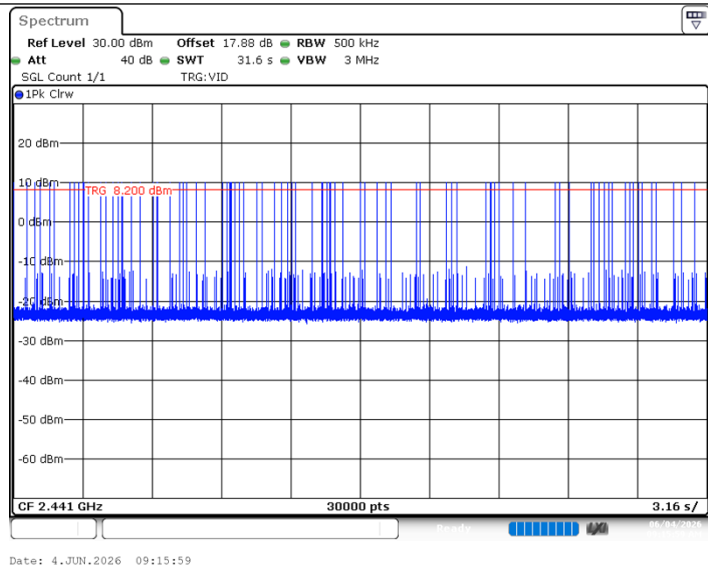


2DH1_Ant1_Hop

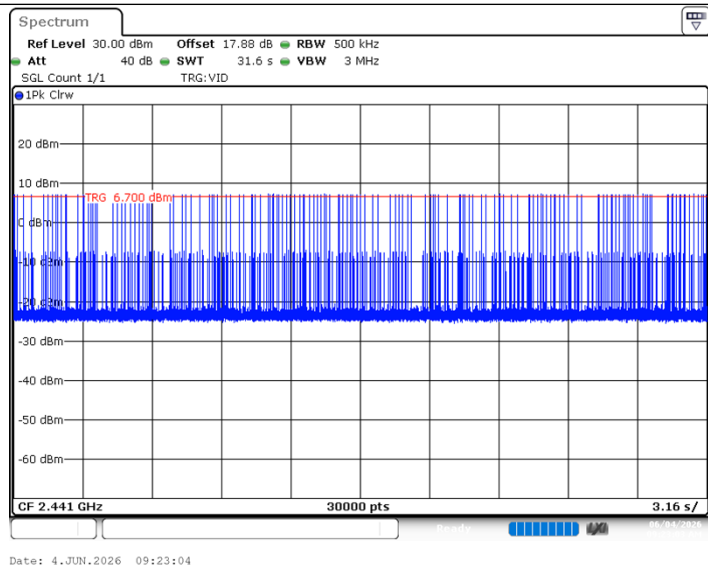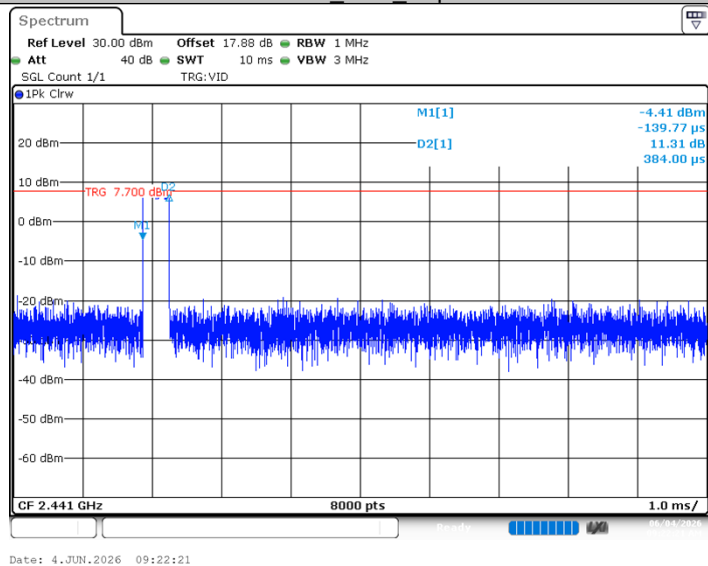

2DH3_Ant1_Hop

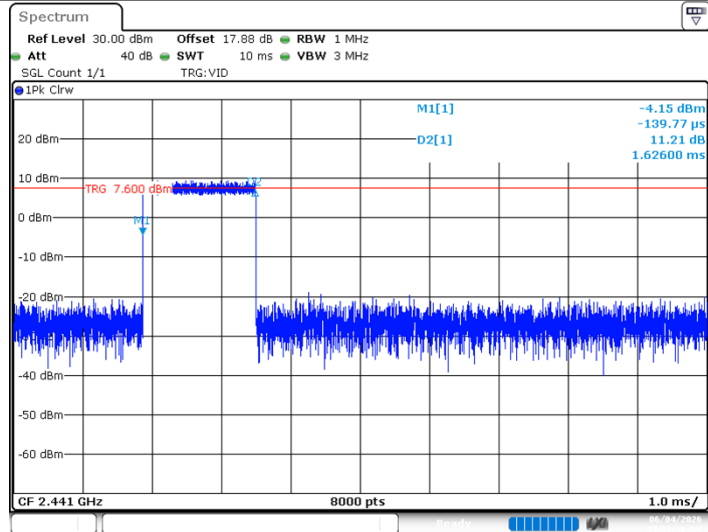


Date: 4.JUN.2026 09:23:41

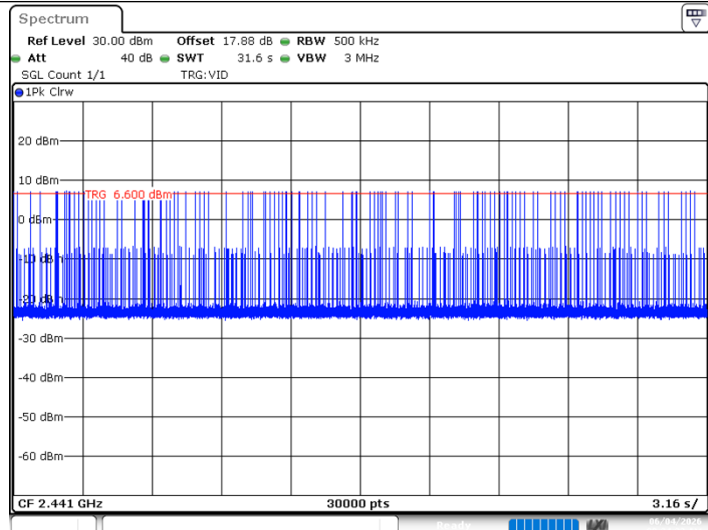


Date: 4.JUN.2026 09:24:23

2DH5_Ant1_Hop

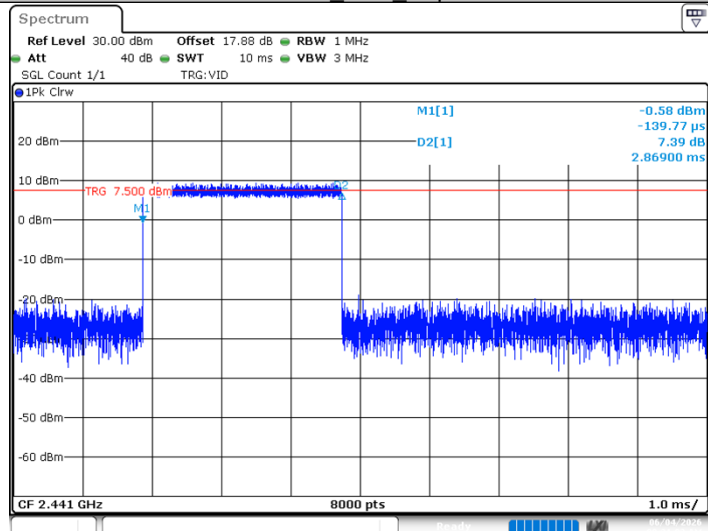

Date: 4.JUN.2026 09:21:03

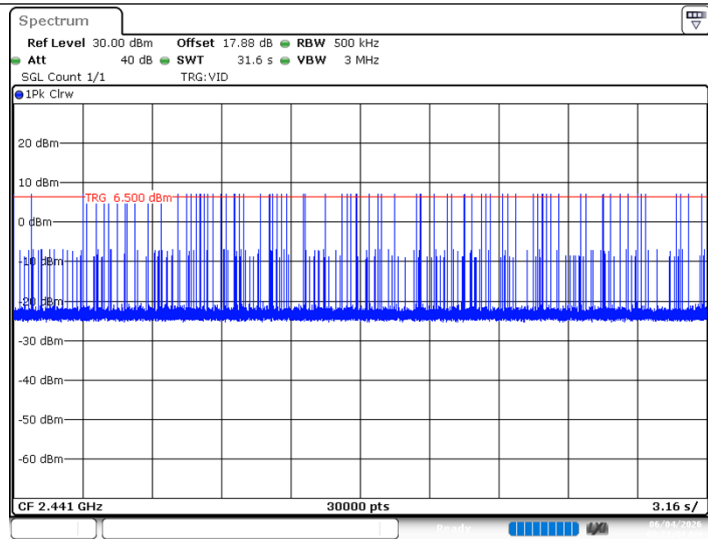


Appendix C.7: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Conducted Spurious Emission


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	10.24	10.24	---	PASS
			30~1000	10.24	-47.68	≤-9.76	PASS
			1000~26500	10.24	-42.91	≤-9.76	PASS
		2441	Reference	9.98	9.98	---	PASS
			30~1000	9.98	-47.64	≤-10.02	PASS
			1000~26500	9.98	-42.61	≤-10.02	PASS
		2480	Reference	9.44	9.44	---	PASS
			30~1000	9.44	-48.13	≤-10.56	PASS
			1000~26500	9.44	-42.79	≤-10.56	PASS
2DH5	Ant1	2402	Reference	6.83	6.83	---	PASS
			30~1000	6.83	-48.37	≤-13.17	PASS
			1000~26500	6.83	-42.86	≤-13.17	PASS
		2441	Reference	6.73	6.73	---	PASS
			30~1000	6.73	-48.59	≤-13.27	PASS
			1000~26500	6.73	-43.25	≤-13.27	PASS
		2480	Reference	6.14	6.14	---	PASS
			30~1000	6.14	-48.45	≤-13.86	PASS
			1000~26500	6.14	-42.79	≤-13.86	PASS

DH5_Ant1_2402_0~Reference

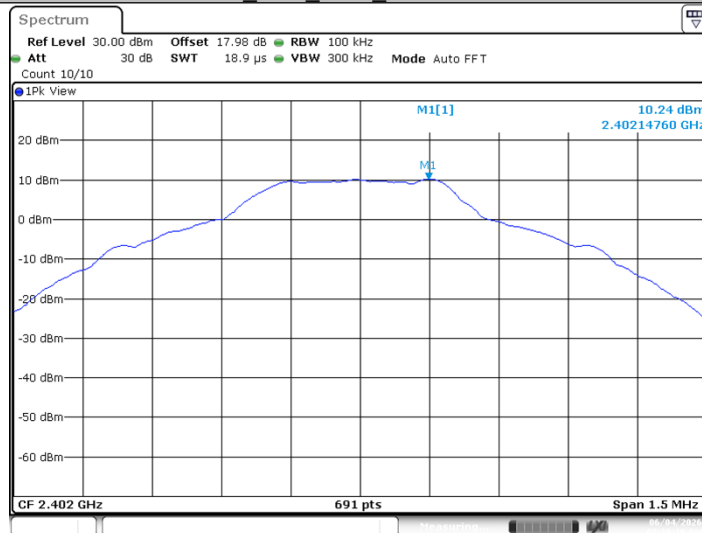


Date: 4.JUN.2026 07:10:10

DH5_Ant1_2402_30~1000

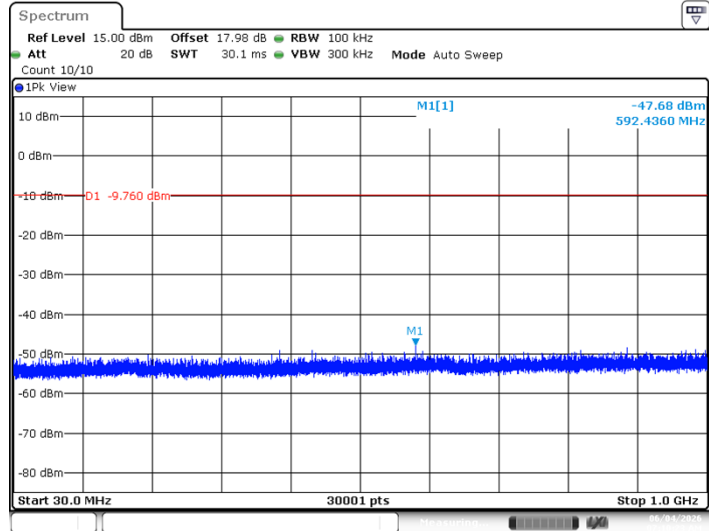


Date: 4.JUN.2026 07:10:24

DH5_Ant1_2402_1000~26500

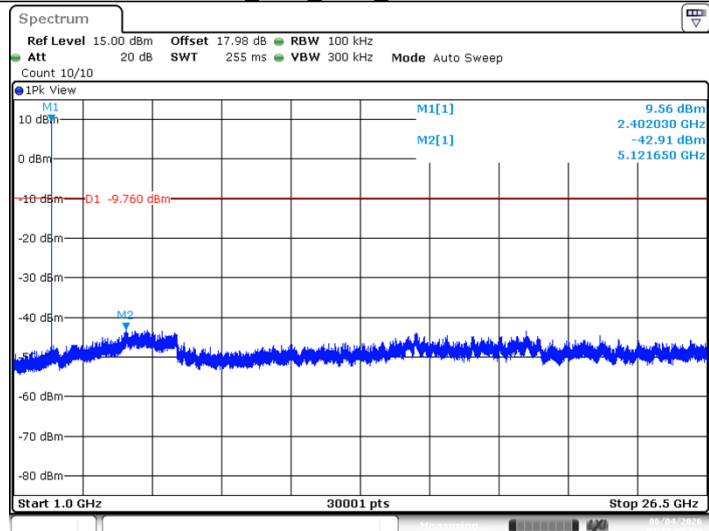


Date: 4.JUN.2026 07:11:03

DH5_Ant1_2441_0~Reference

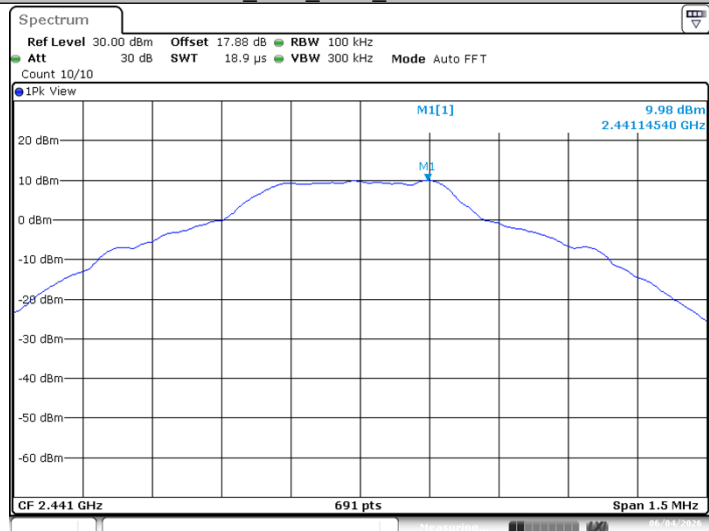


Date: 4.JUN.2026 08:54:42

DH5_Ant1_2441_30~1000

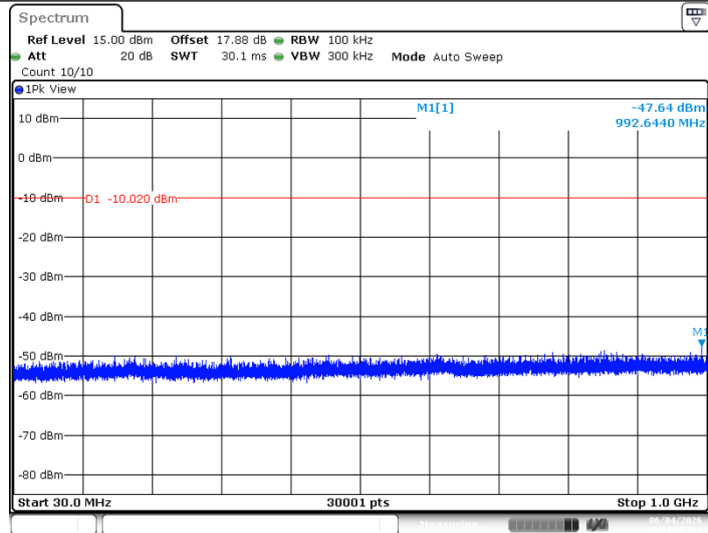


Date: 4.JUN.2026 08:54:56

DH5_Ant1_2441_1000~26500

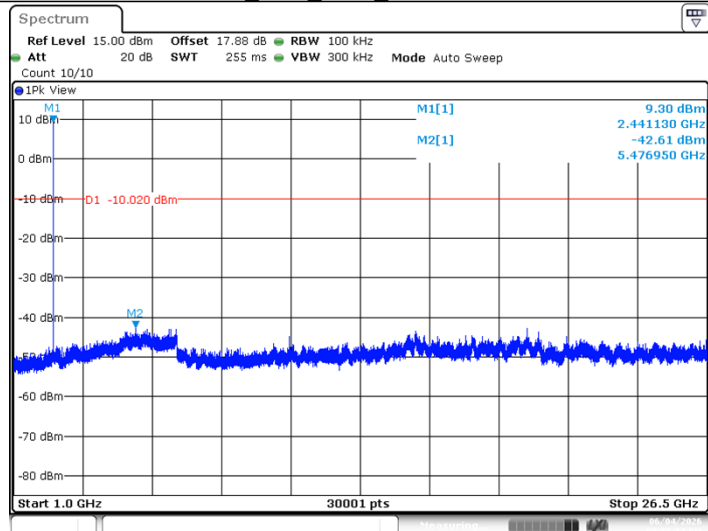


Date: 4.JUN.2026 08:55:34

DH5_Ant1_2480_0~Reference

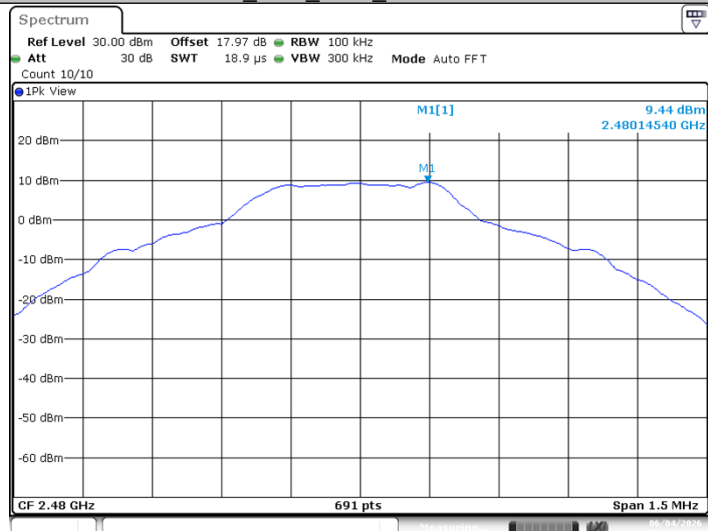


Date: 4.JUN.2026 08:56:54

DH5_Ant1_2480_30~1000

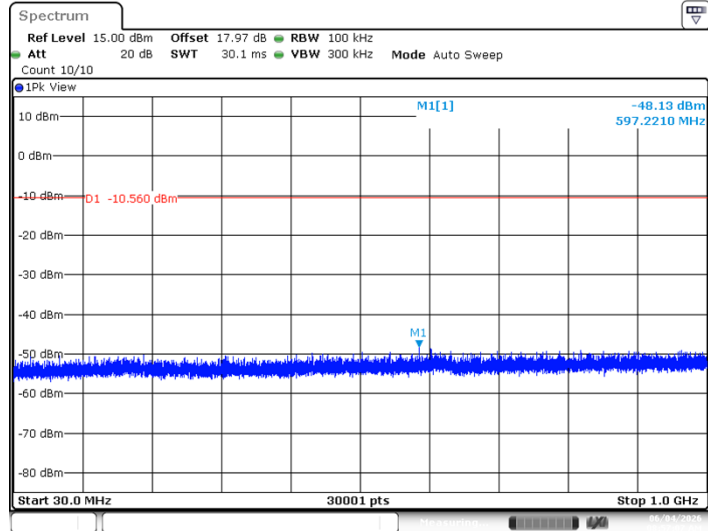


Date: 4.JUN.2026 08:57:08

DH5_Ant1_2480_1000~26500

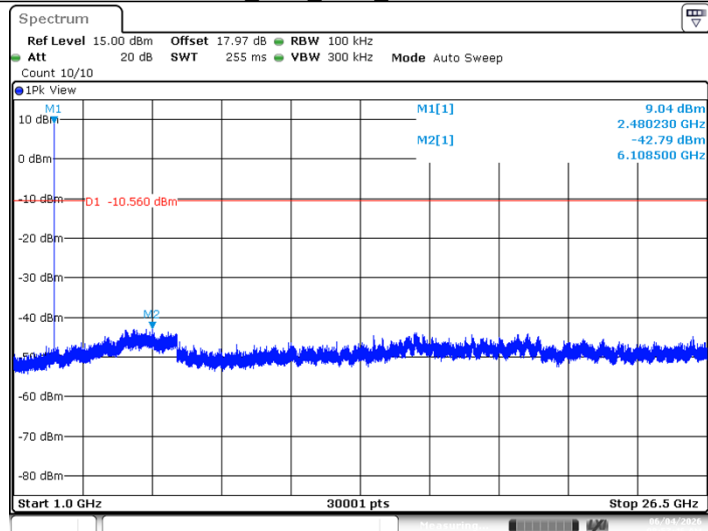


Date: 4.JUN.2026 08:57:46

2DH5_Ant1_2402_0~Reference

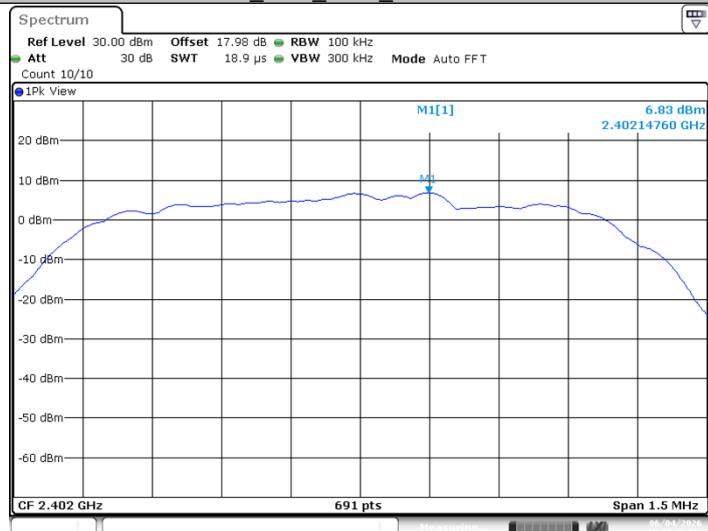


Date: 4.JUN.2026 09:00:21

2DH5_Ant1_2402_30~1000

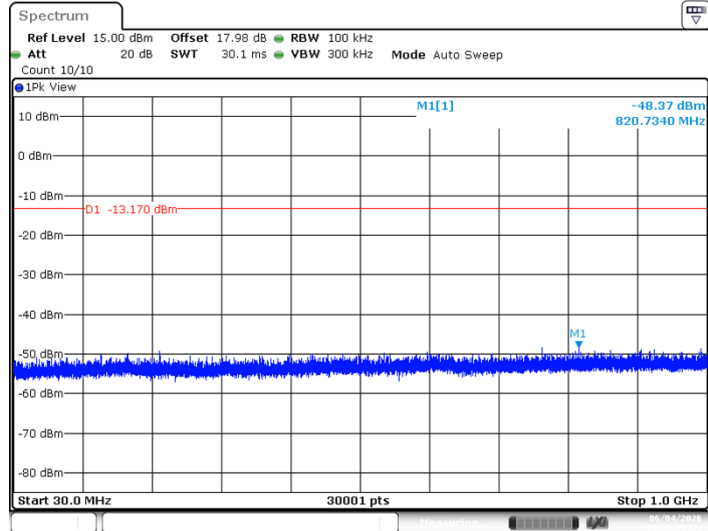


Date: 4.JUN.2026 09:00:35

2DH5_Ant1_2402_1000~26500

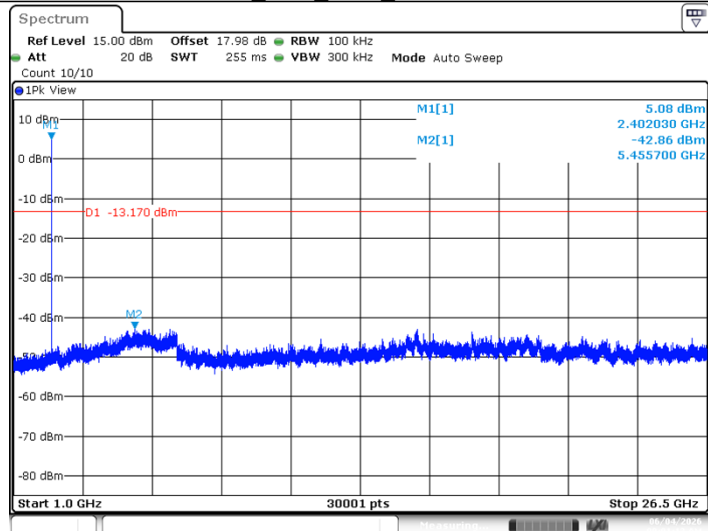


Date: 4.JUN.2026 09:01:14

2DH5_Ant1_2441_0~Reference

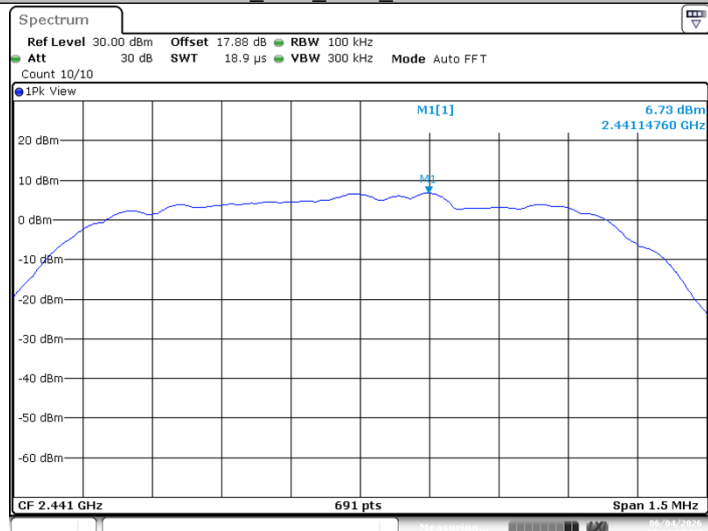


Date: 4.JUN.2026 09:04:34


2DH5_Ant1_2441_30~1000

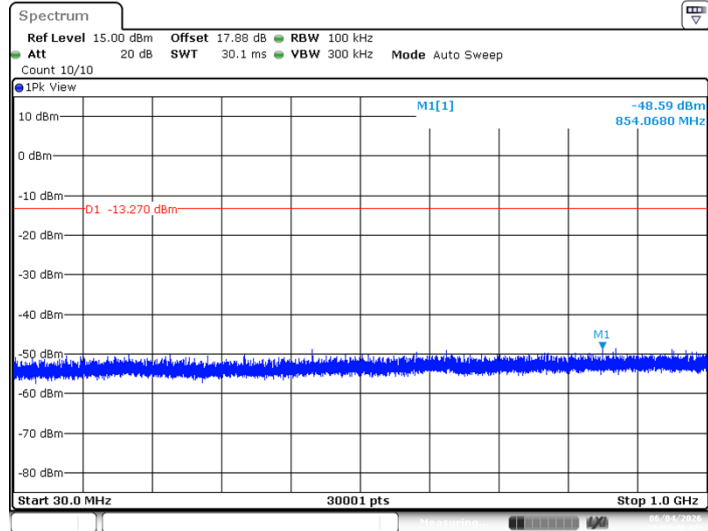


2DH5_Ant1_2441_1000~26500

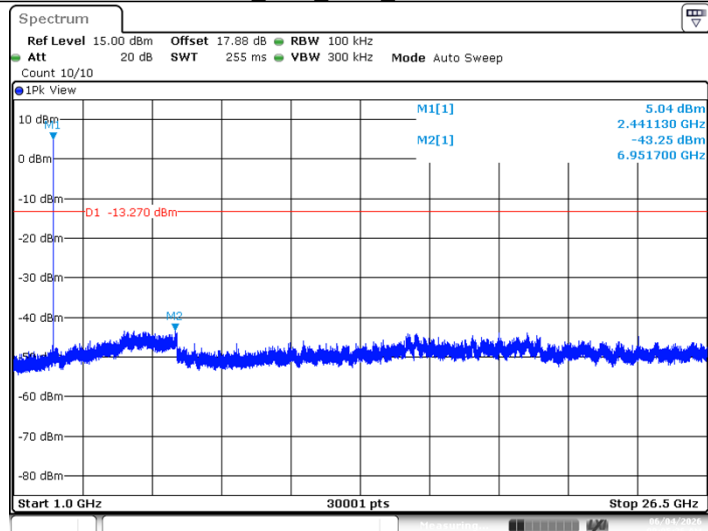


2DH5_Ant1_2480_0~Reference

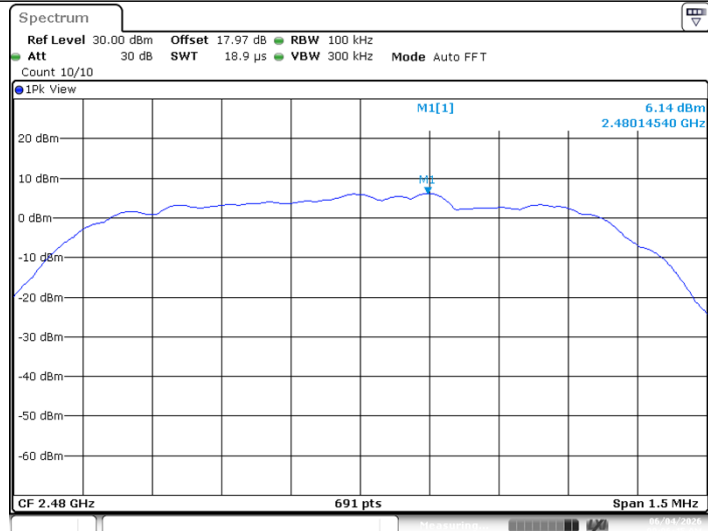

2DH5_Ant1_2480_30~1000

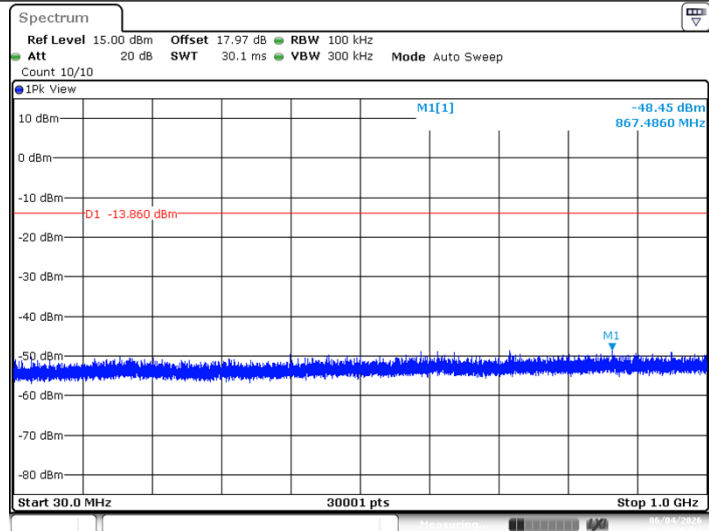


2DH5_Ant1_2480_1000~26500

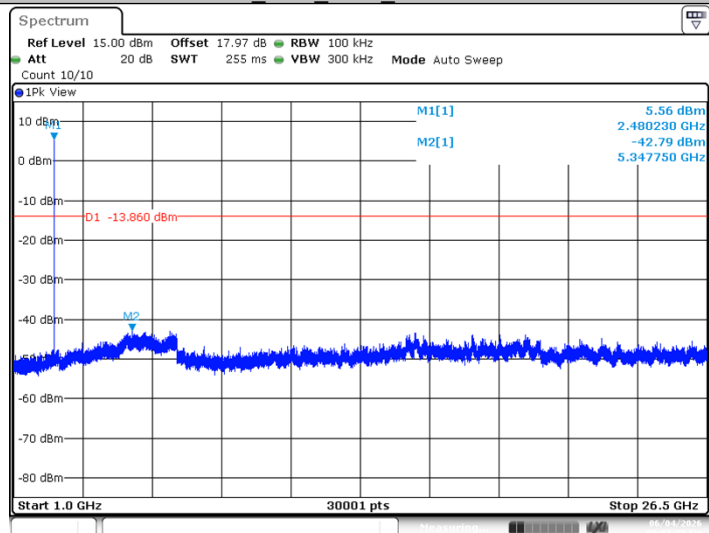


Band edge measurements.


1DH5_Ant1_2402_band edge

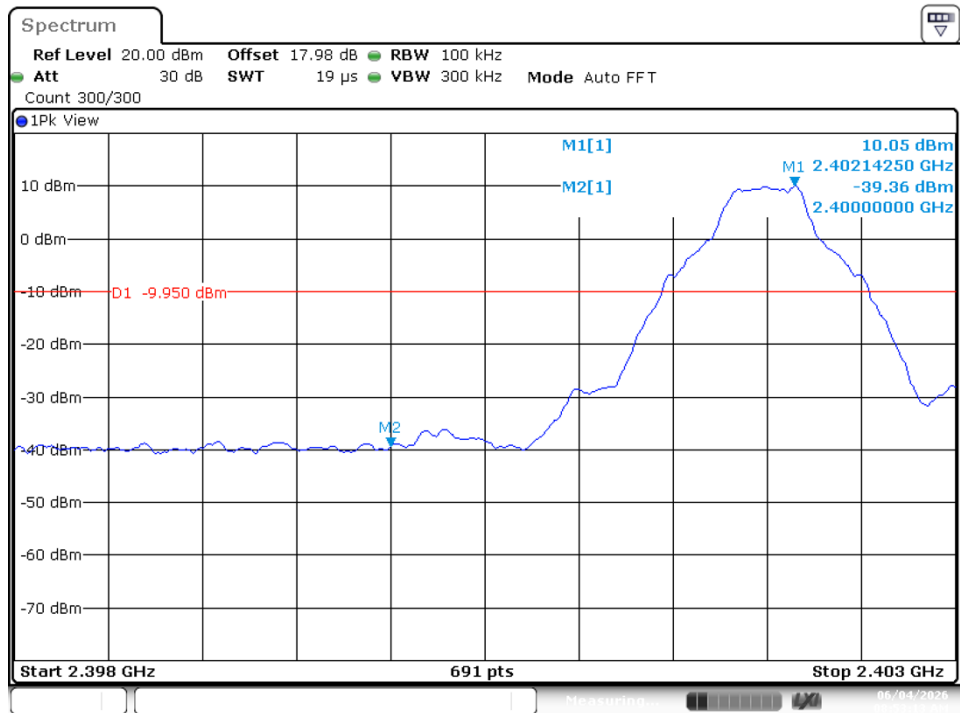


1DH5_Ant1_2480_band edge

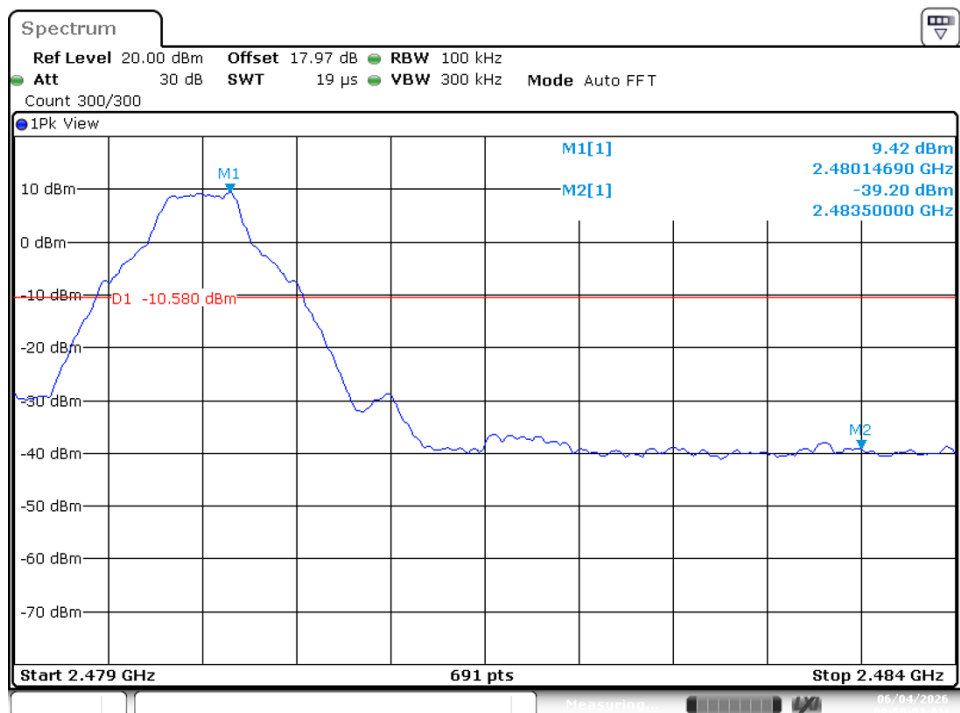


2DH5_Ant1_2402_band edge

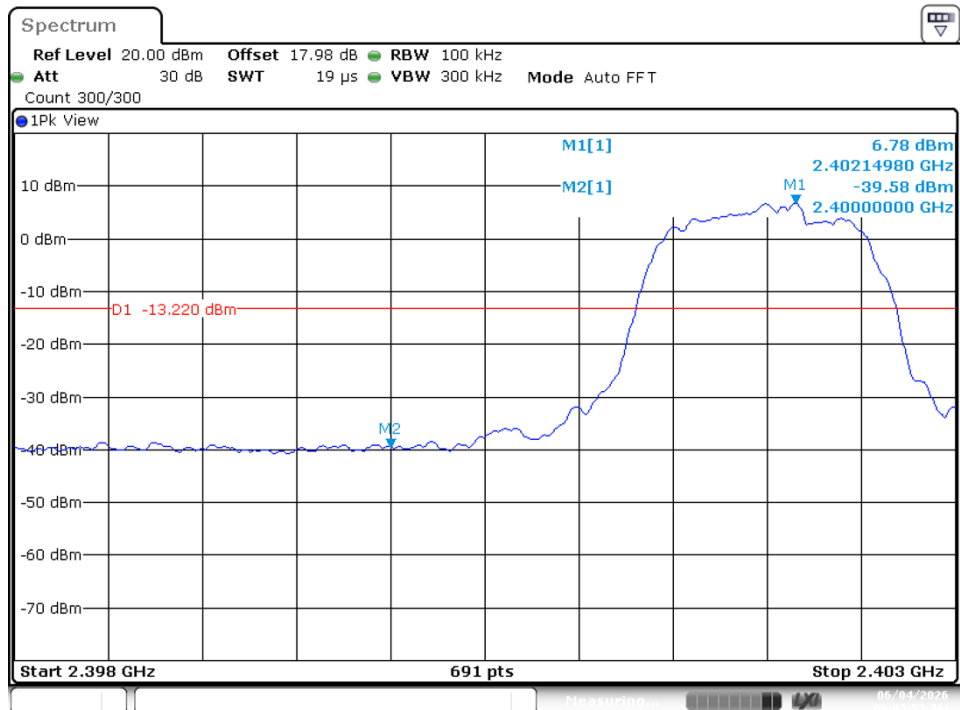


2DH5_Ant1_2480_band edge

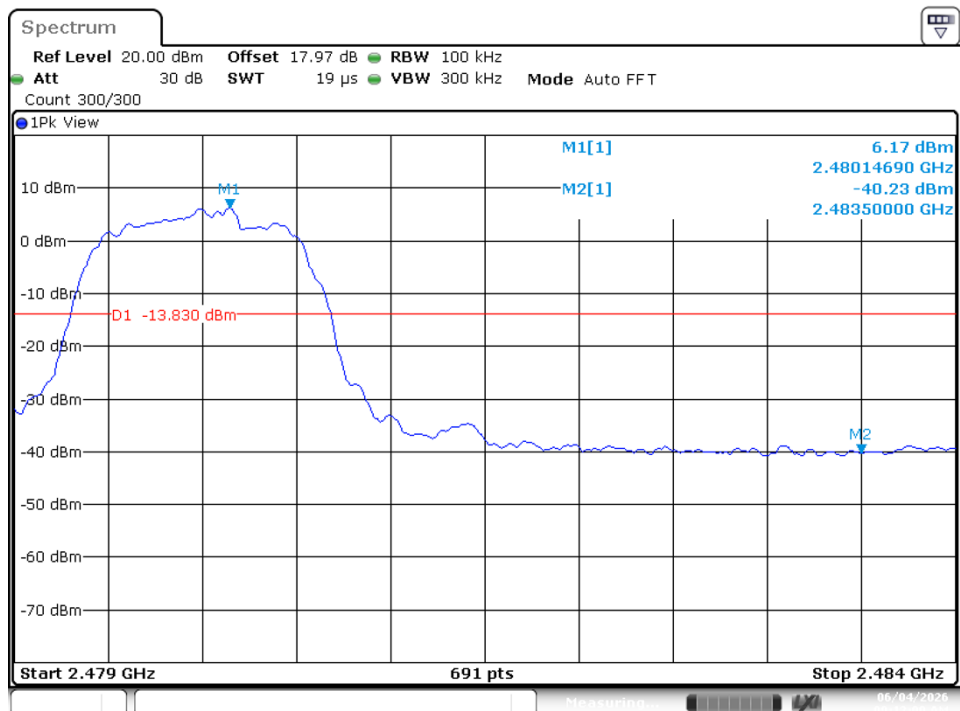


DH5_Ant1_2402_Hopping mode band edge

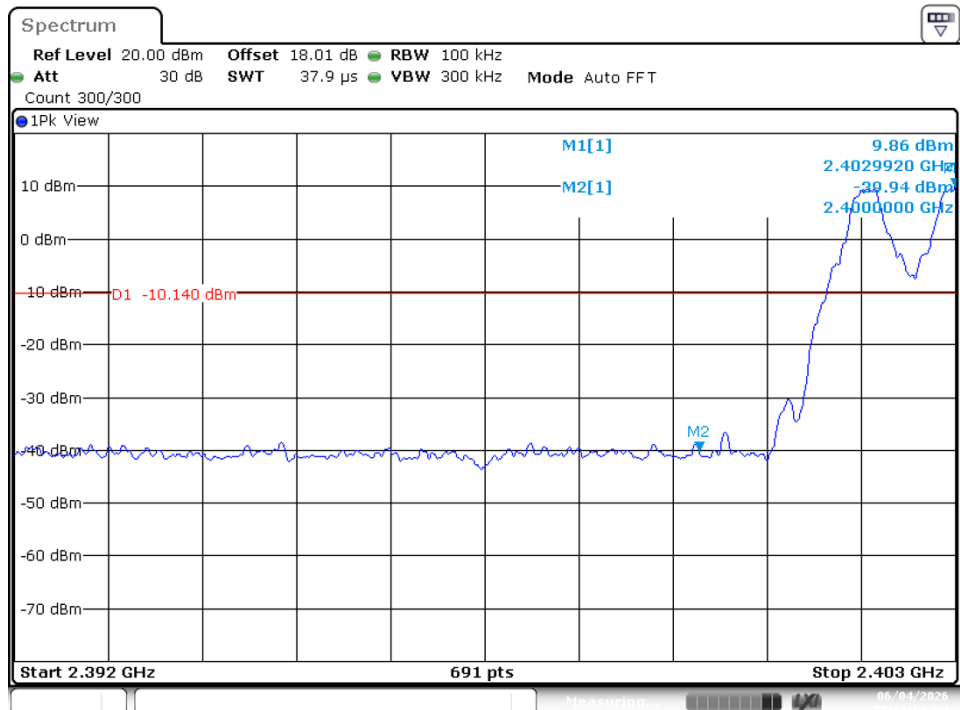


DH5_Ant1_2480_Hopping mode band edge

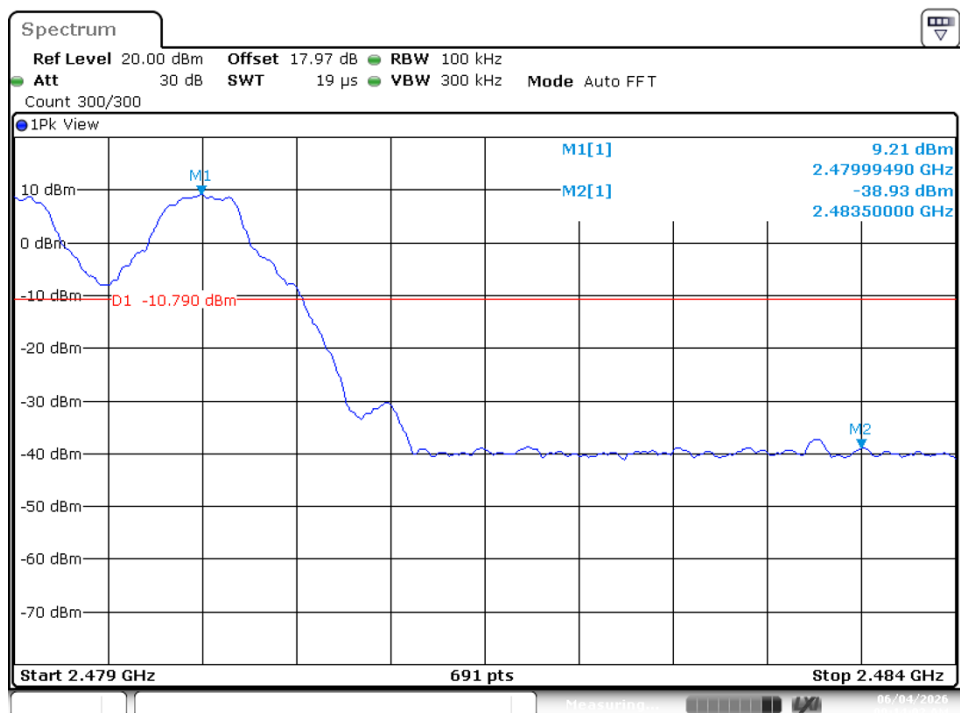

2DH5_Ant1_2402_Hopping mode band edge

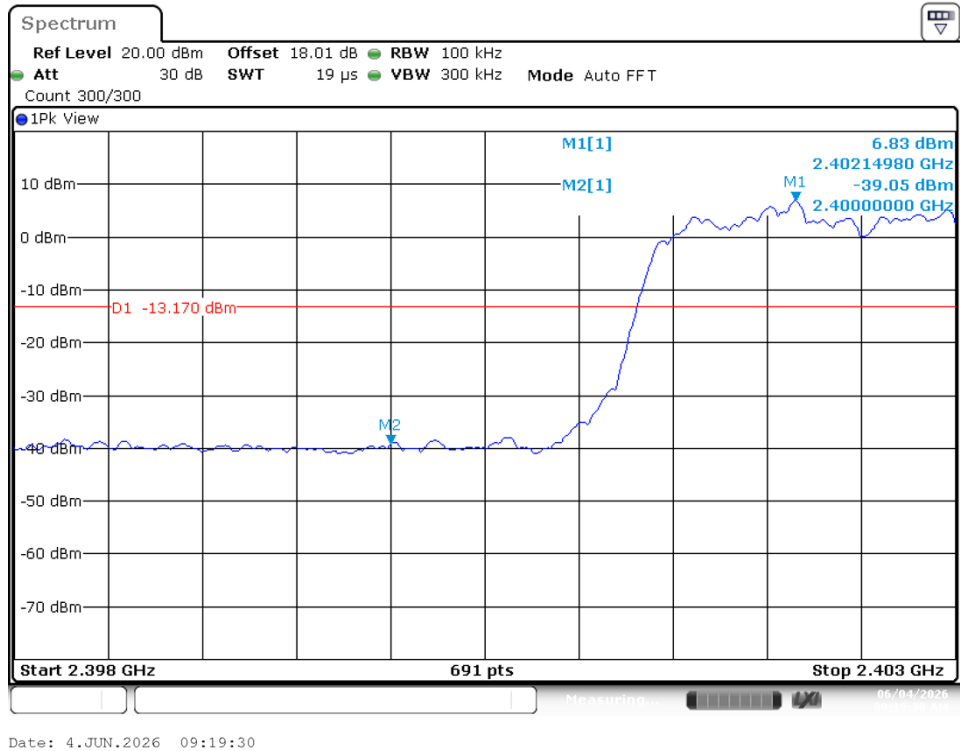

2DH5_Ant1_2480_Hopping mode band edge

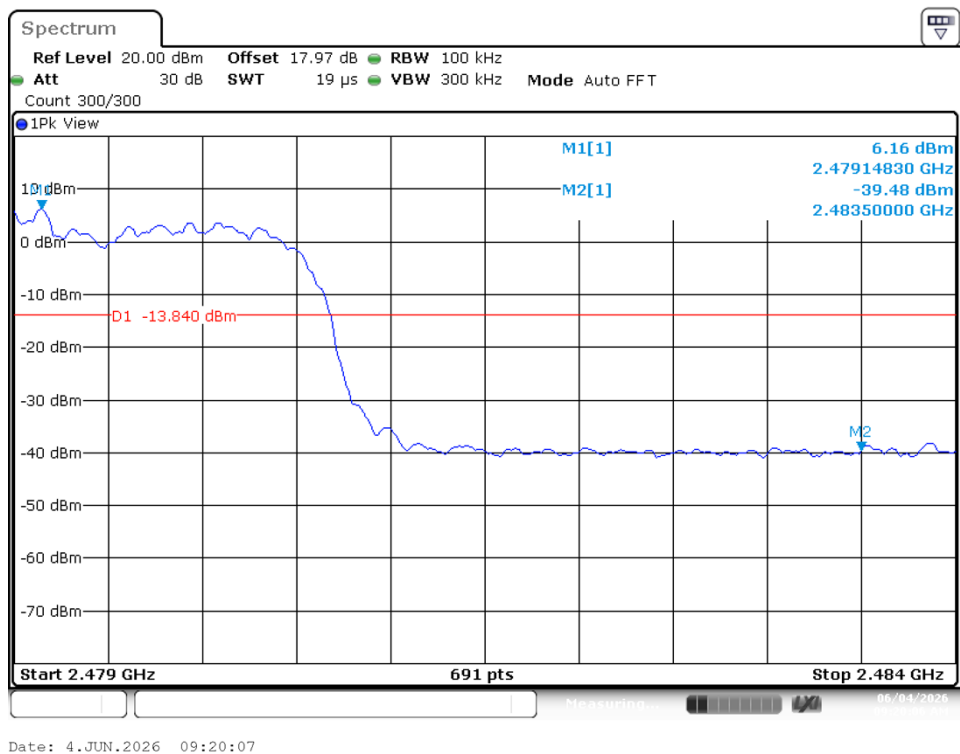


Appendix C.8: Test Results of Radiated Spurious Emissions

Note: 1. Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported. 2. This testing was carried out on different modulations, but only the worst case (GFSK) was presented in this report.

30MHz - 1GHz

EUT Information

EUT Name:	BLUETOOTH HEADSET
Model:	VIBE BUDS 3
Test Mode:	BR DH5_Mid channel
Order No/Sample No:	27235507/A004281368-011
Test Voltage:	Battery
Remark:	Temp 23.5°C Humi:54%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

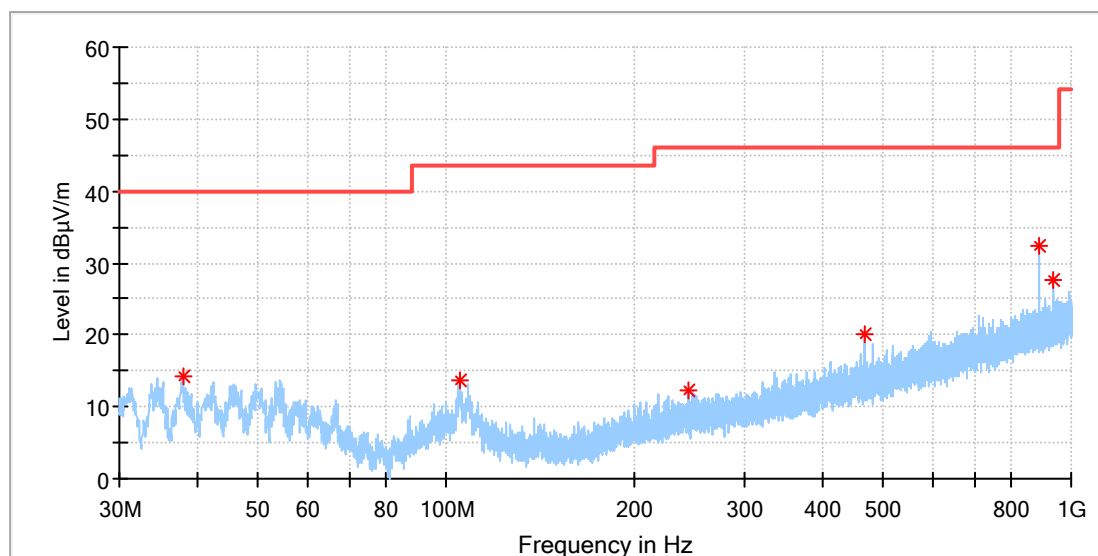


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.867778	14.23	40.00	25.77	100.0	H	0.0	-20.9
105.498333	13.71	43.50	29.79	100.0	H	61.0	-18.9
244.154444	12.21	46.00	33.79	100.0	H	26.0	-17.6
467.847222	20.14	46.00	25.86	100.0	H	0.0	-12.4
890.982778	32.51	46.00	13.49	100.0	H	267.0	-4.9
938.405000	27.61	46.00	18.39	100.0	H	115.0	-4.4

EUT Information

EUT Name:	BLUETOOTH HEADSET
Model:	VIBE BUDS 3
Test Mode:	BR DH5_Mid channel
Order No/Sample No:	27235507/A004281368-011
Test Voltage:	Battery
Remark:	Temp 23.5°C Humi:54%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

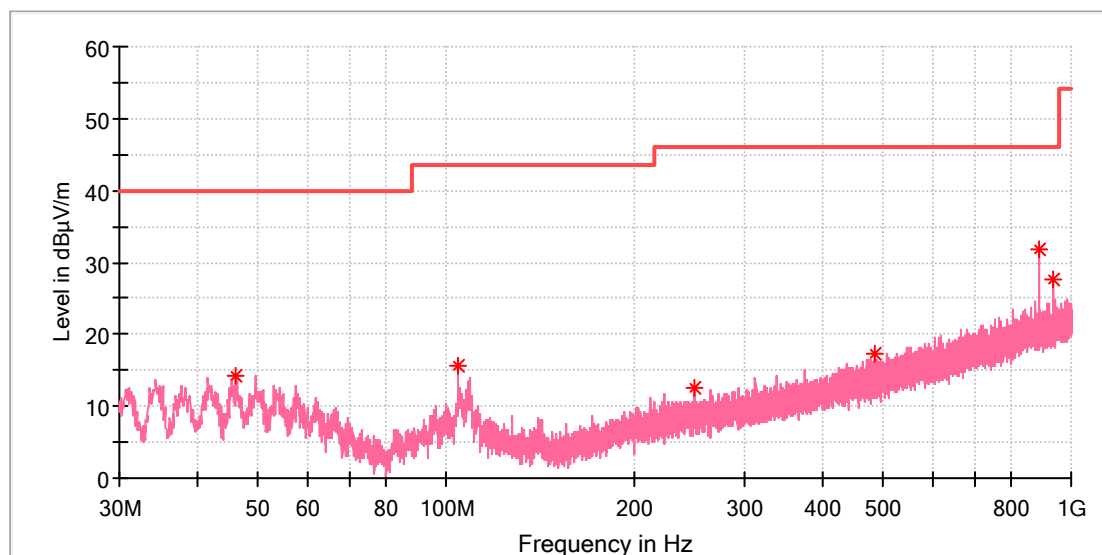

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.166667	14.23	40.00	25.77	100.0	V	59.0	-18.7
104.743889	15.61	43.50	27.89	100.0	V	253.0	-18.9
250.028333	12.45	46.00	33.55	100.0	V	26.0	-17.4
484.552778	17.24	46.00	28.76	100.0	V	0.0	-12.1
890.982778	31.95	46.00	14.05	100.0	V	346.0	-4.9
938.405000	27.71	46.00	18.29	100.0	V	152.0	-4.4

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	BLUETOOTH HEADSET
Model:	VIBE BUDS 3
Test Mode:	BR DH5_Low channel
Order No/Sample No:	27235507/A004281368-011
Test Voltage:	Battery
Remark:	Temp 23.5°C Humi:54%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

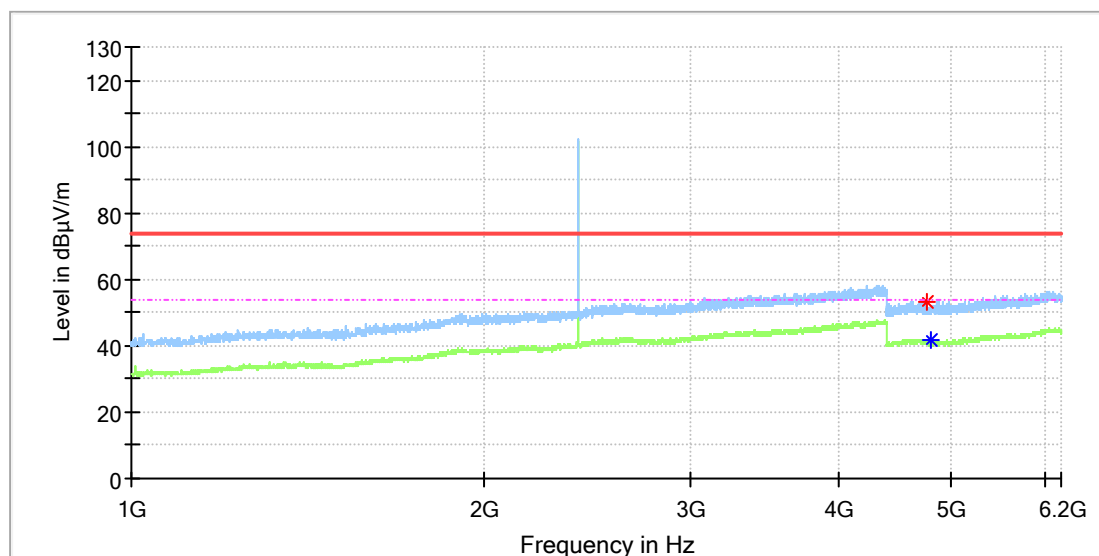


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4761.500000	53.41	---	74.00	20.59	150.0	H	1.0	13.3
4803.500000	---	41.43	54.00	12.57	150.0	H	262.0	13.3

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Low channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

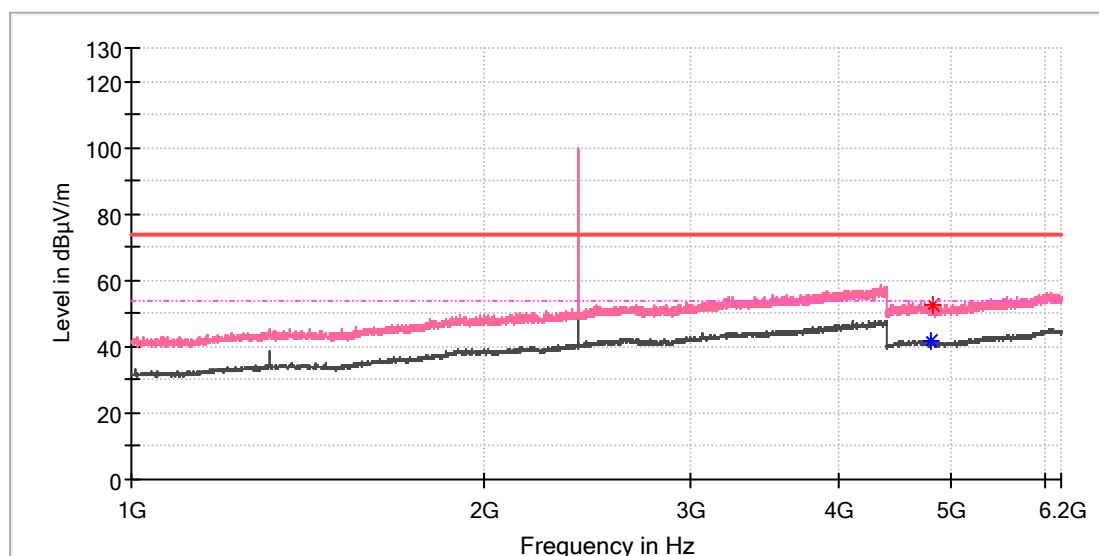


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4810.500000	---	41.49	54.00	12.51	150.0	V	165.0	13.3
4812.000000	52.36	---	74.00	21.64	150.0	V	277.0	13.3

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Mid channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

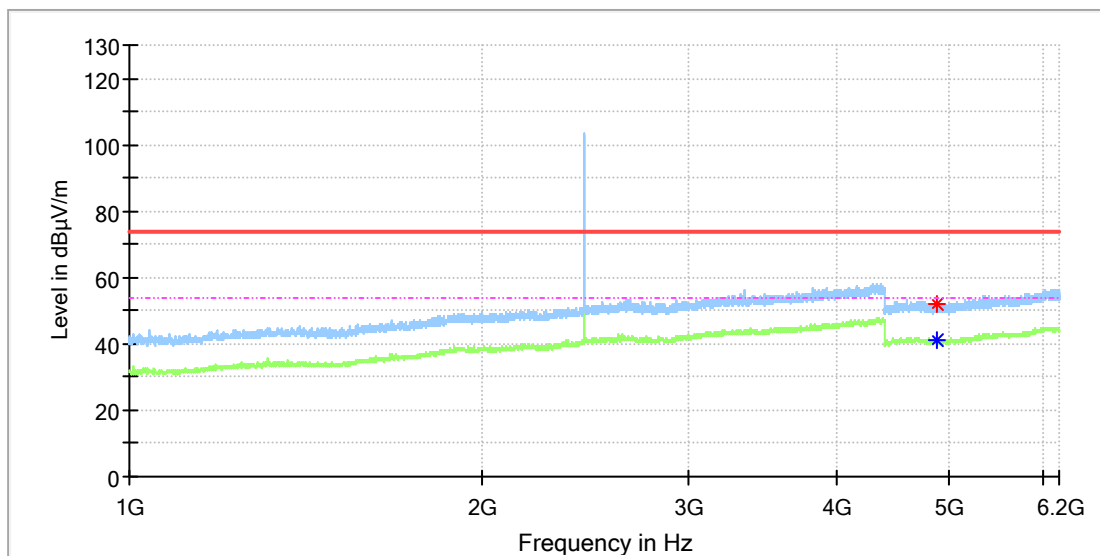


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4881.000000	51.90	---	74.00	22.10	150.0	H	310.0	13.3
4882.000000	---	41.22	54.00	12.78	150.0	H	227.0	13.3

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Mid channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

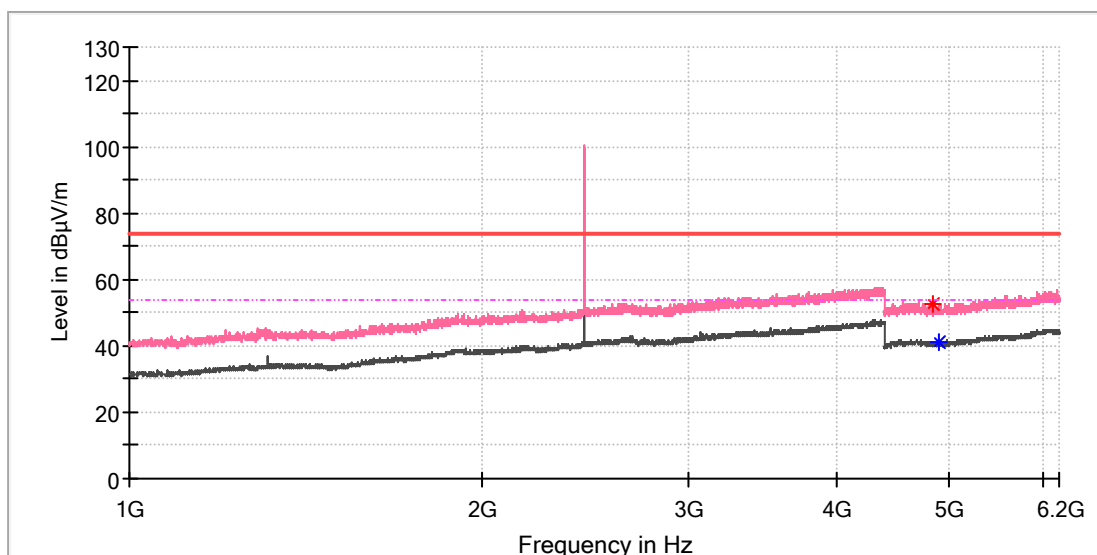


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4844.000000	52.37	---	74.00	21.63	150.0	V	213.0	13.3
4896.000000	---	41.19	54.00	12.81	150.0	V	226.0	13.3

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_High channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

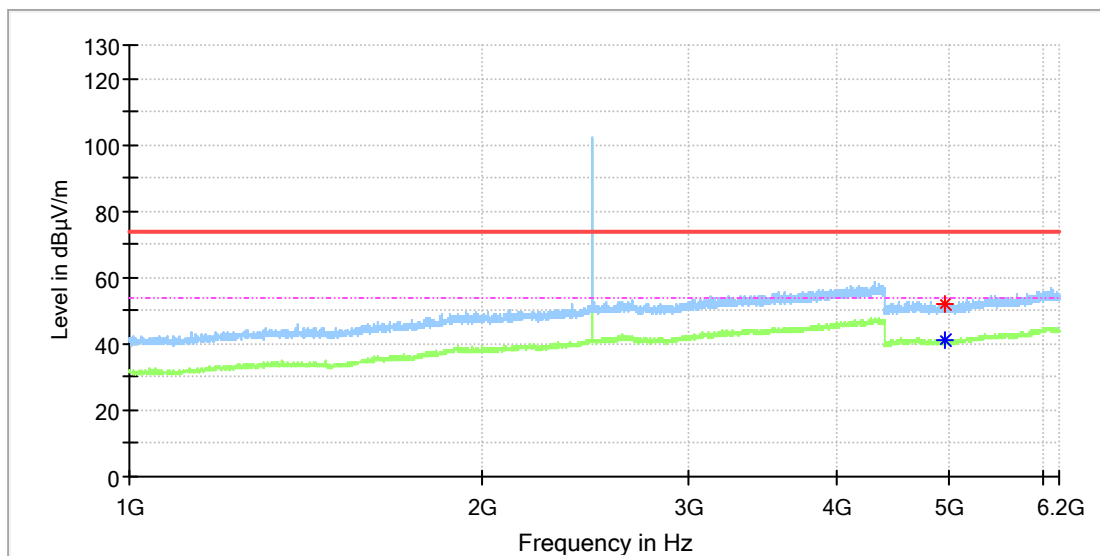


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	52.30	---	74.00	21.70	150.0	H	9.0	13.3
4960.000000	---	41.40	54.00	12.60	150.0	H	159.0	13.3

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_High channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

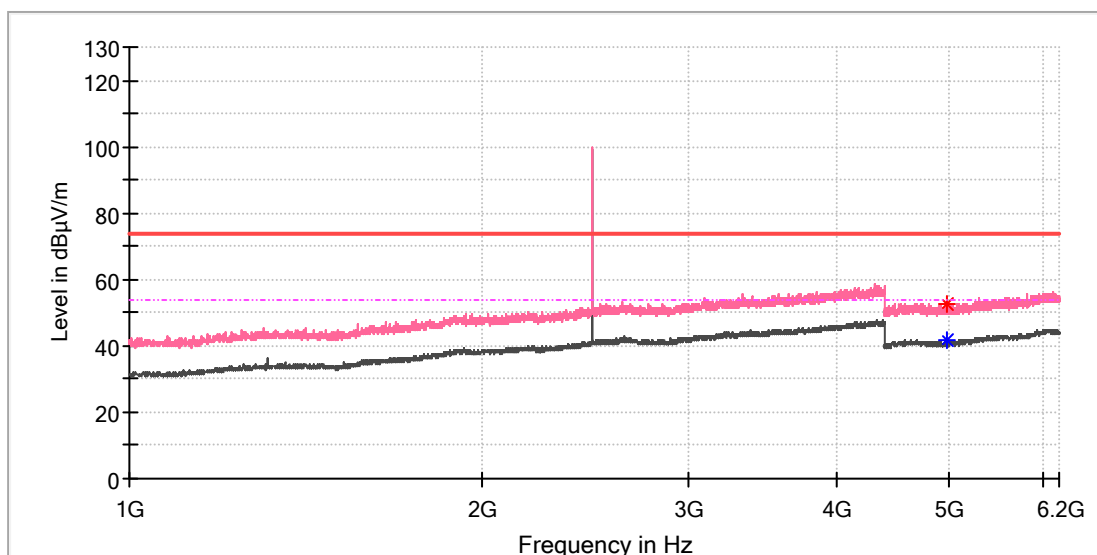


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4969.500000	---	41.62	54.00	12.38	150.0	V	45.0	13.3
4970.500000	52.65	---	74.00	21.35	150.0	V	332.0	13.3

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Low channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

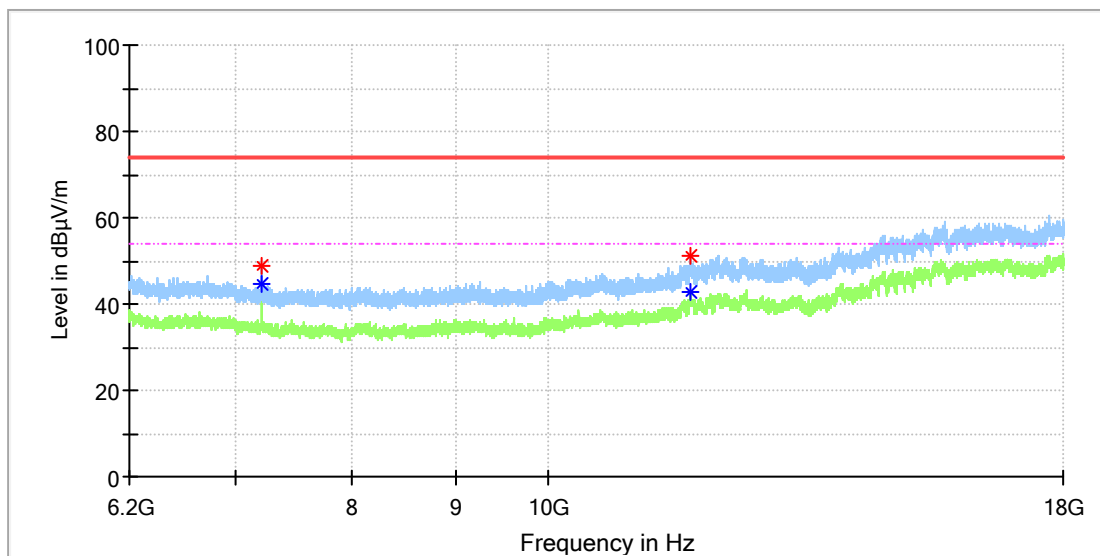


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	48.70	---	74.00	25.30	150.0	H	355.0	8.8
7205.950000	---	44.66	54.00	9.34	150.0	H	102.0	8.8
11755.341667	51.13	---	74.00	22.87	150.0	H	265.0	15.5
11755.833333	---	42.66	54.00	11.34	150.0	H	0.0	15.4

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Low channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

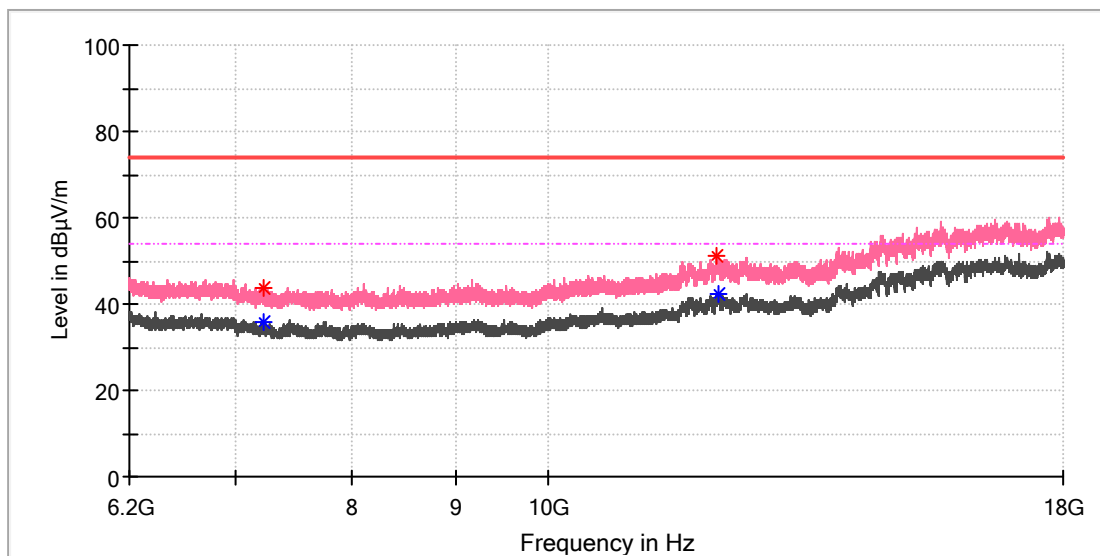


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7223.650000	---	36.03	54.00	17.97	150.0	V	330.0	8.7
7227.583333	43.74	---	74.00	30.26	150.0	V	77.0	8.7
12129.008333	50.93	---	74.00	23.07	150.0	V	297.0	16.2
12141.300000	---	42.55	54.00	11.45	150.0	V	177.0	16.5

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Mid channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

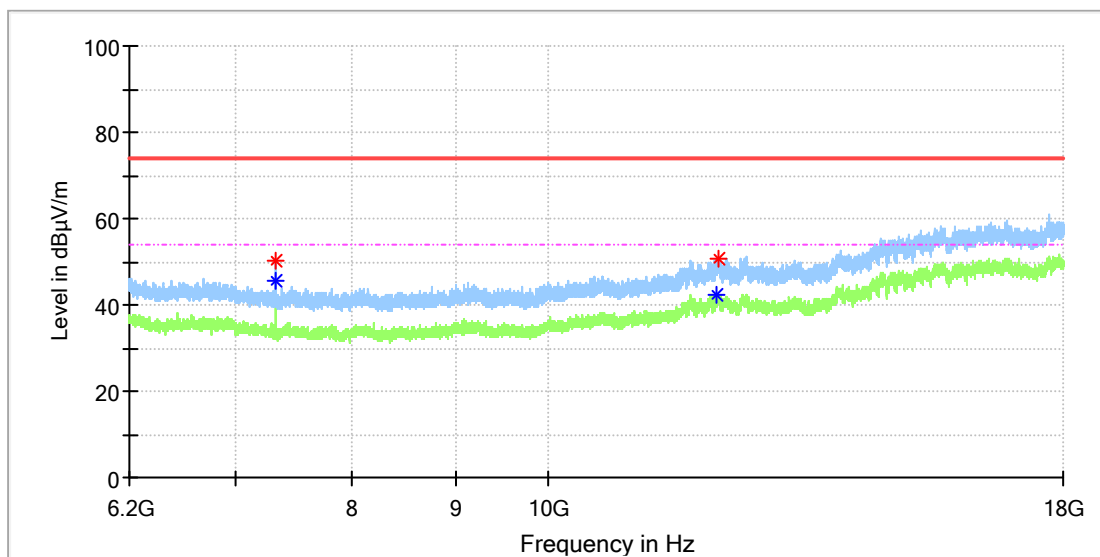


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7322.475000	50.41	---	74.00	23.59	150.0	H	93.0	8.2
7322.966667	---	45.56	54.00	8.44	150.0	H	124.0	8.2
12128.025000	---	42.44	54.00	11.56	150.0	H	330.0	16.2
12144.250000	50.79	---	74.00	23.21	150.0	H	359.0	16.6

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Mid channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

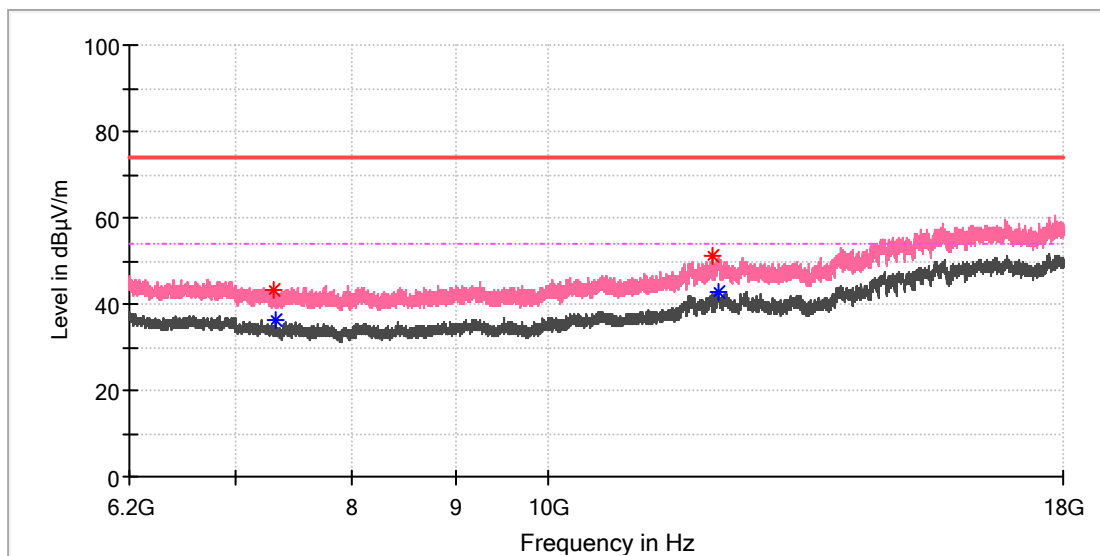


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7311.166667	43.41	---	74.00	30.59	150.0	V	164.0	8.2
7322.966667	---	36.18	54.00	17.82	150.0	V	312.0	8.2
12050.341667	51.39	---	74.00	22.61	150.0	V	288.0	16.4
12148.183333	---	42.93	54.00	11.07	150.0	V	12.0	16.7

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_High channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

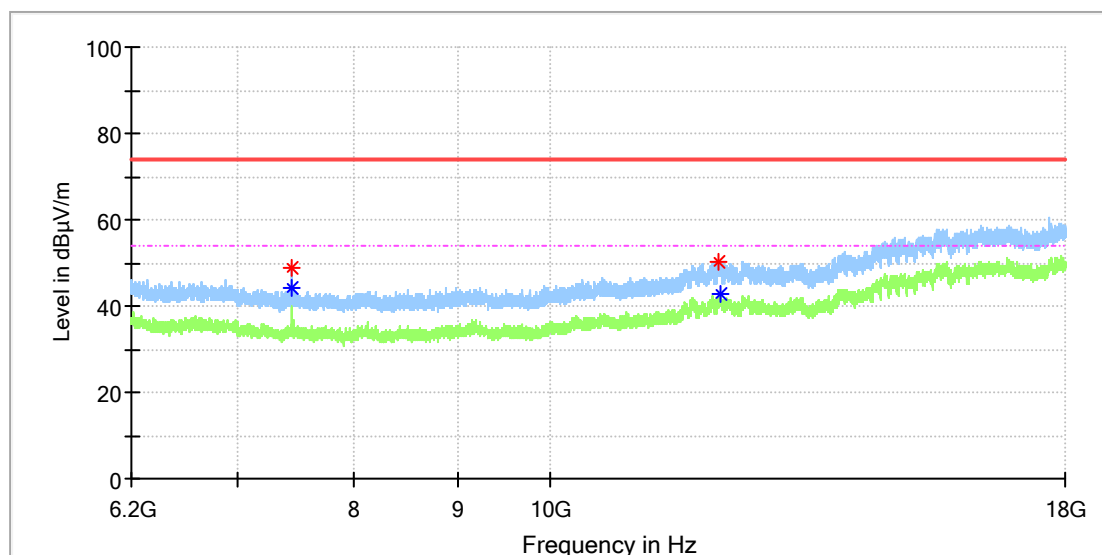


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	49.05	---	74.00	24.95	150.0	H	114.0	8.4
7439.983333	---	44.24	54.00	9.76	150.0	H	114.0	8.4
12105.900000	50.45	---	74.00	23.55	150.0	H	114.0	15.6
12150.641667	---	42.70	54.00	11.30	150.0	H	54.0	16.7

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_High channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

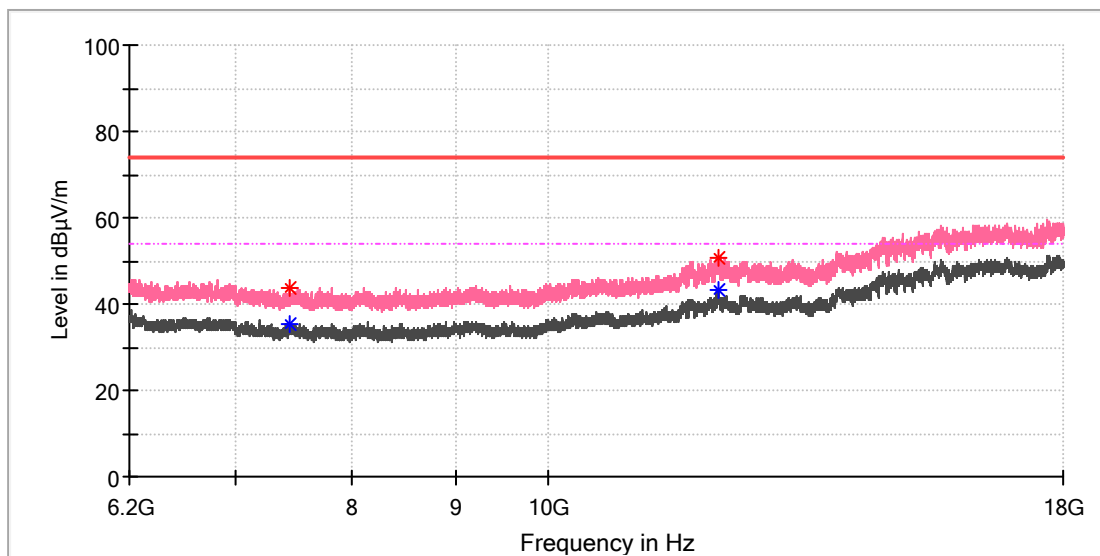


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	---	35.36	54.00	18.64	150.0	V	150.0	8.4
7447.358333	43.71	---	74.00	30.29	150.0	V	215.0	8.5
12132.450000	---	43.23	54.00	10.77	150.0	V	182.0	16.3
12144.250000	50.84	---	74.00	23.16	150.0	V	325.0	16.6

Appendix C.9: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	BLUETOOTH HEADSET
Model:	VIBE BUDS 3
Test Mode:	BR DH5_Low channel
Order No/Sample No:	27235507/A004281368-011
Test Voltage:	Battery
Remark:	Temp 23.5°C Humi:54%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

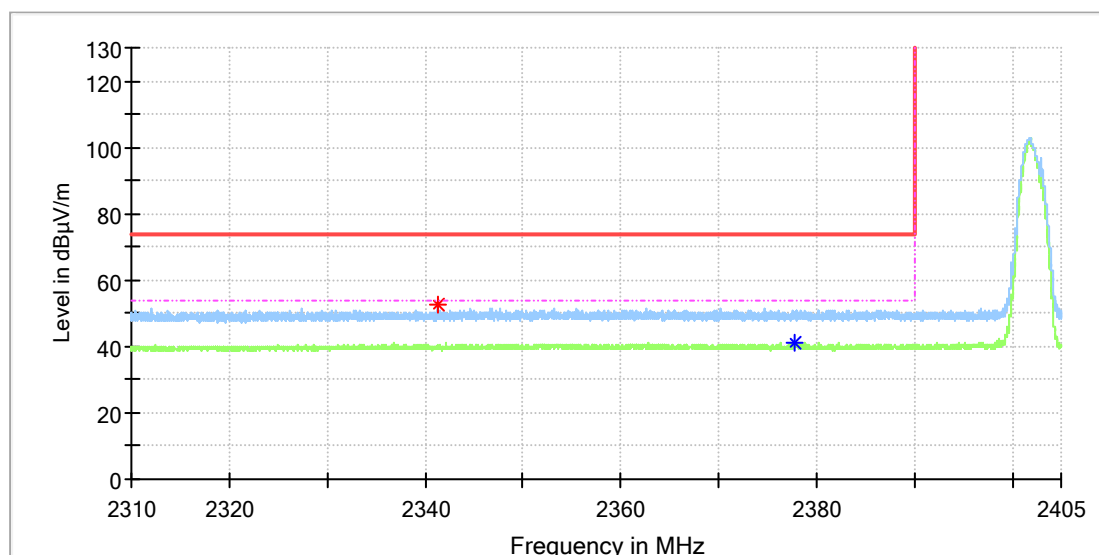


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2341.230294	52.41	---	74.00	21.59	150.0	H	252.0	8.4
2377.865000	---	41.26	54.00	12.74	150.0	H	92.0	8.5

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_Low channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

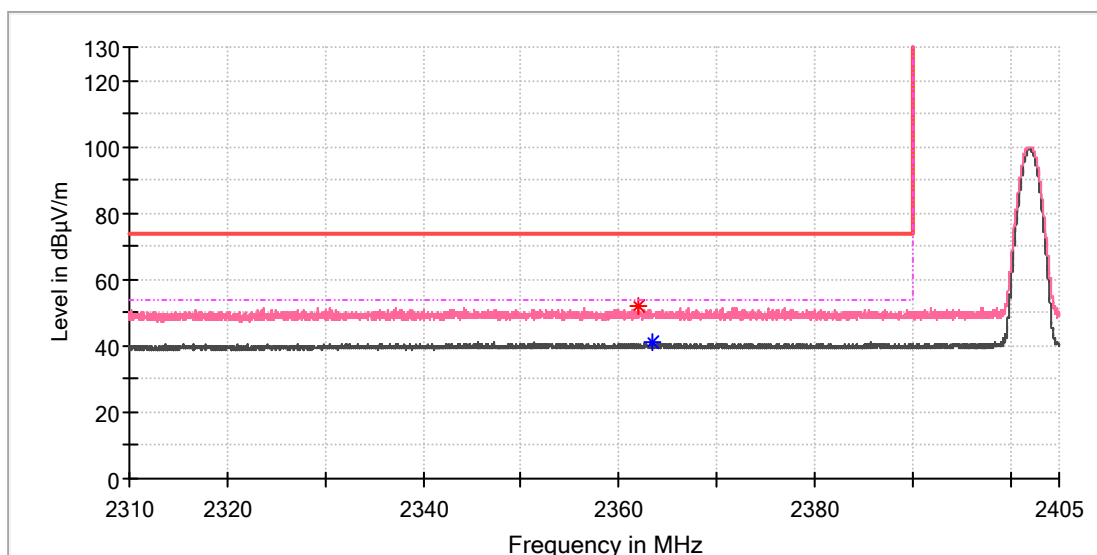


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2361.968824	52.18	---	74.00	21.82	150.0	V	226.0	8.5
2363.395588	---	41.08	54.00	12.92	150.0	V	142.0	8.5

EUT Information

EUT Name: BLUETOOTH HEADSET
Model: VIBE BUDS 3
Test Mode: BR DH5_High channel
Order No/Sample No: 27235507/A004281368-011
Test Voltage: Battery
Remark: Temp 23.5°C Humi:54%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

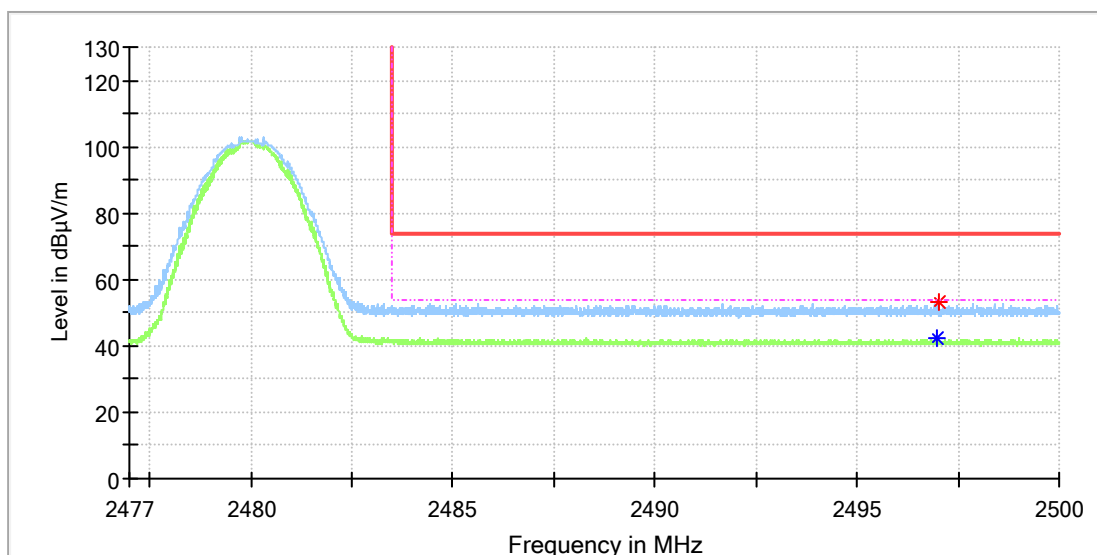


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2496.988971	---	42.10	54.00	11.90	150.0	H	282.0	9.0
2497.022059	53.15	---	74.00	20.85	150.0	H	248.0	9.0

EUT Information

EUT Name:	BLUETOOTH HEADSET
Model:	VIBE BUDS 3
Test Mode:	BR DH5_High channel
Order No/Sample No:	27235507/A004281368-011
Test Voltage:	Battery
Remark:	Temp 23.5°C Humi:54%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

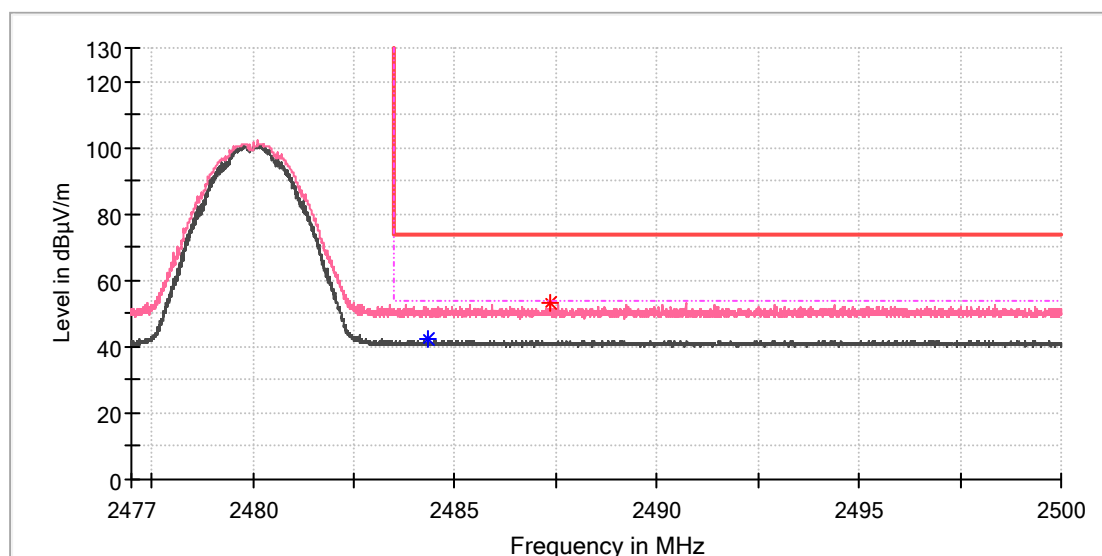

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.341912	---	42.17	54.00	11.83	150.0	V	86.0	9.0
2487.363971	53.06	---	74.00	20.94	150.0	V	46.0	9.0