

Appendix B

Highest Test Plots

Table of Contents

1. 2.4G Head-worn 0mm SAR 3

1. 2.4G Head-worn 0mm SAR

Date: 31.08.2026

Test Laboratory: Guangdong Dongdian Testing Service Co., Ltd.

Q26081111-1E

Serial: S26081111-003

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2402 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.113$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ComF(7.91, 7.91, 7.91) @ 2402 MHz; Calibrated: 22.06.2026
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 22.06.2026
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1197
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/L top side DH5 2402 MHz/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.183 W/kg

Configuration/L top side DH5 2402 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.218 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.565 W/kg


SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.351 W/kg

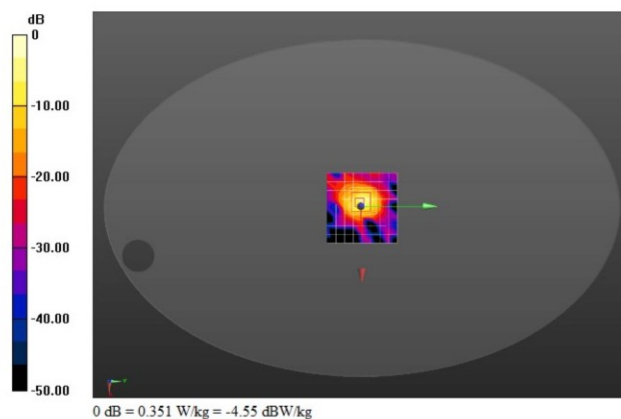

Date: 31.08.2026

Test Laboratory: Guangdong Dongdian Testing Service Co., Ltd.

Q26081111-1E

Serial: S26081111-003

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2441 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.806$ S/m; $\epsilon_r = 40.112$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3906; ComF(7.91, 7.91, 7.91) @ 2441 MHz; Calibrated: 22.06.2026
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1366; Calibrated: 22.06.2026
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1197
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/R right side DHS 2441 MHz/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.161 W/kg

Configuration/R right side DHS 2441 MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.789 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.033 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.253 W/kg

