




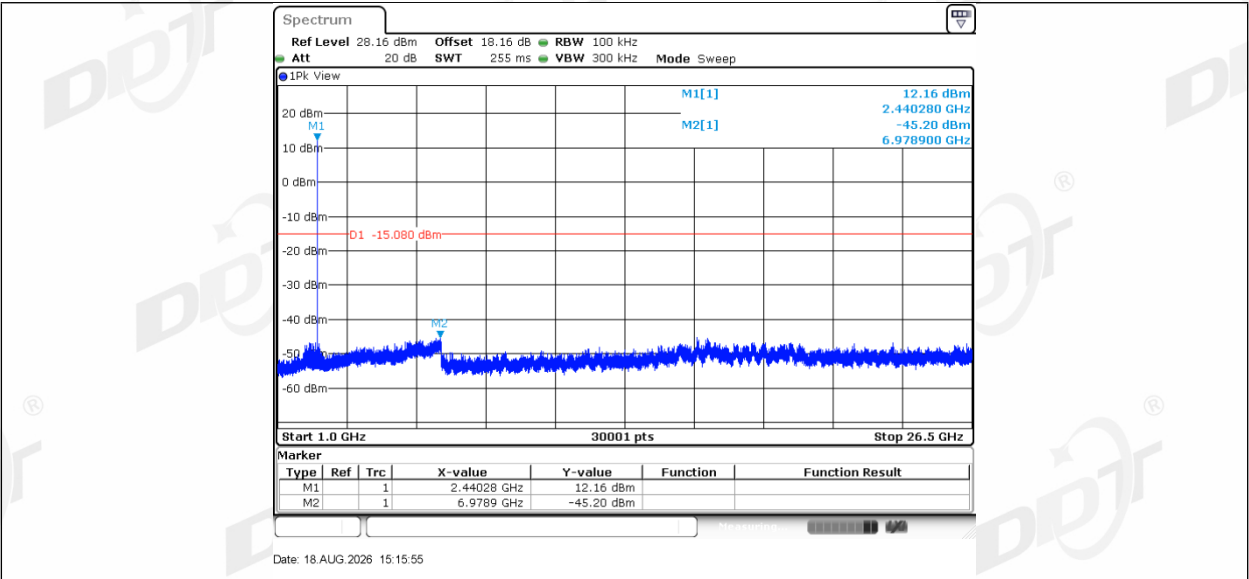


BLE 1M Right 2440 0~Reference

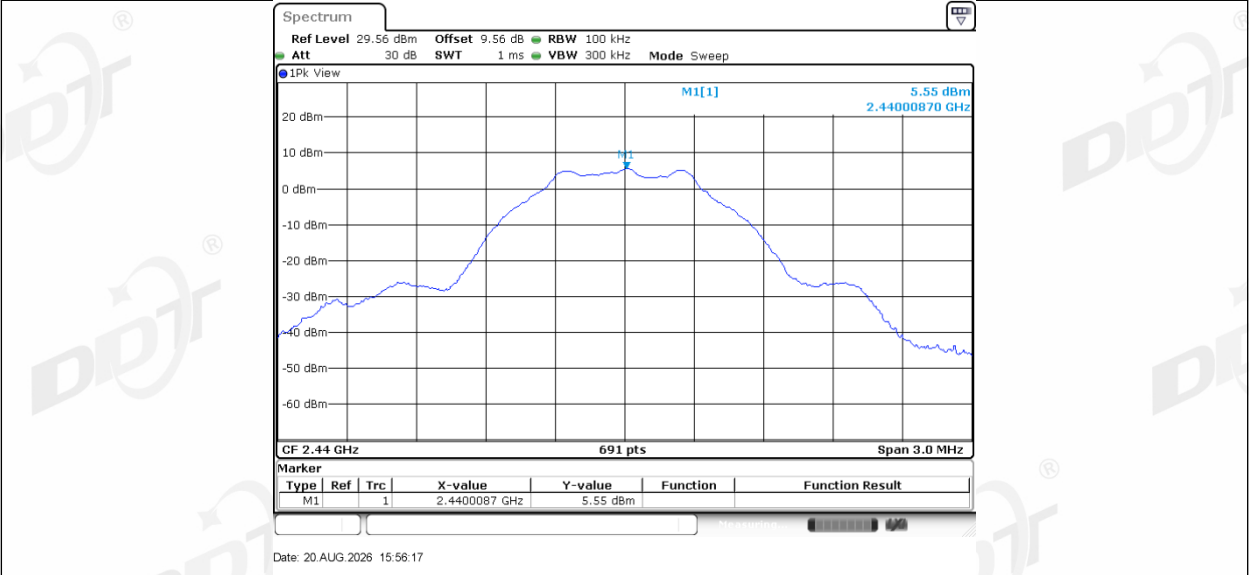


BLE 1M Right 2440 30~1000

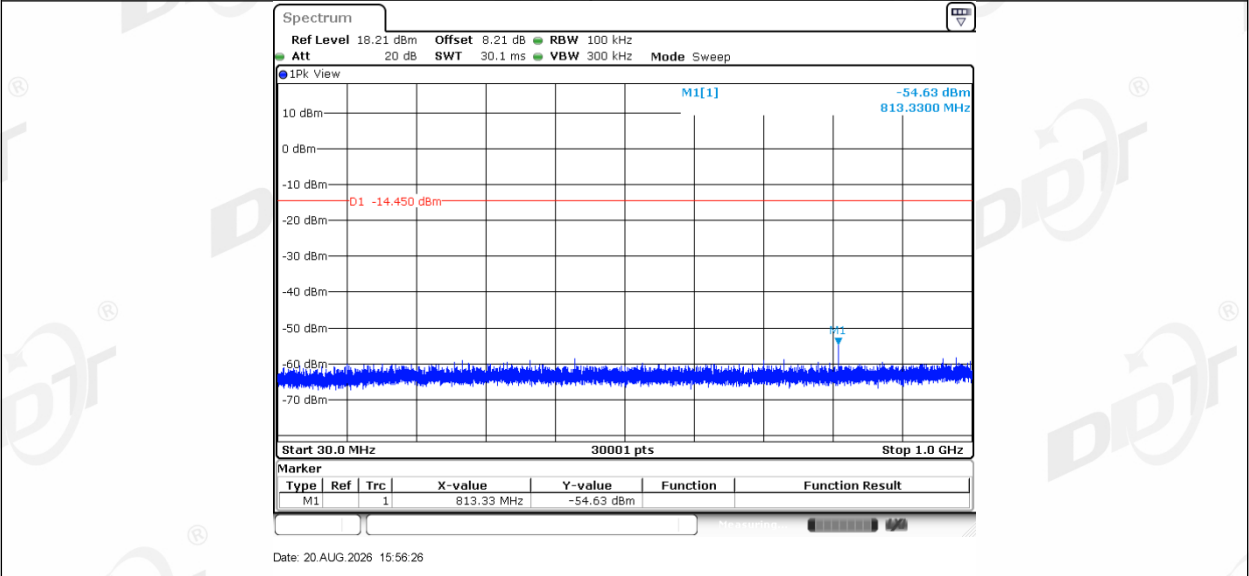


BLE 1M Right 2440 1000~26500

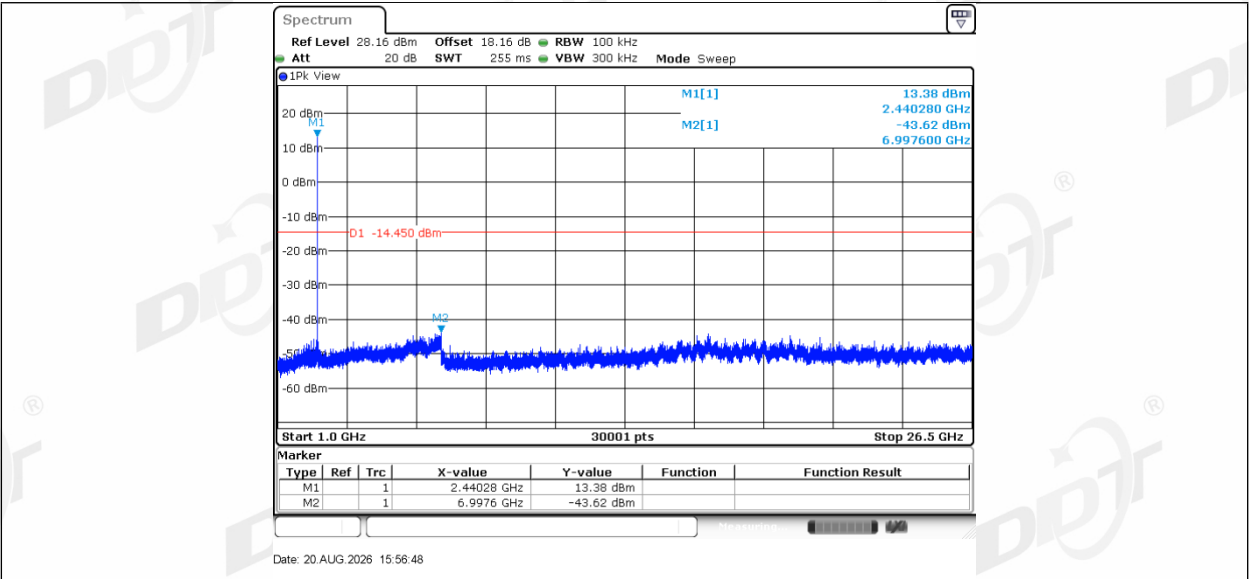


BLE_1M_Left_2480_0~Reference

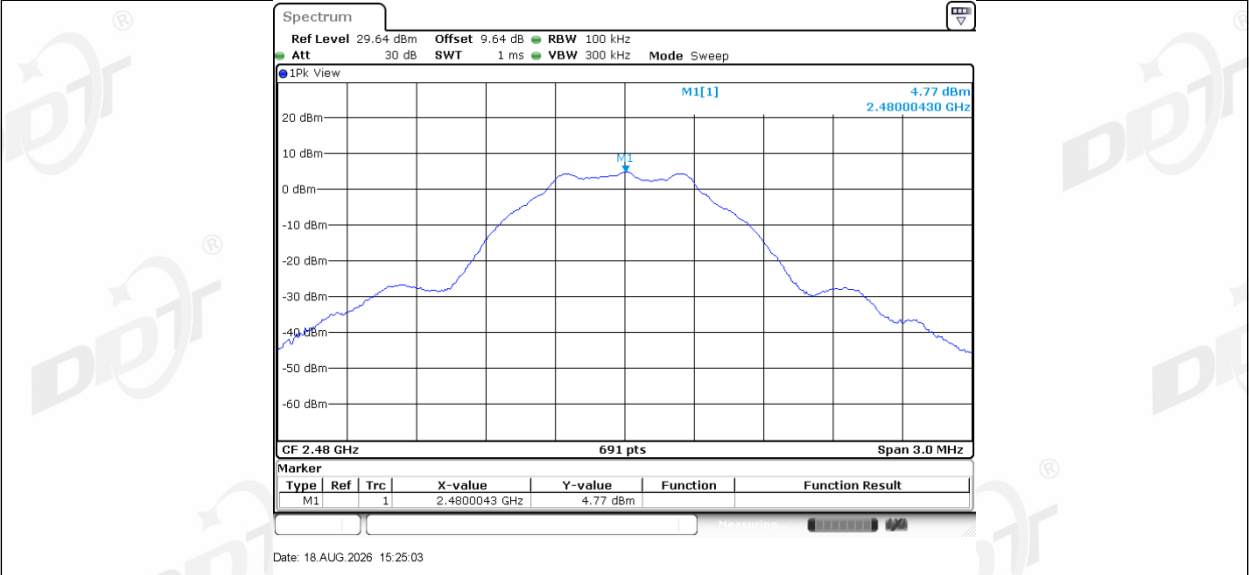


BLE_1M_Left_2480_30~1000

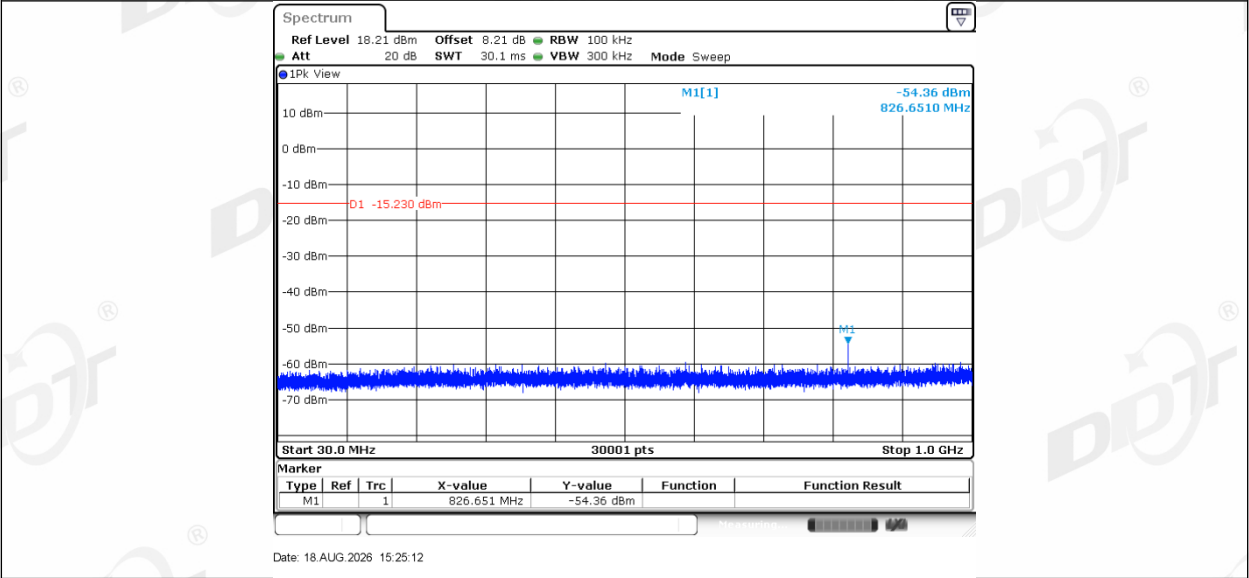


BLE_1M_Left_2480_1000~26500

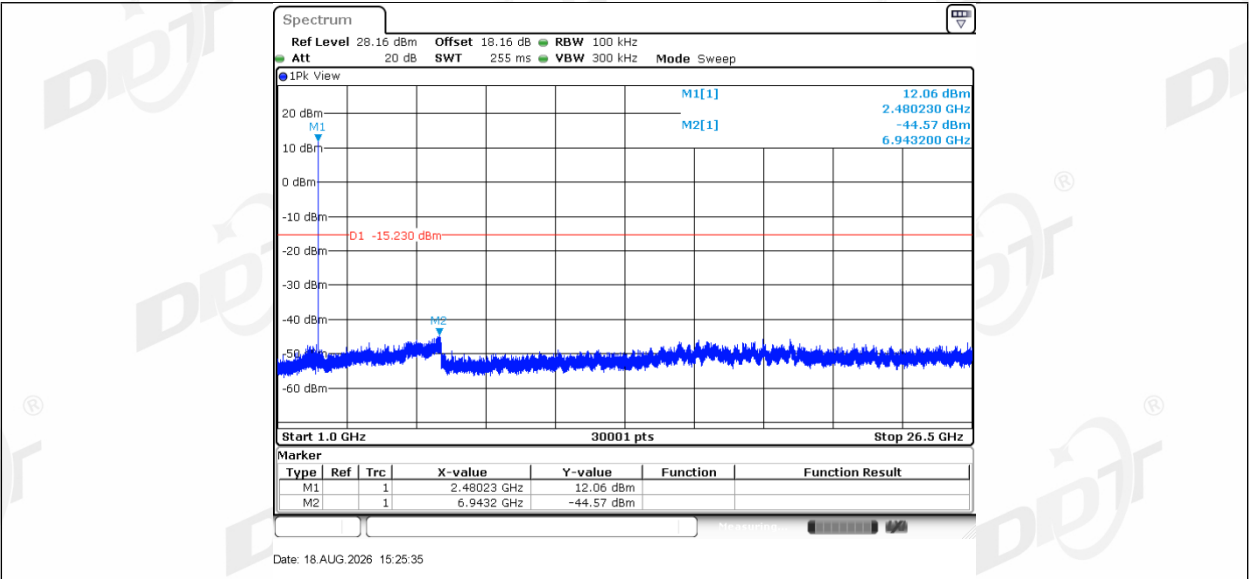


BLE 1M Right 2480 0~Reference

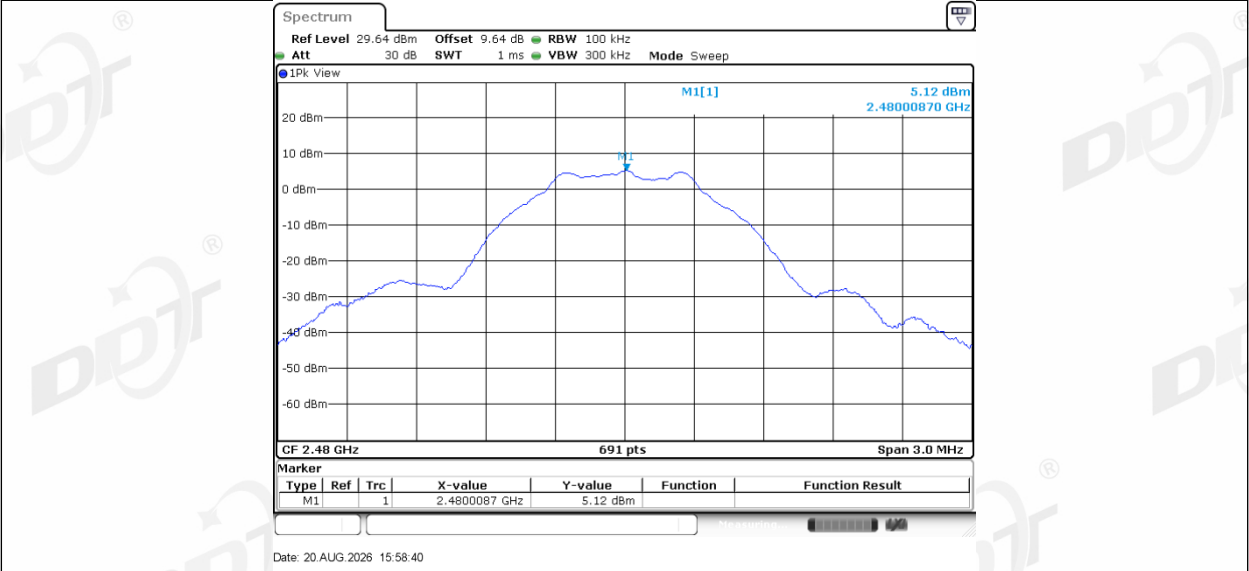


BLE 1M Right 2480 30~1000

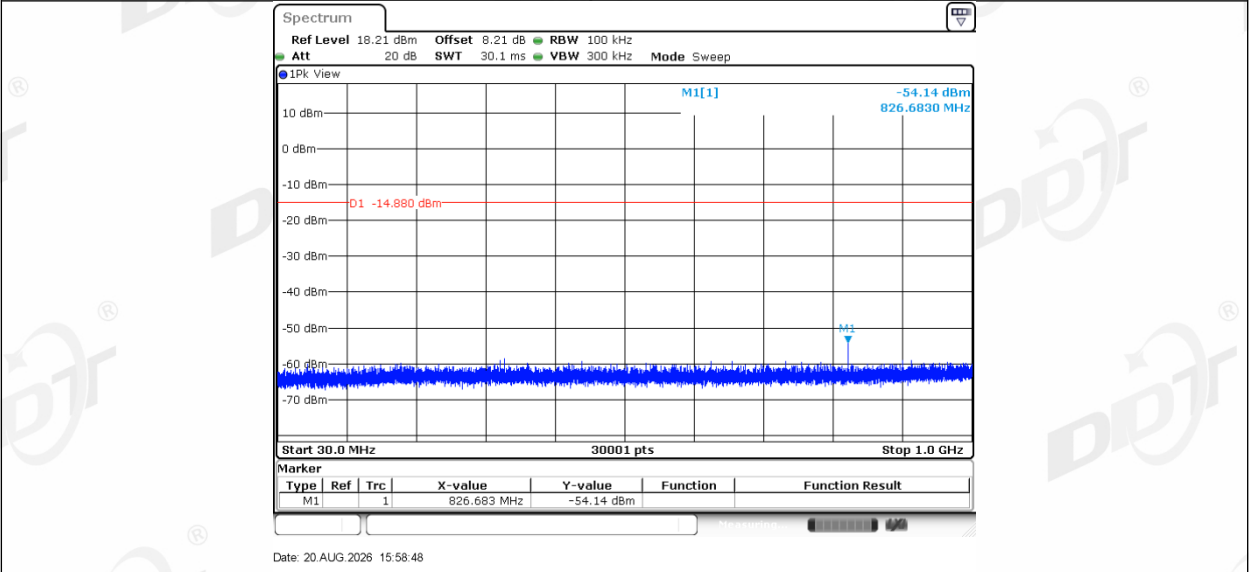


BLE 1M Right 2480 1000~26500

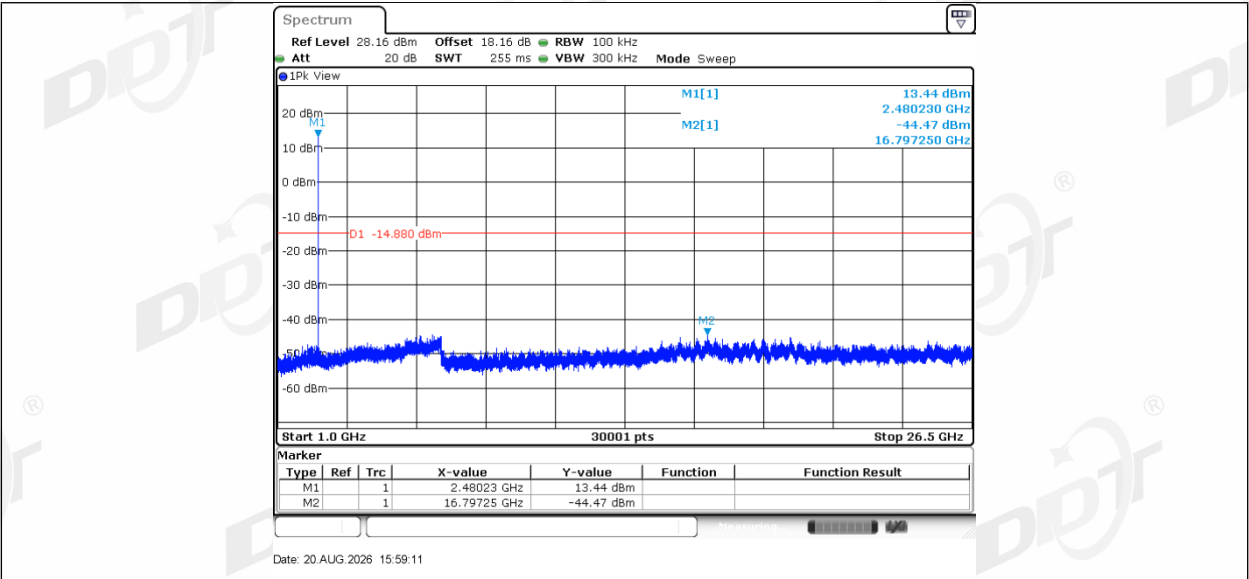


BLE 2M Left 2404_0~Reference

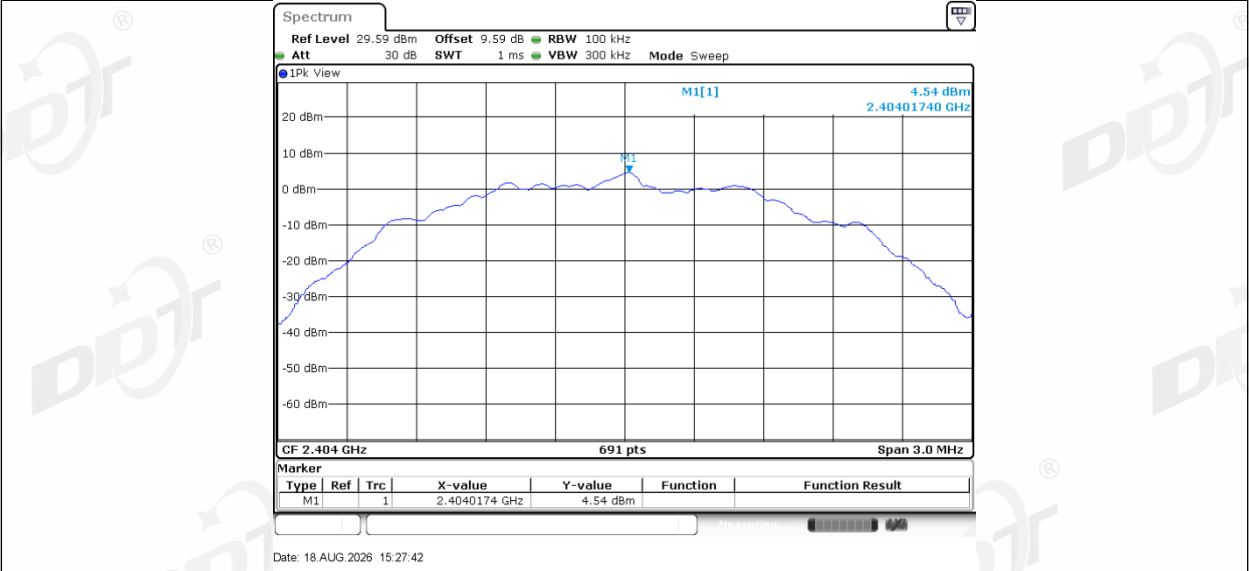


BLE 2M Left 2404_30~1000

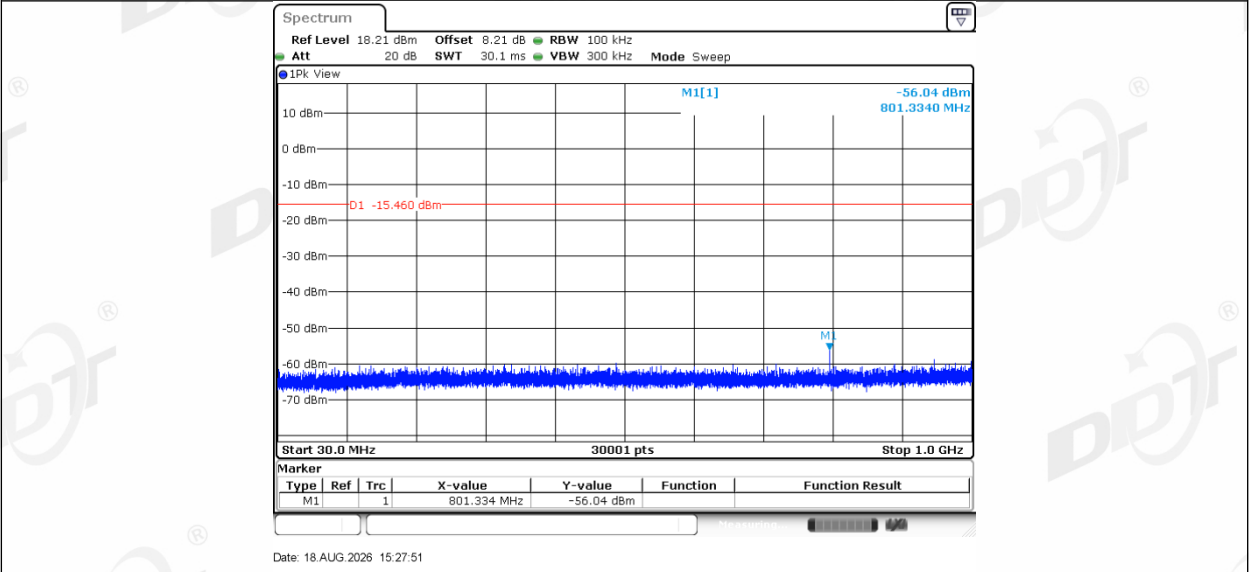


BLE 2M Left 2404_1000~26500

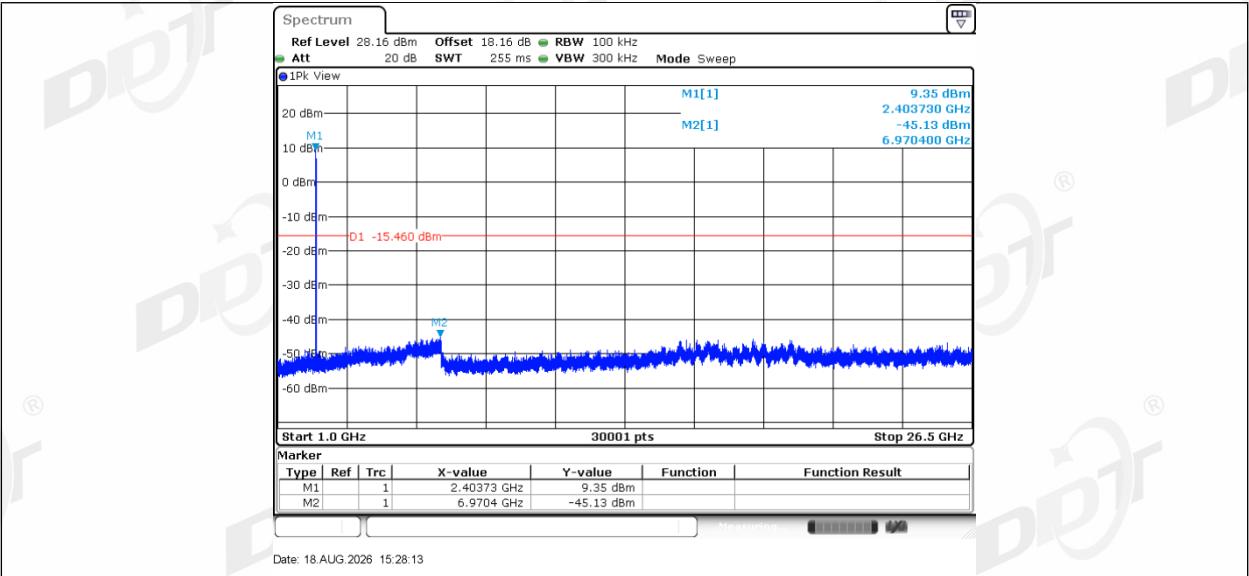


BLE 2M Right 2404 0~Reference

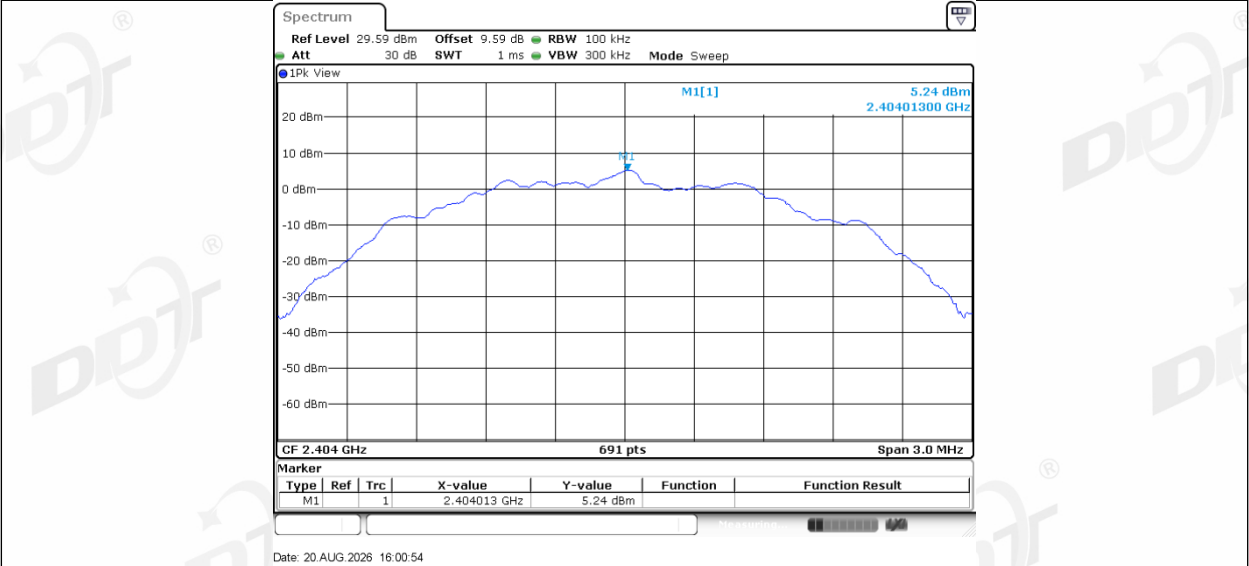


BLE 2M Right 2404 30~1000

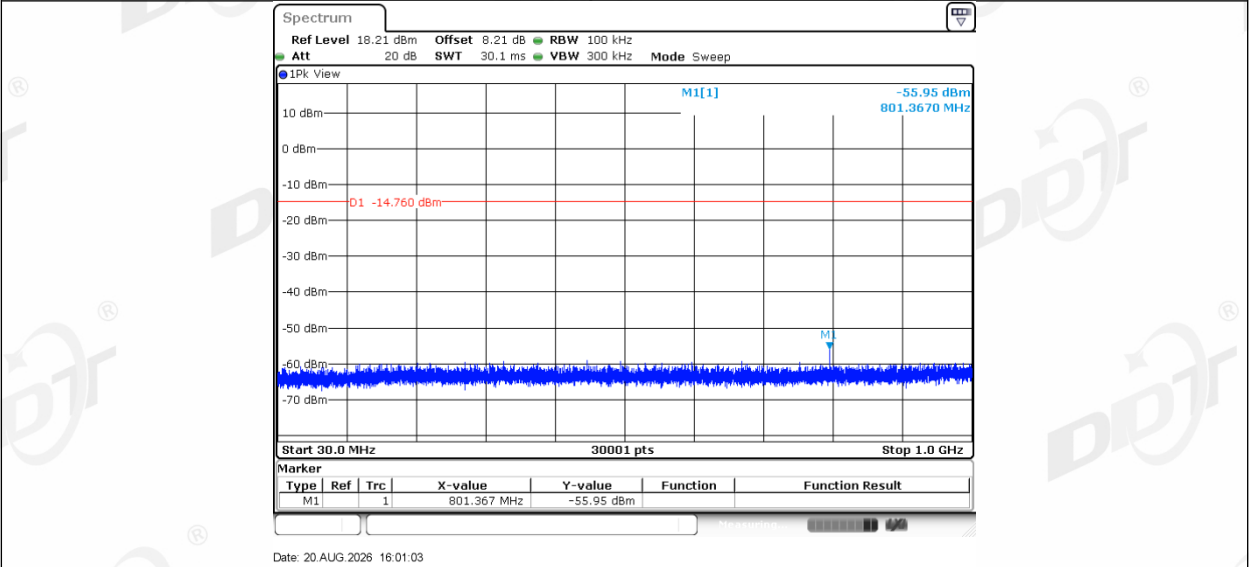


BLE 2M Right 2404 1000~26500

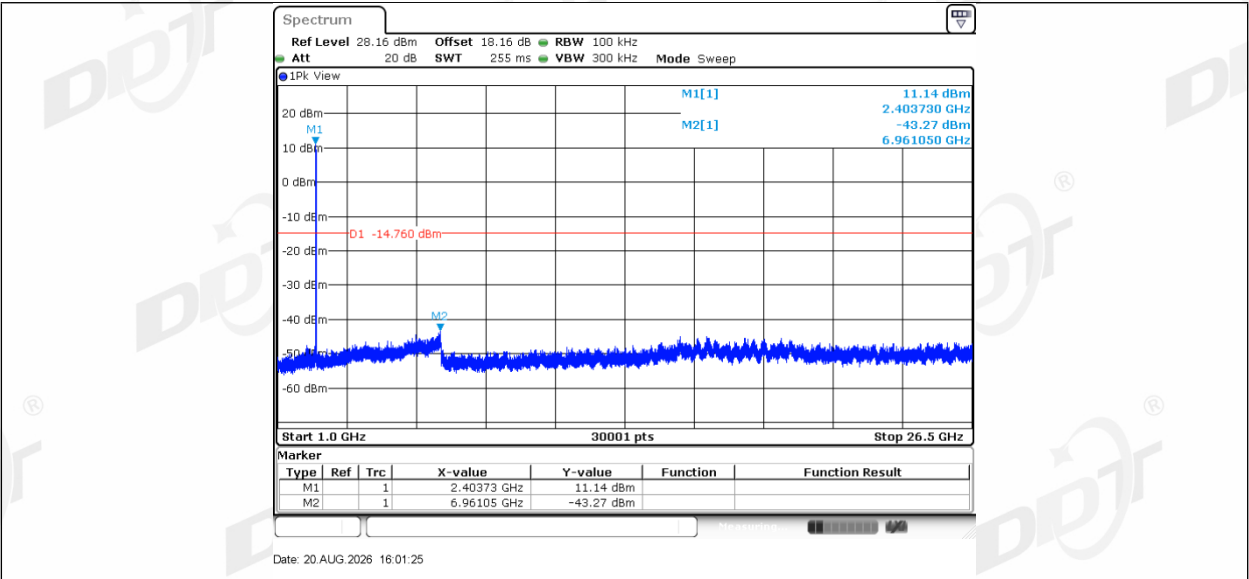


BLE 2M Left 2440_0~Reference

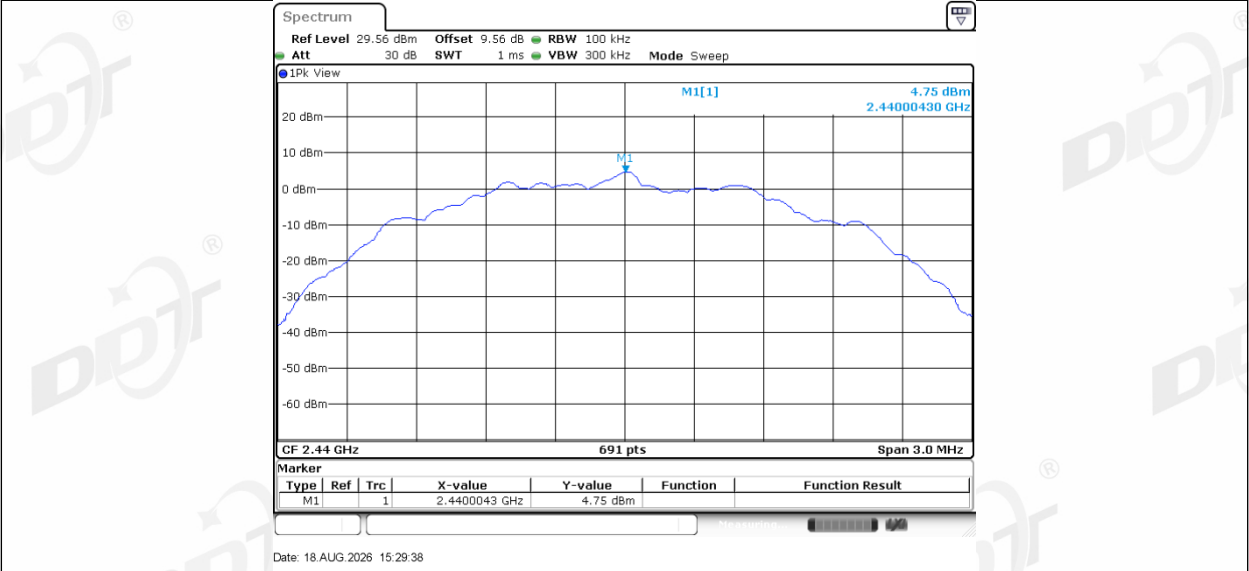


BLE 2M Left 2440_30~1000

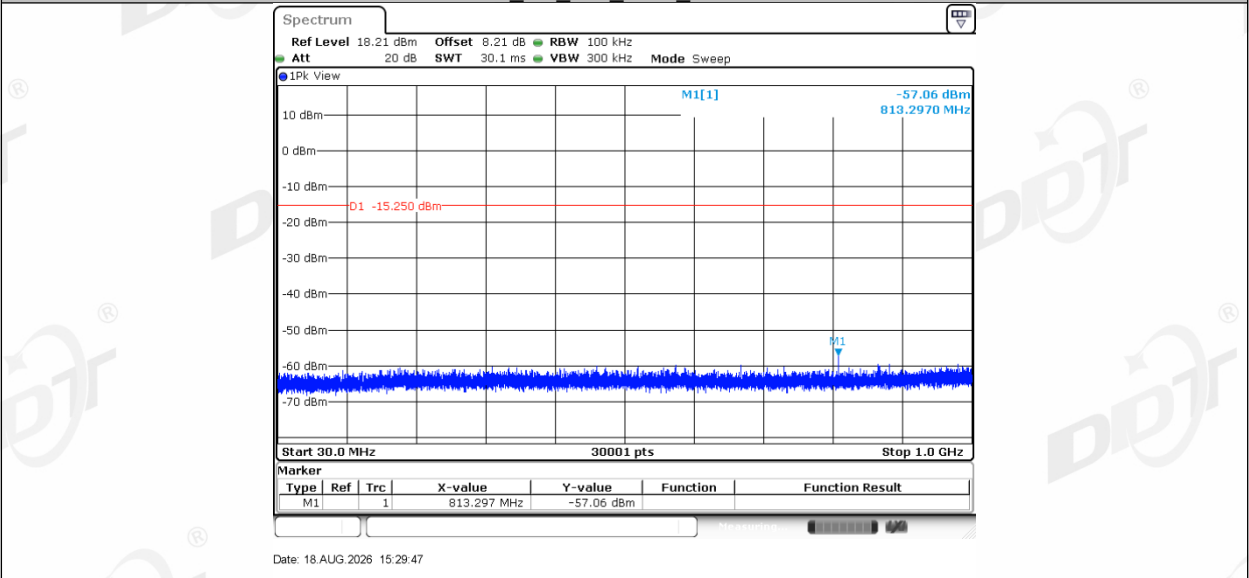


BLE 2M Left 2440_1000~26500

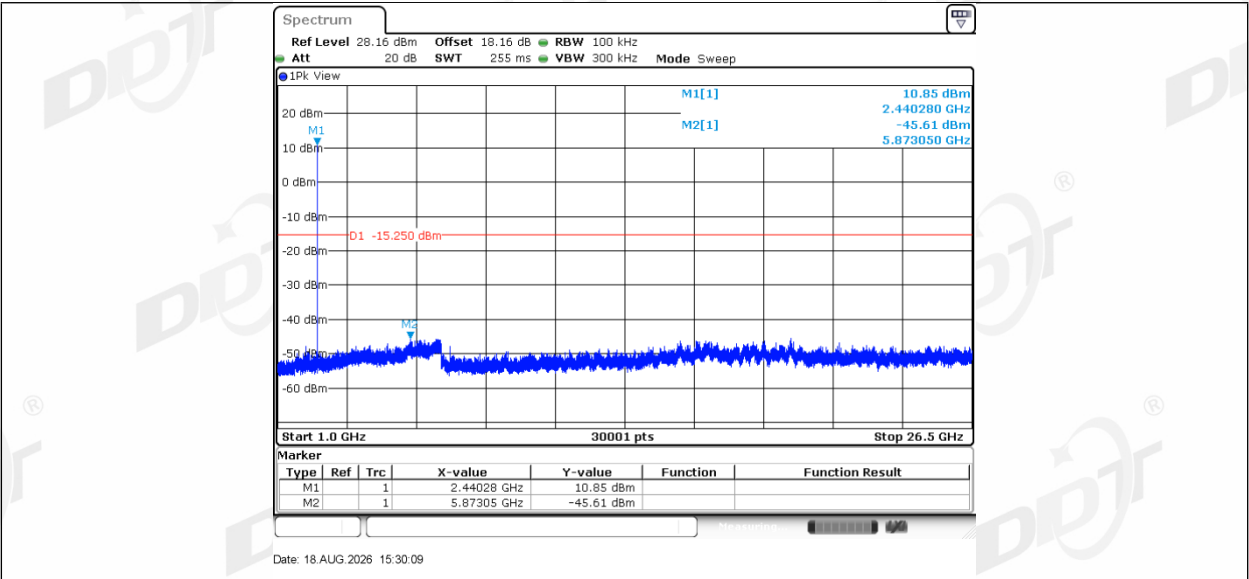


BLE 2M Right 2440 0~Reference

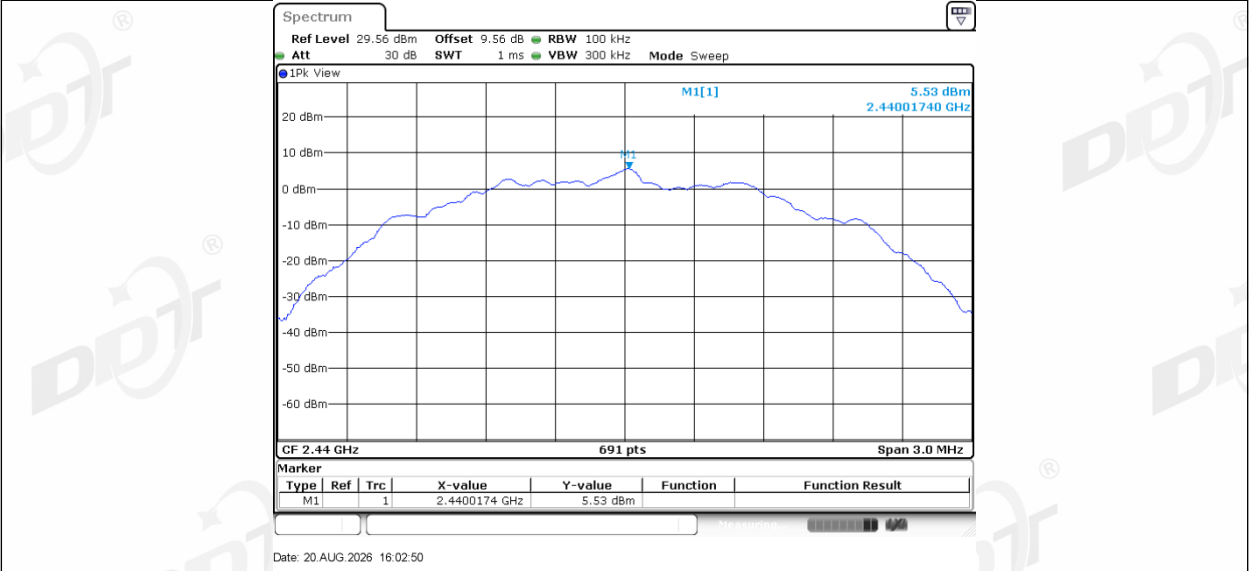


BLE 2M Right 2440 30~1000

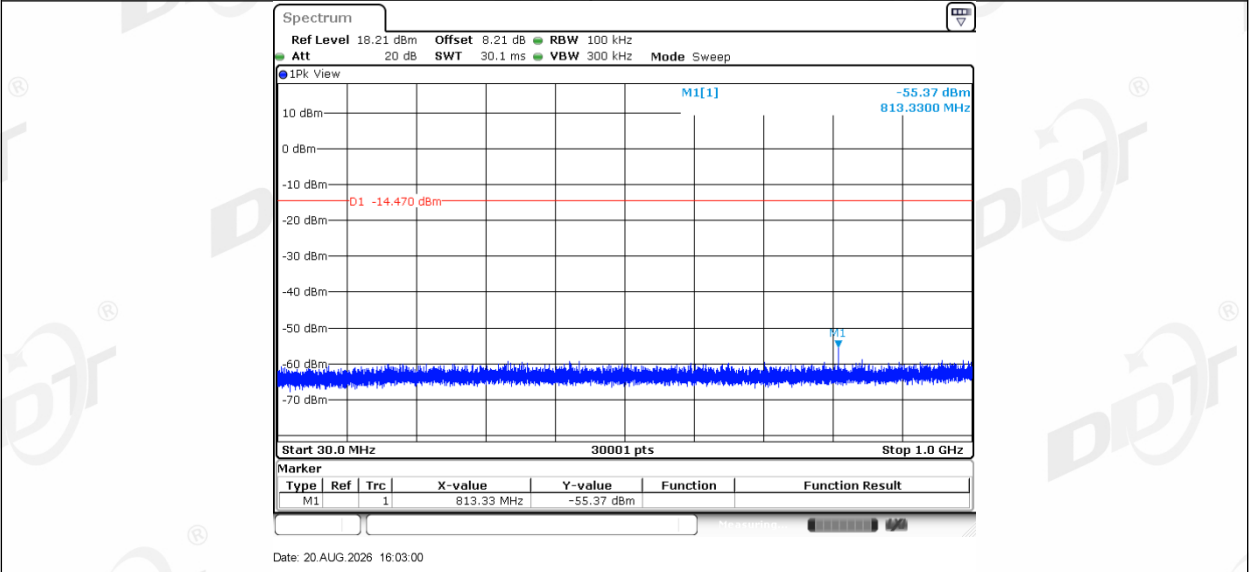


BLE 2M Right 2440 1000~26500

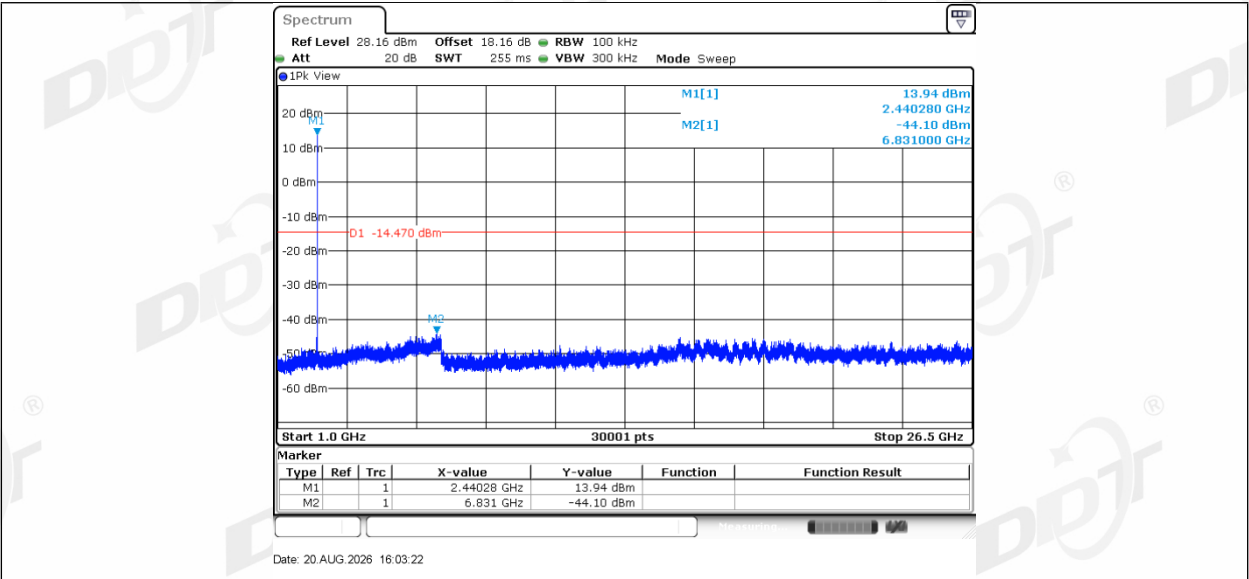


BLE 2M Left 2478_0~Reference

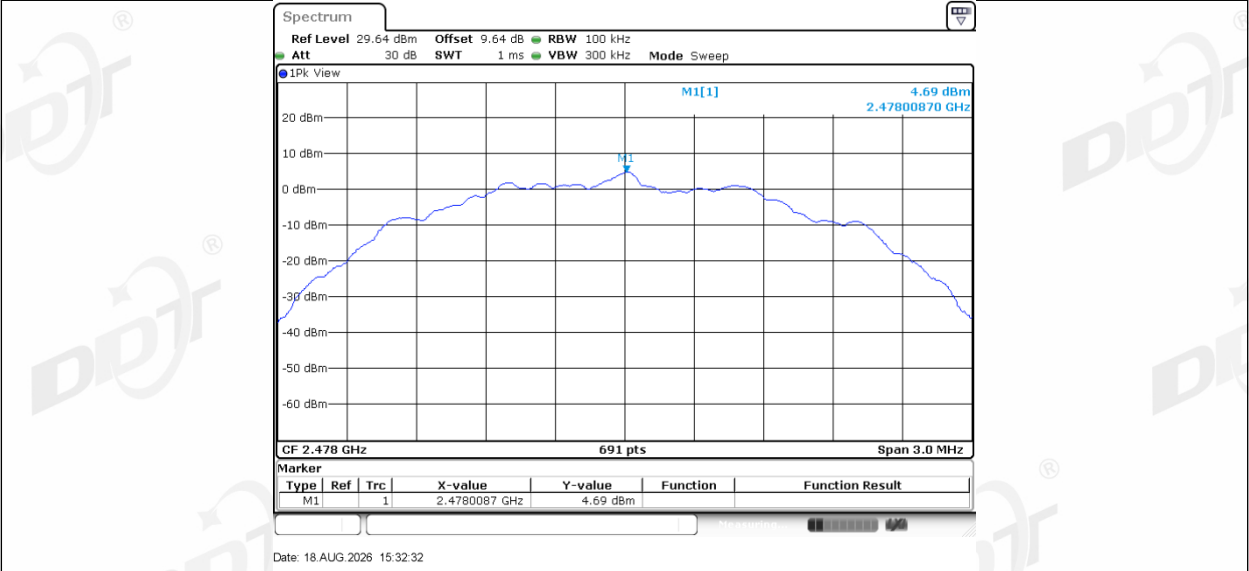


BLE 2M Left 2478_30~1000

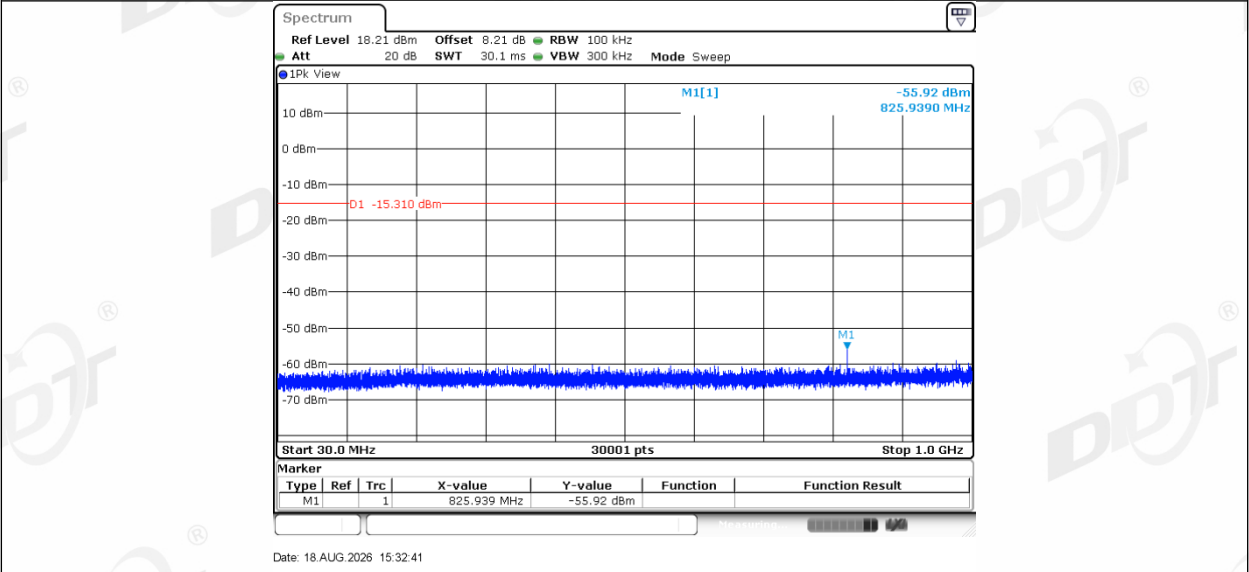


BLE 2M Left 2478_1000~26500

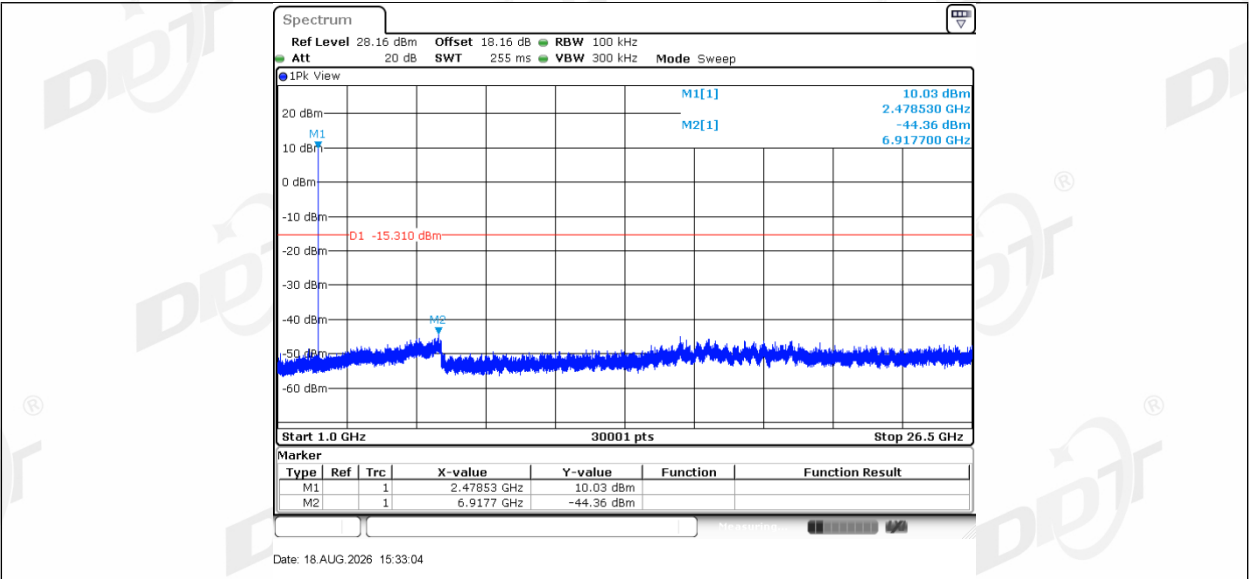


BLE 2M Right 2478 0~Reference

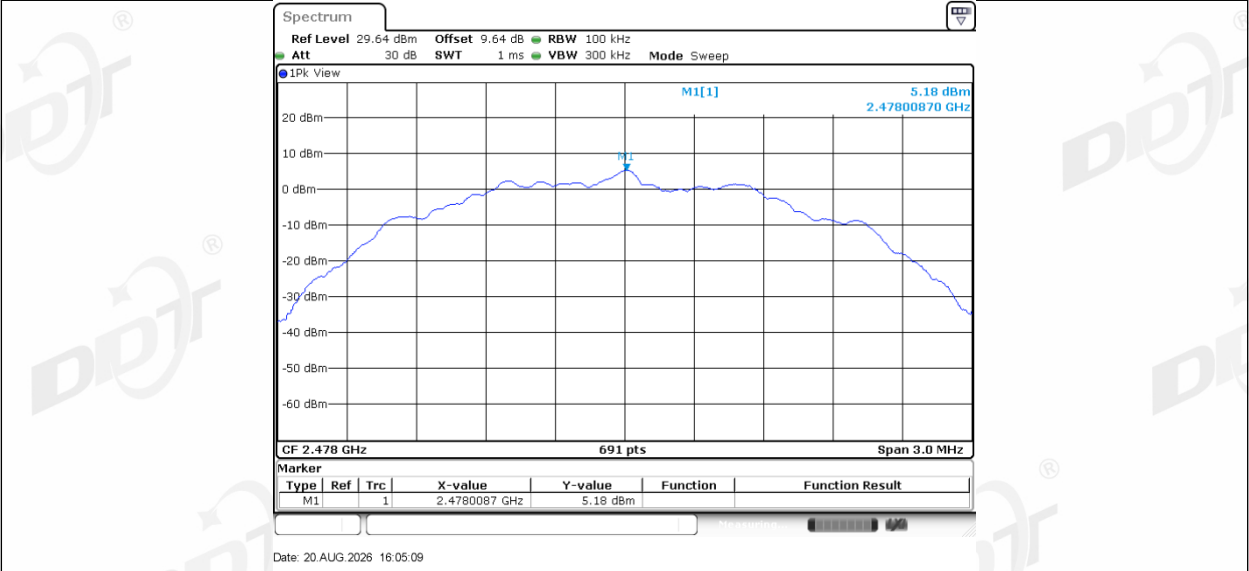

BLE 2M Right 2478 30~1000

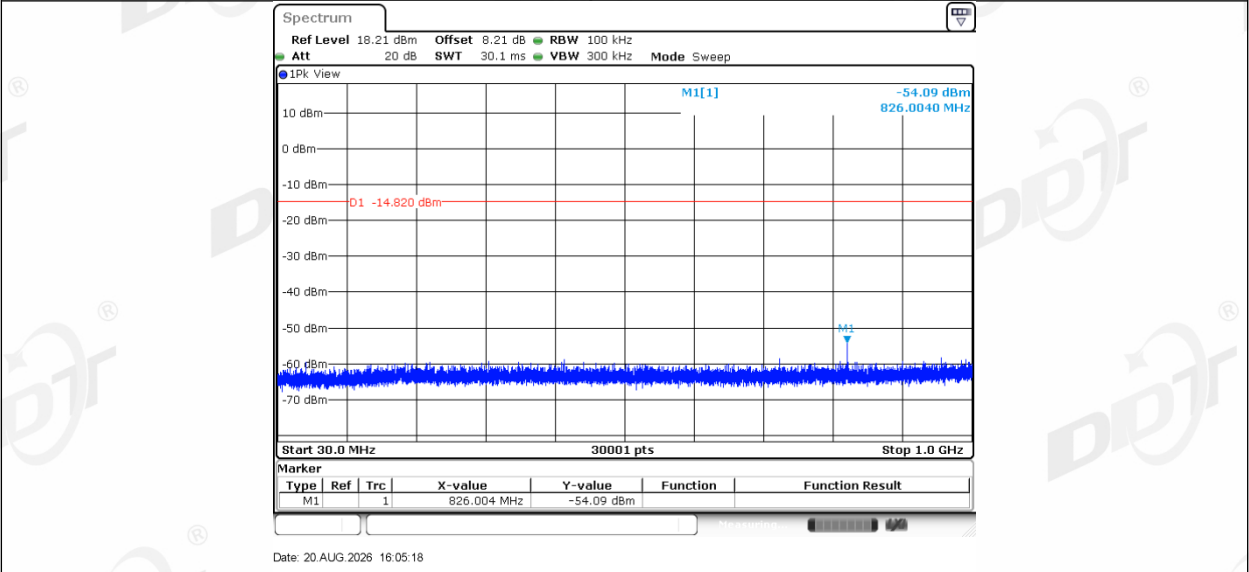


BLE 2M Right 2478 1000~26500

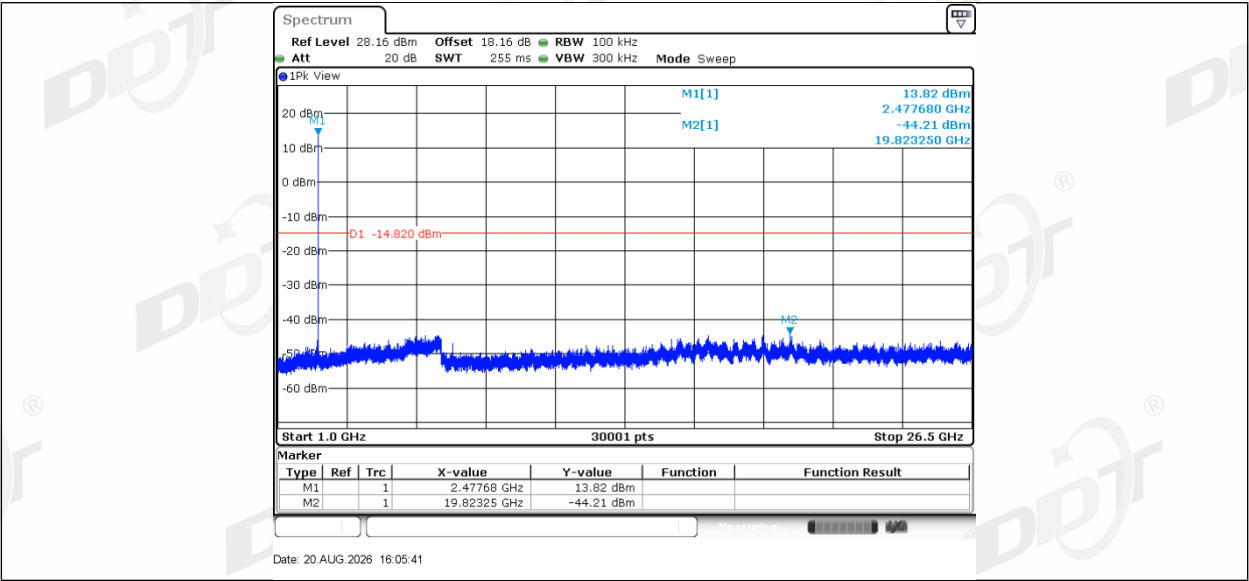

10. Duty Cycle

10.1. Block diagram of test setup

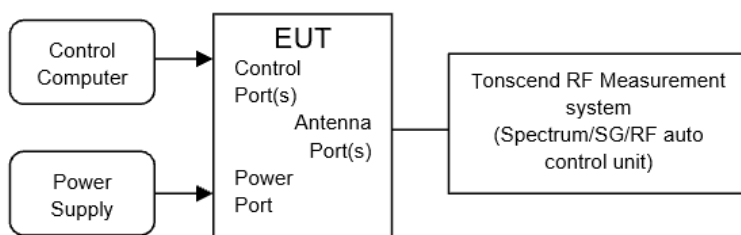

10.2. Limit

Just for Report.

10.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.
set the Spectrum Analyzer as below:
 - Centre Frequency: The centre frequency of the middle hopping channel.
 - Resolution BW: 10 MHz.
 - Video BW: 10 MHz.
 - Span: Zero span.
 - Detector: Peak.
 - Trace Mode: Clear Write.
 - Sweep: Video Trigger
- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
Duty cycle= Pulse's on time / Burst cycle


10.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 3#
Ambient Condition:	24℃,46%RH	Test Date:	2026.8.18-2026.8.20
Test Power Supply:	Battery	Sample Number:	S26081111-004/005


Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Left	2402	0.38	0.62	61.29	2.13
	Right	2402	0.39	0.63	61.90	2.08
	Left	2440	0.38	0.62	61.29	2.13
	Right	2440	0.39	0.63	61.90	2.08
	Left	2480	0.38	0.62	61.29	2.13
	Right	2480	0.38	0.62	61.29	2.13
BLE_2M	Left	2404	0.20	0.63	31.75	4.98
	Right	2404	0.20	0.63	31.75	4.98
	Left	2440	0.20	0.63	31.75	4.98
	Right	2440	0.20	0.63	31.75	4.98
	Left	2478	0.20	0.63	31.75	4.98
	Right	2478	0.20	0.63	31.75	4.98

10.5. Test graphs




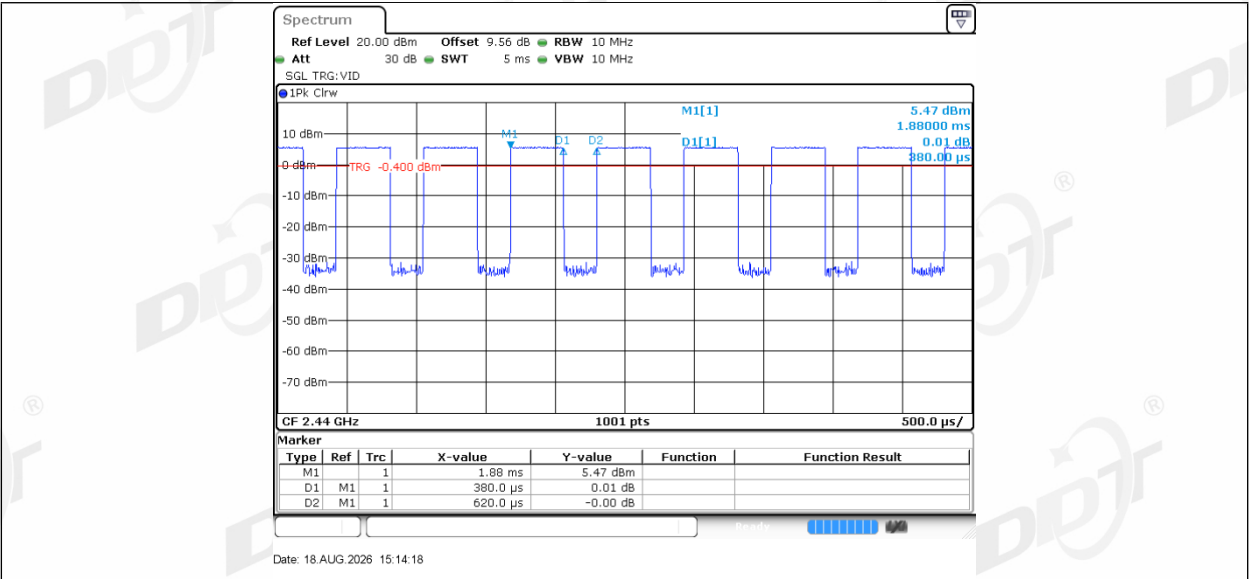


BLE_1M_Right_2440

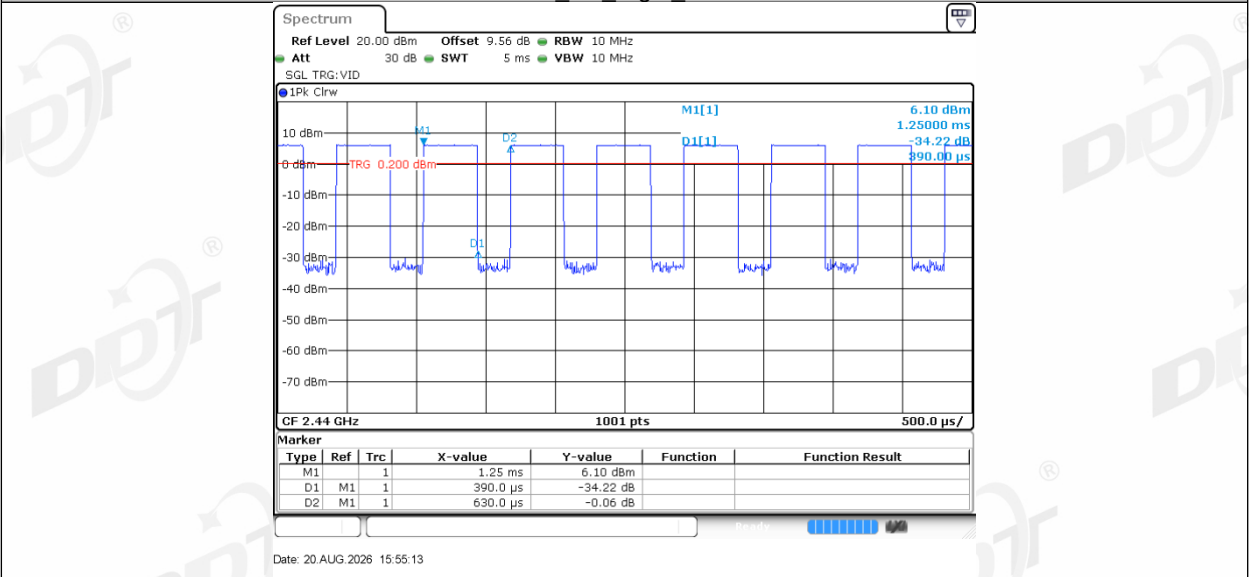


BLE_1M_Left_2480

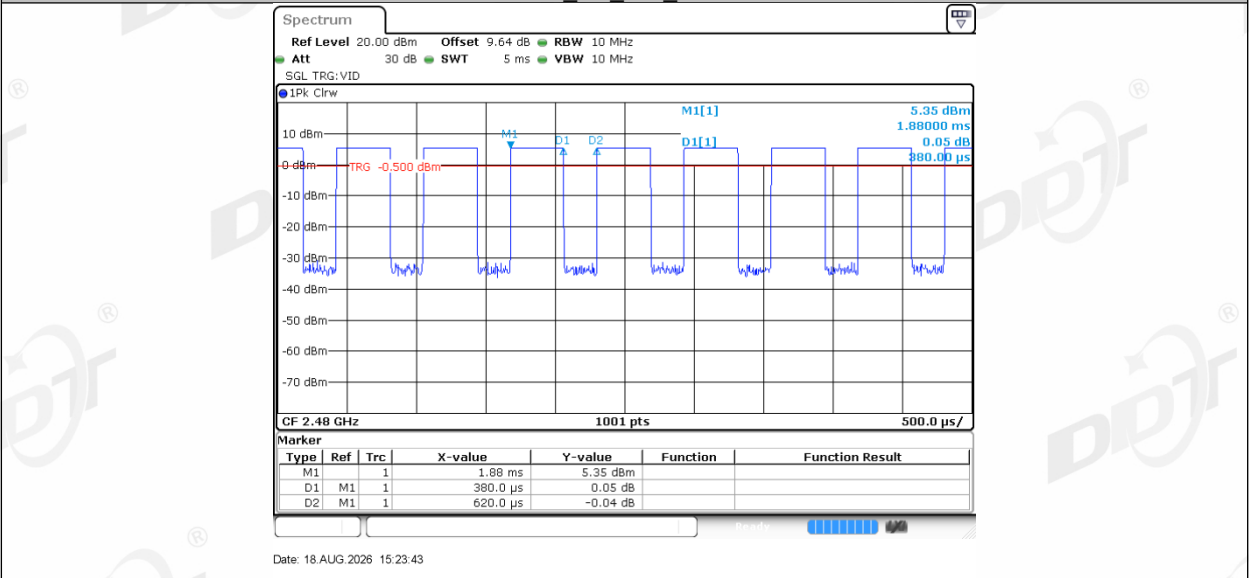


BLE_1M_Right_2480

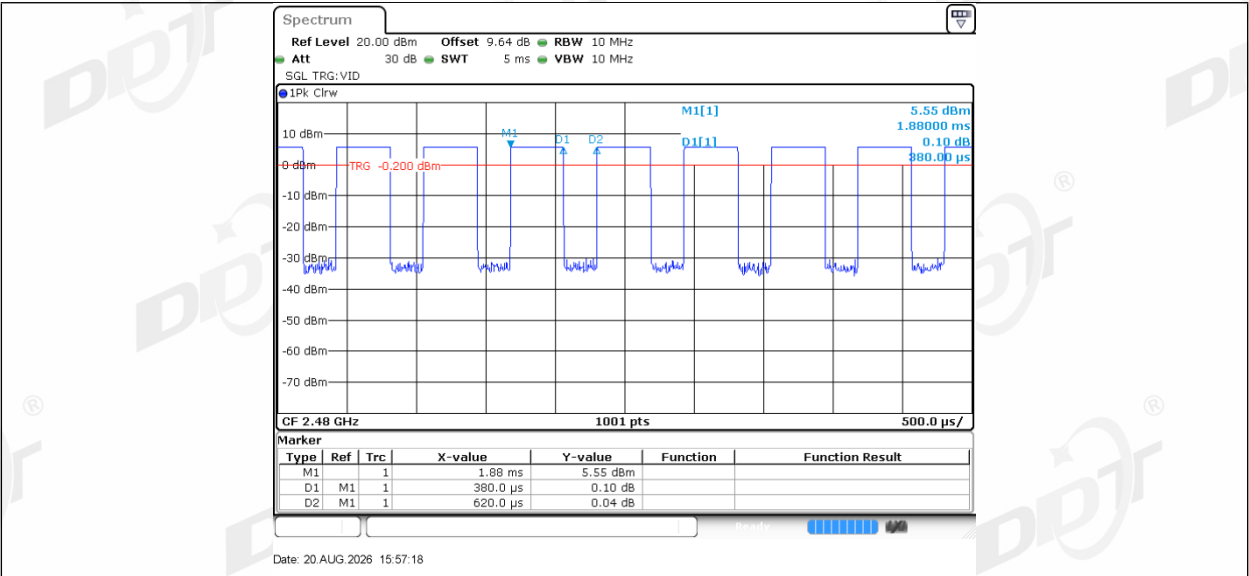


BLE 2M Left 2404

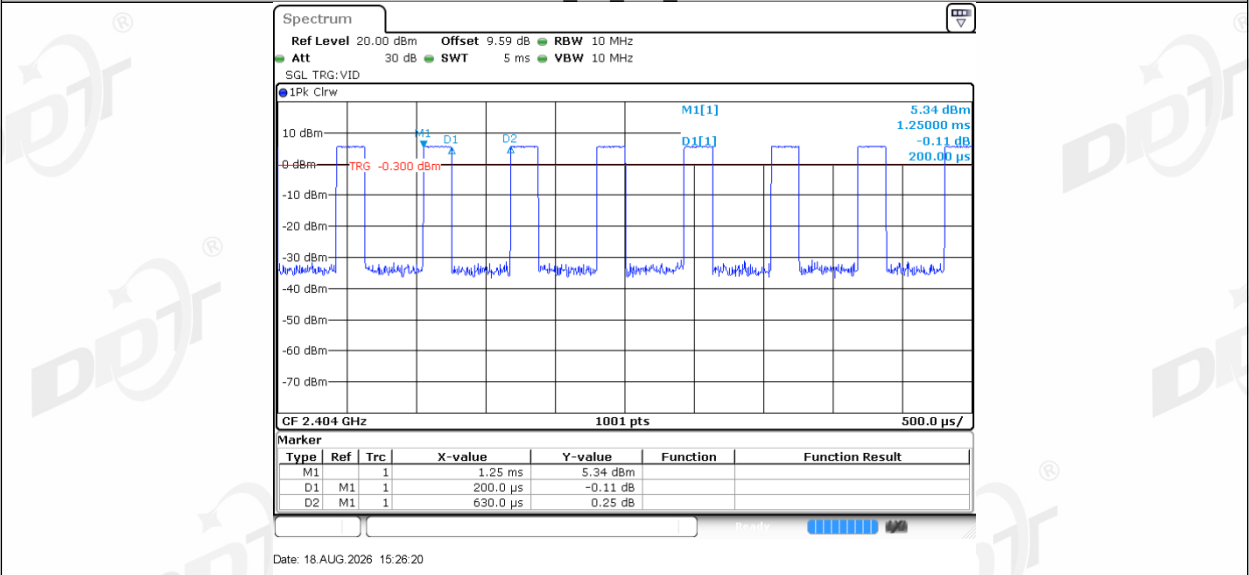


BLE 2M Right 2404

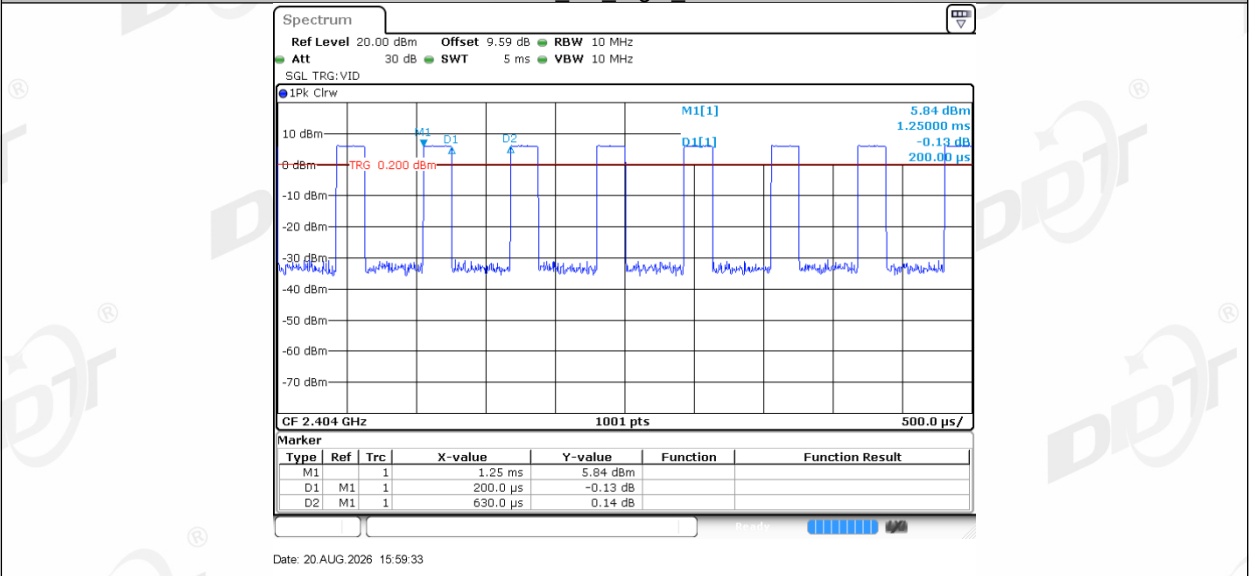


BLE 2M Left 2440

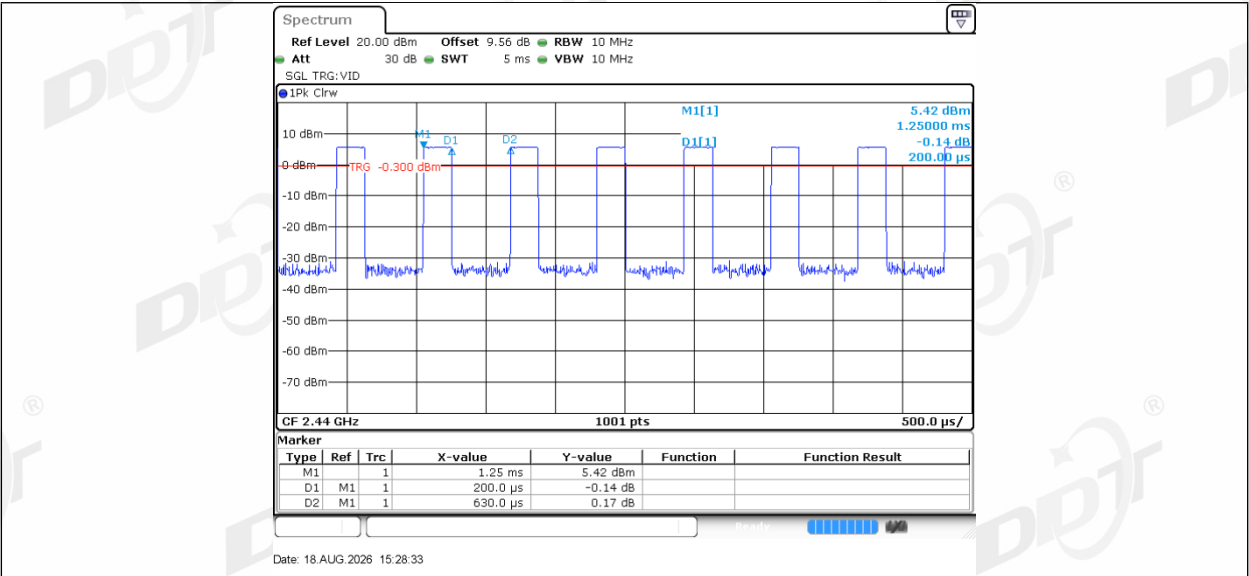


BLE_2M_Right_2440

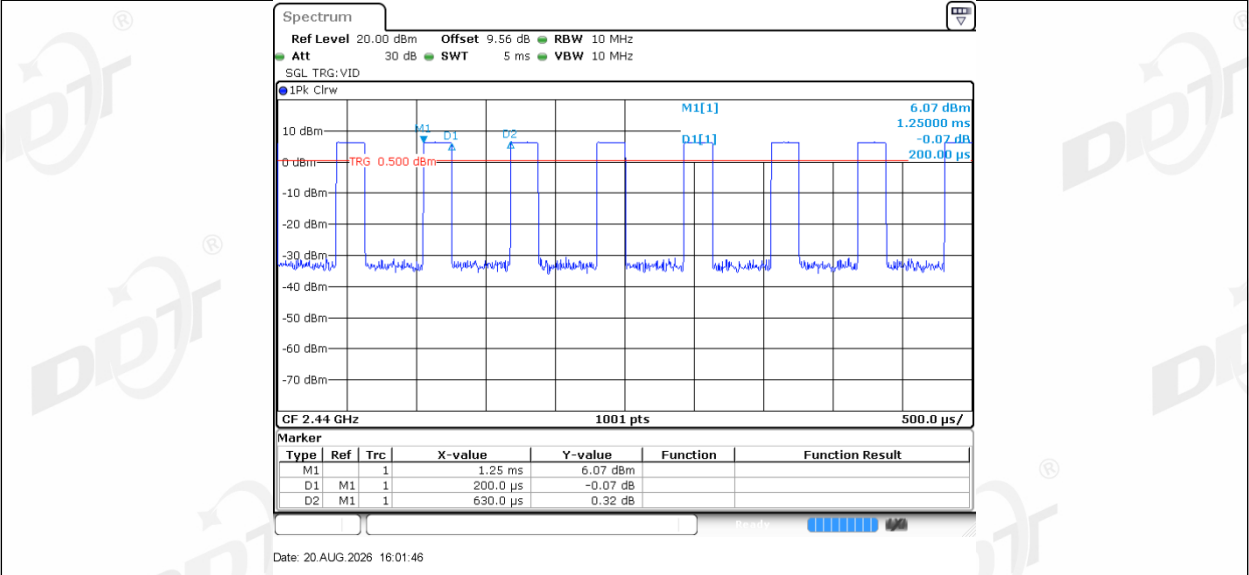

BLE_2M_Left_2478

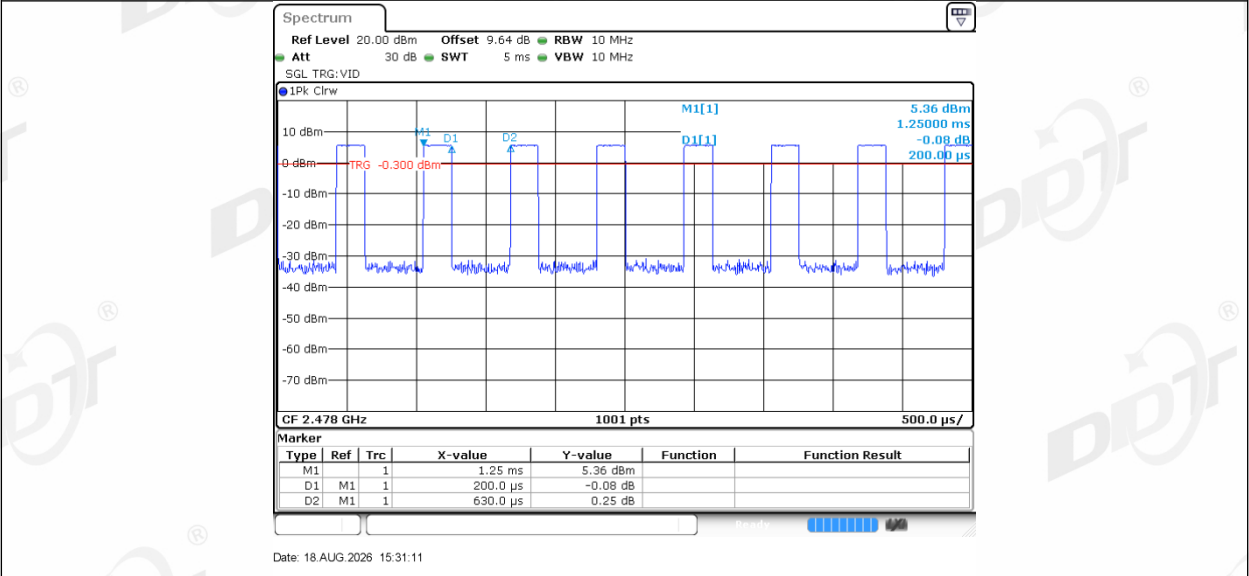

BLE_2M_Right_2478

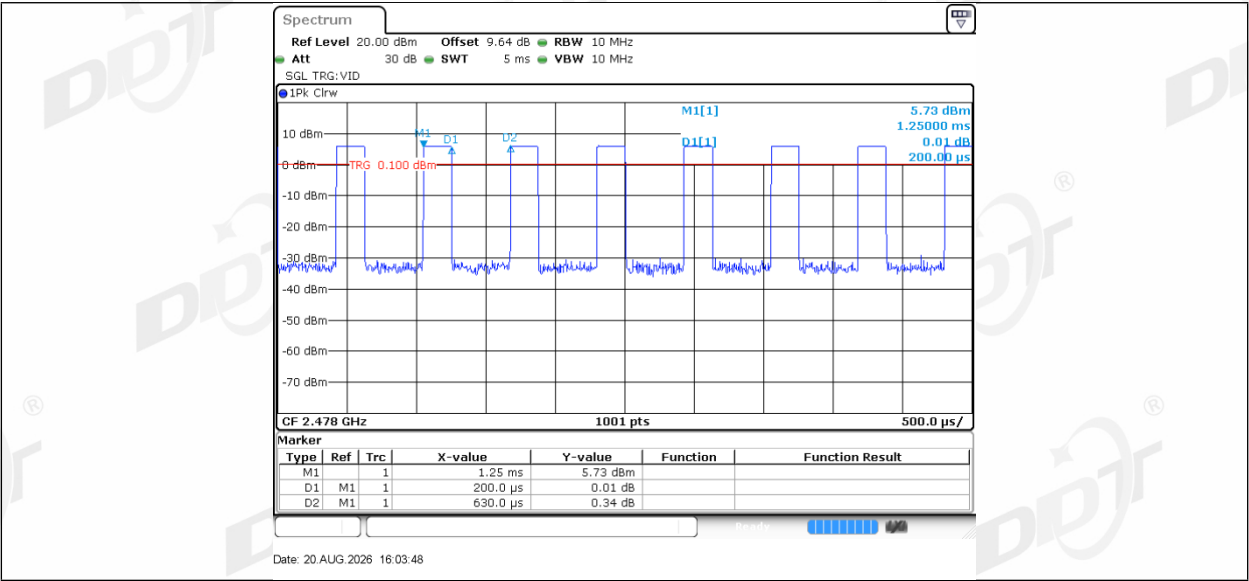

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

11.2. Result

The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


12. Radiated Emission


12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2027/02/27
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-10M	DDT-ZC05591	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-3M	DDT-ZC05590	2026/10/10
RF cable	Zhongke Junchuang	JCTB510-NJW-NJW-0.6M	DDT-ZC04595	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/10/10
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-5M	DDT-ZC03800	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS32-RE (V5.0.0)	DDT-ZC02739	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2027/06/25
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2027/07/08
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2027/02/27
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2027/02/27
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2027/02/27
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2027/07/10
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC02129	2027/07/10
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2027/07/10
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2027/07/10
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2027/06/25
RF Cable	Tonscend	7+1+1+0.5+0.5m	DDT-ZC05978	2027/01/29
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04

PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS-RE&RSE (V5.0.0)	DDT-ZC06466	/

12.2. Block diagram of test setup

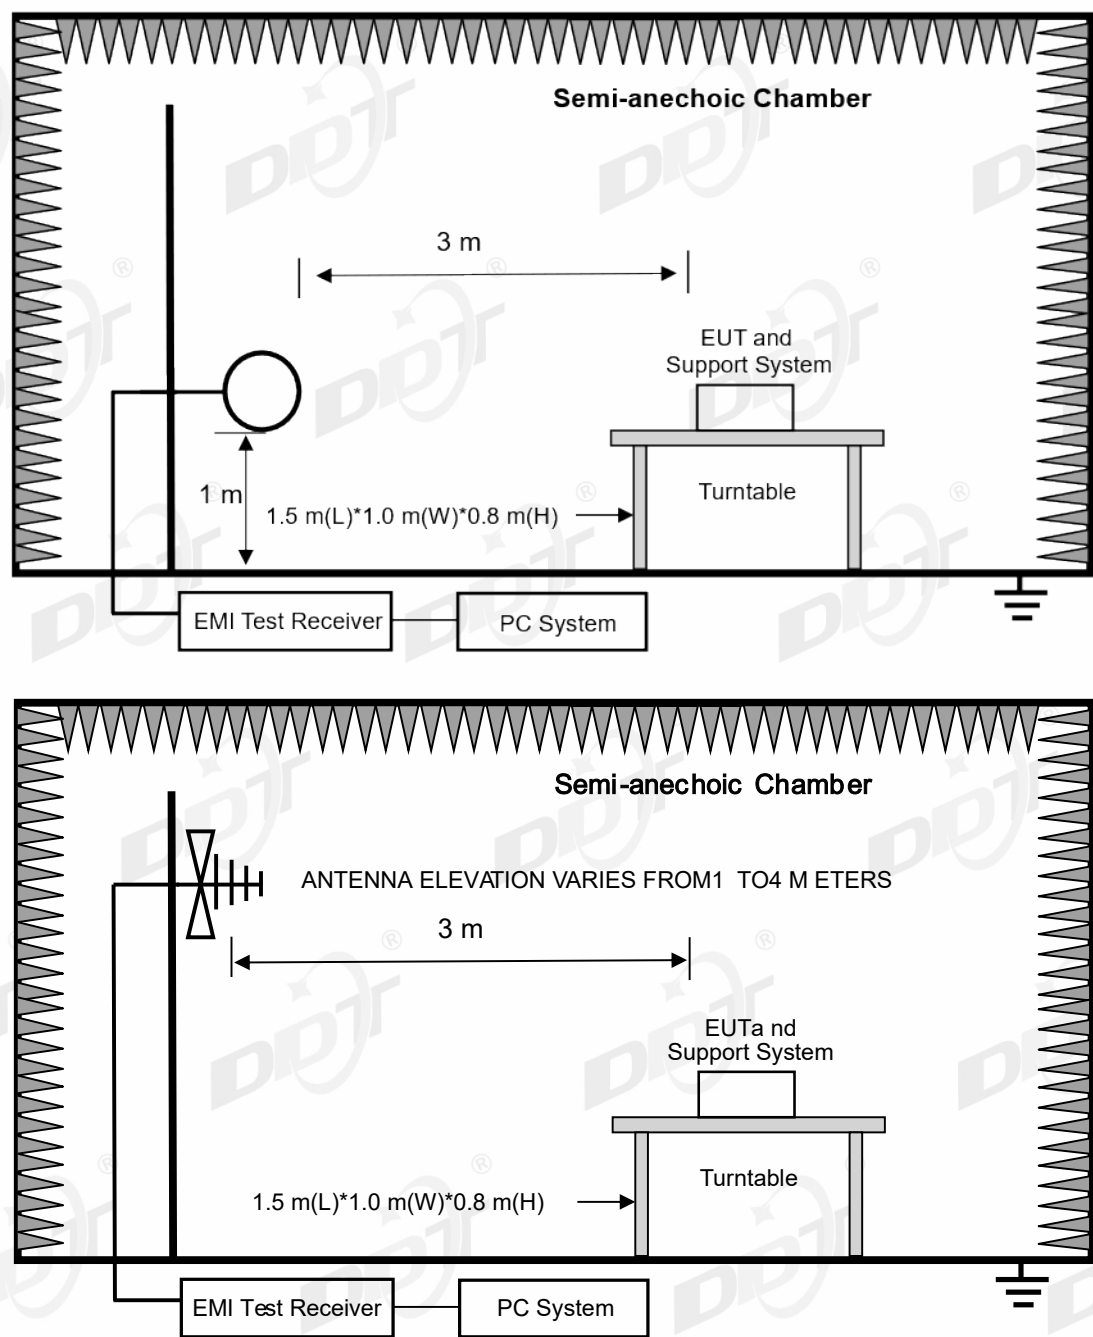

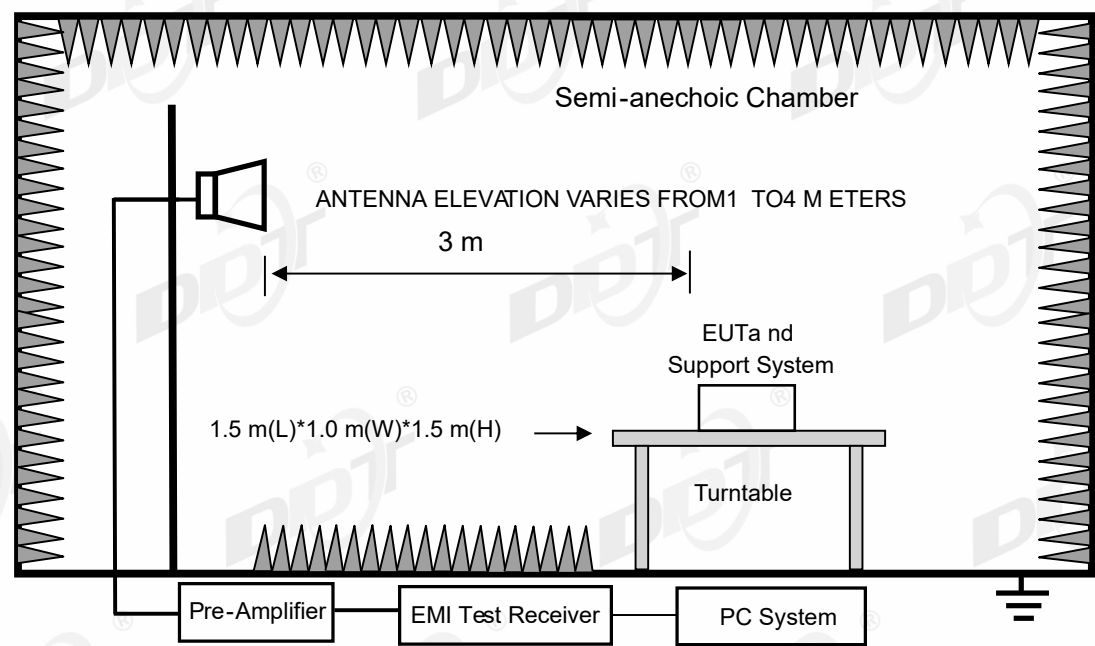

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY	DISTANCE	FIELD STRENGTHS LIMIT	
MHz	Meters	uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dBuV/m(Peak)	
		54.0 dBuV/m(Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\log(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

12.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According to ANSI C63.10 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10 clause 4.1.5.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is reported)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

Test result

PASS. (See below detailed test result)

12.6. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-19

Tested By:

Zhang Yibo

Test Mode:

TX BLE1M Mode

Power Supply:

Battery

Condition:

Temp:20.0°C;Humi:47.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26081111-1E\FCC BELOW 1G\3

Memo:

L Sample Number:S26081111-003

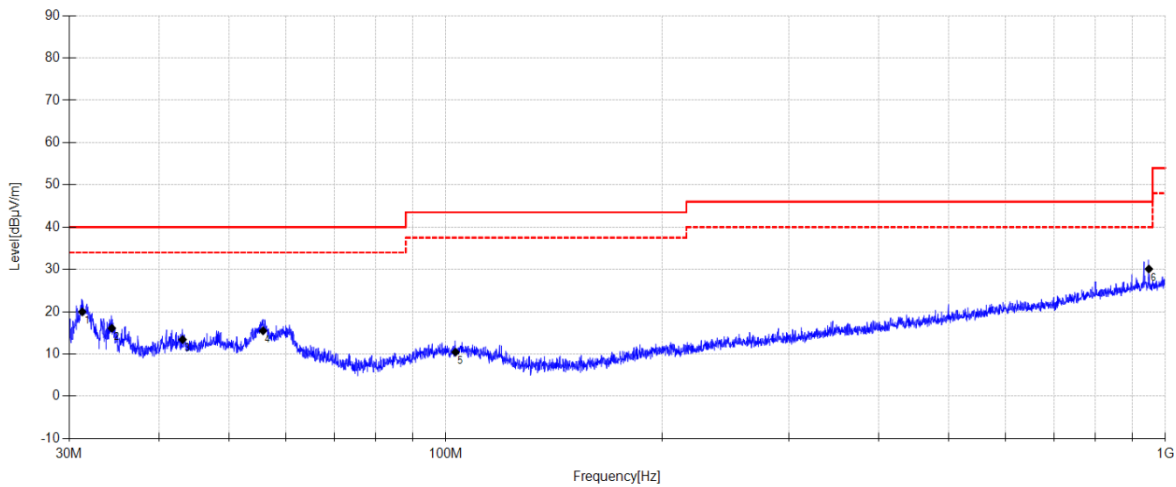

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.267	37.92	10.55	3.80	19.97	40.00	20.03	QP	Horizontal
2	34.371	33.56	11.00	3.84	16.10	40.00	23.90	QP	Horizontal
3	43.108	28.16	13.62	3.94	13.42	40.00	26.58	QP	Horizontal
4	55.759	30.78	12.97	4.03	15.48	40.00	24.52	QP	Horizontal
5	103.199	26.72	11.70	4.32	10.44	43.50	33.06	QP	Horizontal
6	948.771	32.44	22.05	7.23	30.11	46.00	15.89	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-19

Tested By:

Zhang Yibo

Test Mode:

TX BLE1M Mode

Power Supply:

Battery

Condition:

Temp:20.0°C;Humi:47.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26081111-1E\FCC BELOW 1G\4

Memo:

L Sample Number:S26081111-003

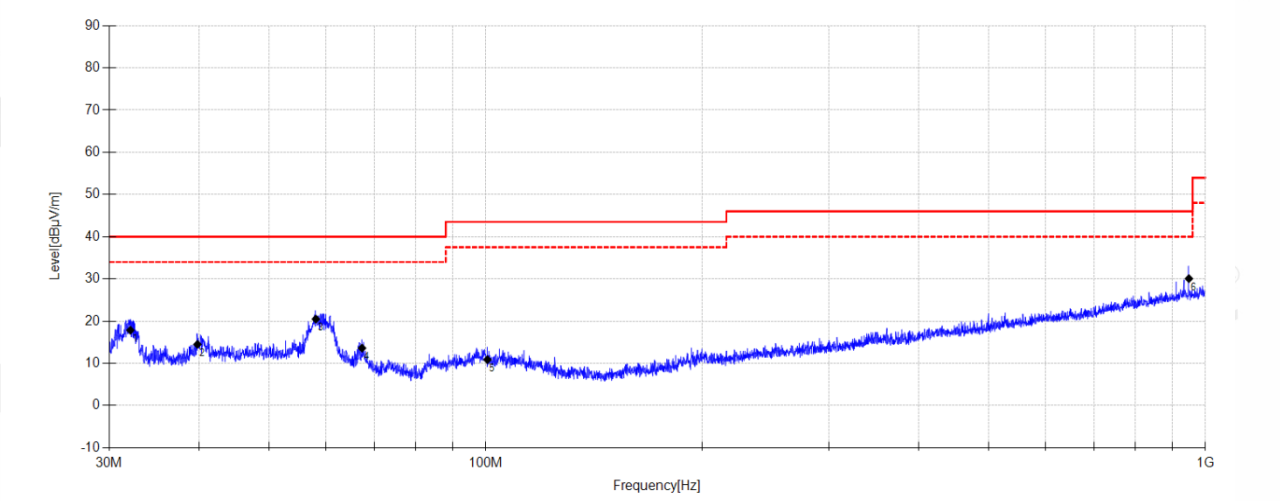

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.089	35.64	10.70	3.81	17.85	40.00	22.15	QP	Vertical
2	39.768	30.13	12.75	3.92	14.50	40.00	25.50	QP	Vertical
3	58.073	36.37	12.38	4.04	20.49	40.00	19.51	QP	Vertical
4	67.333	31.27	10.50	4.14	13.61	40.00	26.39	QP	Vertical
5	100.556	27.38	11.50	4.30	10.88	43.50	32.62	QP	Vertical
6	948.771	32.41	22.05	7.23	30.08	46.00	15.92	QP	Vertical

Note:


1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Zhang Yibo
Test Mode: TX BLE2M Mode **Power Supply:** Battery
Condition: Temp:20.0°C;Humi:47.6% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2026 report data\Q26081111-1E\FCC BELOW 1G\5
Memo: L Sample Number:S26081111-003

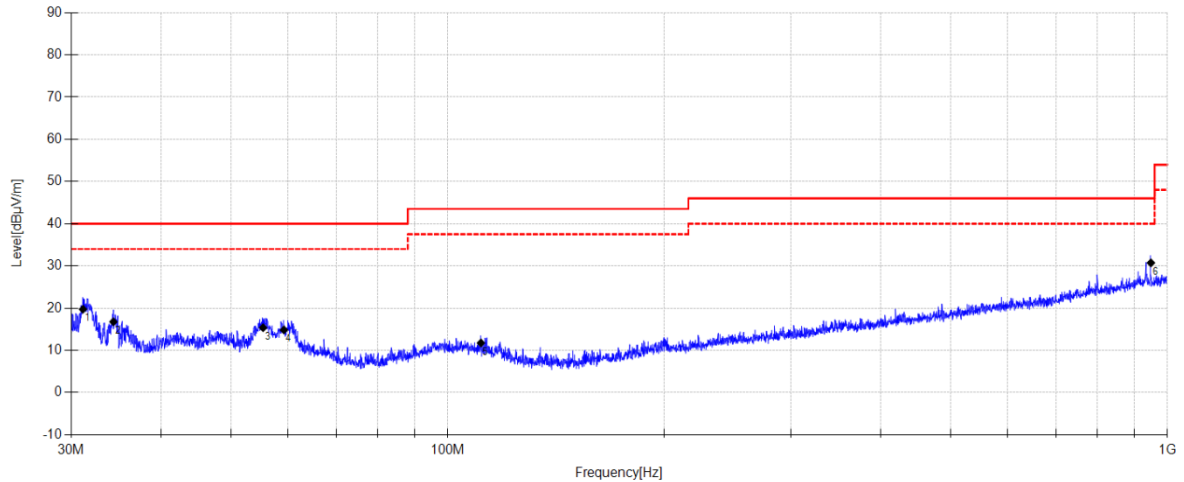**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.136	37.71	10.53	3.80	19.74	40.00	20.26	QP	Horizontal
2	34.323	34.22	11.00	3.84	16.76	40.00	23.24	QP	Horizontal
3	55.408	30.57	13.08	4.02	15.37	40.00	24.63	QP	Horizontal
4	59.224	30.97	12.12	4.05	14.84	40.00	25.16	QP	Horizontal
5	111.240	28.59	11.10	4.37	11.75	43.50	31.75	QP	Horizontal
6	948.771	33.06	22.05	7.23	30.73	46.00	15.27	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-19

Tested By:

Zhang Yibo

Test Mode:

TX BLE2M Mode

Power Supply:

Battery

Condition:

Temp:20.0°C;Humi:47.6%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26081111-1E\FCC BELOW 1G\6

Memo:

L Sample Number:S26081111-003

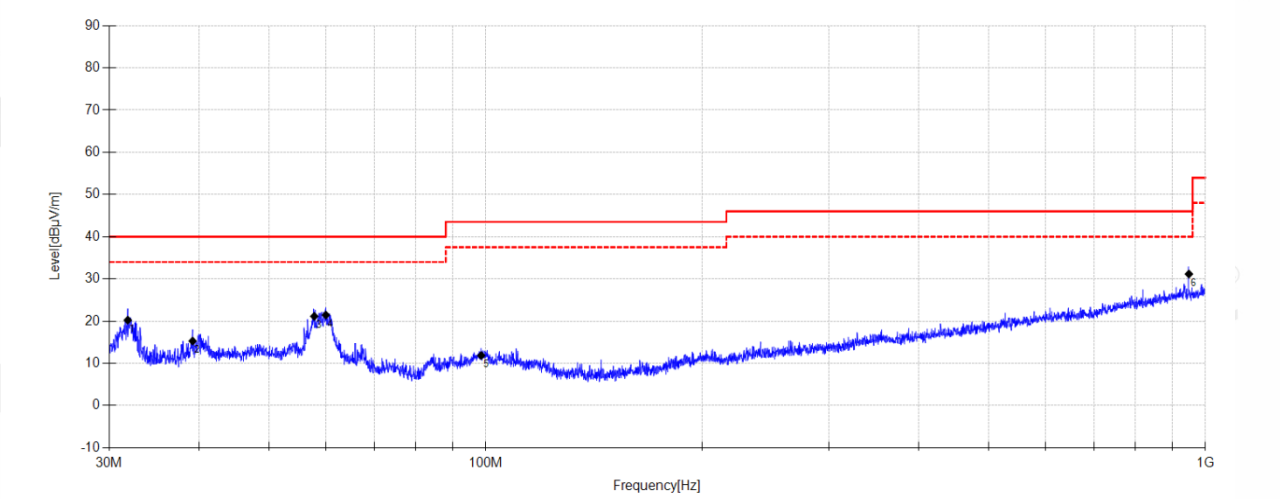


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.820	38.07	10.66	3.81	20.24	40.00	19.76	QP	Vertical
2	39.159	31.05	12.63	3.91	15.29	40.00	24.71	QP	Vertical
3	57.789	36.93	12.48	4.04	21.15	40.00	18.85	QP	Vertical
4	59.977	37.49	12.20	4.06	21.45	40.00	18.55	QP	Vertical
5	98.601	28.71	11.16	4.29	11.86	43.50	31.64	QP	Vertical
6	948.771	33.49	22.05	7.23	31.16	46.00	14.84	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

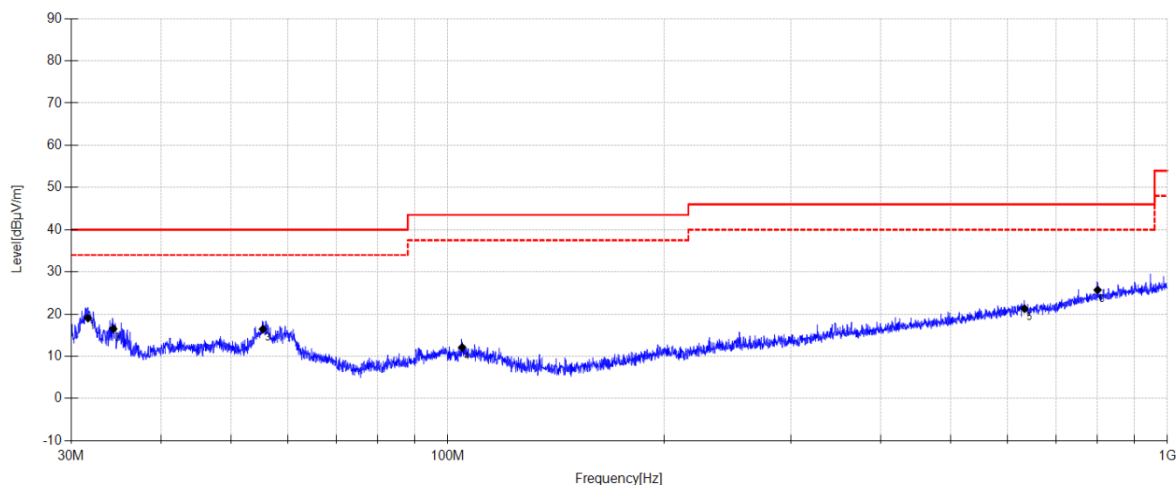
Test Date: 2026-08-19**Tested By:** Zhang Yibo**Test Mode:** TX BLE2M Mode**Power Supply:** Battery**Condition:** Temp:20.0°C;Humi:47.6%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26081111-1E\FCC BELOW 1G\7**Memo:** R Sample Number:S26081111-003**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.642	36.95	10.63	3.80	19.08	40.00	20.92	QP	Horizontal
2	34.299	33.99	11.00	3.84	16.53	40.00	23.47	QP	Horizontal
3	55.369	31.63	13.09	4.02	16.44	40.00	23.56	QP	Horizontal
4	104.730	28.31	11.77	4.33	12.11	43.50	31.39	QP	Horizontal
5	633.077	28.63	19.12	6.48	21.30	46.00	24.70	QP	Horizontal
6	800.137	30.57	20.71	6.94	25.72	46.00	20.28	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

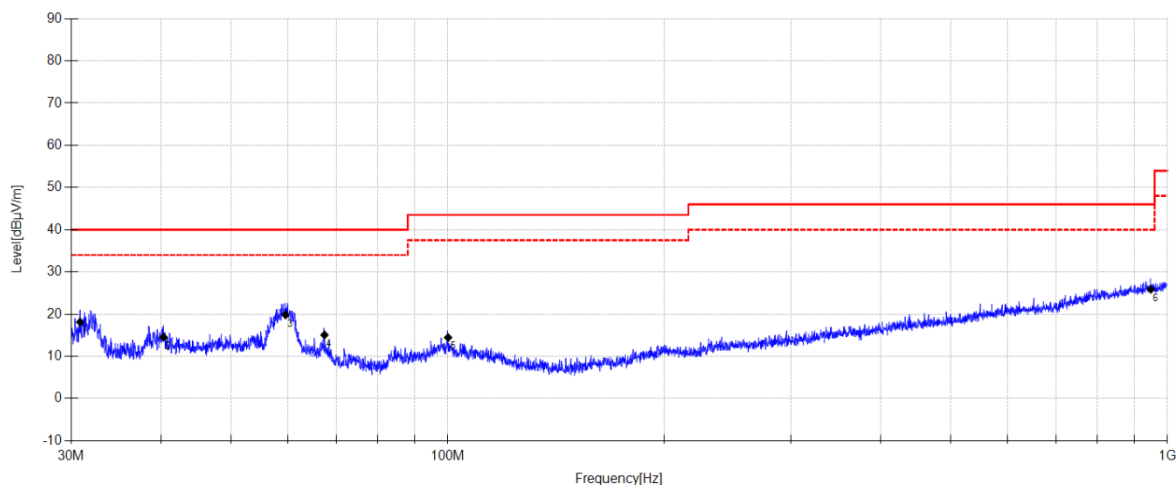
Test Date: 2026-08-19**Tested By:** Zhang Yibo**Test Mode:** TX BLE2M Mode**Power Supply:** Battery**Condition:** Temp:20.0°C;Humi:47.6%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26081111-1E\FCC BELOW 1G\8**Memo:** R Sample Number:S26081111-003**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.853	36.07	10.56	3.79	18.12	40.00	21.88	QP	Vertical
2	40.302	30.02	12.89	3.92	14.53	40.00	25.47	QP	Vertical
3	59.516	35.93	12.15	4.06	19.84	40.00	20.16	QP	Vertical
4	67.427	32.76	10.47	4.14	15.07	40.00	24.93	QP	Vertical
5	100.134	30.97	11.50	4.30	14.47	43.50	29.03	QP	Vertical
6	948.771	28.22	22.05	7.23	25.89	46.00	20.11	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

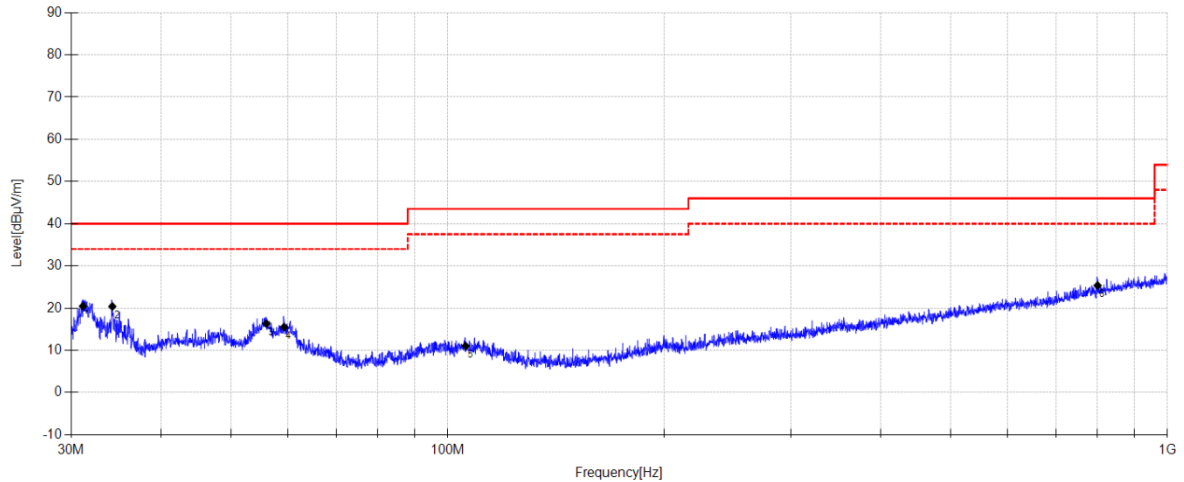
Test Date: 2026-08-19**Tested By:** Zhang Yibo**Test Mode:** TX BLE1M Mode**Power Supply:** Battery**Condition:** Temp:20.0°C;Humi:47.6%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26081111-1E\FCC BELOW 1G\9**Memo:** R Sample Number:S26081111-003**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	31.136	38.44	10.53	3.80	20.47	40.00	19.53	QP	Horizontal
2	34.203	37.86	11.00	3.84	20.40	40.00	19.60	QP	Horizontal
3	55.994	31.72	12.90	4.03	16.35	40.00	23.65	QP	Horizontal
4	59.266	31.63	12.13	4.05	15.51	40.00	24.49	QP	Horizontal
5	105.912	27.3	11.71	4.33	11.03	43.50	32.47	QP	Horizontal
6	800.137	30.2	20.71	6.94	25.35	46.00	20.65	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

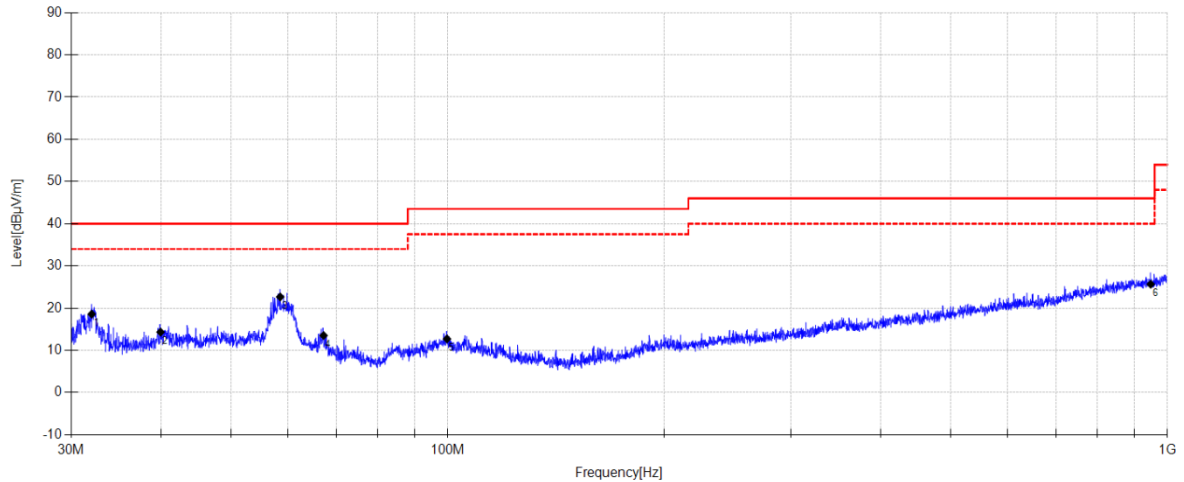Test Date: 2026-08-19**Tested By:** Zhang Yibo**Test Mode:** TX BLE1M Mode**Power Supply:** Battery**Condition:** Temp:20.0°C;Humi:47.6%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26081111-1E\FCC BELOW 1G\10**Memo:** R Sample Number:S26081111-003**Final Data List**


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	32.021	36.37	10.70	3.81	18.58	40.00	21.42	QP	Vertical
2	39.908	29.93	12.78	3.92	14.33	40.00	25.67	QP	Vertical
3	58.523	38.68	12.24	4.05	22.67	40.00	17.33	QP	Vertical
4	67.238	31.14	10.53	4.14	13.51	40.00	26.49	QP	Vertical
5	99.784	29.27	11.44	4.30	12.71	43.50	30.79	QP	Vertical
6	948.106	28.03	22.02	7.23	25.67	46.00	20.33	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE1
Memo: L Sample number:S26081111-003 Power Setting:7

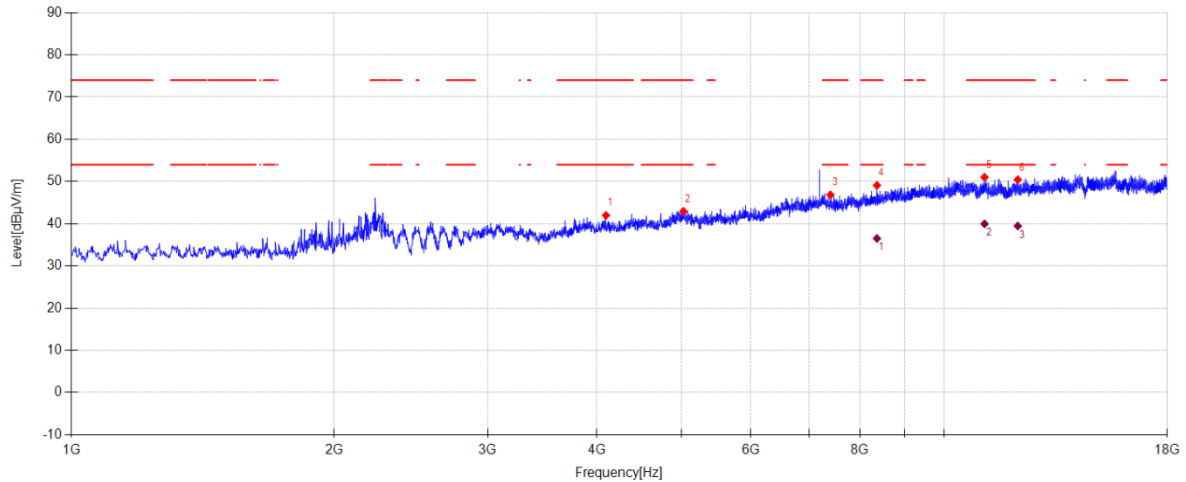**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4095.700	51.16	31.60	-40.78	41.98	74.00	32.02	PK	Horizontal
2	5023.900	49.74	33.95	-40.77	42.92	74.00	31.08	PK	Horizontal
3	7403.900	49.39	37.19	-39.74	46.84	74.00	27.16	PK	Horizontal
4	8369.500	50.08	38.04	-39.03	49.09	74.00	24.91	PK	Horizontal
5	11115.000	46.43	39.73	-35.15	51.01	74.00	22.99	PK	Horizontal
6	12133.300	45.64	39.90	-35.11	50.43	74.00	23.57	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8369.500	37.50	38.04	-39.03	36.51	54.00	17.49	AV	Horizontal
2	11115.000	35.38	39.73	-35.15	39.96	54.00	14.04	AV	Horizontal
3	12133.300	34.67	39.90	-35.11	39.46	54.00	14.54	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\2
Memo: L Sample number:S26081111-003 Power Setting:7

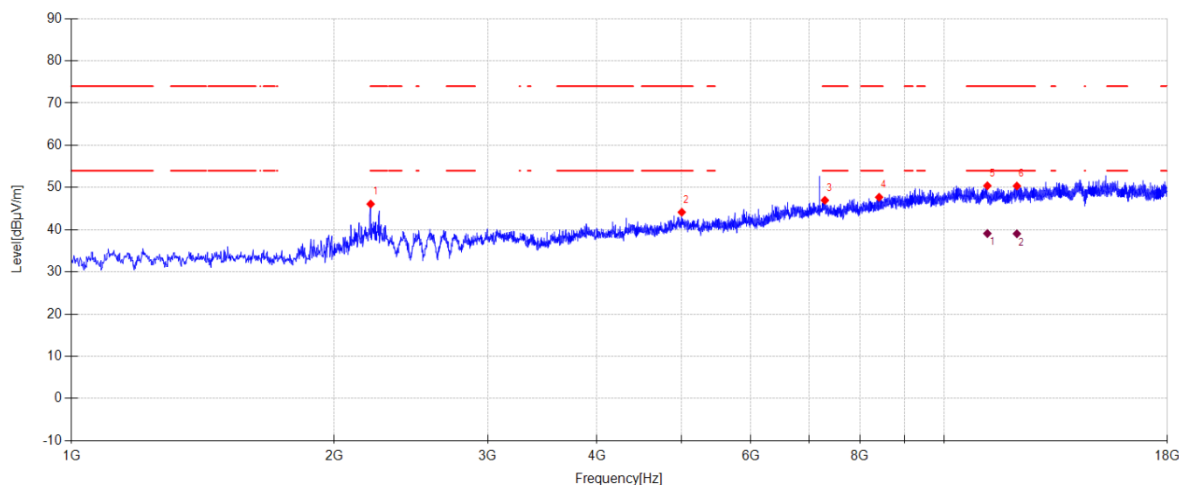**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2201.900	58.01	28.10	-40.03	46.08	74.00	27.92	PK	Vertical
2	5001.800	50.88	33.90	-40.64	44.14	74.00	29.86	PK	Vertical
3	7295.100	48.96	37.71	-39.70	46.97	74.00	27.03	PK	Vertical
4	8417.100	48.50	38.17	-38.97	47.70	74.00	26.30	PK	Vertical
5	11198.300	45.87	39.90	-35.36	50.41	74.00	23.59	PK	Vertical
6	12104.400	45.38	39.90	-34.93	50.35	74.00	23.65	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11198.300	34.57	39.90	-35.36	39.11	54.00	14.89	AV	Vertical
2	12104.400	34.08	39.90	-34.93	39.05	54.00	14.95	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\3
Memo: L Sample number:S26081111-003 Power Setting:7

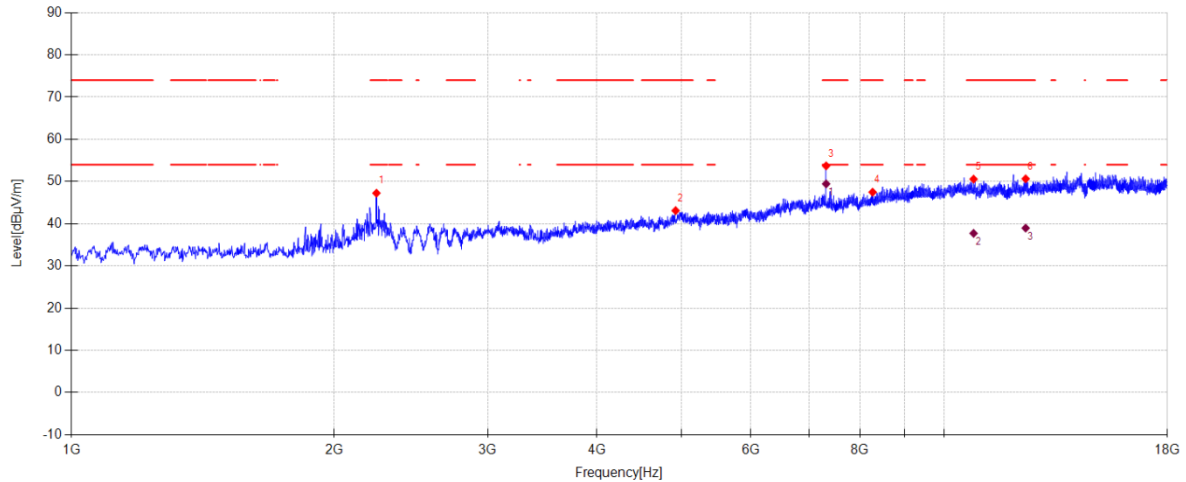**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2235.900	59.18	28.10	-40.04	47.24	74.00	26.76	PK	Horizontal
2	4921.900	50.63	33.59	-41.12	43.10	74.00	30.90	PK	Horizontal
3	7320.600	55.80	37.58	-39.67	53.71	74.00	20.29	PK	Horizontal
4	8274.300	48.64	37.95	-39.11	47.48	74.00	26.52	PK	Horizontal
5	10798.800	45.92	40.00	-35.35	50.57	74.00	23.43	PK	Horizontal
6	12388.300	45.57	39.71	-34.64	50.64	74.00	23.36	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7319.422	51.53	37.58	-39.67	49.44	54.00	4.56	AV	Horizontal
2	10798.800	33.07	40.00	-35.35	37.72	54.00	16.28	AV	Horizontal
3	12388.300	33.89	39.71	-34.64	38.96	54.00	15.04	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLEV4
Memo: L Sample number:S26081111-003 Power Setting:7

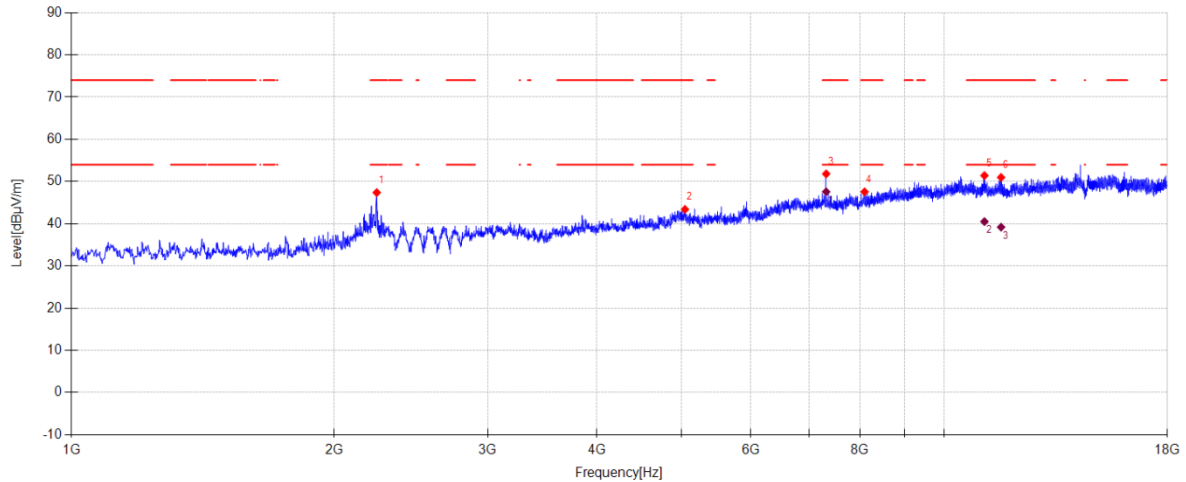**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2237.600	59.32	28.10	-40.04	47.38	74.00	26.62	PK	Vertical
2	5044.300	50.30	33.99	-40.89	43.40	74.00	30.60	PK	Vertical
3	7320.600	53.90	37.58	-39.67	51.81	74.00	22.19	PK	Vertical
4	8100.900	48.84	37.90	-39.18	47.56	74.00	26.44	PK	Vertical
5	11111.600	46.83	39.72	-35.14	51.41	74.00	22.59	PK	Vertical
6	11611.400	46.48	39.59	-35.10	50.97	74.00	23.03	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7320.600	49.66	37.58	-39.67	47.57	54.00	6.43	AV	Vertical
2	11111.600	35.93	39.72	-35.14	40.51	54.00	13.49	AV	Vertical
3	11611.400	34.70	39.59	-35.10	39.19	54.00	14.81	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\5
Memo: L Sample number:S26081111-003 Power Setting:7

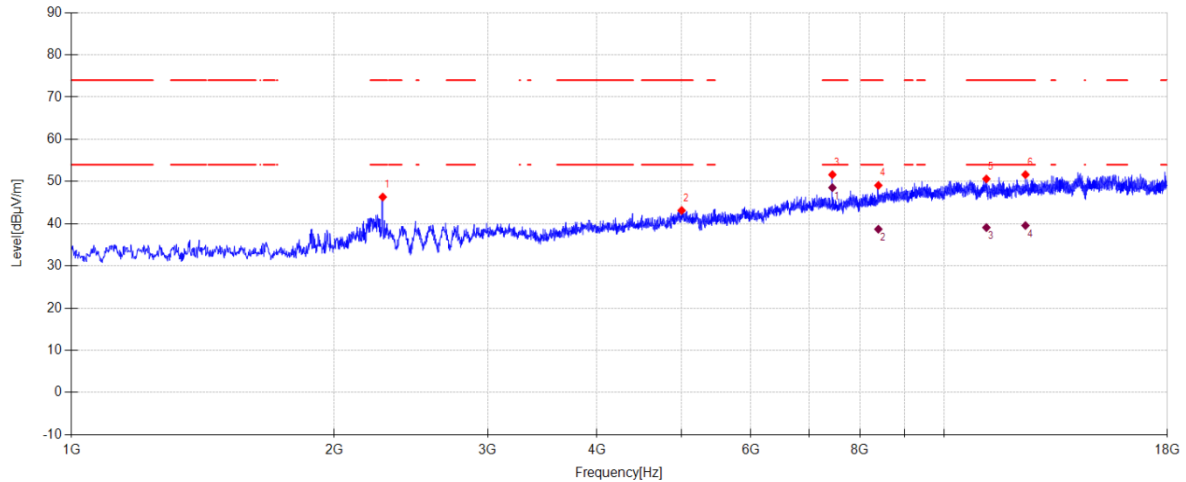**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2273.300	58.29	28.10	-40.06	46.33	74.00	27.67	PK	Horizontal
2	5000.100	49.87	33.90	-40.63	43.14	74.00	30.86	PK	Horizontal
3	7441.300	54.35	37.12	-39.85	51.62	74.00	22.38	PK	Horizontal
4	8400.100	49.99	38.10	-39.01	49.08	74.00	24.92	PK	Horizontal
5	11169.400	46.05	39.84	-35.28	50.61	74.00	23.39	PK	Horizontal
6	12381.500	46.59	39.72	-34.69	51.62	74.00	22.38	PK	Horizontal

Final Data List


NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7441.300	51.27	37.12	-39.85	48.54	54.00	5.46	AV	Horizontal
2	8400.100	39.62	38.10	-39.01	38.71	54.00	15.29	AV	Horizontal
3	11169.400	34.53	39.84	-35.28	39.09	54.00	14.91	AV	Horizontal
4	12381.500	34.54	39.72	-34.69	39.57	54.00	14.43	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\6
Memo: L Sample number:S26081111-003 Power Setting:7

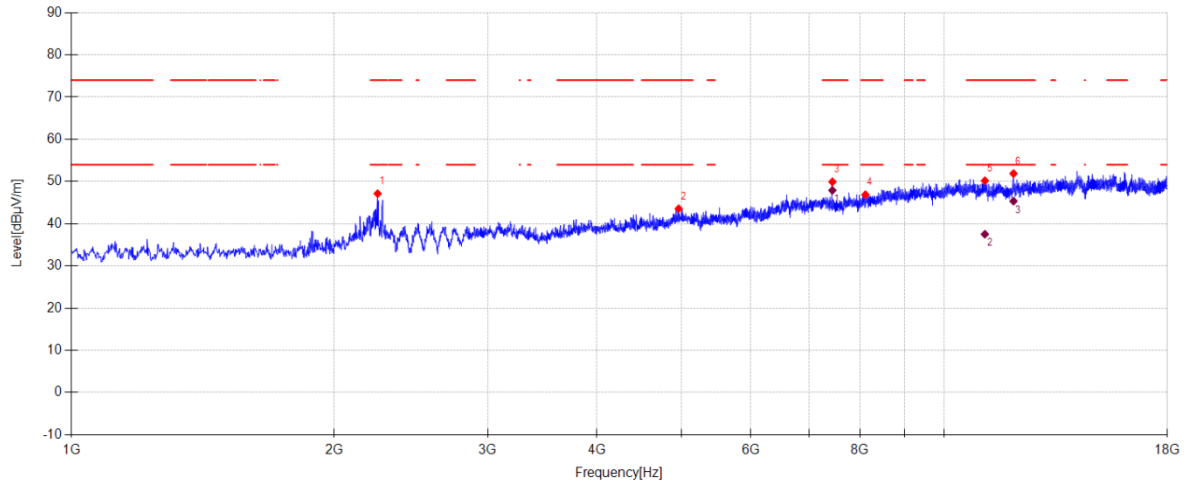**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2242.700	59.07	28.10	-40.05	47.12	74.00	26.88	PK	Vertical
2	4961.000	50.69	33.74	-40.88	43.55	74.00	30.45	PK	Vertical
3	7441.300	52.65	37.12	-39.85	49.92	74.00	24.08	PK	Vertical
4	8117.900	48.14	37.90	-39.17	46.87	74.00	27.13	PK	Vertical
5	11125.200	45.60	39.75	-35.17	50.18	74.00	23.82	PK	Vertical
6	11997.300	46.79	39.79	-34.70	51.88	74.00	22.12	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7441.300	50.63	37.12	-39.85	47.90	54.00	6.10	AV	Vertical
2	11125.200	32.94	39.75	-35.17	37.52	54.00	16.48	AV	Vertical
3	11997.300	40.26	39.79	-34.70	45.35	54.00	8.65	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\7
Memo: L Sample number:S26081111-003 Power Setting:7

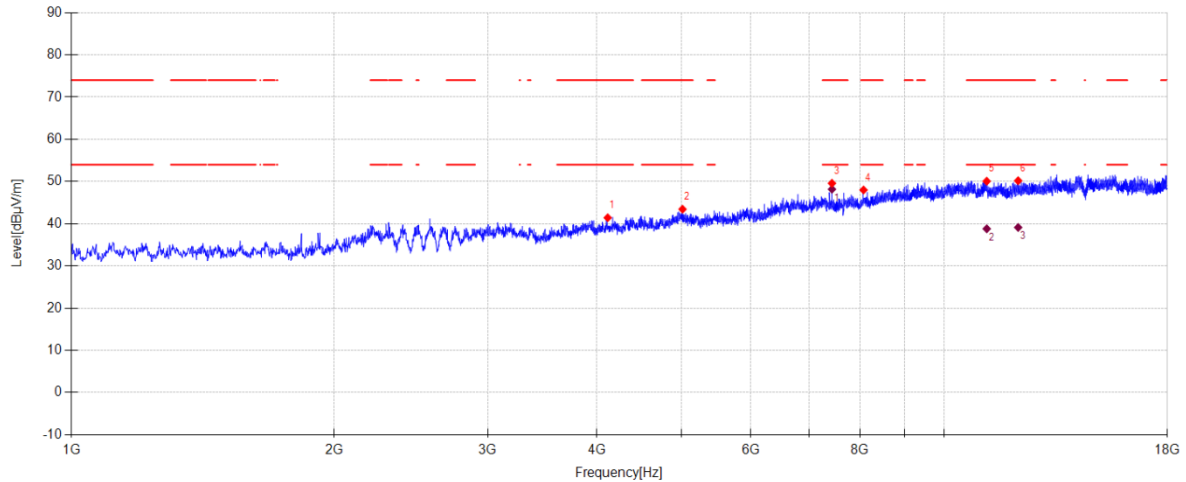**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4114.400	50.61	31.63	-40.82	41.42	74.00	32.58	PK	Horizontal
2	5012.000	50.22	33.92	-40.70	43.44	74.00	30.56	PK	Horizontal
3	7432.800	52.28	37.13	-39.83	49.58	74.00	24.42	PK	Horizontal
4	8078.800	49.39	37.90	-39.30	47.99	74.00	26.01	PK	Horizontal
5	11179.600	45.52	39.86	-35.31	50.07	74.00	23.93	PK	Horizontal
6	12145.200	45.46	39.90	-35.18	50.18	74.00	23.82	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7432.800	50.87	37.13	-39.83	48.17	54.00	5.83	AV	Horizontal
2	11179.600	34.25	39.86	-35.31	38.80	54.00	15.20	AV	Horizontal
3	12145.200	34.40	39.90	-35.18	39.12	54.00	14.88	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\8
Memo: L Sample number:S26081111-003 Power Setting:7

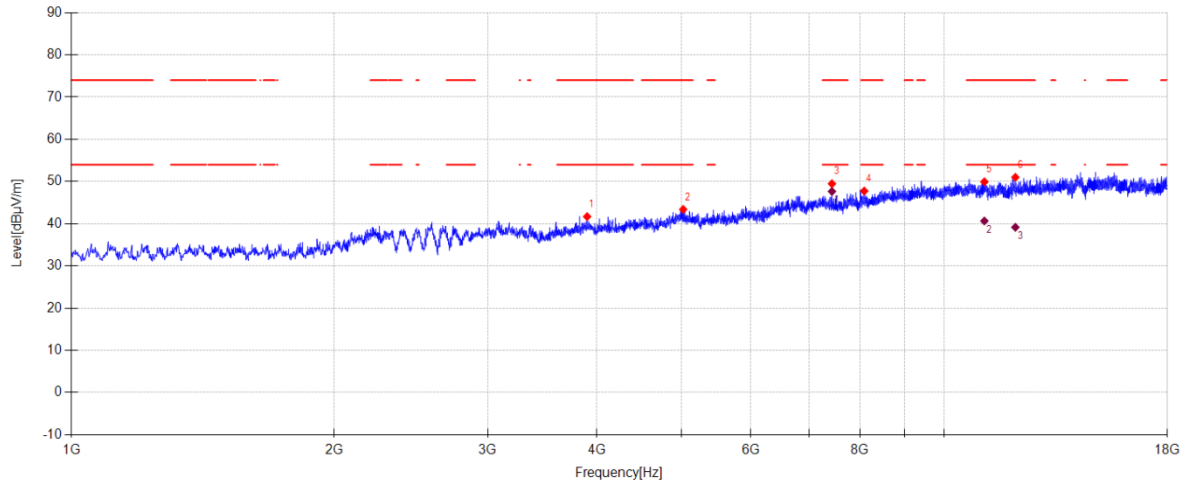

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3896.800	50.91	31.59	-40.81	41.69	74.00	32.31	PK	Vertical
2	5020.500	50.20	33.94	-40.75	43.39	74.00	30.61	PK	Vertical
3	7432.800	52.17	37.13	-39.83	49.47	74.00	24.53	PK	Vertical
4	8092.400	49.06	37.90	-39.22	47.74	74.00	26.26	PK	Vertical
5	11109.900	45.34	39.72	-35.13	49.93	74.00	24.07	PK	Vertical
6	12056.800	45.94	39.86	-34.80	51.00	74.00	23.00	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7432.800	50.35	37.13	-39.83	47.65	54.00	6.35	AV	Vertical
2	11109.900	36.06	39.72	-35.13	40.65	54.00	13.35	AV	Vertical
3	12056.800	34.09	39.86	-34.80	39.15	54.00	14.85	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijong
Test Mode: TX BLE2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\9
Memo: L Sample number:S26081111-003 Power Setting:7

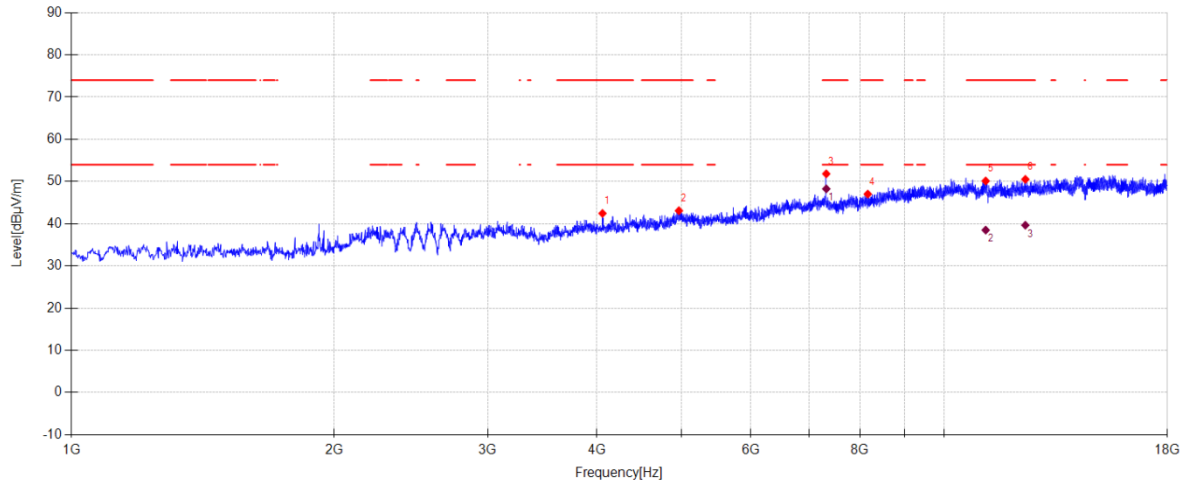**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4058.300	51.88	31.60	-41.04	42.44	74.00	31.56	PK	Horizontal
2	4964.400	50.16	33.76	-40.85	43.07	74.00	30.93	PK	Horizontal
3	7322.300	53.93	37.57	-39.68	51.82	74.00	22.18	PK	Horizontal
4	8168.900	48.28	37.90	-39.16	47.02	74.00	26.98	PK	Horizontal
5	11149.000	45.56	39.80	-35.23	50.13	74.00	23.87	PK	Horizontal
6	12378.100	45.51	39.72	-34.72	50.51	74.00	23.49	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7322.300	50.37	37.57	-39.68	48.26	54.00	5.74	AV	Horizontal
2	11149.000	33.92	39.80	-35.23	38.49	54.00	15.51	AV	Horizontal
3	12378.100	34.65	39.72	-34.72	39.65	54.00	14.35	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijong
Test Mode: TX BLE2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\10
Memo: L Sample number:S26081111-003 Power Setting:7

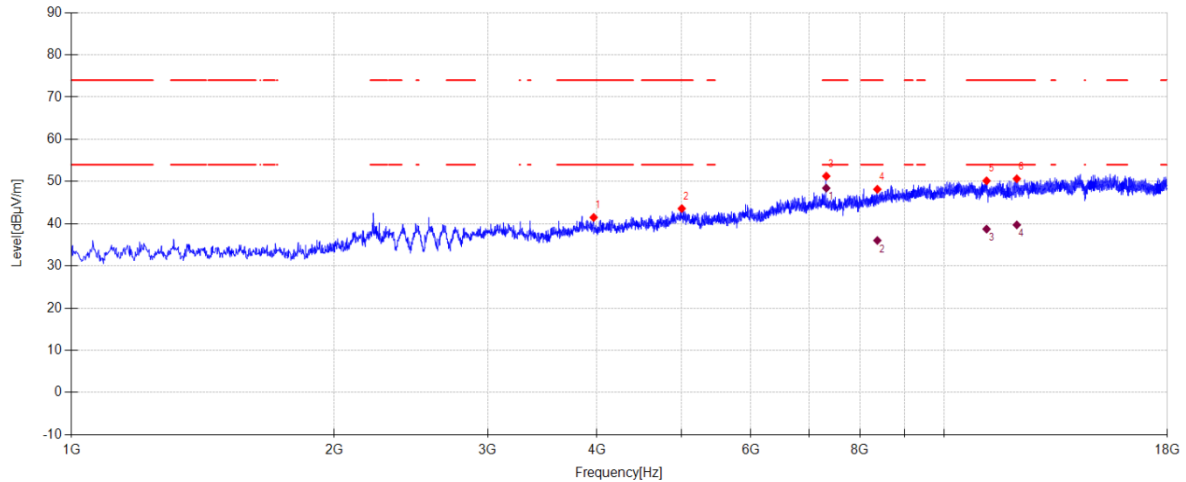**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3964.800	51.04	31.67	-41.22	41.49	74.00	32.51	PK	Vertical
2	5001.800	50.33	33.90	-40.64	43.59	74.00	30.41	PK	Vertical
3	7322.300	53.38	37.57	-39.68	51.27	74.00	22.73	PK	Vertical
4	8378.000	49.13	38.06	-39.03	48.16	74.00	25.84	PK	Vertical
5	11174.500	45.61	39.85	-35.30	50.16	74.00	23.84	PK	Vertical
6	12102.700	45.67	39.90	-34.92	50.65	74.00	23.35	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7322.300	50.54	37.57	-39.68	48.43	54.00	5.57	AV	Vertical
2	8378.000	37.00	38.06	-39.03	36.03	54.00	17.97	AV	Vertical
3	11174.500	34.18	39.85	-35.30	38.73	54.00	15.27	AV	Vertical
4	12102.700	34.75	39.90	-34.92	39.73	54.00	14.27	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\11
Memo: L Sample number:S26081111-003 Power Setting:7

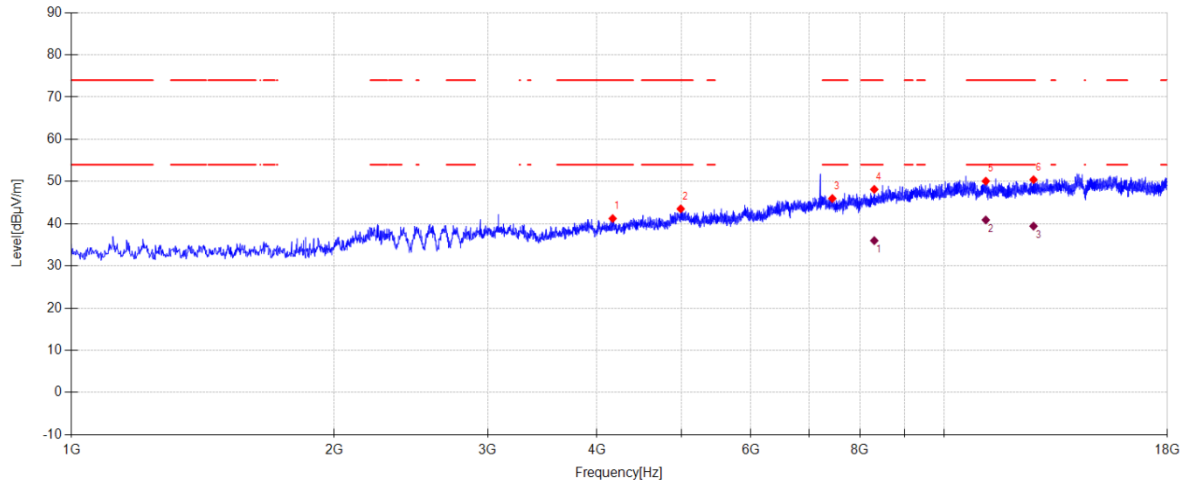**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4168.800	50.52	31.78	-41.07	41.23	74.00	32.77	PK	Horizontal
2	4988.200	50.37	33.85	-40.70	43.52	74.00	30.48	PK	Horizontal
3	7439.600	48.69	37.12	-39.84	45.97	74.00	28.03	PK	Horizontal
4	8310.000	49.21	38.00	-39.08	48.13	74.00	25.87	PK	Horizontal
5	11152.400	45.53	39.80	-35.24	50.09	74.00	23.91	PK	Horizontal
6	12648.400	45.39	40.15	-35.11	50.43	74.00	23.57	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8310.000	37.07	38.00	-39.08	35.99	54.00	18.01	AV	Horizontal
2	11152.400	36.33	39.80	-35.24	40.89	54.00	13.11	AV	Horizontal
3	12648.400	34.38	40.15	-35.11	39.42	54.00	14.58	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-19

Tested By:

Liang Rijing

Test Mode:

TX BLE2M 2404MHz Mode

Power Supply:

Battery

Condition:

Temp:23.5°C;Humi:49.2%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\12

Memo:

L Sample number:S26081111-003 Power Setting:7

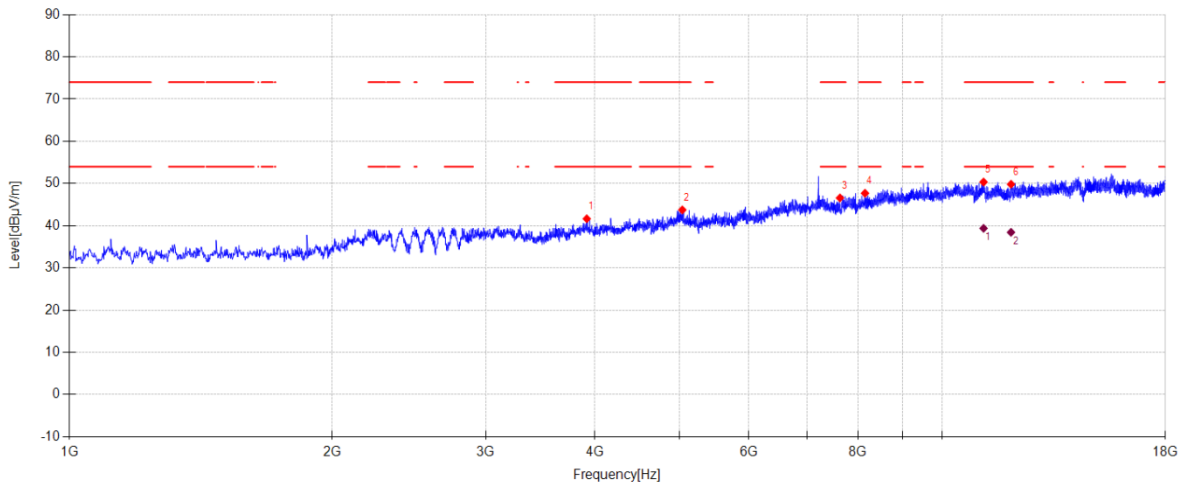

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3913.800	50.91	31.63	-40.89	41.65	74.00	32.35	PK	Vertical
2	5035.800	50.62	33.97	-40.84	43.75	74.00	30.25	PK	Vertical
3	7631.700	49.12	37.26	-39.80	46.58	74.00	27.42	PK	Vertical
4	8151.900	48.95	37.90	-39.16	47.69	74.00	26.31	PK	Vertical
5	11145.600	45.78	39.79	-35.22	50.35	74.00	23.65	PK	Vertical
6	11982.000	44.92	39.76	-34.86	49.82	74.00	24.18	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11145.600	34.81	39.79	-35.22	39.38	54.00	14.62	AV	Vertical
2	11982.000	33.54	39.76	-34.86	38.44	54.00	15.56	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\33
Memo: R Sample number:S26081111-003 Power Setting:7

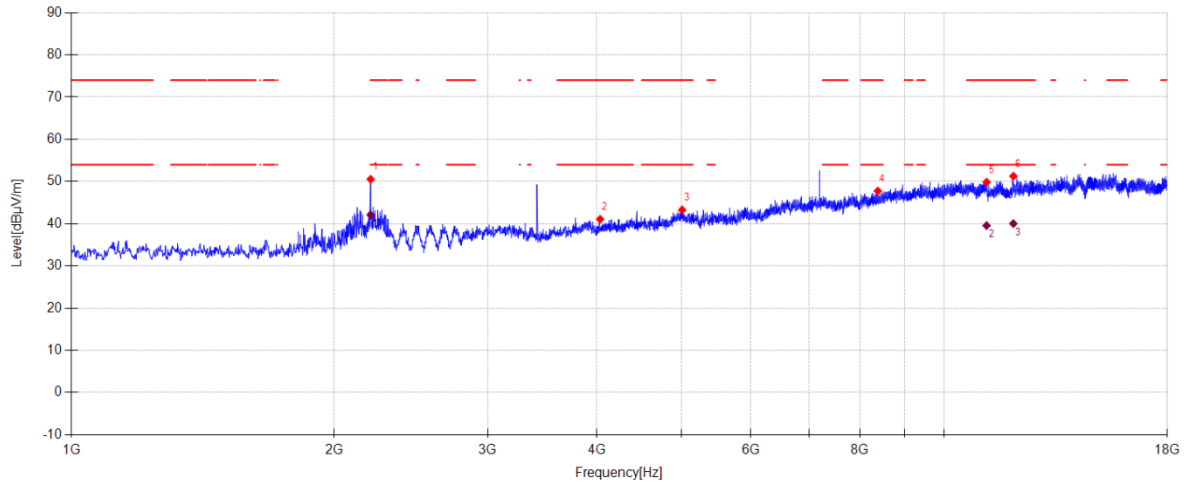**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2201.900	62.46	28.10	-40.03	50.53	74.00	23.47	PK	Horizontal
2	4032.800	50.68	31.60	-41.22	41.06	74.00	32.94	PK	Horizontal
3	5006.900	50.03	33.91	-40.67	43.27	74.00	30.73	PK	Horizontal
4	8388.200	48.68	38.08	-39.02	47.74	74.00	26.26	PK	Horizontal
5	11174.500	45.29	39.85	-35.30	49.84	74.00	24.16	PK	Horizontal
6	11992.200	46.23	39.78	-34.75	51.26	74.00	22.74	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2201.876	54.03	28.10	-40.03	42.10	54.00	11.90	AV	Horizontal
2	11174.500	35.01	39.85	-35.30	39.56	54.00	14.44	AV	Horizontal
3	11992.200	35.00	39.78	-34.75	40.03	54.00	13.97	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\34
Memo: R Sample number:S26081111-003 Power Setting:7

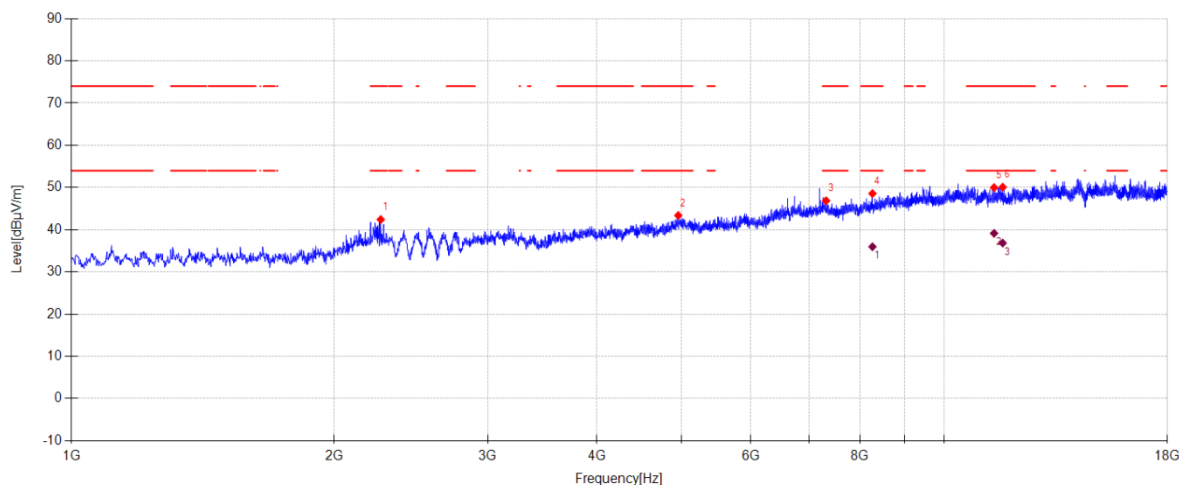**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2261.400	54.37	28.10	-40.05	42.42	74.00	31.58	PK	Vertical
2	4955.900	50.56	33.72	-40.91	43.37	74.00	30.63	PK	Vertical
3	7318.900	48.95	37.59	-39.67	46.87	74.00	27.13	PK	Vertical
4	8270.900	49.73	37.94	-39.11	48.56	74.00	25.44	PK	Vertical
5	11398.900	46.01	40.00	-36.03	49.98	74.00	24.02	PK	Vertical
6	11660.700	46.08	39.54	-35.54	50.08	74.00	23.92	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8270.900	37.14	37.94	-39.11	35.97	54.00	18.03	AV	Vertical
2	11398.900	35.18	40.00	-36.03	39.15	54.00	14.85	AV	Vertical
3	11660.700	32.84	39.54	-35.54	36.84	54.00	17.16	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\35
Memo: R Sample number:S26081111-003 Power Setting:7

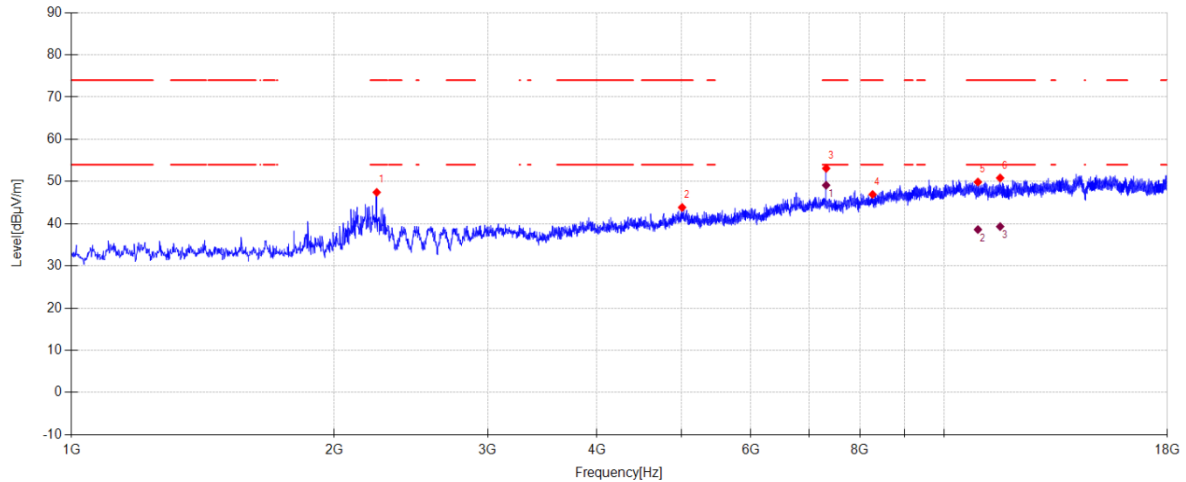**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2237.600	59.38	28.10	-40.04	47.44	74.00	26.56	PK	Horizontal
2	5006.900	50.62	33.91	-40.67	43.86	74.00	30.14	PK	Horizontal
3	7320.600	55.20	37.58	-39.67	53.11	74.00	20.89	PK	Horizontal
4	8274.300	48.09	37.95	-39.11	46.93	74.00	27.07	PK	Horizontal
5	10922.900	45.98	39.85	-35.95	49.88	74.00	24.12	PK	Horizontal
6	11582.500	46.32	39.64	-35.12	50.84	74.00	23.16	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7319.302	51.20	37.58	-39.67	49.11	54.00	4.89	AV	Horizontal
2	10922.900	34.72	39.85	-35.95	38.62	54.00	15.38	AV	Horizontal
3	11582.500	34.81	39.64	-35.12	39.33	54.00	14.67	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\36
Memo: R Sample number:S26081111-003 Power Setting:7

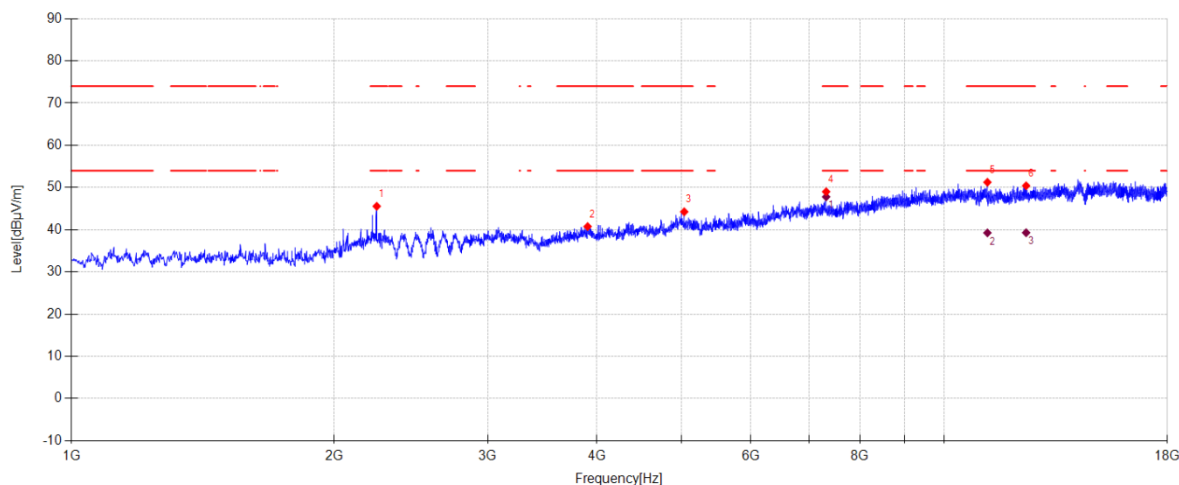**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2237.600	57.50	28.10	-40.04	45.56	74.00	28.44	PK	Vertical
2	3901.900	49.96	31.60	-40.81	40.75	74.00	33.25	PK	Vertical
3	5034.100	51.11	33.97	-40.83	44.25	74.00	29.75	PK	Vertical
4	7320.600	51.09	37.58	-39.67	49.00	74.00	25.00	PK	Vertical
5	11200.000	46.71	39.90	-35.36	51.25	74.00	22.75	PK	Vertical
6	12403.600	45.29	39.70	-34.58	50.41	74.00	23.59	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7320.600	49.88	37.58	-39.67	47.79	54.00	6.21	AV	Vertical
2	11200.000	34.71	39.90	-35.36	39.25	54.00	14.75	AV	Vertical
3	12403.600	34.17	39.70	-34.58	39.29	54.00	14.71	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijing
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\37
Memo: R Sample number:S26081111-003 Power Setting:7

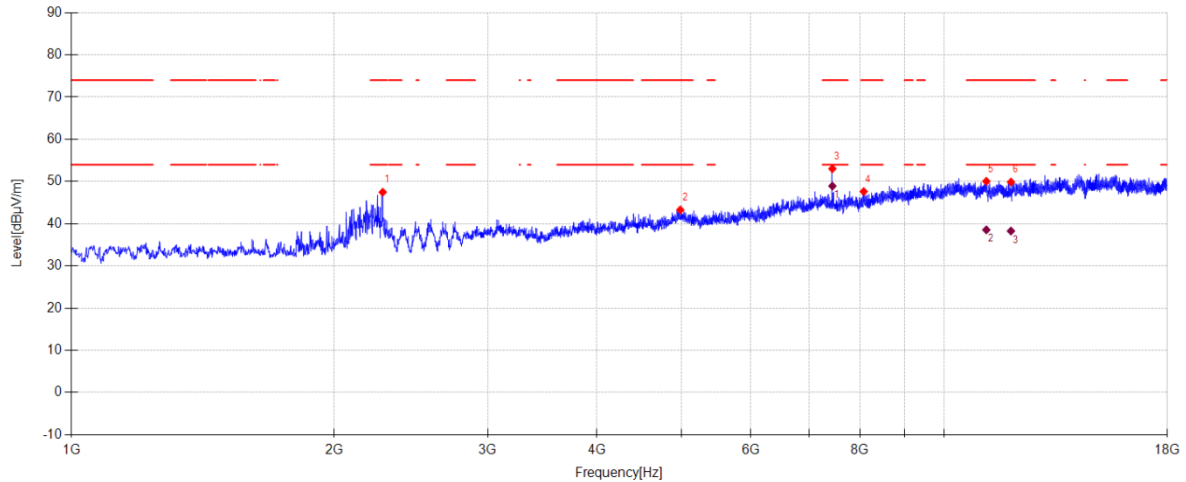**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2273.300	59.43	28.10	-40.06	47.47	74.00	26.53	PK	Horizontal
2	4983.100	50.18	33.83	-40.74	43.27	74.00	30.73	PK	Horizontal
3	7441.300	55.76	37.12	-39.85	53.03	74.00	20.97	PK	Horizontal
4	8082.200	49.01	37.90	-39.28	47.63	74.00	26.37	PK	Horizontal
5	11167.700	45.50	39.84	-35.28	50.06	74.00	23.94	PK	Horizontal
6	11917.400	45.79	39.63	-35.55	49.87	74.00	24.13	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7441.300	51.65	37.12	-39.85	48.92	54.00	5.08	AV	Horizontal
2	11167.700	33.99	39.84	-35.28	38.55	54.00	15.45	AV	Horizontal
3	11917.400	34.19	39.63	-35.55	38.27	54.00	15.73	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-19 **Tested By:** Liang Rijong
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.5°C;Humi:49.2% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26081111-1E\FCC ABOVE 1G BLE\38
Memo: R Sample number:S26081111-003 Power Setting:7

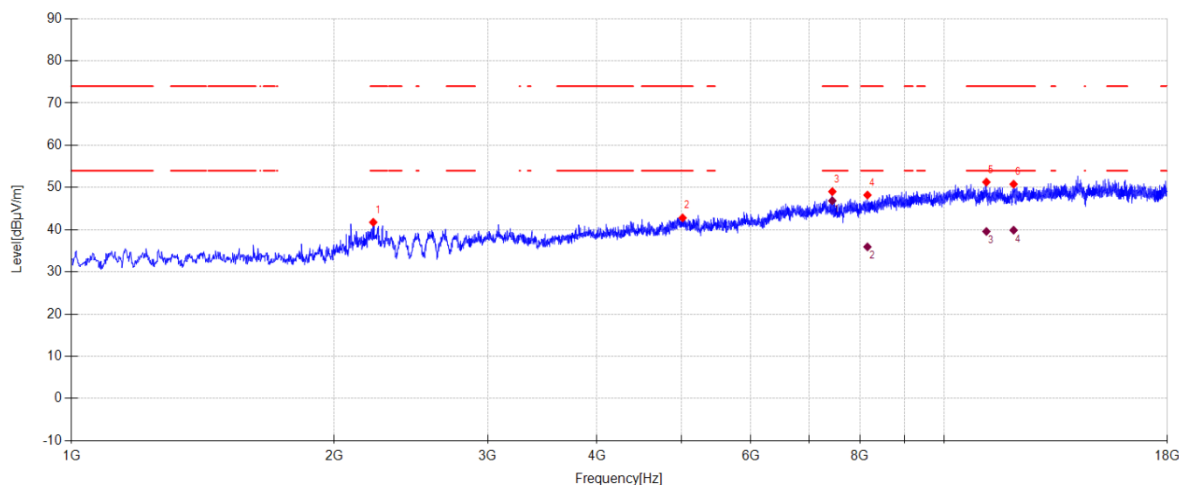

Suspected Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2217.200	53.70	28.10	-40.04	41.76	74.00	32.24	PK	Vertical
2	5013.700	49.58	33.93	-40.71	42.80	74.00	31.20	PK	Vertical
3	7439.600	51.75	37.12	-39.84	49.03	74.00	24.97	PK	Vertical
4	8162.100	49.47	37.90	-39.16	48.21	74.00	25.79	PK	Vertical
5	11169.400	46.72	39.84	-35.28	51.28	74.00	22.72	PK	Vertical
6	12000.700	45.66	39.80	-34.67	50.79	74.00	23.21	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7439.600	49.58	37.12	-39.84	46.86	54.00	7.14	AV	Vertical
2	8162.100	37.20	37.90	-39.16	35.94	54.00	18.06	AV	Vertical
3	11169.400	35.03	39.84	-35.28	39.59	54.00	14.41	AV	Vertical
4	12000.700	34.76	39.80	-34.67	39.89	54.00	14.11	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.