

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-04

Tested By:

Liang Rijing

Test Mode:

TX MIMO N20 5320MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\42

Memo:

Sample Number: S26072701-001

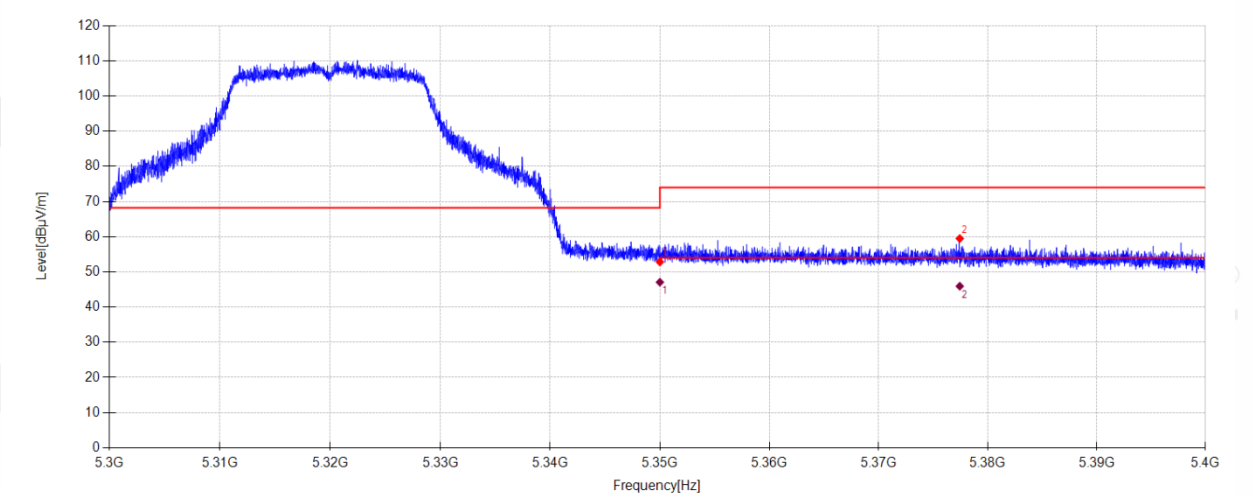

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.32	33.70	-25.19	52.83	68.20	15.37	PK	Horizontal
2	5377.430	50.83	33.70	-25.05	59.48	74.00	14.52	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.57	33.70	-25.19	47.08	54.00	6.92	AV	Horizontal
2	5377.430	37.29	33.70	-25.05	45.94	54.00	8.06	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-04

Tested By:

Liang Rijing

Test Mode:

TX MIMO N20 5320MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\43

Memo:

Sample Number: S26072701-001

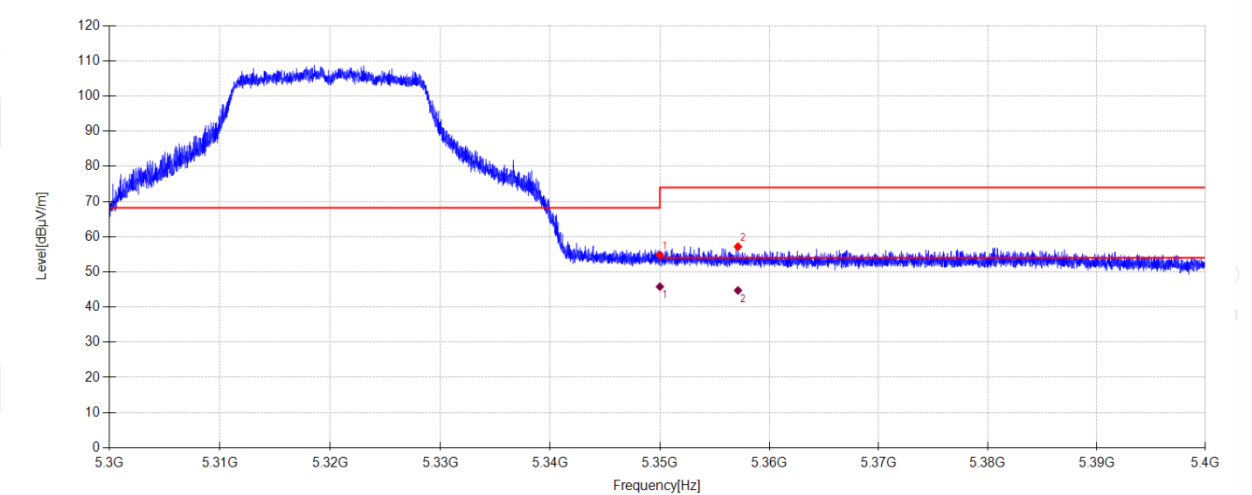

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	46.32	33.70	-25.19	54.83	68.20	13.37	PK	Vertical
2	5357.130	48.63	33.70	-25.15	57.18	74.00	16.82	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	37.29	33.70	-25.19	45.80	54.00	8.20	AV	Vertical
2	5357.130	36.18	33.70	-25.15	44.73	54.00	9.27	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-04 **Tested By:** Liang Rijing
Test Mode: TX MIMO N20 5500MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\40
Memo: Sample Number: S26072701-001

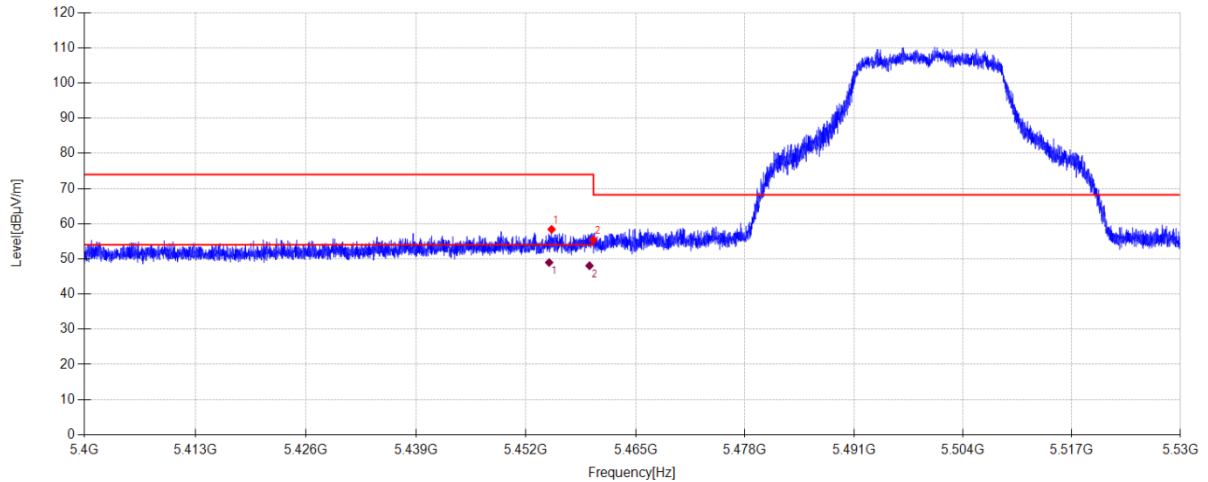**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.042	49.29	33.80	-24.70	58.39	74.00	15.61	PK	Horizontal
2	5460.000	46.31	33.80	-24.68	55.43	68.20	12.77	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.754	39.88	33.80	-24.70	48.98	54.00	5.02	AV	Horizontal
2	5459.532	38.94	33.80	-24.68	48.06	54.00	5.94	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-04 **Tested By:** Liang Rijing
Test Mode: TX MIMO N20 5500MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\41
Memo: Sample Number: S26072701-001

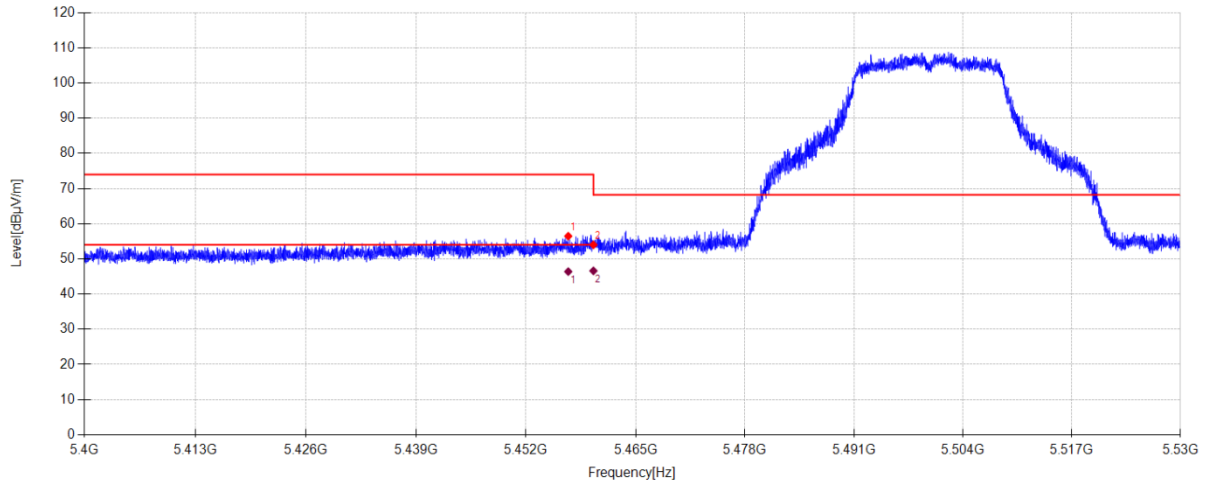**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.018	47.37	33.80	-24.70	56.47	74.00	17.53	PK	Vertical
2	5460.000	44.89	33.80	-24.68	54.01	68.20	14.19	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.018	37.29	33.80	-24.70	46.39	54.00	7.61	AV	Vertical
2	5460.000	37.48	33.80	-24.68	46.60	54.00	7.40	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-04

Tested By:

Liang Rijing

Test Mode:

TX MIMO N20 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\38

Memo:

Sample Number: S26072701-001

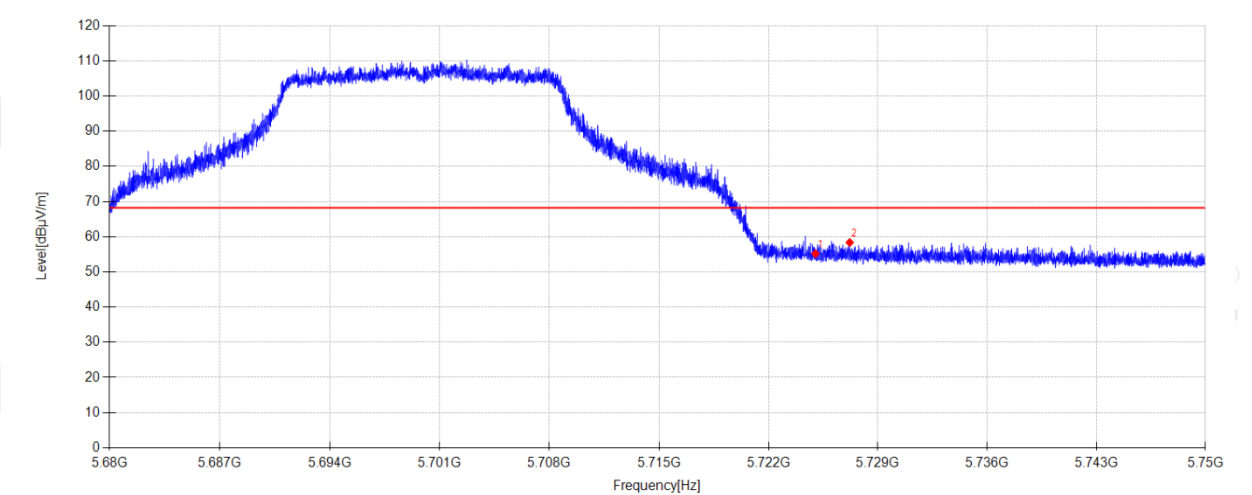

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.66	34.30	-24.79	55.17	68.20	13.03	PK	Horizontal
2	5727.194	48.85	34.31	-24.79	58.37	68.20	9.83	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-04

Tested By:

Liang Rijing

Test Mode:

TX MIMO N20 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\39

Memo:

Sample Number: S26072701-001

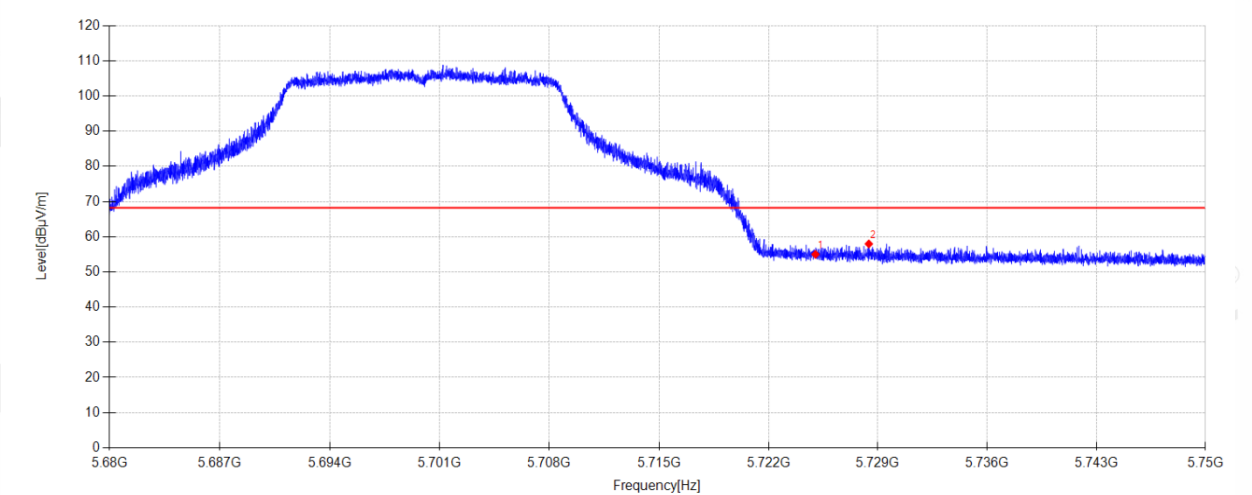

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.48	34.30	-24.79	54.99	68.20	13.21	PK	Vertical
2	5728.419	48.44	34.31	-24.79	57.96	68.20	10.24	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-04 **Tested By:** Liang Rijing
Test Mode: TX MIMO N40 5190MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\46
Memo: Sample Number: S26072701-001

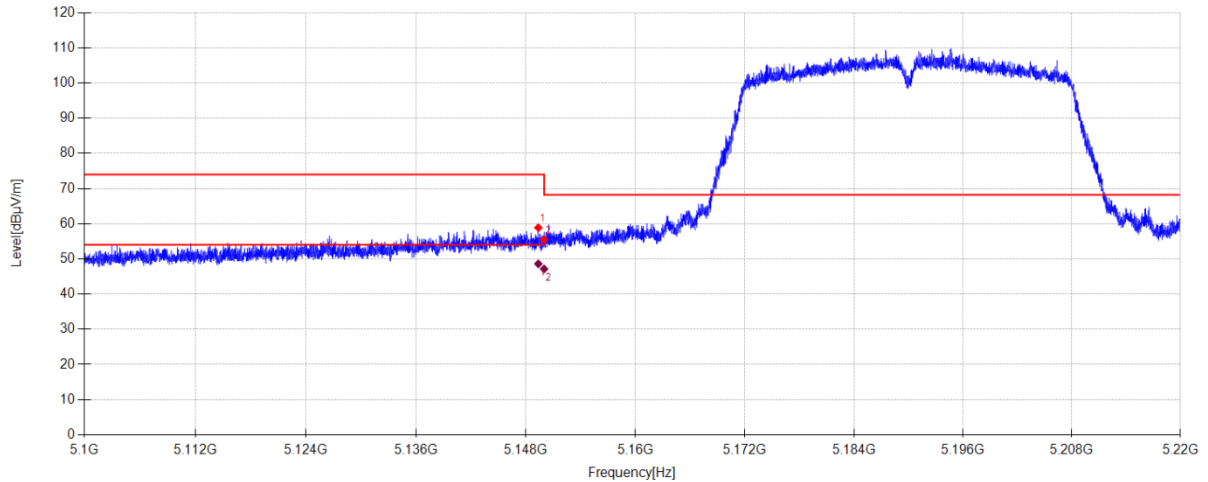

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.368	49.98	33.90	-25.02	58.86	74.00	15.14	PK	Horizontal
2	5150.000	46.61	33.90	-25.02	55.49	68.20	12.71	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.368	39.72	33.90	-25.02	48.60	54.00	5.40	AV	Horizontal
2	5150.000	38.26	33.90	-25.02	47.14	54.00	6.86	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-04 **Tested By:** Liang Rijing
Test Mode: TX MIMO N40 5190MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\47
Memo: Sample Number: S26072701-001

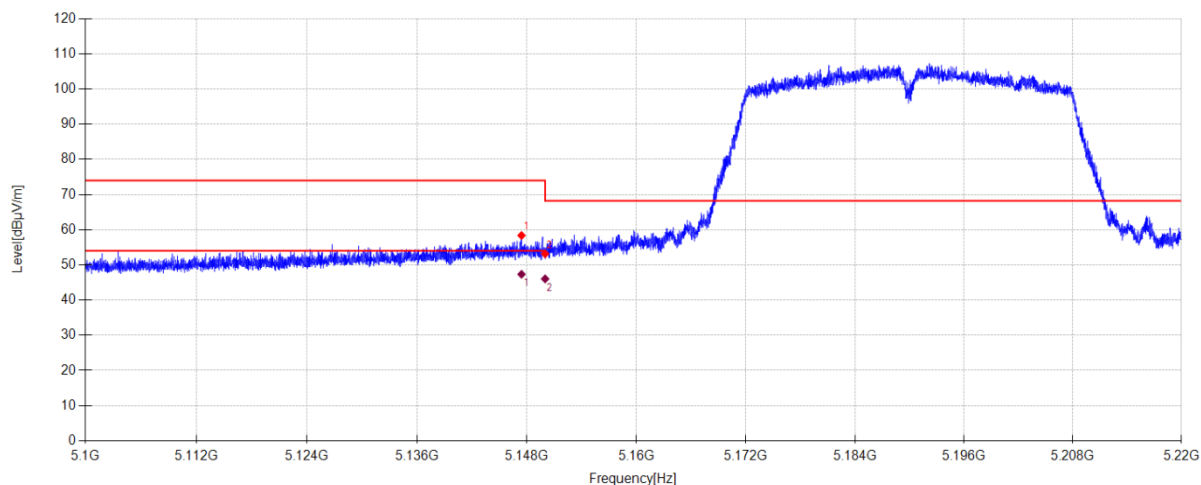

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.424	49.48	33.91	-25.02	58.37	74.00	15.63	PK	Vertical
2	5150.000	44.28	33.90	-25.02	53.16	68.20	15.04	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.424	38.45	33.91	-25.02	47.34	54.00	6.66	AV	Vertical
2	5150.000	37.14	33.90	-25.02	46.02	54.00	7.98	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5310MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\48
Memo: Sample Number: S26072701-001

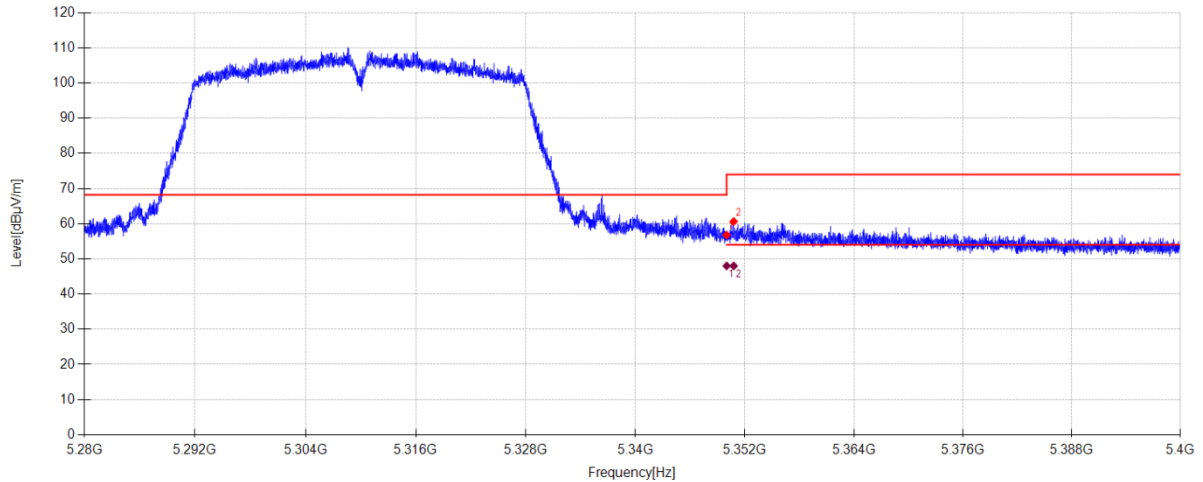

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	48.27	33.70	-25.18	56.79	68.20	11.41	PK	Horizontal
2	5350.776	52.13	33.70	-25.18	60.65	74.00	13.35	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.50	33.70	-25.19	48.01	54.00	5.99	AV	Horizontal
2	5350.776	39.48	33.70	-25.18	48.00	54.00	6.00	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5310MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\49
Memo: Sample Number: S26072701-001

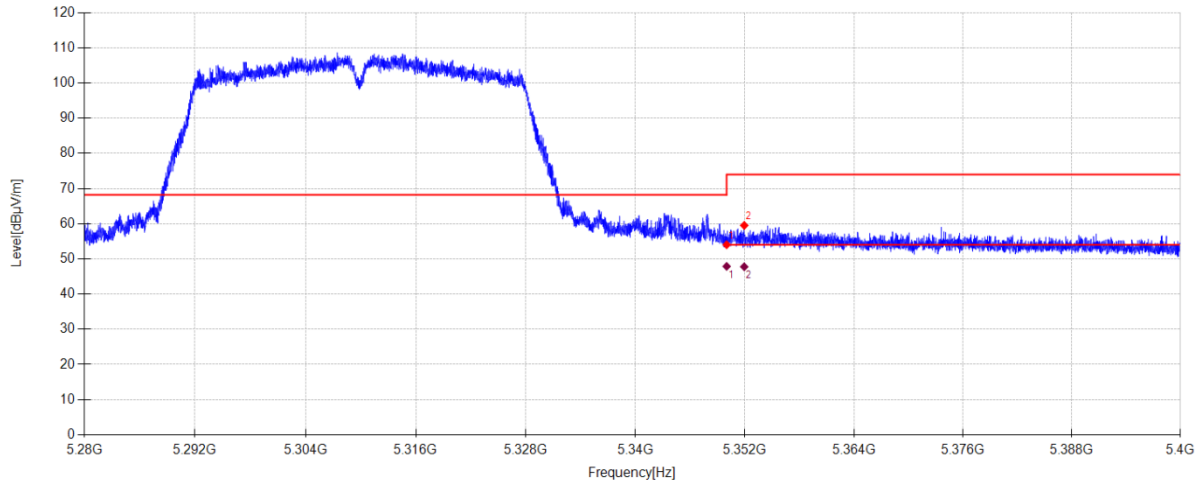

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.51	33.70	-25.18	54.03	68.20	14.17	PK	Vertical
2	5351.928	50.99	33.70	-25.18	59.51	74.00	14.49	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.35	33.70	-25.18	47.87	54.00	6.13	AV	Vertical
2	5351.928	39.24	33.70	-25.18	47.76	54.00	6.24	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5510MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\50
Memo: Sample Number: S26072701-001

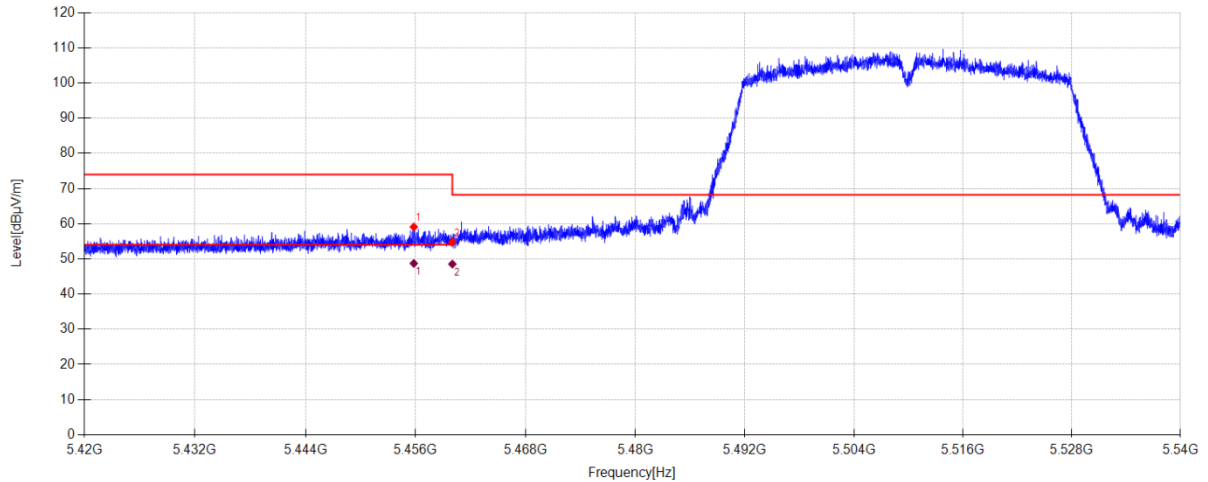

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.796	49.98	33.80	-24.70	59.08	74.00	14.92	PK	Horizontal
2	5460.000	45.68	33.80	-24.68	54.80	68.20	13.40	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.796	39.62	33.80	-24.70	48.72	54.00	5.28	AV	Horizontal
2	5460.000	39.41	33.80	-24.68	48.53	54.00	5.47	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5510MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\51
Memo: Sample Number: S26072701-001

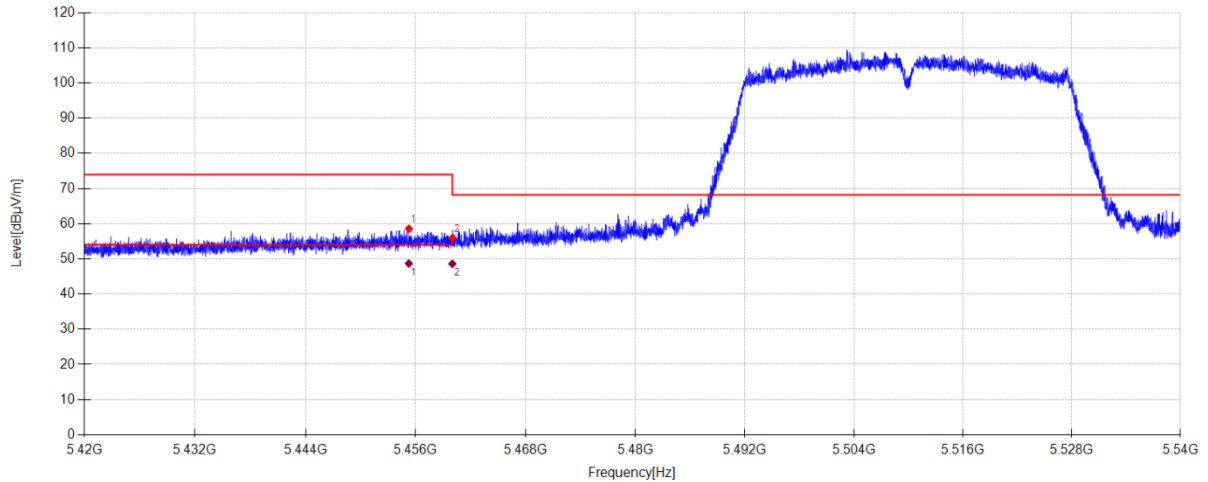**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.256	49.47	33.80	-24.70	58.57	74.00	15.43	PK	Vertical
2	5460.000	46.81	33.80	-24.68	55.93	68.20	12.27	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.256	39.59	33.80	-24.70	48.69	54.00	5.31	AV	Vertical
2	5460.000	39.48	33.80	-24.68	48.60	54.00	5.40	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\52

Memo:

Sample Number: S26072701-001

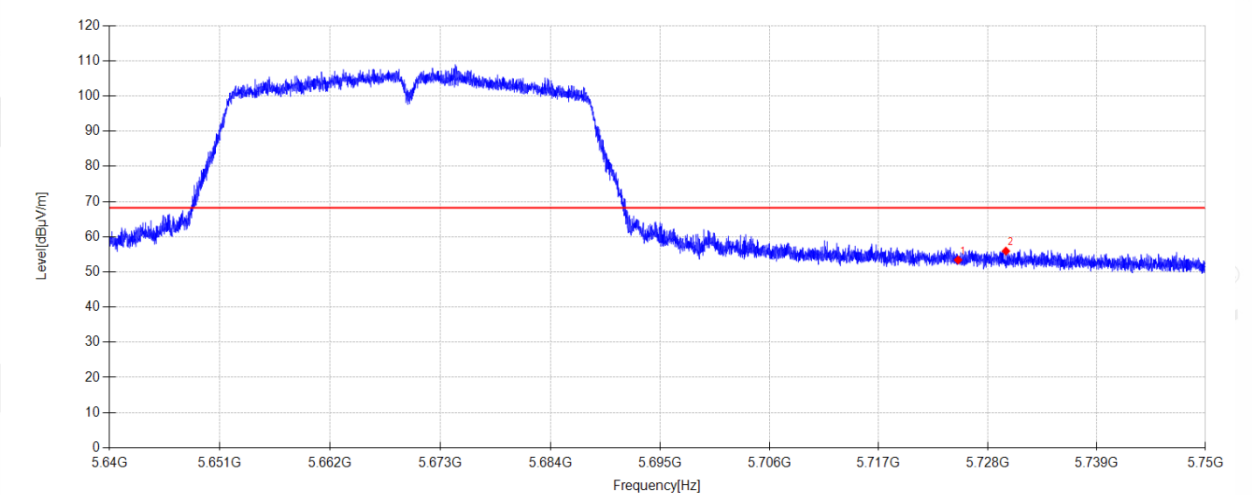

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.88	34.30	-24.79	53.39	68.20	14.81	PK	Horizontal
2	5729.826	46.39	34.32	-24.79	55.92	68.20	12.28	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5670MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\53

Memo:

Sample Number: S26072701-001

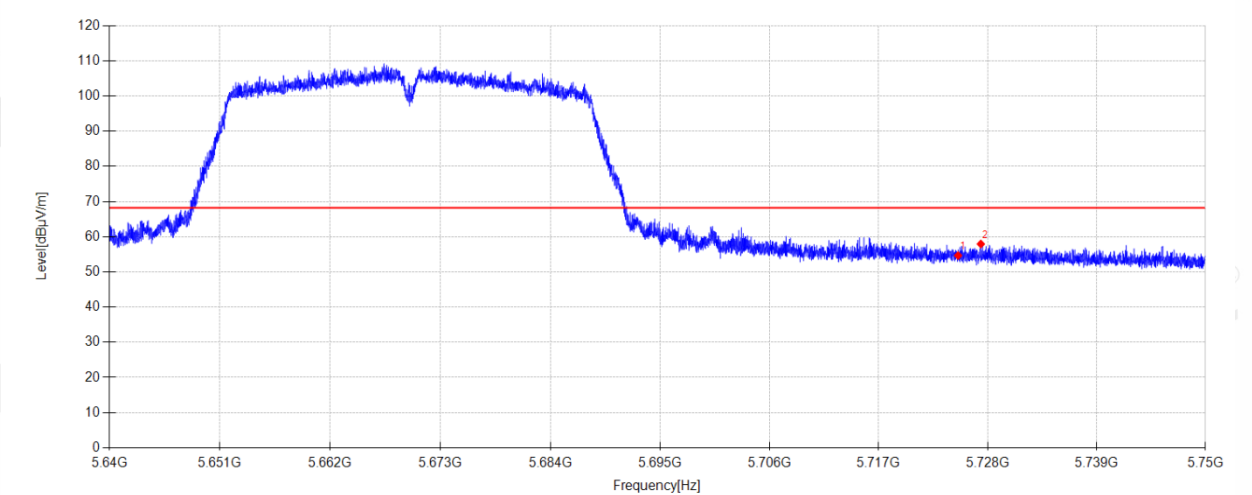

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.14	34.30	-24.79	54.65	68.20	13.55	PK	Vertical
2	5727.296	48.41	34.31	-24.79	57.93	68.20	10.27	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5180MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\70
Memo: Sample Number: S26072701-001

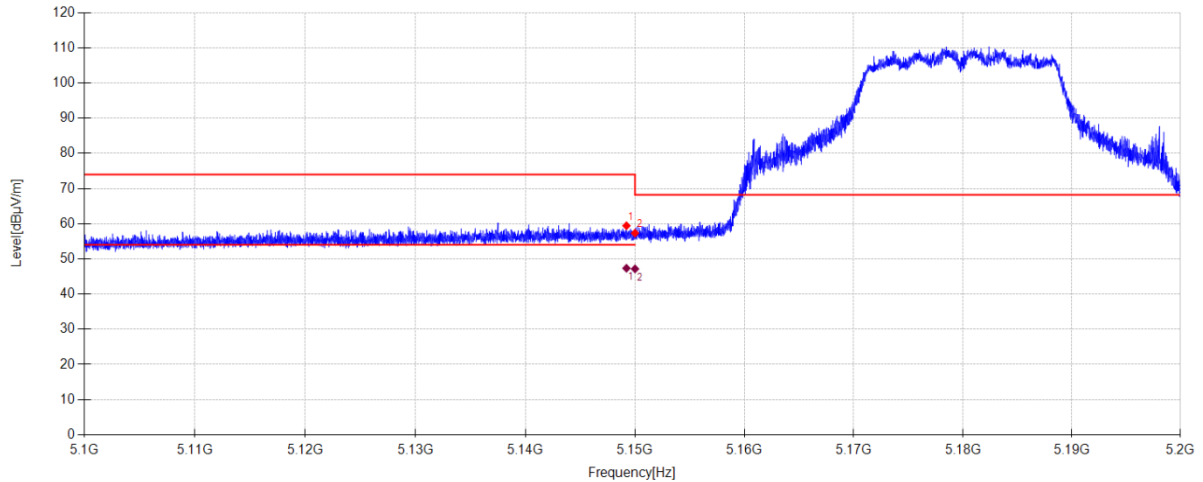**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.220	50.55	33.90	-25.02	59.43	74.00	14.57	PK	Horizontal
2	5150.000	48.45	33.90	-25.02	57.33	68.20	10.87	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.220	38.47	33.90	-25.02	47.35	54.00	6.65	AV	Horizontal
2	5149.999	38.29	33.90	-25.02	47.17	54.00	6.83	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5180MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\71

Memo:

Sample Number: S26072701-001

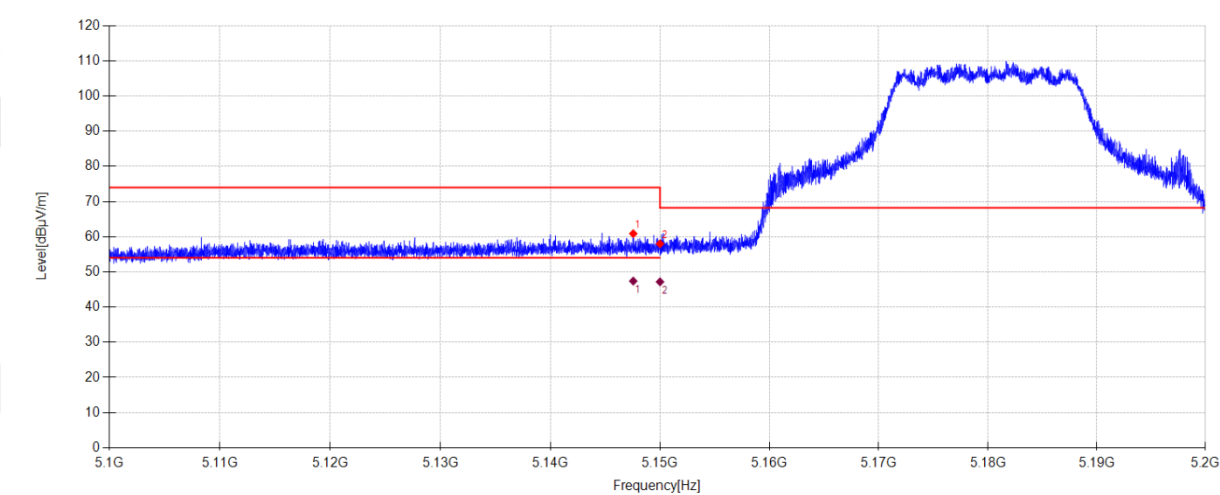

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.560	52.00	33.90	-25.02	60.88	74.00	13.12	PK	Vertical
2	5150.000	49.11	33.90	-25.02	57.99	68.20	10.21	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.560	38.51	33.90	-25.02	47.39	54.00	6.61	AV	Vertical
2	5150.000	38.30	33.90	-25.02	47.18	54.00	6.82	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5320MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\72
Memo: Sample Number: S26072701-001

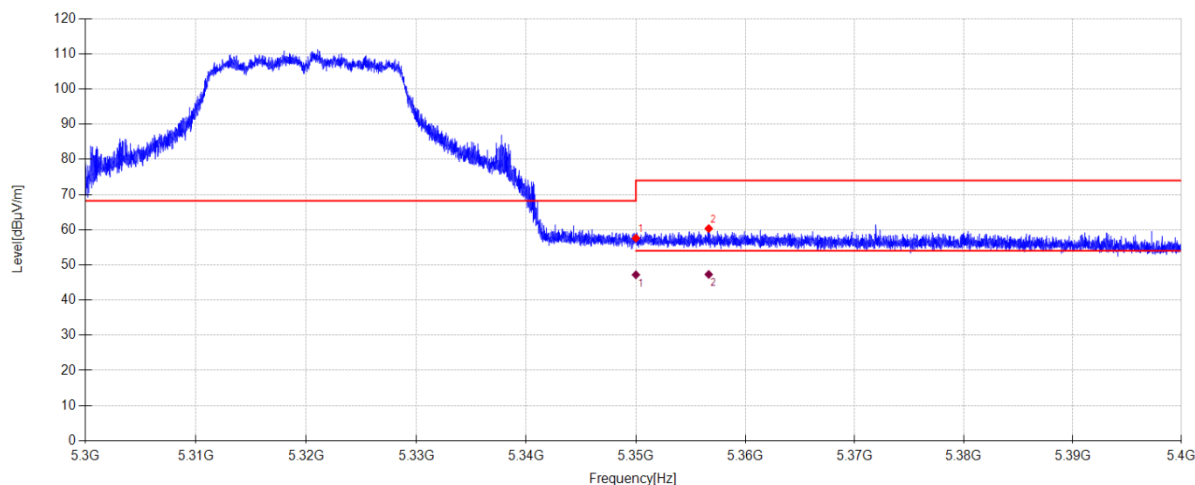

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	49.08	33.70	-25.19	57.59	68.20	10.61	PK	Horizontal
2	5356.650	51.77	33.70	-25.15	60.32	74.00	13.68	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.69	33.70	-25.19	47.20	54.00	6.80	AV	Horizontal
2	5356.650	38.74	33.70	-25.15	47.29	54.00	6.71	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5320MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\73
Memo: Sample Number: S26072701-001

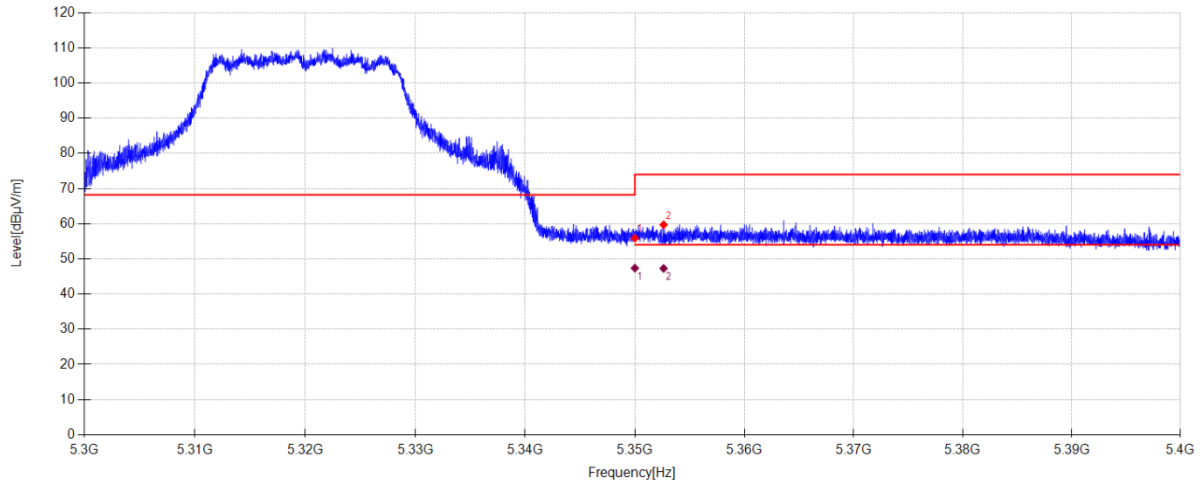**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	47.38	33.70	-25.19	55.89	68.20	12.31	PK	Vertical
2	5352.620	51.17	33.70	-25.17	59.70	74.00	14.30	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.86	33.70	-25.19	47.37	54.00	6.63	AV	Vertical
2	5352.620	38.75	33.70	-25.17	47.28	54.00	6.72	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5500MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\74
Memo: Sample Number: S26072701-001

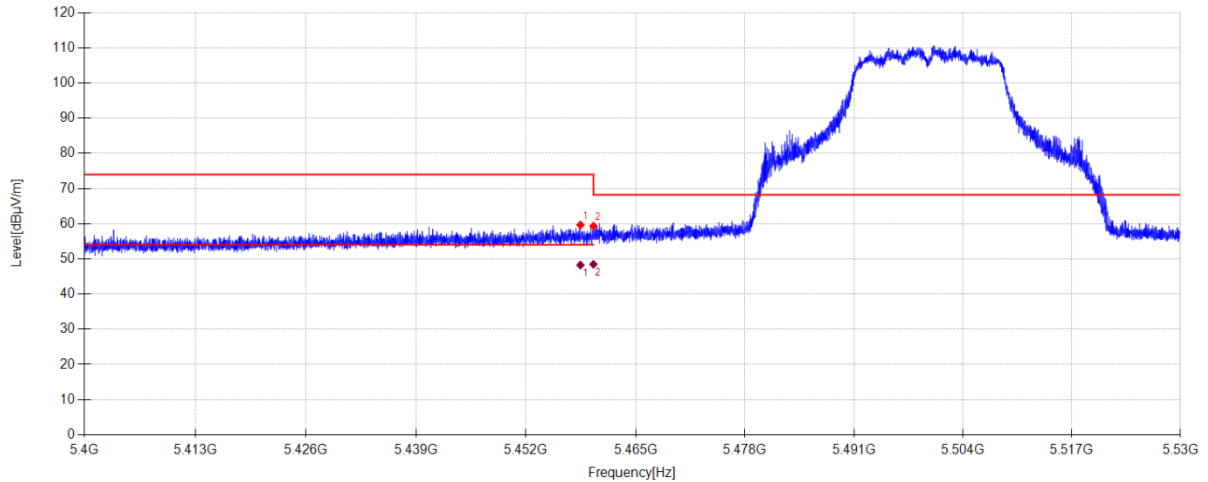

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.461	50.54	33.80	-24.69	59.65	74.00	14.35	PK	Horizontal
2	5460.000	50.21	33.80	-24.68	59.33	68.20	8.87	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.461	39.14	33.80	-24.69	48.25	54.00	5.75	AV	Horizontal
2	5460.000	39.35	33.80	-24.68	48.47	54.00	5.53	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5500MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\75
Memo: Sample Number: S26072701-001

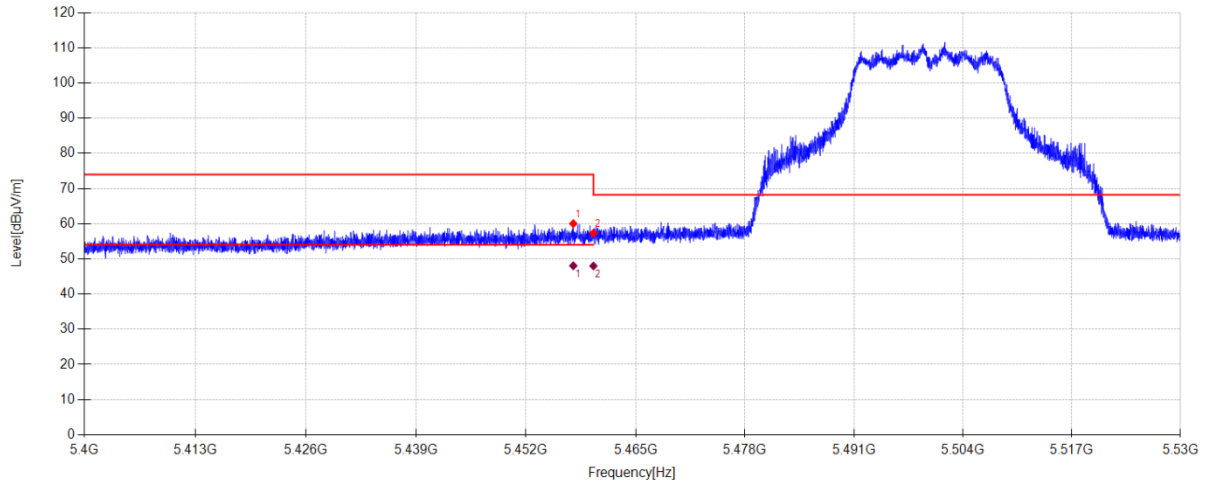**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.616	50.93	33.80	-24.69	60.04	74.00	13.96	PK	Vertical
2	5460.000	48.20	33.80	-24.68	57.32	68.20	10.88	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.616	38.94	33.80	-24.69	48.05	54.00	5.95	AV	Vertical
2	5460.000	38.86	33.80	-24.68	47.98	54.00	6.02	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\76

Memo:

Sample Number: S26072701-001

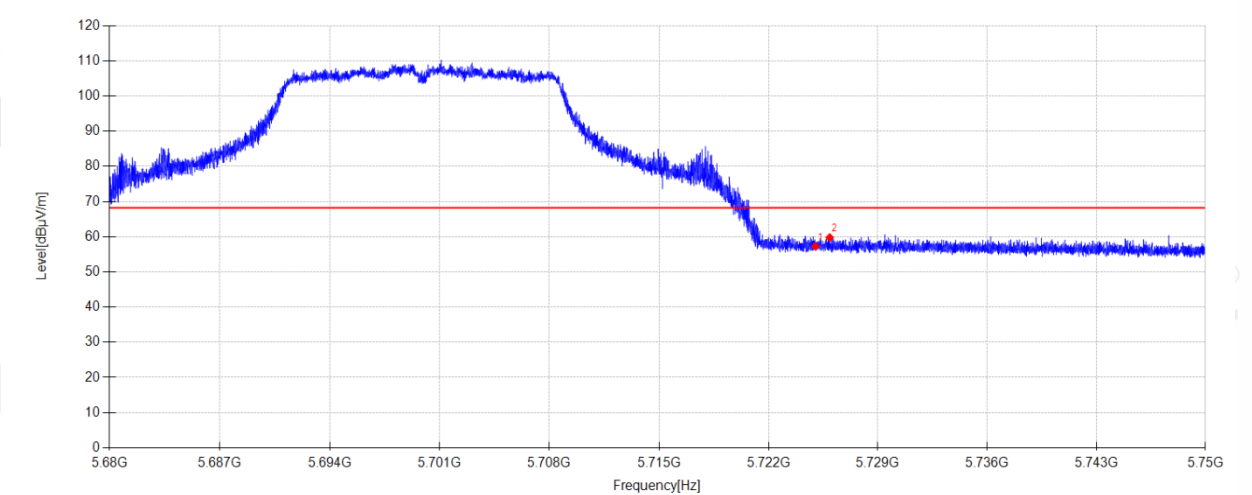

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	47.76	34.30	-24.79	57.27	68.20	10.93	PK	Horizontal
2	5725.913	50.26	34.30	-24.79	59.77	68.20	8.43	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\77

Memo:

Sample Number: S26072701-001

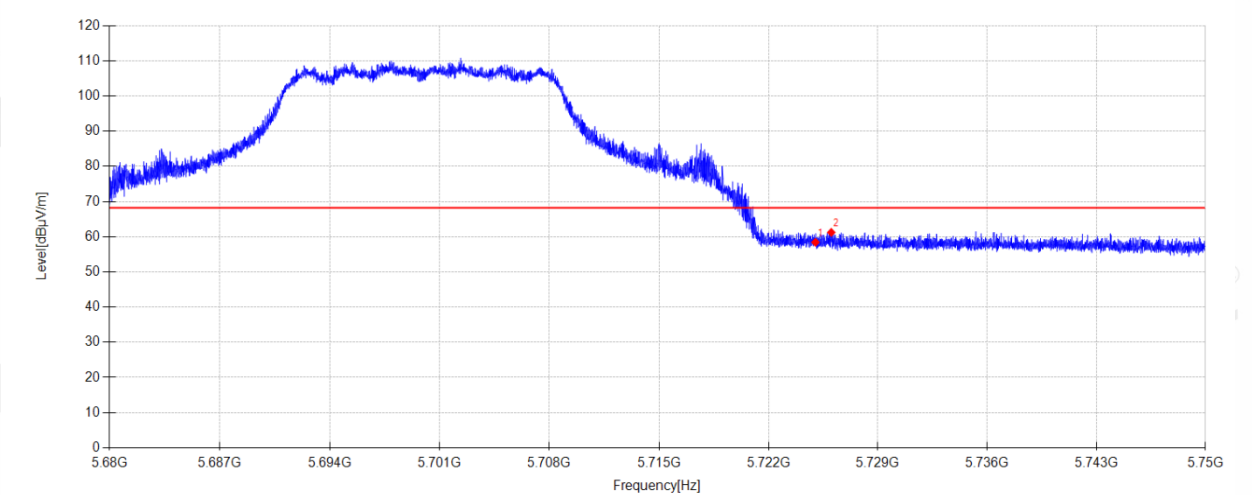

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	48.91	34.30	-24.79	58.42	68.20	9.78	PK	Vertical
2	5726.011	51.72	34.30	-24.79	61.23	68.20	6.97	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5190MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\78
Memo: Sample Number: S26072701-001

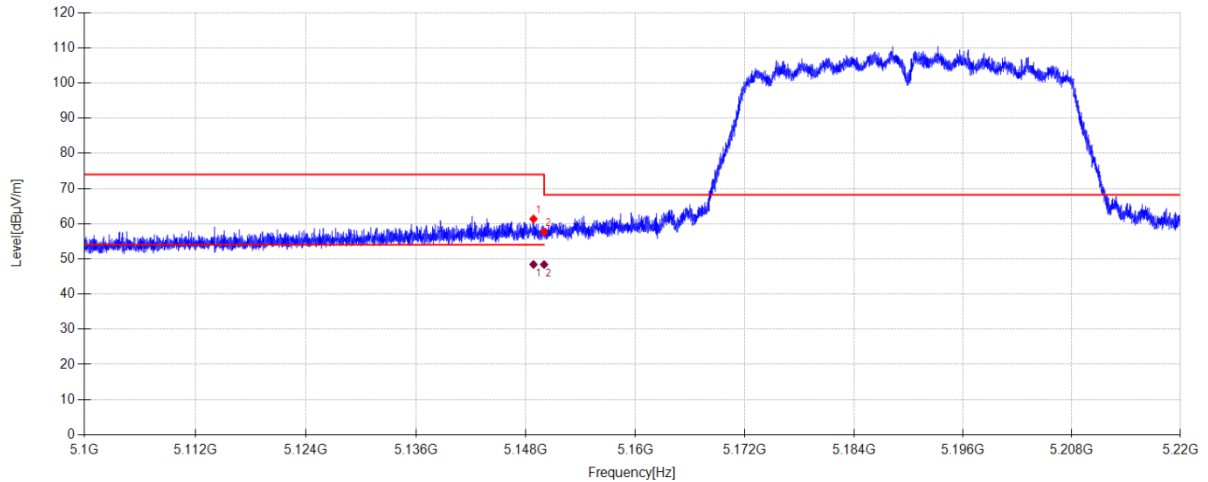

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.840	52.48	33.90	-25.02	61.36	74.00	12.64	PK	Horizontal
2	5150.000	48.73	33.90	-25.02	57.61	68.20	10.59	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.840	39.54	33.90	-25.02	48.42	54.00	5.58	AV	Horizontal
2	5150.000	39.51	33.90	-25.02	48.39	54.00	5.61	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5190MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\79
Memo: Sample Number: S26072701-001

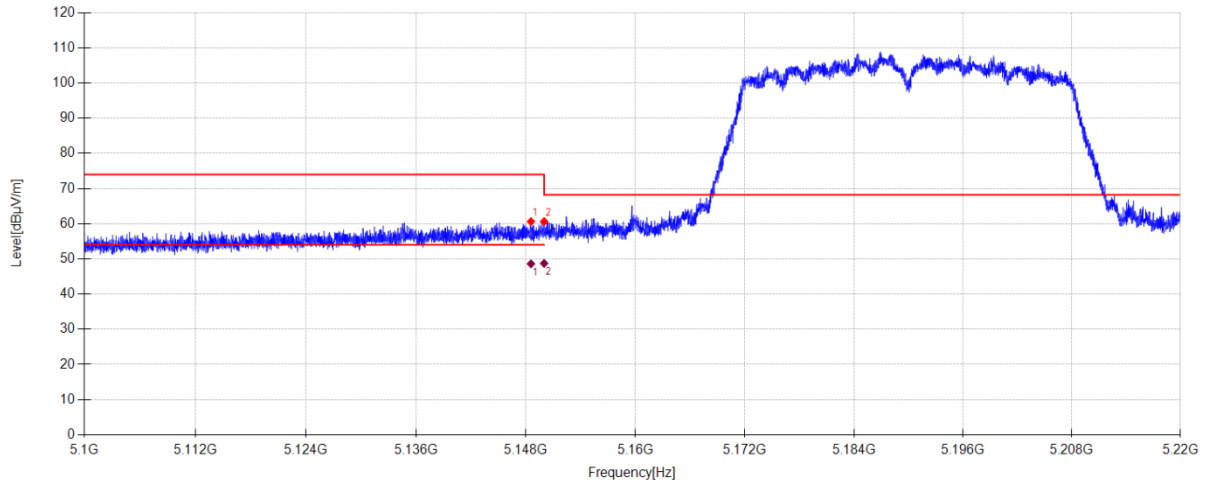**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.564	51.74	33.90	-25.02	60.62	74.00	13.38	PK	Vertical
2	5150.000	51.74	33.90	-25.02	60.62	68.20	7.58	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.564	39.72	33.90	-25.02	48.60	54.00	5.40	AV	Vertical
2	5150.000	39.84	33.90	-25.02	48.72	54.00	5.28	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5310MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\80
Memo: Sample Number: S26072701-001

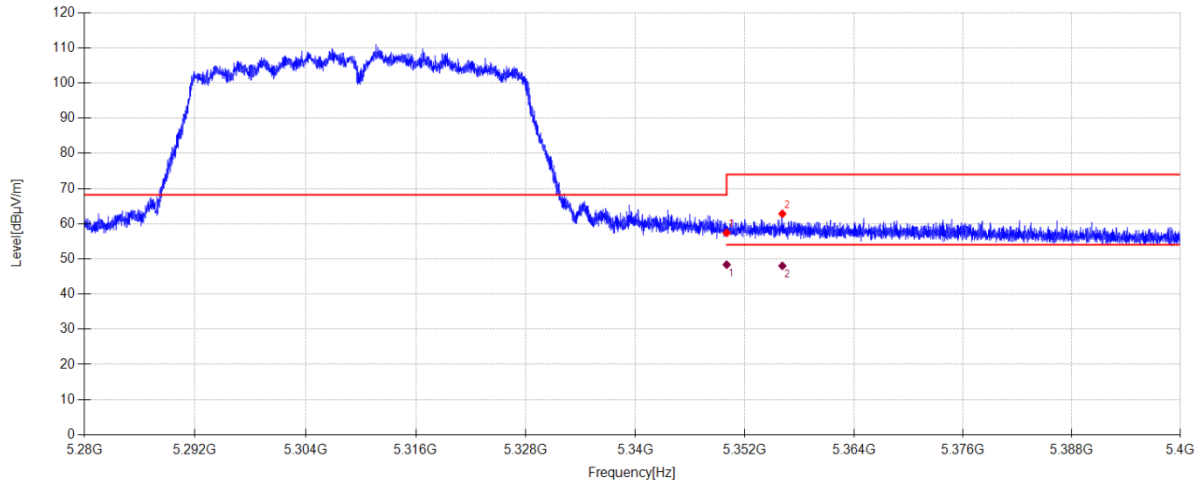**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	48.87	33.70	-25.18	57.39	68.20	10.81	PK	Horizontal
2	5356.116	54.27	33.70	-25.15	62.82	74.00	11.18	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.84	33.70	-25.19	48.35	54.00	5.65	AV	Horizontal
2	5356.116	39.47	33.70	-25.15	48.02	54.00	5.98	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5310MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\81
Memo: Sample Number: S26072701-001

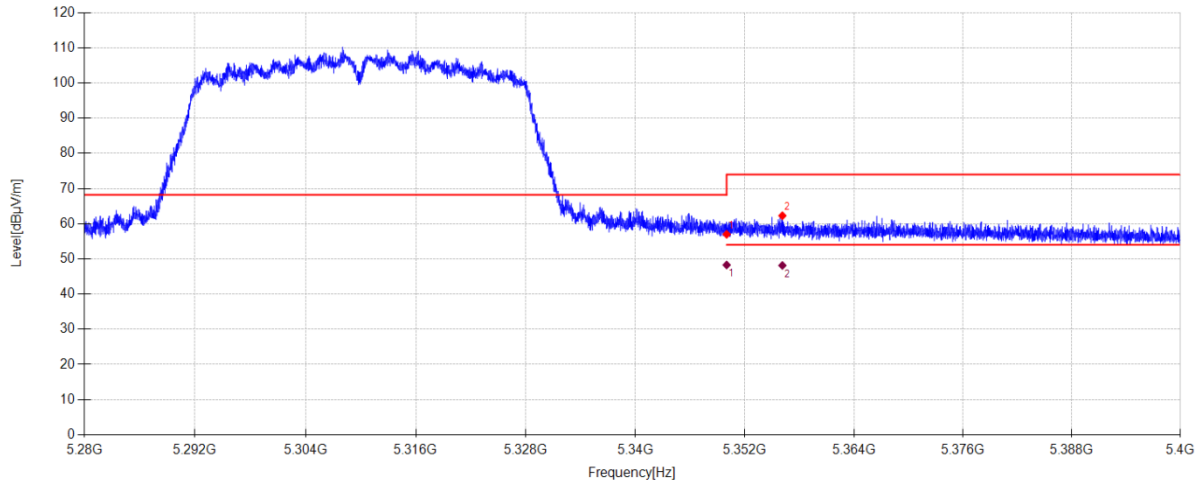**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	48.48	33.70	-25.18	57.00	68.20	11.20	PK	Vertical
2	5356.116	53.73	33.70	-25.15	62.28	74.00	11.72	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.75	33.70	-25.18	48.27	54.00	5.73	AV	Vertical
2	5356.116	39.58	33.70	-25.15	48.13	54.00	5.87	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5510MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\82
Memo: Sample Number: S26072701-001

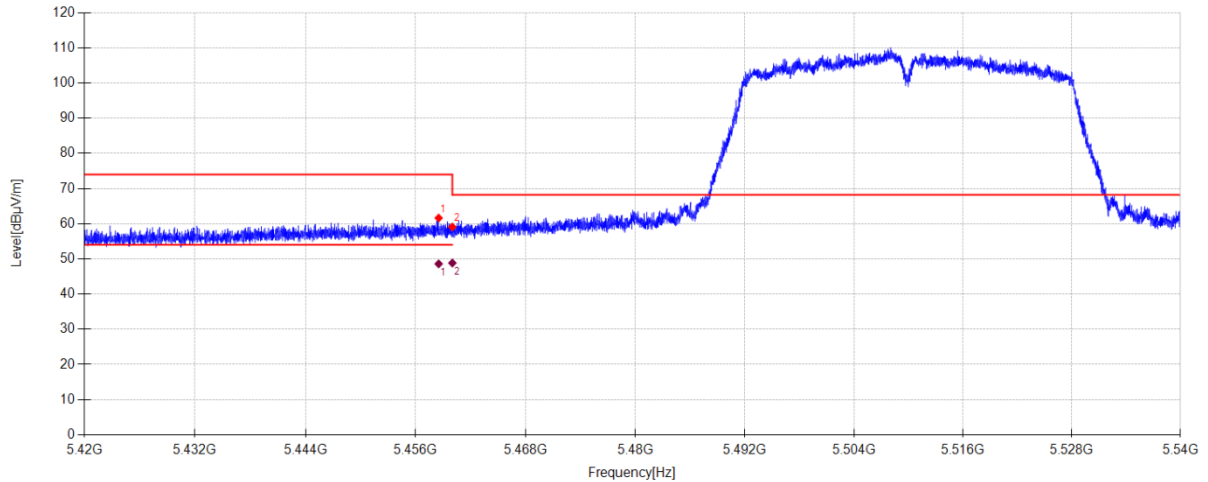**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.508	52.52	33.80	-24.69	61.63	74.00	12.37	PK	Horizontal
2	5460.000	49.96	33.80	-24.68	59.08	68.20	9.12	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.508	39.48	33.80	-24.69	48.59	54.00	5.41	AV	Horizontal
2	5460.000	39.71	33.80	-24.68	48.83	54.00	5.17	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC40 5510MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\83
Memo: Sample Number: S26072701-001

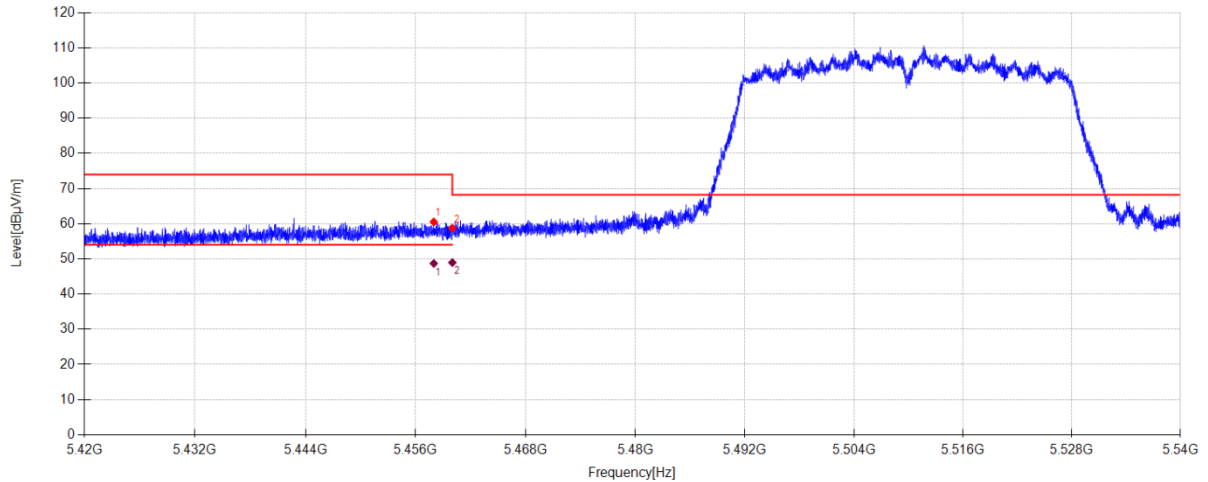**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.980	51.40	33.80	-24.69	60.51	74.00	13.49	PK	Vertical
2	5460.000	49.61	33.80	-24.68	58.73	68.20	9.47	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.980	39.59	33.80	-24.69	48.70	54.00	5.30	AV	Vertical
2	5460.000	39.84	33.80	-24.68	48.96	54.00	5.04	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\84

Memo:

Sample Number: S26072701-001

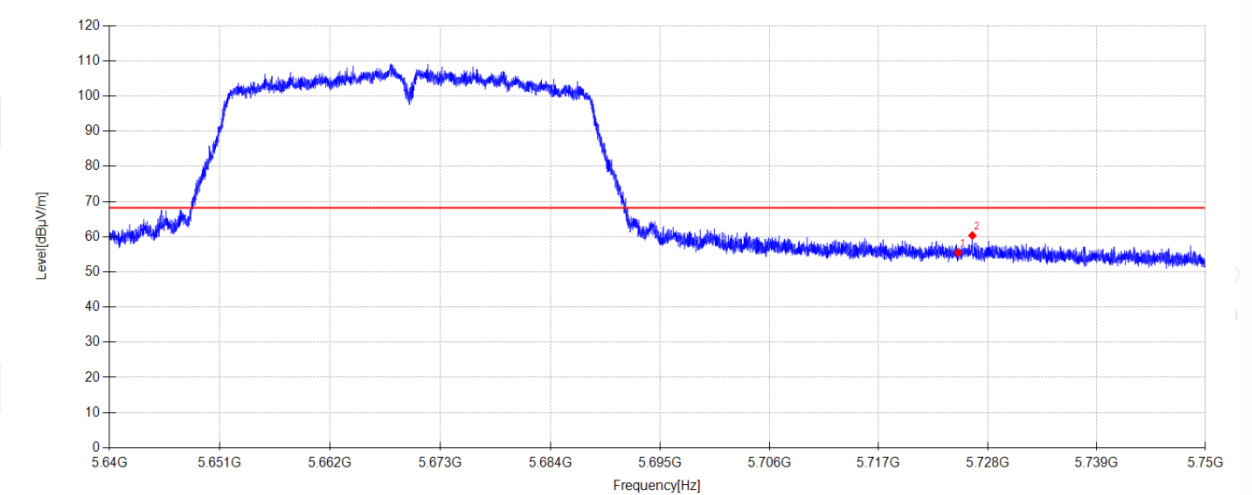

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.97	34.30	-24.79	55.48	68.20	12.72	PK	Horizontal
2	5726.438	50.82	34.31	-24.79	60.34	68.20	7.86	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5670MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\85

Memo:

Sample Number: S26072701-001

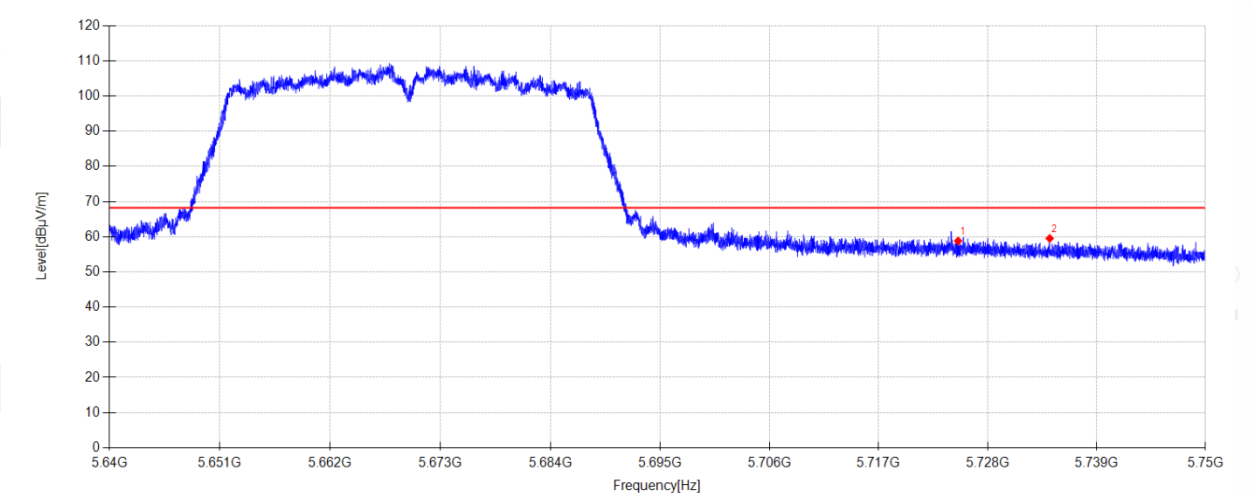

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	49.29	34.30	-24.79	58.80	68.20	9.40	PK	Vertical
2	5734.248	49.96	34.34	-24.78	59.52	68.20	8.68	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5210MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\86
Memo: Sample Number: S26072701-001

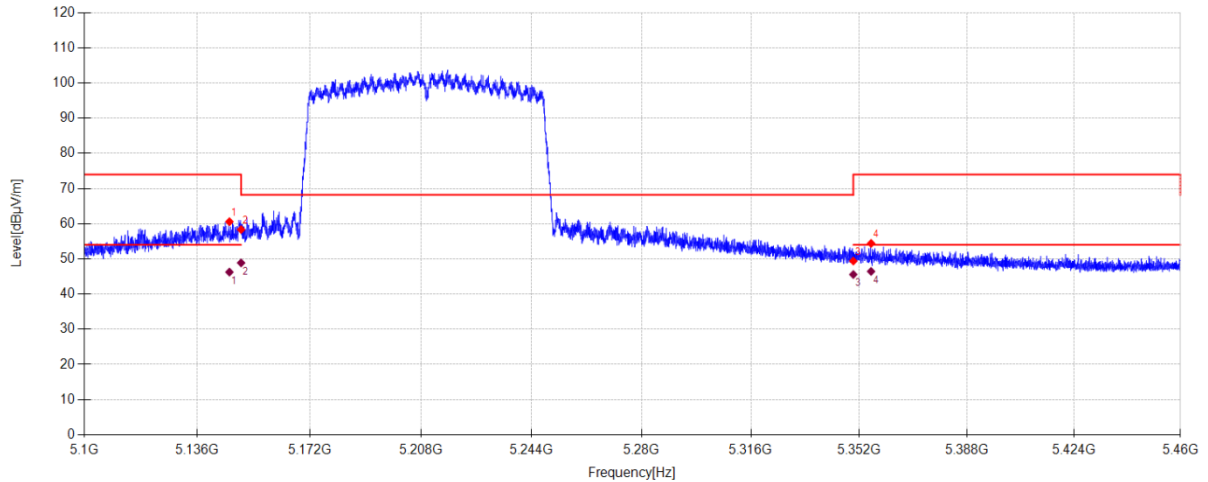**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.260	51.69	33.91	-25.02	60.58	74.00	13.42	PK	Horizontal
2	5150.000	49.46	33.90	-25.02	58.34	68.20	9.86	PK	Horizontal
3	5350.000	40.88	33.70	-25.18	49.40	68.20	18.80	PK	Horizontal
4	5355.924	45.85	33.70	-25.15	54.40	74.00	19.60	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.258	37.36	33.91	-25.02	46.25	54.00	7.75	AV	Horizontal
2	5149.999	39.99	33.90	-25.02	48.87	54.00	5.13	AV	Horizontal
3	5350.000	37.04	33.70	-25.18	45.56	54.00	8.44	AV	Horizontal
4	5355.924	37.89	33.70	-25.15	46.44	54.00	7.56	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5210MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\87
Memo: Sample Number: S26072701-001

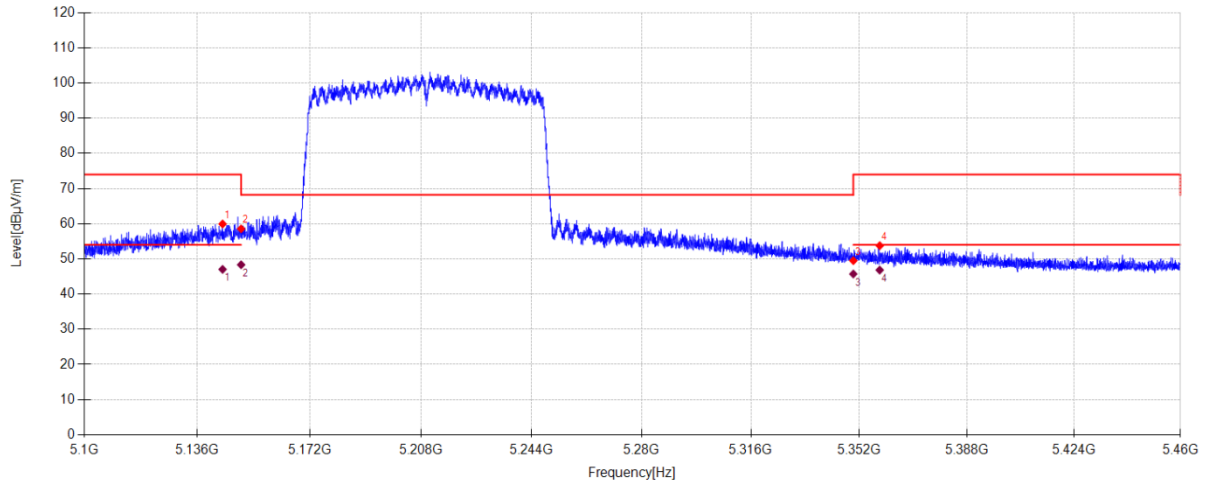

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.064	51.03	33.91	-25.02	59.92	74.00	14.08	PK	Vertical
2	5150.000	49.67	33.90	-25.02	58.55	68.20	9.65	PK	Vertical
3	5350.000	40.98	33.70	-25.18	49.50	68.20	18.70	PK	Vertical
4	5358.804	45.20	33.70	-25.14	53.76	74.00	20.24	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.064	38.14	33.91	-25.02	47.03	54.00	6.97	AV	Vertical
2	5150.000	39.45	33.90	-25.02	48.33	54.00	5.67	AV	Vertical
3	5350.000	37.20	33.70	-25.18	45.72	54.00	8.28	AV	Vertical
4	5358.804	38.27	33.70	-25.14	46.83	54.00	7.17	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5290MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\88
Memo: Sample Number: S26072701-001

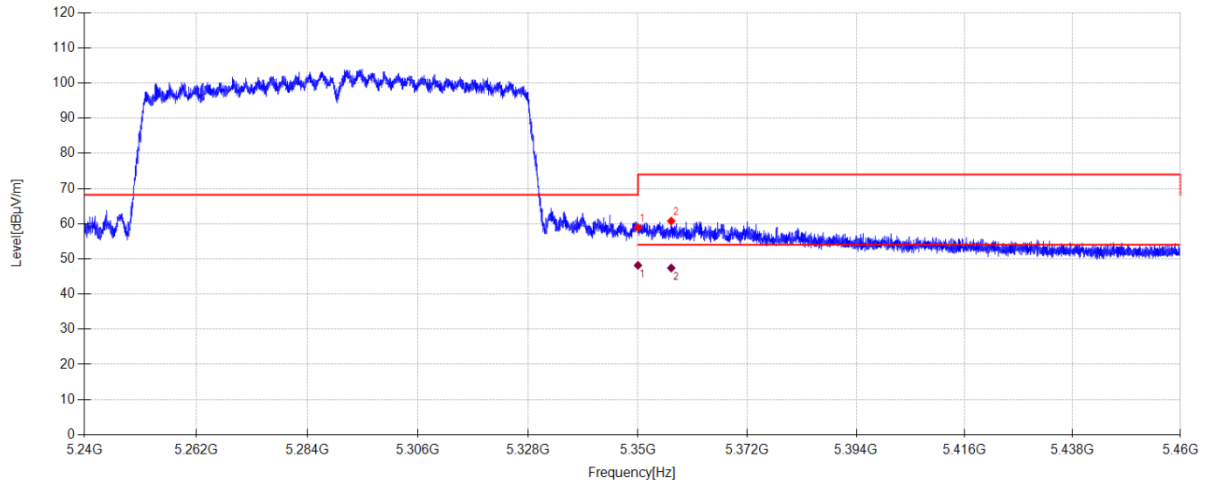**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	50.40	33.70	-25.19	58.91	68.20	9.29	PK	Horizontal
2	5356.688	52.20	33.70	-25.15	60.75	74.00	13.25	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.65	33.70	-25.19	48.16	54.00	5.84	AV	Horizontal
2	5356.688	38.86	33.70	-25.15	47.41	54.00	6.59	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5290MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\89

Memo:

Sample Number: S26072701-001

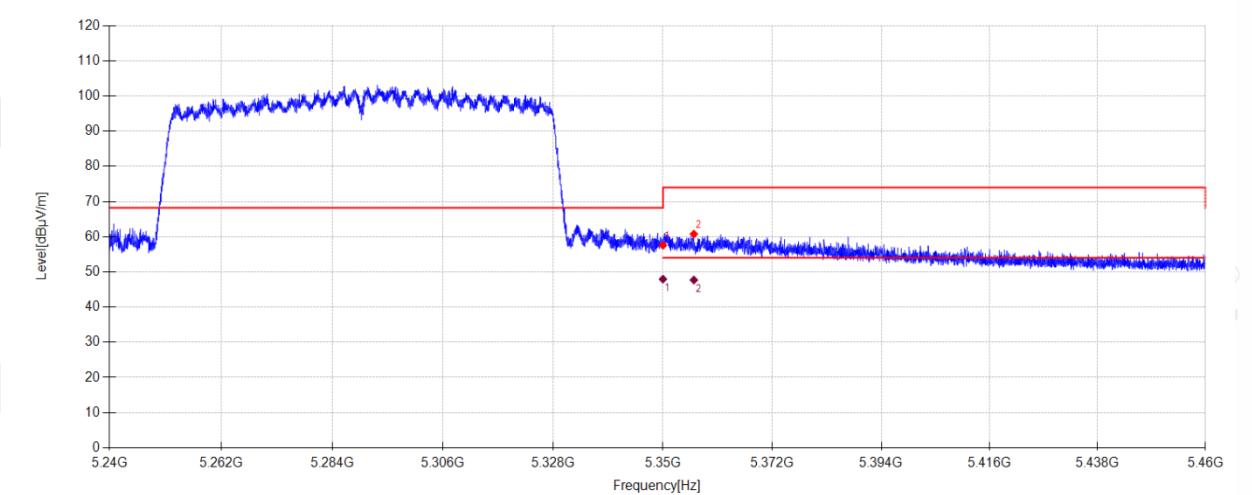

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	49.04	33.70	-25.19	57.55	68.20	10.65	PK	Vertical
2	5356.204	52.20	33.70	-25.15	60.75	74.00	13.25	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	39.44	33.70	-25.19	47.95	54.00	6.05	AV	Vertical
2	5356.204	39.14	33.70	-25.15	47.69	54.00	6.31	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5530MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\90

Memo:

Sample Number: S26072701-001

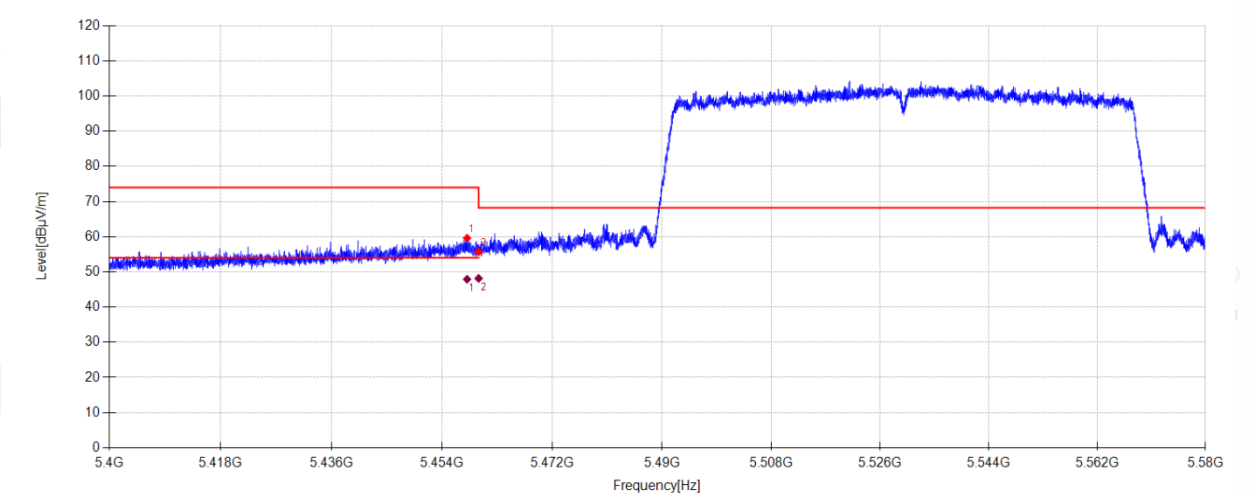

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.104	50.48	33.80	-24.69	59.59	74.00	14.41	PK	Horizontal
2	5460.000	46.57	33.80	-24.68	55.69	68.20	12.51	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.104	38.79	33.80	-24.69	47.90	54.00	6.10	AV	Horizontal
2	5460.000	39.03	33.80	-24.68	48.15	54.00	5.85	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5530MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\91

Memo:

Sample Number: S26072701-001

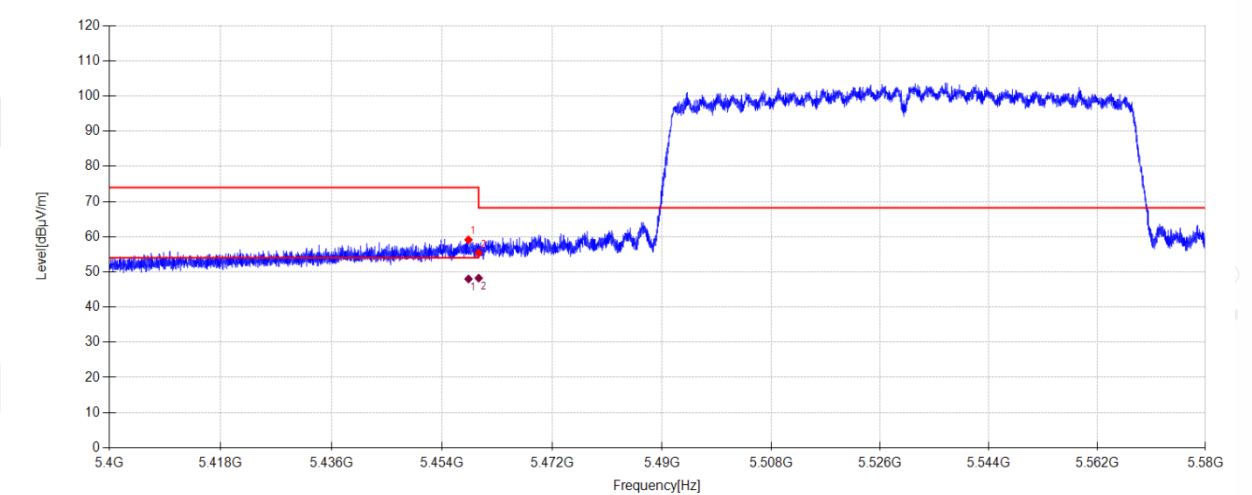

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.338	50.01	33.80	-24.69	59.12	74.00	14.88	PK	Vertical
2	5460.000	46.23	33.80	-24.68	55.35	68.20	12.85	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.338	38.88	33.80	-24.69	47.99	54.00	6.01	AV	Vertical
2	5460.000	39.10	33.80	-24.68	48.22	54.00	5.78	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\92

Memo:

Sample Number: S26072701-001

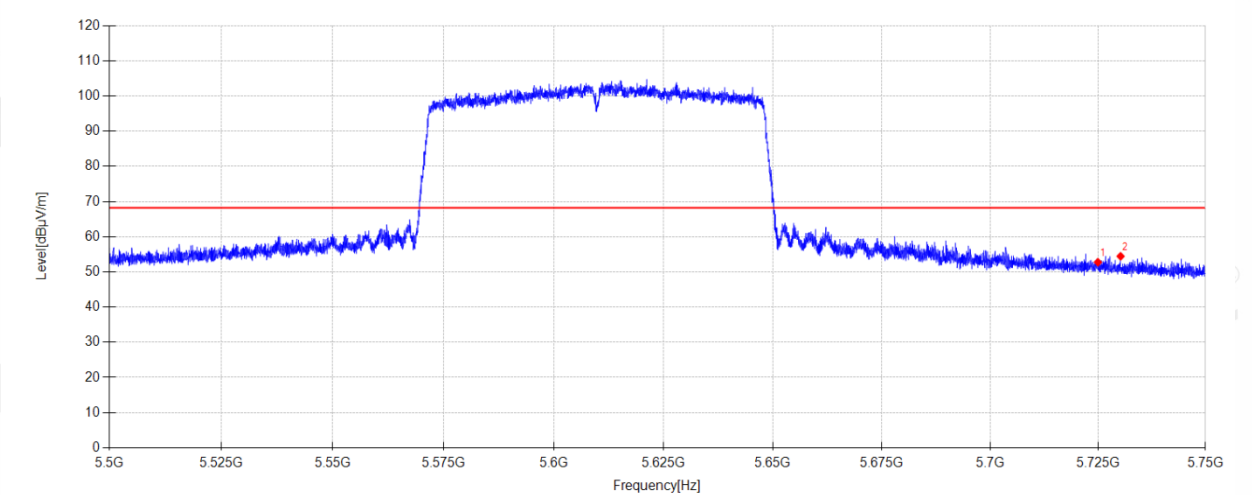

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	43.25	34.30	-24.79	52.76	68.20	15.44	PK	Horizontal
2	5730.275	44.91	34.32	-24.79	54.44	68.20	13.76	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC80 5610MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\93

Memo:

Sample Number: S26072701-001

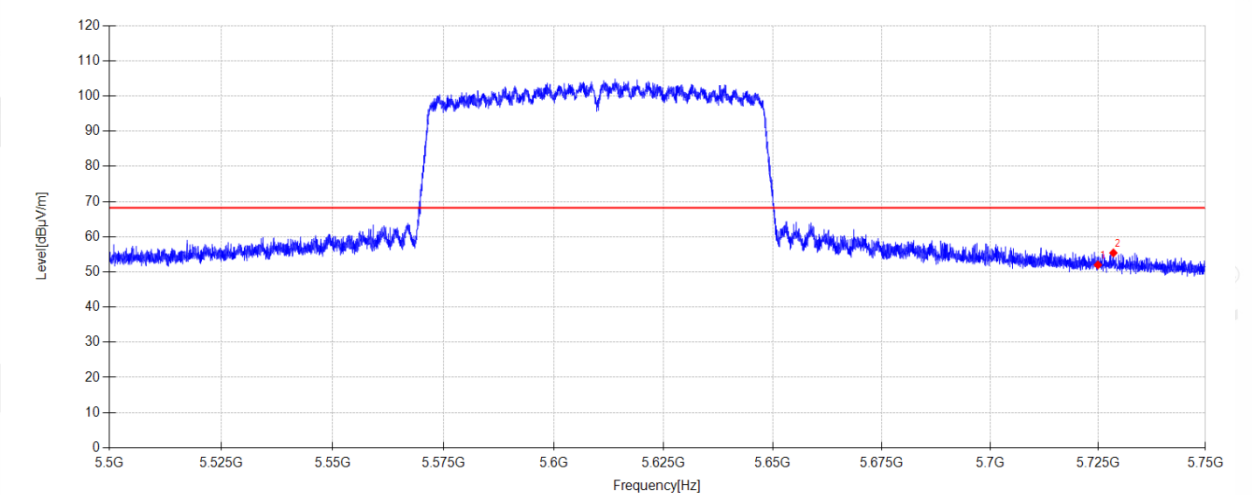

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	42.48	34.30	-24.79	51.99	68.20	16.21	PK	Vertical
2	5728.600	45.88	34.31	-24.79	55.40	68.20	12.80	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5180MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\94
Memo: Sample Number: S26072701-001

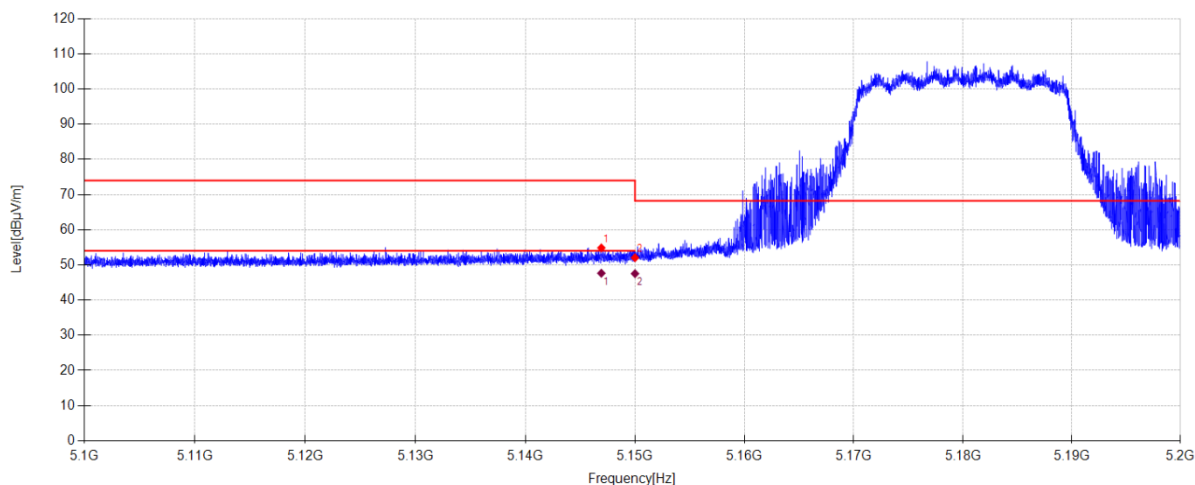

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.930	45.95	33.91	-25.02	54.84	74.00	19.16	PK	Horizontal
2	5150.000	43.15	33.90	-25.02	52.03	68.20	16.17	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5146.930	38.75	33.91	-25.02	47.64	54.00	6.36	AV	Horizontal
2	5150.000	38.64	33.90	-25.02	47.52	54.00	6.48	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5180MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\95

Memo:

Sample Number: S26072701-001

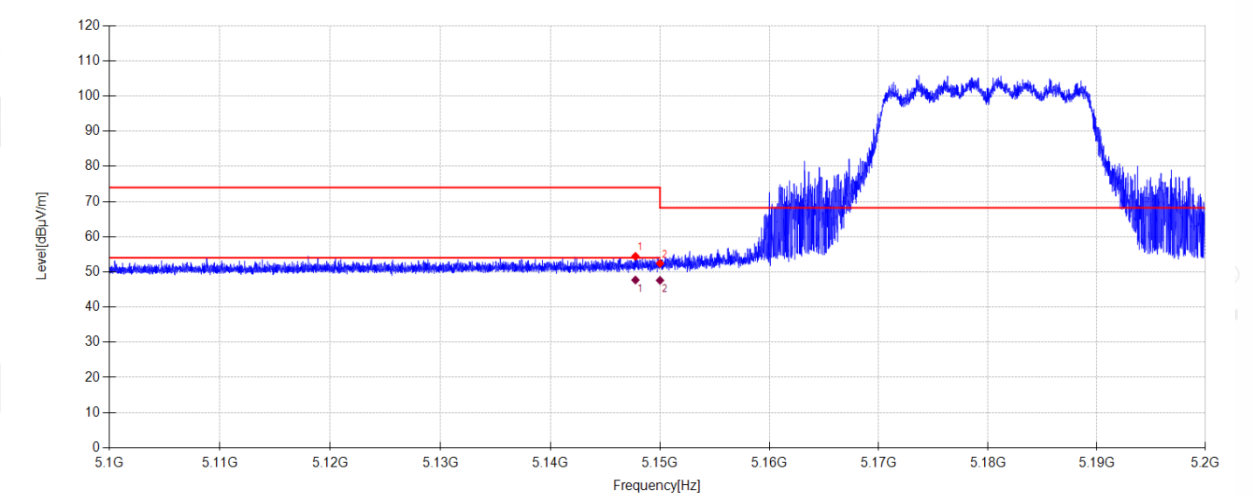

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.760	45.55	33.90	-25.02	54.43	74.00	19.57	PK	Vertical
2	5150.000	43.53	33.90	-25.02	52.41	68.20	15.79	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.760	38.82	33.90	-25.02	47.70	54.00	6.30	AV	Vertical
2	5150.000	38.71	33.90	-25.02	47.59	54.00	6.41	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5320MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\96

Memo:

Sample Number: S26072701-001

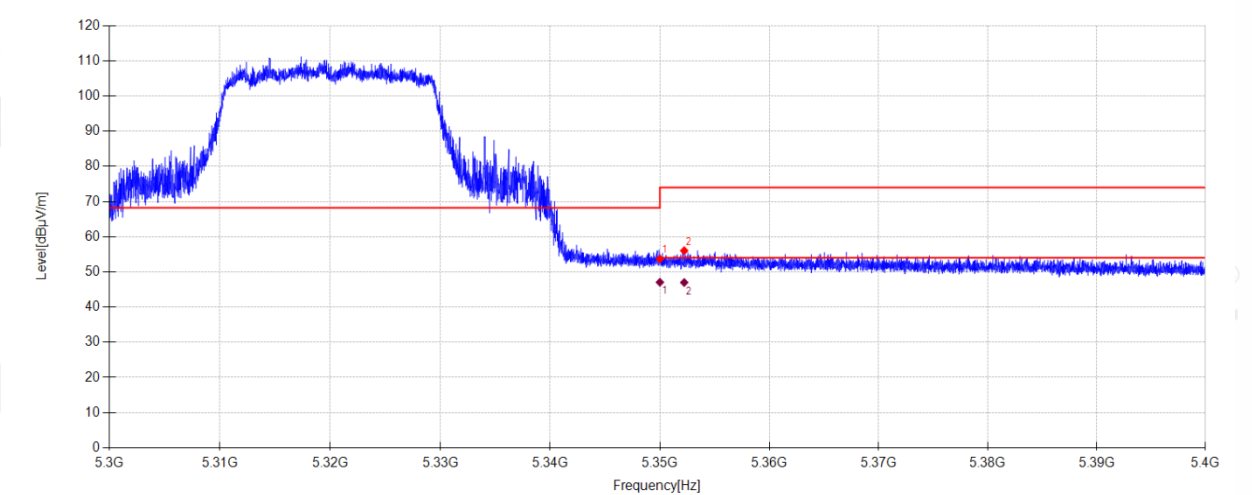

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	45.18	33.70	-25.19	53.69	68.20	14.51	PK	Horizontal
2	5352.220	47.50	33.70	-25.17	56.03	74.00	17.97	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.55	33.70	-25.19	47.06	54.00	6.94	AV	Horizontal
2	5352.220	38.46	33.70	-25.17	46.99	54.00	7.01	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5320MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\97

Memo:

Sample Number: S26072701-001

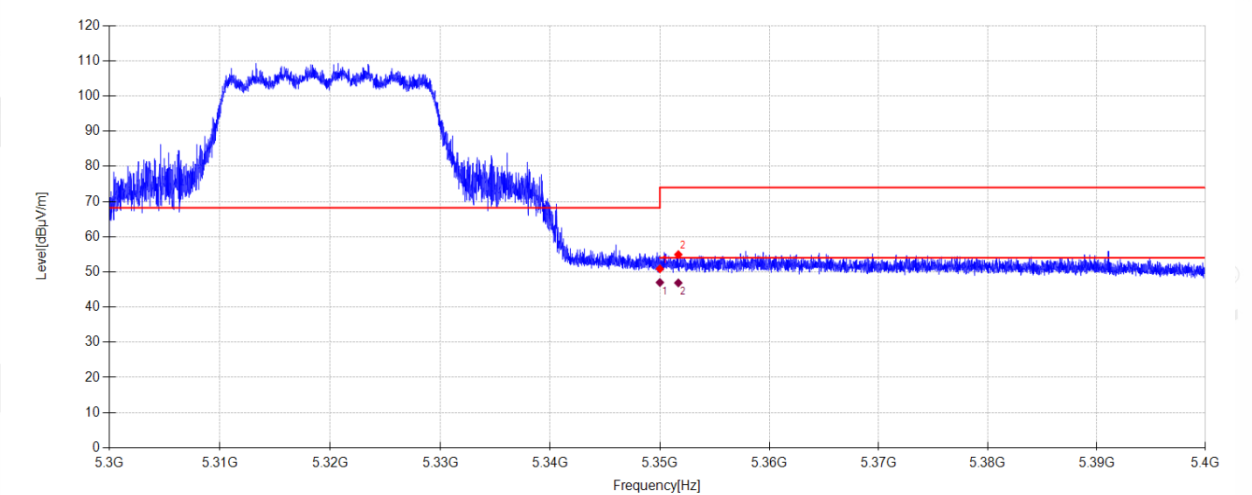

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	42.35	33.70	-25.19	50.86	68.20	17.34	PK	Vertical
2	5351.680	46.40	33.70	-25.18	54.92	74.00	19.08	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.48	33.70	-25.19	46.99	54.00	7.01	AV	Vertical
2	5351.680	38.36	33.70	-25.18	46.88	54.00	7.12	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.