

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5500MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\98

Memo:

Sample Number: S26072701-001

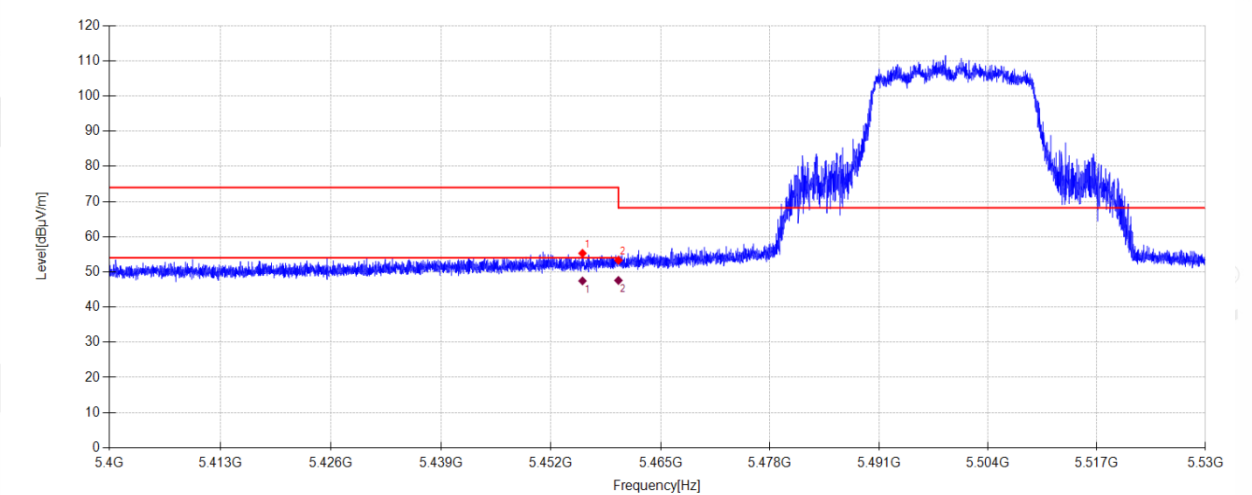

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.744	46.19	33.80	-24.70	55.29	74.00	18.71	PK	Horizontal
2	5460.000	44.19	33.80	-24.68	53.31	68.20	14.89	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.744	38.34	33.80	-24.70	47.44	54.00	6.56	AV	Horizontal
2	5460.000	38.46	33.80	-24.68	47.58	54.00	6.42	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5500MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\99

Memo:

Sample Number: S26072701-001

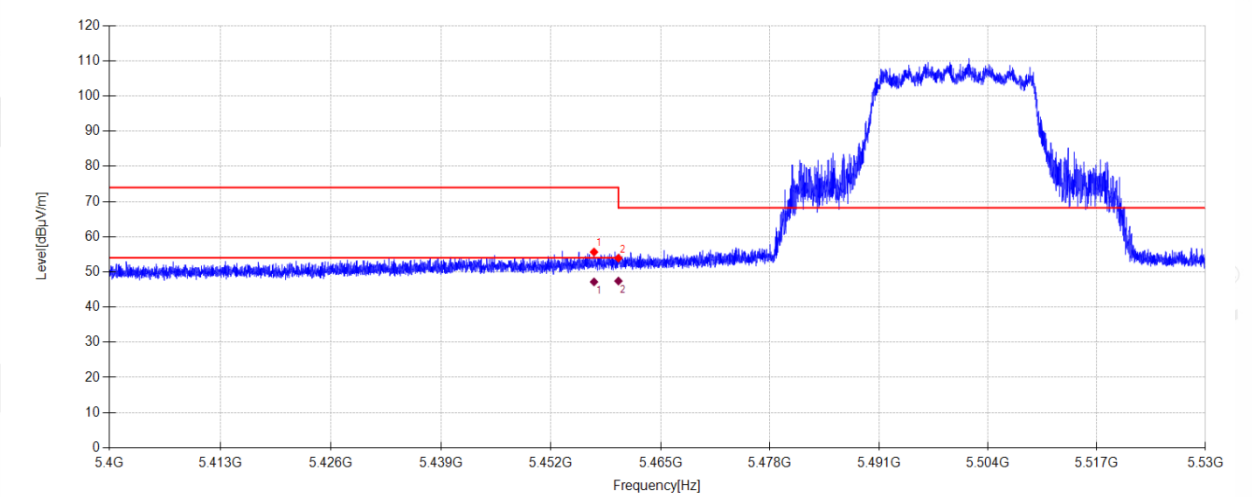

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.109	46.54	33.80	-24.70	55.64	74.00	18.36	PK	Vertical
2	5460.000	44.78	33.80	-24.68	53.90	68.20	14.30	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.109	38.07	33.80	-24.70	47.17	54.00	6.83	AV	Vertical
2	5460.000	38.29	33.80	-24.68	47.41	54.00	6.59	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\100

Memo:

Sample Number: S26072701-001

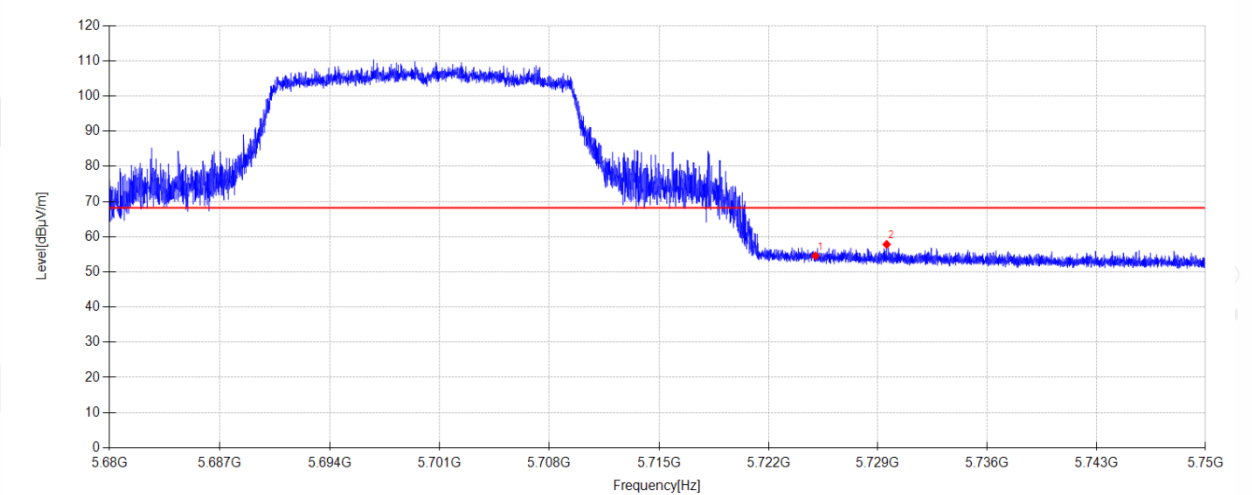

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	45.06	34.30	-24.79	54.57	68.20	13.63	PK	Horizontal
2	5729.560	48.28	34.32	-24.79	57.81	68.20	10.39	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX20 5700MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\101

Memo:

Sample Number: S26072701-001

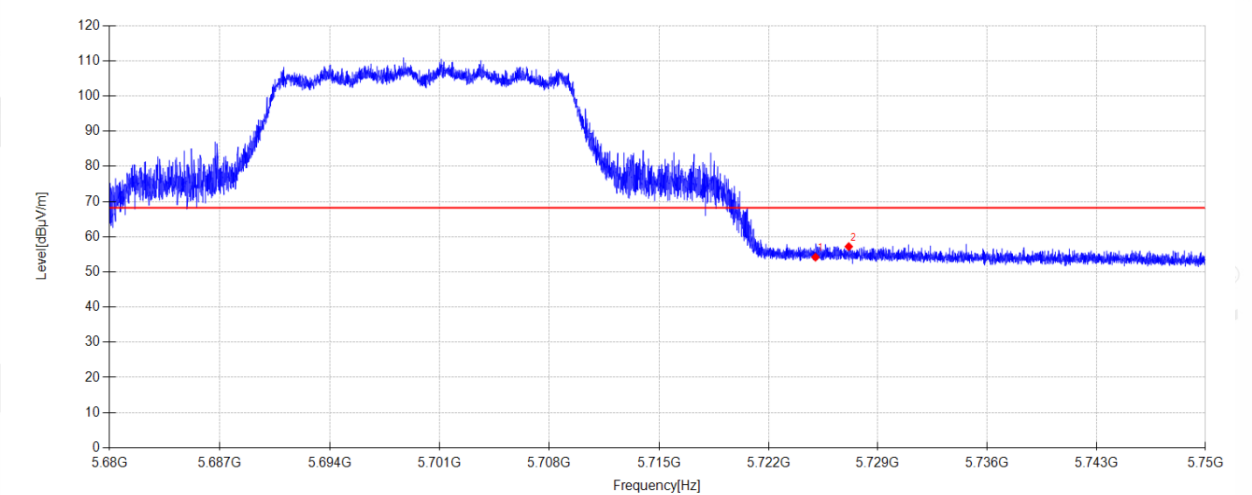

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	44.66	34.30	-24.79	54.17	68.20	14.03	PK	Vertical
2	5727.131	47.68	34.31	-24.79	57.20	68.20	11.00	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5190MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\102
Memo: Sample Number: S26072701-001

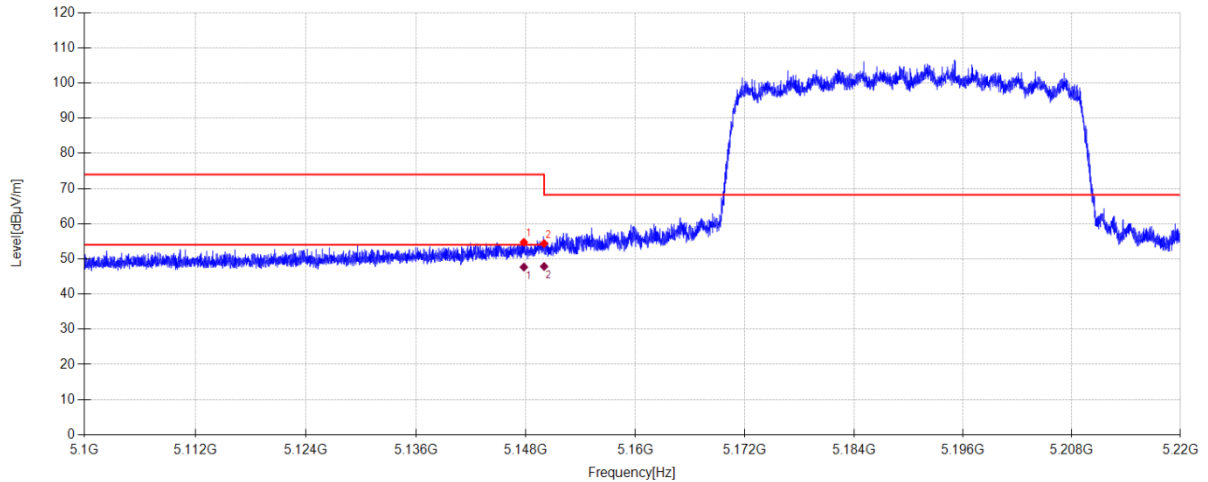**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.784	45.86	33.90	-25.02	54.74	74.00	19.26	PK	Horizontal
2	5150.000	45.47	33.90	-25.02	54.35	68.20	13.85	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.784	38.79	33.90	-25.02	47.67	54.00	6.33	AV	Horizontal
2	5150.000	38.96	33.90	-25.02	47.84	54.00	6.16	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5190MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\103
Memo: Sample Number: S26072701-001

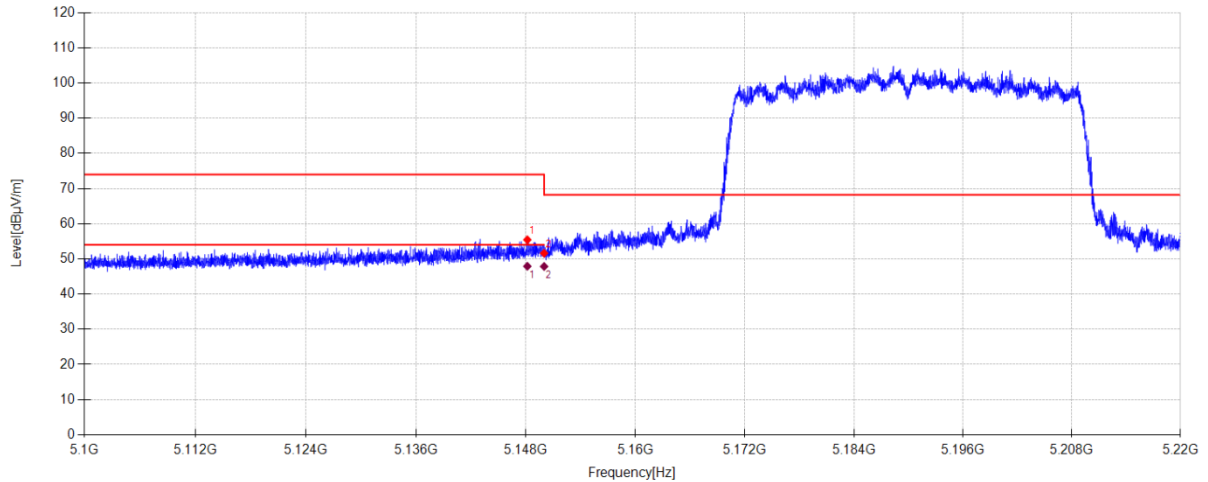**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.168	46.56	33.90	-25.02	55.44	74.00	18.56	PK	Vertical
2	5150.000	42.73	33.90	-25.02	51.61	68.20	16.59	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5148.168	39.02	33.90	-25.02	47.90	54.00	6.10	AV	Vertical
2	5150.000	38.97	33.90	-25.02	47.85	54.00	6.15	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5310MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\104
Memo: Sample Number: S26072701-001

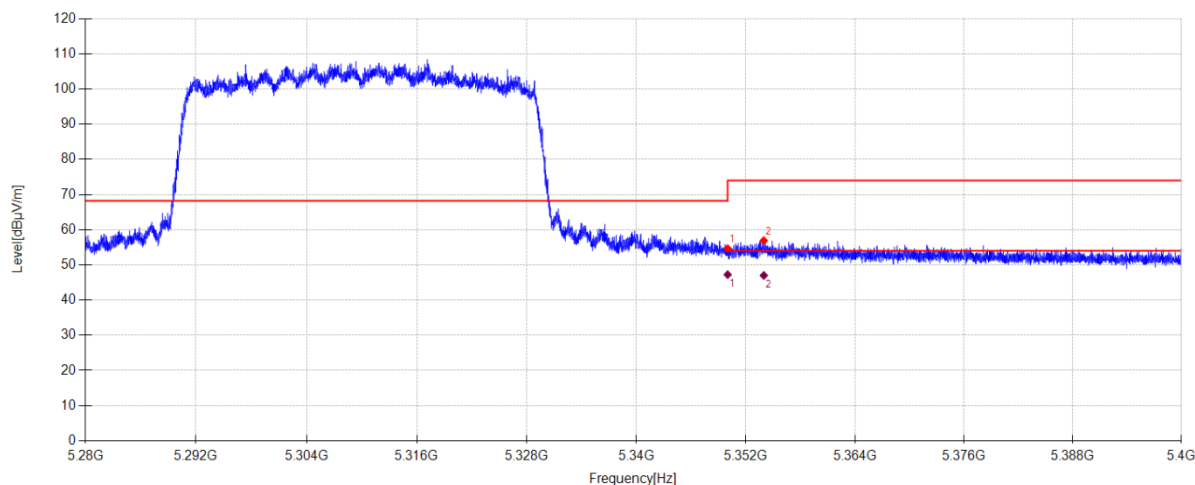

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	46.12	33.70	-25.18	54.64	68.20	13.56	PK	Horizontal
2	5353.968	48.37	33.70	-25.16	56.91	74.00	17.09	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.72	33.70	-25.18	47.24	54.00	6.76	AV	Horizontal
2	5353.968	38.45	33.70	-25.16	46.99	54.00	7.01	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5310MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\105
Memo: Sample Number: S26072701-001

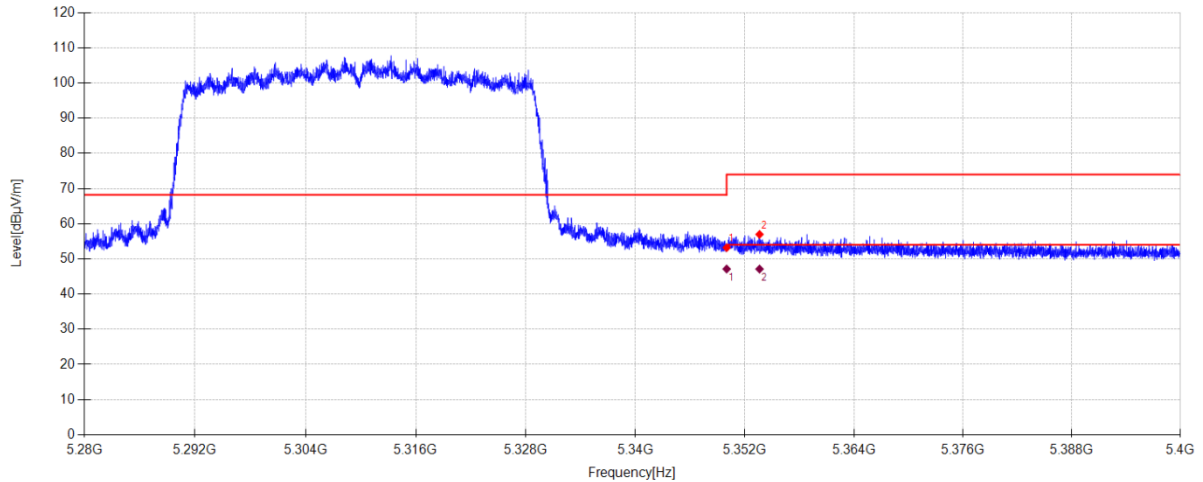**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	44.67	33.70	-25.18	53.19	68.20	15.01	PK	Vertical
2	5353.608	48.43	33.70	-25.17	56.96	74.00	17.04	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.62	33.70	-25.18	47.14	54.00	6.86	AV	Vertical
2	5353.608	38.59	33.70	-25.17	47.12	54.00	6.88	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5510MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\106

Memo:

Sample Number: S26072701-001

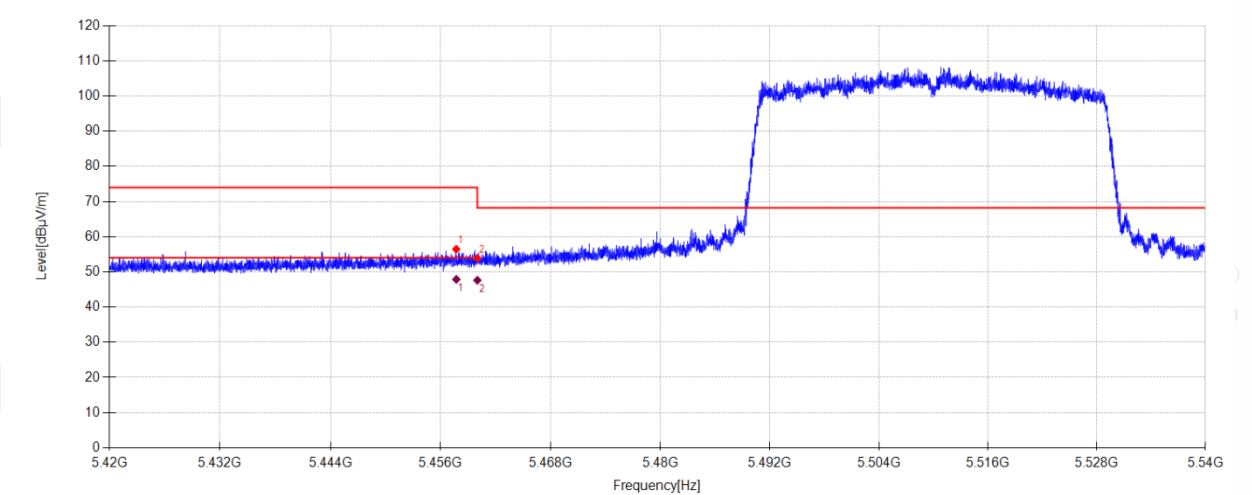

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.704	47.34	33.80	-24.69	56.45	74.00	17.55	PK	Horizontal
2	5460.000	44.75	33.80	-24.68	53.87	68.20	14.33	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.704	38.77	33.80	-24.69	47.88	54.00	6.12	AV	Horizontal
2	5460.000	38.50	33.80	-24.68	47.62	54.00	6.38	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5510MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\107

Memo:

Sample Number: S26072701-001

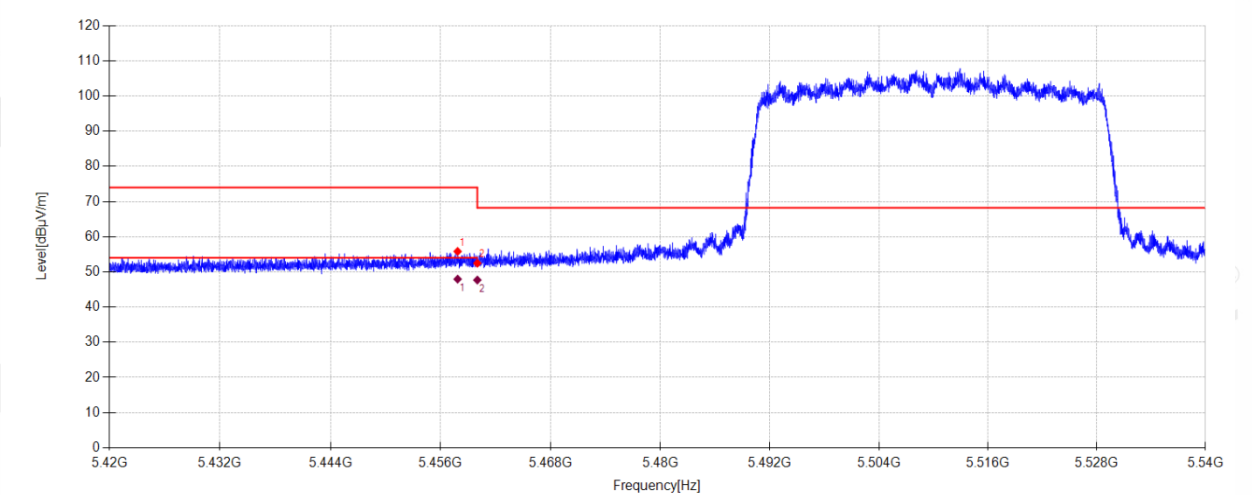

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.848	46.71	33.80	-24.69	55.82	74.00	18.18	PK	Vertical
2	5460.000	43.34	33.80	-24.68	52.46	68.20	15.74	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.848	38.84	33.80	-24.69	47.95	54.00	6.05	AV	Vertical
2	5460.000	38.57	33.80	-24.68	47.69	54.00	6.31	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\108

Memo:

Sample Number: S26072701-001

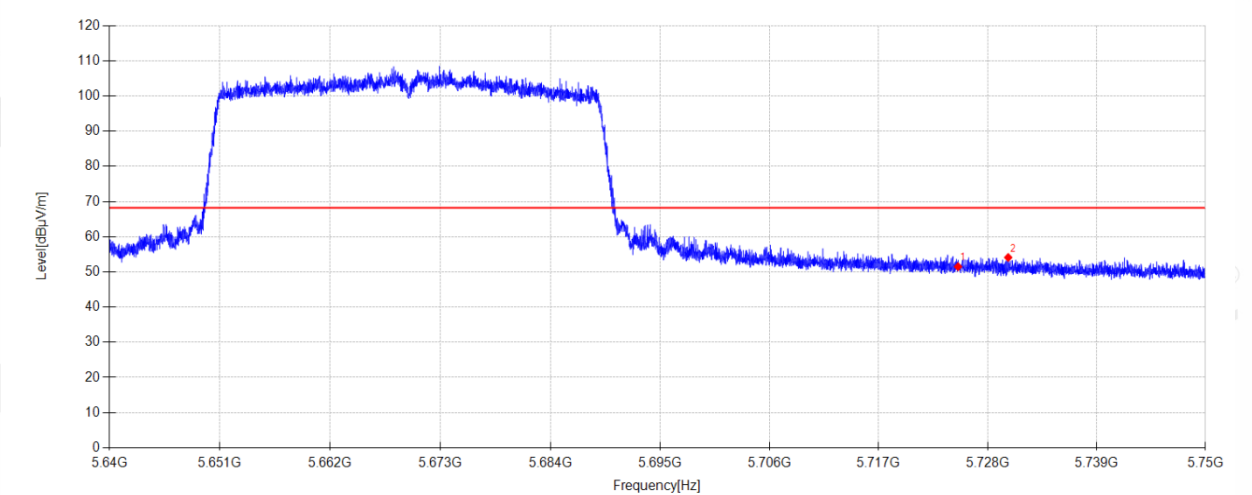

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.98	34.30	-24.79	51.49	68.20	16.71	PK	Horizontal
2	5730.057	44.57	34.32	-24.79	54.10	68.20	14.10	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX40 5670MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\109

Memo:

Sample Number: S26072701-001

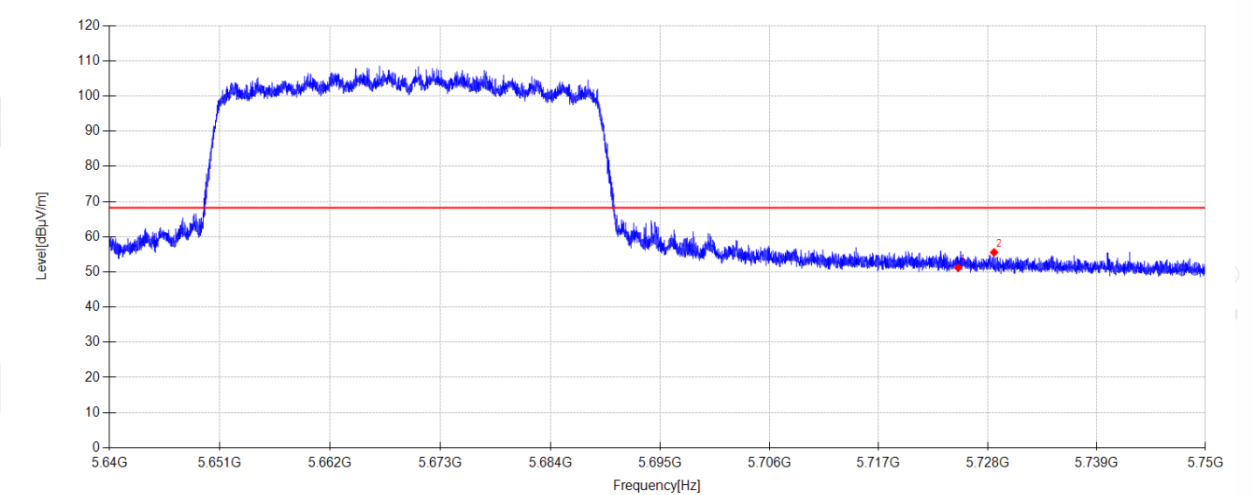

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.69	34.30	-24.79	51.20	68.20	17.00	PK	Vertical
2	5728.638	46.03	34.31	-24.79	55.55	68.20	12.65	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5210MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\110
Memo: Sample Number: S26072701-001

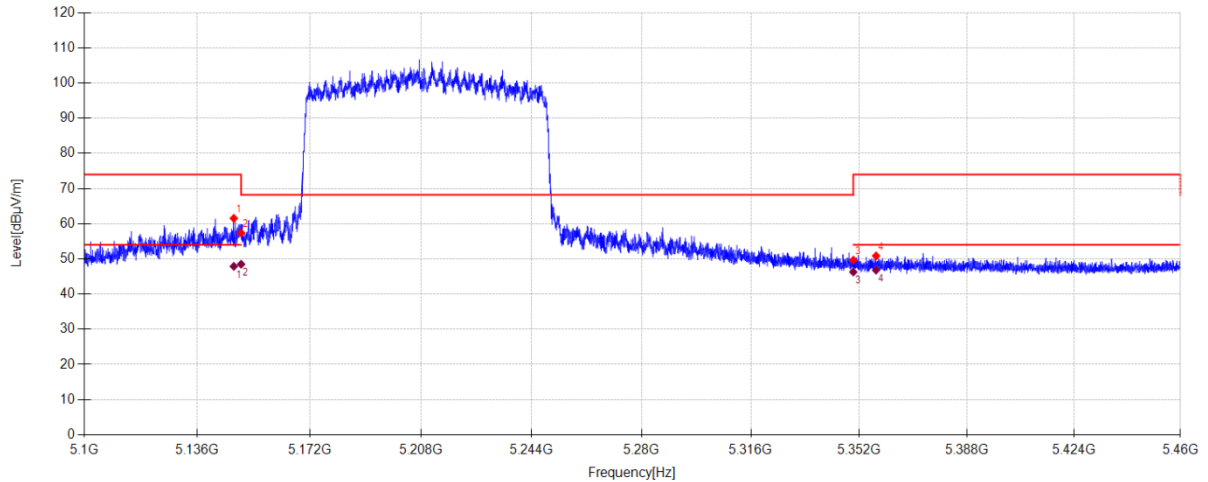**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.664	52.66	33.90	-25.02	61.54	74.00	12.46	PK	Horizontal
2	5150.000	48.50	33.90	-25.02	57.38	68.20	10.82	PK	Horizontal
3	5350.000	41.14	33.70	-25.18	49.66	68.20	18.54	PK	Horizontal
4	5357.580	42.31	33.70	-25.15	50.86	74.00	23.14	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5147.664	38.99	33.90	-25.02	47.87	54.00	6.13	AV	Horizontal
2	5150.000	39.61	33.90	-25.02	48.49	54.00	5.51	AV	Horizontal
3	5350.000	37.76	33.70	-25.18	46.28	54.00	7.72	AV	Horizontal
4	5357.580	38.26	33.70	-25.15	46.81	54.00	7.19	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5210MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\111
Memo: Sample Number: S26072701-001

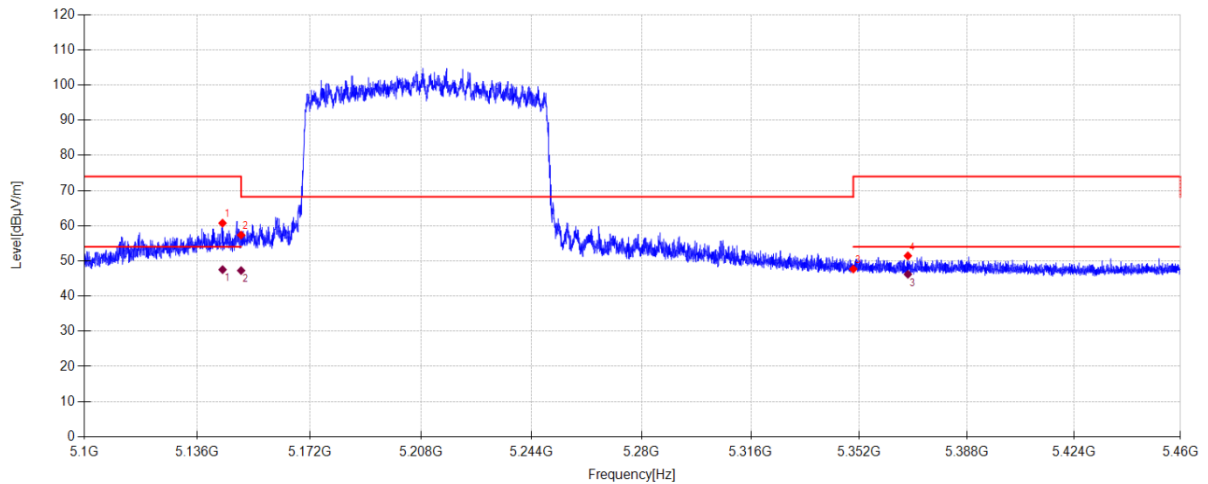**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.064	51.84	33.91	-25.02	60.73	74.00	13.27	PK	Vertical
2	5150.000	48.46	33.90	-25.02	57.34	68.20	10.86	PK	Vertical
3	5350.000	39.17	33.70	-25.18	47.69	68.20	20.51	PK	Vertical
4	5368.200	42.83	33.70	-25.09	51.44	74.00	22.56	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5144.064	38.63	33.91	-25.02	47.52	54.00	6.48	AV	Vertical
2	5150.000	38.38	33.90	-25.02	47.26	54.00	6.74	AV	Vertical
3	5368.200	37.58	33.70	-25.09	46.19	54.00	7.81	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5290MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\112
Memo: Sample Number: S26072701-001

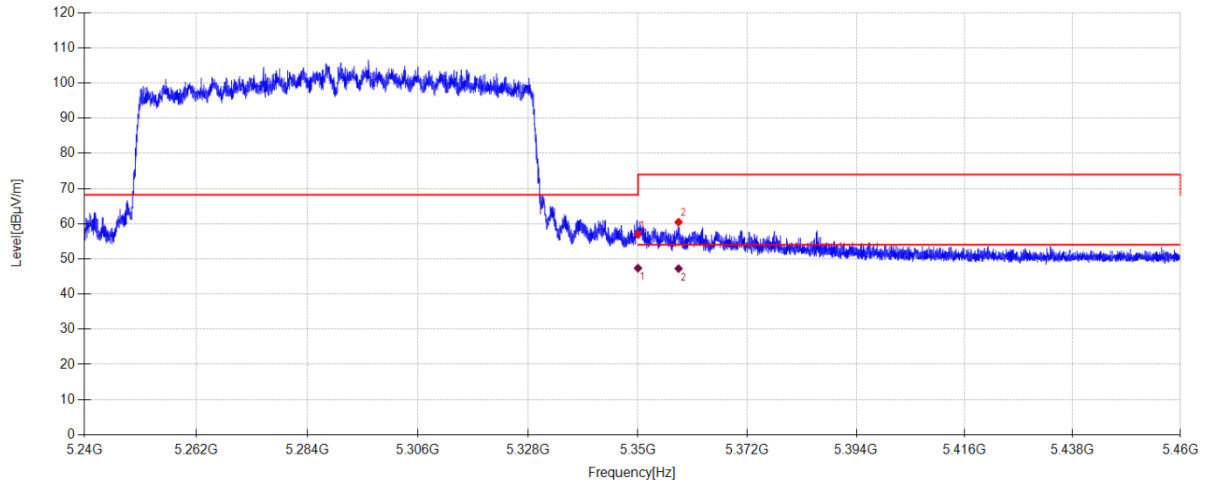

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	48.47	33.70	-25.19	56.98	68.20	11.22	PK	Horizontal
2	5358.162	51.90	33.70	-25.14	60.46	74.00	13.54	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.85	33.70	-25.19	47.36	54.00	6.64	AV	Horizontal
2	5358.162	38.68	33.70	-25.14	47.24	54.00	6.76	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5290MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\113
Memo: Sample Number: S26072701-001

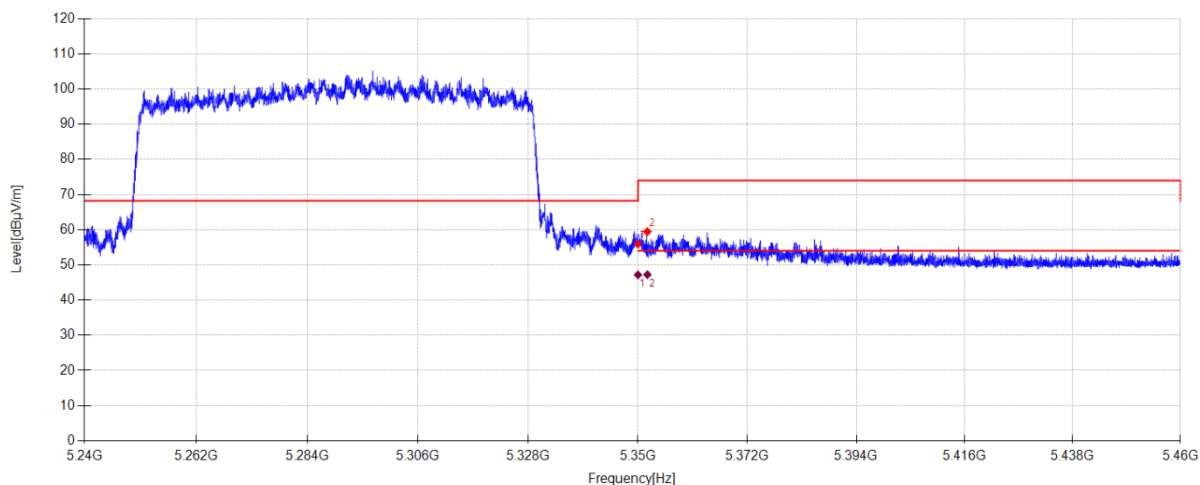**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	47.41	33.70	-25.19	55.92	68.20	12.28	PK	Vertical
2	5351.892	50.93	33.70	-25.18	59.45	74.00	14.55	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5350.000	38.66	33.70	-25.19	47.17	54.00	6.83	AV	Vertical
2	5351.892	38.70	33.70	-25.18	47.22	54.00	6.78	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5530MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\114
Memo: Sample Number: S26072701-001

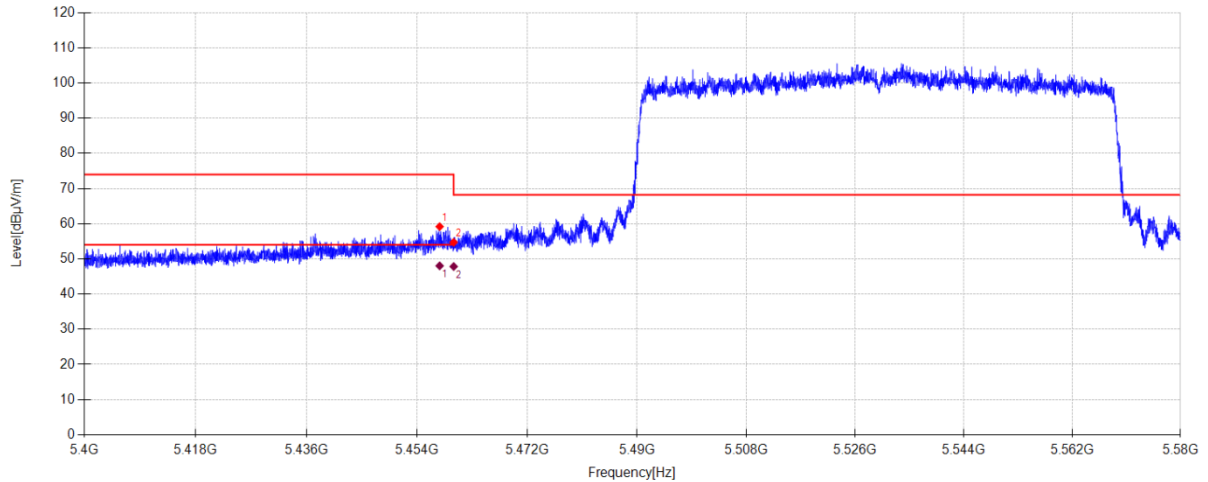**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.708	50.08	33.80	-24.69	59.19	74.00	14.81	PK	Horizontal
2	5460.000	45.60	33.80	-24.68	54.72	68.20	13.48	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.708	38.92	33.80	-24.69	48.03	54.00	5.97	AV	Horizontal
2	5460.000	38.71	33.80	-24.68	47.83	54.00	6.17	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5530MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\115
Memo: Sample Number: S26072701-001

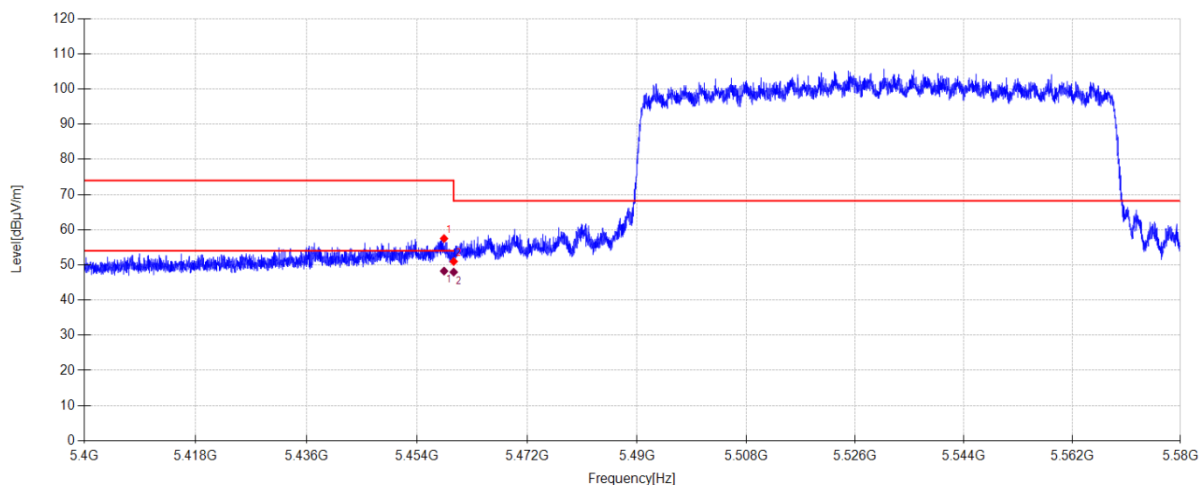

Suspected Data List

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.428	48.38	33.80	-24.69	57.49	74.00	16.51	PK	Vertical
2	5460.000	41.85	33.80	-24.68	50.97	68.20	17.23	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5458.428	39.13	33.80	-24.69	48.24	54.00	5.76	AV	Vertical
2	5460.000	38.84	33.80	-24.68	47.96	54.00	6.04	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\116

Memo:

Sample Number: S26072701-001

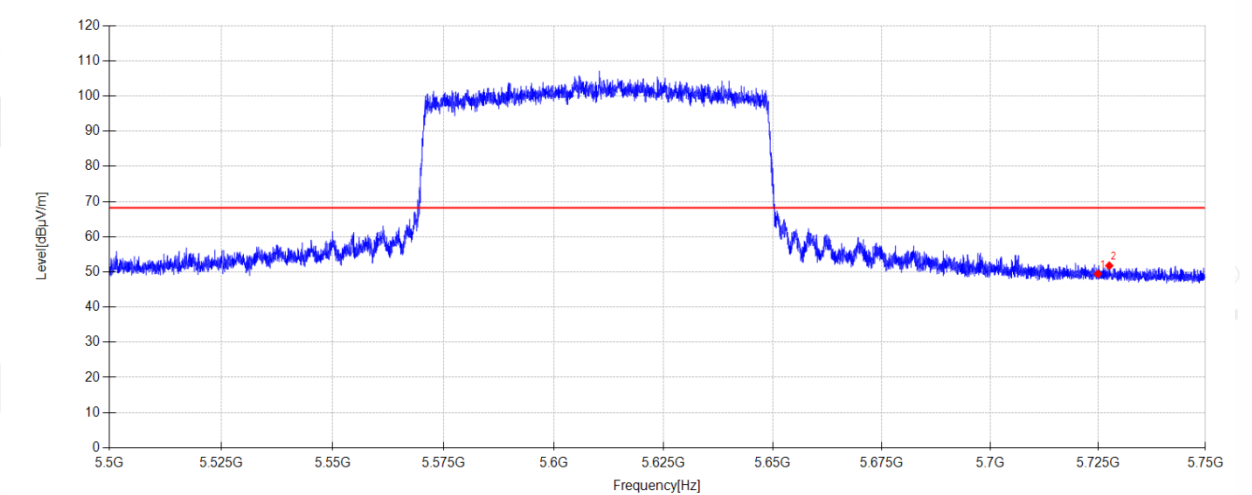

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	39.92	34.30	-24.79	49.43	68.20	18.77	PK	Horizontal
2	5727.650	42.24	34.31	-24.79	51.76	68.20	16.44	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5610MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G\117

Memo:

Sample Number: S26072701-001

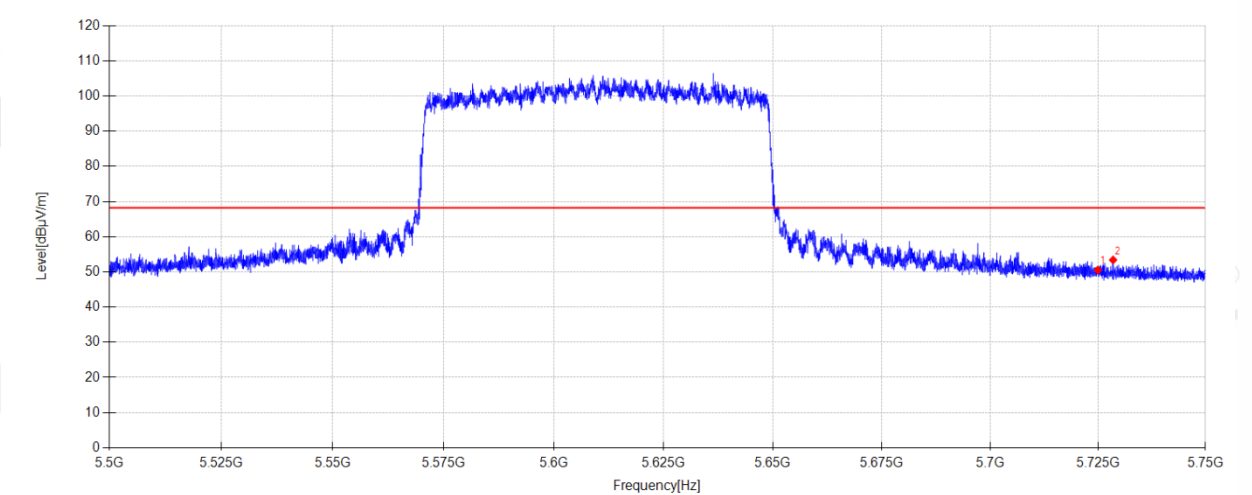

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.000	41.03	34.30	-24.79	50.54	68.20	17.66	PK	Vertical
2	5728.525	43.87	34.31	-24.79	53.39	68.20	14.81	PK	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: ANT1 TX 11A 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\5
Memo: Sample Number: S26072701-001

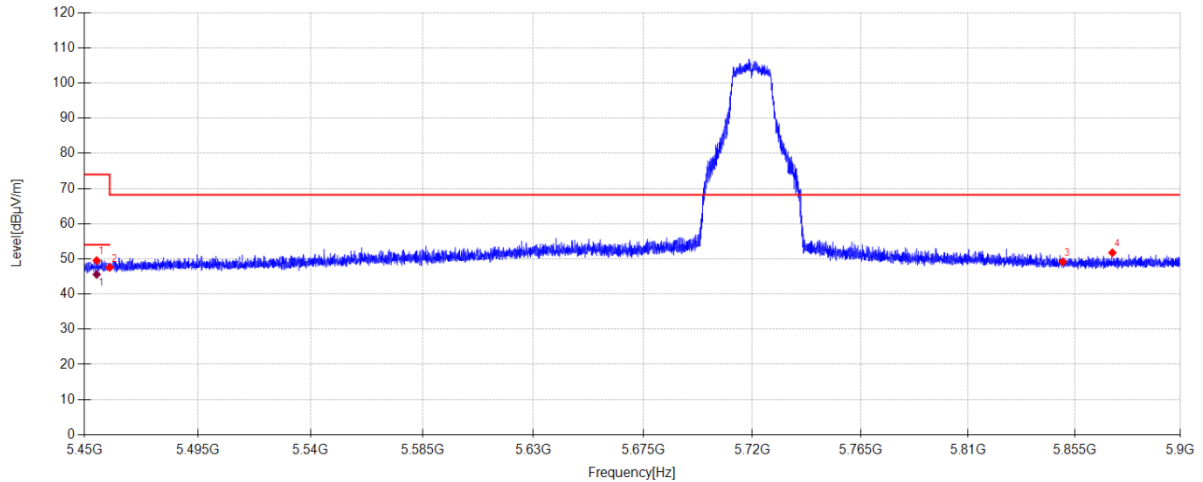**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.860	40.46	33.80	-24.71	49.55	74.00	24.45	PK	Horizontal
2	5460.000	38.46	33.80	-24.68	47.58	68.20	20.62	PK	Horizontal
3	5850.000	39.06	34.80	-24.67	49.19	68.20	19.01	PK	Horizontal
4	5871.065	41.55	34.84	-24.64	51.75	68.20	16.45	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.860	36.49	33.80	-24.71	45.58	54.00	8.42	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

ANT1 TX 11A 5720MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\6

Memo:

Sample Number: S26072701-001

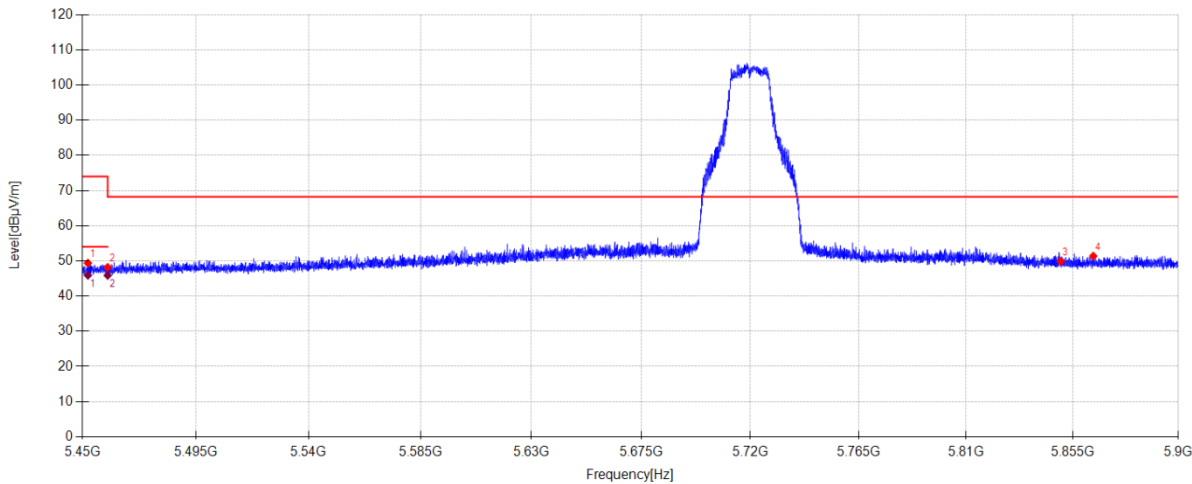

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.205	40.28	33.80	-24.72	49.36	74.00	24.64	PK	Vertical
2	5460.000	39.05	33.80	-24.68	48.17	68.20	20.03	PK	Vertical
3	5850.000	39.72	34.80	-24.67	49.85	68.20	18.35	PK	Vertical
4	5863.775	41.19	34.83	-24.65	51.37	68.20	16.83	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.205	36.83	33.80	-24.72	45.91	54.00	8.09	AV	Vertical
2	5460.000	36.75	33.80	-24.68	45.87	54.00	8.13	AV	Vertical


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: ANT2 TX 11A 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\7
Memo: Sample Number: S26072701-001

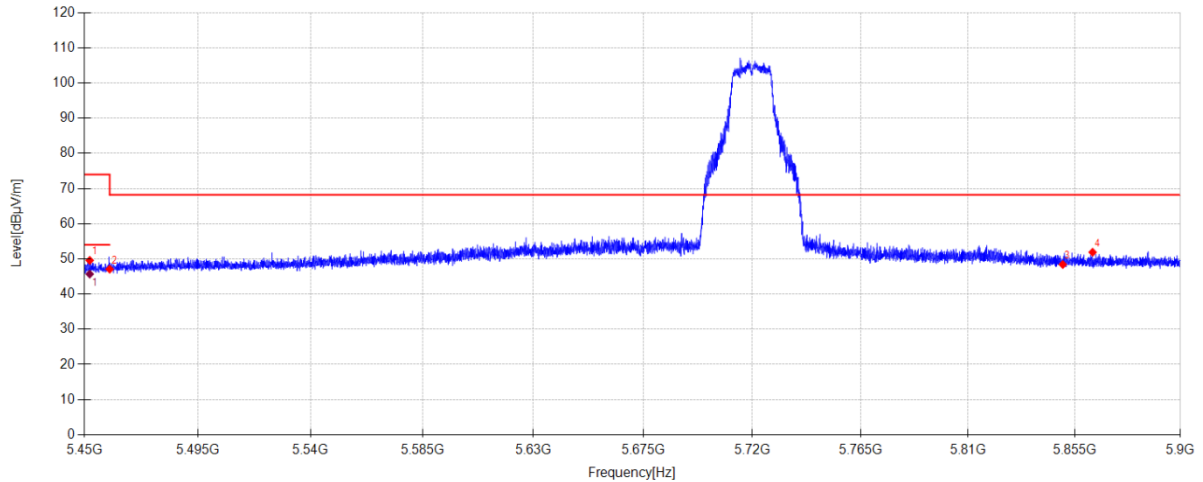**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.115	40.49	33.80	-24.72	49.57	74.00	24.43	PK	Horizontal
2	5460.000	37.96	33.80	-24.68	47.08	68.20	21.12	PK	Horizontal
3	5850.000	38.27	34.80	-24.67	48.40	68.20	19.80	PK	Horizontal
4	5862.650	41.71	34.83	-24.65	51.89	68.20	16.31	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.115	36.61	33.80	-24.72	45.69	54.00	8.31	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

ANT2 TX 11A 5720MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\8

Memo:

Sample Number: S26072701-001

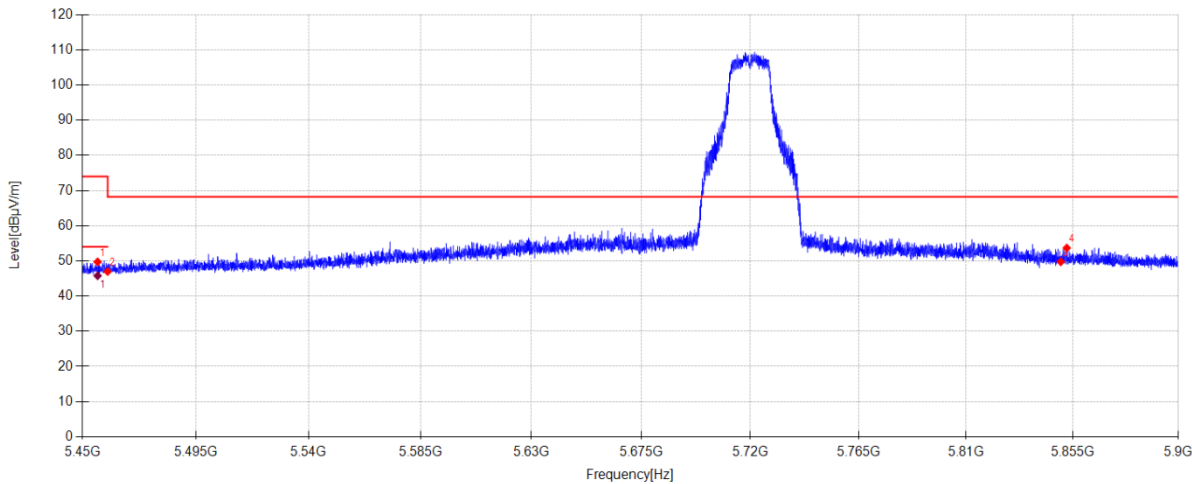

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.030	40.63	33.80	-24.70	49.73	74.00	24.27	PK	Vertical
2	5460.000	37.86	33.80	-24.68	46.98	68.20	21.22	PK	Vertical
3	5850.000	39.60	34.80	-24.67	49.73	68.20	18.47	PK	Vertical
4	5852.525	43.53	34.81	-24.67	53.67	68.20	14.53	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.030	36.68	33.80	-24.70	45.78	54.00	8.22	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-04

Tested By:

Liang Rijing

Test Mode:

TX MIMO N20 5720MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\1

Memo:

Sample Number: S26072701-001

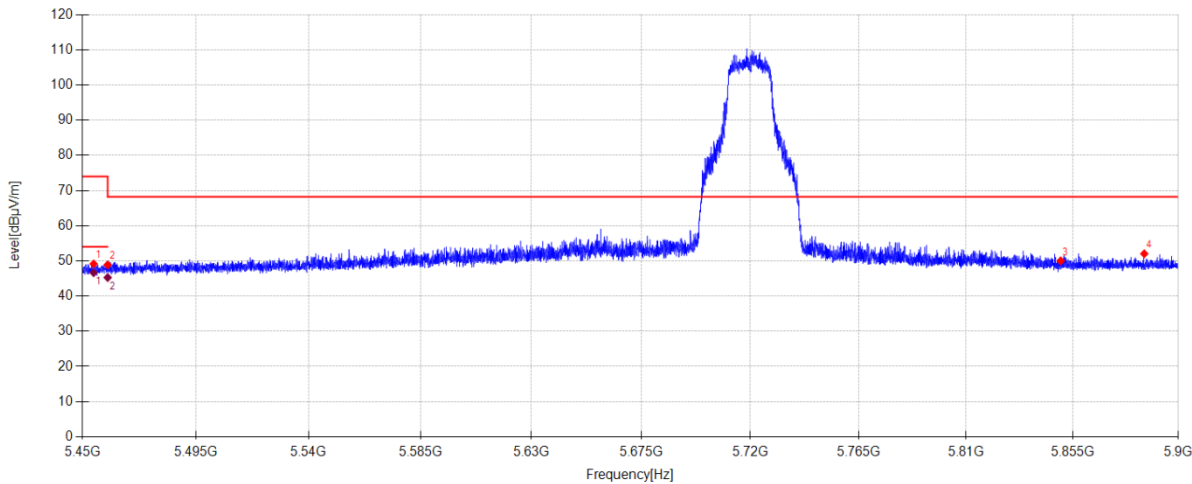

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.455	40.06	33.80	-24.71	49.15	74.00	24.85	PK	Horizontal
2	5460.000	39.76	33.80	-24.68	48.88	68.20	19.32	PK	Horizontal
3	5850.000	39.87	34.80	-24.67	50.00	68.20	18.20	PK	Horizontal
4	5885.465	41.79	34.87	-24.63	52.03	68.20	16.17	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.455	37.54	33.80	-24.71	46.63	54.00	7.37	AV	Horizontal
2	5460.000	36.15	33.80	-24.68	45.27	54.00	8.73	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-04 **Tested By:** Liang Rijing
Test Mode: TX MIMO N20 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\2
Memo: Sample Number: S26072701-001

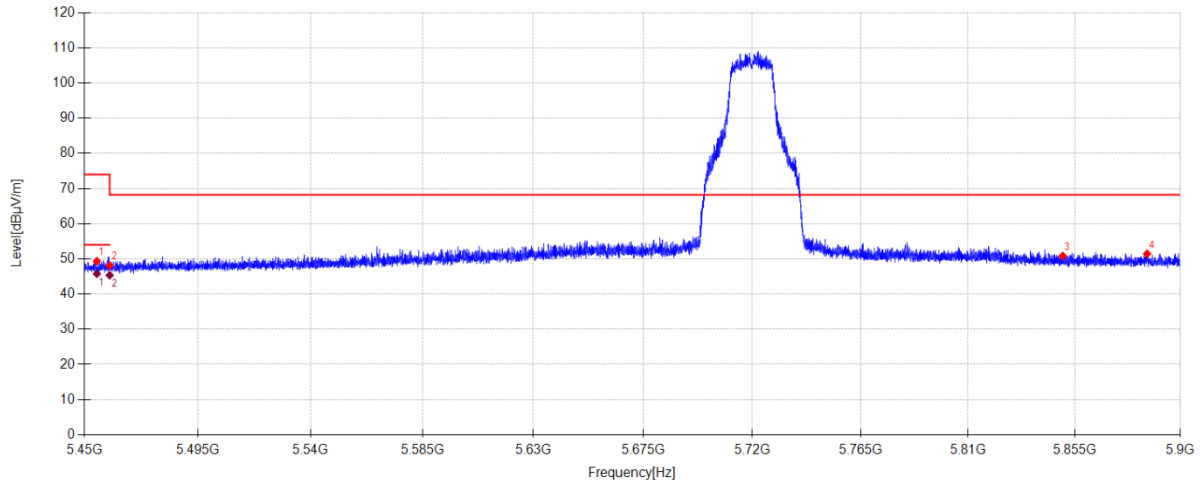**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.950	40.24	33.80	-24.70	49.34	74.00	24.66	PK	Vertical
2	5460.000	38.98	33.80	-24.68	48.10	68.20	20.10	PK	Vertical
3	5850.000	40.70	34.80	-24.67	50.83	68.20	17.37	PK	Vertical
4	5885.825	41.21	34.87	-24.63	51.45	68.20	16.75	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.950	36.68	33.80	-24.70	45.78	54.00	8.22	AV	Vertical
2	5460.000	36.24	33.80	-24.68	45.36	54.00	8.64	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11N40 5710MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\3

Memo:

Sample Number: S26072701-001

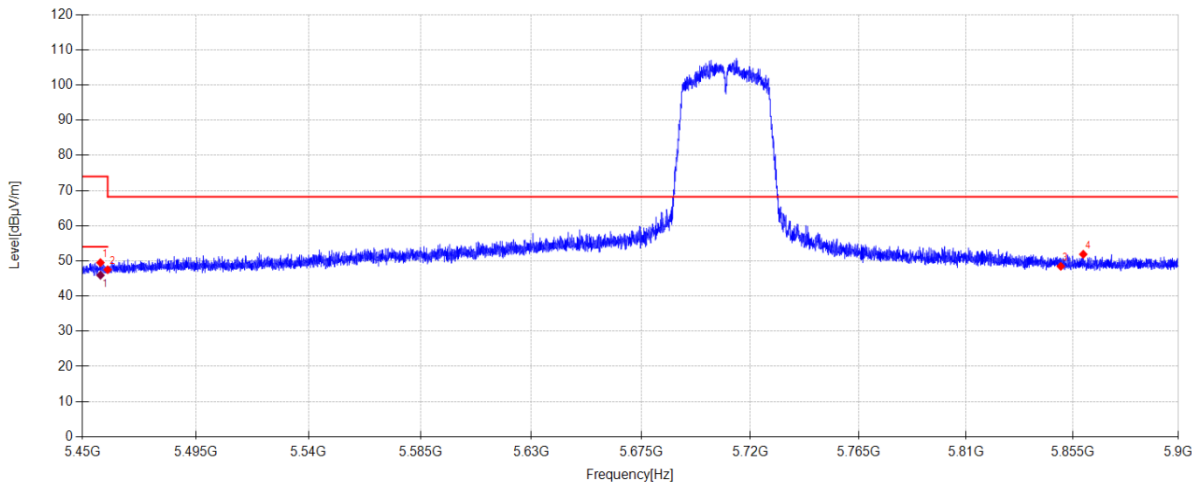

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.155	40.40	33.80	-24.70	49.50	74.00	24.50	PK	Horizontal
2	5460.000	38.38	33.80	-24.68	47.50	68.20	20.70	PK	Horizontal
3	5850.000	38.33	34.80	-24.67	48.46	68.20	19.74	PK	Horizontal
4	5859.545	41.73	34.82	-24.66	51.89	68.20	16.31	PK	Horizontal


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5457.155	36.84	33.80	-24.70	45.94	54.00	8.06	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11N40 5710MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\4
Memo: Sample Number: S26072701-001

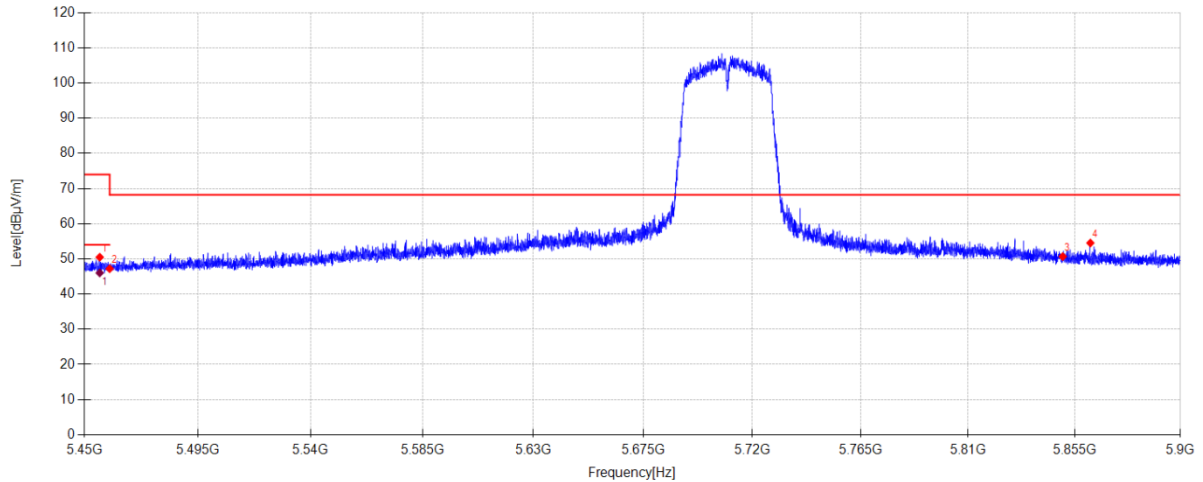**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.075	41.38	33.80	-24.70	50.48	74.00	23.52	PK	Vertical
2	5460.000	38.10	33.80	-24.68	47.22	68.20	20.98	PK	Vertical
3	5850.000	40.54	34.80	-24.67	50.67	68.20	17.53	PK	Vertical
4	5861.705	44.37	34.82	-24.66	54.53	68.20	13.67	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.075	36.92	33.80	-24.70	46.02	54.00	7.98	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC20 5720MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\9

Memo:

Sample Number: S26072701-001

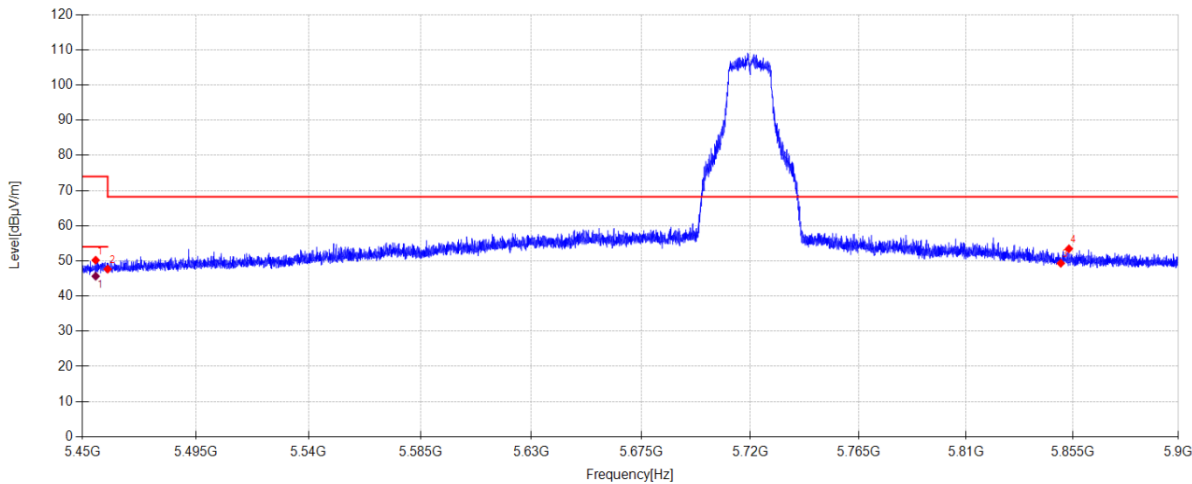

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.265	41.11	33.80	-24.70	50.21	74.00	23.79	PK	Horizontal
2	5460.000	38.55	33.80	-24.68	47.67	68.20	20.53	PK	Horizontal
3	5850.000	39.19	34.80	-24.67	49.32	68.20	18.88	PK	Horizontal
4	5853.470	43.30	34.81	-24.67	53.44	68.20	14.76	PK	Horizontal


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.265	36.55	33.80	-24.70	45.65	54.00	8.35	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC20 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\10
Memo: Sample Number: S26072701-001

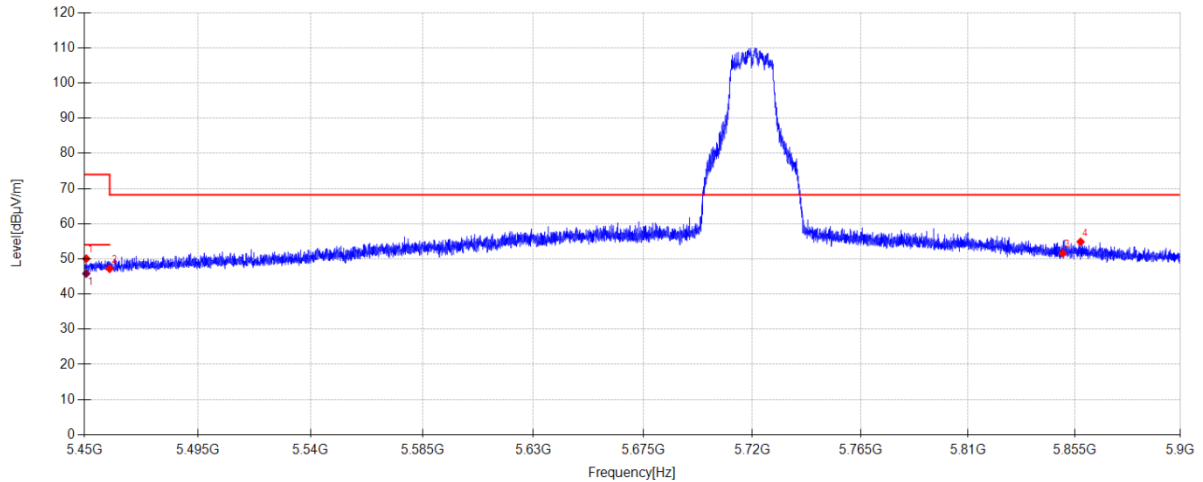**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5450.765	40.99	33.80	-24.72	50.07	74.00	23.93	PK	Vertical
2	5460.000	38.07	33.80	-24.68	47.19	68.20	21.01	PK	Vertical
3	5850.000	41.46	34.80	-24.67	51.59	68.20	16.61	PK	Vertical
4	5857.565	44.69	34.82	-24.66	54.85	68.20	13.35	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5450.765	36.75	33.80	-24.72	45.83	54.00	8.17	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5710MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\11

Memo:

Sample Number: S26072701-001

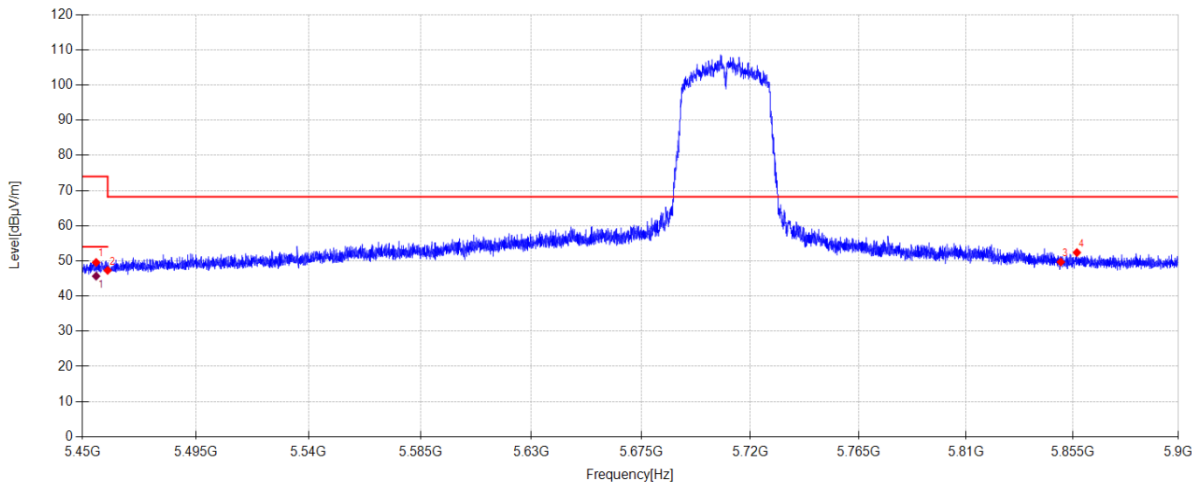

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.445	40.46	33.80	-24.70	49.56	74.00	24.44	PK	Horizontal
2	5460.000	38.19	33.80	-24.68	47.31	68.20	20.89	PK	Horizontal
3	5850.000	39.54	34.80	-24.67	49.67	68.20	18.53	PK	Horizontal
4	5856.845	42.22	34.81	-24.66	52.37	68.20	15.83	PK	Horizontal

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.445	36.57	33.80	-24.70	45.67	54.00	8.33	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AC40 5710MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\12

Memo:

Sample Number: S26072701-001

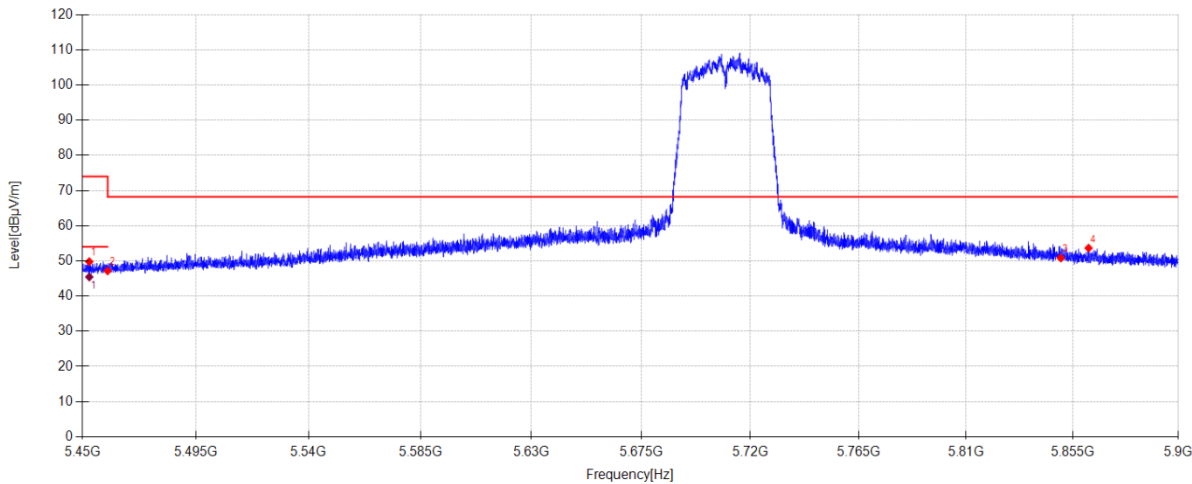

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.745	40.70	33.80	-24.71	49.79	74.00	24.21	PK	Vertical
2	5460.000	38.04	33.80	-24.68	47.16	68.20	21.04	PK	Vertical
3	5850.000	40.71	34.80	-24.67	50.84	68.20	17.36	PK	Vertical
4	5861.795	43.48	34.82	-24.66	53.64	68.20	14.56	PK	Vertical


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.745	36.34	33.80	-24.71	45.43	54.00	8.57	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5690MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\13
Memo: Sample Number: S26072701-001

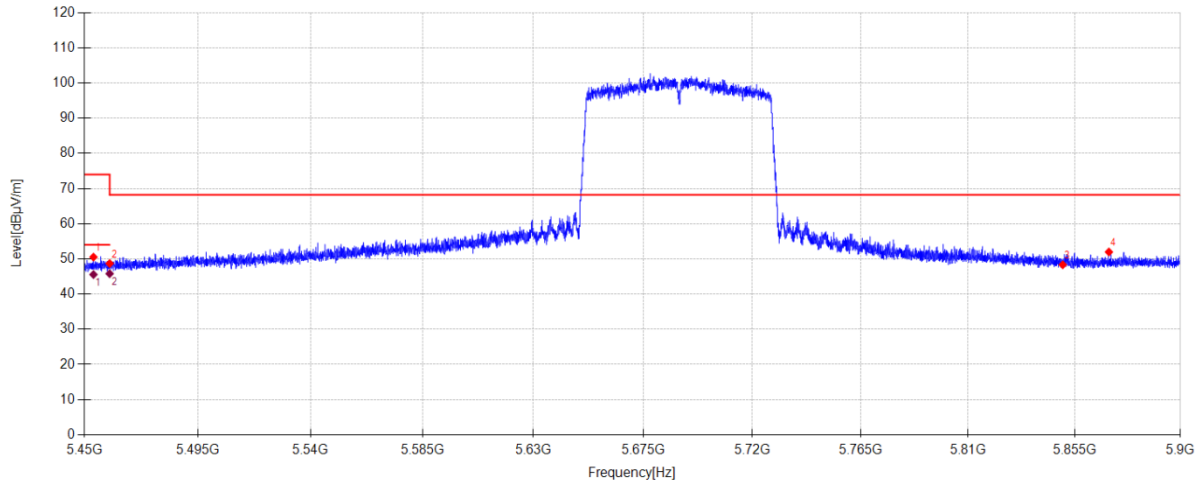**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.600	41.43	33.80	-24.71	50.52	74.00	23.48	PK	Horizontal
2	5460.000	39.58	33.80	-24.68	48.70	68.20	19.50	PK	Horizontal
3	5850.000	38.20	34.80	-24.67	48.33	68.20	19.87	PK	Horizontal
4	5869.580	41.78	34.84	-24.65	51.97	68.20	16.23	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.600	36.46	33.80	-24.71	45.55	54.00	8.45	AV	Horizontal
2	5460.000	36.68	33.80	-24.68	45.80	54.00	8.20	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AC80 5690MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\14
Memo: Sample Number: S26072701-001

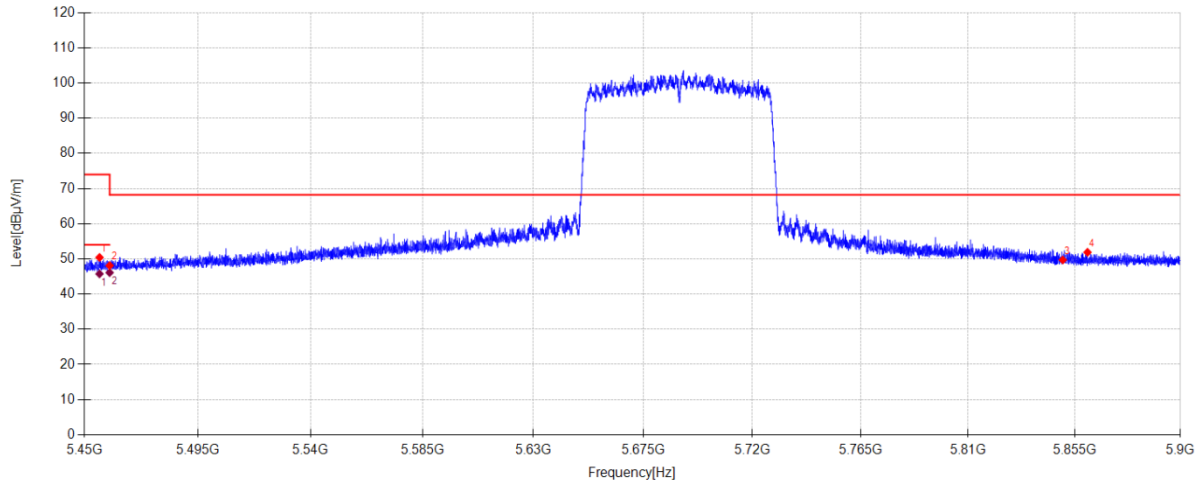**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.985	41.31	33.80	-24.70	50.41	74.00	23.59	PK	Vertical
2	5460.000	38.98	33.80	-24.68	48.10	68.20	20.10	PK	Vertical
3	5850.000	39.58	34.80	-24.67	49.71	68.20	18.49	PK	Vertical
4	5860.490	41.72	34.82	-24.66	51.88	68.20	16.32	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.985	36.65	33.80	-24.70	45.75	54.00	8.25	AV	Vertical
2	5460.000	36.98	33.80	-24.68	46.10	54.00	7.90	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\15
Memo: Sample Number: S26072701-001

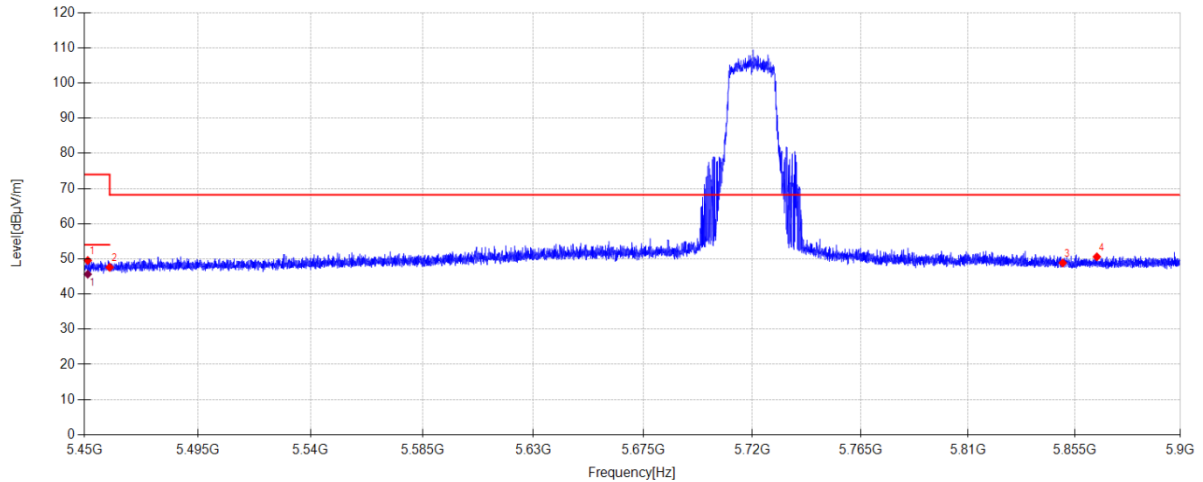**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.350	40.47	33.80	-24.72	49.55	74.00	24.45	PK	Horizontal
2	5460.000	38.49	33.80	-24.68	47.61	68.20	20.59	PK	Horizontal
3	5850.000	38.71	34.80	-24.67	48.84	68.20	19.36	PK	Horizontal
4	5864.450	40.42	34.83	-24.65	50.60	68.20	17.60	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5451.350	36.57	33.80	-24.72	45.65	54.00	8.35	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX20 5720MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\16
Memo: Sample Number: S26072701-001

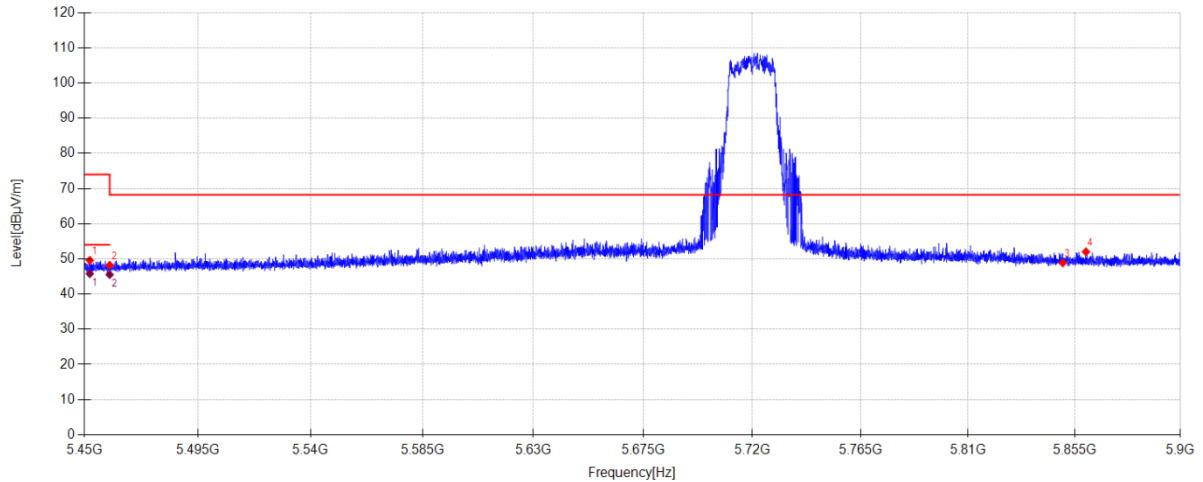**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.160	40.52	33.80	-24.72	49.60	74.00	24.40	PK	Vertical
2	5460.000	39.09	33.80	-24.68	48.21	68.20	19.99	PK	Vertical
3	5850.000	38.73	34.80	-24.67	48.86	68.20	19.34	PK	Vertical
4	5859.815	41.86	34.82	-24.66	52.02	68.20	16.18	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5452.160	36.69	33.80	-24.72	45.77	54.00	8.23	AV	Vertical
2	5460.000	36.41	33.80	-24.68	45.53	54.00	8.47	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5710MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\17
Memo: Sample Number: S26072701-001

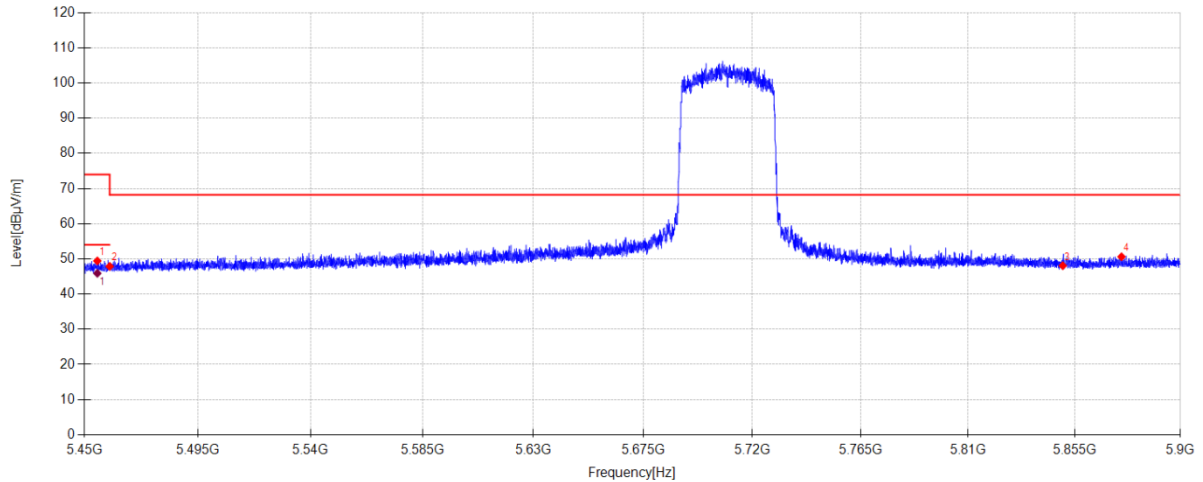**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.130	40.32	33.80	-24.70	49.42	74.00	24.58	PK	Horizontal
2	5460.000	38.76	33.80	-24.68	47.88	68.20	20.32	PK	Horizontal
3	5850.000	37.94	34.80	-24.67	48.07	68.20	20.13	PK	Horizontal
4	5874.935	40.40	34.85	-24.64	50.61	68.20	17.59	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5455.130	36.81	33.80	-24.70	45.91	54.00	8.09	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX40 5710MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\18
Memo: Sample Number: S26072701-001

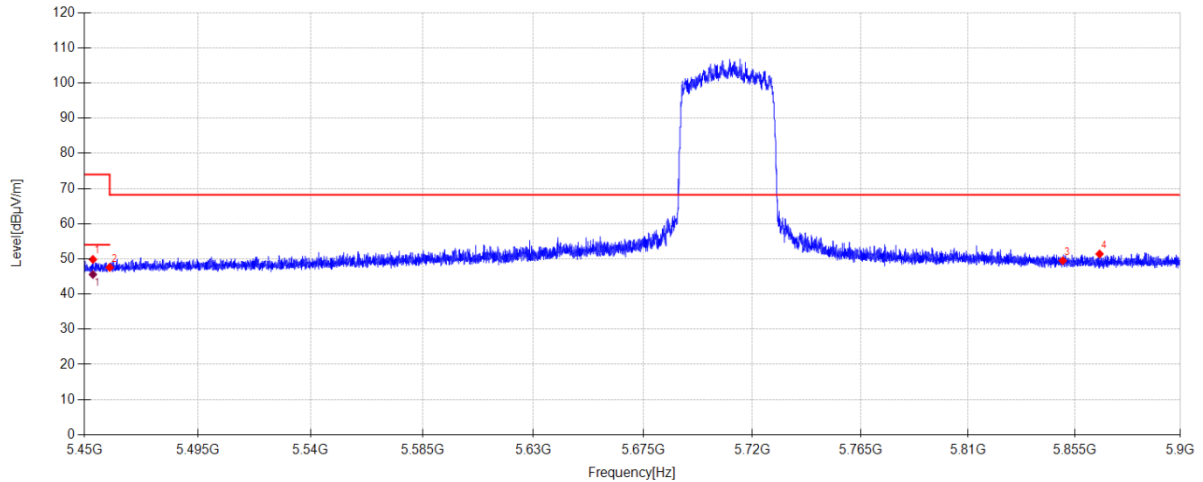**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.375	40.76	33.80	-24.71	49.85	74.00	24.15	PK	Vertical
2	5460.000	38.46	33.80	-24.68	47.58	68.20	20.62	PK	Vertical
3	5850.000	39.36	34.80	-24.67	49.49	68.20	18.71	PK	Vertical
4	5865.620	41.22	34.83	-24.65	51.40	68.20	16.80	PK	Vertical

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5453.375	36.48	33.80	-24.71	45.57	54.00	8.43	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-08-05 **Tested By:** Cao Jie
Test Mode: MIMO TX 11AX80 5690MHz Mode **Power Supply:** DC 5V
Condition: Temp:23.4°C;Humi:48.3% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\19
Memo: Sample Number: S26072701-001

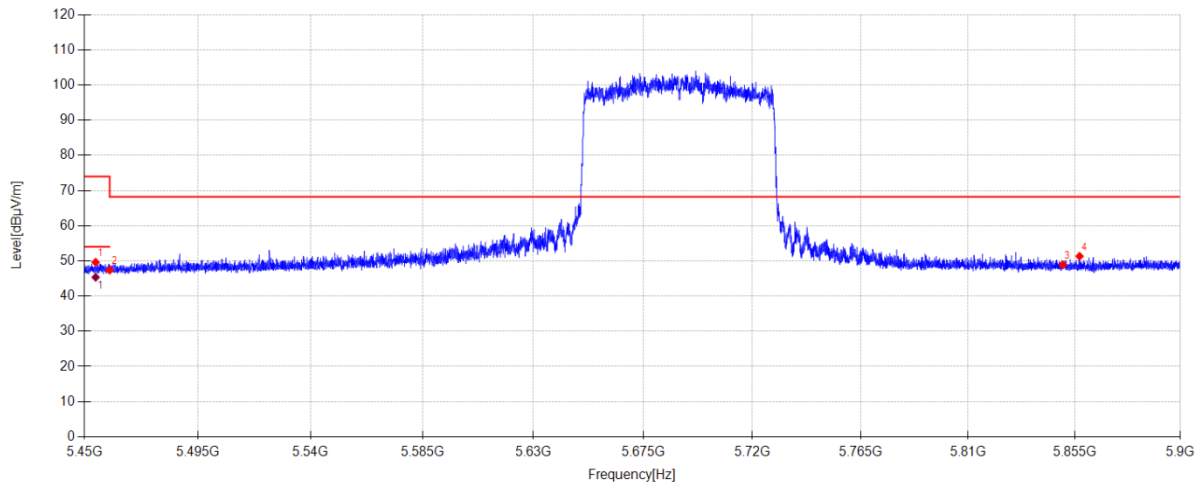**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.455	40.53	33.80	-24.71	49.62	74.00	24.38	PK	Horizontal
2	5460.000	38.24	33.80	-24.68	47.36	68.20	20.84	PK	Horizontal
3	5850.000	38.77	34.80	-24.67	48.90	68.20	19.30	PK	Horizontal
4	5857.115	41.17	34.81	-24.66	51.32	68.20	16.88	PK	Horizontal

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5454.455	36.25	33.80	-24.71	45.34	54.00	8.66	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Cao Jie

Test Mode:

MIMO TX 11AX80 5690MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G KUAYUE\20

Memo:

Sample Number: S26072701-001

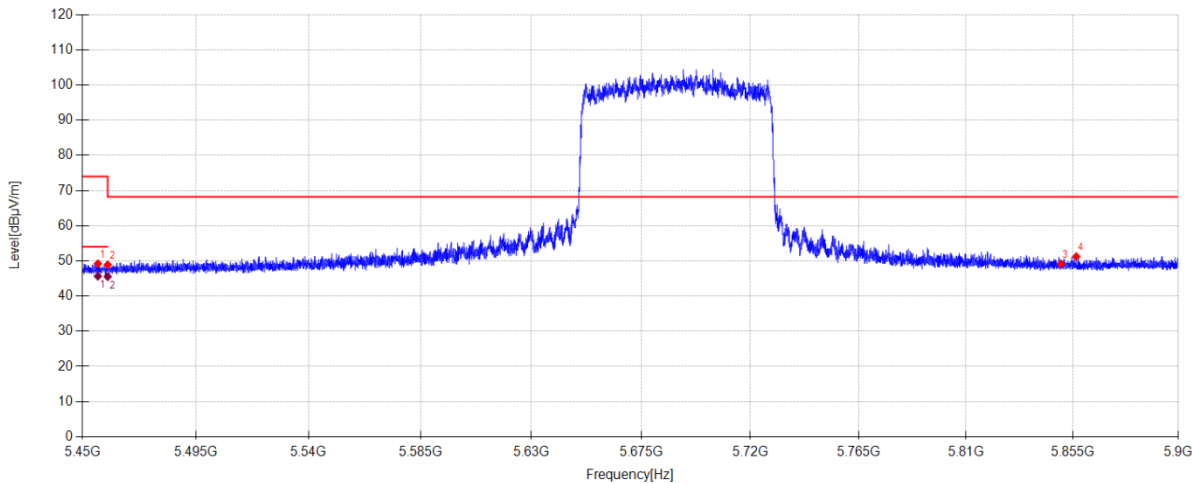

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.120	40.12	33.80	-24.70	49.22	74.00	24.78	PK	Vertical
2	5460.000	39.76	33.80	-24.68	48.88	68.20	19.32	PK	Vertical
3	5850.000	39.01	34.80	-24.67	49.14	68.20	19.06	PK	Vertical
4	5856.575	41.08	34.81	-24.66	51.23	68.20	16.97	PK	Vertical

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5456.120	36.54	33.80	-24.70	45.64	54.00	8.36	AV	Vertical
2	5460.000	36.39	33.80	-24.68	45.51	54.00	8.49	AV	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Liang Rijing

Test Mode:

MIMO TX RU0 AX20 5180MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G RU\15

Memo:

Sample Number: S26072701-001

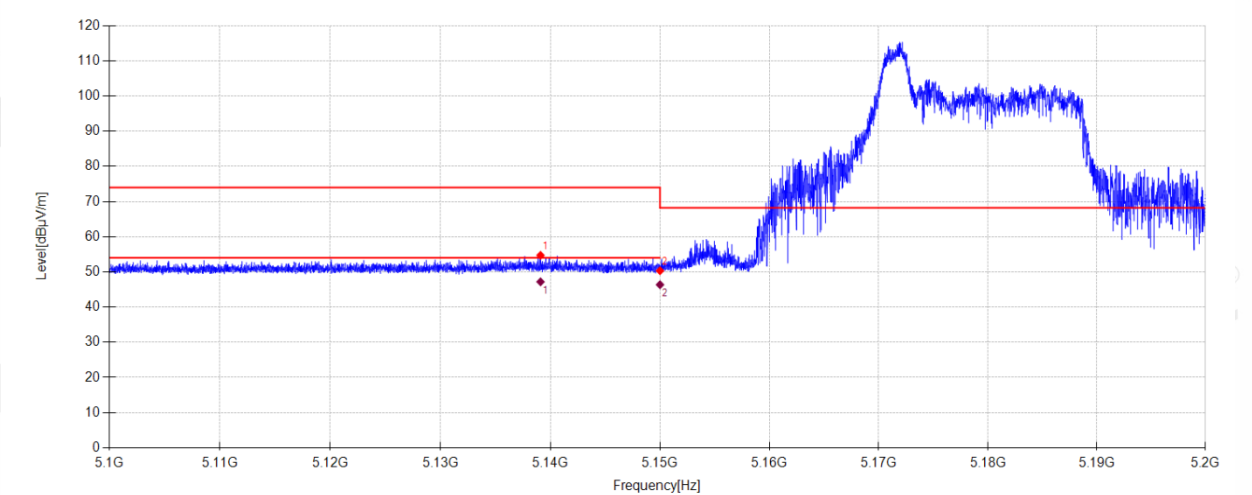

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5139.110	45.81	33.92	-25.02	54.71	74.00	19.29	PK	Horizontal
2	5150.000	41.45	33.90	-25.02	50.33	68.20	17.87	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5139.110	38.29	33.92	-25.02	47.19	54.00	6.81	AV	Horizontal
2	5150.000	37.48	33.90	-25.02	46.36	54.00	7.64	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-08-05

Tested By:

Liang Rijing

Test Mode:

MIMO TX RU0 AX20 5180MHz Mode

Power Supply:

DC 5V

Condition:

Temp:23.4°C;Humi:48.3%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26072701-2E\FCC ABOVE 1G 5G RU\16

Memo:

Sample Number: S26072701-001

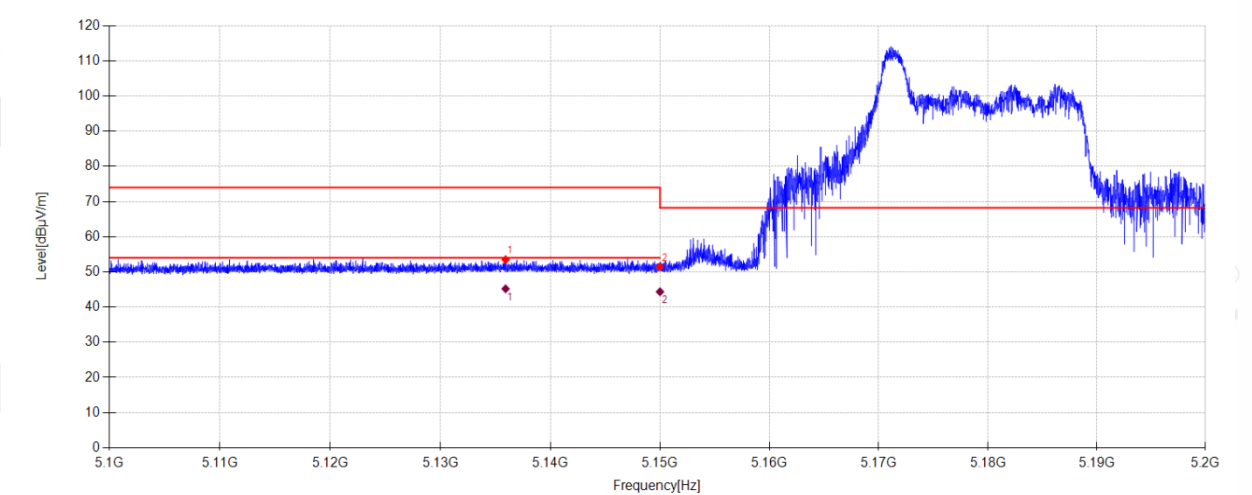

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5135.930	44.58	33.93	-25.02	53.49	74.00	20.51	PK	Vertical
2	5150.000	42.57	33.90	-25.02	51.45	68.20	16.75	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5135.930	36.29	33.93	-25.02	45.20	54.00	8.80	AV	Vertical
2	5150.000	35.48	33.90	-25.02	44.36	54.00	9.64	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.