



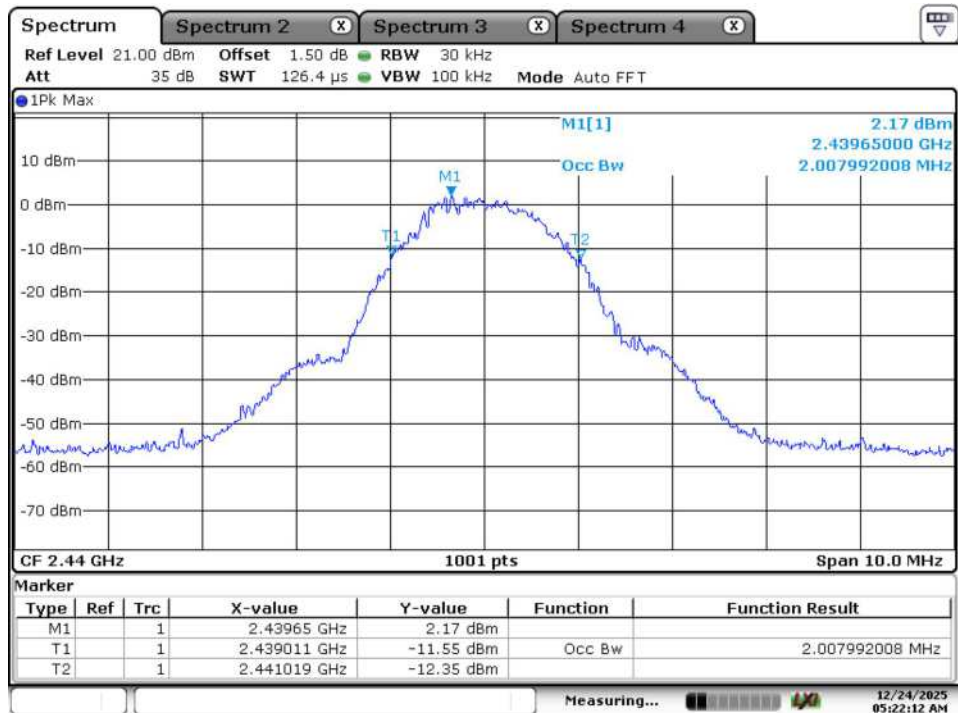

Date: 24.DEC.2025 05:22:13

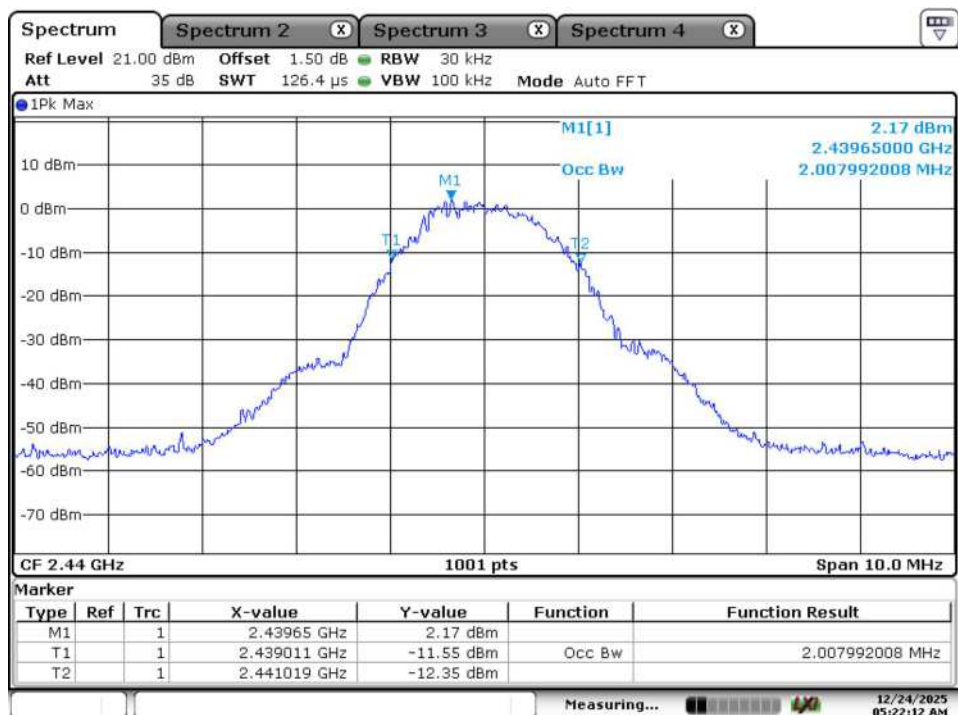

Date: 24.DEC.2025 05:22:13

Appendix B.4: Test Results of Frequency stability

Test Channel (MHz)	2402
-----------------------	------

Test result of frequency tolerance of voltage variation

Voltage	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
DC 12V	2401.989	-11	-4.58	10
DC 10.8V	2401.990	-10	-4.16	
DC 13.2V	2401.992	-8	-3.33	

Test result of frequency tolerance of temperature variation

Temperature (°C)	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
-20	2401.988	-11.6	-4.83	10
-10	2401.985	-15	-6.24	
0	2401.987	-13	-5.41	
10	2401.988	-12	-5.00	
20	2401.990	-10	-4.16	
30	2401.992	-8	-3.33	
40	2401.989	-11	-4.58	
50	2401.987	-13	-5.41	
60	2401.985	-15	-6.24	
70	2401.984	-16	-6.66	

Test Channel (MHz)	2440
-----------------------	------

Test result of frequency tolerance of voltage variation

Voltage	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
DC 12V	2439.986	-14	-5.74	10
DC 10.8V	2439.991	-9	-3.69	
DC 13.2V	2439.990	-10	-4.10	

Test result of frequency tolerance of temperature variation

Temperature (°C)	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
-20	2439.985	-15	-6.15	10
-10	2439.986	-14	-5.74	
0	2439.988	-12	-4.92	
10	2439.991	-9	-3.69	
20	2439.992	-8	-3.28	
30	2439.993	-7	-2.87	
40	2439.994	-6	-2.46	
50	2439.992	-8	-3.28	
60	2439.991	-9	-3.69	
70	2439.987	-13	-5.33	

Test Channel (MHz)	2480
-----------------------	------

Test result of frequency tolerance of voltage variation

Voltage	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
DC 12V	2479.988	-12	-4.84	10
DC 10.8V	2479.991	-9	-3.63	
DC 13.2V	2479.994	-6	-2.42	



Test result of frequency tolerance of temperature variation

Temperature (°C)	Test result (MHz)	Deviation Frequency (KHz)	Test result (ppm)	Limit (ppm)
-20	2479.987	-13	-5.24	10
-10	2479.988	-12	-4.84	
0	2479.986	-14	-5.65	
10	2479.990	-10	-4.03	
20	2479.992	-8	-3.23	
30	2479.993	-7	-2.82	
40	2479.995	-5	-2.02	
50	2479.989	-11	-4.44	
60	2479.996	-4	-1.61	
70	2479.995	-5	-2.02	



Appendix B.5: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Bluetooth LE Mode, 1Mbps


Low Channel:

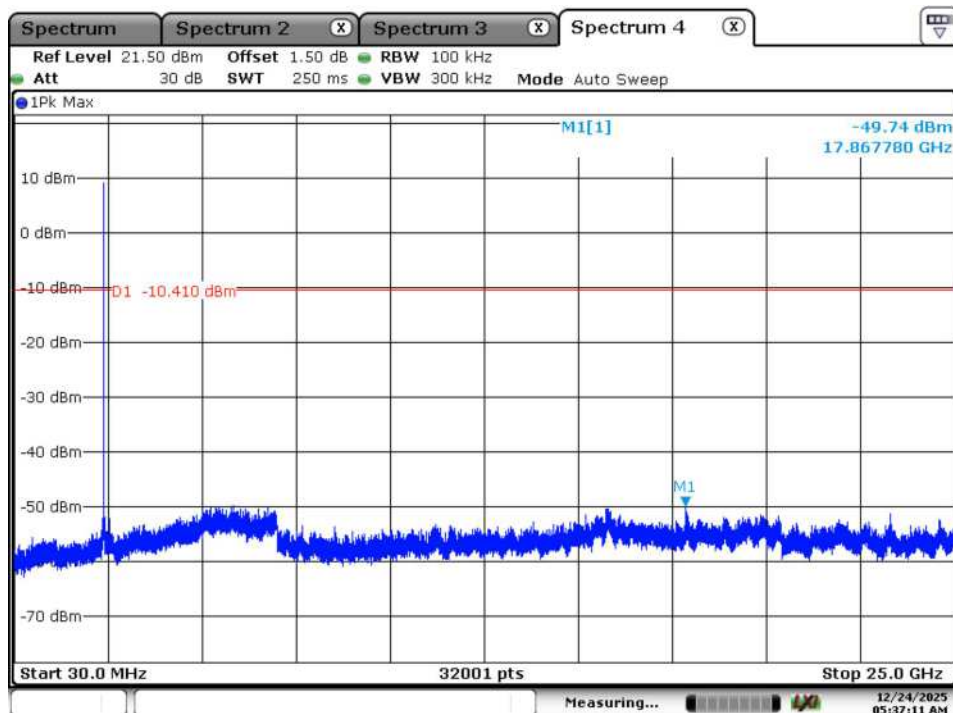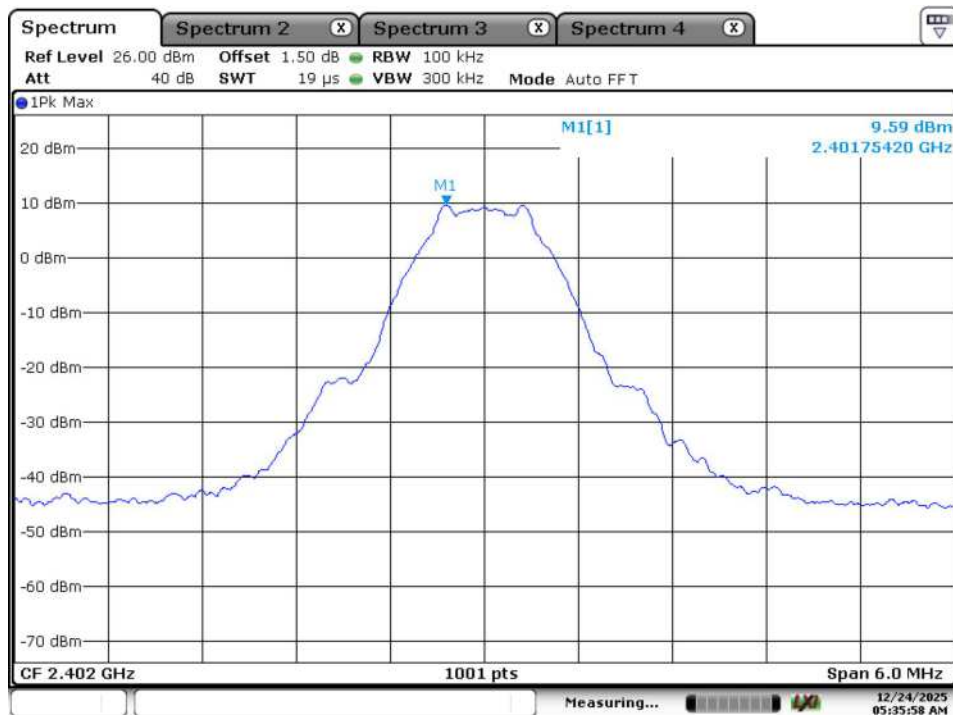


Middle Channel:

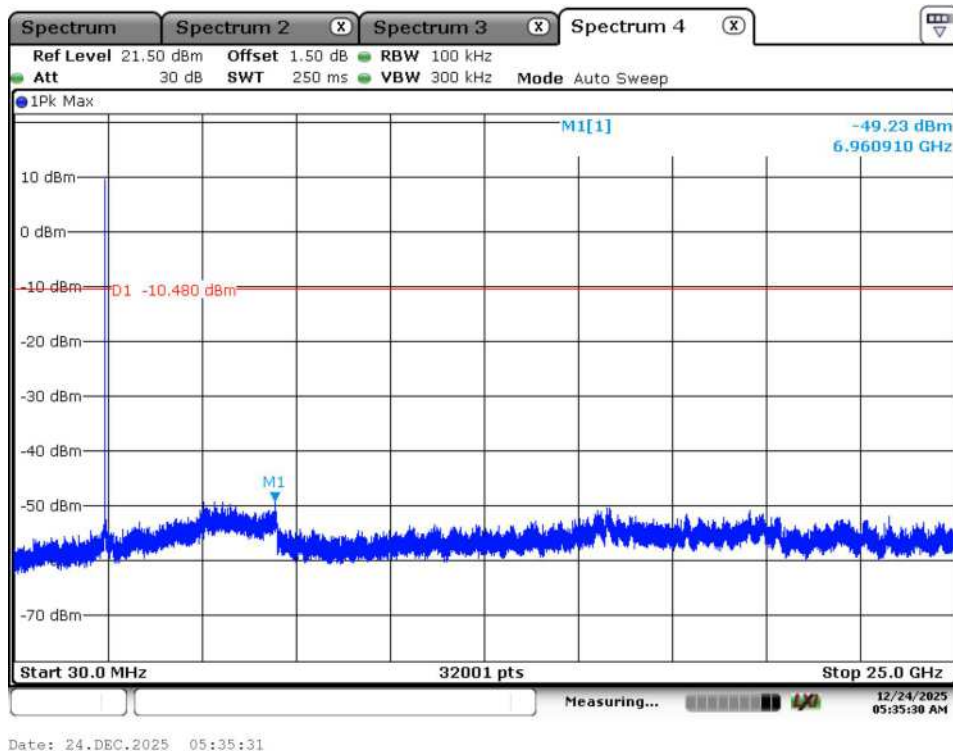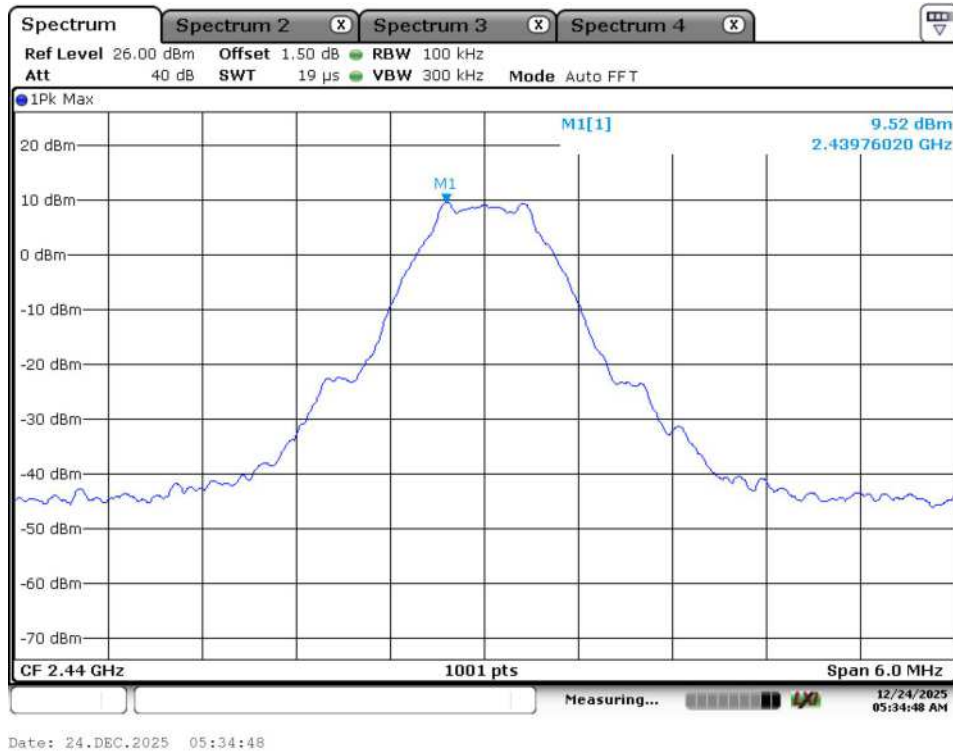

High Channel:

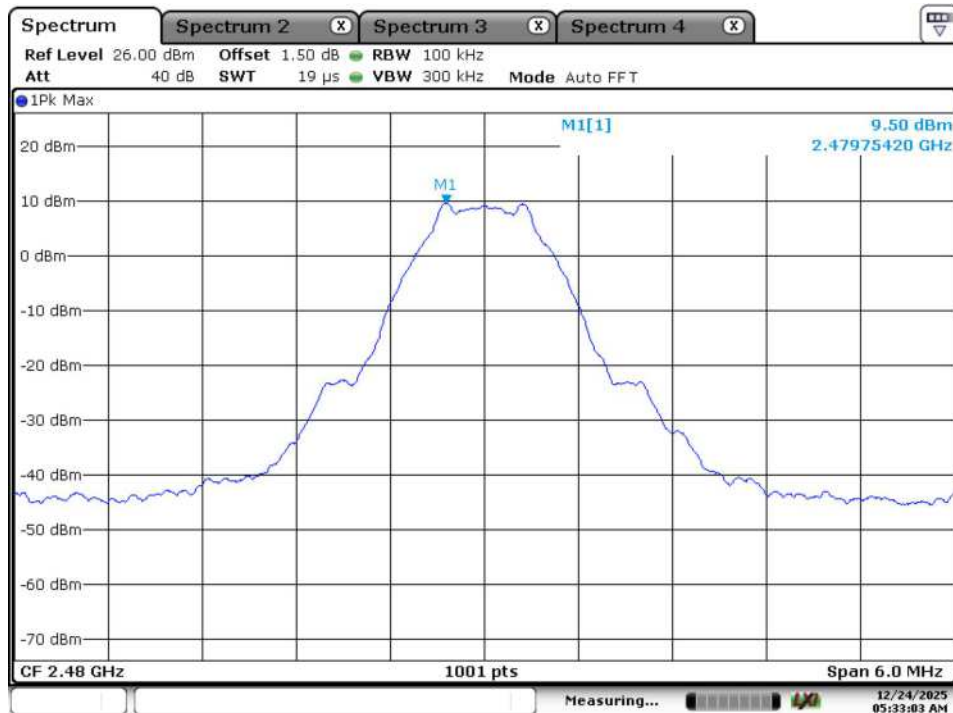


Date: 24.DEC.2025 05:33:04

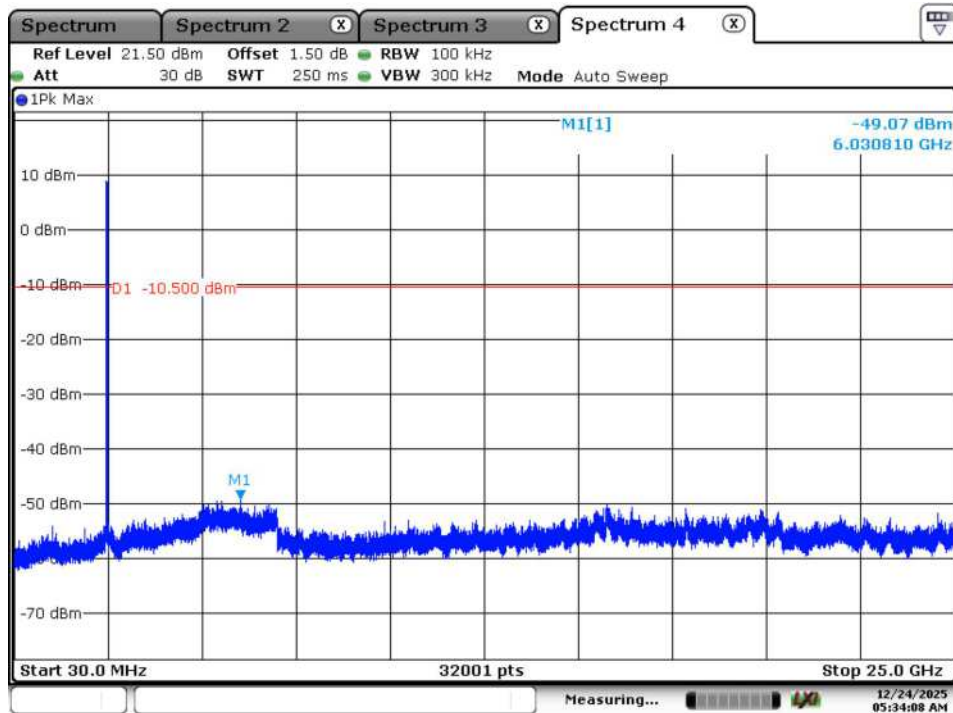


Date: 24.DEC.2025 05:34:08

Band Edge, Low Channel:

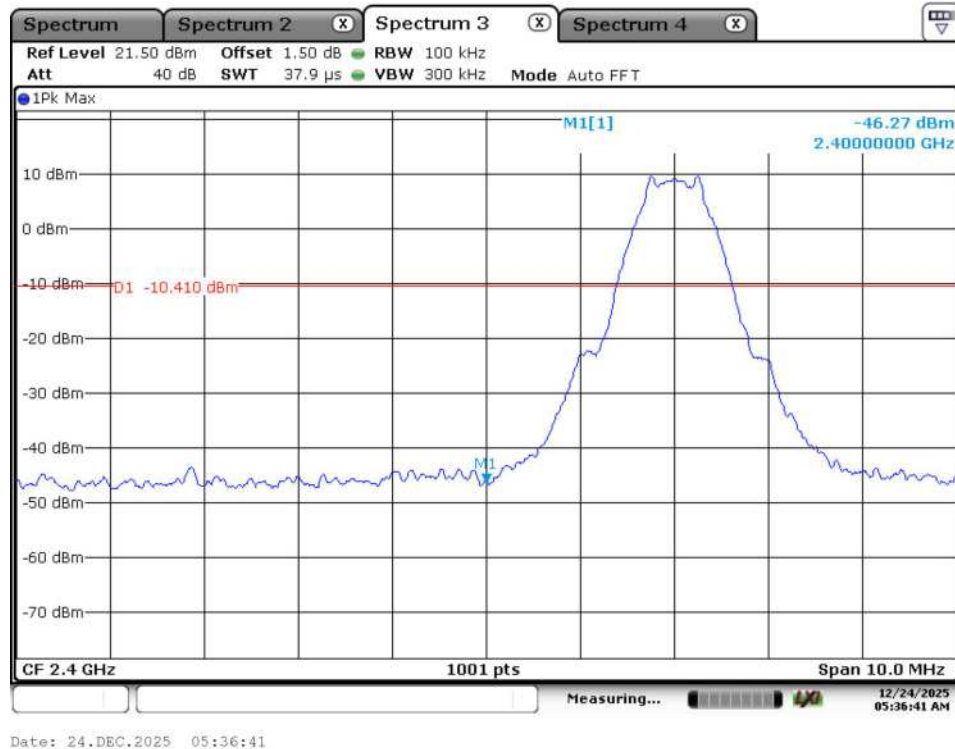


Band Edge, High Channel:

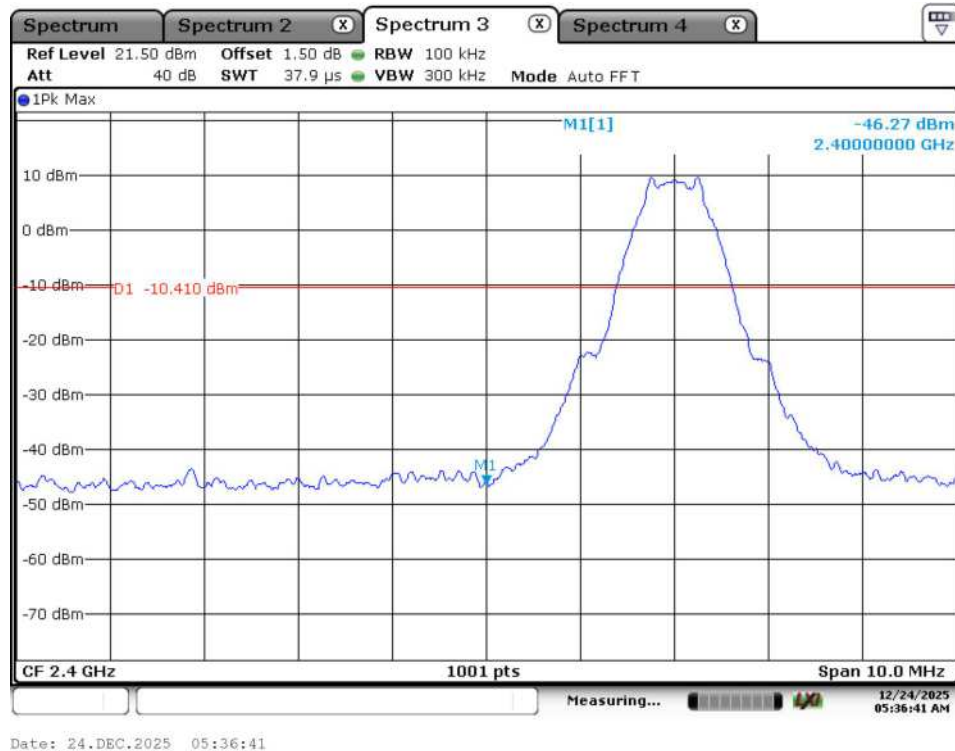


Bluetooth LE Mode, 2Mbps

Low Channel:

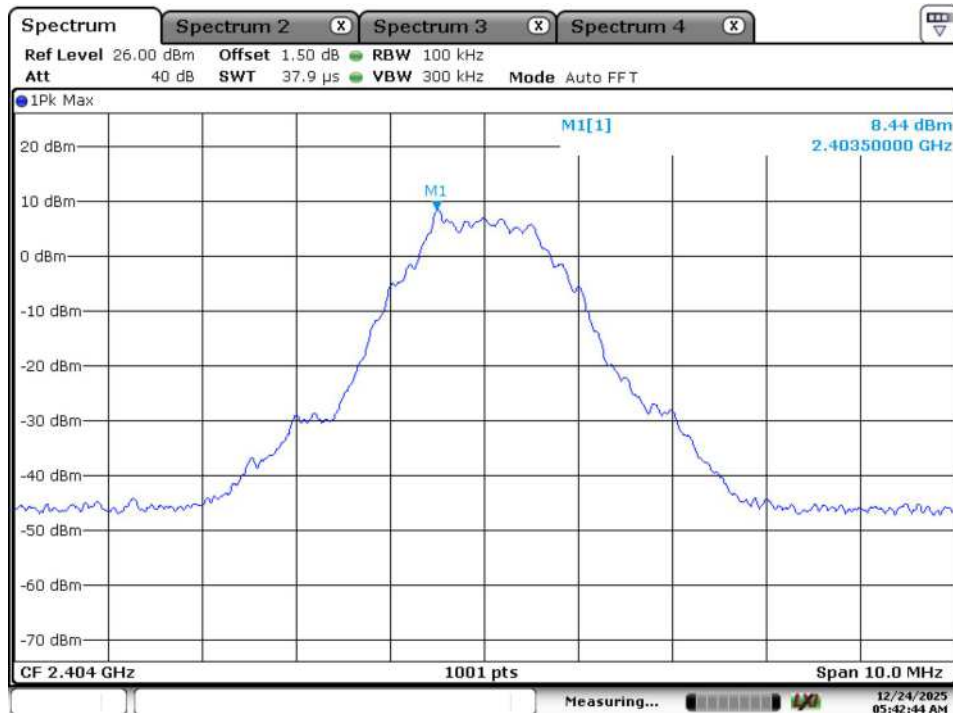


Date: 24.DEC.2025 05:42:44

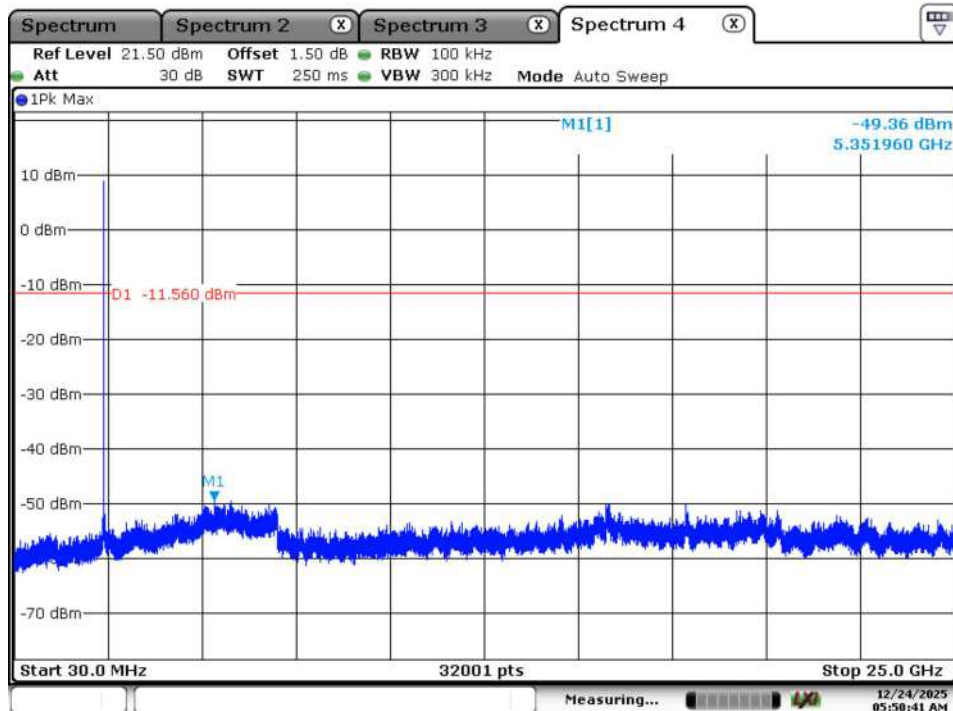


Date: 24.DEC.2025 05:50:41

Middle Channel:

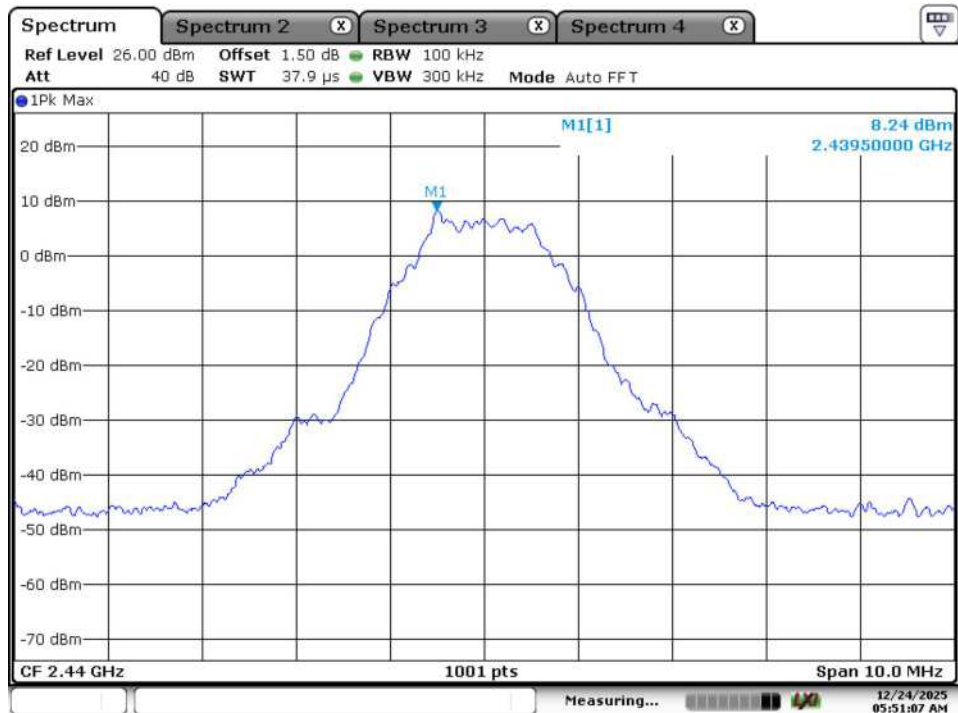


Date: 24.DEC.2025 05:51:07

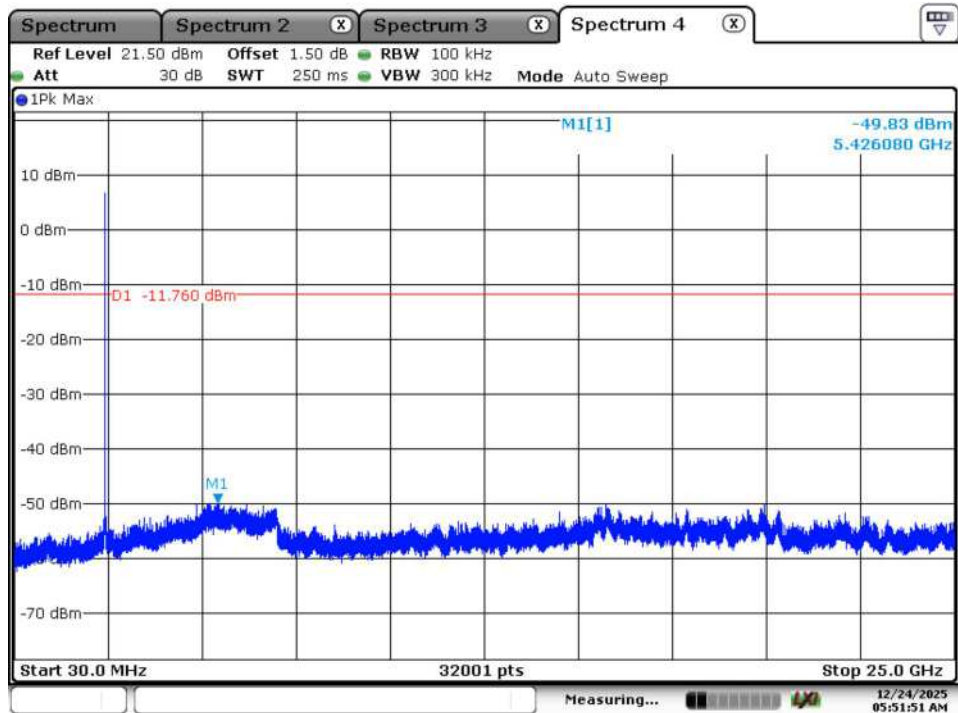


Date: 24.DEC.2025 05:51:51

High Channel:

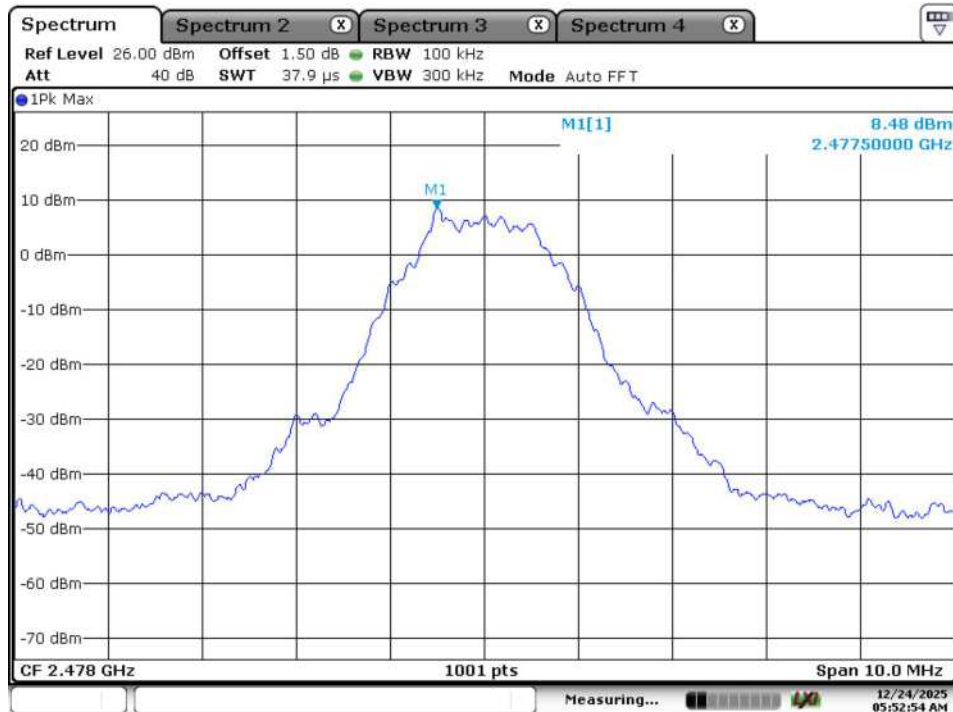


Date: 24.DEC.2025 05:52:54

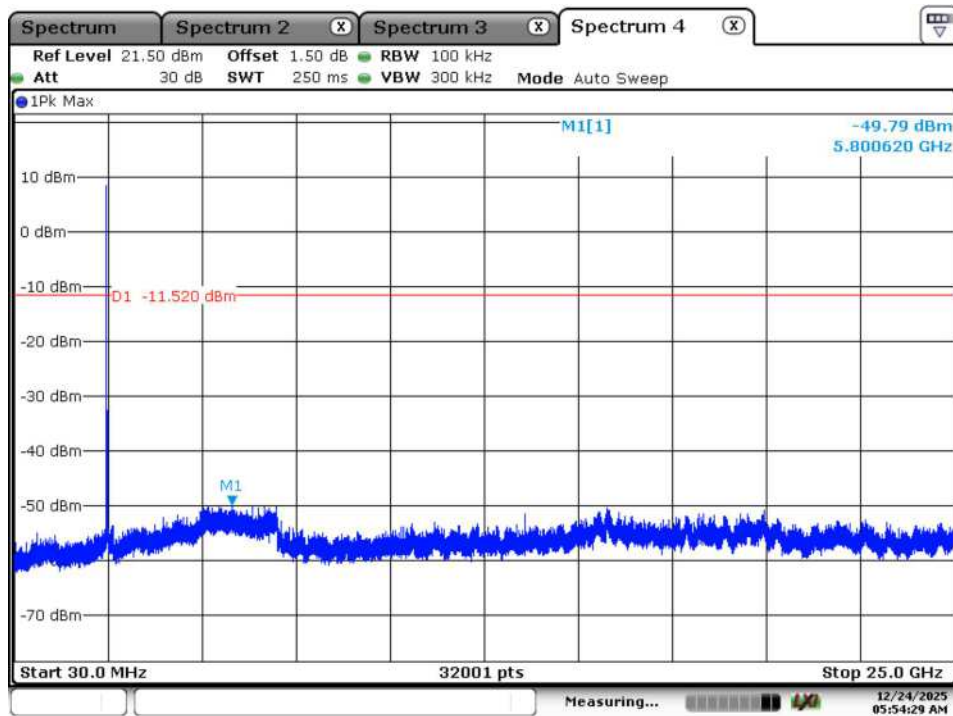


Date: 24.DEC.2025 05:54:29

Band Edge, Low Channel:

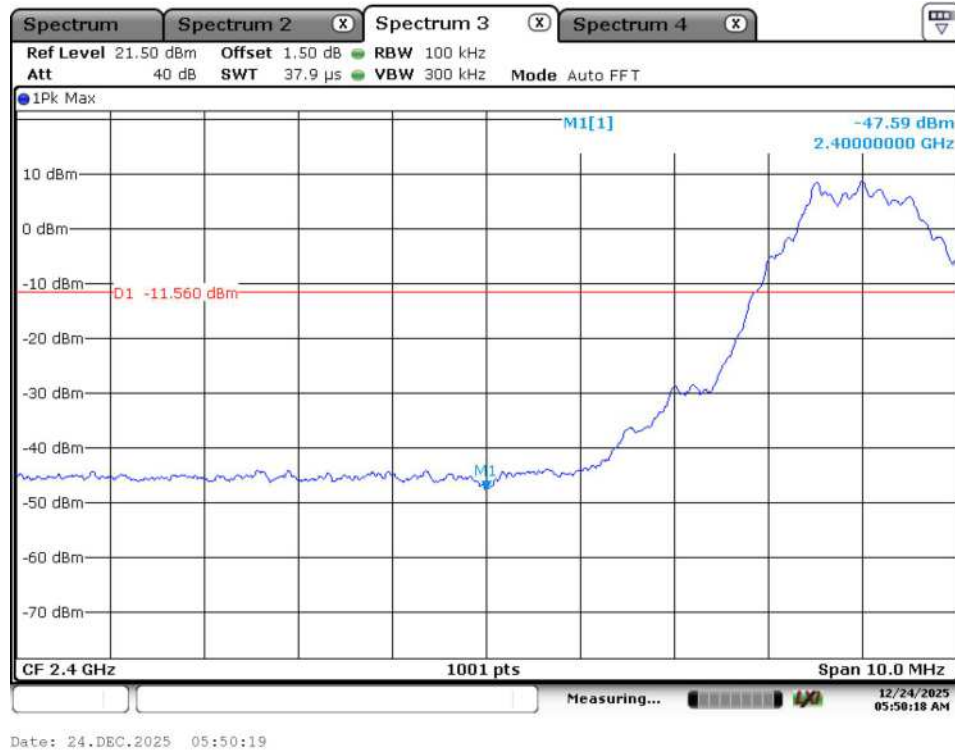

Band Edge, High Channel:

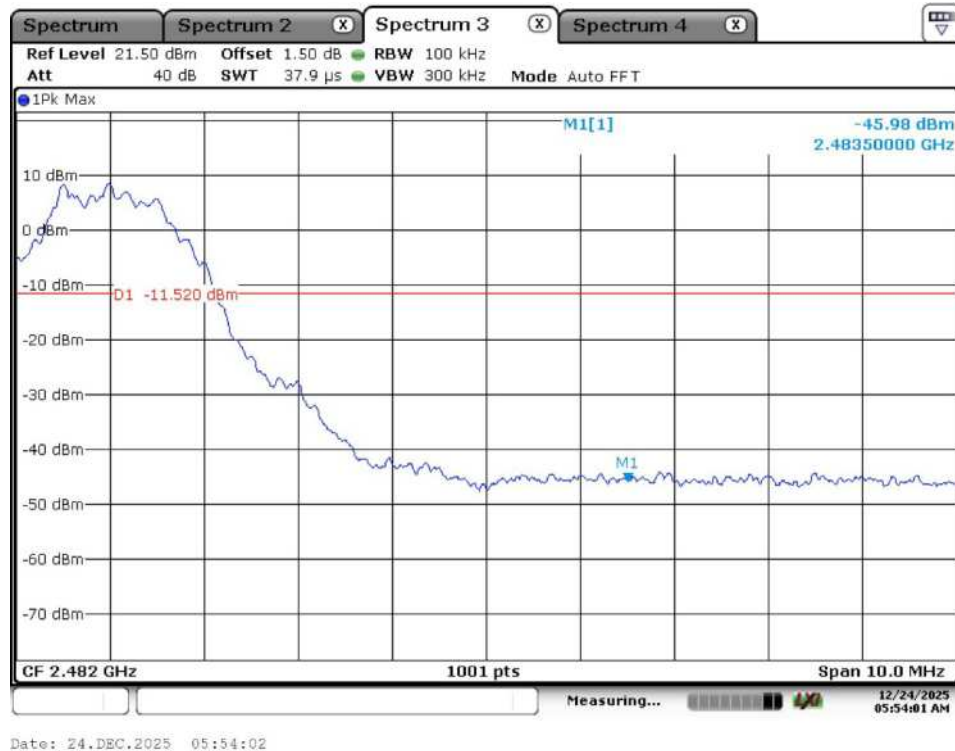

Appendix B.6: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

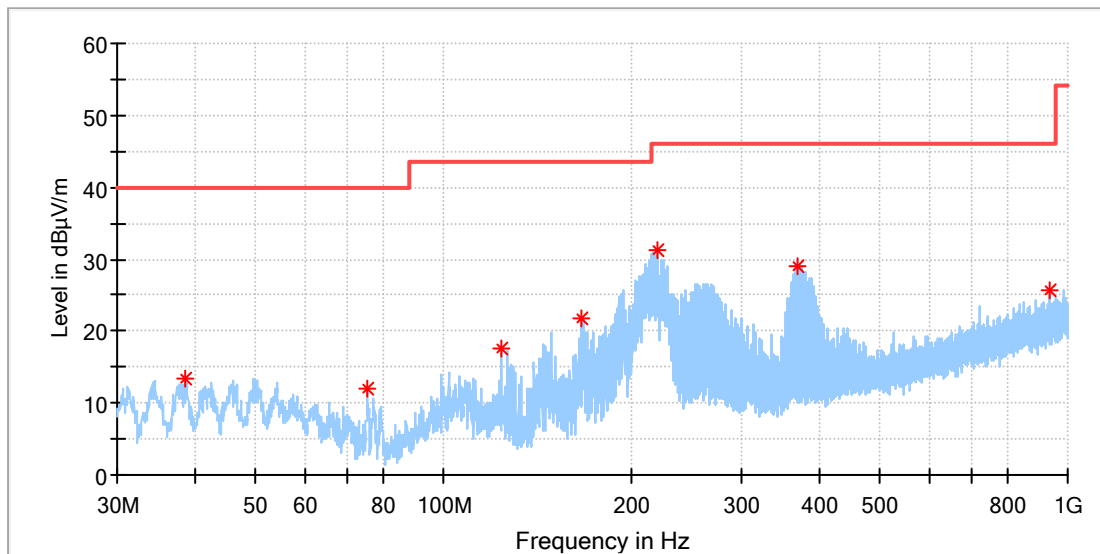


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
38.676111	13.31	40.00	26.69	100.0	H	268.0	-20.6
75.428333	12.00	40.00	28.00	100.0	H	296.0	-23.5
124.090000	17.72	43.50	25.78	100.0	H	138.0	-21.3
165.907778	21.83	43.50	21.67	100.0	H	151.0	-21.5
219.419444	31.34	46.00	14.66	100.0	H	121.0	-18.7
369.661667	29.15	46.00	16.85	100.0	H	158.0	-14.4
936.950000	25.80	46.00	20.20	100.0	H	51.0	-4.4

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

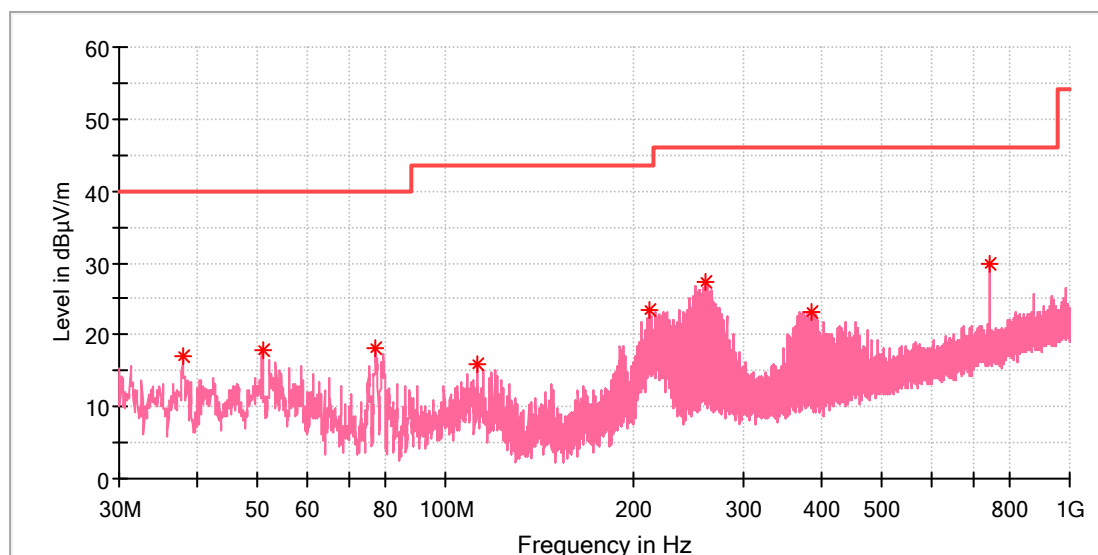

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.921667	16.99	40.00	23.01	100.0	V	11.0	-20.8
50.908889	17.96	40.00	22.04	100.0	V	19.0	-18.4
77.045000	18.07	40.00	21.93	100.0	V	203.0	-23.5
112.288333	16.01	43.50	27.49	100.0	V	108.0	-19.5
212.845000	23.39	43.50	20.11	100.0	V	197.0	-18.8
261.129444	27.37	46.00	18.63	100.0	V	145.0	-17.1
386.475000	23.23	46.00	22.77	100.0	V	203.0	-14.1
742.518889	29.74	46.00	16.26	100.0	V	145.0	-7.2

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

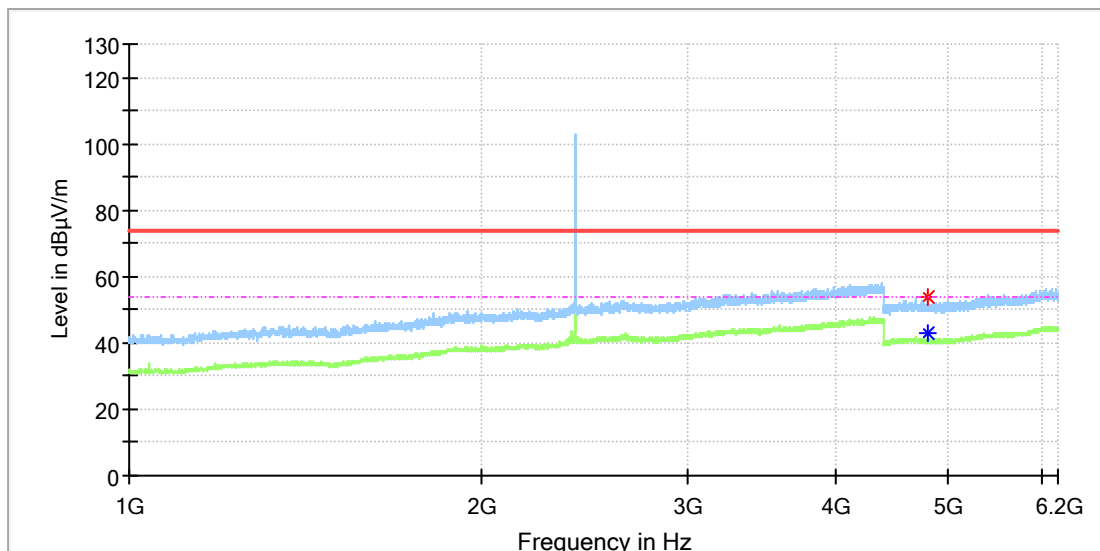


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	53.82	---	74.00	20.18	150.0	H	92.0	13.3
4804.000000	---	42.86	54.00	11.14	150.0	H	92.0	13.3

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

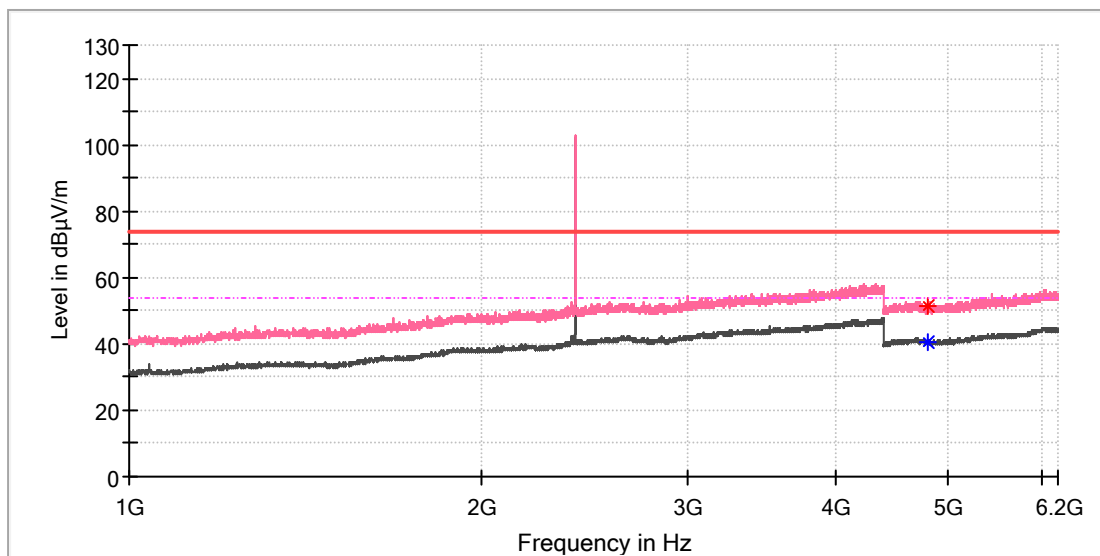


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.000000	51.70	---	74.00	22.30	150.0	V	95.0	13.3
4804.000000	---	40.74	54.00	13.26	150.0	V	247.0	13.3

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

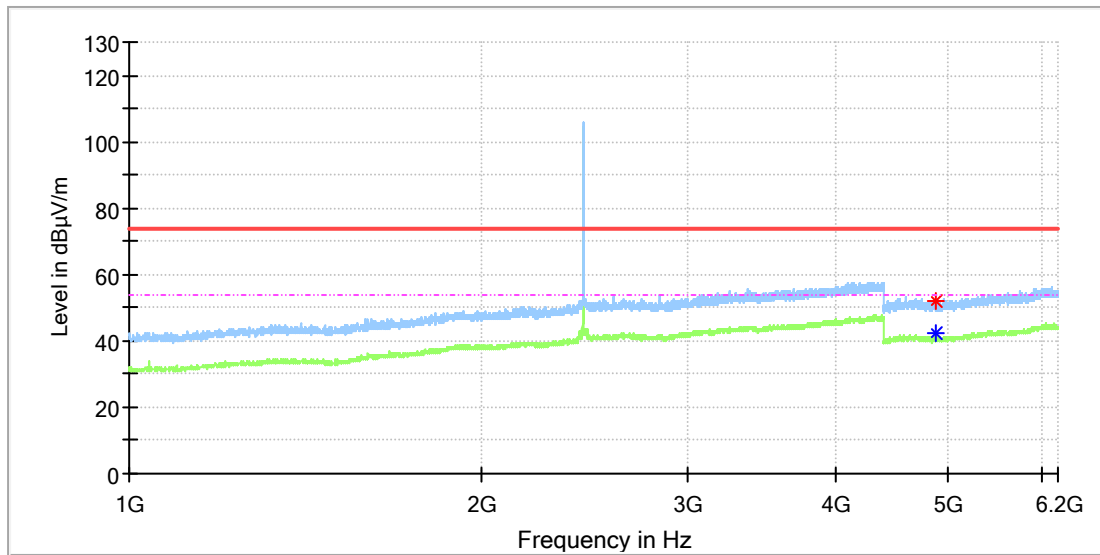


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4880.000000	52.19	---	74.00	21.81	150.0	H	73.0	13.3
4880.000000	---	42.58	54.00	11.42	150.0	H	73.0	13.3

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

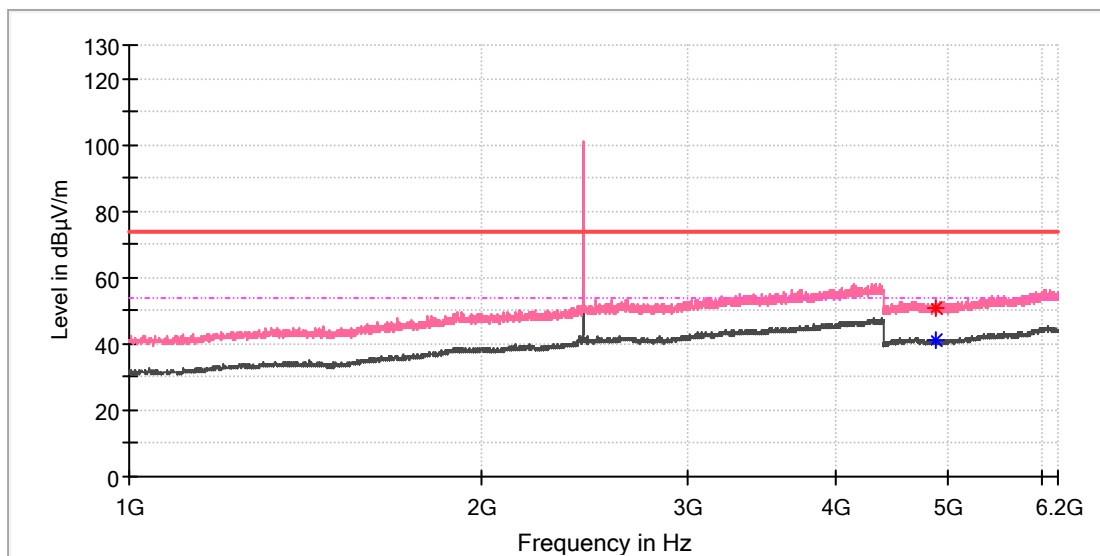


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4880.000000	---	41.03	54.00	12.97	150.0	V	190.0	13.3
4880.500000	51.07	---	74.00	22.93	150.0	V	263.0	13.3

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

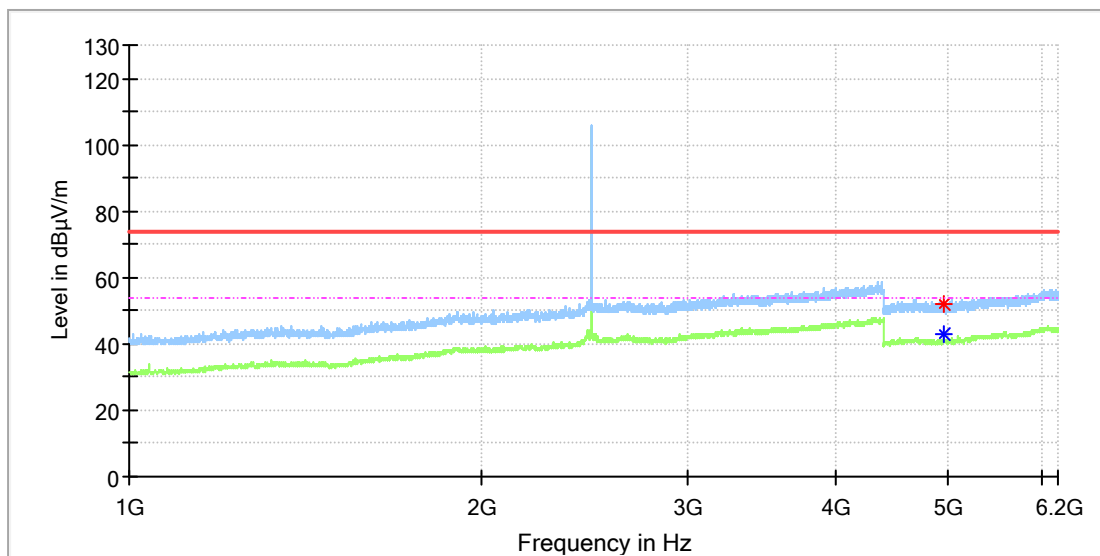


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	51.91	---	74.00	22.09	150.0	H	67.0	13.3
4960.000000	---	42.77	54.00	11.23	150.0	H	67.0	13.3

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

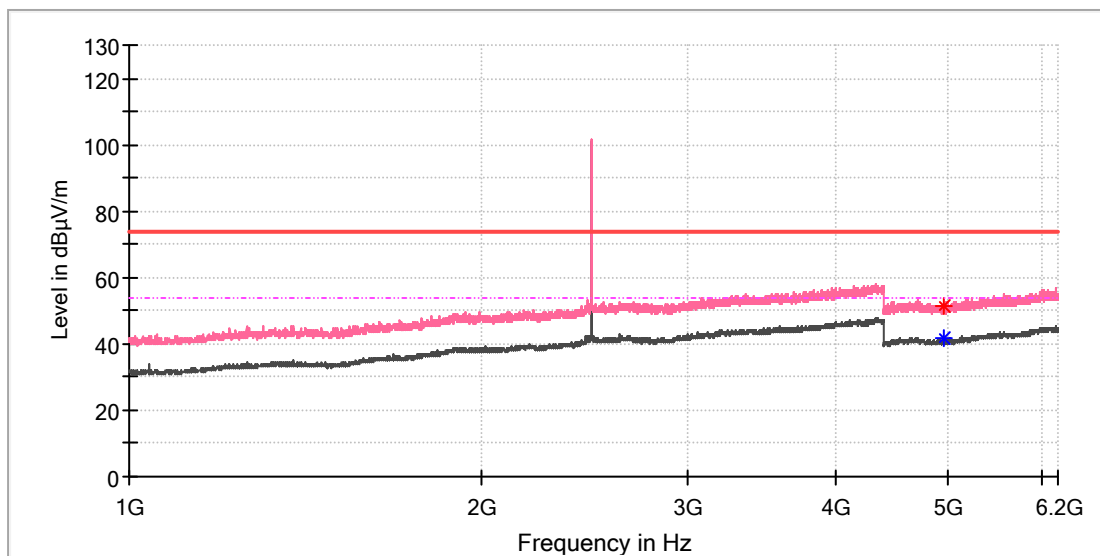


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4958.500000	51.46	---	74.00	22.54	150.0	V	244.0	13.3
4959.500000	---	41.43	54.00	12.57	150.0	V	239.0	13.3

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

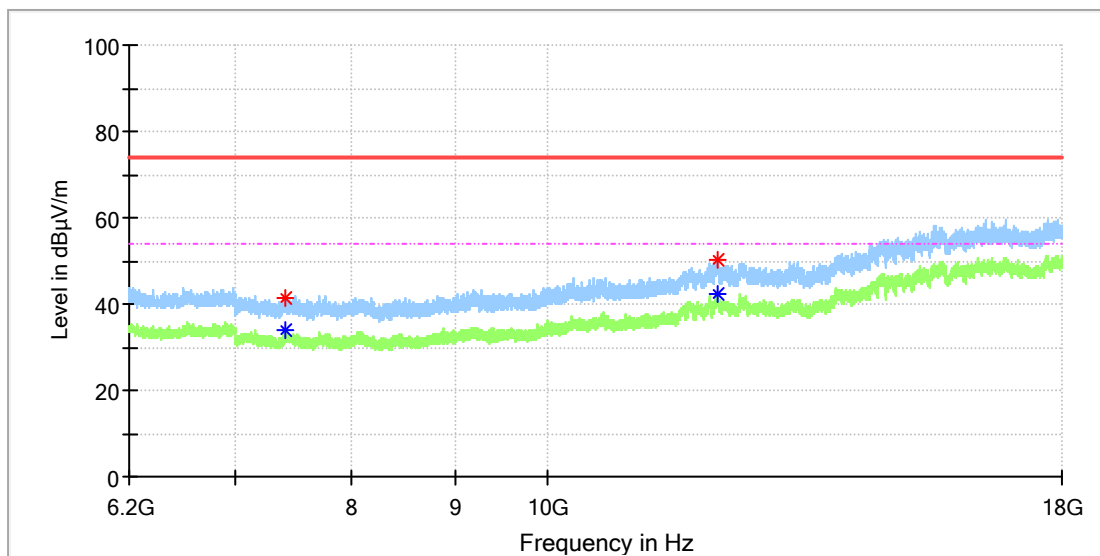


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7403.600000	41.25	---	74.00	32.75	150.0	H	114.0	8.3
7405.566667	---	33.87	54.00	20.13	150.0	H	203.0	8.3
12137.366667	---	42.34	54.00	11.66	150.0	H	246.0	16.4
12157.525000	50.05	---	74.00	23.95	150.0	H	35.0	16.3

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

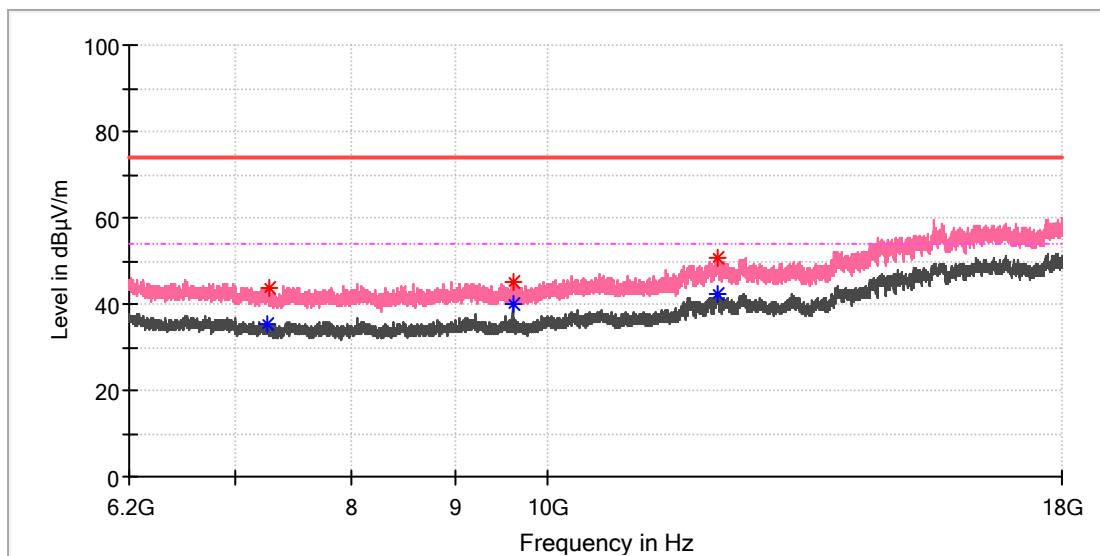


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7261.508333	---	35.13	54.00	18.87	150.0	V	67.0	8.5
7278.225000	43.88	---	74.00	30.12	150.0	V	217.0	8.4
9607.741667	---	40.09	54.00	13.91	150.0	V	261.0	10.4
9608.233333	45.20	---	74.00	28.80	150.0	V	306.0	10.4
12151.625000	---	42.46	54.00	11.54	150.0	V	250.0	16.6
12158.016667	50.47	---	74.00	23.53	150.0	V	140.0	16.3

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

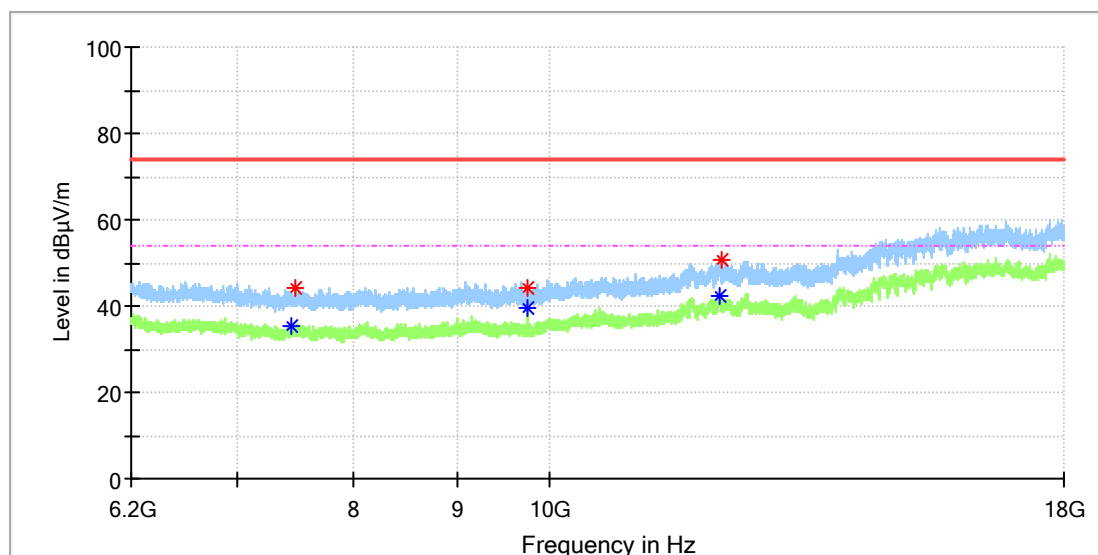


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7450.308333	---	35.54	54.00	18.46	150.0	H	0.0	8.5
7484.725000	44.18	---	74.00	29.82	150.0	H	23.0	8.7
9759.666667	44.05	---	74.00	29.95	150.0	H	70.0	10.4
9759.666667	---	39.31	54.00	14.69	150.0	H	70.0	10.4
12152.116667	---	42.15	54.00	11.85	150.0	H	46.0	16.6
12161.950000	50.77	---	74.00	23.23	150.0	H	300.0	16.1

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

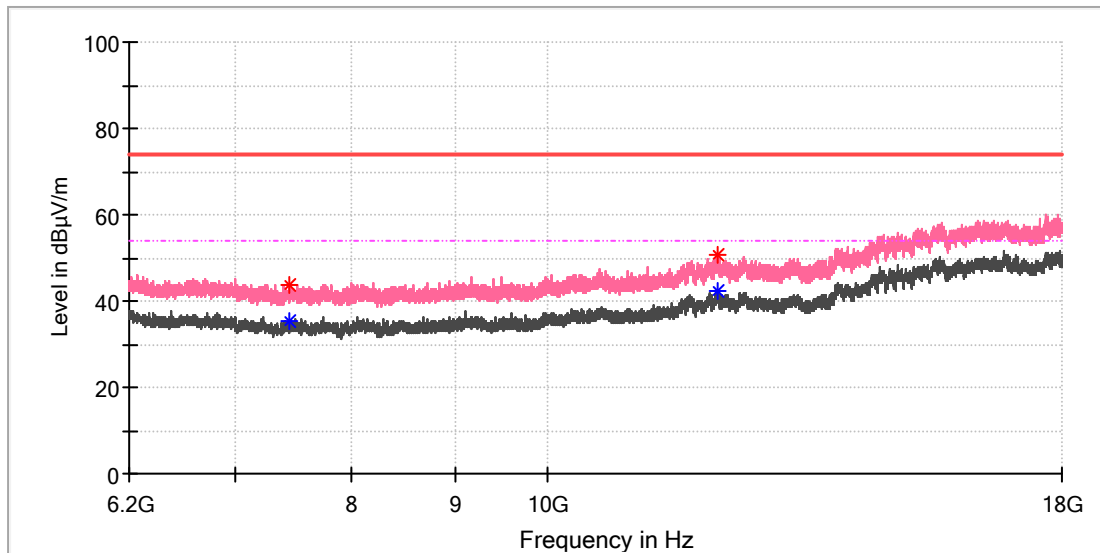


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7443.425000	43.93	---	74.00	30.07	150.0	V	10.0	8.5
7451.783333	---	35.51	54.00	18.49	150.0	V	228.0	8.5
12150.641667	50.80	---	74.00	23.21	150.0	V	205.0	16.7
12156.050000	---	42.19	54.00	11.81	150.0	V	0.0	16.4

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

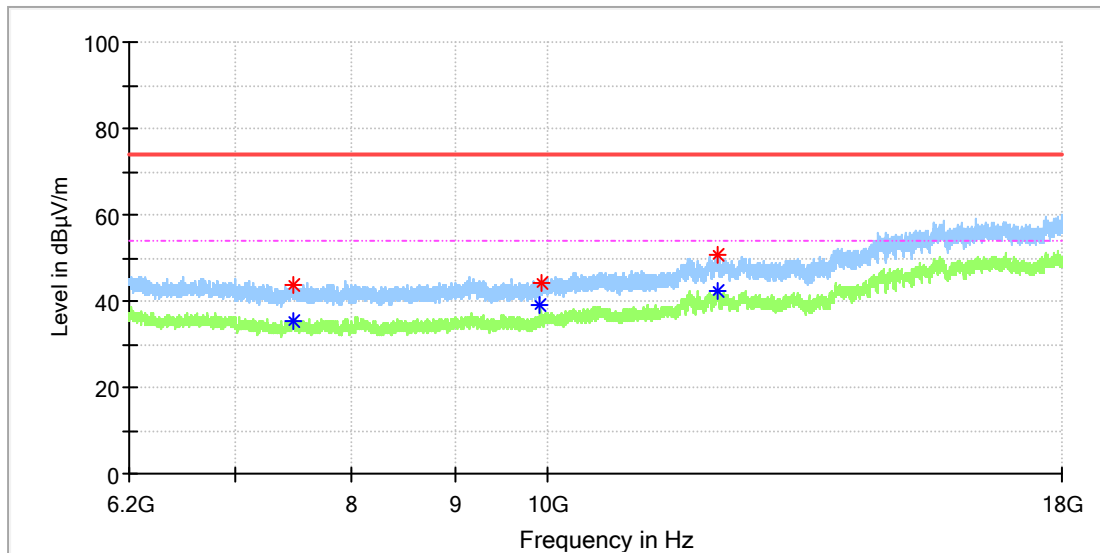


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7475.383333	43.82	---	74.00	30.18	150.0	H	68.0	8.6
7476.366667	---	35.51	54.00	18.49	150.0	H	165.0	8.6
9919.950000	---	38.91	54.00	15.09	150.0	H	68.0	10.8
9920.441667	44.40	---	74.00	29.60	150.0	H	68.0	10.8
12139.333333	50.77	---	74.00	23.23	150.0	H	110.0	16.5
12151.133333	---	42.29	54.00	11.71	150.0	H	355.0	16.7

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

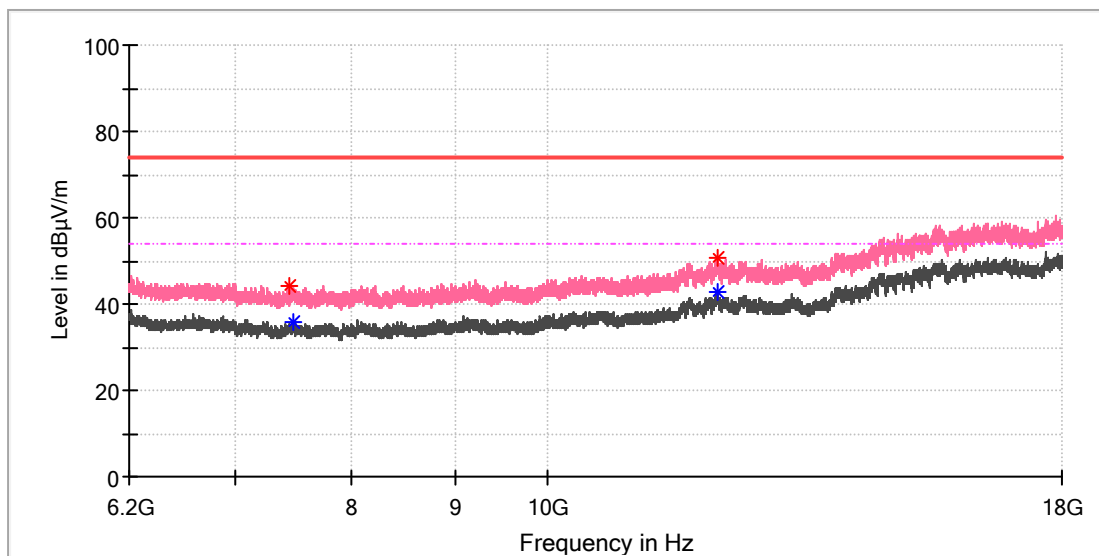


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7442.441667	44.18	---	74.00	29.82	150.0	V	80.0	8.4
7473.416667	---	35.87	54.00	18.13	150.0	V	32.0	8.6
12139.333333	50.55	---	74.00	23.45	150.0	V	0.0	16.5
12150.641667	---	42.66	54.00	11.34	150.0	V	232.0	16.7

Appendix B.7: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

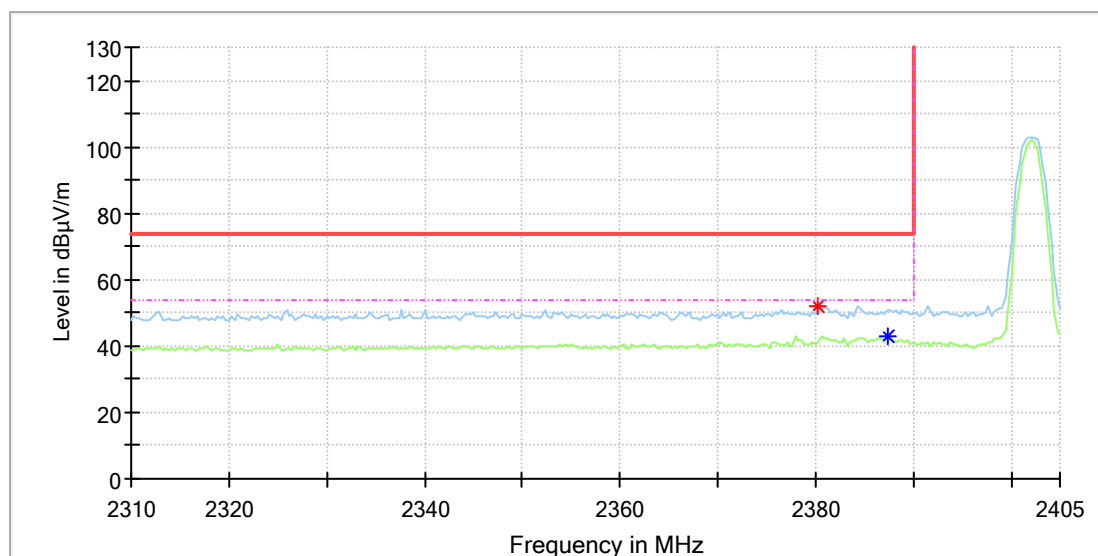


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2380.294118	51.91	---	74.00	22.09	150.0	H	108.0	8.5
2387.352941	---	42.92	54.00	11.08	150.0	H	101.0	8.5

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

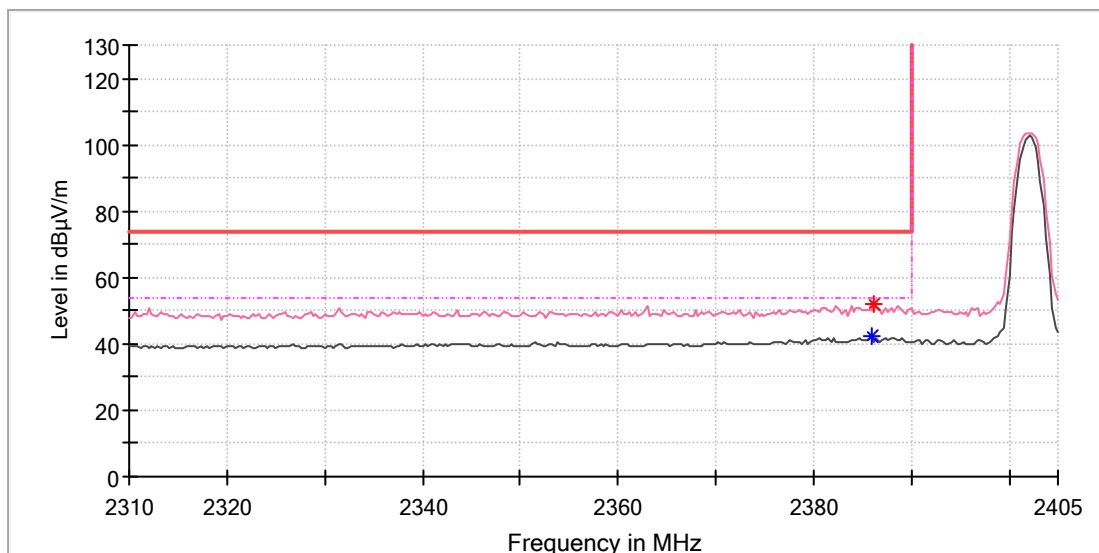


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2385.882353	---	42.33	54.00	11.67	150.0	V	138.0	8.5
2386.176471	52.09	---	74.00	21.91	150.0	V	0.0	8.5

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

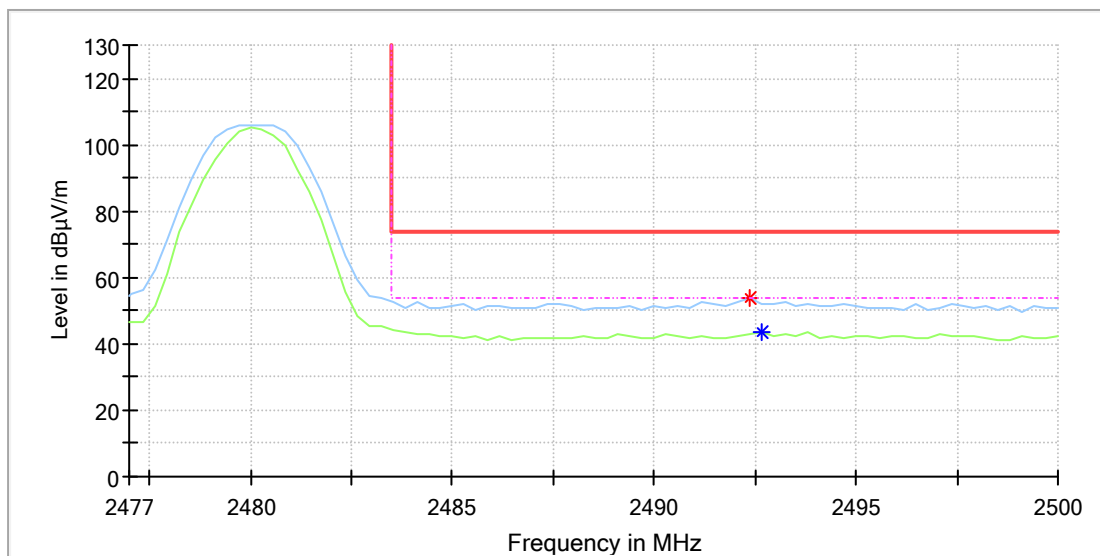


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2492.352941	53.54	---	74.00	20.46	150.0	H	10.0	9.0
2492.647059	---	43.38	54.00	10.62	150.0	H	30.0	9.0

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

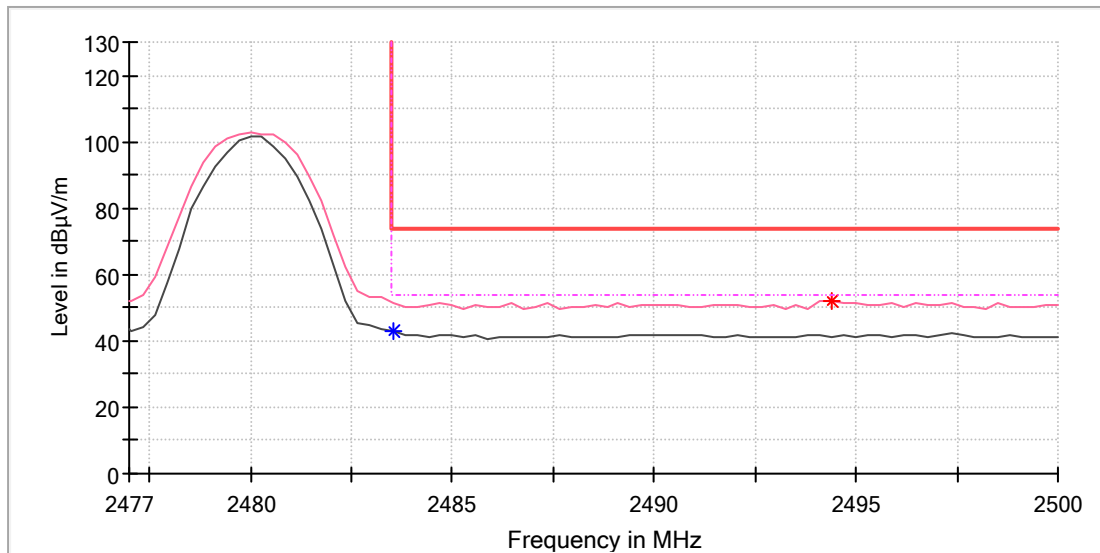


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.529412	---	42.65	54.00	11.35	150.0	V	315.0	9.0
2494.411765	51.90	---	74.00	22.10	150.0	V	331.0	9.0

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

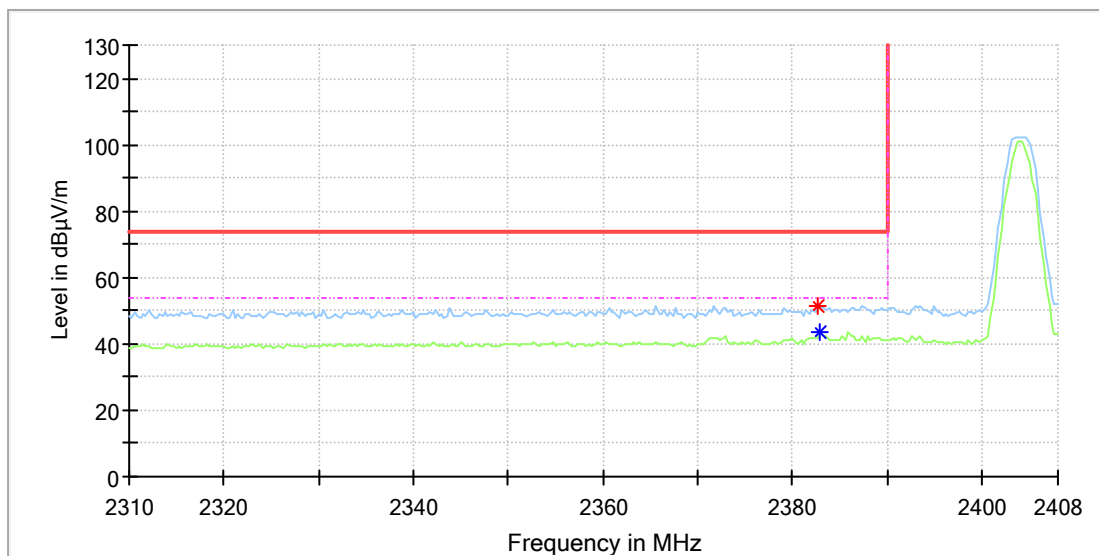


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2382.647059	51.51	---	74.00	22.49	150.0	H	109.0	8.5
2382.941177	---	43.25	54.00	10.75	150.0	H	109.0	8.5

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

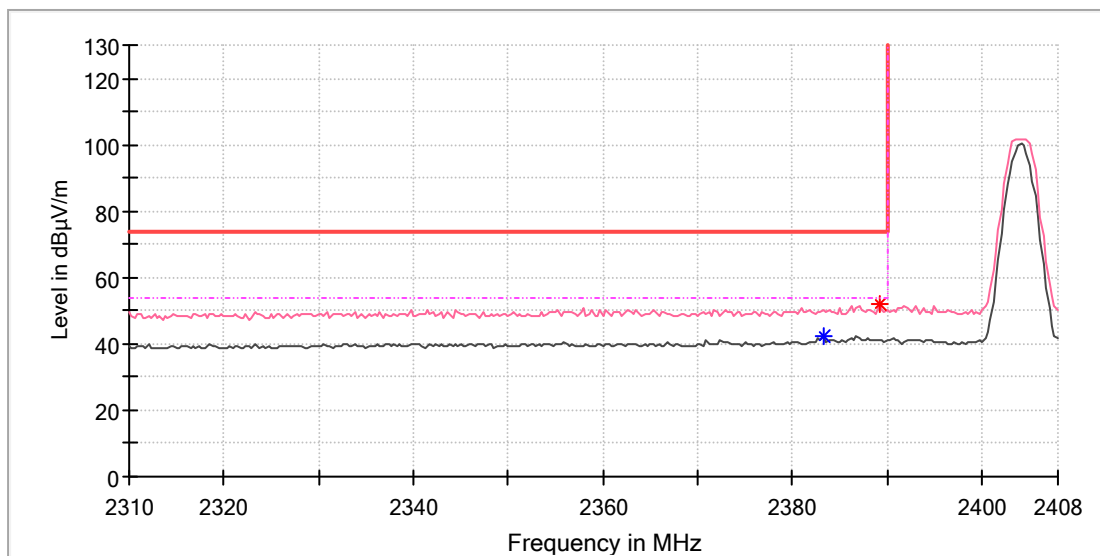


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2383.235294	---	42.20	54.00	11.80	150.0	V	332.0	8.5
2389.117647	52.05	---	74.00	21.95	150.0	V	140.0	8.5

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 2M_High channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

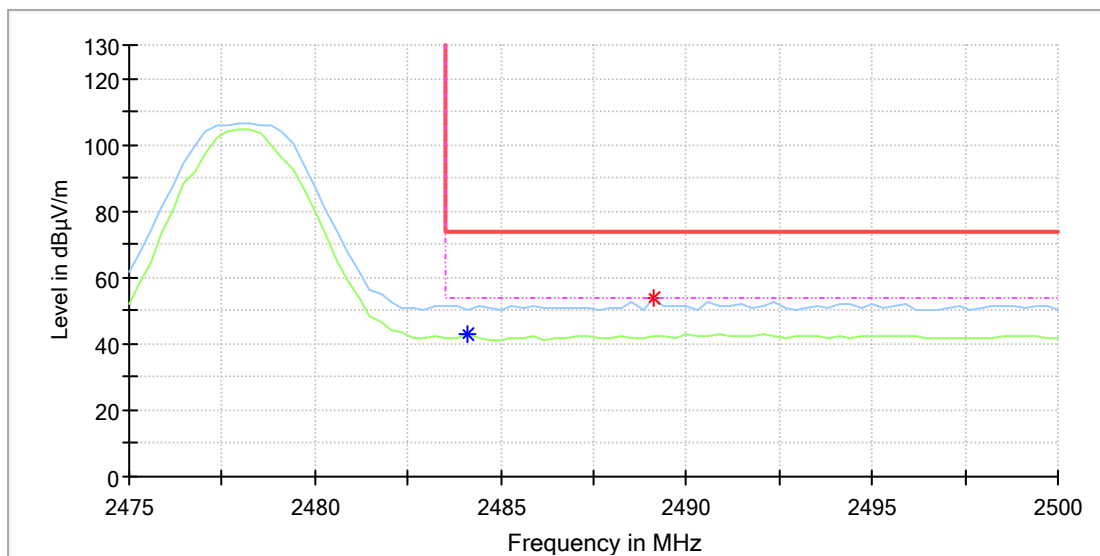


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.117647	---	42.80	54.00	11.20	150.0	H	91.0	9.0
2489.117647	53.73	---	74.00	20.27	150.0	H	9.0	9.0

EUT Information

EUT Name:	21" BLUETOOTH SOUNDBAR AUDIO SYSTEM
Model:	RALLYBAR S2
Test Mode:	BLE 2M_High channel
Order No/Sample No:	A004155379-007
Test Voltage::	DC 12V From DC Source
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

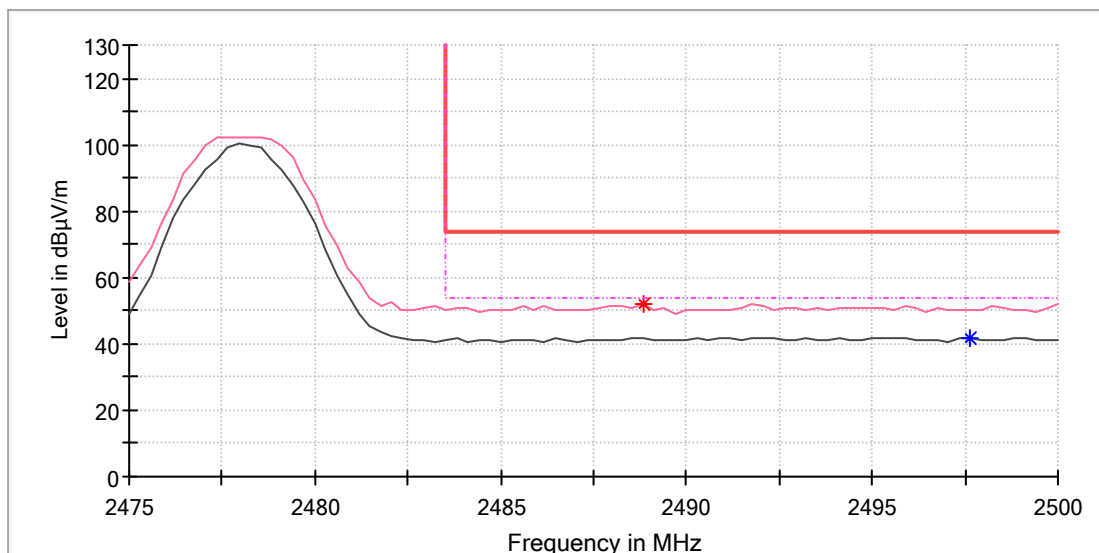

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2488.823529	51.77	---	74.00	22.23	150.0	V	355.0	9.0
2497.647059	---	41.84	54.00	12.16	150.0	V	331.0	9.0