

January 15, 2026

CalAmp
Imad Rizk
2200 Faraday Ave,
Suite 220, Carlsbad, CA 92008

Dear Imad Rizk,

Enclosed is the Electromagnetic Compatibility for the CalAmp, LMU2630LNB, tested to the requirements of:

- FCC Part 22H, 24E, 27 and 90

Thank you for using the services of Eurofins E&E Testing NA, LLC. Please contact me if you have any questions regarding these results or if Eurofins E&E can be of further service to you.

Sincerely,

Rheine Nguyen

Documentation Department
Eurofins E&E Testing NA, LLC.

Reference: WIRS137241-FCC Part 22H, 24E, 27 and 90 Rev. 2



Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins E&E Testing NA, LLC. While use of the A2LA symbol in this report reflects Eurofins E&E Testing NA, LLC. accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins E&E Testing NA, LLC. is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	December 17, 2025	Initial Issue.
1	December 26, 2025	Section 2 Update.
2	January 15, 2026	Removed Photos.

Table of Contents

1.0	Testing Summary	6
2.0	Overview	7
2.1	Test Site	7
2.2	Equipment Overview and Test Configuration	8
2.3	Modifications to the EUT	9
2.4	Modifications to the Standard.....	9
2.5	Disposition of EUT.....	9
3.0	Electromagnetic Compatibility Criteria for Intentional Radiators	10
3.1	Radiated Spurious Emissions.....	10

List of Tables

Table 1. Radiated Spurious Emissions, LTE Band 5 MidCh 836.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results.....	13
Table 2. Radiated Spurious Emissions, LTE Band 5 MidCh 836.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Test Results.....	14
Table 3. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results.....	15
Table 4. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Test Results.....	16
Table 5. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (18 – 20 GHz) Test Results.....	17
Table 6. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results.....	18
Table 7. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Test Results.....	19
Table 8. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (18 – 20 GHz) Test Results.....	20
Table 9. Radiated Spurious Emissions, LTE Band 4 MidCh 1732.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results.....	21
Table 10. Radiated Spurious Emissions, LTE Band 4 MidCh 1732.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Test Results.....	22
Table 11. Radiated Spurious Emissions, LTE Band 12 MidCh 707.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results.....	23
Table 12. Radiated Spurious Emissions, LTE Band 12 MidCh 707.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Test Results.....	24
Table 13. Radiated Spurious Emissions, LTE Band 13 MidCh 782 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results.....	25
Table 14. Radiated Spurious Emissions, LTE Band 13 MidCh 782 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Test Results.....	26
Table 15. Radiated Spurious Emissions, LTE Band 66 MidCh 1745 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results.....	27
Table 16. Radiated Spurious Emissions, LTE Band 66 MidCh 1745 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Test Results.....	28
Table 17. Radiated Spurious Emissions, LTE Band 14 MidCh 793 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results.....	29
Table 18. Radiated Spurious Emissions, LTE Band 14 MidCh 793 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Test Results.....	30
Table 19. Radiated Spurious Emissions, Test Equipment List	31

List of Figures

Figure 1. Radiated Spurious Emissions, LTE Band 5 MidCh 836.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot.....	13
Figure 2. Radiated Spurious Emissions, LTE Band 5 MidCh 836.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Plot.....	14
Figure 3. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot.....	15
Figure 4. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Plot.....	16
Figure 5. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (18 – 20 GHz) Plot.....	17
Figure 6. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot.....	18
Figure 7. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Plot.....	19
Figure 8. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (18 – 20 GHz) Plot.....	20
Figure 9. Radiated Spurious Emissions, LTE Band 4 MidCh 1732.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot.....	21
Figure 10. Radiated Spurious Emissions, LTE Band 4 MidCh 1732.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Plot.....	22
Figure 11. Radiated Spurious Emissions, LTE Band 12 MidCh 707.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot.....	23
Figure 12. Radiated Spurious Emissions, LTE Band 12 MidCh 707.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Plot.....	24
Figure 13. Radiated Spurious Emissions, LTE Band 13 MidCh 782 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot.....	25
Figure 14. Radiated Spurious Emissions, LTE Band 13 MidCh 782 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Plot.....	26
Figure 15. Radiated Spurious Emissions, LTE Band 66 MidCh 1745 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot.....	27
Figure 16. Radiated Spurious Emissions, LTE Band 66 MidCh 1745 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Plot.....	28
Figure 17. Radiated Spurious Emissions, LTE Band 14 MidCh 793 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot.....	29
Figure 18. Radiated Spurious Emissions, LTE Band 14 MidCh 793 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Plot.....	30

1.0 Testing Summary

The CalAmp, LMU2630LNB was found to be compliant to the following specification(s).

- FCC Part 22H, 24E, 27 & 90 and KDB 996369 D04 V.02 Module Integration Guide



Chin Ming Lui
Senior Wireless Test Engineer

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements.

2.0 Overview

Eurofins E&E Testing NA, LLC. was contracted by CalAmp to perform testing on the LMU2630LNB, under purchase order number 412658.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of CalAmp, LMU2630LNB.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	LMU2630LNB
-------------------------	------------

2.1 Test Site

All testing was performed at Eurofins E&E Testing NA, LLC., 3162 Belick St. Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology. Eurofins E&E Testing NA, LLC. has been accredited by the American Association for Laboratory Accreditation (A2LA) (Certificate #: 0591.02) in accordance with ISO/IEC 17025:2017.

2.2 Equipment Overview and Test Configuration

Name of Manufacturer:	CalAmp
Manufacturer Address:	2200 Faraday Ave, Suite 220, Carlsbad, CA 92008
Manufacturer Contact Name:	Imad Rizk
Name of EUT/Model:	LMU2630LNB
Device Type i.e Integration	Tracking Vehicle
FCC ID, IC ID:	<u>APV-2630LNB</u>
Hardware Version:	REV A
Firmware:	87C
Cellular Radio Mode and Bands Supported:	 The screenshot shows the 'E-UTRA FDD (9)' mode with supported bands listed in a grid: Band 2, Band 4, Band 5, Band 12, Band 13, Band 14, Band 17, Band 25, and Band 66.
PTCRB Request No. & Request Type i.e. Initial, Variant, ECO	Initial Request #134530
Integrated Module Info (Manufacturer, Model Name, HW/SW Version, SVN, NAPRD03 Version)	Sequans Communication Module HW: Rev1 Module SW: LR9.0.5.0-62257
Voltages Supplied to the Module (low, mid, high)	3.2-5.5V

2.3 Modifications to the EUT

No modifications were made to the EUT.

2.4 Modifications to the Standard

No modifications were made to the Test Standard.

2.5 Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electromagnetic Compatibility Lab for testing was returned to CalAmp upon completion of testing.

3.0 Electromagnetic Compatibility Criteria for Intentional Radiators

3.1 Radiated Spurious Emissions

Test Method: ANSI C63.26:2015; FCC KDB 996369 D04 V.02 Module Integration Guide

Test Requirement(s): The following standards specified below are covered in the scope of this section of the test report:

- FCC Part 22H, 24E & 27 and KDB 996369 D04 V.02 Module Integration Guide

22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

27.53(c)(1) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.

27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

27.53(h)(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB.

§90.543(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log(P)$ dB.

Sample Calculation for Distance Correction factor (DCF) measurement:

$$F_d = 20 \cdot \log_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

Sample formula for calculating the Corrected Data for the Radiated Emissions Measurements:

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBμV)	ACF (dB/m) (+)	Pre Amp Gain (dB)(-)	CBL (dB) (+)	DCF (dB) (+)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
249.99	V	359.9	240.7	55.46	11.4	28.335	0	0	38.505	47	-8.495

$$\begin{aligned} \text{Corrected Amplitude (dB}\mu\text{V/m)} &= \text{Uncorrected Amplitude (dB}\mu\text{V)} + \text{ACF (dB/m)} - \text{Preamp Gain (dB)} + \text{CBL (dB)} + \text{DCF (dB)} \\ &= 55.46 + 11.4 - 28.335 + 0 + 0 = \mathbf{38.505} \end{aligned}$$

Test Procedure:

The method of testing, test conditions, and test procedures of ANSI C63.26:2015 were used in addition to FCC KDB 996369 D04 Module Integration Guide. Any measured frequency that exhibits a margin of compliance that is less than 3 dB below the specification limit is marked. Eurofins E&E recommends that every emission measured has at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.

For emissions between 30 MHz and 1000 MHz, the EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber a biconilog antenna was located 10m from the EUT on an adjustable mast. A pre-scan was first performed to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated, and the antenna height was varied between 1 m and 4 m to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz resolution bandwidth.

For emissions between 1 GHz and 18 GHz, a double ridged guide horn was located 3 m from the EUT on an adjustable mast. The EUT was placed on a non-metallic table 150 cm above the ground plane inside a semi-anechoic chamber. A pre-scan was performed and used to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated, and the antenna height was varied depending on the geometry of the EUT. To ensure maximized emissions, the horn antenna was positioned both vertically and horizontally. Unless otherwise specified, measurements were made using a peak and average detector with a 1 MHz resolution bandwidth.

For emission between 18 GHz and 20 GHz, a high frequency standard gain horn antenna was located 3 m from the EUT on an adjustable mast. The EUT was placed on a non-metallic table 150 cm above the ground plane inside a semi-anechoic chamber. A pre-scan was performed and used to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated, and the antenna height was varied depending on the geometry of the EUT. To ensure maximized emissions, the horn antenna was positioned both vertically and horizontally. Unless otherwise specified, measurements were made using a peak and average detector with a 1 MHz resolution bandwidth.

Due to the size of the EUT, pre-liminary measurements were performed with the EUT rotated on different axis (X, Y, Z). The worst-case data is presented in this report.

Test Software Used: Nexio BAT-EMC MSSQL Version: V2023.0.5.0 was used to perform this test.

Test Results:

Test Standard:	FCC Part 22H, 24E and 27 (Per FCC KDB 996369 D04 Module Integration Guide v02; ANSI C63.26:2015)
Test Name	Radiated Spurious Emissions
Test Dates:	09/22/2025
Laboratory	Eurofins E&E Testing NA, LLC.
Test Engineer:	Chin Ming Lui
Test Results:	Compliant

Test Data (LTE Radio Simultaneous Transmission with BLE Radio)

FCC Part 22

Frequency (MHz)	Source	Peak (dBm)	Lim.RMS (dBm)	Height (m)	Azimuth (°)	Polarization	Correction (dB)
88.491	Manual suspects	-57.419	-13	1.024	20	Vertical	2.597
204.309	Manual suspects	-62.228	-13	1.984	215	Horizontal	-1.376

Table 1. Radiated Spurious Emissions, LTE Band 5 MidCh 836.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results

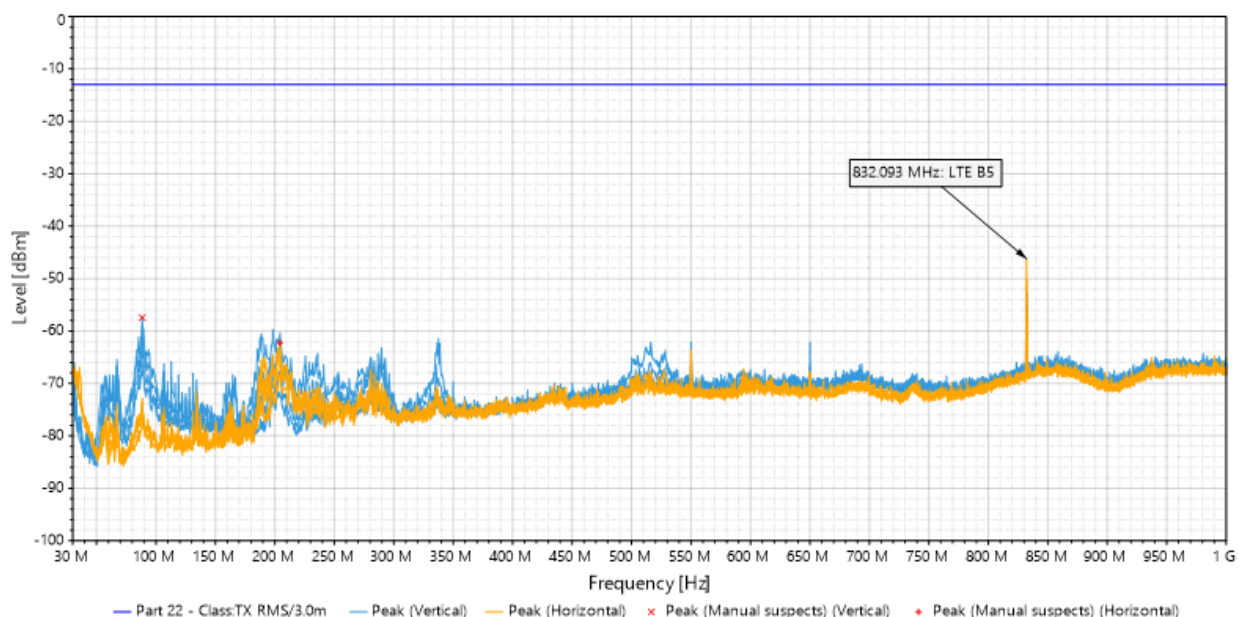


Figure 1. Radiated Spurious Emissions, LTE Band 5 MidCh 836.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot

Frequency (MHz)	Source	RMS (dBm)	RMS Limit (dBm)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	RBW (Hz)	Meas. Time (s)	Correction (dB)
1664.1	RMS (PASS)	-51.709	-13	-38.709	1.568	-30	Horizontal	1000000	0.1	7.681
7205.7	RMS (PASS)	-62.551	-13	-49.551	2.432	149	Vertical	1000000	0.1	13.272

Table 2. Radiated Spurious Emissions, LTE Band 5 MidCh 836.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Test Results

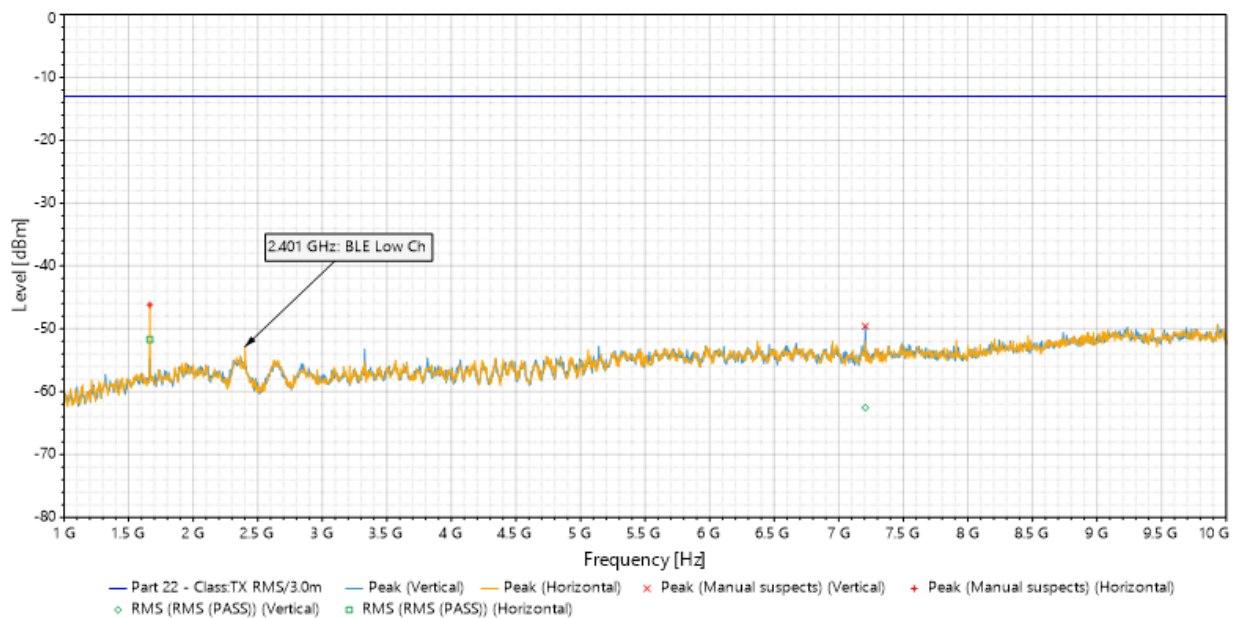


Figure 2. Radiated Spurious Emissions, LTE Band 5 MidCh 836.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Plot

FCC Part 24

Frequency (MHz)	Source	RMS (dBm)	RMS Limit (dBm)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	RBW (Hz)	Meas. Time (s)	Correction (dB)
88.419	RMS (PASS)	-83.712	-13	-70.712	1.44	272	Vertical	100000	0.1	2.566
521.764	RMS (PASS)	-84.59	-13	-71.59	1.088	261	Horizontal	100000	0.1	7.643

Table 3. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results

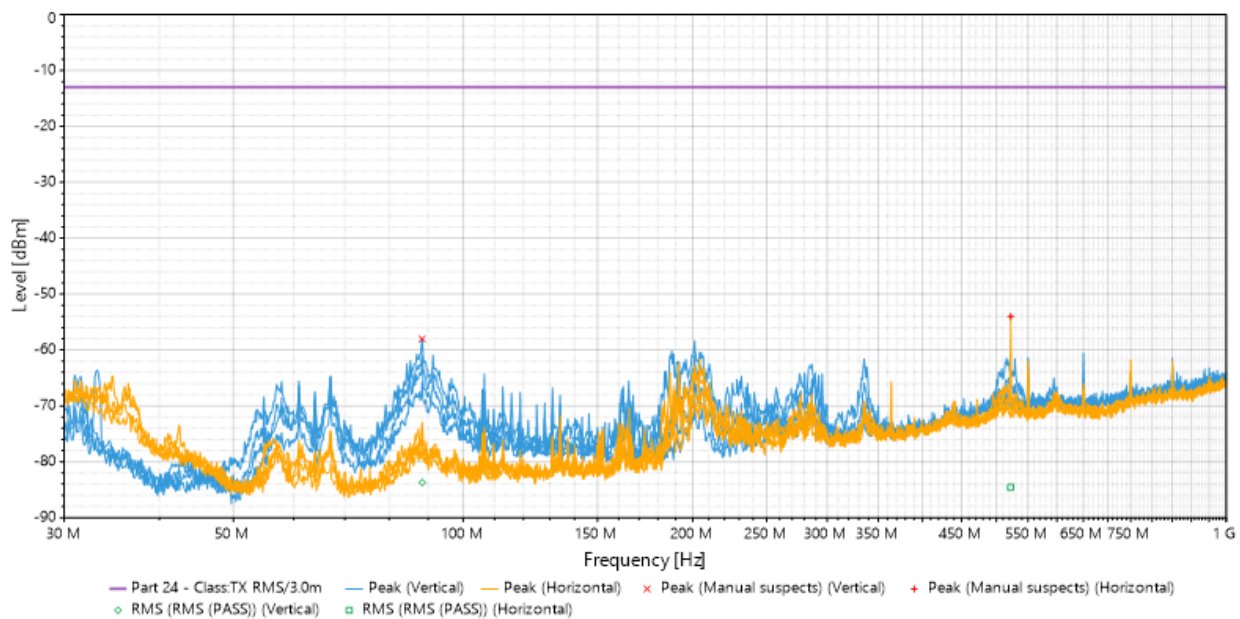


Figure 3. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot

Frequency (MHz)	Source	RMS (dBm)	RMS Limit (dBm)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	RBW (Hz)	Meas. Time (s)	Correction (dB)
2924.5	RMS (PASS)	-48.659	-13	-35.659	1.248	318	Horizontal	1000000	0.1	8.379
3760	RMS (PASS)	-45.467	-13	-32.467	1.888	-2	Horizontal	1000000	0.1	9.259

Table 4. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Test Results

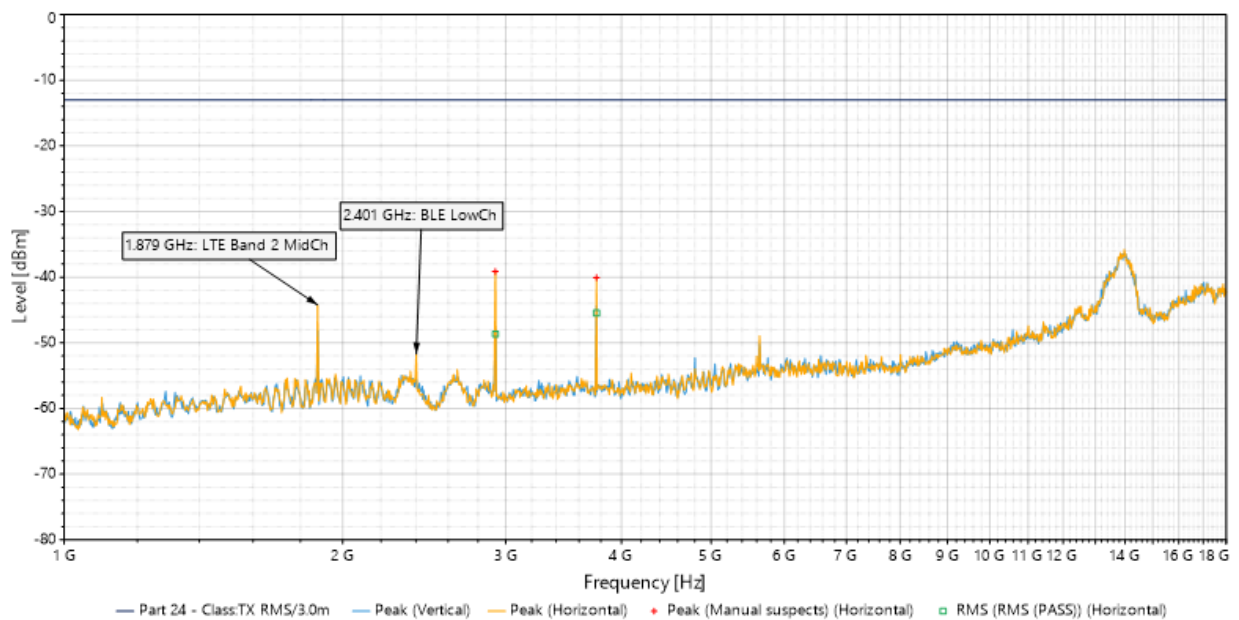


Figure 4. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Plot

Frequency (MHz)	Source	Peak (dBm)	Lim.RMS (dBm)	Height (m)	Azimuth (°)	Polarization	Correction (dB)
18065	Manual suspects	-61.411	-13	1.504	0	Horizontal	-0.366
18189	Manual suspects	-61.01	-13	1.504	280	Vertical	-0.702

Table 5. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (18 – 20 GHz) Test Results

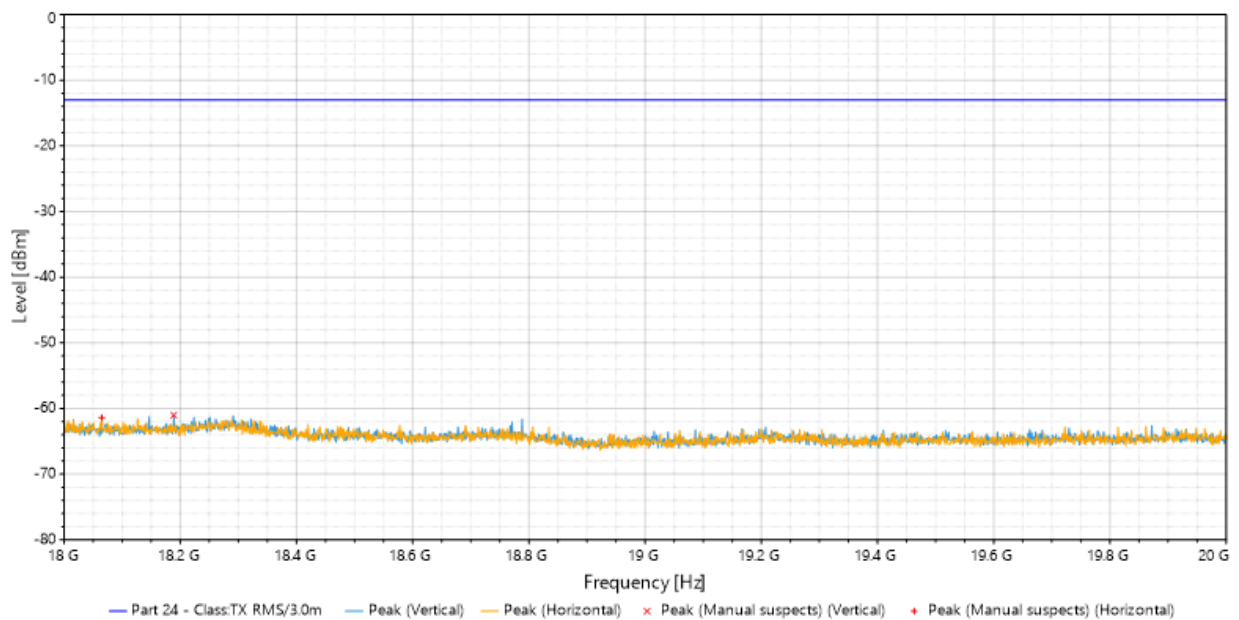


Figure 5. Radiated Spurious Emissions, LTE Band 2 MidCh 1880 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (18 – 20 GHz) Plot

Frequency (MHz)	Source	Peak (dBm)	Lim.RMS (dBm)	Height (m)	Azimuth (°)	Polarization	Correction (dB)
36.596	Manual suspects	-57.351	-13	1.984	341	Horizontal	5.512
88.394	Manual suspects	-58.196	-13	1.024	333	Vertical	2.555

Table 6. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results

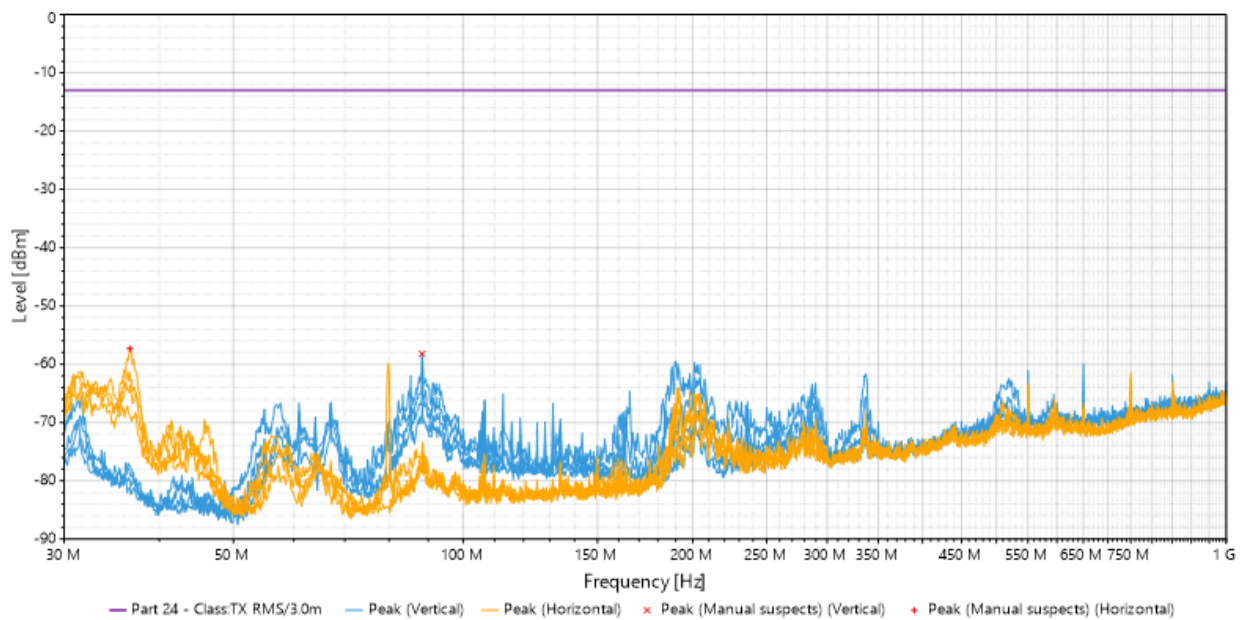


Figure 6. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot

Frequency (MHz)	Source	RMS (dBm)	RMS Limit (dBm)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	RBW (Hz)	Meas. Time (s)	Correction (dB)
2921.6	RMS (PASS)	-44.593	-13	-31.593	1.248	314	Horizontal	1000000	0.1	8.384
3765	RMS (PASS)	-45.088	-13	-32.088	1.536	0	Horizontal	1000000	0.1	9.259

Table 7. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Test Results

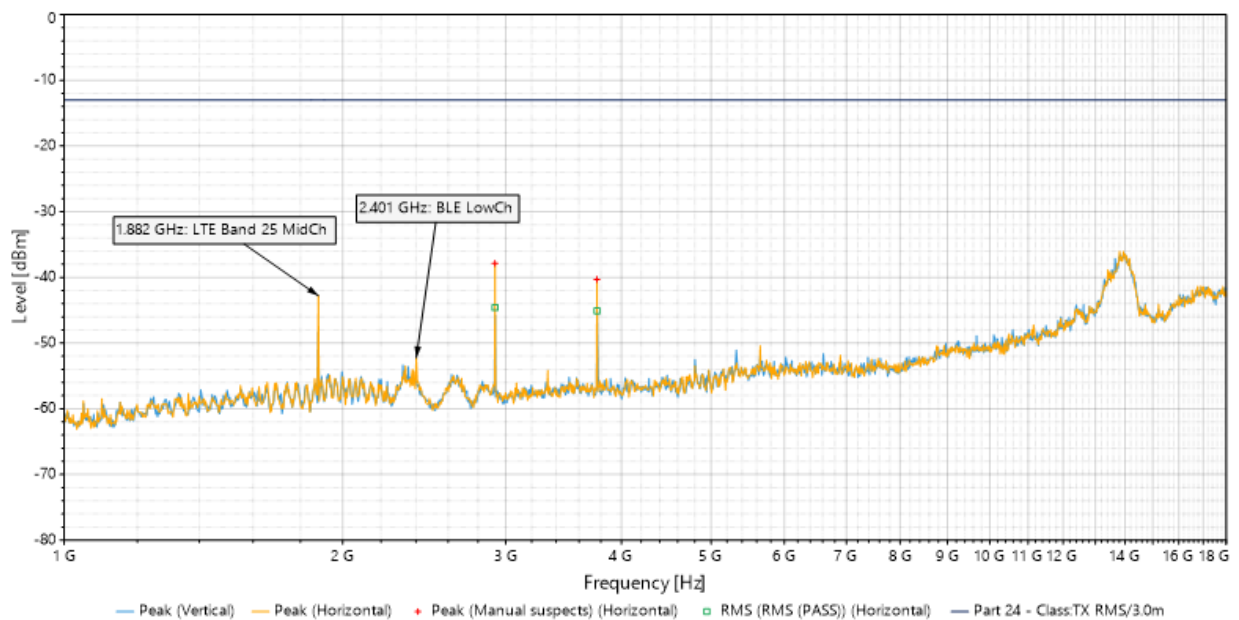


Figure 7. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Plot

Frequency (MHz)	Source	Peak (dBm)	Lim.RMS (dBm)	Height (m)	Azimuth (°)	Polarization	Correction (dB)
18225.5	Manual suspects	-61.534	-13	1.504	0	Horizontal	-0.868
18292.5	Manual suspects	-61.107	-13	4	0	Vertical	-1.022

Table 8. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (18 – 20 GHz) Test Results

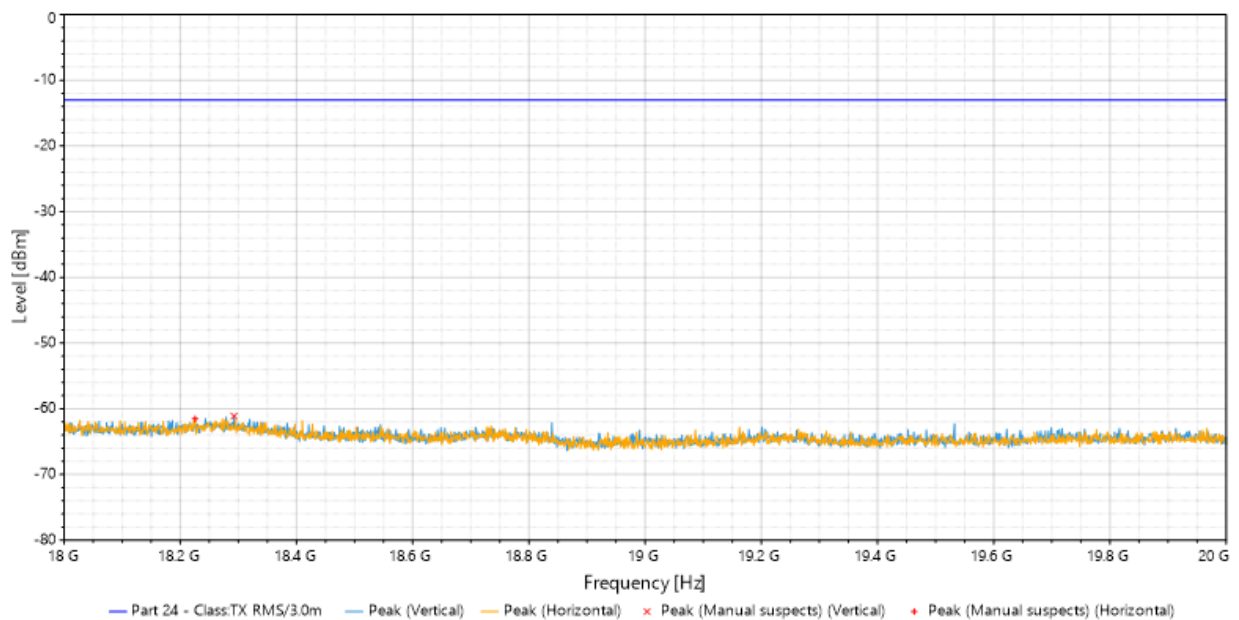


Figure 8. Radiated Spurious Emissions, LTE Band 25 MidCh 1882.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (18 – 20 GHz) Plot

FCC Part 27

Frequency (MHz)	Source	Peak (dBm)	Lim.RMS (dBm)	Height (m)	Azimuth (°)	Polarization	Correction (dB)
88.491	Manual suspects	-56.28	-13	1.024	321	Vertical	2.597
669.521	Manual suspects	-54.59	-13	1.024	210	Horizontal	8.094

Table 9. Radiated Spurious Emissions, LTE Band 4 MidCh 1732.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results

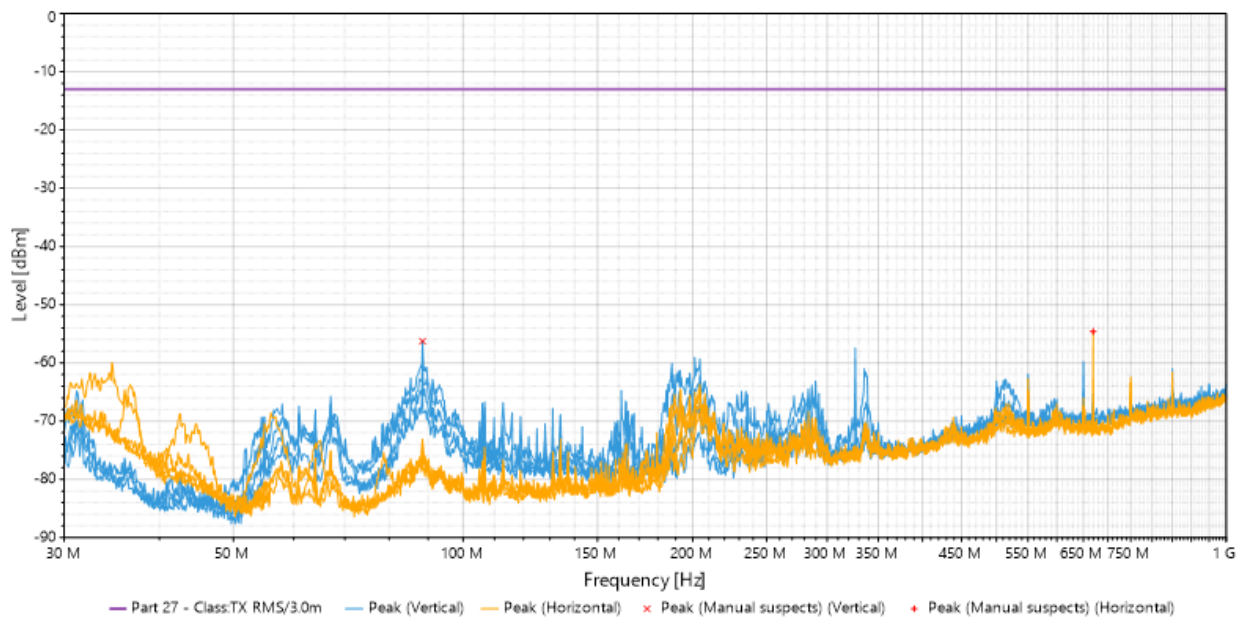


Figure 9. Radiated Spurious Emissions, LTE Band 4 MidCh 1732.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot

Frequency (MHz)	Source	RMS (dBm)	RMS Limit (dBm)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	RBW (Hz)	Meas. Time (s)	Correction (dB)
3420.6	RMS (PASS)	-53.355	-13	-40.355	1.568	159	Horizontal	1000000	0.1	9.293
3420.7	RMS (PASS)	-50.371	-13	-37.371	1.44	54	Vertical	1000000	0.1	9.293
8551.7	RMS (PASS)	-59.833	-13	-46.833	1.152	0	Vertical	1000000	0.1	13.064

Table 10. Radiated Spurious Emissions, LTE Band 4 MidCh 1732.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Test Results

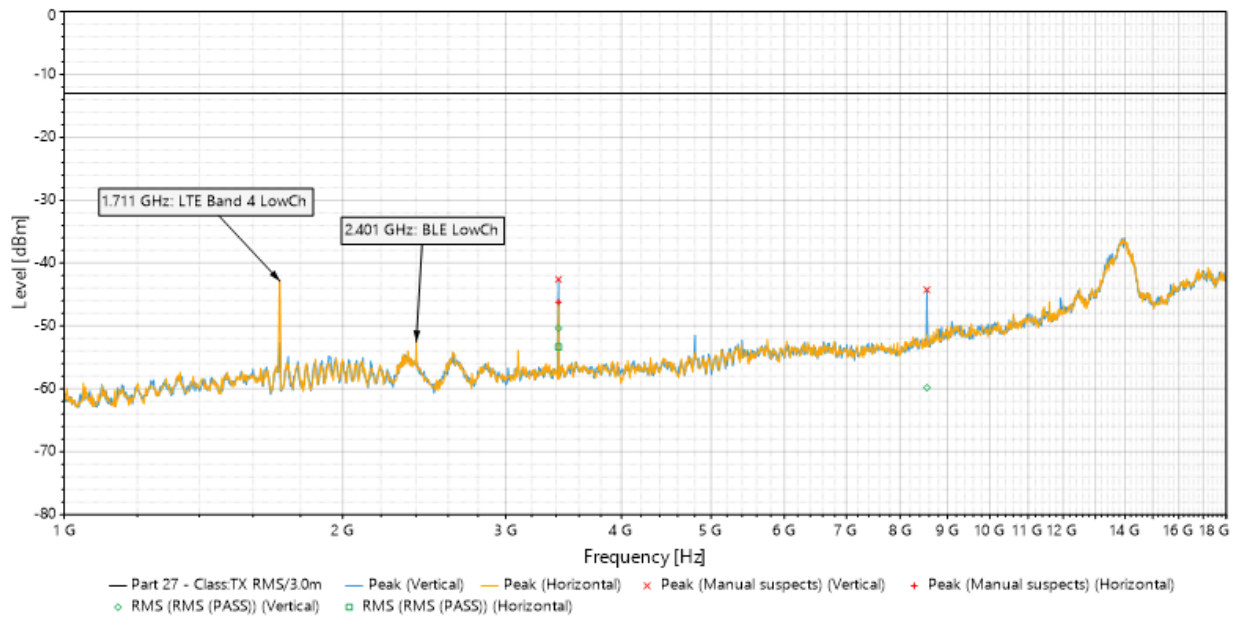


Figure 10. Radiated Spurious Emissions, LTE Band 4 MidCh 1732.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Plot

Frequency (MHz)	Source	Peak (dBm)	Lim.RMS (dBm)	Height (m)	Azimuth (°)	Polarization	Correction (dB)
88.491	Manual suspects	-56.67	-13	1.024	325	Vertical	2.597
204.406	Manual suspects	-62.599	-13	1.024	249	Horizontal	-1.37

Table 11. Radiated Spurious Emissions, LTE Band 12 MidCh 707.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results

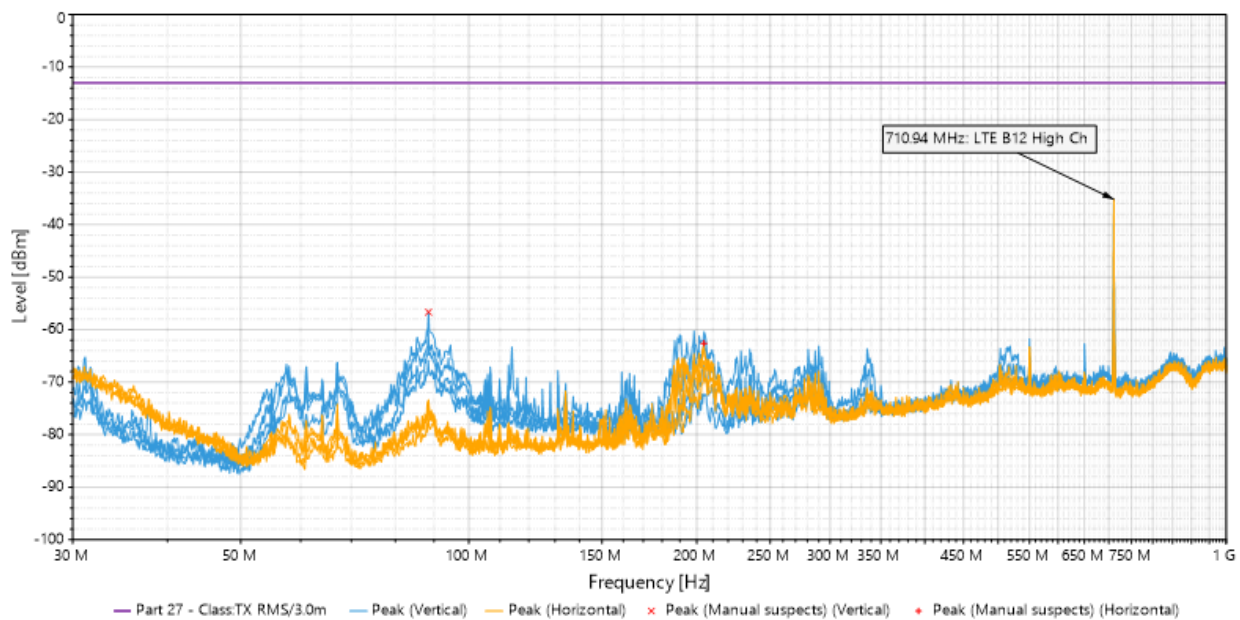


Figure 11. Radiated Spurious Emissions, LTE Band 12 MidCh 707.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot

Frequency (MHz)	Source	RMS (dBm)	RMS Limit (dBm)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	RBW (Hz)	Meas. Time (s)	Correction (dB)
1421.9	RMS (PASS)	-50.13	-13	-37.13	2.432	185	Vertical	1000000	0.1	6.42
1421.9	RMS (PASS)	-41.999	-13	-28.999	1.312	209	Horizontal	1000000	0.1	6.42
3554.4	RMS (PASS)	-59.218	-13	-46.218	1.056	-17	Vertical	1000000	0.1	9.4
3554.7	RMS (PASS)	-63.37	-13	-50.37	1.664	47	Horizontal	1000000	0.1	9.4

Table 12. Radiated Spurious Emissions, LTE Band 12 MidCh 707.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Test Results

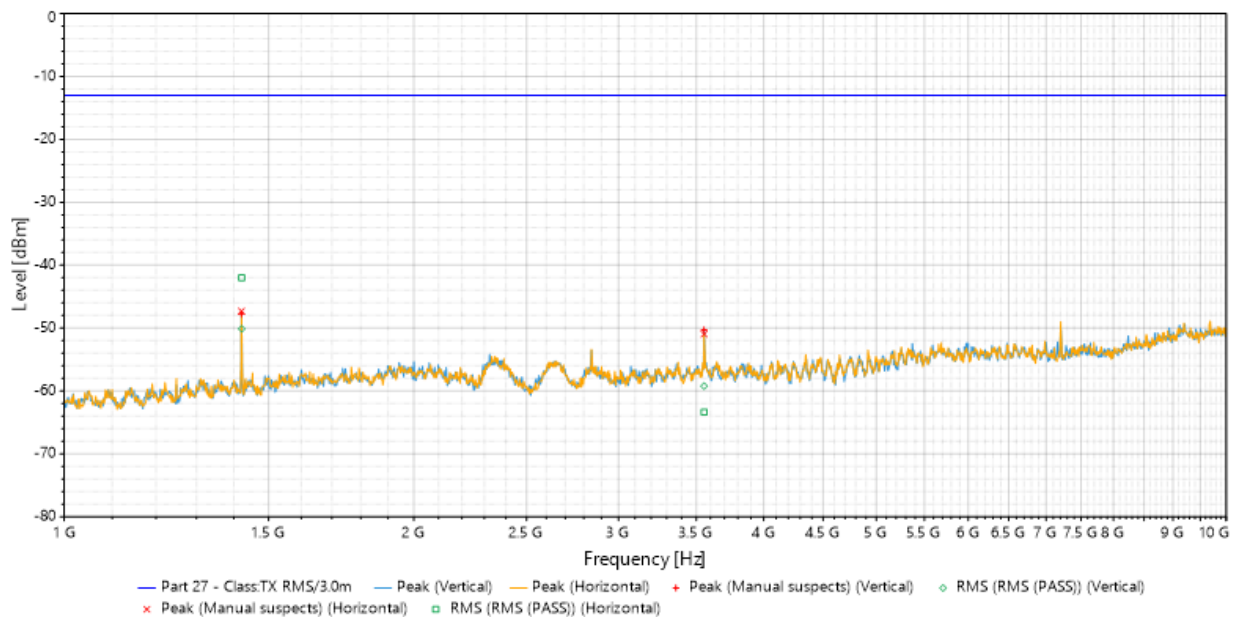


Figure 12. Radiated Spurious Emissions, LTE Band 12 MidCh 707.5 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Plot

Frequency (MHz)	Source	Peak (dBm)	Lim.RMS (dBm)	Height (m)	Azimuth (°)	Polarization	Correction (dB)
31.358	Manual suspects	-58.472	-13	3.008	11	Horizontal	9.559
88.491	Manual suspects	-57.502	-13	1.024	74	Vertical	2.597

Table 13. Radiated Spurious Emissions, LTE Band 13 MidCh 782 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results

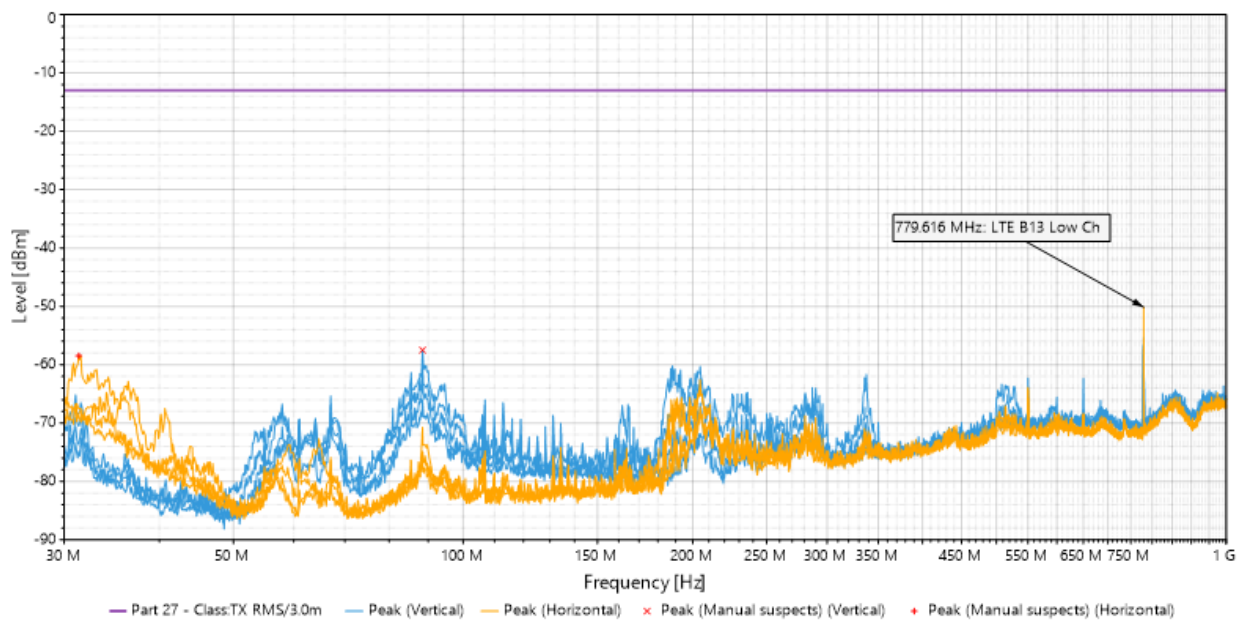


Figure 13. Radiated Spurious Emissions, LTE Band 13 MidCh 782 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot

Frequency (MHz)	Source	RMS (dBm)	RMS Limit (dBm)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	RBW (Hz)	Meas. Time (s)	Correction (dB)
1558.9	RMS (PASS)	-57.32	-13	-44.32	1.056	213	Horizontal	1000000	0.1	7.268
3897.6	RMS (PASS)	-54.556	-13	-41.556	1.088	348	Vertical	1000000	0.1	9.304

Table 14. Radiated Spurious Emissions, LTE Band 13 MidCh 782 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Test Results

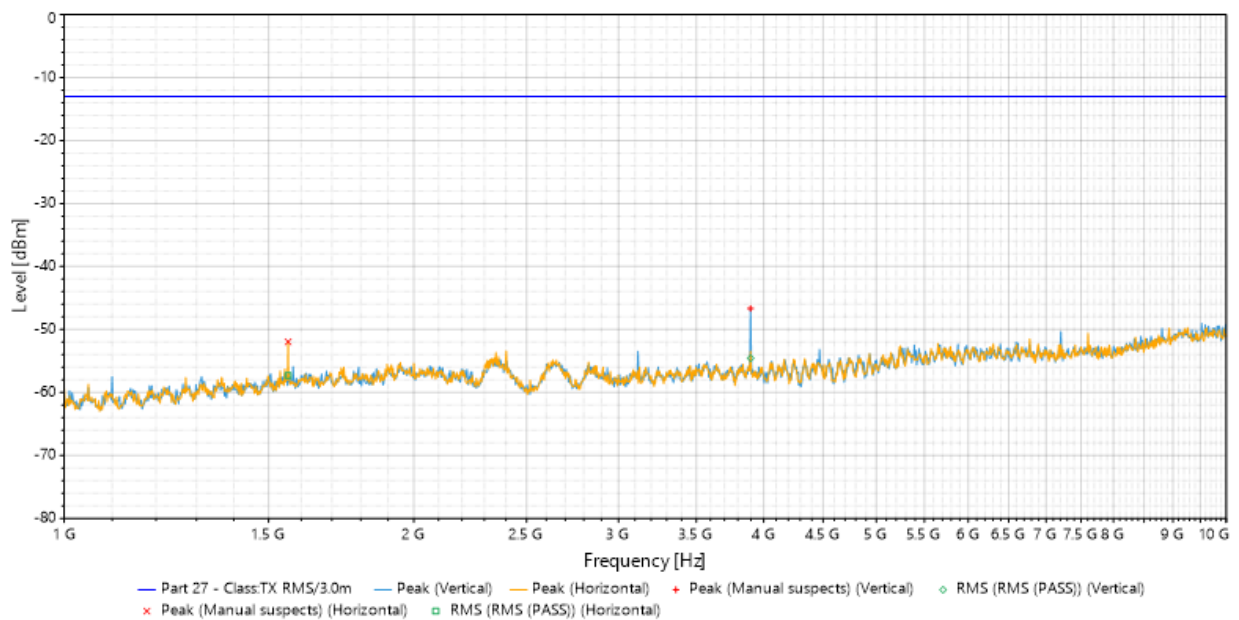


Figure 14. Radiated Spurious Emissions, LTE Band 13 MidCh 782 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Plot

Frequency (MHz)	Source	Peak (dBm)	Lim.RMS (dBm)	Height (m)	Azimuth (°)	Polarization	Correction (dB)
88.491	Manual suspects	-56.348	-13	1.024	65	Vertical	2.597
646.92	Manual suspects	-55.081	-13	1.024	208	Horizontal	8.185

Table 15. Radiated Spurious Emissions, LTE Band 66 MidCh 1745 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results

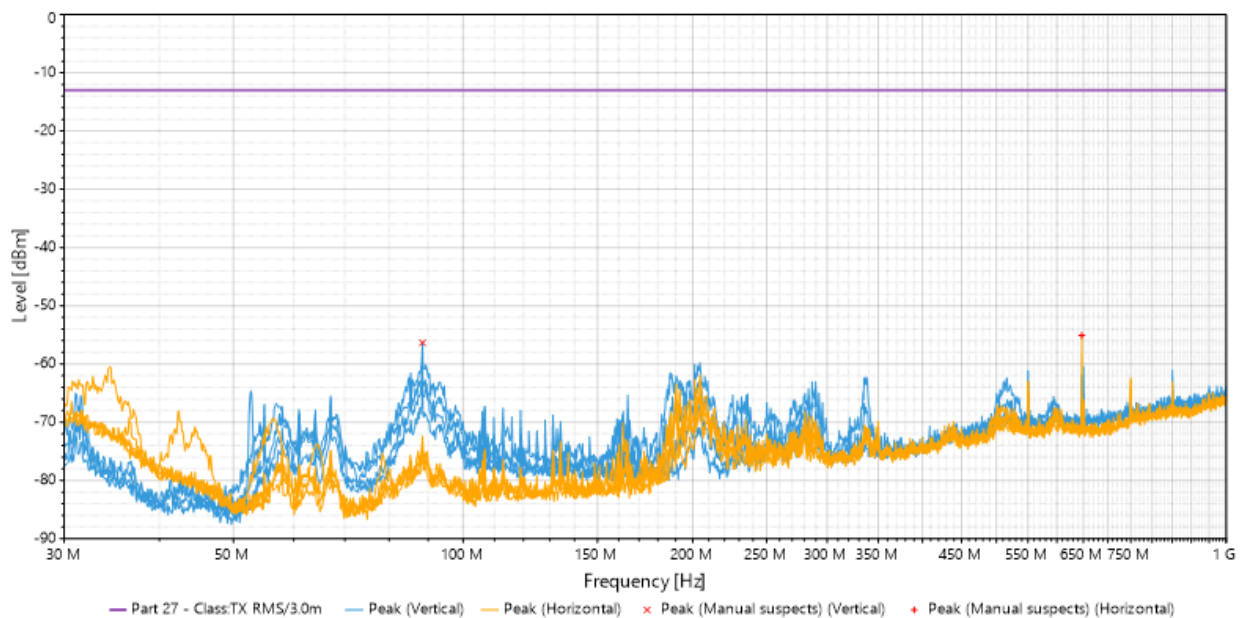


Figure 15. Radiated Spurious Emissions, LTE Band 66 MidCh 1745 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot

Frequency (MHz)	Source	RMS (dBm)	RMS Limit (dBm)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	RBW (Hz)	Meas. Time (s)	Correction (dB)
3420.7	RMS (PASS)	-52.721	-13	-39.721	1.44	55	Vertical	1000000	0.1	9.293
8551.7	RMS (PASS)	-58.396	-13	-45.396	1.92	-30	Vertical	1000000	0.1	13.064

Table 16. Radiated Spurious Emissions, LTE Band 66 MidCh 1745 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Test Results

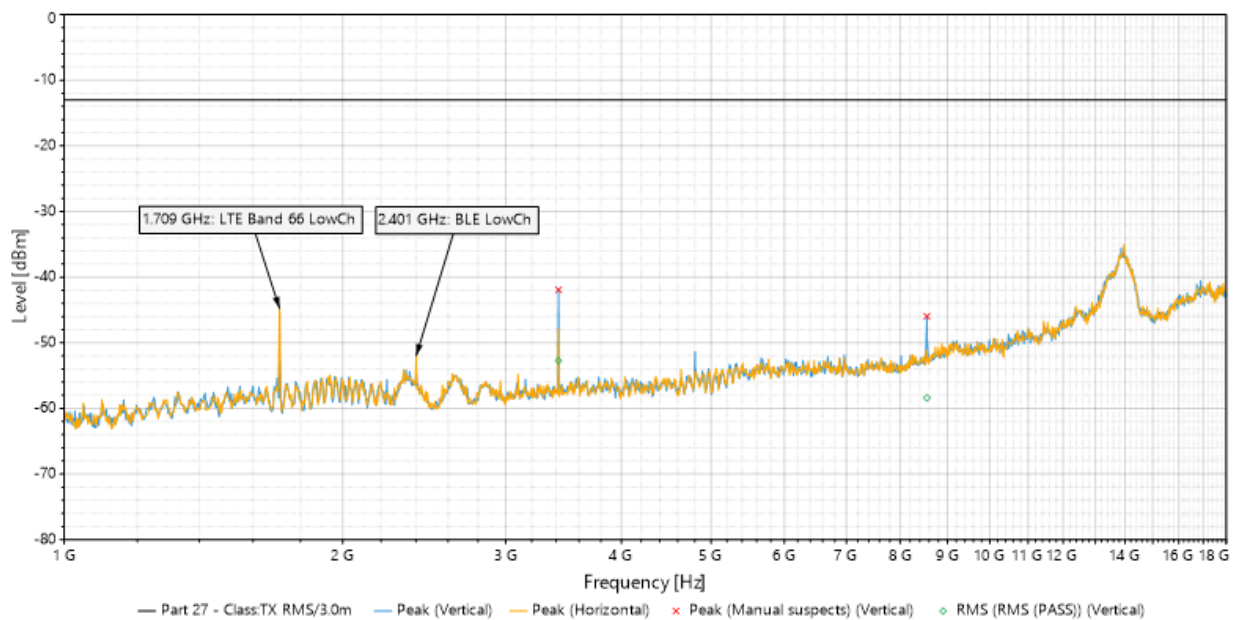


Figure 16. Radiated Spurious Emissions, LTE Band 66 MidCh 1745 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 18 GHz) Plot

FCC Part 90

Frequency (MHz)	Source	Peak (dBm)	Lim.RMS (dBm)	Height (m)	Azimuth (°)	Polarization	Correction (dB)
88.491	Manual suspects	-57.549	-13	1.024	54	Vertical	2.597
204.406	Manual suspects	-61.859	-13	1.984	241	Horizontal	-1.37

Table 17. Radiated Spurious Emissions, LTE Band 14 MidCh 793 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Test Results

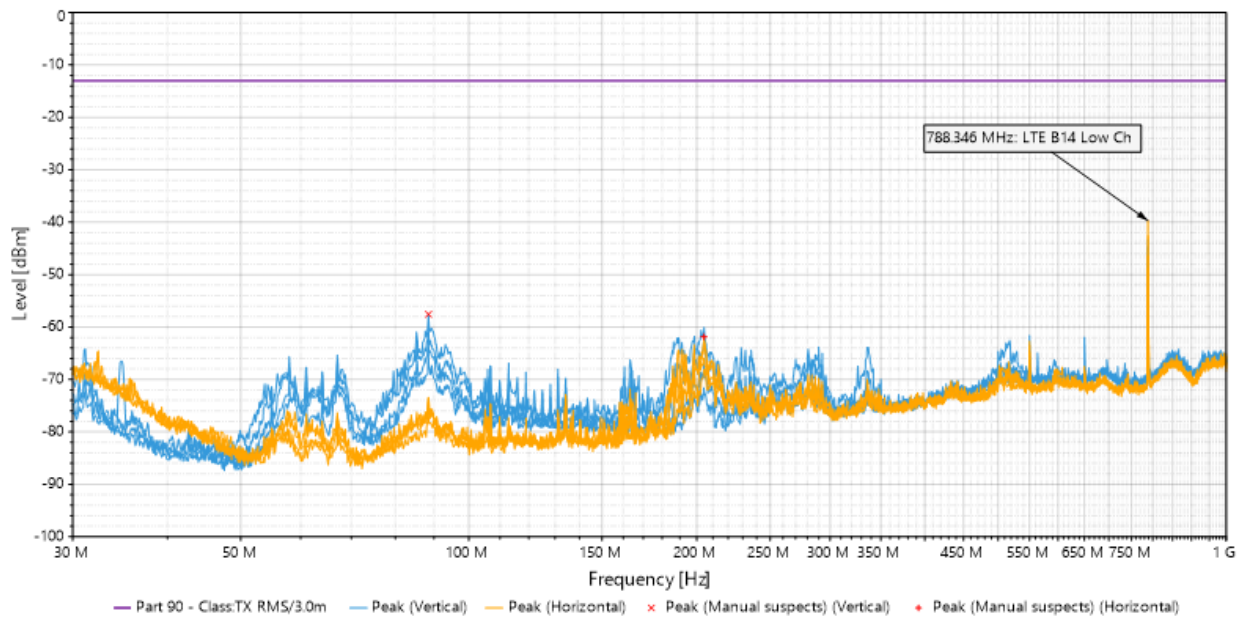


Figure 17. Radiated Spurious Emissions, LTE Band 14 MidCh 793 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (30 MHz – 1 GHz) Plot

Frequency (MHz)	Source	RMS (dBm)	RMS Limit (dBm)	Margin (dB)	Height (m)	Azimuth (°)	Pol.	RBW (Hz)	Meas. Time (s)	Correction (dB)
3941.6	RMS (PASS)	-63.528	-13	-50.528	1.696	-6	Horizontal	1000000	0.1	9.304
3941.8	RMS (PASS)	-55.861	-13	-42.861	1.344	321	Vertical	1000000	0.1	9.304

Table 18. Radiated Spurious Emissions, LTE Band 14 MidCh 793 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Test Results

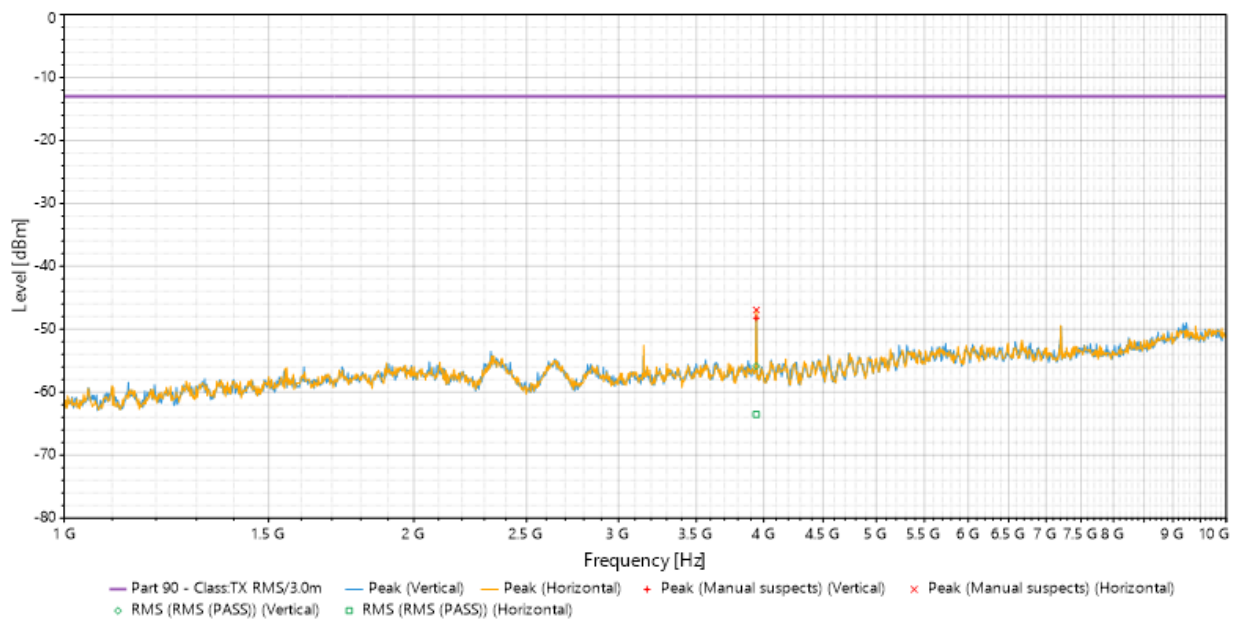


Figure 18. Radiated Spurious Emissions, LTE Band 14 MidCh 793 MHz Simultaneous Transmission with BLE LowCh 2402 MHz (1 – 10 GHz) Plot

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

Test Name: KDB 996369 D04 RSE			Test Date(s): 09/22/2025		
Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2399	Turntable Controller	Sunol Sciences	SC99V	See Note 1	
1S4856	Antenna Positioning Tower	ETS-Lindgren	2171B	See Note 1	
1S2482	5 Meter Chamber	Panashield - ETS	5 Meter Semi-Anechoic Chamber	See Note 2	
1S4852	Radio Communicator Analyzer	Anritsu	MT8821C	N/A	
1S4804	EMI Test Receiver	Rohde & Schwarz	ESW44	08/15/2025	08/15/2026
1S2600	Bilog Antenna	Teseq	CBL6112D	06/10/2025	06/10/2027
1S2435	Horn Antenna	ETS-Lindgren	3117	03/17/2025	03/17/2027
1U0327	DRG Horn Antenna	A.H. Systems, Inc.	SAS-574	11/28/2024	11/28/2026
1S2668	Pre-Amplifier	Sonoma Instruments	310 N	03/18/2025	03/18/2027
1S4802	Pre-Amplifier	EMC Instruments Corporation	EMC118A45SE	See Note 1	
1S3865	Table Top Amplifier	MITEQ	TTA1840-35-HG	See Note 1	
Note 1: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.					
Note 2: Latest NSA and VSWR data available upon request.					

Table 19. Radiated Spurious Emissions, Test Equipment List

END OF REPORT