


System Validation - D1800V2 S/N: 294

Iuput power: 250 mW
SAM; Flat
Probe: ET3DV6 - SN1578; ConvF(5.50,5.50,5.50); Crest factor: 1.0; Head 1800 MHz: $\sigma = 1.40$ mho/m $\epsilon_r = 39.2$ $\rho = 1.00$ g/cm³
Cube 5x5x7: Peak: 17.0 mW/g, SAR (1g): 9.27 mW/g, SAR (10g): 4.89 mW/g, (Worst-case extrapolation)
Penetration depth: 8.4 (8.0, 9.3) [mm]
Powerdrift: 0.00 dB

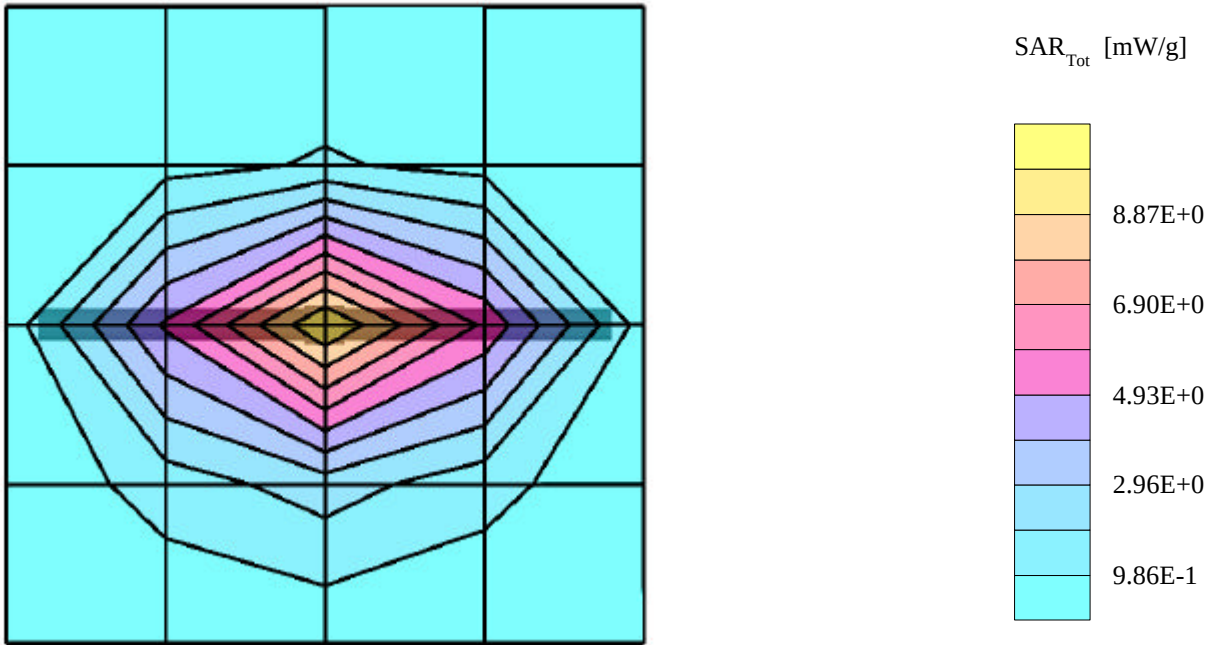

System Validation - D1800V2 S/N: 294

Iuput power: 250 mW

SAM;

Probe: ET3DV6 - SN1578; ConvF(5.50,5.50,5.50); Crest factor: 1.0; Head 1800 MHz: $\sigma = 1.40$ mho/m $\epsilon_r = 39.2$ $\rho = 1.00$ g/cm³

: , , 0

Penetration depth: 8.4 (7.9, 9.2) [mm]

