



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the Sharp CDMA SHI16 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) Multi Mode Cellular Phone with Bluetooth, WLAN, WiMAX, NFC (FeliCa) and GPS

In accordance with FCC CFR 47 Part 15B

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00172

Document 75917214 Report 17 Issue 1

April 2012



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuvps.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the
Sharp CDMA SH16 Dual Band CDMA (BC0 and BC6) and Tri Band
GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V)
Multi Mode Cellular Phone with Bluetooth, WLAN, WiMAX, NFC
(FeliCa) and GPS In accordance with FCC CFR 47 Part 15B

Document 75917214 Report 17 Issue 1

April 2012

PREPARED FOR

Sharp Communication Compliance Ltd
Azure House
Bagshot Road
Bracknell
Berkshire
RG12 7QY

PREPARED BY


Natalie Bennett
Senior Administrator (Technical)

APPROVED BY


Mark Jenkins
Authorised Signatory

DATED

15 June 2012

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15B. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);



G Lawler

Document 75917214 Report 17 Issue 1



Page 1 of 19

COMMERCIAL-IN-CONFIDENCE

**CONTENTS**

Section		Page No
1	REPORT SUMMARY	3
1.1	Introduction	4
1.2	Brief Summary of Results	5
1.3	Application Form	6
1.4	Product Information	7
1.5	Test Conditions	7
1.6	Deviations from the Standard	7
1.7	Modification Record	7
2	TEST DETAILS	8
2.1	AC Line Conducted Emissions	9
2.2	Radiated Emissions	12
3	TEST EQUIPMENT USED	15
3.1	Test Equipment Used	16
3.2	Measurement Uncertainty	17
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT	18
4.1	Accreditation, Disclaimers and Copyright	19



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp CDMA SH16 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900
MHz) and Dual Band UMTS (FDD I and V) Multi Mode Cellular Phone with Bluetooth, WLAN,
WiMAX, NFC (FeliCa) and GPS
In accordance with FCC CFR 47 Part 15B



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp CDMA SHI16 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) Multi Mode Cellular Phone with Bluetooth, WLAN, WiMAX, NFC (FeliCa) and GPS to the requirements of FCC CFR 47 Part 15B.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	CDMA SHI16
Serial Number(s)	IMEI 004401113851642
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 15B (2011)
Incoming Release Date	Application Form 29 March 2012
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	9096 29 March 2012
Start of Test	18 April 2012
Finish of Test	18 April 2012
Name of Engineer(s)	G Lawler



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15B is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
AC Powered/USB				
2.1	15.107	AC Line Conducted Emissions	Pass	
2.2	15.109	Radiated Emissions	Pass	



1.3 APPLICATION FORM

MAIN EUT				
MANUFACTURING DESCRIPTION	CDMA SHI16			
MANUFACTURER	Sharp Corporation			
TYPE	Cellular Phone			
PART NUMBER	N/A			
SERIAL NUMBER	See individual handset			
HARDWARE VERSION	PP1 .5			
SOFTWARE VERSION	V4.0.3 (IceCream Sandwich)			
TRANSMITTER OPERATING RANGE	GSM900 : 880.2MHz to 914.8MHz GSM1800 : 1710.2MHz to 1784.8MHz UMTS2100 : 1922.6MHz to 1977.4MHz BT & WLAN : 2400 MHz to 2483.5 MHz NFC/FeliCa : 13.553MHz to 13.567 MHz			
RECEIVER OPERATING RANGE	GSM900 : 925.2MHz to 959.8MHz GSM1800 : 1805.2MHz to 1879.8MHz UMTS2100 : 2112.6MHz to 2167.4MHz BT & WLAN : 2400 MHz to 2483.5 MHz GPS : 1574MHz to 1576 MHz FeliCa : 13.553MHz to 13.567 MHz			
OUTPUT POWER (W or dBm)	GSM900 : 35dBm max GSM1800 : 32dBm max UMTS2100 : 24.5dBm max BT : 6dBm max WLAN : 17.4dBm max			
TECHNICAL DESCRIPTION (a brief description of the intended use and operation)	Dual-band CDMA (800MHz_BC0, 1900MHz_BC6) & Tri-band GSM (GSM900, DCS1800, PCS1900) and Dual band UMTS(US850(FDDV), 2100(FDDI)) Tri-mode Cellular Phone with WIMAX, GPS, Bluetooth, WLAN and NFC/FeliCa.			
BATTERY/POWER SUPPLY				
MANUFACTURING DESCRIPTION	SHI16UAA			
MANUFACTURER	Sanyo			
TYPE	Lithium-Ion			
PART NUMBER	N/A			
VOLTAGE	3.8V			
SERIAL NUMBER	N/A			
ANCILLARIES (if applicable)				
MANUFACTURING DESCRIPTION	USB data cable	Charger	Stereo Headset	Desktop Holder
MANUFACTURER	Hoshiden	SHENZHEN TENWEI ELEC	Sony	Sharp(Optional)
TYPE	SHI01HUA	SHN10	MDR-E921LP/BC +0301QVA	SHI16PUA
PART NUMBER	N/A	N/A	N/A	N/A
SERIAL NUMBER	N/A	N/A	N/A	N/A

Signature

Toshio Shiomi

Date

29 March 2012

Note: This document has been prepared to enable manufacturers with no mechanism for producing their own Declaration of Build Status, to declare the build state of the equipment submitted for test.

No responsibility will be accepted by TÜV SÜD Product Service as to the accuracy of the information declared in this document by the manufacturer.



Product Service

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp CDMA SHI16 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) Multi Mode Cellular Phone with Bluetooth, WLAN, WiMAX, NFC (FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp CDMA SH16 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900
MHz) and Dual Band UMTS (FDD I and V) Multi Mode Cellular Phone with Bluetooth, WLAN,
WiMAX, NFC (FeliCa) and GPS
In accordance with FCC CFR 47 Part 15B



2.1 AC LINE CONDUCTED EMISSIONS

2.1.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.107

2.1.2 Equipment Under Test and Modification State

CDMA SHI16 S/N: IMEI 004401113851642 - Modification State 0

2.1.3 Date of Test

18 April 2012

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The EUT is set up on a test table 800mm above a horizontal ground plane. A vertical ground plane is also required and is placed 400mm from the EUT. Where a EUT is floor standing it will be stood on but insulated from the ground plane by up to 12mm.

The EUT is powered through a Line Impedance Stabilisation Network (LISN) which is bonded to the ground plane. The EUT is located so that the distance between the EUT and the LISN is no less than 800mm. Where possible the cable between the mains input of the EUT and the LISN is 1m. Where this is not possible the cable is non inductively bundled with the bundle not exceeding 400mm in length.

A preliminary profile of the Conducted Emissions is obtained over the frequency range 150kHz to 30MHz. Any points of interest are noted for formal measurements.

During formal measurements, the measuring receiver is tuned to the emission of interest where Quasi – Peak and Average measurements are performed in a 9kHz Video and Resolution Bandwidth.


2.1.6 Environmental Conditions

Ambient Temperature	20.2°C
Relative Humidity	36.0%



2.1.7 Test Results


Live Line

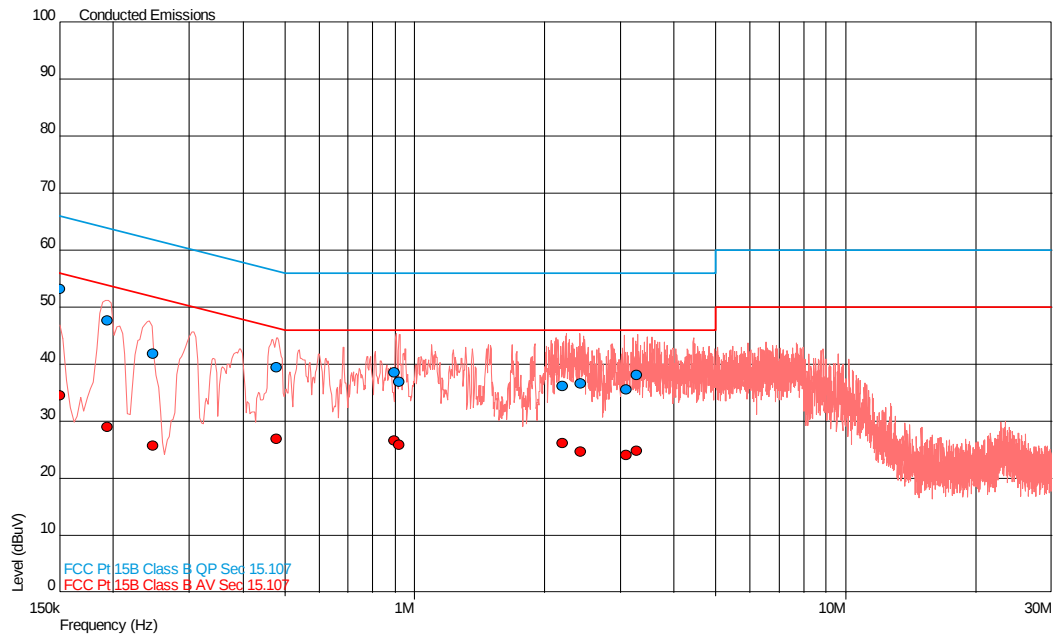

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.150	53.2	66.0	-12.8	34.6	56.0	-21.4
0.194	47.7	63.9	-16.1	29.0	53.9	-24.8
0.248	41.9	61.8	-19.9	25.7	51.8	-26.1
0.477	39.5	56.4	-16.9	26.9	46.4	-19.5
0.899	38.5	56.0	-17.5	26.7	46.0	-19.3
0.921	37.0	56.0	-19.0	25.8	46.0	-20.2
2.198	36.2	56.0	-19.8	26.2	46.0	-19.8
2.430	36.7	56.0	-19.3	24.8	46.0	-21.2
3.097	35.6	56.0	-20.4	24.1	46.0	-21.9
3.268	38.1	56.0	-17.9	24.9	46.0	-21.1



Neutral Line

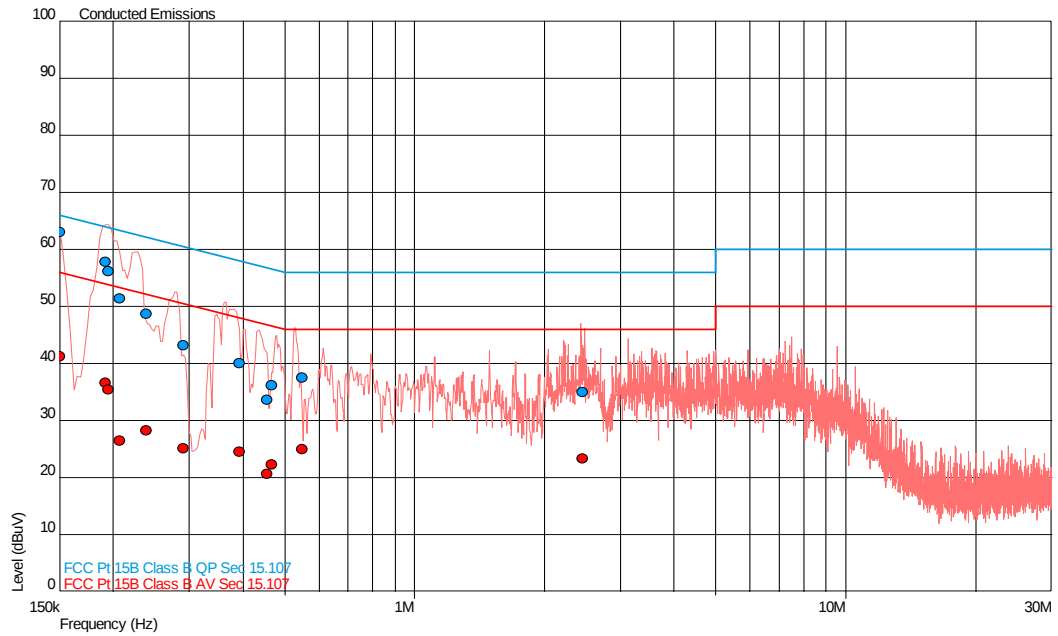

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.150	63.0	66.0	-3.0	41.2	56.0	-14.8
0.192	57.8	64.0	-6.2	36.7	54.0	-17.2
0.195	56.2	63.8	-7.7	35.4	53.8	-18.4
0.207	51.5	63.3	-11.9	26.5	53.3	-26.8
0.238	48.7	62.2	-13.4	28.2	52.2	-23.9
0.291	43.2	60.5	-17.3	25.1	50.5	-25.4
0.393	40.1	58.0	-17.9	24.6	48.0	-23.4
0.455	33.6	56.8	-23.1	20.7	46.8	-26.1
0.466	36.3	56.6	-20.3	22.3	46.6	-24.3
0.549	37.5	56.0	-18.5	25.0	46.0	-21.0
2.445	35.0	56.0	-21.0	23.3	46.0	-22.7



2.2 RADIATED EMISSIONS

2.2.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.109

2.2.2 Equipment Under Test and Modification State

CDMA SHI16 S/N: IMEI 004401113851642 - Modification State 0

2.2.3 Date of Test

18 April 2012

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

A preliminary profile of the Spurious Radiated Emissions is obtained up to the 5th harmonic of the EUT's highest internally generated fundamental frequency. For frequencies from 30MHz to 18GHz the EUT is placed on a test table 800mm above the ground plane. For frequencies above 18GHz, the EUT height is increased by 200mm to a height of 1000mm. This is to ensure the beam width of the measuring antenna gives sufficient vertical coverage of the EUT.

During characterisation the turntable azimuth is adjusted from 0 to 360 degrees with the measuring antenna in one polarity. It is then repeated for the other polarity. Any frequencies of interest are noted for formal measuring later. The distance from the measuring antenna to the boundary of the EUT is 3m. Above 18GHz this distance may be reduced to 1m.

During formal measurement the spectrum analyser is tuned to the frequency of the emission. The turntable azimuth is adjusted from 0 to 360 degrees to determine the point at which the maximum emission level occurs. Then the height of the measuring antenna is adjusted from a height of 1m to 4m to determine the height at which the maximum emission level occurs. Once the point of maximum emission has been determined the emission is measured. Emissions in the 30MHz to 1GHz range are measured using a CISPR Quasi – Peak detector function in a 120kHz bandwidth. Emissions in the range 1GHz to 40GHz require Peak and Average measurements. The Peak measurements are made using a peak detector with 1MHz Resolution and Video bandwidths. The average measurements employ a peak detector with a Resolution bandwidth of 1MHz and a Video bandwidth of 10Hz. If measurements are made at a 1m measuring distance, then 10dB is added to the specification limit.

2.2.6 Environmental Conditions


Ambient Temperature	20.2°C
Relative Humidity	36.0%



Product Service

2.2.7 Test Results

30 MHz to 1 GHz

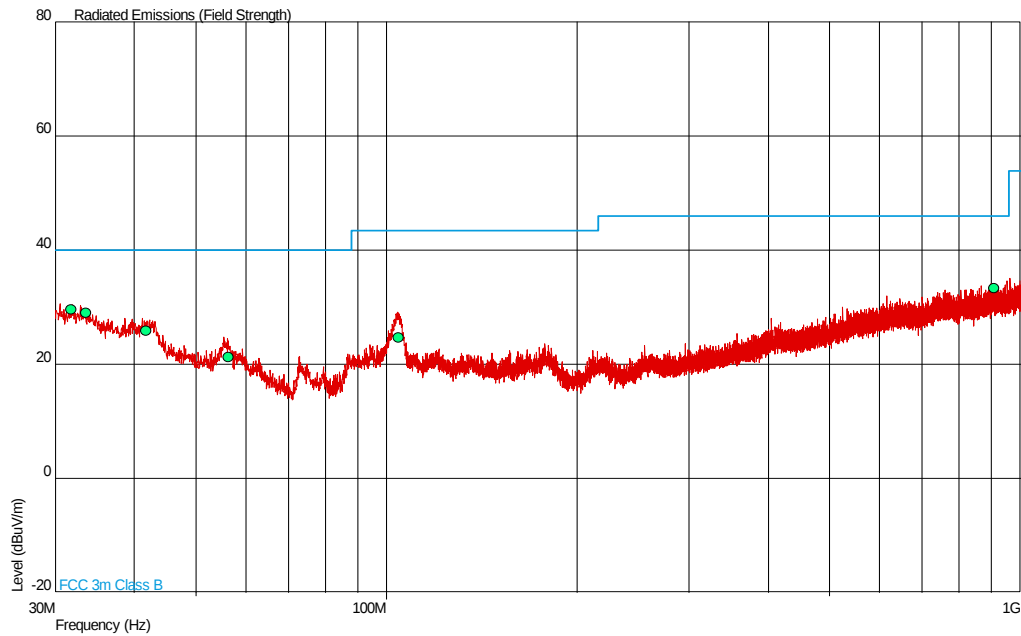


Frequency (MHz)	QP Level (dBμV/m)	QP Level (μV/m)	QP Limit (dBμV/m)	QP Limit (μV/m)	QP Margin (dBμV/m)	QP Margin (μV/m)	Angle (Deg)	Height (m)	Polarity
31.866	29.7	30.5	40.0	100	-10.3	69.5	301	1.00	Vertical
33.628	29.0	28.2	40.0	100	-11.0	71.8	271	1.00	Vertical
41.783	26.0	20.0	40.0	100	-14.0	80.0	210	1.00	Vertical
56.371	21.2	11.5	40.0	100	-18.8	88.5	0	1.03	Vertical
104.513	24.7	17.2	43.5	150	-18.8	132.8	354	1.00	Vertical
909.627	33.4	46.8	46.0	200	-12.6	153.2	156	1.00	Vertical




Product Service

1 GHz to 8 GHz

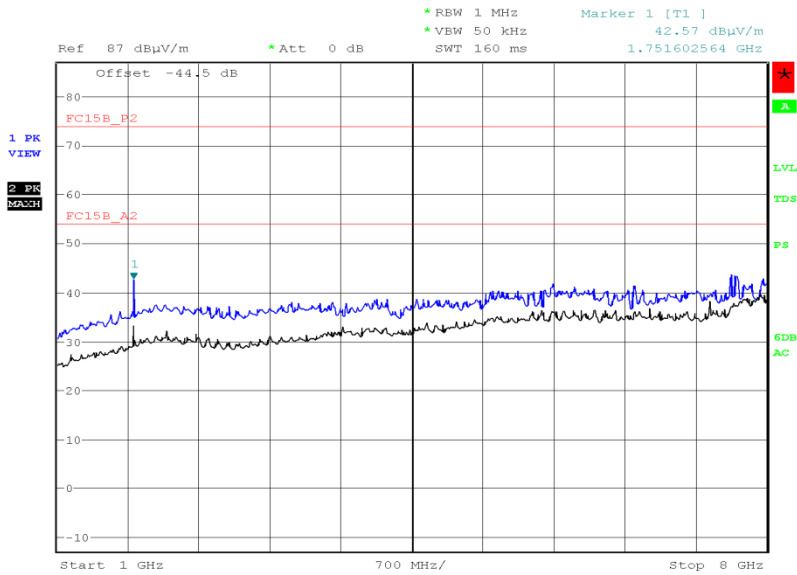

Date: 18.APR.2012 19:15:51

8 GHz to 13 GHz

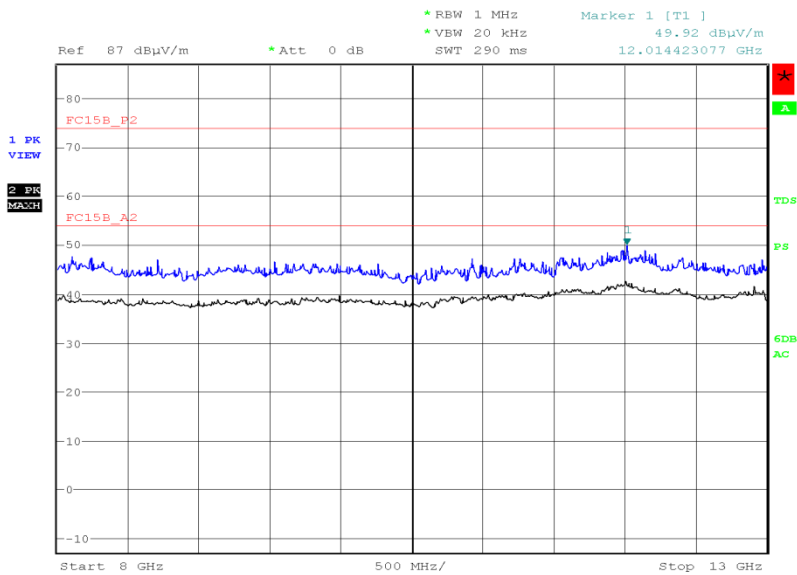

Date: 18.APR.2012 18:33:56



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 – AC Line Conducted Emissions					
LISN (1 Phase)	Chase	MN 2050	336	12	23-Mar-2013
Transient Limiter	Hewlett Packard	11947A	1032	12	22-Jun-2012
Screened Room (5)	Rainford	Rainford	1545	36	3-Feb-2014
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	29-Sep-2012
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
Section 2.2 - Radiated Emissions					
Radiocommunications Tester	Rohde & Schwarz	CMU 200	39	12	9-Dec-2012
Antenna (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	13-Sep-2013
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Pre-Amplifier	Phase One	PS04-0086	1533	12	20-Sep-2012
Pre-Amplifier	Phase One	PSO4-0087	1534	12	26-Sep-2012
Screened Room (5)	Rainford	Rainford	1545	36	3-Feb-2014
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	22-Aug-2012
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	16-Apr-2013
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
'3.5mm' - '3.5mm' RF Cable (2m)	Rhophase	3PS-1803-2000-3PS	3703	-	TU
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	12	26-Aug-2012
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Low Noise Amplifier	Wright Technologies	APS04-0085	3969	12	8-Jul-2012

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Radiated Emissions	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB
AC Line Conducted Emissions	± 3.2 dB



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service Limited

© 2012 TÜV SÜD Product Service Limited