



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the Sharp SHL24 Dual-band CDMA (BC0, BC6), Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900), Dual-band UMTS (FDDI, FDDV), Quad-band LTE (B1, B3, B11, B18), Multi mode cellular phone with Bluetooth, WLAN, SRD(NFC, FeliCa) and GPS
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22 (WCDMA FDD V)

COMMERCIAL-IN-CONFIDENCE
FCC ID: APYHRO00201

Document 75924750 Report 14 Issue 2

February 2014



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the Sharp SHL24 Dual-band CDMA (BC0, BC6),
Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900), Dual-
band UMTS (FDDI, FDDV), Quad-band LTE (B1, B3, B11, B18), Multi
mode cellular phone with Bluetooth, WLAN, SRD(NFC, FeliCa) and
GPS

In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22
(WCDMA FDD V)

Document 75924750 Report 14 Issue 2

February 2014

PREPARED FOR

Sharp Communication Compliance Ltd
Azure House
Bagshot Road
Bracknell
Berkshire
RG12 7QY

PREPARED BY

Natalie Bennett
Senior Administrator, Technical Solutions

APPROVED BY

Simon Bennett
Authorised Signatory

DATED

06 February 2014

This report has been up-issued to Issue 2 due to typographical errors.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

M Russell

T Guy

Document 75924750 Report 14 Issue 2





CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Product Technical Description 6
1.4	Product Information 6
1.5	Test Conditions 6
1.6	Deviations from the Standard 6
1.7	Modification Record 6
2	TEST DETAILS 7
2.1	Spurious Emissions at Band Edge 8
2.2	Effective Radiated Power 11
2.3	Maximum Peak Output Power - Conducted 15
2.4	Emission Limitations for Cellular Equipment 17
2.5	Conducted Spurious Emissions 24
2.6	Occupied Bandwidth 29
2.7	Modulation Characteristics 33
2.8	Frequency Stability 35
3	TEST EQUIPMENT USED 38
3.1	Test Equipment Used 39
3.2	Measurement Uncertainty 42
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 43
4.1	Accreditation, Disclaimers and Copyright 44



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp SHL24 Dual-band CDMA (BC0, BC6), Quad-band GSM
(GSM850/GSM900/DCS1800/PCS1900), Dual-band UMTS (FDDI, FDDV), Quad-band LTE
(B1, B3, B11, B18), Multi mode cellular phone with Bluetooth, WLAN, SRD(NFC, FeliCa) and
GPS

In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22 (WCDMA FDD V)



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp SHL24 Dual-band CDMA (BC0, BC6), Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900), Dual-band UMTS (FDDI, FDDV), Quad-band LTE (B1, B3, B11, B18), Multi mode cellular phone with Bluetooth, WLAN, SRD(NFC, FeliCa) and GPS to the requirements of FCC CFR 47 Part 2 and FCC CFR 47 Part 22.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	SHL24
Serial Number(s)	IMEI 004401115003325 IMEI 004401115003309
Number of Samples Tested	2
Test Specification/Issue/Date	FCC CFR 47 Part 2 (2012) FCC CFR 47 Part 22 (2013)
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Order Number	9952
Date	25 November 2013
Start of Test	3 January 2014
Finish of Test	17 January 2014
Name of Engineer(s)	M Russell T Guy
Related Document(s)	ANSI C63.4: 2009



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22 is shown below.

Section	Spec Clause		Test Description	Result	Comments/Base Standard
	Pt 2	Pt 22			
WCDMA FDD V					
2.1	2.1051	22.905	Spurious Emissions at Band Edge	Pass	
2.2	-	22.913 (a)	Effective Radiated Power	Pass	
2.3	2.1046	22.913 (a)	Maximum Peak Output Power - Conducted	Pass	
2.4	-	22.917	Emission Limitations for Cellular Equipment	Pass	
2.5	2.1051	22.917 (a)	Conducted Spurious Emissions	Pass	
2.6	2.1049 (h)	22.917 (b)	Occupied Bandwidth	Pass	
2.7	2.1047 (d)	-	Modulation Characteristics	-	Customer Declaration
2.8	2.1055	22.355	Frequency Stability	Pass	



Product Service

1.3 PRODUCT TECHNICAL DESCRIPTION

Please refer to the SHL24 Model Description Form.

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp SHL24 Dual-band CDMA (BC0, BC6), Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900), Dual-band UMTS (FDDI, FDDV), Quad-band LTE (B1, B3, B11, B18), Multi mode cellular phone with Bluetooth, WLAN, SRD(NFC, FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply for lab tests and a fully charged integral battery for radiated tests.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp SHL24 Dual-band CDMA (BC0, BC6), Quad-band GSM
(GSM850/GSM900/DCS1800/PCS1900), Dual-band UMTS (FDDI, FDDV), Quad-band LTE
(B1, B3, B11, B18), Multi mode cellular phone with Bluetooth, WLAN, SRD(NFC, FeliCa) and
GPS

In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22 (WCDMA FDD V)



Product Service

2.1 SPURIOUS EMISSIONS AT BAND EDGE

2.1.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 22, Clause 22.905

2.1.2 Equipment Under Test and Modification State

SHL24 S/N: IMEI 004401115003325 - Modification State 0

2.1.3 Date of Test

7 to 17 January 2014

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

In accordance with 22.917(e), any emissions outside of the block edges shall be attenuated by at least $43 + 10 \log (P)$. The measurements are shown to ± 1 MHz from the block edges. The plots shown under the Spurious Emissions sections covers the required range of 9 kHz to 9 GHz.

The reference power and path losses of all channels used for testing in each frequency block were measured. Having entered the reference level offset, a limit line was displayed, showing the $-13 \text{ dBm} (43 + 10 \log (P))$, limit. The EUT was operated at maximum power.

2.1.6 Environmental Conditions

Ambient Temperature	25.2°C
Relative Humidity	34.4%




Product Service

2.1.7 Test Results

4.0 V DC Supply


Frequency Block (MHz)	Mode	Lower Block Edge Test Channels/Frequencies	Upper Block Edge Test Channels/Frequencies
A : (824.0 – 835.0)	WCDMA	Channel : 4133 Frequency : 826.6 MHz	N/A
B : (846.5 – 849.0)	WCDMA	N/A	Channel : 4232 Frequency : 846.4MHz

Frequency Block A

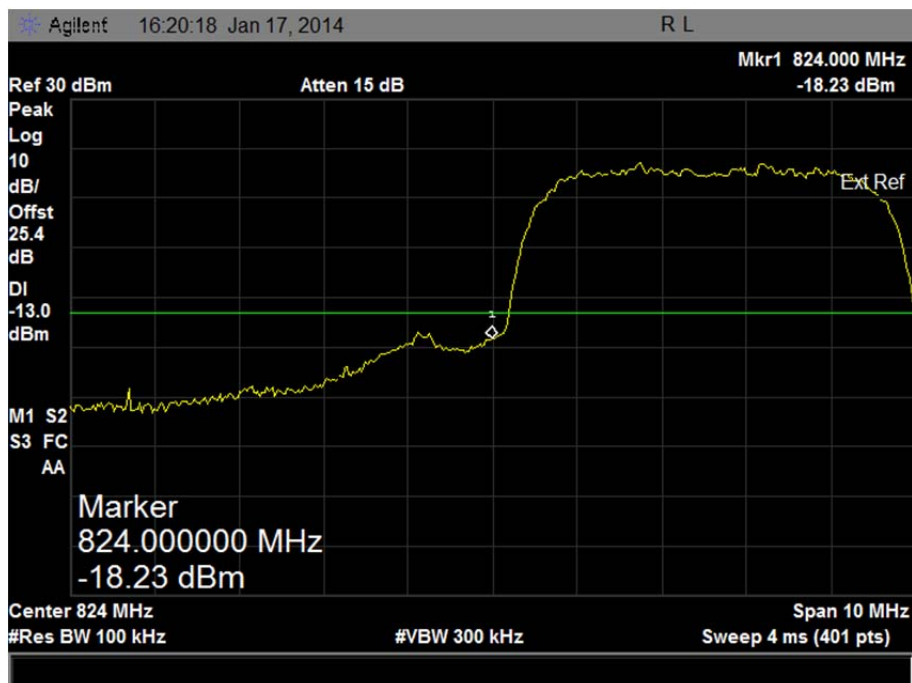



Product Service

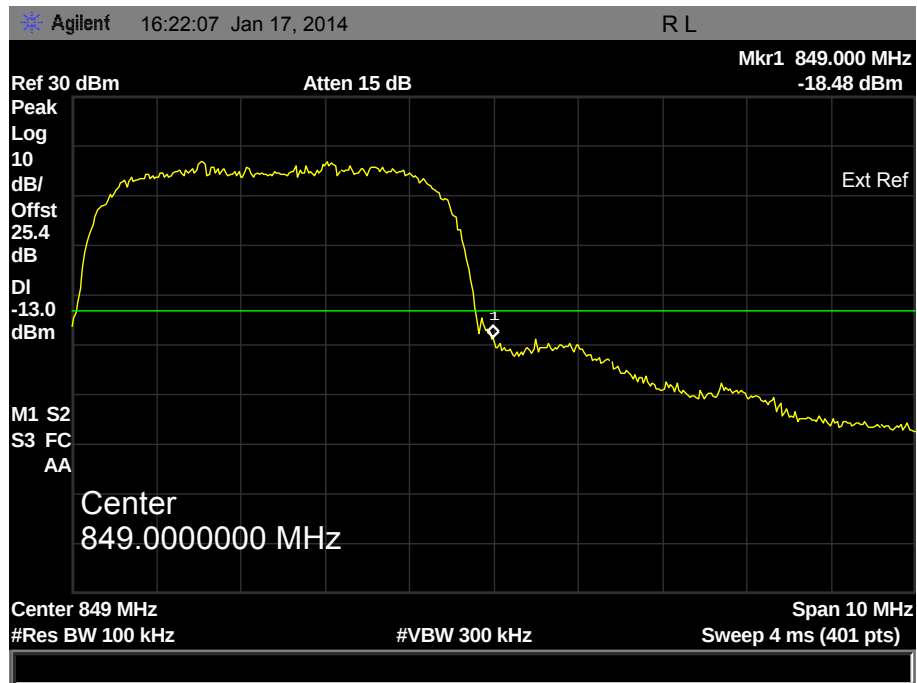Frequency Block BLimit Clause

-13 dBm at block edge.



Product Service

2.2 EFFECTIVE RADIATED POWER

2.2.1 Specification Reference

FCC CFR 47 Part 22, Clause 22.913 (a)

2.2.2 Equipment Under Test and Modification State

SHL24 S/N: IMEI 004401115003309 - Modification State 0

2.2.3 Date of Test

5 January 2014

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

Measurements of the fundamental from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The fundamental frequency was maximised by adjusting the antenna height, antenna polarisation and turntable azimuth. A peak detector was used with the trace set to max hold. The maximum result was recorded.

The EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result (ERP) was determined by a calculation using the signal generator level, antenna gain and cable loss.

The measurements were performed at a 3m distance unless otherwise stated.

2.2.6 Environmental Conditions

Ambient Temperature	20.1 - 21.0°C
Relative Humidity	37.0%




Product Service

2.2.7 Test Results

826.60 MHz

Result (dBm)	Result (W)
20.7	0.117

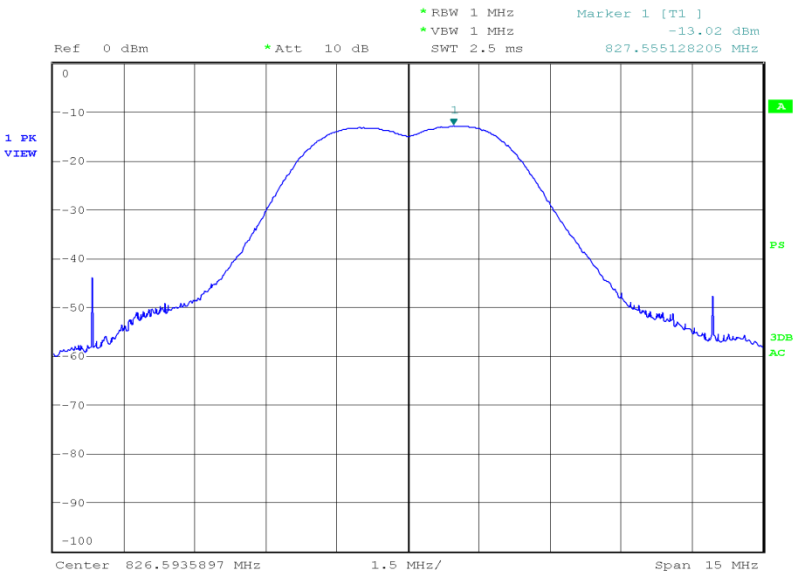


Date: 4.JAN.2014 23:00:37



Product Service

835.00 MHz

Result (dBm)	Result (W)
21.15	0.130

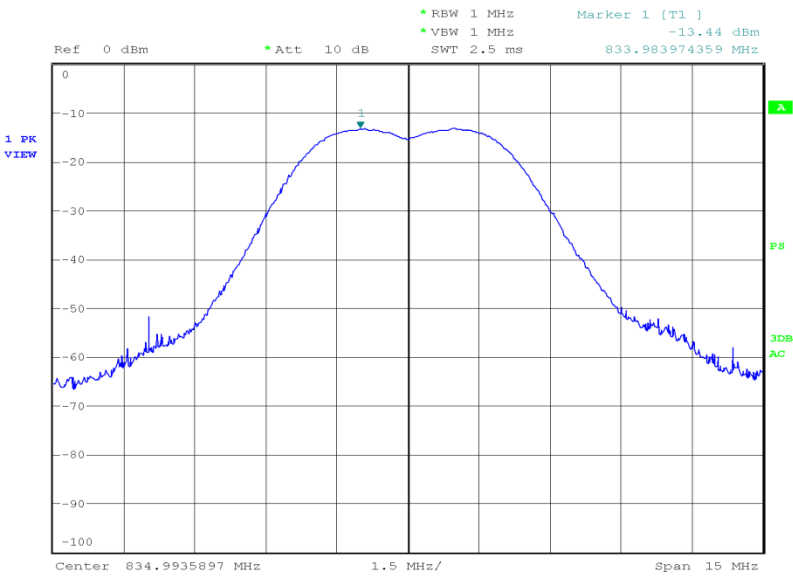


Date: 4.JAN.2014 22:30:13



Product Service

846.40 MHz

Result (dBm)	Result (W)
20.62	0.115

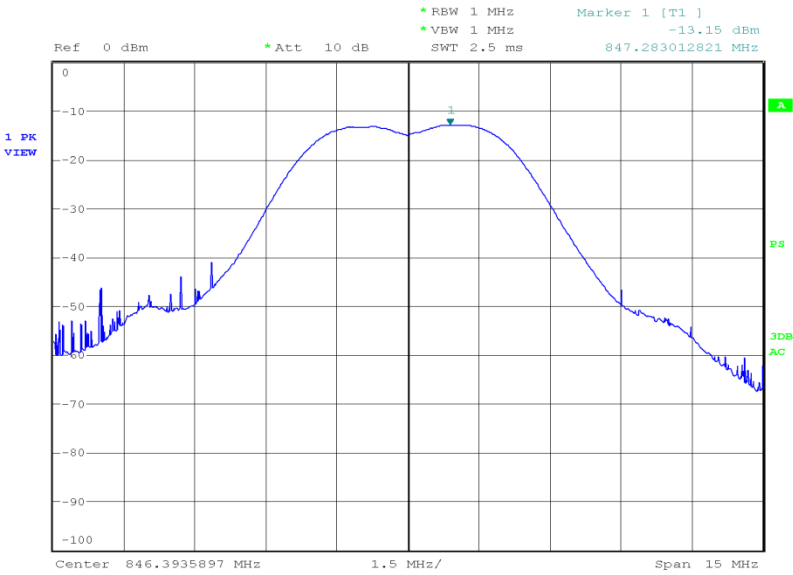

Date: 4.JAN.2014 23:06:33

Limit Clause

Mobile – 7 W or 38.45 dBm



Product Service

2.3 MAXIMUM PEAK OUTPUT POWER - CONDUCTED

2.3.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1046
FCC CFR 47 Part 22, Clause 22.913 (a)

2.3.2 Equipment Under Test and Modification State

SHL24 S/N: IMEI 004401115003325 - Modification State 0

2.3.3 Date of Test

3 January 2014

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Procedure

Using a spectrum analyser and attenuator(s), the output power of the EUT was measured at the antenna terminals.

The EUT supports WCDMA and was tested in this mode of operation.

2.3.6 Environmental Conditions

Ambient Temperature	24.0°C
Relative Humidity	36.9%



Product Service

2.3.7 Test Results

4.0 V DC Supply

826.60 MHz

Mode	Result (dBm)	Result (W)
WCDMA	26.51	0.448

835.00 MHz

Mode	Result (dBm)	Result (W)
WCDMA	26.96	0.497

846.40 MHz

Mode	Result (dBm)	Result (W)
WCDMA	26.77	0.475

Limit Clause

Mobile – 7 W or 38.45 dBm

Base Stations – 500 W or 57 dBm



2.4 EMISSION LIMITATIONS FOR CELLULAR EQUIPMENT

2.4.1 Specification Reference

FCC CFR 47 Part 22, Clause 22.917

2.4.2 Equipment Under Test and Modification State

SHL24 S/N: IMEI 004401115003309 - Modification State 0

2.4.3 Date of Test

5 January 2014

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Procedure

A preliminary profile of the Spurious Radiated Emissions was obtained up to the 10th harmonic by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT, the list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

The EUT was set to transmit on maximum power with modulation. The EUT was tested on bottom, middle and top channels at maximum power.

For any emissions found the EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result was determined by a calculation using the signal generator level, antenna gain and cable loss.

The measurements were performed at a 3m distance unless otherwise stated.

2.4.6 Environmental Conditions

Ambient Temperature	21.0°C
Relative Humidity	37.0%




Product Service

2.4.7 Test Results


826.60 MHz

30 MHz to 1 GHz

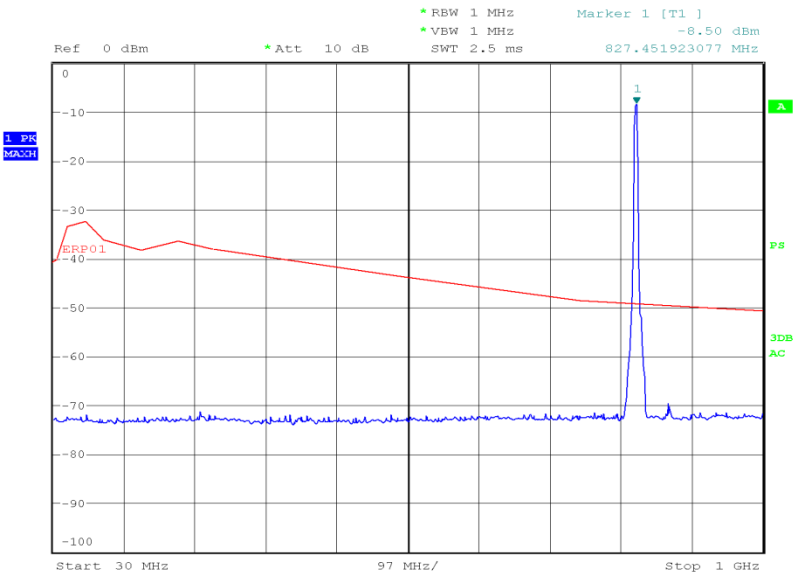

Date: 5.JAN.2014 00:20:16

1 GHz to 8 GHz

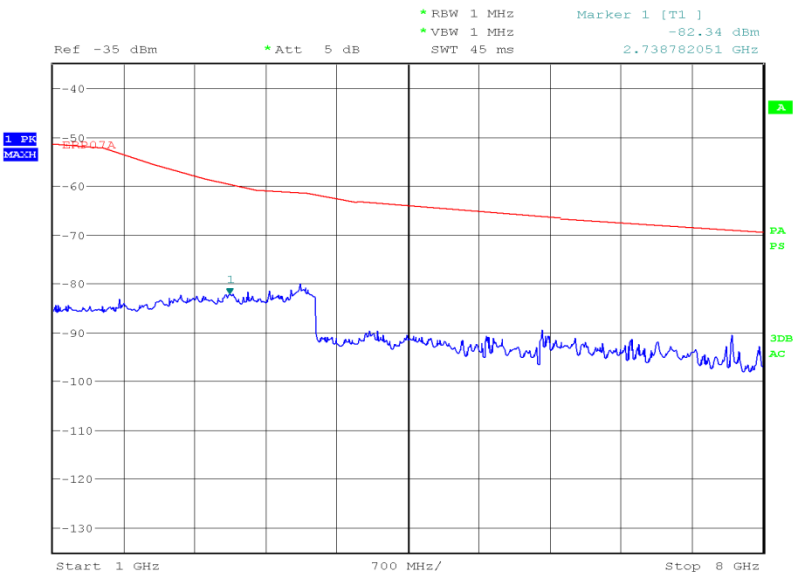


Date: 4.JAN.2014 21:51:27



Product Service

8 GHz to 9 GHz

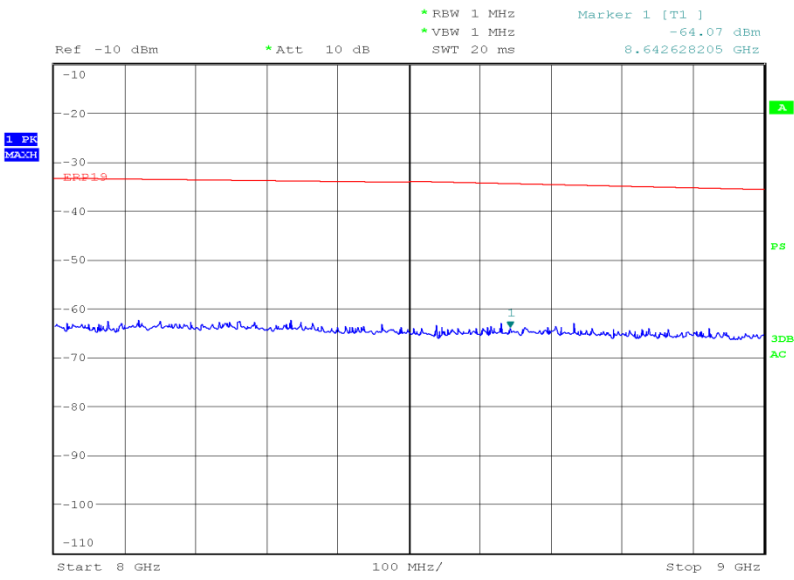


Date: 4.JAN.2014 21:25:18



Product Service


835.00 MHz

30 MHz to 1 GHz

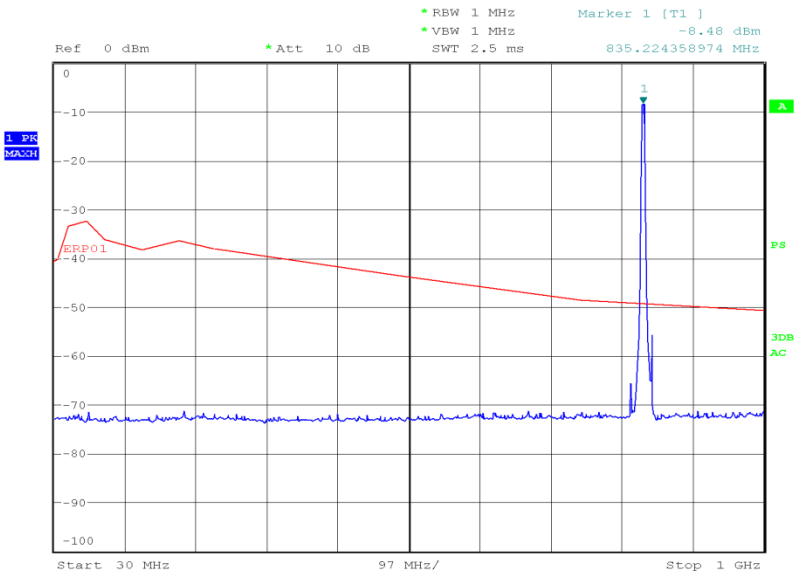

Date: 5.JAN.2014 00:14:24

1 GHz to 8 GHz

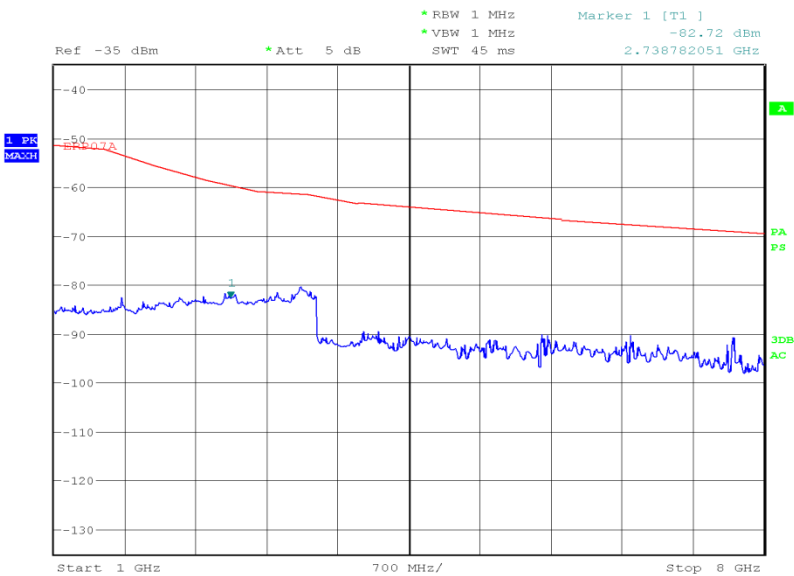


Date: 4.JAN.2014 21:47:55



Product Service


8 GHz to 9 GHz

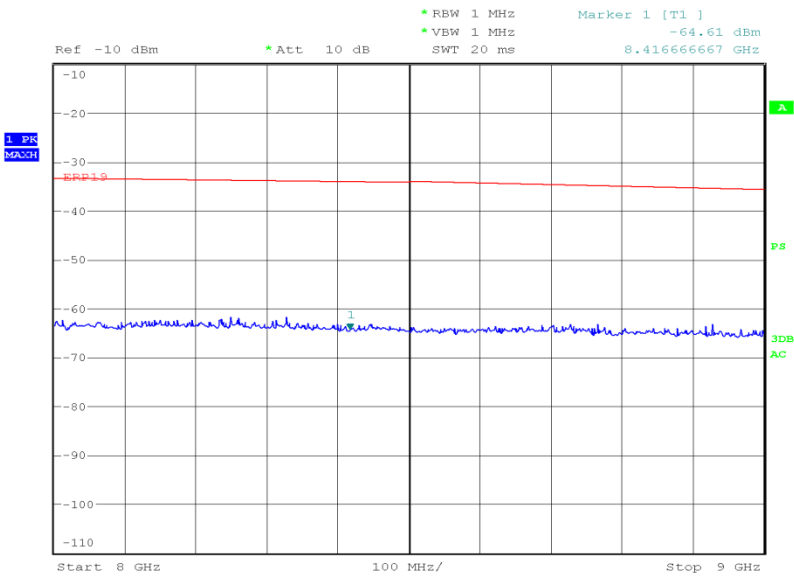


Date: 4.JAN.2014 21:21:47



Product Service

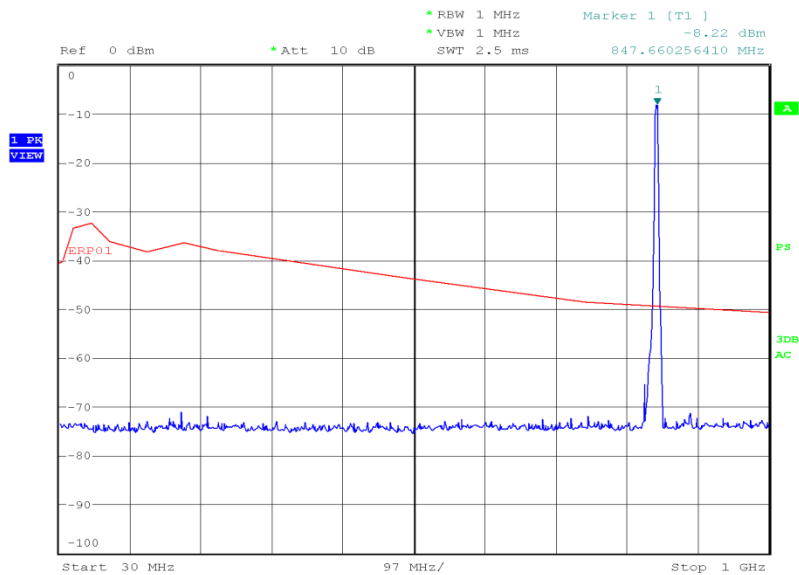846.40 MHz30 MHz to 1 GHz

Date: 5.JAN.2014 00:05:24

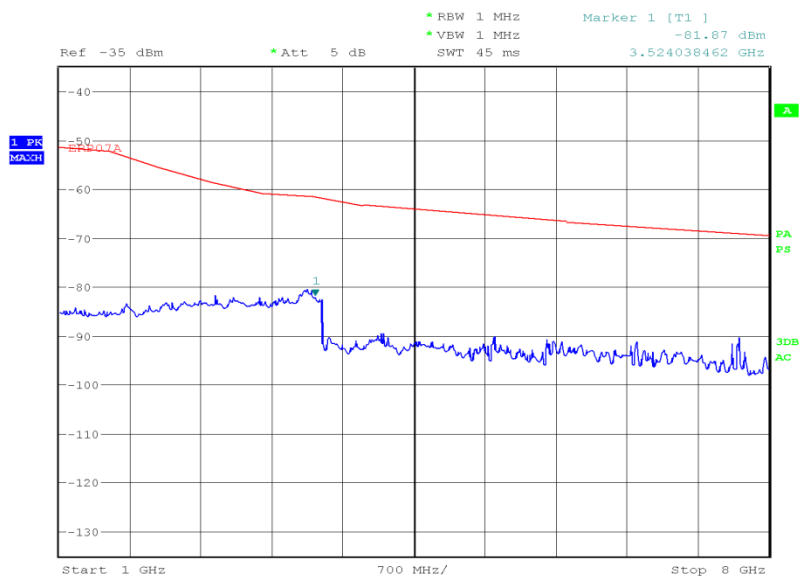
1 GHz to 8 GHz

Date: 4.JAN.2014 21:43:38



Product Service

8 GHz to 9 GHz

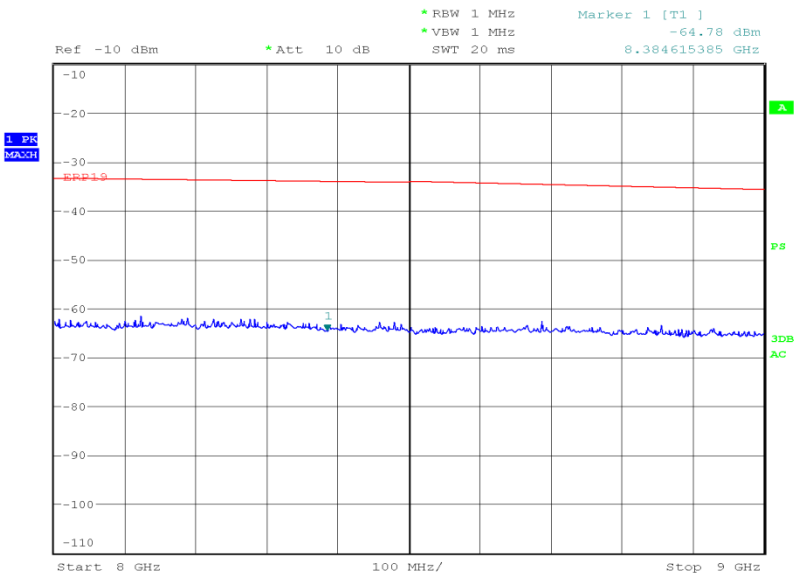

Date: 4.JAN.2014 21:37:54

Limit Clause

43+10log(P) or -13 dBm



Product Service

2.5 CONDUCTED SPURIOUS EMISSIONS

2.5.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 22, Clause 22.917 (a)

2.5.2 Equipment Under Test and Modification State

SHL24 S/N: IMEI 004401115003325 - Modification State 0

2.5.3 Date of Test

8 January 2014

2.5.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.5 Test Procedure

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9 kHz to the 10th harmonic. The EUT was set to transmit on full power with modulation. The EUT was tested on Bottom, Middle and Top channels for maximum power. The resolution and video bandwidths were set to 1 MHz and 3 MHz thus meeting the requirements of Part 22.917(b). The spectrum analyser detector was set to max hold.

From 9 kHz to 4 GHz, an attenuator was used. For measuring the range 1.5 GHz to 9 GHz an attenuator and high pass filter were used. This was to reduce saturation effects in the spectrum analyser.

The maximum path loss across the measurement bands were used as reference level offsets to ensure worst case.

2.5.6 Environmental Conditions

Ambient Temperature	25.3°C
Relative Humidity	36.2%




Product Service

2.5.7 Test Results



826.60 MHz

9 kHz to 1.5 GHz

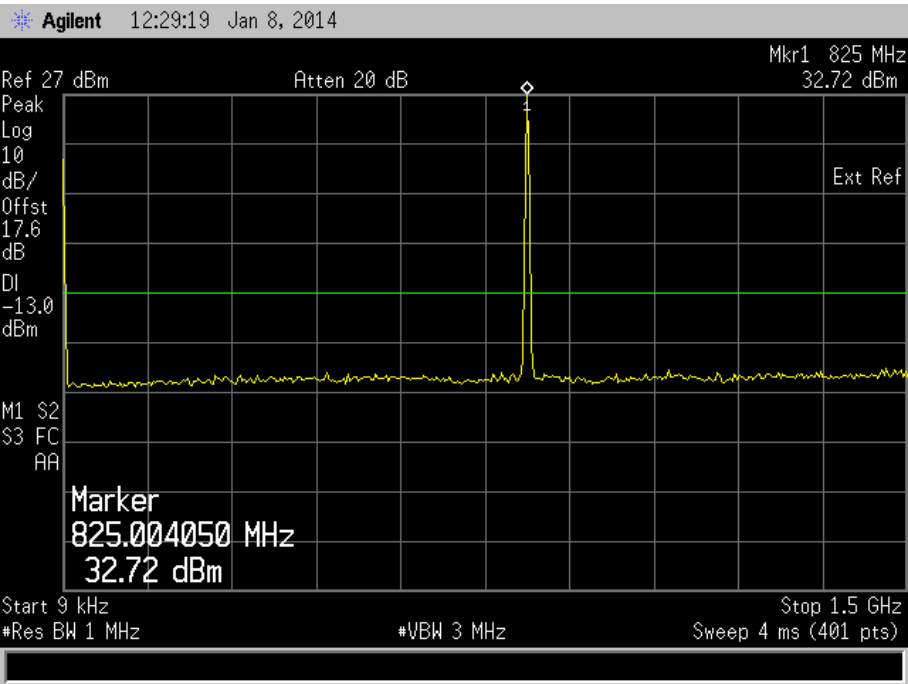





Product Service

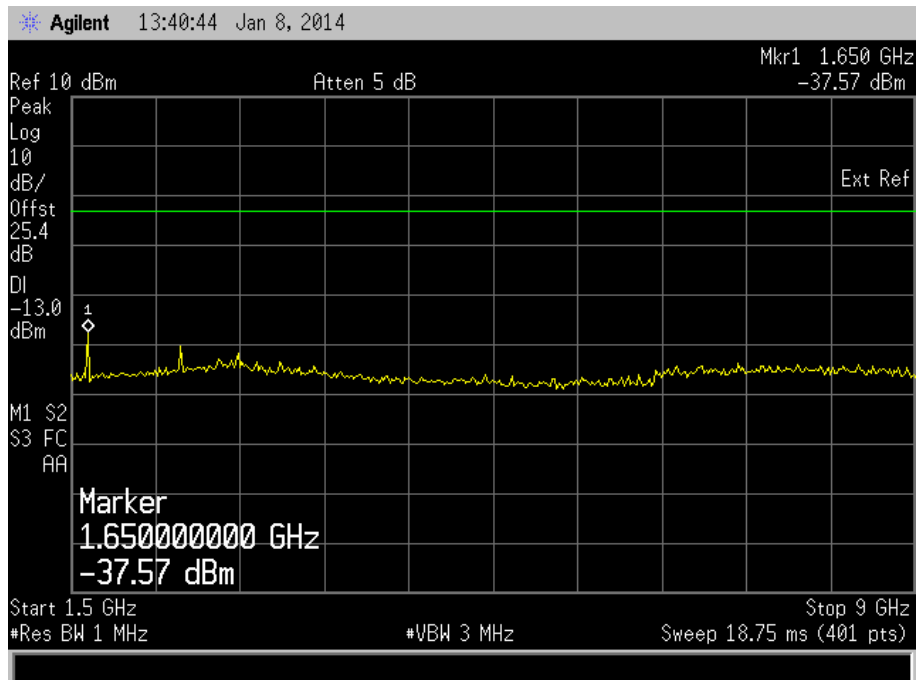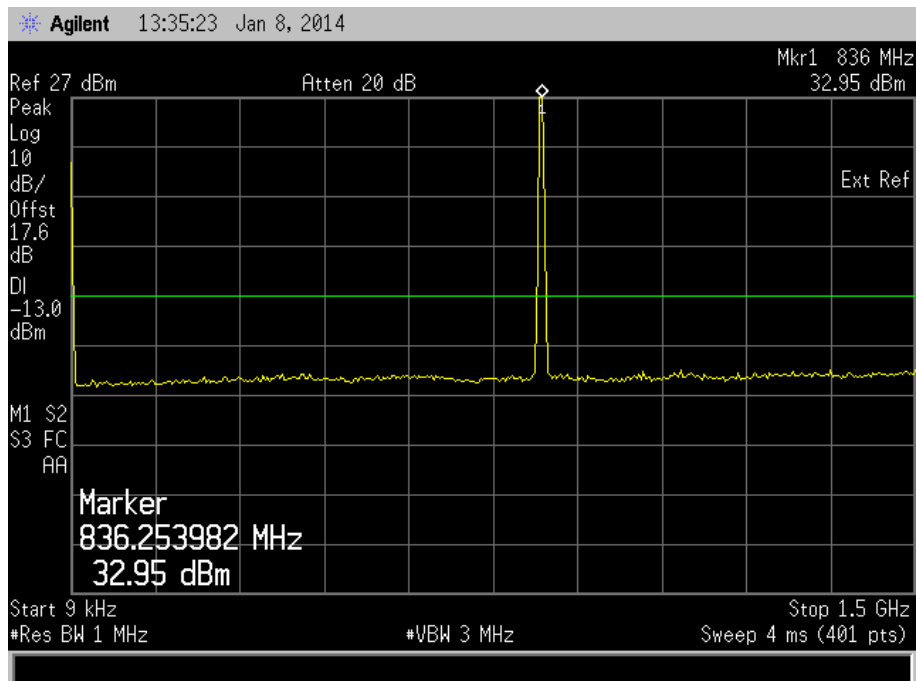1.5 GHz to 9 GHz835.00 MHz9 kHz to 1.5 GHz




Product Service

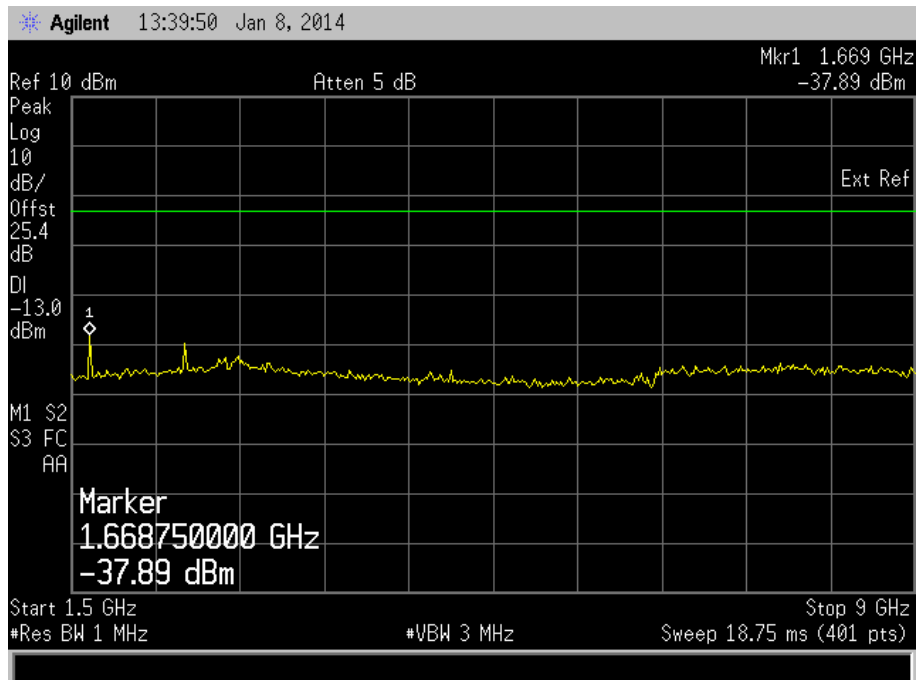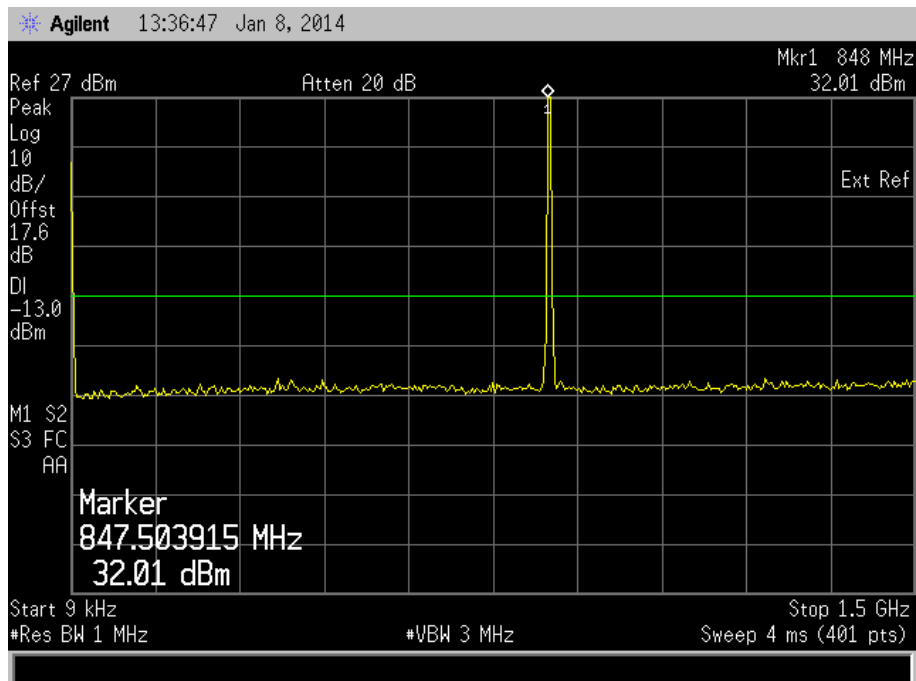1.5 GHz to 9 GHz846.40 MHz9 kHz to 1.5 GHz



Product Service

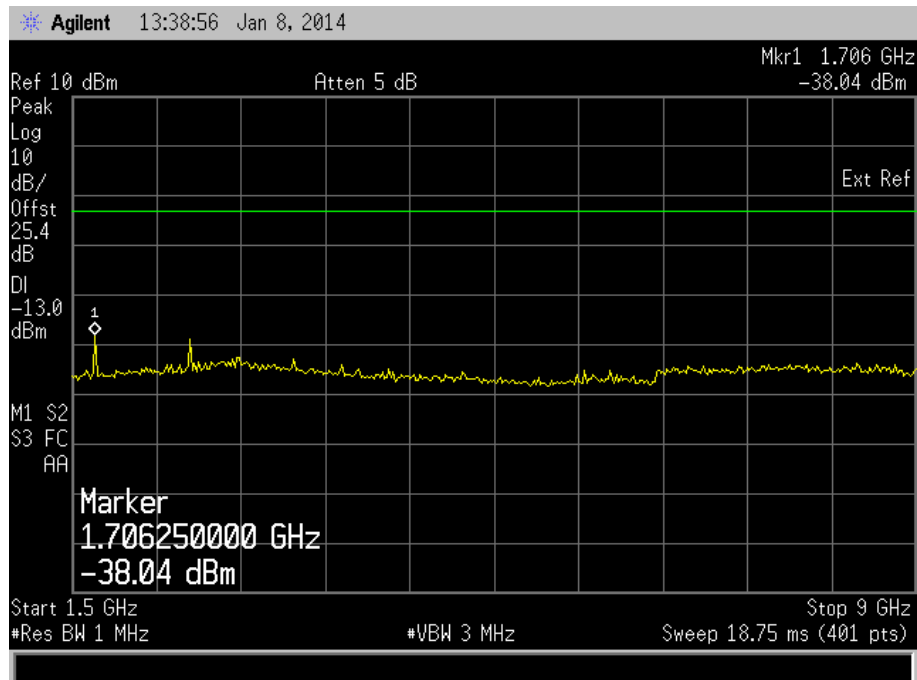1.5 GHz to 9 GHzLimit Clause

43+10log(P) or -13 dBm



Product Service

2.6 OCCUPIED BANDWIDTH

2.6.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1049 (h)
FCC CFR 47 Part 22, Clause 22.917 (b)

2.6.2 Equipment Under Test and Modification State

SHL24 S/N: IMEI 004401115003325 - Modification State 0

2.6.3 Date of Test

7 January 2014

2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.5 Test Procedure

The EUT was transmitting at maximum power, with modulation. Using a resolution bandwidth of 30 kHz and a video bandwidth of 300 kHz, the -26 dBc points were established and the emission bandwidth determined.

The plot of the following pages shows the resultant display from the Spectrum Analyser.

2.6.6 Environmental Conditions

Ambient Temperature	25.2°C
Relative Humidity	34.4%




Product Service

2.6.7 Test Results

4.0 V DC Supply

826.60 MHz

Mode	Occupied Bandwidth (kHz)
WCDMA	4146.2

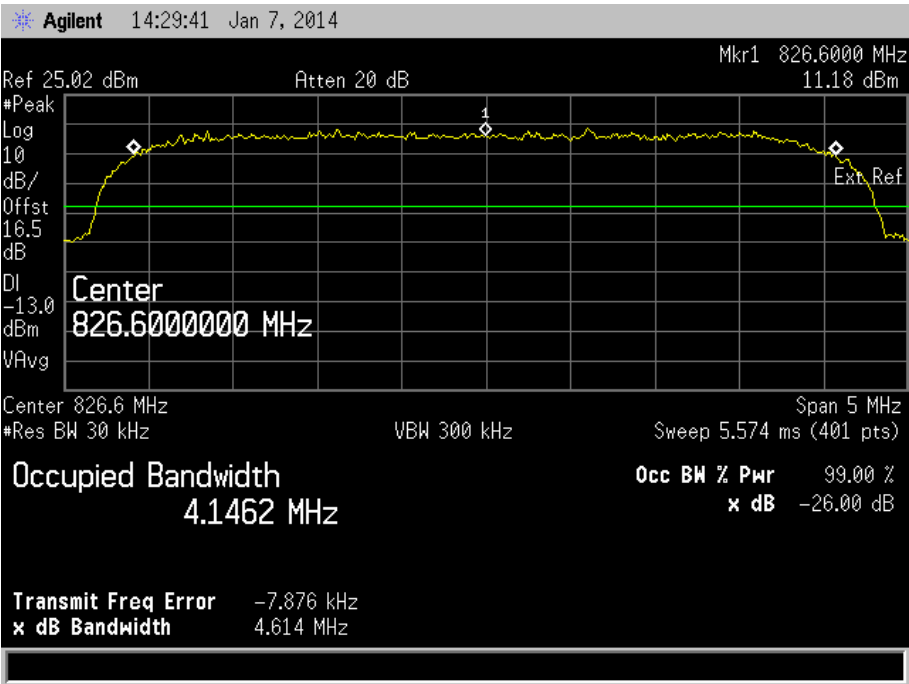




Product Service

835.00 MHz

Mode	Occupied Bandwidth (kHz)
WCDMA	4131.1

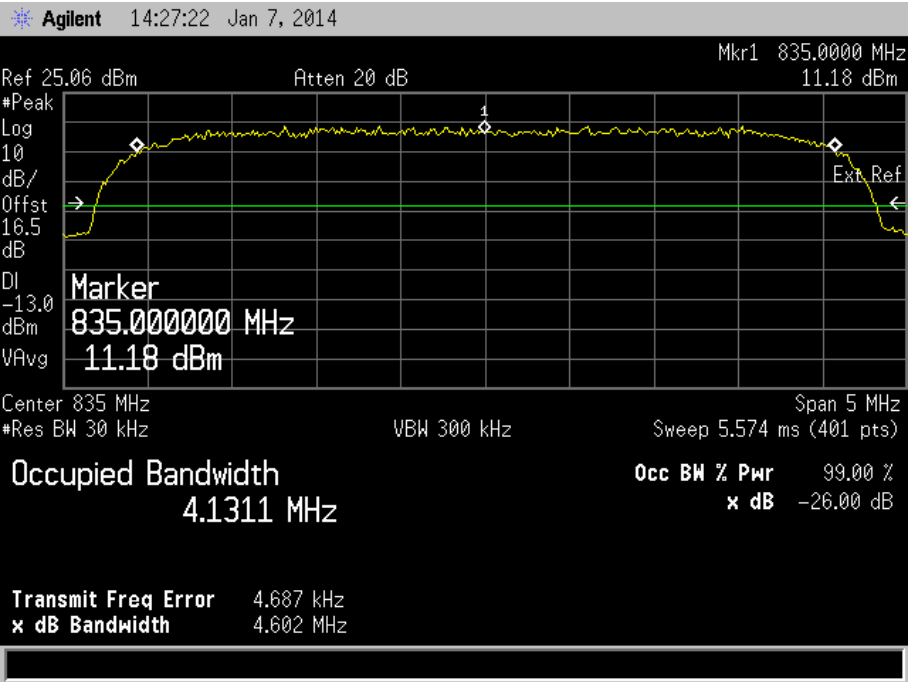




Product Service

846.40 MHz

Mode	Occupied Bandwidth (kHz)
WCDMA	4136,4

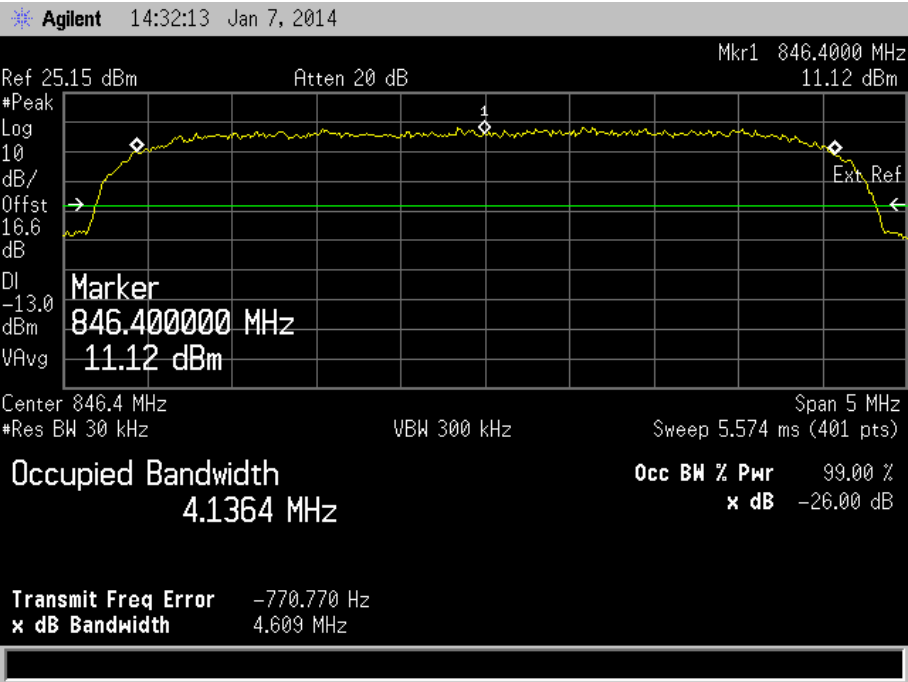

Limit Clause

The occupied bandwidth, that is the frequency bandwidth such that, below is lower and above is upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.



2.7 MODULATION CHARACTERISTICS

2.7.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1047 (d)

2.7.2 Equipment Under Test

SHL24

2.7.3 Test Results

Customer Description


For the period of test the EUT met the requirements of FCC CFR 47 Part 2 for Modulation Characteristics.

The test results are shown below.

4.0 V DC Supply

QPSK


Constellation Diagram

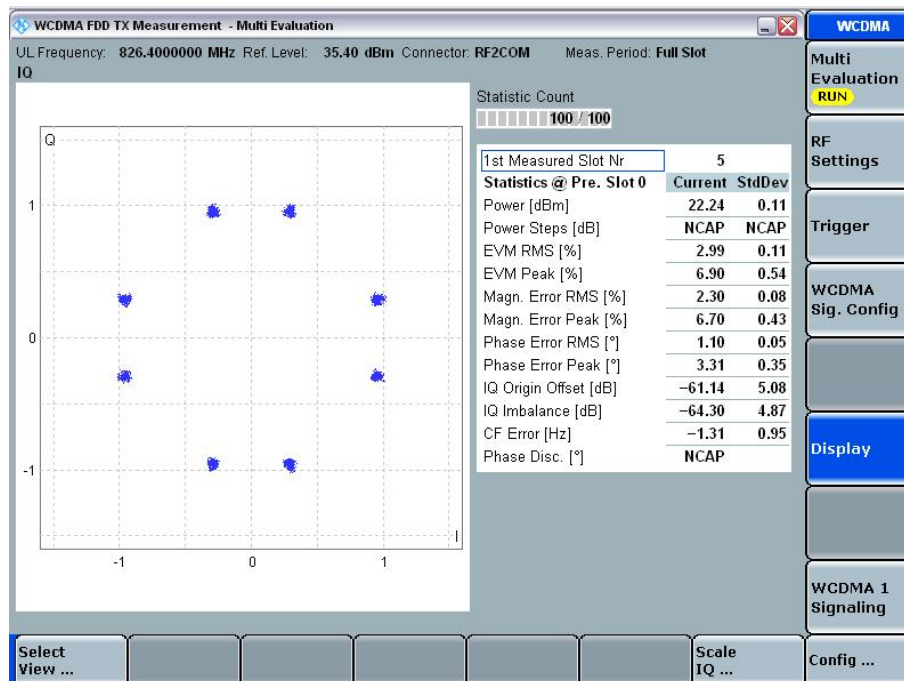




Product Service

I and Q Code Domain

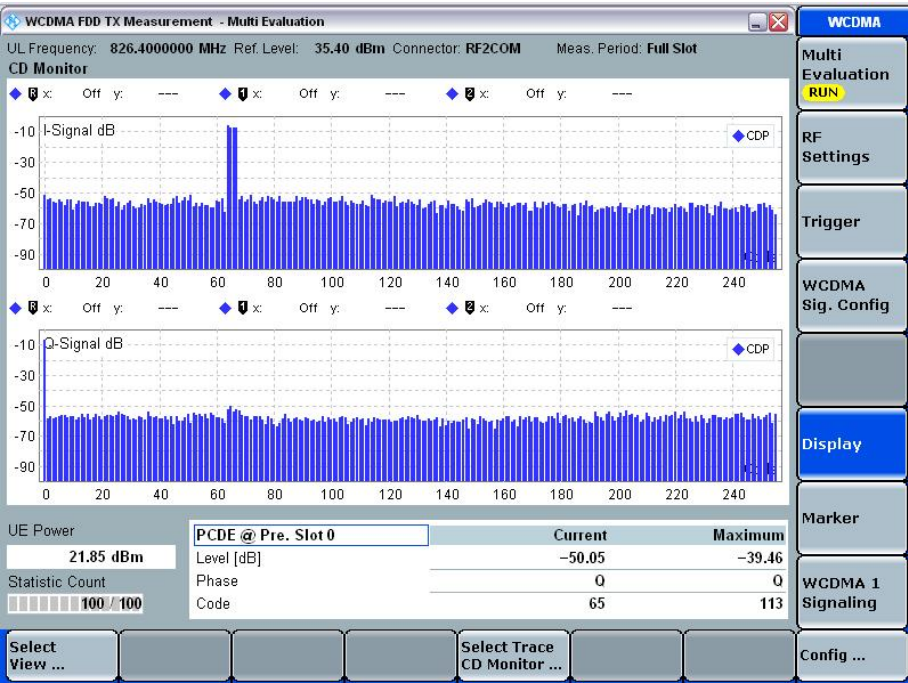

Spectrum Emission Mask

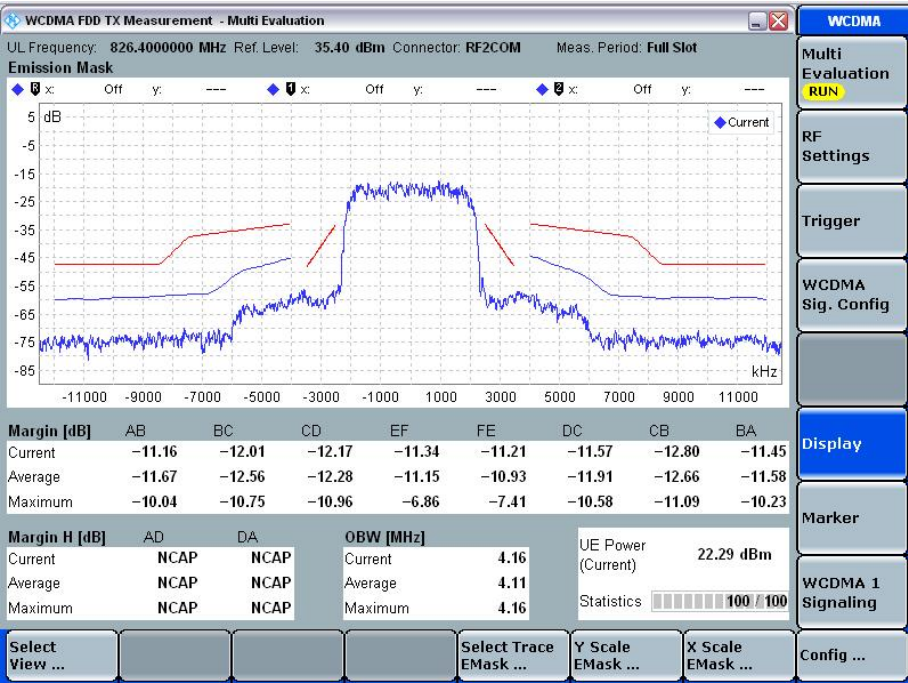

Limit Clause

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.



Product Service

2.8 FREQUENCY STABILITY**2.8.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1055
FCC CFR 47 Part 22, Clause 22.355

2.8.2 Equipment Under Test and Modification State

SHL24 S/N: IMEI 004401115003325 - Modification State 0

2.8.3 Date of Test

9 January 2014

2.8.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.5 Test Procedure

The EUT was set to transmit on maximum power with modulation. A Communications test set was used to measure the frequency error. The temperature was adjusted between -30°C and +50°C in 10° steps as per 2.1055 and the frequency error was measured at each temperature.

2.8.6 Environmental Conditions

Ambient Temperature	20.3°C
Relative Humidity	30.6%



2.8.7 Test Results

Temperature Interval (°C)	Mode	Modulation	Deviation (ppm)
-30	WCDMA	QPSK	0.019
-20	WCDMA	QPSK	0.019
-10	WCDMA	QPSK	0.040
0	WCDMA	QPSK	0.012
+10	WCDMA	QPSK	0.015
+20	WCDMA	QPSK	-0.014
+30	WCDMA	QPSK	-0.027
+40	WCDMA	QPSK	0.018
+50	WCDMA	QPSK	-0.015

Limit Clause

Frequency Range (MHz)	Base, Fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5.0	-	-
929 to 960	1.5	-	-
2110 to 2220	10	-	-



Product Service

Under Voltage Variations835.00 MHz

DC Voltage	Mode	Modulation	Deviation (ppm)
4.0 V DC	WCDMA	QPSK	-0.014
3.7 V DC	WCDMA	QPSK	0.013
4.0 V DC	WCDMA	QPSK	-0.014

Limit Clause

Frequency Range (MHz)	Base, Fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 - Spurious Emissions at Band Edge					
Multimeter	White Gold	WG022	190	12	28-Oct-2014
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Attenuator (10dB, 10W)	Texscan	HFP-50N	468	12	27-Jun-2014
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	24-Jan-2014
Power Divider	Weinschel	1506A	3345	12	23-May-2014
DC - 12.4 GHz 10 dB Attenuator	Suhner	6810.17.A	3965	12	17-Oct-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4143	12	22-Jul-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4144	12	17-Jul-2014
Section 2.2 - Effective Radiated Power					
Antenna (Double Ridge Guide)	EMCO	3115	34	12	8-Nov-2014
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	3-Apr-2014
Dual Power Supply Unit	Thurlby	PL320	288	-	TU
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Radio Communications Test Set	Rohde & Schwarz	CMU 200	3035	12	25-Oct-2014
Antenna (Log Periodic)	Schaffner	UPA6108	3108	12	5-Apr-2014
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	10-Sep-2014
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	22-Oct-2014
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Section 2.3 - Maximum Peak Output Power - Conducted					
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Communications Tester	Rohde & Schwarz	CMU 200	442	12	8-Nov-2014
Attenuator (10dB, 10W)	Texscan	HFP-50N	468	12	27-Jun-2014
Multimeter	Iso-tech	IDM101	2419	12	9-Oct-2014
Power Divider	Weinschel	1506A	3345	12	23-May-2014
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	13-Sep-2014
LISN, 5μH +10μF	ACME LISN Foundry	Def Stan 59-41/411	3905	12	21-Jun-2014
P-Series Power Meter	Agilent Technologies	N1911A	3981	12	18-Sep-2014
50 MHz-18 GHz Wideband Power Sensor	Agilent Technologies	N1921A	3983	12	18-Sep-2014
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	18-Sep-2014



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.4 – Emission Limitations for Cellular Equipment					
Antenna (Double Ridge Guide)	EMCO	3115	34	12	8-Nov-2014
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	3-Apr-2014
Antenna (Bilog)	Schaffner	CBL6143	287	24	18-Jan-2014
Dual Power Supply Unit	Thurlby	PL320	288	-	TU
Antenna (Double Ridge Guide)	Q-Par Angus Ltd	QSH 180K	1511	24	7-Nov-2014
Pre-Amplifier	Phase One	PS04-0086	1533	12	19-Dec-2014
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Filter (Hi Pass)	Lorch	9HP7-7000-SR	2833	12	1-Feb-2014
Radio Communications Test Set	Rohde & Schwarz	CMU 200	3035	12	25-Oct-2014
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	10-Sep-2014
Amplifier (8 - 18GHz)	Phase One	PS06-0061	3176	12	9-Aug-2014
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	22-Oct-2014
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	1-Feb-2014
Tilt Antenna Mast	maturio GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturio GmbH	NCD	3917	-	TU
Section 2.5 - Conducted Spurious Emissions					
Multimeter	White Gold	WG022	190	12	28-Oct-2014
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Attenuator (10dB, 10W)	Texscan	HFP-50N	468	12	27-Jun-2014
Attenuator (10dB)	Weinschel	47-10-34	481	12	27-Mar-2014
Spectrum Analyser	Agilent Technologies	E4407B	1154	12	13-Aug-2014
Hygrometer	Rotronic	I-1000	3220	12	16-Jul-2014
Power Divider	Weinschel	1506A	3345	12	23-May-2014
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	13-Sep-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4143	12	22-Jul-2014
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	18-Sep-2014
Section 2.6 - Occupied Bandwidth					
Multimeter	White Gold	WG022	190	12	28-Oct-2014
RF Coupler	TUV SUD Product Service	RFC1	414	-	TU
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Attenuator (10dB, 10W)	Texscan	HFP-50N	468	12	27-Jun-2014
Spectrum Analyser	Agilent Technologies	E4407B	1154	12	13-Aug-2014
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	24-Jan-2014
Hygrometer	Rotronic	I-1000	3220	12	16-Jul-2014
Power Divider	Weinschel	1506A	3345	12	23-May-2014
DC - 12.4 GHz 10 dB Attenuator	Suhner	6810.17.A	3965	12	17-Oct-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4143	12	22-Jul-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4144	12	17-Jul-2014



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.8 - Frequency Stability					
Climatic Chamber	Votsch	VT4002	161	-	O/P Mon
Multimeter	White Gold	WG022	190	12	28-Oct-2014
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Temperature Chamber	Montford	2F3	467	-	O/P Mon
Attenuator (10dB, 10W)	Texscan	HFP-50N	468	12	27-Jun-2014
Attenuator (10dB)	Weinschel	47-10-34	481	12	27-Mar-2014
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	24-Jan-2014
Digital Temperature Indicator	Fluke	51	2267	12	11-Sep-2014
Multimeter	Iso-tech	IDM101	2424	12	12-Sep-2014
Attenuator (30dB, 25W)	Weinschel	46-30-34	2776	12	6-Feb-2014
Thermocouple Thermometer	Fluke	51	3174	12	3-Dec-2014
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	4-Jul-2014
DC - 8 GHz Attenuator	Lucas Weinschel	24-30-33	3963	12	27-Jun-2014
1 Metre SMA Cable	Rhophase	3PS-1801A-1000-3PS	4099	12	5-Nov-2014
1 Metre N Type Cable	Rhophase	NPS-1601A-1000-NPS	4102	12	11-Jun-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4143	12	22-Jul-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4144	12	17-Jul-2014

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Maximum Peak Output Power - Conducted	± 0.70 dB
Emission Limitations for Cellular Equipment	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB
Conducted Spurious Emissions	± 3.454 dB
Effective Radiated Power	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB
Spurious Emissions at Band Edge	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB
Occupied Bandwidth	± 16.74 kHz
Modulation Characteristics	-
Frequency Stability	± 46.70 Hz



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2014 TÜV SÜD Product Service