APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

The measurement results are obtained as described below:
Measure Level = Reading Level + cable loss + antenna factor
Sample calculation: (93.25 dBuV/m) = (45.45 dBμV) + (12.4 dB) + (34.4 dB), the corresponding frequency is 5180MHz.
The measurement results contain the correction factor of the duty cycle.

Carrier frequency (MHz): 5180 MHz
Channel No.:36
Test Mode: 802.11a
Polarity:Vertical
Detector: Peak

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	93.25	45.45	N/A	N/A	12.40	35.40
2	5150	47.66	-0.14	-20.54	68.20	12.40	35.40

Carrier frequency (MHz): 5180
Channel No.:36
Test Mode: 802.11a
Polarity:Horizontal
Detector: Peak

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	91.19	43.39	N/A	N/A	12.40	35.40
2	5150	45.80	-2.00	-22.40	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.: 36
Test Mode: 802.11a
Polarity:Vertical
Detector: Average

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	84.96	37.16	N/A	N/A	12.40	35.40
2	5150	36.56	-11.24	-17.44	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.: 36
Test Mode: 802.11a
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	81.28	33.48	N/A	N/A	12.40	35.40
2	5150	35.66	-12.14	-18.34	54.00	12.40	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11a
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	83.74	35.74	N/A	N/A	12.60	35.40
2	5340	46.89	-1.11	-21.31	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11a
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	80.09	32.09	N/A	N/A	12.60	35.40
2	5340	45.31	-2.69	-22.89	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11a
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	76.26	28.26	N/A	N/A	12.60	35.40
2	5340	37.95	-10.05	-16.05	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11a
Polarity:Horizontal
Detector: Average

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	73.74	25.74	N/A	N/A	12.60	35.40
2	5340	36.54	-11.46	-17.46	54.00	12.60	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.:36
Test Mode: 802.11n（HT20）
Polarity:Vertical
Detector: Peak

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	93.31	45.51	N/A	N/A	12.40	35.40
2	5150	46.45	-1.35	-21.75	68.20	12.40	35.40

Carrier frequency (MHz): 5180
Channel No.:36
Test Mode: 802.11n（HT20）
Polarity:Horizontal
Detector: Peak

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	88.87	41.07	N/A	N/A	12.40	35.40
2	5150	45.80	-2.00	-22.40	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.: 36
Test Mode: 802.11n（HT20）
Polarity:Vertical
Detector: Average

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	84.51	36.71	N/A	N/A	12.40	35.40
2	5150	36.50	-11.30	-17.50	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.: 36
Test Mode: 802.11n（HT20）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	81.42	33.62	N/A	N/A	12.40	35.40
2	5150	35.34	-12.46	-18.66	54.00	12.40	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11n（HT20）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	82.54	34.54	N/A	N/A	12.60	35.40
2	5340	46.45	-1.55	-21.75	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11n（HT20）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	78.60	30.60	N/A	N/A	12.60	35.40
2	5340	44.86	-3.14	-23.34	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11n（HT20）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	76.56	28.56	N/A	N/A	12.60	35.40
2	5340	36.92	-11.08	-17.08	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11n（HT20）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	71.98	23.98	N/A	N/A	12.60	35.40
2	5340	36.44	-11.56	-17.56	54.00	12.60	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.:36
Test Mode: 802.11ac（VHT20）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	93.53	45.73	N/A	N/A	12.40	35.40
2	5150	46.36	-1.44	-21.84	68.20	12.40	35.40

Carrier frequency (MHz): 5180
Channel No.:36
Test Mode: 802.11ac（VHT20）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	89.91	42.11	N/A	N/A	12.40	35.40
2	5150	44.57	-3.23	-23.63	68.20	12.40	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.: 36
Test Mode: 802.11ac（VHT20）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	84.67	36.87	N/A	N/A	12.40	35.40
2	5150	36.00	-11.80	-18.00	54.00	12.40	35.40

Carrier frequency (MHz): 5180 MHz
Channel No.: 36
Test Mode: 802.11ac（VHT20）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5180	80.52	32.72	N/A	N/A	12.40	35.40
2	5150	35.54	-12.26	-18.46	54.00	12.40	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11ac（VHT20）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	83.74	35.74	N/A	N/A	12.60	35.40
2	5340	47.29	-0.71	-20.91	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11ac（VHT20）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	81.45	33.45	N/A	N/A	12.60	35.40
2	5340	45.32	-2.68	-22.88	68.20	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11ac（VHT20）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	77.73	29.73	N/A	N/A	12.60	35.40
2	5340	37.47	-10.53	-16.53	54.00	12.60	35.40

Carrier frequency (MHz): 5320 MHz
Channel No.:64
Test Mode: 802.11ac（VHT20）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5320	73.59	25.59	N/A	N/A	12.60	35.40
2	5340	37.20	-10.80	-16.80	54.00	12.60	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11n（HT40）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5190	89.40	41.60	N/A	N/A	12.40	35.40
2	5150	47.09	-0.71	-21.11	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11n（HT40）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5190	85.55	37.75	N/A	N/A	12.40	35.40
2	5150	46.82	-0.98	-21.38	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11n（HT40）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5190	81.41	33.61	N/A	N/A	12.40	35.40
2	5150	36.76	-11.04	-17.24	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11n（HT40）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5190	76.61	28.81	N/A	N/A	12.40	35.40
2	5150	36.66	-11.14	-17.34	54.00	12.40	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11n（HT40）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5310	83.46	35.46	N/A	N/A	12.60	35.40
2	5350	47.65	-0.35	-20.55	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11n（HT40）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5310	78.98	30.98	N/A	N/A	12.60	35.40
2	5350	46.12	-1.88	-22.08	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11n（HT40）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5310	75.00	27.00	N/A	N/A	12.60	35.40
2	5350	36.47	-11.53	-17.53	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11n（HT40）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5310	70.82	22.82	N/A	N/A	12.60	35.40
2	5350	35.79	-12.21	-18.21	54.00	12.60	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11ac（VHT40）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5190	89.51	41.71	N/A	N/A	12.40	35.40
2	5150	47.90	0.10	-20.30	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11ac（VHT40）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5190	86.61	38.81	N/A	N/A	12.40	35.40
2	5150	47.65	-0.15	-20.55	68.20	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11ac（VHT40）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5190	82.34	34.54	N/A	N/A	12.40	35.40
2	5150	36.79	-11.01	-17.21	54.00	12.40	35.40

Carrier frequency (MHz): 5190 MHz
Channel No.:38
Test Mode: 802.11ac（VHT40）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5190	79.53	31.73	N/A	N/A	12.40	35.40
2	5150	34.86	-12.94	-19.14	54.00	12.40	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11ac（VHT40）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5310	83.62	35.62	N/A	N/A	12.60	35.40
2	5350	47.73	-0.27	-20.47	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11ac（VHT40）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5310	80.16	32.16	N/A	N/A	12.60	35.40
2	5350	46.71	-1.29	-21.49	68.20	12.60	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11ac（VHT40）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5310	74.28	26.28	N/A	N/A	12.60	35.40
2	5350	37.75	-10.25	-16.25	54.00	12.60	35.40

Carrier frequency (MHz): 5310 MHz
Channel No.:62
Test Mode: 802.11ac（VHT40）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5310	72.20	24.20	N/A	N/A	12.60	35.40
2	5350	36.64	-11.36	-17.36	54.00	12.60	35.40

Carrier frequency (MHz): 5210 MHz
Channel No.:42
Test Mode: 802.11ac（VHT80）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5210	89.80	42.00	N/A	N/A	12.40	35.40
2	5150	47.64	-0.16	-20.56	68.20	12.40	35.40

Carrier frequency (MHz): 5210 MHz
Channel No.:42
Test Mode: 802.11ac（VHT80）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5210	86.80	39.00	N/A	N/A	12.40	35.40
2	5150	45.69	-2.11	-22.51	68.20	12.40	35.40

Carrier frequency (MHz): 5210 MHz
Channel No.:42
Test Mode: 802.11ac（VHT80）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5210	80.69	32.89	N/A	N/A	12.40	35.40
2	5150	36.91	-10.89	-17.09	54.00	12.40	35.40

Carrier frequency (MHz): 5210 MHz
Channel No.:42
Test Mode: 802.11ac（VHT80）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5210	76.02	28.22	N/A	N/A	12.40	35.40
2	5150	35.16	-12.64	-18.84	54.00	12.40	35.40

Carrier frequency (MHz): 5290 MHz
Channel No.:58
Test Mode: 802.11ac（VHT80）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5290	82.37	34.37	N/A	N/A	12.60	35.40
2	5210	46.32	-1.68	-21.88	68.20	12.60	35.40

Carrier frequency (MHz): 5290 MHz
Channel No.:58
Test Mode: 802.11ac（VHT80）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5290	79.19	31.19	N/A	N/A	12.60	35.40
2	5210	45.95	-2.05	-22.25	68.20	12.60	35.40

Carrier frequency (MHz): 5290 MHz
Channel No.:58
Test Mode: 802.11ac（VHT80）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5290	73.15	25.15	N/A	N/A	12.60	35.40
2	5210	37.47	-10.53	-16.53	54.00	12.60	35.40

Carrier frequency (MHz): 5290 MHz
Channel No.:58
Test Mode: 802.11ac（VHT80）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5290	68.24	20.24	N/A	N/A	12.60	35.40
2	5210	35.52	-12.48	-18.48	54.00	12.60	35.40

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11a
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	86.92	39.62	N/A	N/A	12.70	34.60
2	5480	47.89	0.59	-20.31	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11a
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	82.74	35.44	N/A	N/A	12.70	34.60
2	5480	46.48	-0.82	-21.72	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11a
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	78.32	31.02	N/A	N/A	12.70	34.60
2	5480	37.38	-9.92	-16.62	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11a
Polarity:Horizontal
Detector: Average

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	76.09	28.79	N/A	N/A	12.70	34.60
2	5480	36.56	-10.74	-17.44	54.00	12.70	34.60

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11a
Polarity:Vertical
Detector: Peak

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	86.78	39.18	N/A	N/A	12.90	34.70
2	5845	47.45	-0.15	-20.75	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11a
Polarity:Horizontal
Detector: Peak

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	82.11	34.51	N/A	N/A	12.90	34.70
2	5845	46.40	-1.20	-21.80	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11a
Polarity:Vertical
Detector: Average

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	79.14	31.54	N/A	N/A	12.90	34.70
2	5845	37.06	-10.54	-16.94	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11a
Polarity:Horizontal
Detector: Average

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	74.27	26.67	N/A	N/A	12.90	34.70
2	5845	36.74	-10.86	-17.26	54.00	12.90	34.70

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11n（HT20）
Polarity:Vertical
Detector: Peak

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	86.58	39.28	N/A	N/A	12.70	34.60
2	5480	46.35	-0.95	-21.85	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11n（HT20）
Polarity:Horizontal
Detector: Peak

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	83.27	35.97	N/A	N/A	12.70	34.60
2	5480	45.07	-2.23	-23.13	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11n（HT20）
Polarity:Vertical
Detector: Average

No	Frequency （MHz）	Measure Level （dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	78.36	31.06	N/A	N/A	12.70	34.60
2	5480	37.87	-9.43	-16.13	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11n（HT20）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	74.65	27.35	N/A	N/A	12.70	34.60
2	5480	37.82	-9.48	-16.18	54.00	12.70	34.60

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11n（HT20）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	87.45	39.85	N/A	N/A	12.90	34.70
2	5845	47.89	0.29	-20.31	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11n（HT20）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	83.59	35.99	N/A	N/A	12.90	34.70
2	5845	46.65	-0.95	-21.55	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11n（HT20）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	78.10	30.50	N/A	N/A	12.90	34.70
2	5845	37.53	-10.07	-16.47	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11n（HT20）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	75.83	28.23	N/A	N/A	12.90	34.70
2	5845	37.46	-10.14	-16.54	54.00	12.90	34.70

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11ac（VHT20）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	86.96	39.66	N/A	N/A	12.70	34.60
2	5480	46.57	-0.73	-21.63	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11ac（VHT20）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	82.57	35.27	N/A	N/A	12.70	34.60
2	5480	45.40	-1.90	-22.80	68.20	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11ac（VHT20）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	79.50	32.20	N/A	N/A	12.70	34.60
2	5480	37.22	-10.08	-16.78	54.00	12.70	34.60

Carrier frequency (MHz): 5500 MHz
Channel No.:100
Test Mode: 802.11ac（VHT20）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5500	75.46	28.16	N/A	N/A	12.70	34.60
2	5480	36.89	-10.41	-17.11	54.00	12.70	34.60

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11ac（VHT20）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	87.14	39.54	N/A	N/A	12.90	34.70
2	5845	46.31	-1.29	-21.89	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11ac（VHT20）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	84.10	36.50	N/A	N/A	12.90	34.70
2	5845	45.30	-2.30	-22.90	68.20	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11ac（VHT20）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	78.06	30.46	N/A	N/A	12.90	34.70
2	5845	37.12	-10.48	-16.88	54.00	12.90	34.70

Carrier frequency (MHz): 5825 MHz
Channel No.:165
Test Mode: 802.11ac（VHT20）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5825	74.11	26.51	N/A	N/A	12.90	34.70
2	5845	35.88	-11.72	-18.12	54.00	12.90	34.70

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n（HT40）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5510	88.75	41.45	N/A	N/A	12.70	34.60
2	5470	46.48	-0.82	-21.72	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n（HT40）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5510	85.38	38.08	N/A	N/A	12.70	34.60
2	5470	44.70	-2.60	-23.50	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n（HT40）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5510	79.42	32.12	N/A	N/A	12.70	34.60
2	5470	37.15	-10.15	-16.85	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11n（HT40）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5510	75.93	28.63	N/A	N/A	12.70	34.60
2	5470	36.79	-10.51	-17.21	54.00	12.70	34.60

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11n（HT40）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5795	85.55	37.95	N/A	N/A	12.90	34.70
2	5835	46.21	-1.39	-21.99	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11n（HT40）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5795	81.31	33.71	N/A	N/A	12.90	34.70
2	5835	45.43	-2.17	-22.77	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11n（HT40）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5795	77.91	30.31	N/A	N/A	12.90	34.70
2	5835	37.84	-9.76	-16.16	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11n（HT40）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5795	74.61	27.01	N/A	N/A	12.90	34.70
2	5835	36.38	-11.22	-17.62	54.00	12.90	34.70

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11ac（VHT40）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5510	88.50	41.20	N/A	N/A	12.70	34.60
2	5470	47.57	0.27	-20.63	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11ac（VHT40）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5510	86.05	38.75	N/A	N/A	12.70	34.60
2	5470	45.91	-1.39	-22.29	68.20	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11ac（VHT40）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5510	80.36	33.06	N/A	N/A	12.70	34.60
2	5470	37.95	-9.35	-16.05	54.00	12.70	34.60

Carrier frequency (MHz): 5510 MHz
Channel No.:102
Test Mode: 802.11ac（VHT40）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5510	76.06	28.76	N/A	N/A	12.70	34.60
2	5470	37.69	-9.61	-16.31	54.00	12.70	34.60

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11ac（VHT40）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5795	85.05	37.45	N/A	N/A	12.90	34.70
2	5835	47.64	0.04	-20.56	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11ac（VHT40）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5795	81.61	34.01	N/A	N/A	12.90	34.70
2	5835	47.43	-0.17	-20.77	68.20	12.90	34.70

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11ac（VHT40）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5795	79.00	31.40	N/A	N/A	12.90	34.70
2	5835	37.01	-10.59	-16.99	54.00	12.90	34.70

Carrier frequency (MHz): 5795 MHz
Channel No.:159
Test Mode: 802.11ac（VHT40）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5795	75.59	27.99	N/A	N/A	12.90	34.70
2	5835	35.45	-12.15	-18.55	54.00	12.90	34.70

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac（VHT80）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5530	85.53	38.23	N/A	N/A	12.70	34.60
2	5450	47.93	0.63	-20.27	68.20	12.70	34.60

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac（VHT80）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5530	81.98	34.68	N/A	N/A	12.70	34.60
2	5450	47.38	0.08	-20.82	68.20	12.70	34.60

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac（VHT80）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5530	79.23	31.93	N/A	N/A	12.70	34.60
2	5450	37.12	-10.18	-16.88	54.00	12.70	34.60

Carrier frequency (MHz): 5530 MHz
Channel No.:106
Test Mode: 802.11ac（VHT80）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5530	75.47	28.17	N/A	N/A	12.70	34.60
2	5450	35.65	-11.65	-18.35	54.00	12.70	34.60

Carrier frequency (MHz): 5775 MHz
Channel No.:155
Test Mode: 802.11ac（VHT80）
Polarity:Vertical
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5775	83.61	36.01	N/A	N/A	12.90	34.70
2	5695	46.42	-1.18	-21.78	68.20	12.90	34.70

Carrier frequency (MHz): 5775 MHz
Channel No.:155
Test Mode: 802.11ac（VHT80）
Polarity:Horizontal
Detector: Peak

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5775	80.77	33.17	N/A	N/A	12.90	34.70
2	5695	46.16	-1.44	-22.04	68.20	12.90	34.70

Carrier frequency (MHz): 5775 MHz
Channel No.:155
Test Mode: 802.11ac（VHT80）
Polarity:Vertical
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5775	76.27	28.67	N/A	N/A	12.90	34.70
2	5695	36.76	-10.84	-17.24	54.00	12.90	34.70

Carrier frequency (MHz): 5775 MHz
Channel No.:155
Test Mode: 802.11ac（VHT80）
Polarity:Horizontal
Detector: Average

No	Frequency（MHz）	Measure Level（dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB)
1	5775	72.72	25.12	N/A	N/A	12.90	34.70
2	5695	35.57	-12.03	-18.43	54.00	12.90	34.70

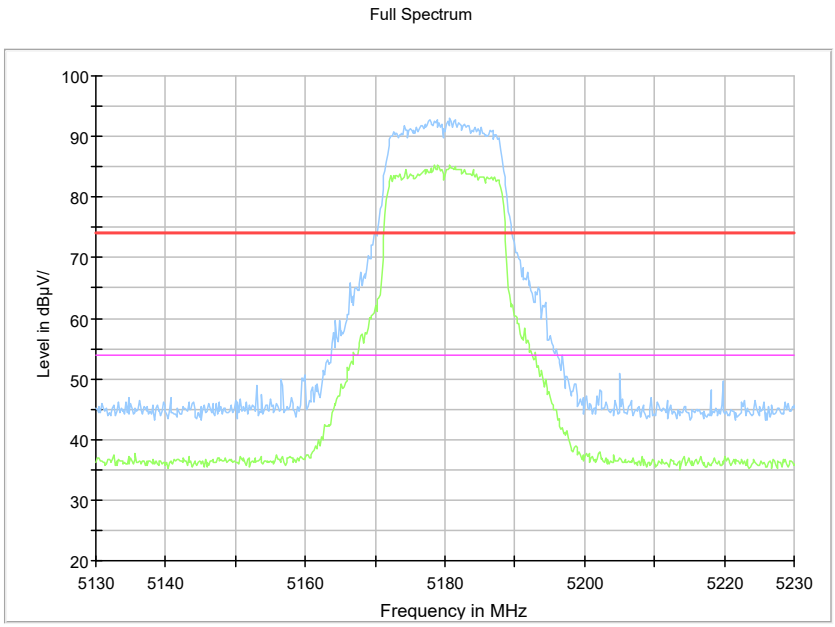

Radiated Emission Band Edge for 5180MHz

Sample Calculations

Determining Spurious Emissions Levels

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.
The measurement results are obtained as described below:
Result= P_{mea} + A_{Rpl}
Sample calculation: (20.73 dBμV/m) = (40.63 dBμV) + (-19.9 dB/m), the corresponding frequency is 35.092500MHz.
The worst case attitude: The mobile lay down.

For 802.11a Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.092500	20.73	-19.9	40.63	Vertical	40.00
82.477000	25.92	-23.7	49.62	Vertical	40.00
130.443500	24.08	-22.4	46.48	Vertical	43.50
186.170000	21.15	-20.1	41.25	Vertical	43.50
328.857000	17.32	-15.1	32.42	Vertical	46.00
907.413500	18.47	-3.2	21.67	Vertical	46.00

For 802.11n(HT20) Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
36.499000	20.07	-19.5	39.57	Vertical	40.00
82.574000	25.78	-23.6	49.38	Vertical	40.00
129.182500	24.21	-22.3	46.51	Vertical	43.50
188.110000	21.50	-19.9	41.40	Vertical	43.50
324.831500	16.73	-15.3	32.03	Vertical	46.00
933.458000	19.13	-2.9	22.03	Vertical	46.00

For 802.11ac(VHT20) Channel No.:36

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.626000	20.13	-19.8	39.93	Vertical	40.00
69.964000	25.39	-22.1	47.49	Vertical	40.00
129.958500	24.05	-22.3	46.35	Vertical	43.50
185.151500	20.67	-20.3	40.97	Vertical	43.50
325.656000	17.24	-15.2	32.44	Vertical	46.00
902.709000	18.33	-3.2	21.53	Vertical	46.00

For 802.11a Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.727500	19.10	-21.1	40.20	Vertical	40.00
70.497500	25.66	-22.2	47.86	Vertical	40.00
129.037000	24.17	-22.2	46.37	Vertical	43.50
184.181500	20.68	-20.4	41.08	Vertical	43.50
324.152500	16.92	-15.3	32.22	Vertical	46.00
919.732500	18.74	-3.0	21.74	Vertical	46.00

For 802.11n(HT20) Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.462000	19.71	-20.1	39.81	Vertical	40.00
69.236500	25.35	-21.9	47.25	Vertical	40.00
130.055500	24.08	-22.3	46.38	Vertical	43.50
186.364000	20.30	-20.1	40.40	Vertical	43.50
322.455000	16.47	-15.3	31.77	Vertical	46.00
881.999500	17.77	-3.6	21.37	Vertical	46.00

For 802.11ac(VHT20) Channel No.:44

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
37.711500	18.09	-19.2	37.29	Vertical	40.00
70.740000	25.59	-22.3	47.89	Vertical	40.00
131.025500	23.54	-22.4	45.94	Vertical	43.50
191.990000	18.09	-19.5	37.59	Vertical	43.50
322.212500	16.64	-15.3	31.94	Vertical	46.00
958.290000	19.19	-2.6	21.79	Vertical	46.00

For 802.11a Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.268000	19.00	-20.1	39.10	Vertical	40.00
69.964000	25.72	-22.1	47.82	Vertical	40.00
128.358000	24.21	-22.2	46.41	Vertical	43.50
183.211500	20.43	-20.6	41.03	Vertical	43.50
322.212500	16.57	-15.3	31.87	Vertical	46.00
899.314000	18.26	-3.3	21.56	Vertical	46.00

For 802.11n(HT20) Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.704500	20.17	-20.0	40.17	Vertical	40.00
70.449000	25.94	-22.2	48.14	Vertical	40.00
127.824500	23.51	-22.1	45.61	Vertical	43.50
183.696500	20.80	-20.5	41.30	Vertical	43.50
321.388000	16.69	-15.4	32.09	Vertical	46.00
951.112000	19.06	-2.7	21.76	Vertical	46.00

For 802.11ac(VHT20) Channel No.:48

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.965500	19.54	-19.7	39.24	Vertical	40.00
70.546000	25.91	-22.2	48.11	Vertical	40.00
130.589000	23.92	-22.4	46.32	Vertical	43.50
181.611000	20.11	-20.8	40.91	Vertical	43.50
323.425000	15.69	-15.3	30.99	Vertical	46.00
916.968000	18.67	-3.0	21.67	Vertical	46.00

For 802.11n(HT40) Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.630500	18.40	-21.1	39.50	Vertical	40.00
70.352000	25.88	-22.2	48.08	Vertical	40.00
128.843000	24.08	-22.2	46.28	Vertical	43.50
183.890500	20.72	-20.5	41.22	Vertical	43.50
319.884500	16.48	-15.4	31.88	Vertical	46.00
914.640000	18.68	-3.1	21.78	Vertical	46.00

For 802.11ac(VHT40) Channel No.:38

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.189500	20.69	-19.9	40.59	Vertical	40.00
70.594500	25.82	-22.2	48.02	Vertical	40.00
128.794500	24.05	-22.2	46.25	Vertical	43.50
182.047500	20.29	-20.7	40.99	Vertical	43.50
320.612000	16.55	-15.4	31.95	Vertical	46.00
945.825500	19.08	-2.8	21.88	Vertical	46.00

For 802.11n(HT40) Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
51.825000	18.30	-17.8	36.10	Vertical	40.00
70.061000	25.77	-22.1	47.87	Vertical	40.00
128.891500	23.99	-22.2	46.19	Vertical	43.50
184.375500	20.15	-20.4	40.55	Vertical	43.50
322.164000	16.29	-15.4	31.69	Vertical	46.00
888.062000	17.94	-3.5	21.44	Vertical	46.00

For 802.11ac(VHT40) Channel No.:46

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.432000	20.15	-19.8	39.95	Vertical	40.00
70.012500	25.74	-22.1	47.84	Vertical	40.00
129.667500	23.63	-22.3	45.93	Vertical	43.50
183.648000	20.58	-20.5	41.08	Vertical	43.50
319.496500	16.49	-15.4	31.89	Vertical	46.00
854.354500	17.37	-4.1	21.47	Vertical	46.00

For 802.11ac(VHT80) Channel No.:42

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.723000	19.45	-19.7	39.15	Vertical	40.00
69.382000	25.76	-21.9	47.66	Vertical	40.00
130.007000	23.77	-22.3	46.07	Vertical	43.50
182.532500	20.18	-20.7	40.88	Vertical	43.50
319.496500	16.54	-15.4	31.94	Vertical	46.00
891.845000	18.03	-3.5	21.53	Vertical	46.00

For 802.11a Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
36.159500	19.07	-19.6	38.67	Vertical	40.00
69.770000	25.79	-22.0	47.79	Vertical	40.00
128.309500	23.85	-22.2	46.05	Vertical	43.50
181.999000	20.44	-20.8	41.24	Vertical	43.50
321.388000	16.30	-15.4	31.70	Vertical	46.00
898.974500	18.26	-3.3	21.56	Vertical	46.00

For 802.11n(HT20) Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.995500	20.43	-19.9	40.33	Vertical	40.00
69.382000	25.84	-21.9	47.74	Vertical	40.00
128.358000	23.89	-22.2	46.09	Vertical	43.50
182.241500	20.47	-20.7	41.17	Vertical	43.50
320.078500	16.66	-15.4	32.06	Vertical	46.00
917.356000	18.70	-3.0	21.70	Vertical	46.00

For 802.11ac(VHT20) Channel No.:52

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
36.547500	18.93	-19.5	38.43	Vertical	40.00
70.352000	25.89	-22.2	48.09	Vertical	40.00
129.037000	24.07	-22.2	46.27	Vertical	43.50
181.659500	20.07	-20.8	40.87	Vertical	43.50
319.205500	16.53	-15.5	32.03	Vertical	46.00
948.250500	19.10	-2.8	21.90	Vertical	46.00

For 802.11a Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.995500	20.41	-19.9	40.31	Vertical	40.00
69.333500	25.84	-21.9	47.74	Vertical	40.00
129.279500	23.90	-22.3	46.20	Vertical	43.50
180.641000	19.82	-20.9	40.72	Vertical	43.50
319.011500	16.46	-15.5	31.96	Vertical	46.00
945.146500	19.07	-2.8	21.87	Vertical	46.00

For 802.11n(HT20) Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.679000	18.09	-21.1	39.19	Vertical	40.00
69.624500	25.90	-22.0	47.90	Vertical	40.00
128.649000	24.05	-22.2	46.25	Vertical	43.50
182.338500	20.59	-20.7	41.29	Vertical	43.50
319.981500	16.60	-15.4	32.00	Vertical	46.00
924.388500	18.74	-3.0	21.74	Vertical	46.00

For 802.11ac(VHT20) Channel No.:60

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.335000	20.18	-19.8	39.98	Vertical	40.00
70.691500	25.65	-22.3	47.95	Vertical	40.00
129.231000	23.95	-22.3	46.25	Vertical	43.50
180.689500	19.24	-20.9	40.14	Vertical	43.50
319.642000	16.67	-15.4	32.07	Vertical	46.00
901.545000	18.29	-3.2	21.49	Vertical	46.00

For 802.11a Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.850000	20.13	-20.0	40.13	Vertical	40.00
70.497500	25.82	-22.2	48.02	Vertical	40.00
128.988500	24.11	-22.2	46.31	Vertical	43.50
180.350000	19.96	-21.0	40.96	Vertical	43.50
319.836000	16.51	-15.4	31.91	Vertical	46.00
931.906000	19.01	-2.9	21.91	Vertical	46.00

For 802.11n(HT20) Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.044000	20.55	-19.9	40.45	Vertical	40.00
69.576000	25.88	-22.0	47.88	Vertical	40.00
128.794500	24.02	-22.2	46.22	Vertical	43.50
182.823500	20.15	-20.6	40.75	Vertical	43.50
319.496500	16.63	-15.4	32.03	Vertical	46.00
927.153000	19.06	-2.9	21.96	Vertical	46.00

For 802.11ac(VHT20) Channel No.:64

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.850000	20.20	-20.0	40.20	Vertical	40.00
69.333500	25.87	-21.9	47.77	Vertical	40.00
129.813000	23.48	-22.3	45.78	Vertical	43.50
181.708000	19.90	-20.8	40.70	Vertical	43.50
318.769000	16.59	-15.5	32.09	Vertical	46.00
890.293000	17.97	-3.5	21.47	Vertical	46.00

For 802.11n(HT40) Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.383500	20.03	-19.8	39.83	Vertical	40.00
69.285000	25.88	-21.9	47.78	Vertical	40.00
128.697500	24.01	-22.2	46.21	Vertical	43.50
183.939000	20.12	-20.5	40.62	Vertical	43.50
320.709000	16.09	-15.4	31.49	Vertical	46.00
936.319500	19.21	-2.8	22.01	Vertical	46.00

For 802.11ac(VHT40) Channel No.:54

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.533500	18.01	-21.1	39.11	Vertical	40.00
69.721500	25.86	-22.0	47.86	Vertical	40.00
128.794500	23.96	-22.2	46.16	Vertical	43.50
180.059000	19.03	-21.0	40.03	Vertical	43.50
318.672000	16.53	-15.5	32.03	Vertical	46.00
928.268500	19.02	-2.9	21.92	Vertical	46.00

For 802.11n(HT40) Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.141000	20.64	-19.9	40.54	Vertical	40.00
70.206500	25.81	-22.2	48.01	Vertical	40.00
128.600500	23.89	-22.2	46.09	Vertical	43.50
180.786500	20.12	-20.9	41.02	Vertical	43.50
320.466500	16.25	-15.4	31.65	Vertical	46.00
938.987000	19.11	-2.8	21.91	Vertical	46.00

For 802.11ac(VHT40) Channel No.:62

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.485000	18.09	-21.1	39.19	Vertical	40.00
70.643000	25.66	-22.3	47.96	Vertical	40.00
128.455000	23.71	-22.2	45.91	Vertical	43.50
182.193000	20.52	-20.7	41.22	Vertical	43.50
321.000000	15.83	-15.4	31.23	Vertical	46.00
934.428000	19.15	-2.8	21.95	Vertical	46.00

For 802.11ac(VHT80) Channel No.:58

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.383500	19.97	-19.8	39.77	Vertical	40.00
70.012500	25.75	-22.1	47.85	Vertical	40.00
129.085500	24.01	-22.3	46.31	Vertical	43.50
181.999000	20.21	-20.8	41.01	Vertical	43.50
320.272500	16.34	-15.4	31.74	Vertical	46.00
958.775000	19.10	-2.6	21.70	Vertical	46.00

For 802.11a Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
36.208000	18.91	-19.6	38.51	Vertical	40.00
69.770000	25.83	-22.0	47.83	Vertical	40.00
129.473500	23.72	-22.3	46.02	Vertical	43.50
182.872000	20.32	-20.6	40.92	Vertical	43.50
319.836000	16.60	-15.4	32.00	Vertical	46.00
939.423500	19.22	-2.8	22.02	Vertical	46.00

For 802.11n(HT20) Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
36.499000	18.72	-19.5	38.22	Vertical	40.00
69.527500	25.89	-22.0	47.89	Vertical	40.00
128.940000	23.90	-22.2	46.10	Vertical	43.50
184.521000	19.97	-20.4	40.37	Vertical	43.50
319.545000	16.66	-15.4	32.06	Vertical	46.00
956.932000	19.27	-2.6	21.87	Vertical	46.00

For 802.11ac(VHT20) Channel No.:100

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.000000	18.26	-21.3	39.56	Vertical	40.00
69.673000	25.84	-22.0	47.84	Vertical	40.00
128.843000	23.89	-22.2	46.09	Vertical	43.50
184.230000	20.08	-20.4	40.48	Vertical	43.50
320.806000	16.34	-15.4	31.74	Vertical	46.00
945.292000	19.13	-2.8	21.93	Vertical	46.00

For 802.11a Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.704500	20.00	-20.0	40.00	Vertical	40.00
69.285000	25.77	-21.9	47.67	Vertical	40.00
129.376500	23.81	-22.3	46.11	Vertical	43.50
180.447000	19.67	-21.0	40.67	Vertical	43.50
319.690500	16.65	-15.4	32.05	Vertical	46.00
885.394500	17.85	-3.5	21.35	Vertical	46.00

For 802.11n(HT20) Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.286500	20.23	-19.8	40.03	Vertical	40.00
70.497500	25.63	-22.2	47.83	Vertical	40.00
129.231000	23.93	-22.3	46.23	Vertical	43.50
182.338500	20.51	-20.7	41.21	Vertical	43.50
319.593500	16.64	-15.4	32.04	Vertical	46.00
949.560000	19.12	-2.7	21.82	Vertical	46.00

For 802.11ac(VHT20) Channel No.:120

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.917000	19.01	-19.7	38.71	Vertical	40.00
69.527500	25.89	-22.0	47.89	Vertical	40.00
128.940000	23.90	-22.2	46.10	Vertical	43.50
182.241500	20.25	-20.7	40.95	Vertical	43.50
319.205500	16.65	-15.5	32.15	Vertical	46.00
925.213000	18.95	-3.0	21.95	Vertical	46.00

For 802.11a Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.753000	19.89	-20.0	39.89	Vertical	40.00
69.624500	25.83	-22.0	47.83	Vertical	40.00
128.649000	23.56	-22.2	45.76	Vertical	43.50
180.253000	18.90	-21.0	39.90	Vertical	43.50
319.739000	16.66	-15.4	32.06	Vertical	46.00
937.920000	19.05	-2.8	21.85	Vertical	46.00

For 802.11n(HT20) Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.044000	20.36	-19.9	40.26	Vertical	40.00
69.576000	25.78	-22.0	47.78	Vertical	40.00
129.037000	23.82	-22.2	46.02	Vertical	43.50
179.089000	18.07	-21.1	39.17	Vertical	43.50
318.138500	15.95	-15.5	31.45	Vertical	46.00
933.506500	19.05	-2.9	21.95	Vertical	46.00

For 802.11ac(VHT20) Channel No.:144

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.753000	19.84	-20.0	39.84	Vertical	40.00
70.012500	25.63	-22.1	47.73	Vertical	40.00
129.376500	23.76	-22.3	46.06	Vertical	43.50
182.726500	20.42	-20.6	41.02	Vertical	43.50
319.496500	16.66	-15.4	32.06	Vertical	46.00
887.334500	17.94	-3.5	21.44	Vertical	46.00

For 802.11n(HT40) Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.263500	16.55	-18.7	35.25	Vertical	40.00
69.770000	25.80	-22.0	47.80	Vertical	40.00
129.279500	23.84	-22.3	46.14	Vertical	43.50
182.823500	20.51	-20.6	41.11	Vertical	43.50
319.060000	16.57	-15.5	32.07	Vertical	46.00
915.852500	18.67	-3.0	21.67	Vertical	46.00

For 802.11ac(VHT40) Channel No.:102

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.044000	20.20	-19.9	40.10	Vertical	40.00
69.721500	25.78	-22.0	47.78	Vertical	40.00
128.697500	23.53	-22.2	45.73	Vertical	43.50
182.435500	20.30	-20.7	41.00	Vertical	43.50
319.642000	16.68	-15.4	32.08	Vertical	46.00
918.908000	18.70	-3.0	21.70	Vertical	46.00

For 802.11n(HT40) Channel No.:118

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
38.924000	16.62	-18.8	35.42	Vertical	40.00
69.818500	25.75	-22.0	47.75	Vertical	40.00
129.085500	23.80	-22.3	46.10	Vertical	43.50
181.077500	19.98	-20.9	40.88	Vertical	43.50
320.757500	16.26	-15.4	31.66	Vertical	46.00
939.423500	19.19	-2.8	21.99	Vertical	46.00

For 802.11ac(VHT40) Channel No.:118

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.704500	20.17	-20.0	40.17	Vertical	40.00
69.236500	25.58	-21.9	47.48	Vertical	40.00
127.727500	23.14	-22.1	45.24	Vertical	43.50
182.241500	20.00	-20.7	40.70	Vertical	43.50
318.817500	16.47	-15.5	31.97	Vertical	46.00
916.628500	18.72	-3.0	21.72	Vertical	46.00

For 802.11n(HT40) Channel No.:142

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.771500	18.78	-19.7	38.48	Vertical	40.00
69.721500	25.86	-22.0	47.86	Vertical	40.00
128.600500	23.36	-22.2	45.56	Vertical	43.50
184.230000	19.75	-20.4	40.15	Vertical	43.50
319.302500	16.69	-15.4	32.09	Vertical	46.00
941.412000	19.13	-2.8	21.93	Vertical	46.00

For 802.11ac(VHT40) Channel No.:142

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.991000	16.07	-18.5	34.57	Vertical	40.00
69.430500	25.77	-21.9	47.67	Vertical	40.00
129.376500	23.80	-22.3	46.10	Vertical	43.50
183.114500	20.39	-20.6	40.99	Vertical	43.50
319.690500	16.71	-15.4	32.11	Vertical	46.00
912.457500	18.65	-3.1	21.75	Vertical	46.00

For 802.11ac(VHT80) Channel No.:106

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.189500	20.36	-19.9	40.26	Vertical	40.00
69.236500	25.60	-21.9	47.50	Vertical	40.00
129.037000	23.80	-22.2	46.00	Vertical	43.50
180.932000	20.02	-20.9	40.92	Vertical	43.50
319.545000	16.68	-15.4	32.08	Vertical	46.00
901.157000	18.22	-3.2	21.42	Vertical	46.00

For 802.11ac(VHT80) Channel No.:122

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
41.252000	14.89	-18.4	33.29	Vertical	40.00
70.303500	25.63	-22.2	47.83	Vertical	40.00
129.328000	23.88	-22.3	46.18	Vertical	43.50
180.883500	20.08	-20.9	40.98	Vertical	43.50
319.690500	16.64	-15.4	32.04	Vertical	46.00
936.125500	19.11	-2.8	21.91	Vertical	46.00

For 802.11ac(VHT80) Channel No.:138

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.480500	19.45	-19.8	39.25	Vertical	40.00
69.673000	25.84	-22.0	47.84	Vertical	40.00
129.182500	23.78	-22.3	46.08	Vertical	43.50
182.096000	19.52	-20.7	40.22	Vertical	43.50
319.739000	16.65	-15.4	32.05	Vertical	46.00
946.116500	19.09	-2.8	21.89	Vertical	46.00

For 802.11a Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.238000	20.06	-19.9	39.96	Vertical	40.00
70.109500	25.64	-22.1	47.74	Vertical	40.00
129.425000	23.69	-22.3	45.99	Vertical	43.50
183.648000	19.93	-20.5	40.43	Vertical	43.50
320.563500	16.35	-15.4	31.75	Vertical	46.00
920.945000	18.76	-3.0	21.76	Vertical	46.00

For 802.11n(HT20) Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
30.145500	18.30	-21.2	39.50	Vertical	40.00
69.673000	25.86	-22.0	47.86	Vertical	40.00
128.891500	23.50	-22.2	45.70	Vertical	43.50
181.029000	19.99	-20.9	40.89	Vertical	43.50
318.623500	16.34	-15.5	31.84	Vertical	46.00
913.912500	18.75	-3.1	21.85	Vertical	46.00

For 802.11ac(VHT20) Channel No.:149

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.529000	19.61	-19.8	39.41	Vertical	40.00
69.818500	25.85	-22.0	47.85	Vertical	40.00
129.134000	23.80	-22.3	46.10	Vertical	43.50
183.696500	19.85	-20.5	40.35	Vertical	43.50
318.284000	16.30	-15.5	31.80	Vertical	46.00
939.472000	19.12	-2.8	21.92	Vertical	46.00

For 802.11a Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.995500	20.20	-19.9	40.10	Vertical	40.00
70.594500	25.37	-22.2	47.57	Vertical	40.00
129.619000	23.67	-22.3	45.97	Vertical	43.50
180.204500	18.53	-21.0	39.53	Vertical	43.50
319.642000	16.68	-15.4	32.08	Vertical	46.00
932.973000	19.06	-2.9	21.96	Vertical	46.00

For 802.11n(HT20) Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.704500	20.48	-20.0	40.48	Vertical	40.00
70.303500	25.54	-22.2	47.74	Vertical	40.00
129.231000	23.79	-22.3	46.09	Vertical	43.50
183.017500	20.52	-20.6	41.12	Vertical	43.50
319.157000	16.52	-15.5	32.02	Vertical	46.00
933.700500	19.13	-2.9	22.03	Vertical	46.00

For 802.11ac(VHT20) Channel No.:157

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
40.136500	14.83	-18.5	33.33	Vertical	40.00
69.964000	25.76	-22.1	47.86	Vertical	40.00
129.570500	23.69	-22.3	45.99	Vertical	43.50
183.405500	20.44	-20.5	40.94	Vertical	43.50
320.709000	16.18	-15.4	31.58	Vertical	46.00
921.042000	18.78	-3.0	21.78	Vertical	46.00

For 802.11a Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.286500	19.89	-19.8	39.69	Vertical	40.00
70.497500	25.44	-22.2	47.64	Vertical	40.00
129.182500	23.77	-22.3	46.07	Vertical	43.50
180.738000	19.50	-20.9	40.40	Vertical	43.50
319.157000	16.50	-15.5	32.00	Vertical	46.00
928.559500	19.00	-2.9	21.90	Vertical	46.00

For 802.11n(HT20) Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.577500	19.27	-19.8	39.07	Vertical	40.00
69.624500	25.88	-22.0	47.88	Vertical	40.00
128.891500	23.56	-22.2	45.76	Vertical	43.50
181.514000	20.33	-20.8	41.13	Vertical	43.50
319.011500	16.50	-15.5	32.00	Vertical	46.00
959.696500	19.20	-2.6	21.80	Vertical	46.00

For 802.11ac(VHT20) Channel No.:165

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
35.383500	19.72	-19.8	39.52	Vertical	40.00
70.012500	25.76	-22.1	47.86	Vertical	40.00
127.630500	23.16	-22.1	45.26	Vertical	43.50
180.786500	19.62	-20.9	40.52	Vertical	43.50
318.914500	16.41	-15.5	31.91	Vertical	46.00
913.185000	18.67	-3.1	21.77	Vertical	46.00

For 802.11n(HT40) Channel No.:151

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.704500	19.44	-20.0	39.44	Vertical	40.00
70.158000	25.67	-22.1	47.77	Vertical	40.00
129.813000	23.55	-22.3	45.85	Vertical	43.50
184.763500	19.72	-20.3	40.02	Vertical	43.50
319.545000	16.63	-15.4	32.03	Vertical	46.00
933.458000	19.13	-2.9	22.03	Vertical	46.00

For 802.11ac(VHT40) Channel No.:151

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.559000	19.00	-20.0	39.00	Vertical	40.00
69.576000	25.89	-22.0	47.89	Vertical	40.00
129.037000	23.68	-22.2	45.88	Vertical	43.50
181.999000	19.89	-20.8	40.69	Vertical	43.50
320.127000	16.44	-15.4	31.84	Vertical	46.00
948.250500	19.08	-2.8	21.88	Vertical	46.00

For 802.11n(HT40) Channel No.:159

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.704500	19.28	-20.0	39.28	Vertical	40.00
70.449000	25.52	-22.2	47.72	Vertical	40.00
129.279500	23.76	-22.3	46.06	Vertical	43.50
183.260000	20.45	-20.6	41.05	Vertical	43.50
319.981500	16.54	-15.4	31.94	Vertical	46.00
958.047500	19.20	-2.6	21.80	Vertical	46.00

For 802.11ac(VHT40) Channel No.:159

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
39.797000	16.99	-18.6	35.59	Vertical	40.00
69.867000	25.90	-22.1	48.00	Vertical	40.00
127.776000	23.20	-22.1	45.30	Vertical	43.50
184.036000	19.52	-20.4	39.92	Vertical	43.50
319.545000	16.63	-15.4	32.03	Vertical	46.00
933.021500	19.09	-2.9	21.99	Vertical	46.00

For 802.11ac(VHT80) Channel No.:155

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
34.947000	19.83	-19.9	39.73	Vertical	40.00
69.576000	25.86	-22.0	47.86	Vertical	40.00
129.619000	23.68	-22.3	45.98	Vertical	43.50
183.745000	20.05	-20.5	40.55	Vertical	43.50
320.612000	16.30	-15.4	31.70	Vertical	46.00
933.749000	19.07	-2.9	21.97	Vertical	46.00

Carrier frequency (MHz): 5180
Channel No.:36

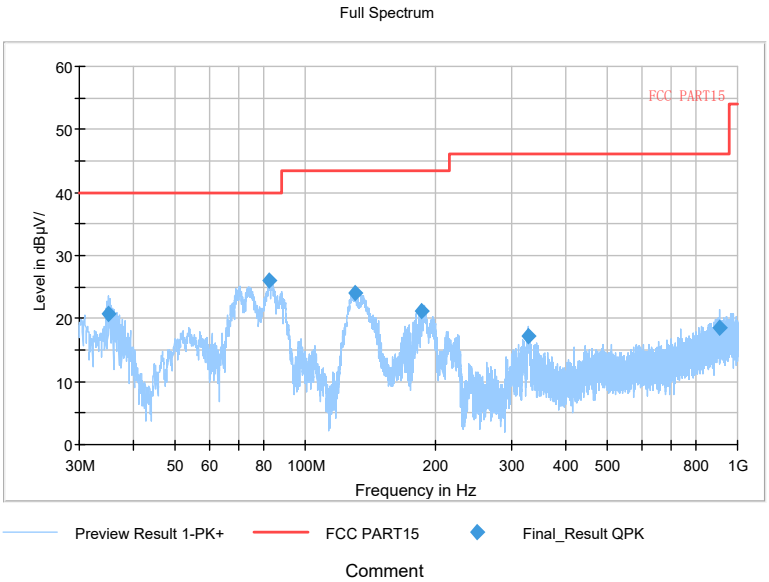

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

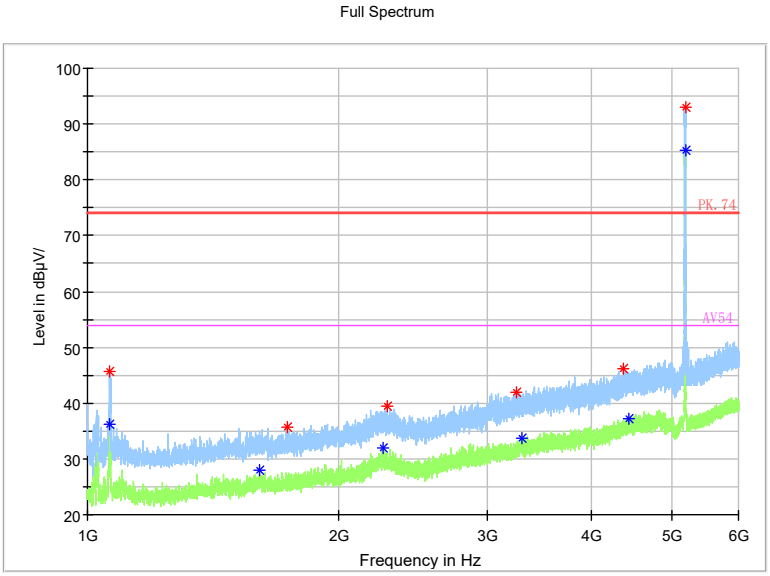

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

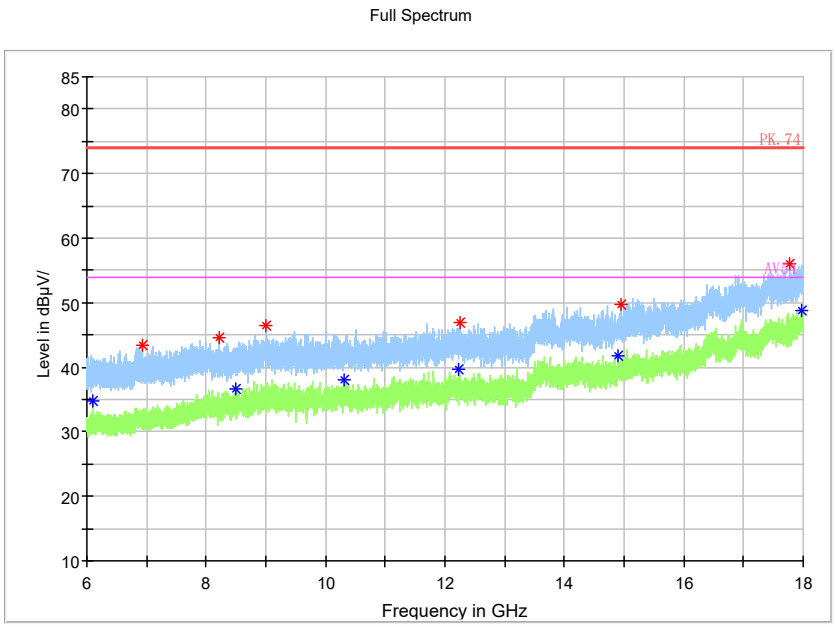

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

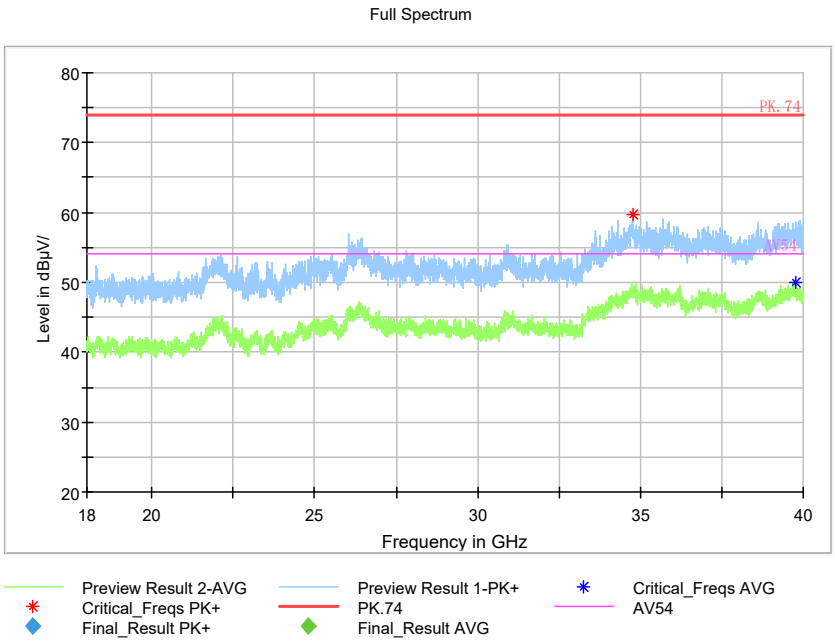

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

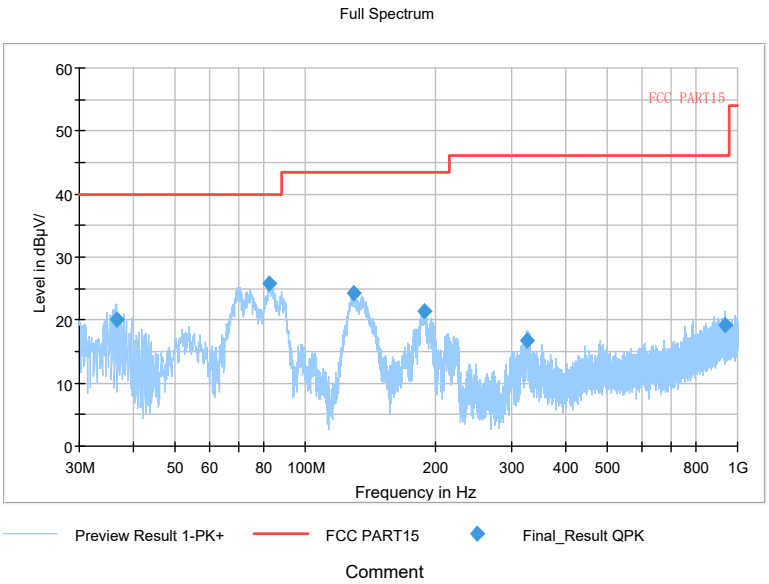

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

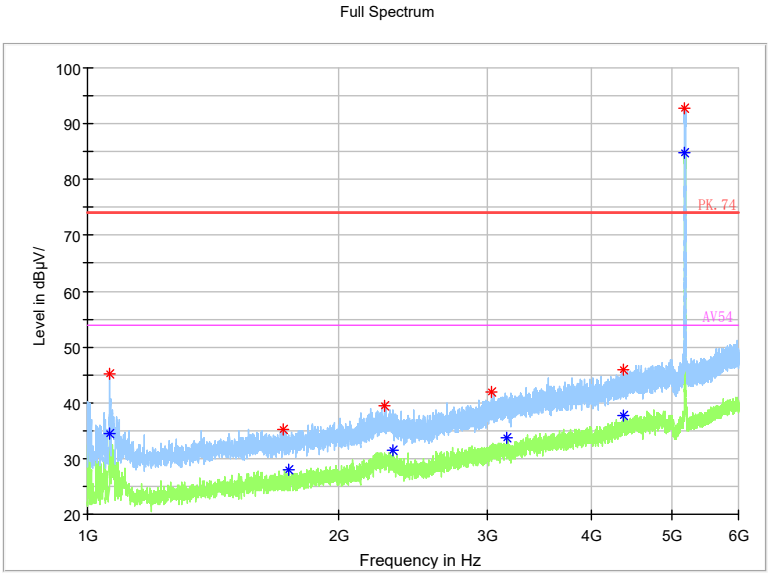

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

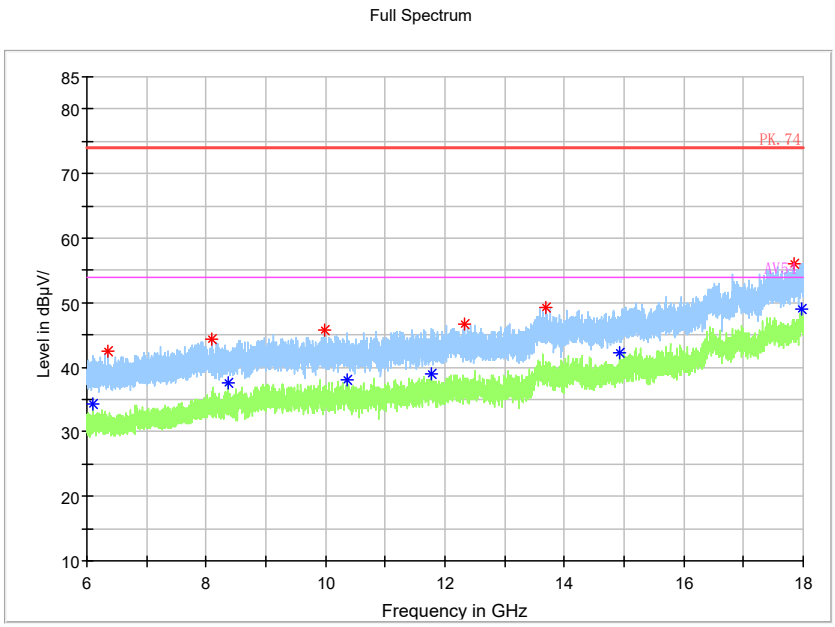

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

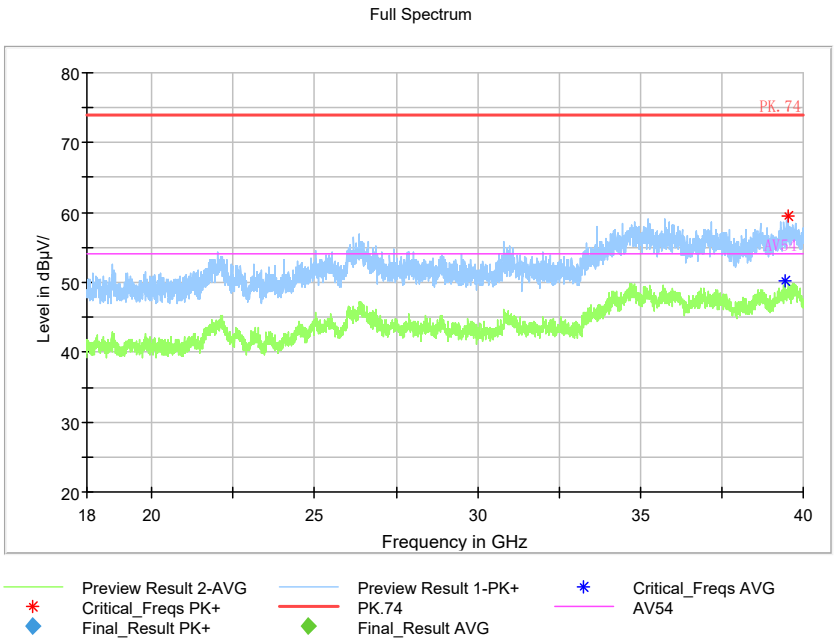

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

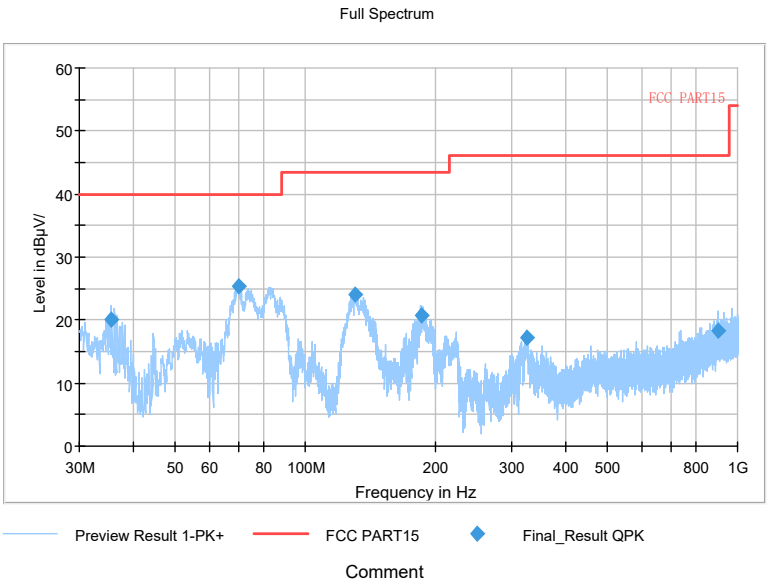

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

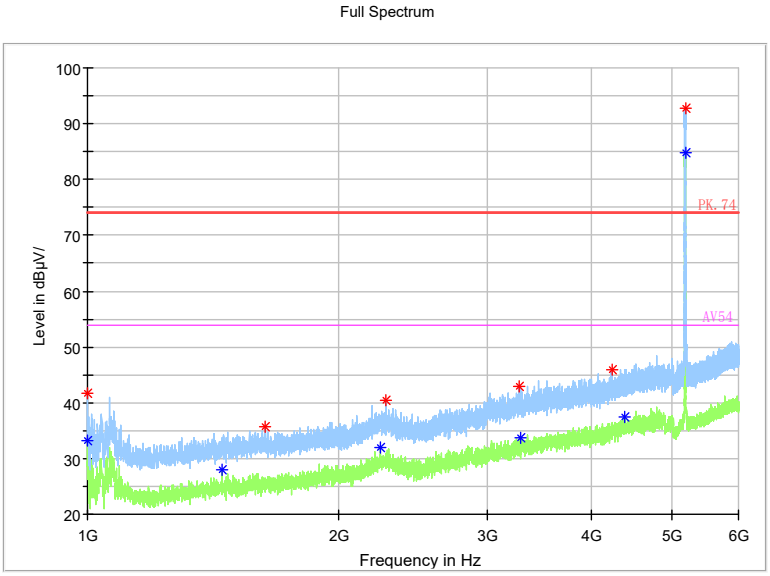

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

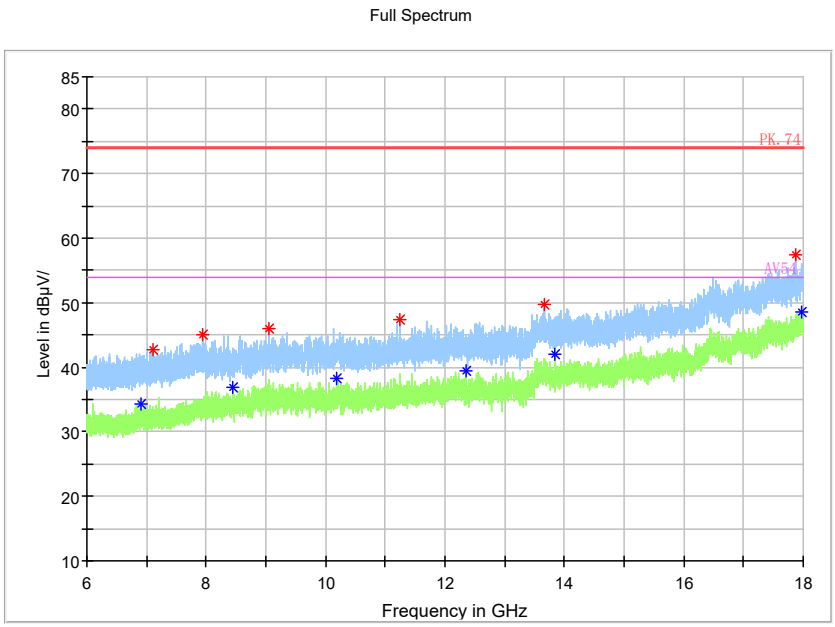

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

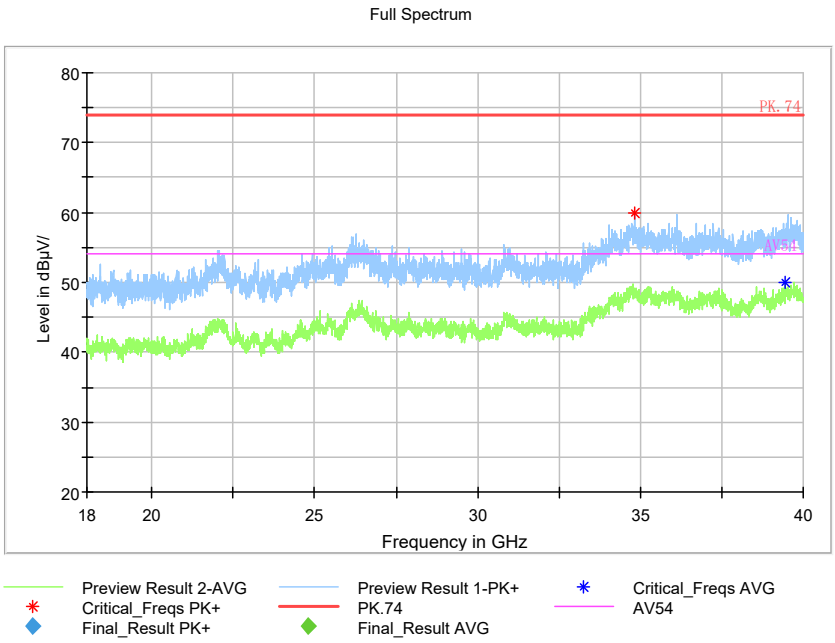

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5200

Channel No.:40

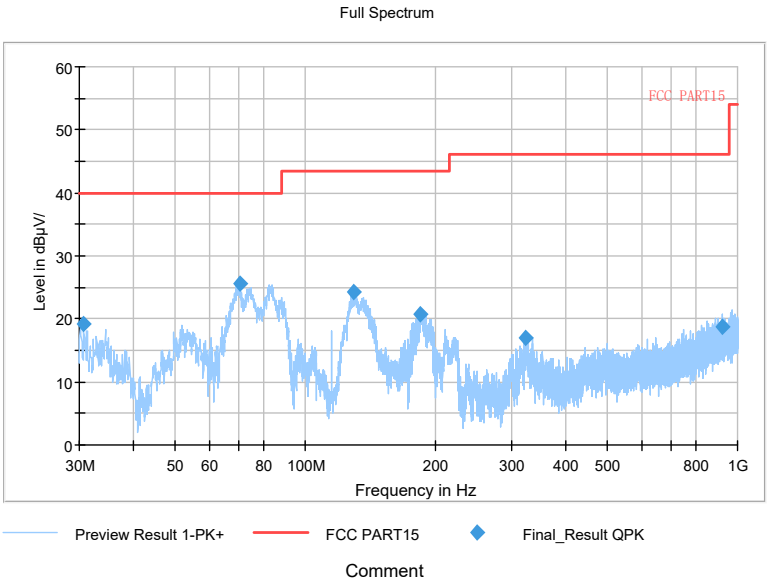

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

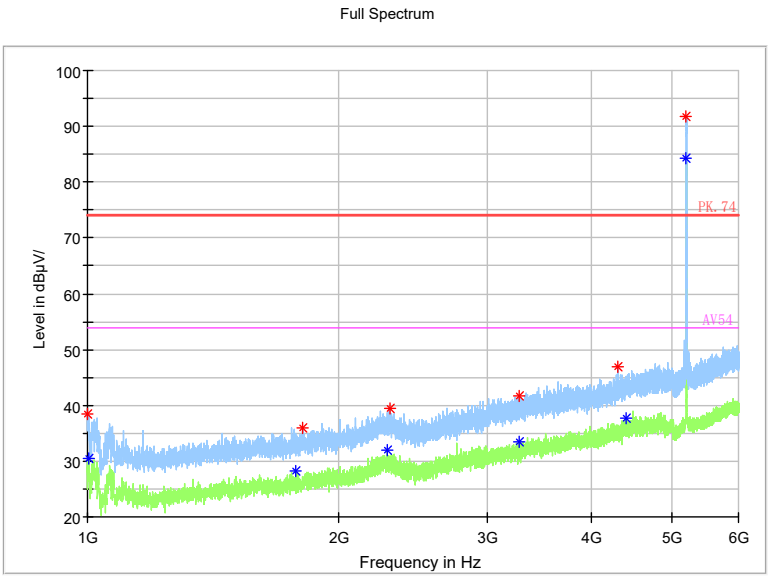

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

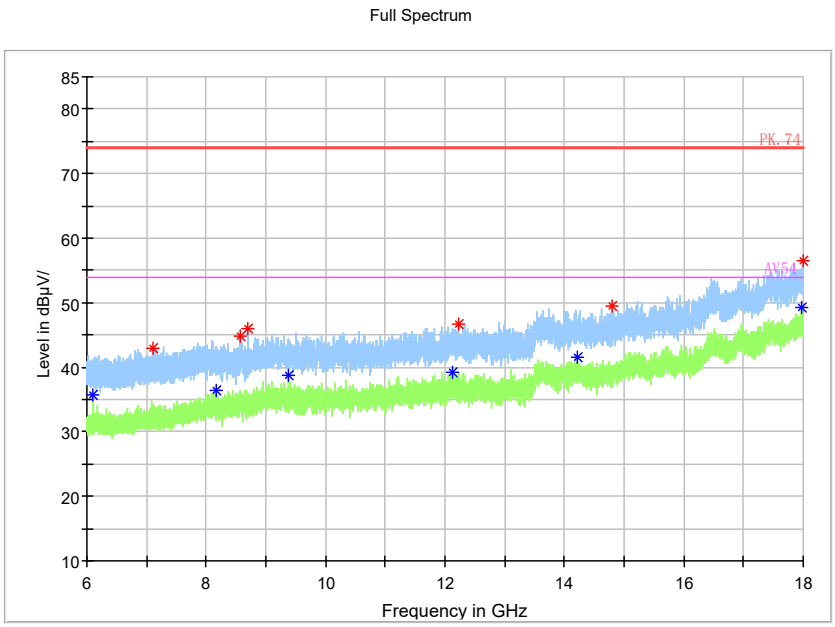

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

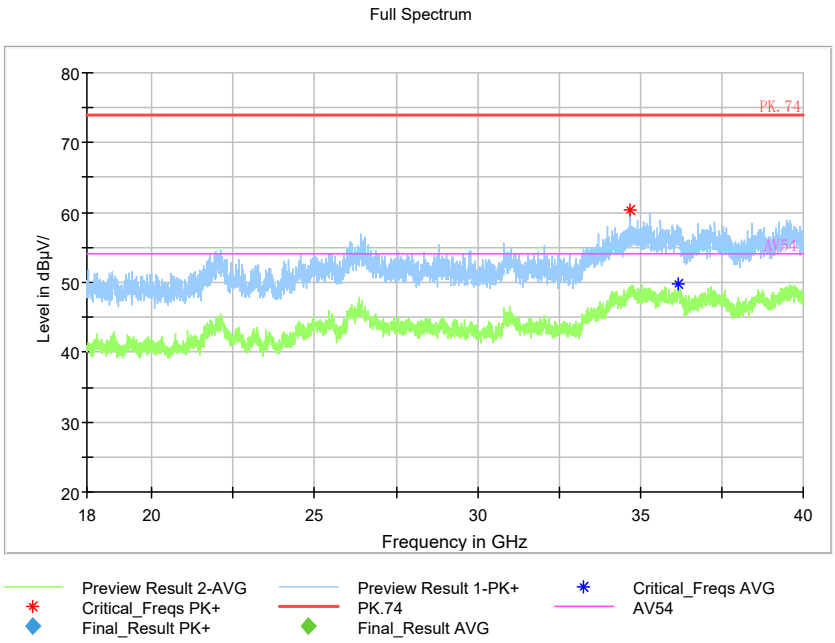

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

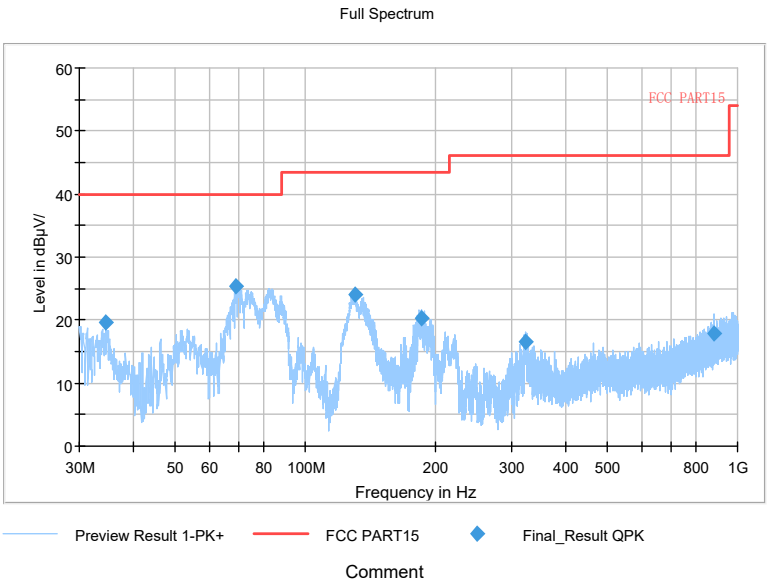

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

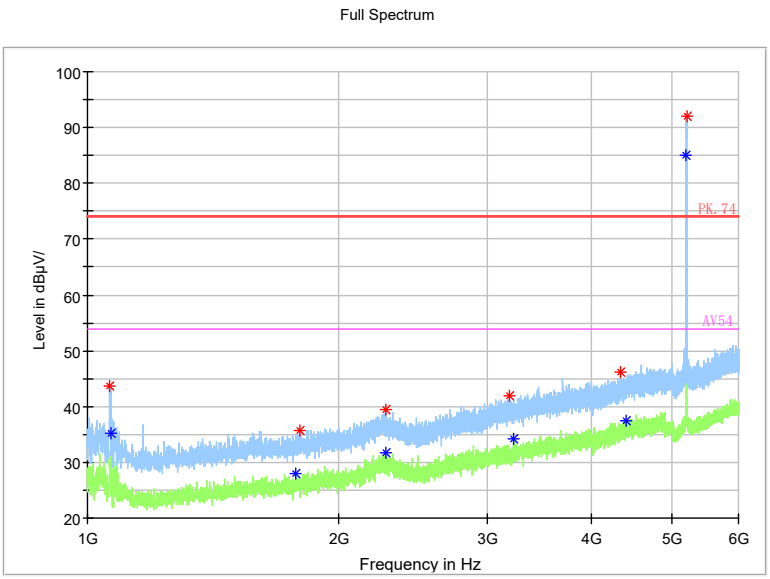

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

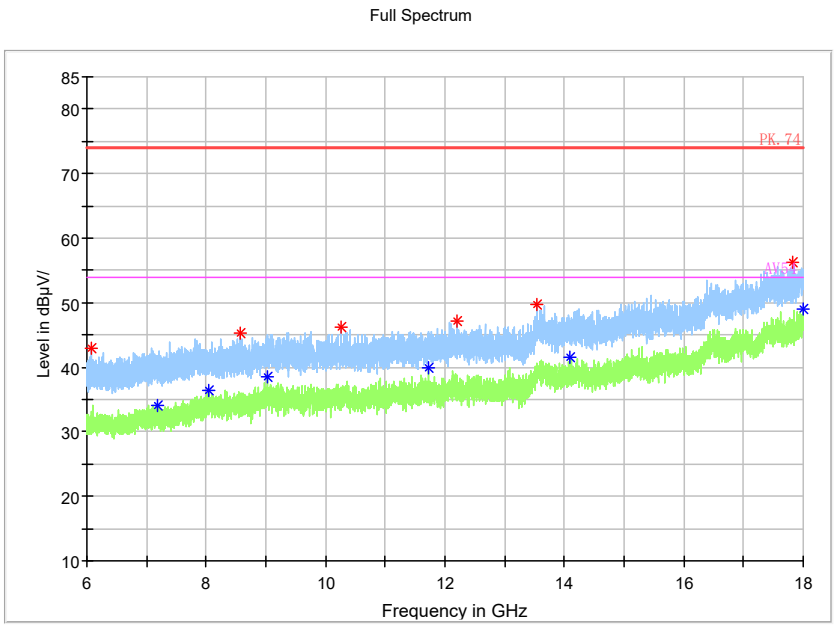

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

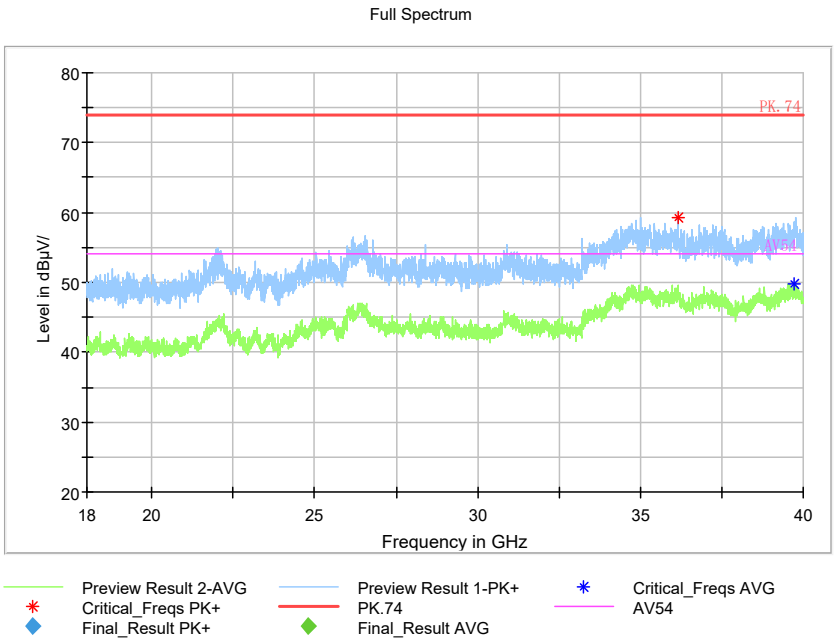

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

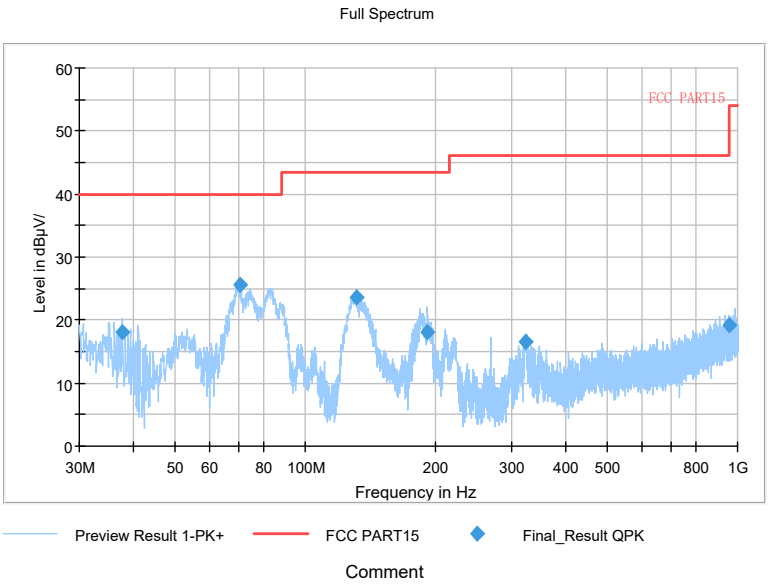

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

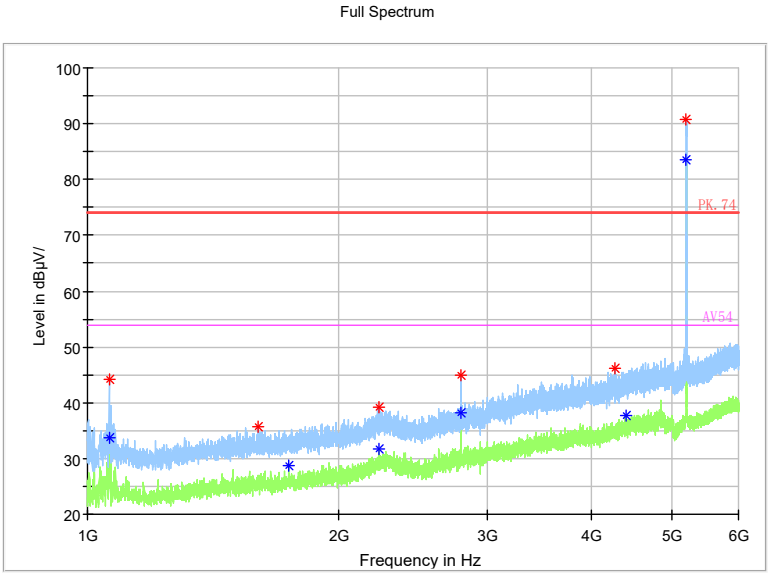

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

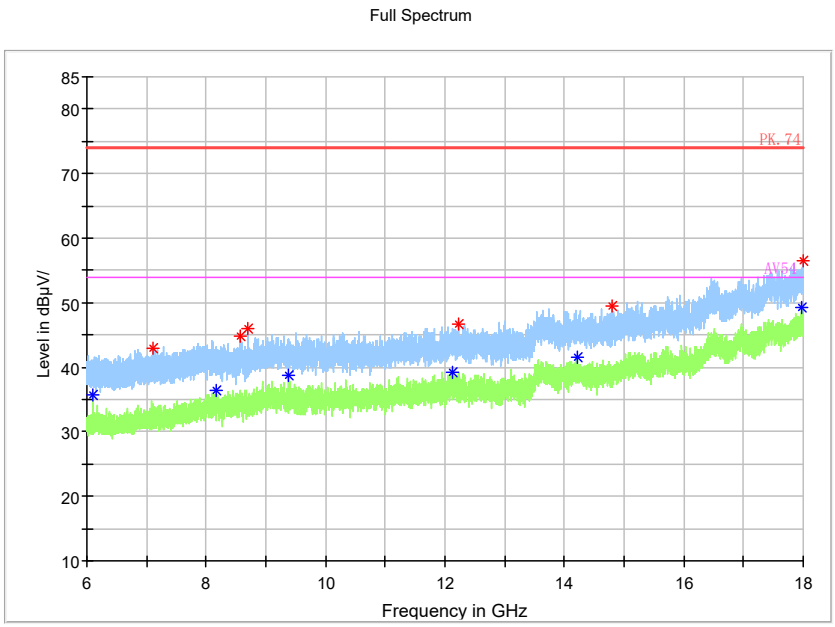

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

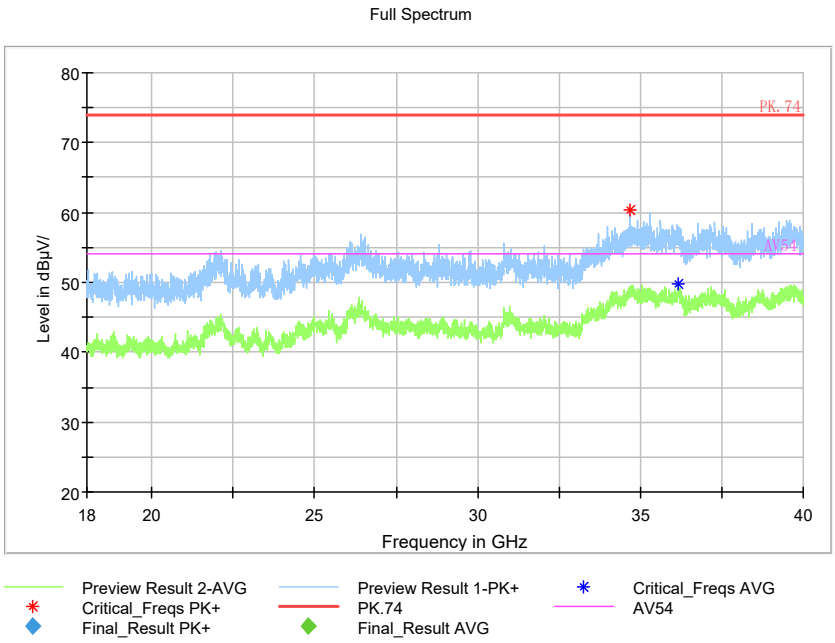

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5240

Channel No.:48

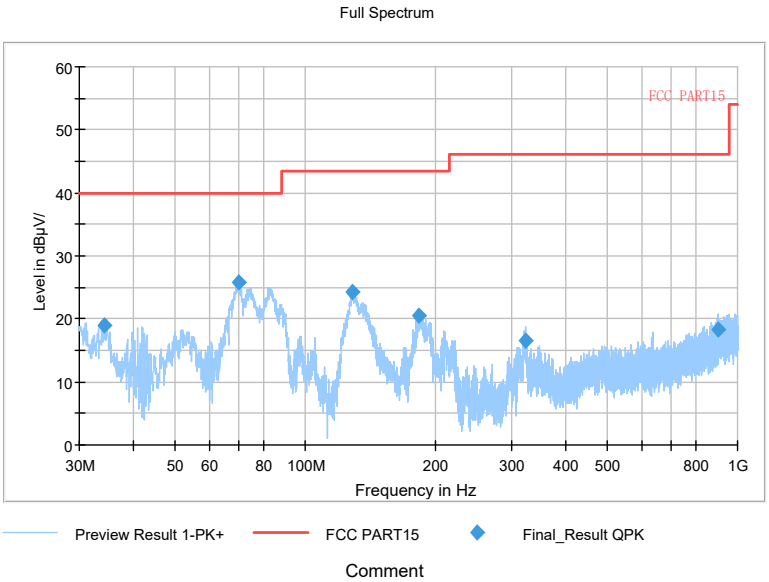

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

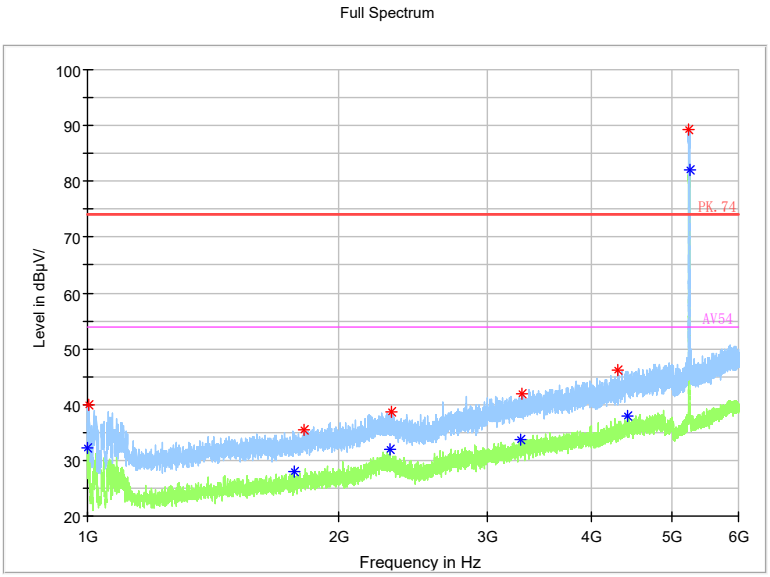

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

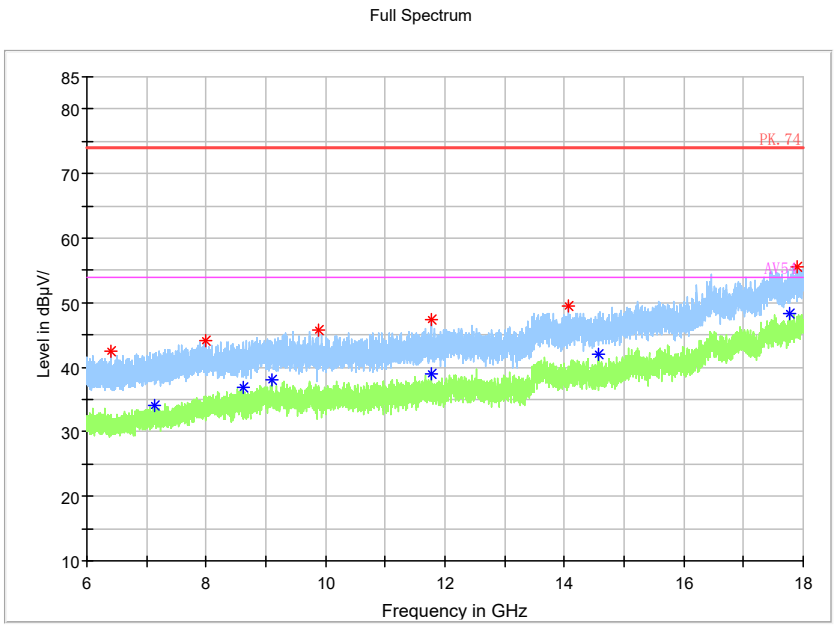

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

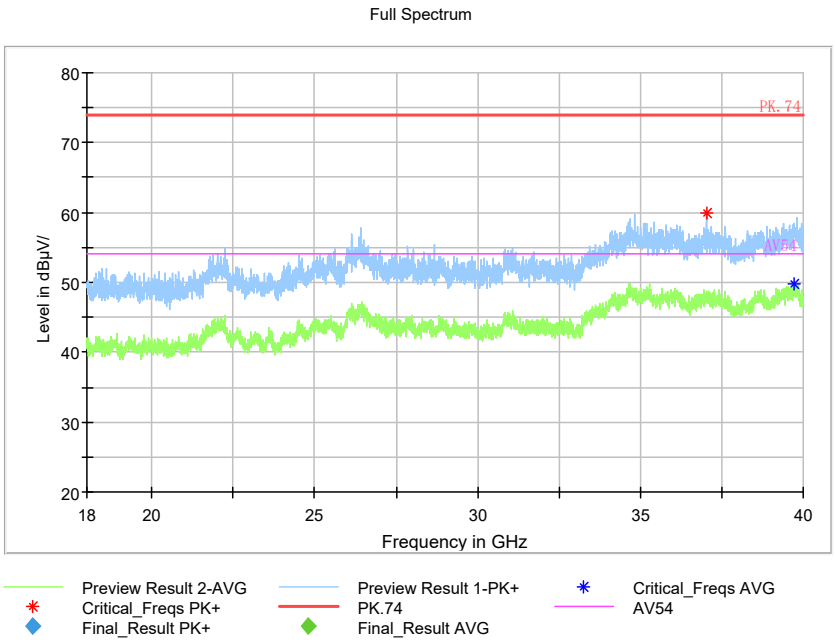

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

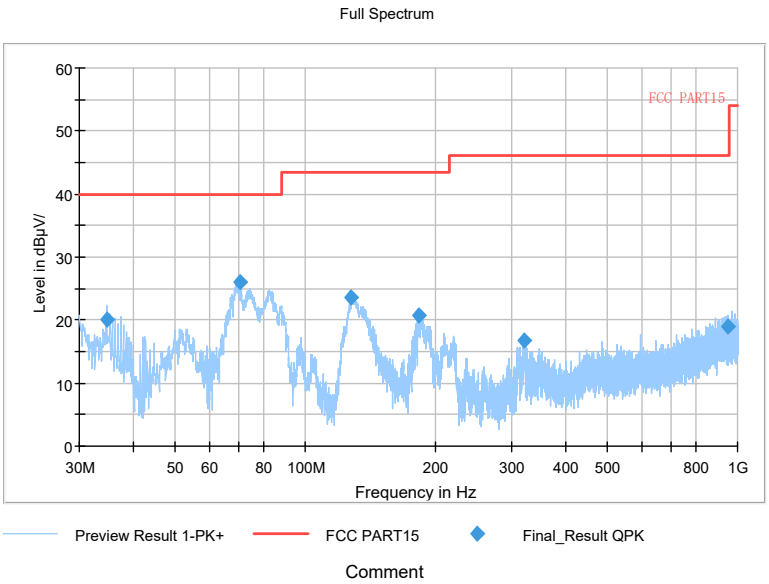

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

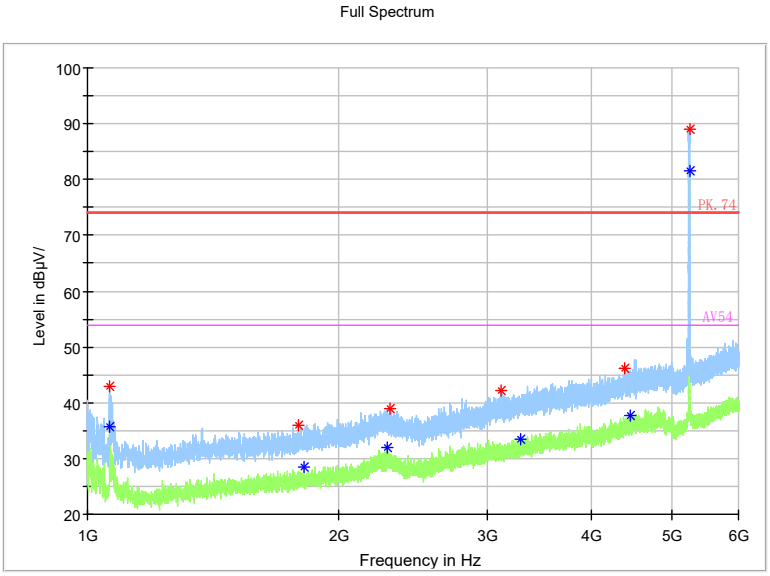

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

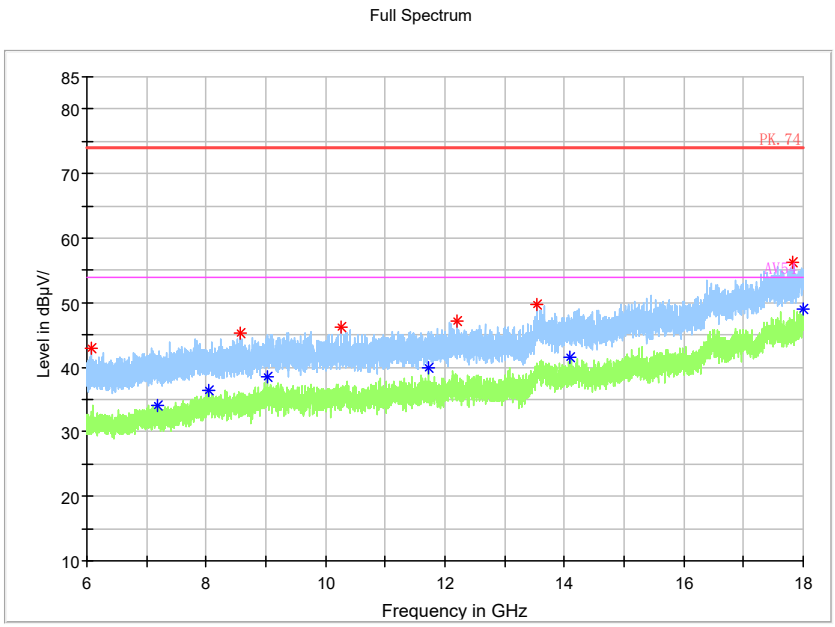

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

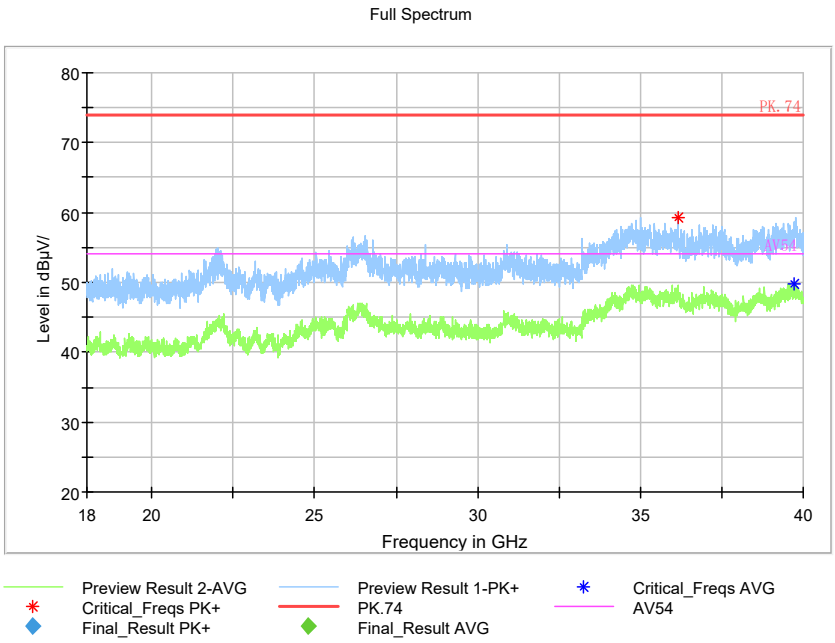

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

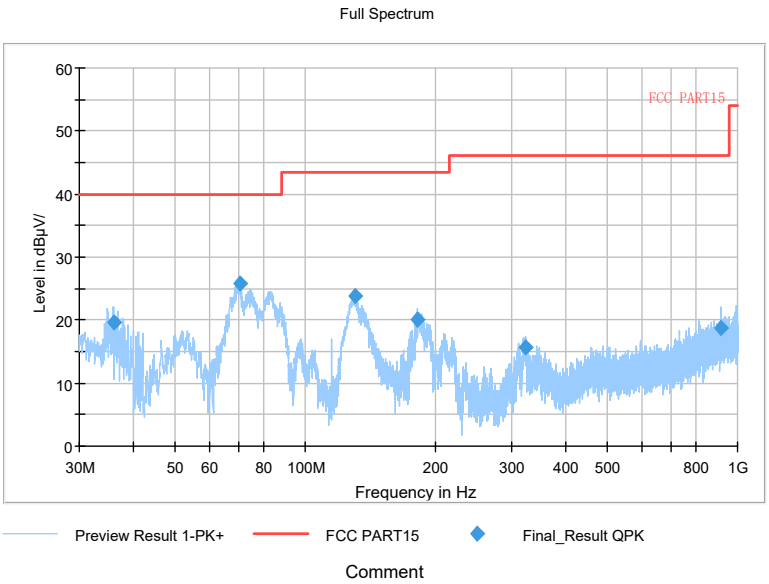

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

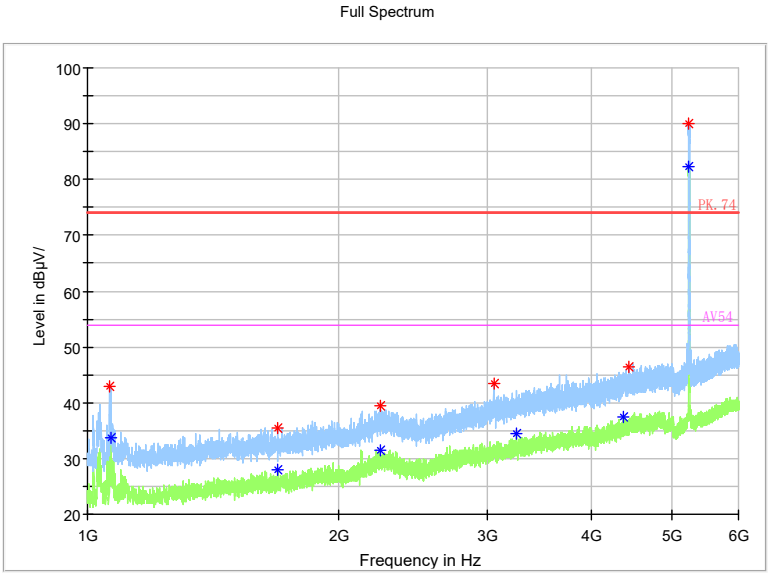

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

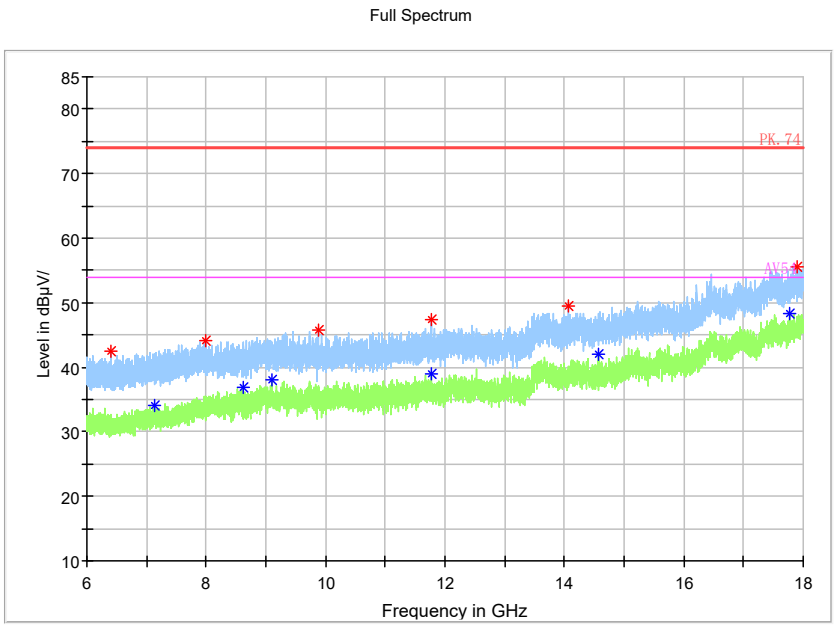

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

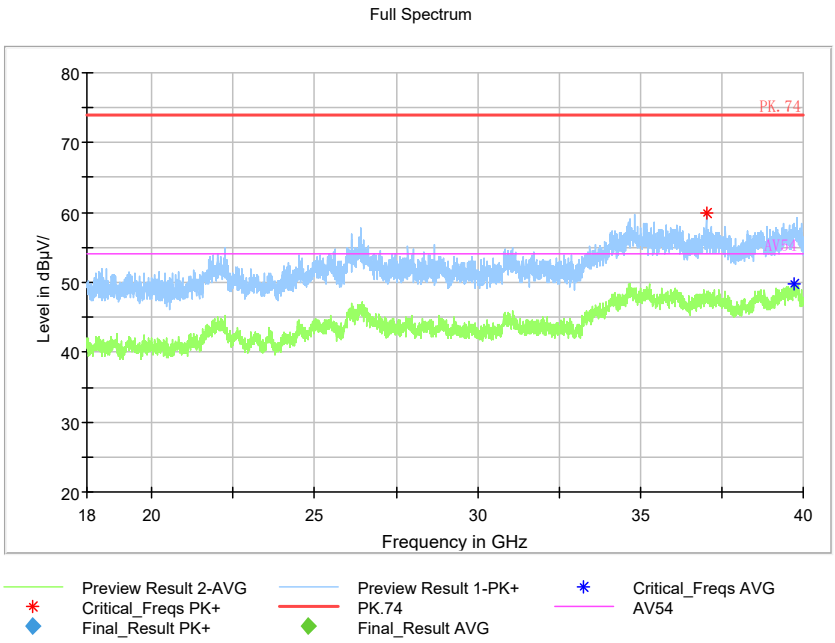

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5190
Channel No.:38

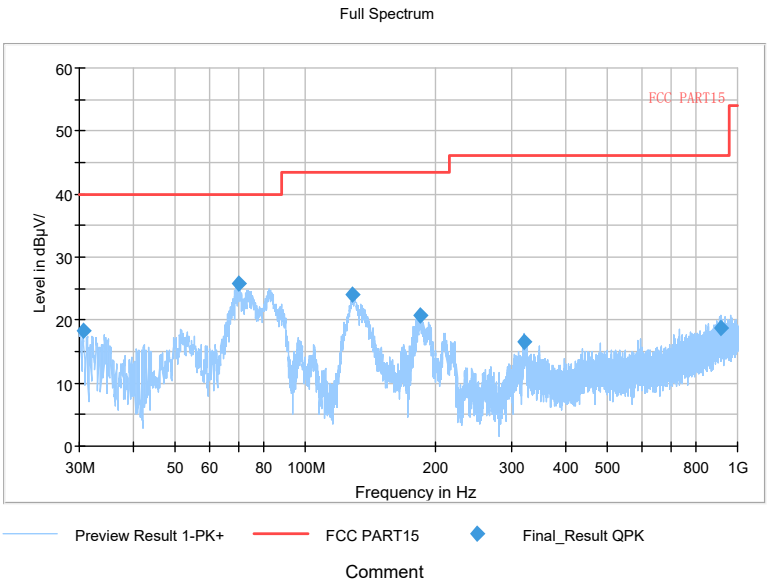

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)

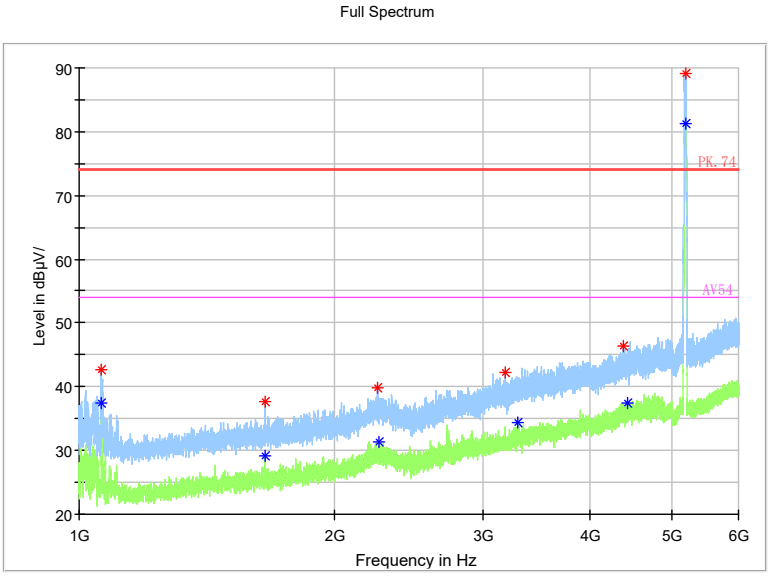

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

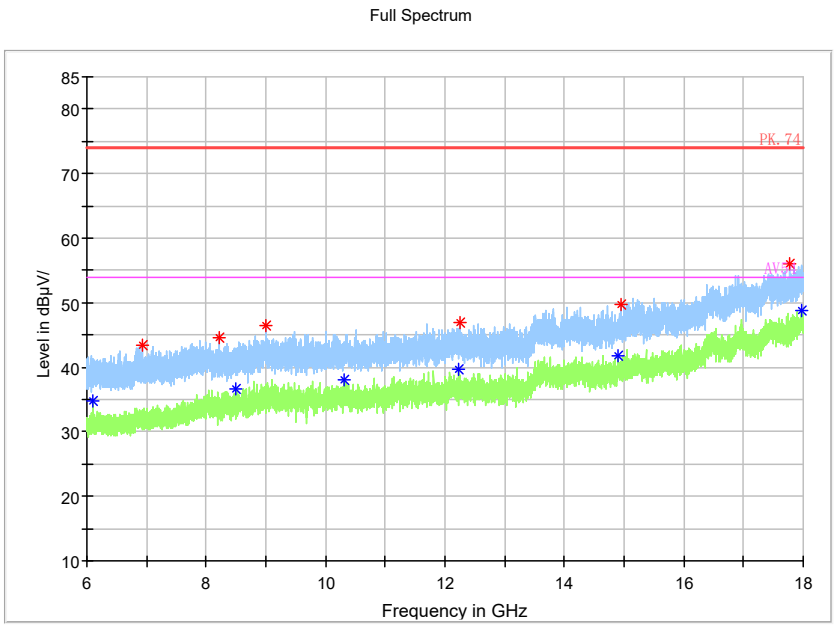

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

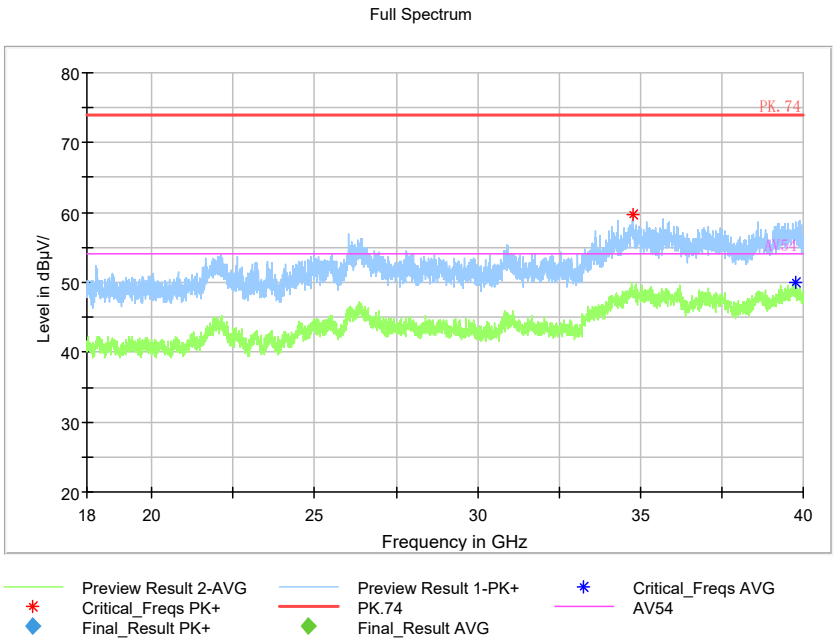

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

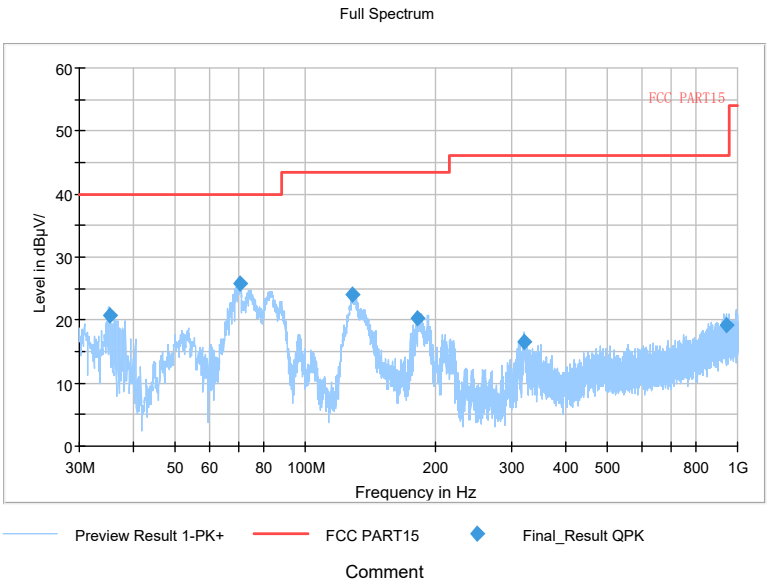

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT40)

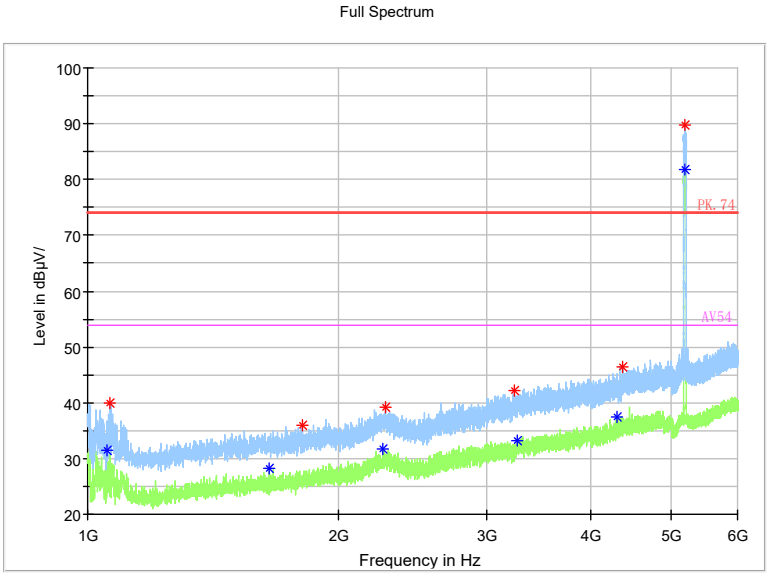

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

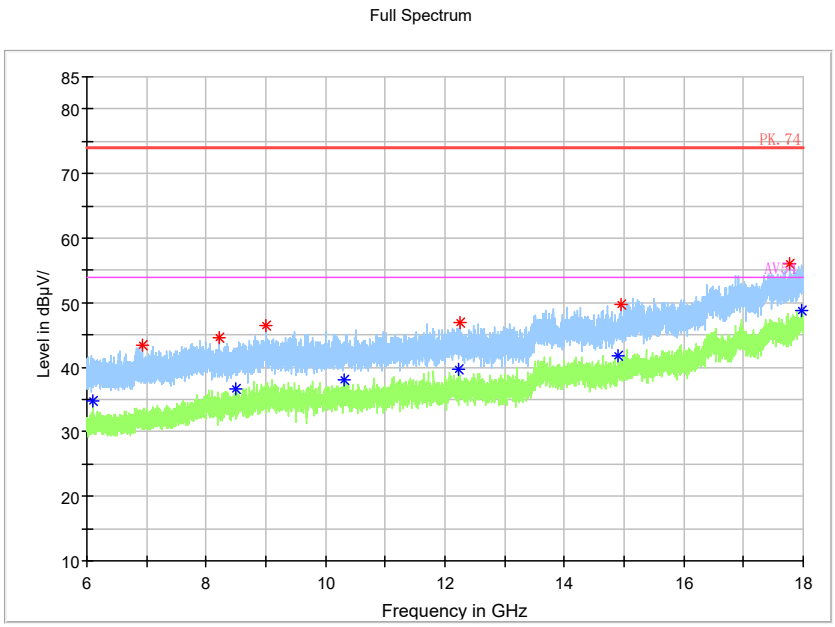

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

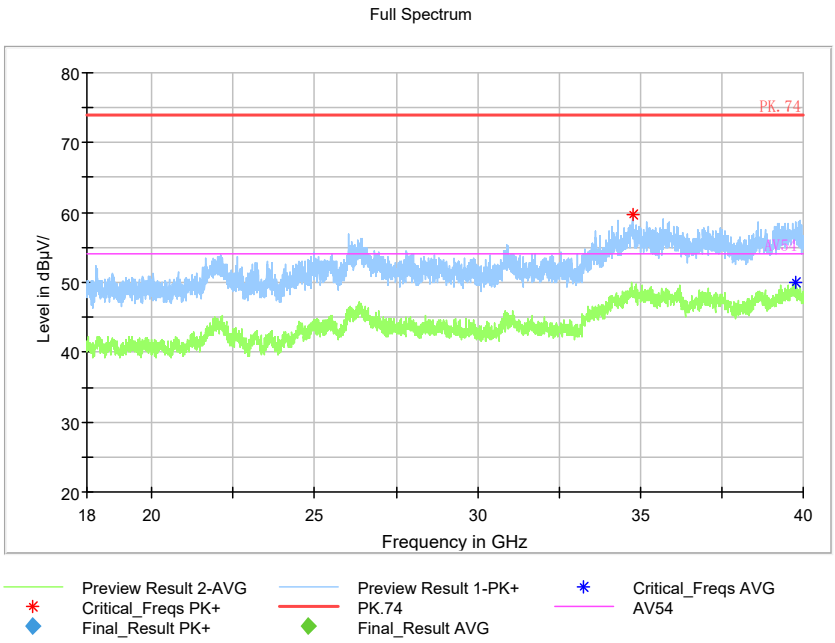

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

Carrier frequency (MHz): 5230
Channel No.:46

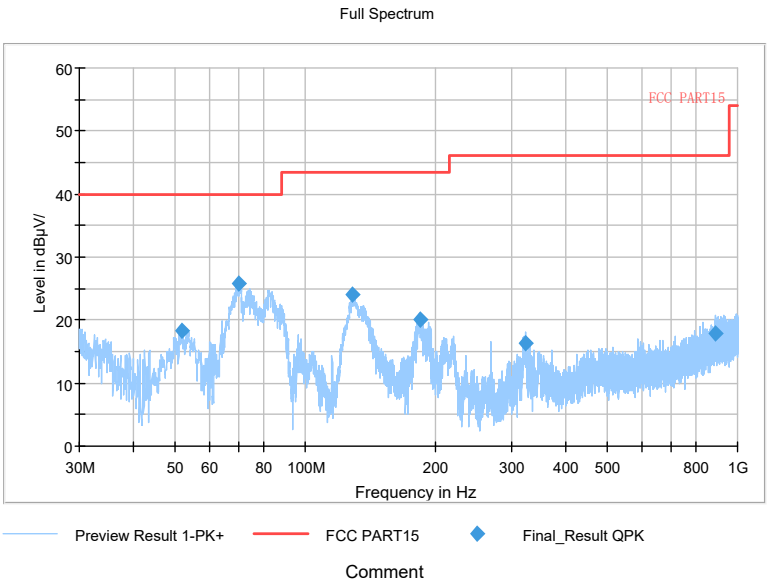

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)

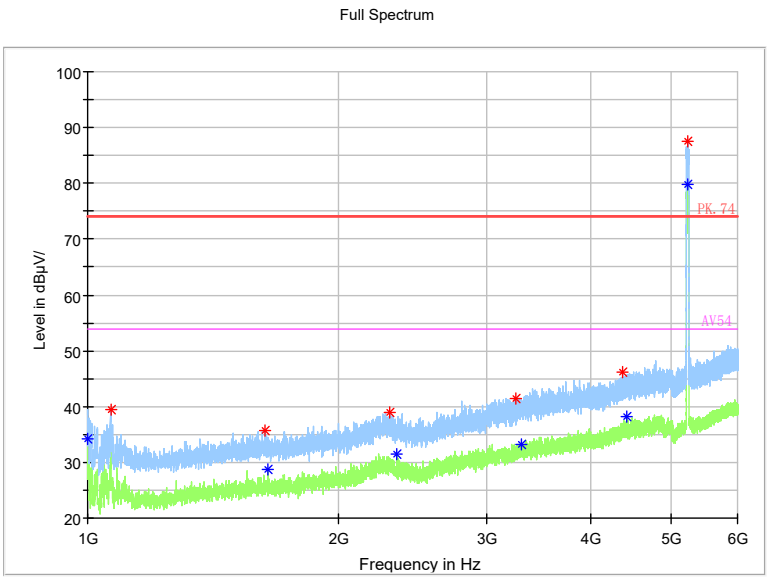

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

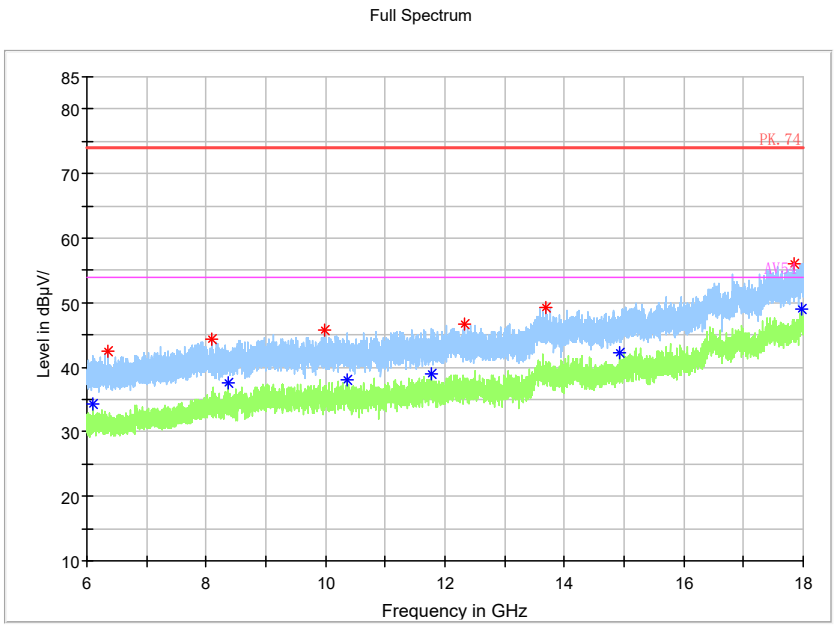

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

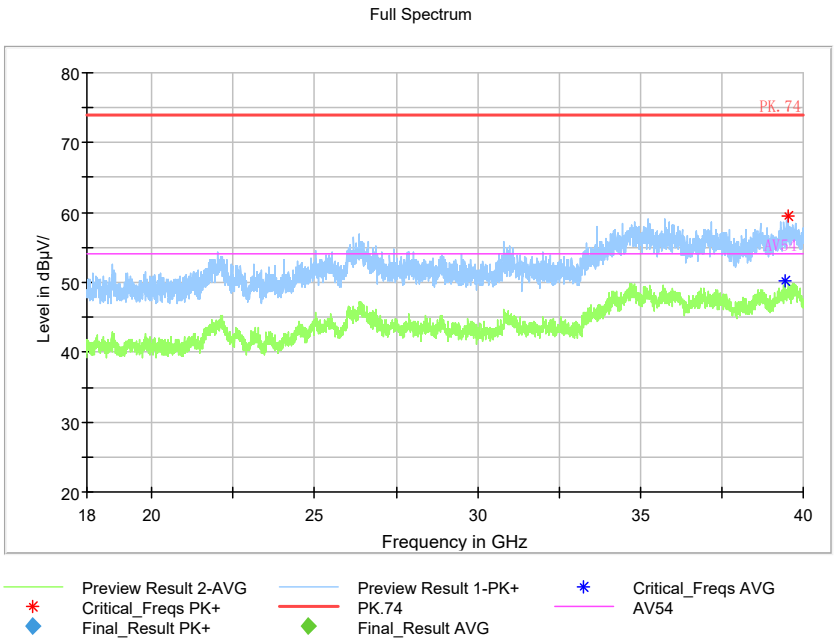

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

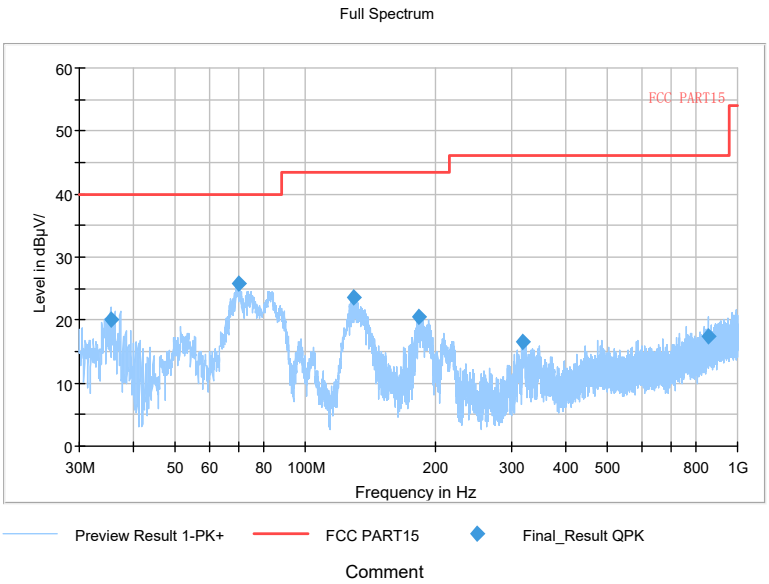

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT40)

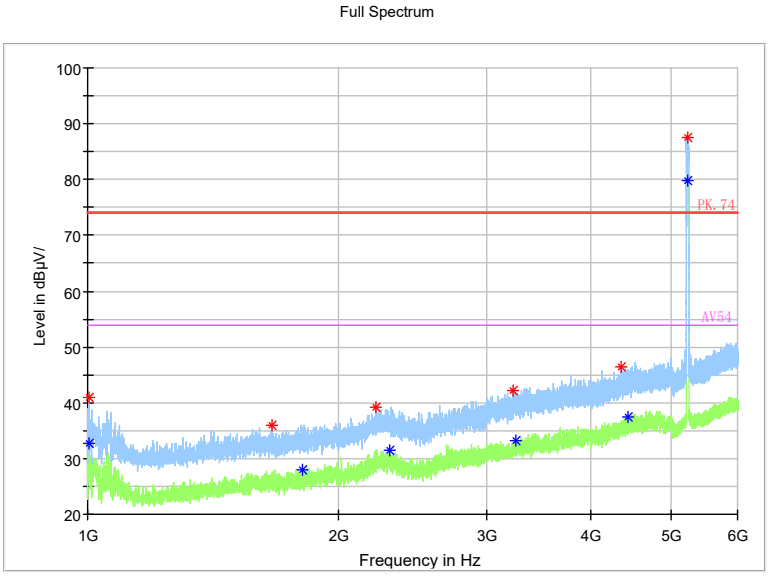

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

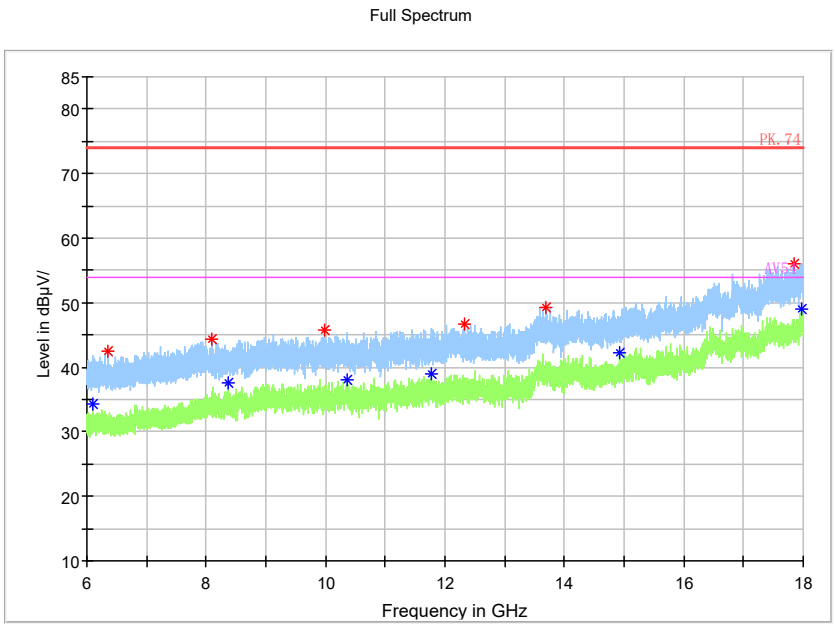

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

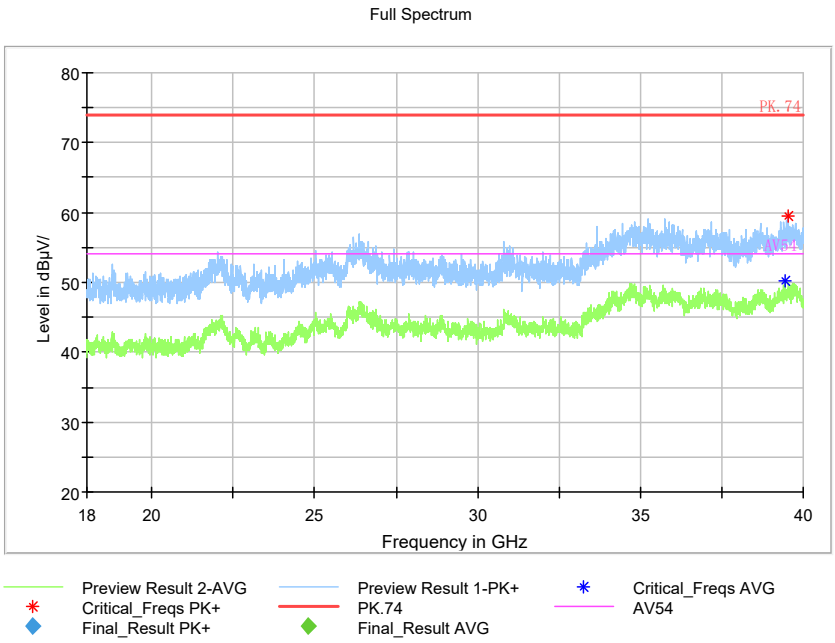

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

Carrier frequency (MHz): 5210
Channel No.:42

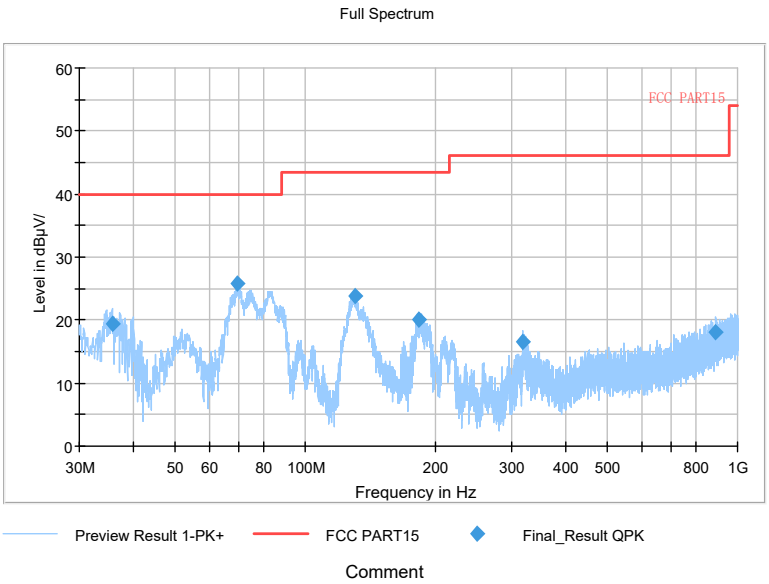

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT80)

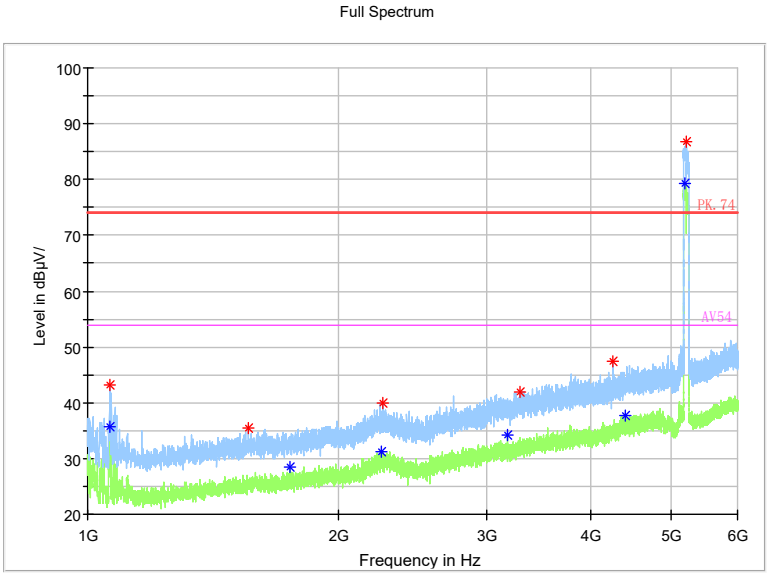

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT80)

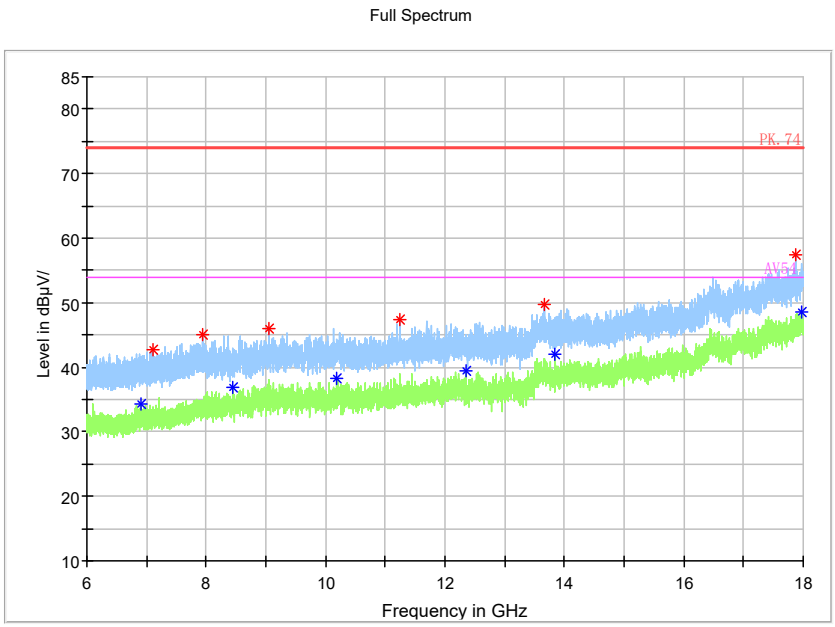

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT80)

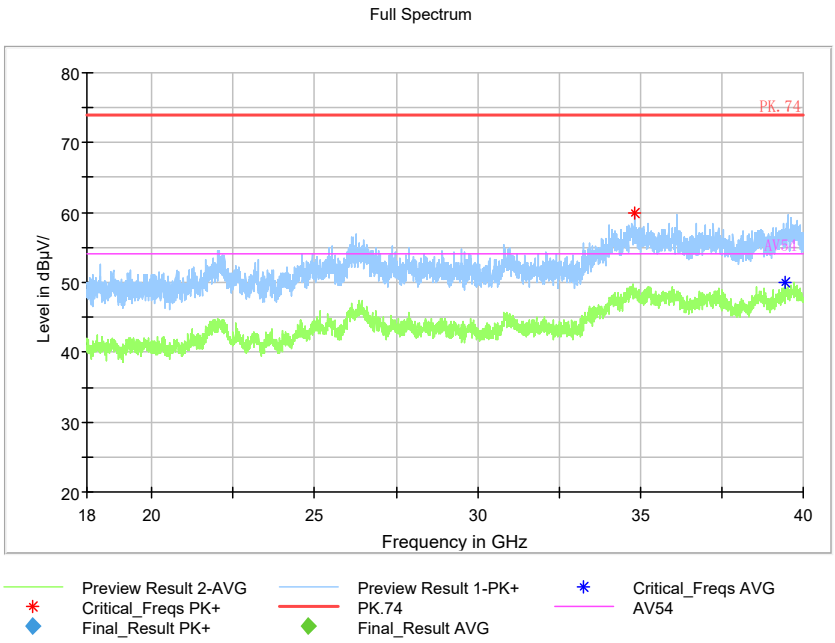

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT80)

Carrier frequency (MHz): 5260

Channel No.:52

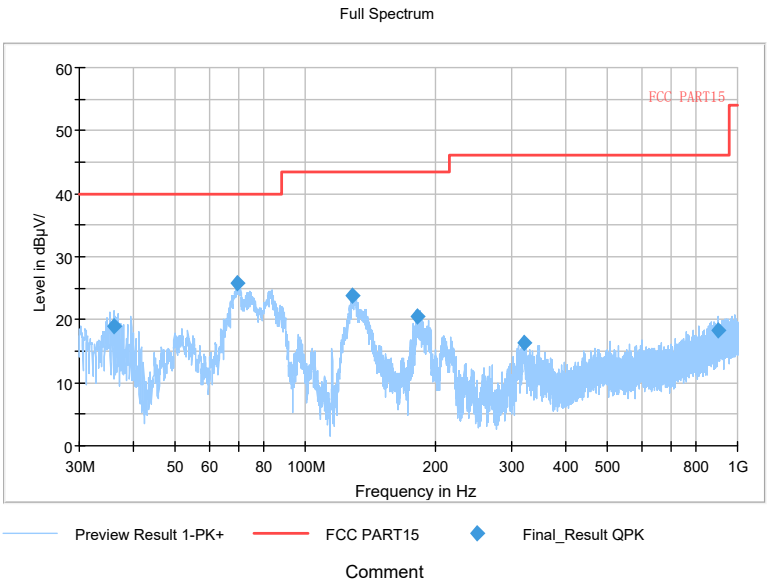

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

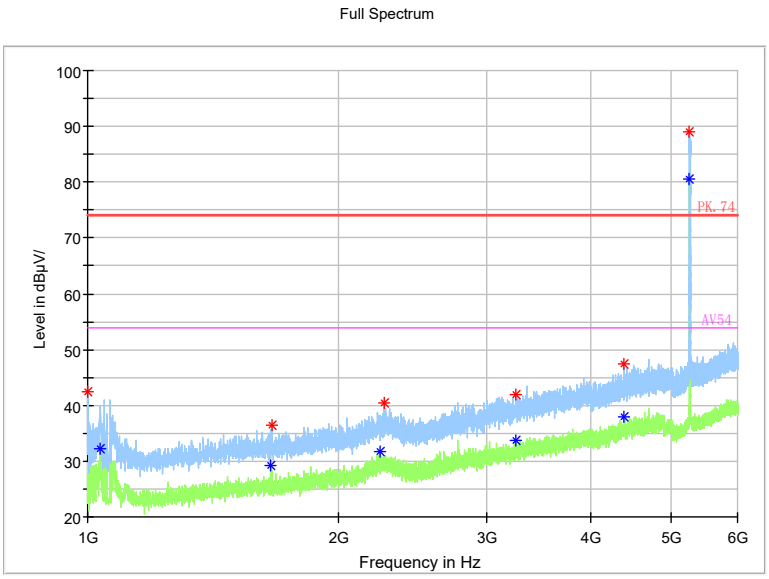

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

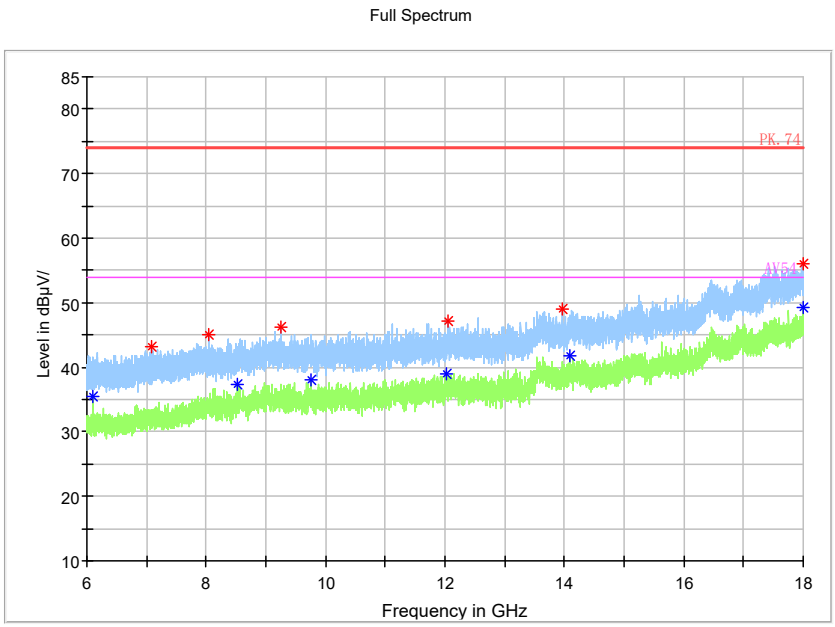

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

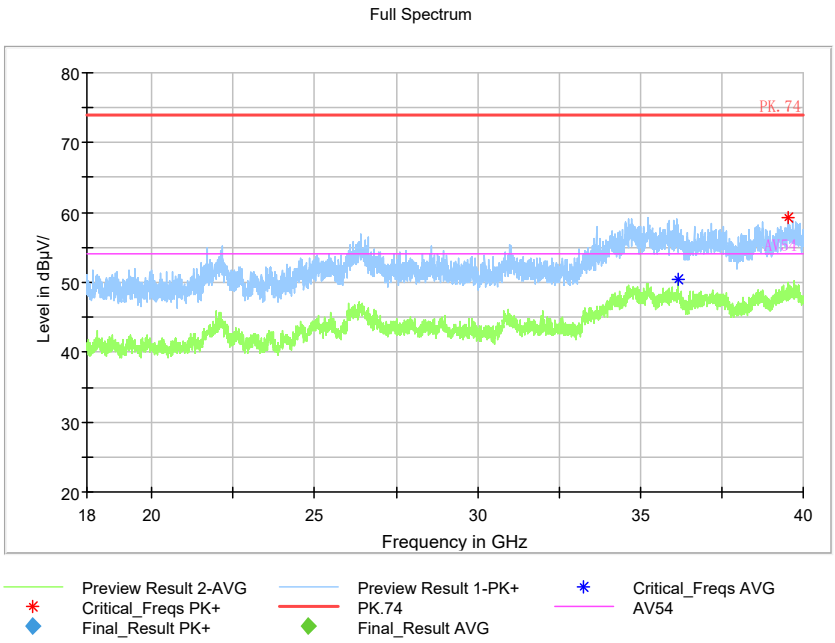

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

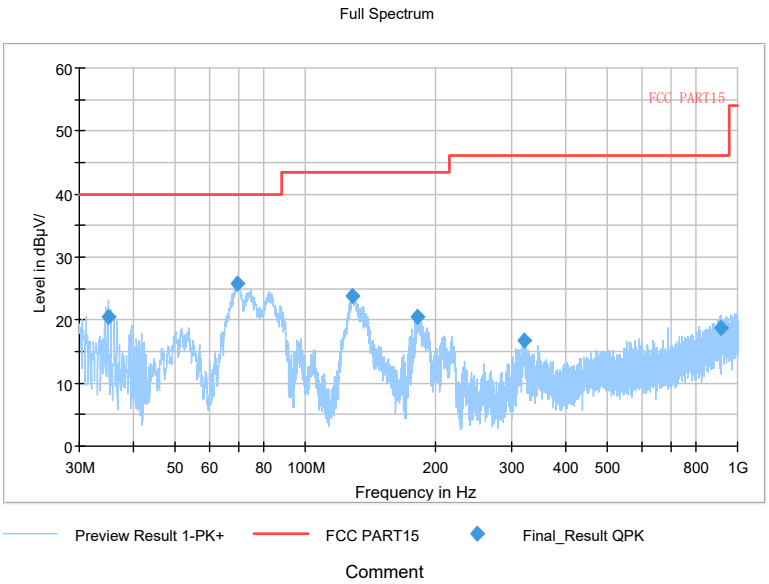

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

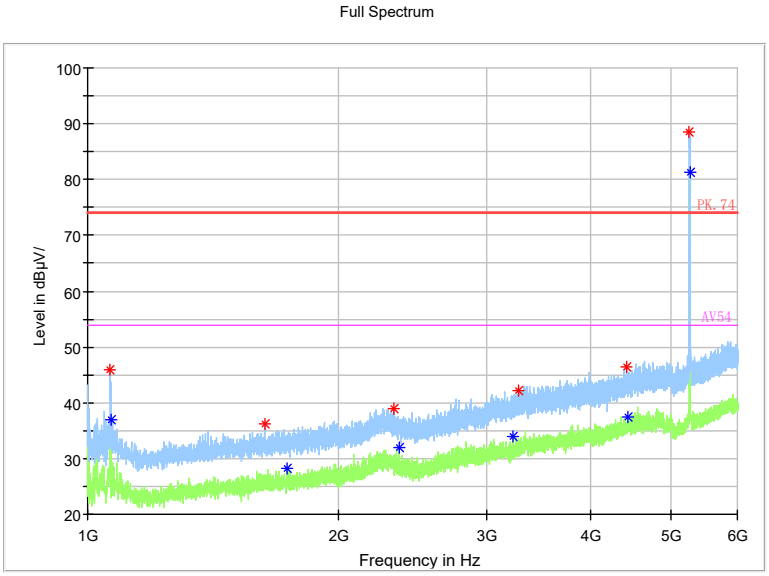

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

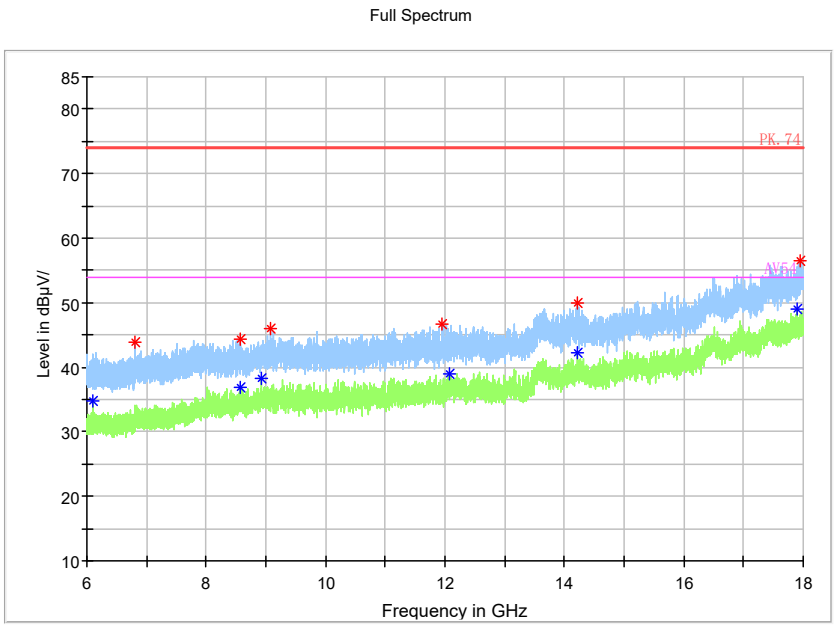

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

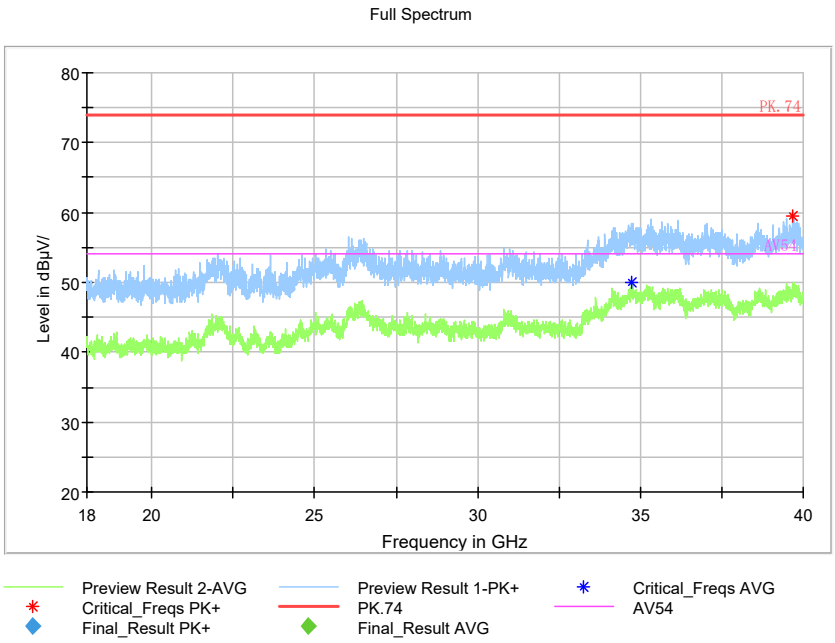

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

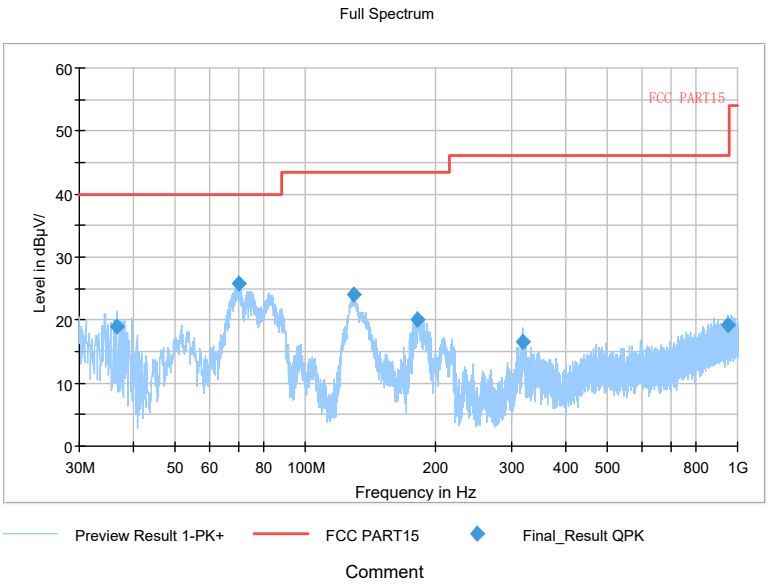

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

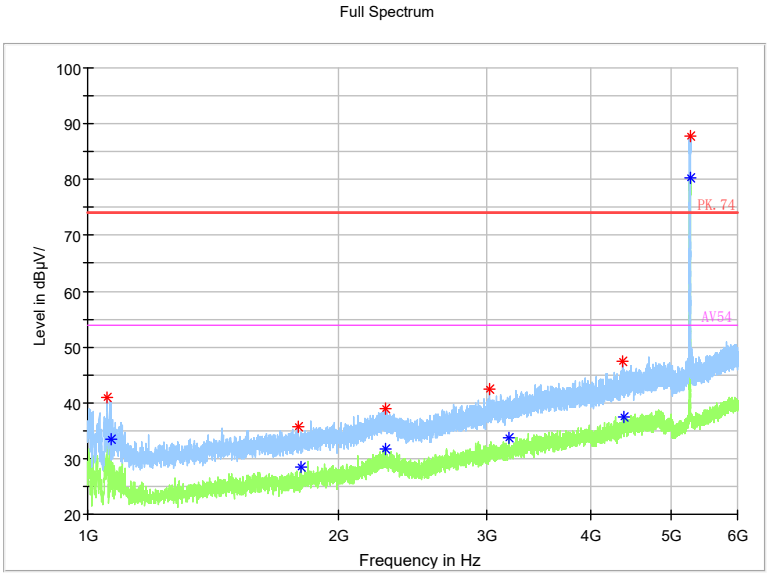

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

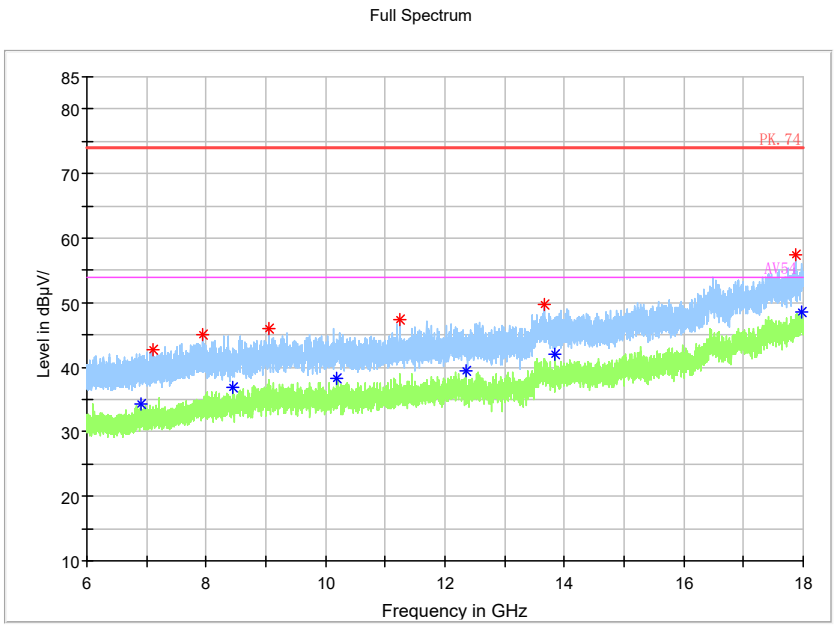

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

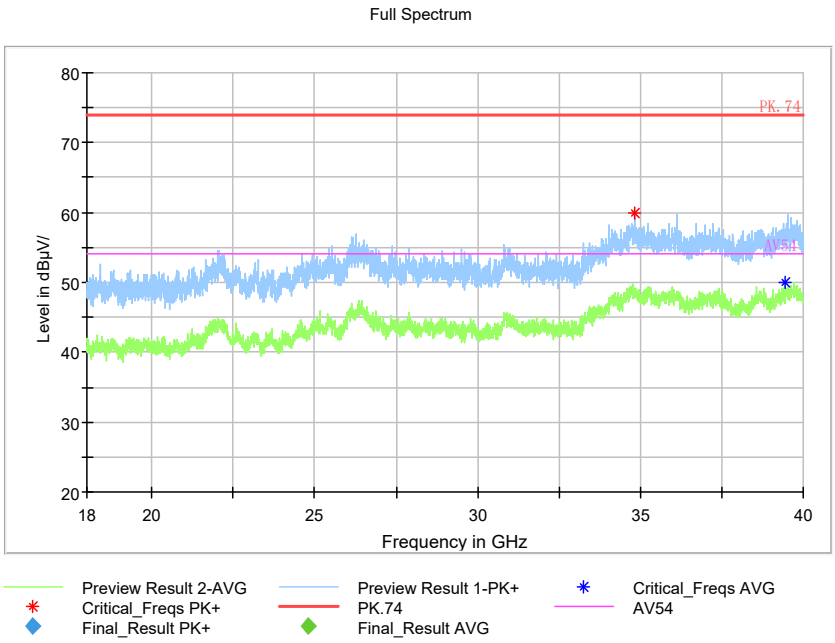

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5300
Channel No.:60

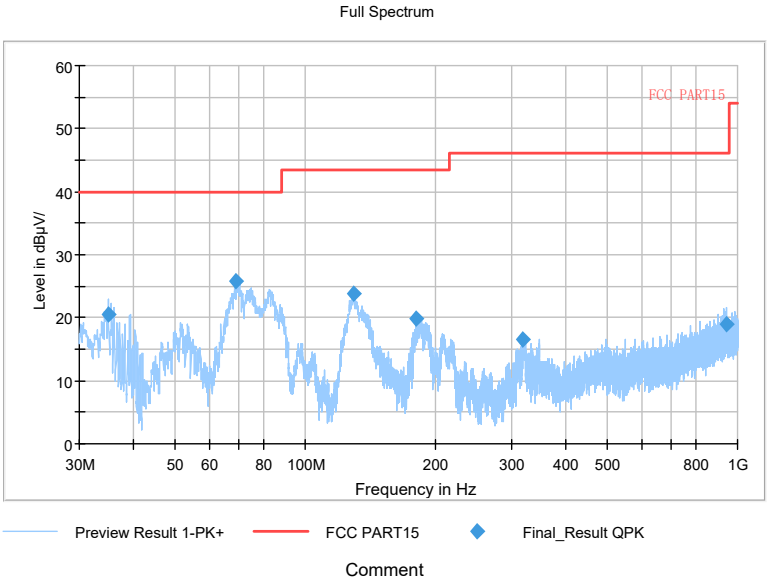

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

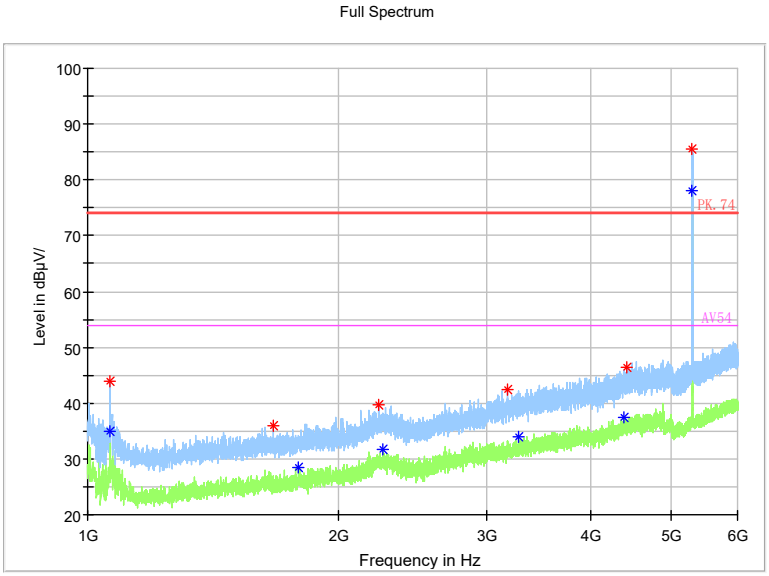

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

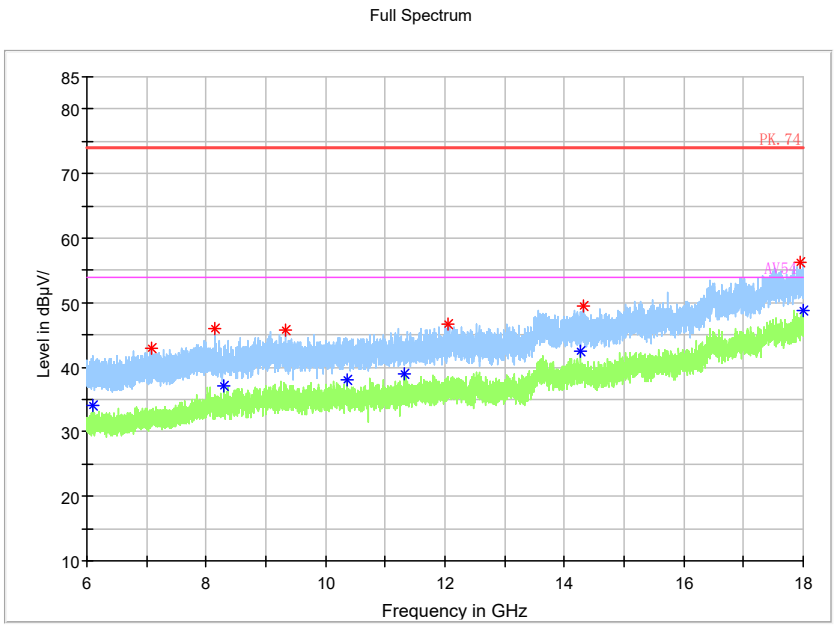

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

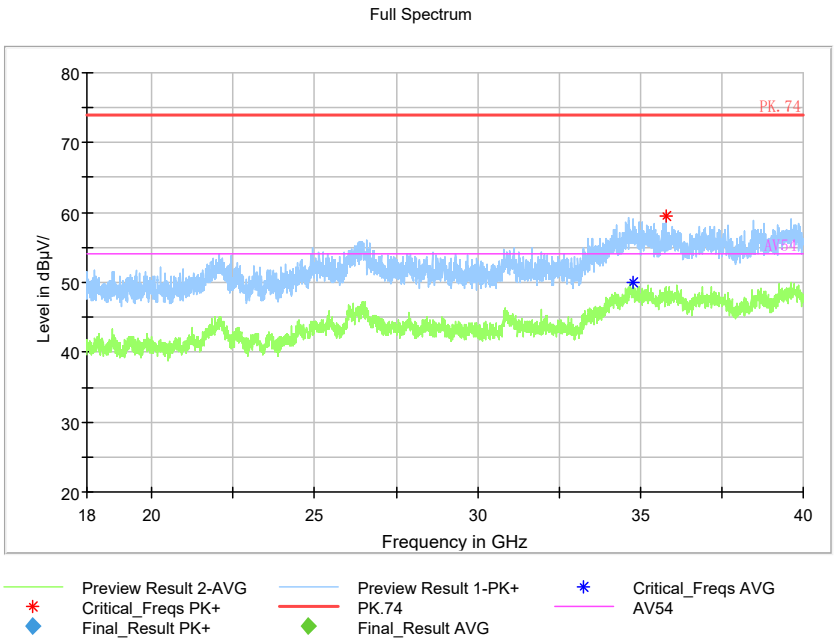

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

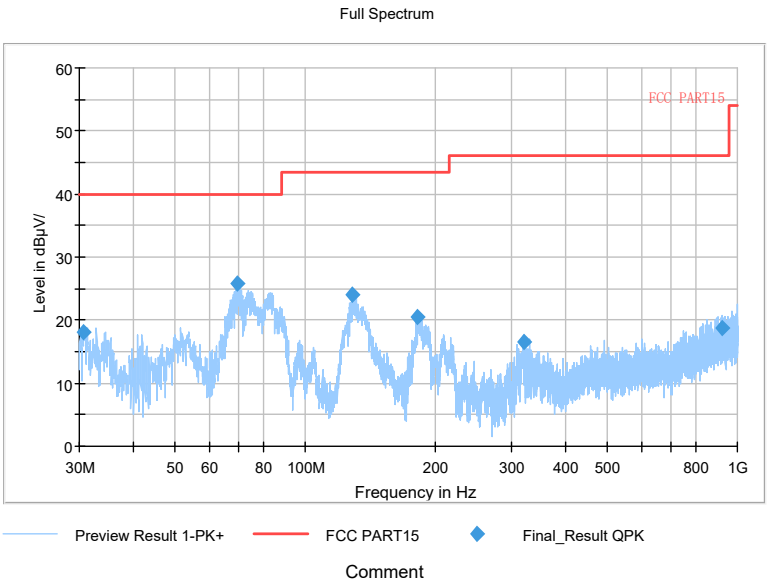

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

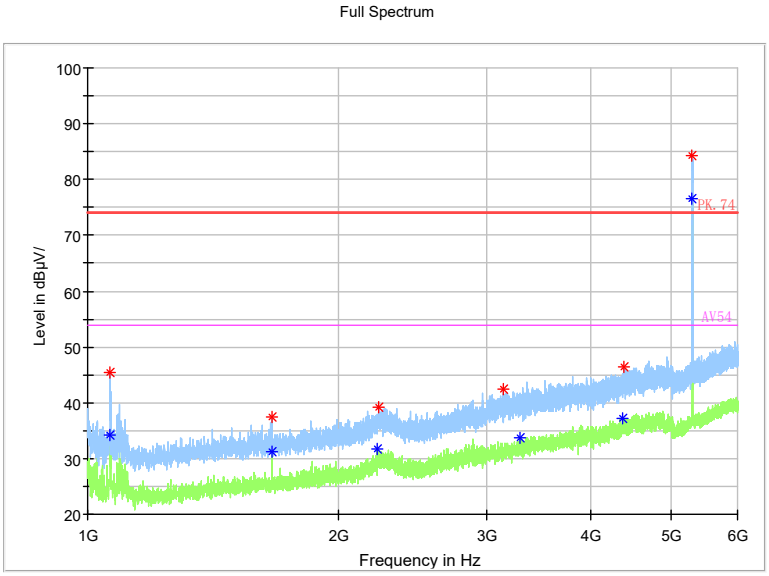

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

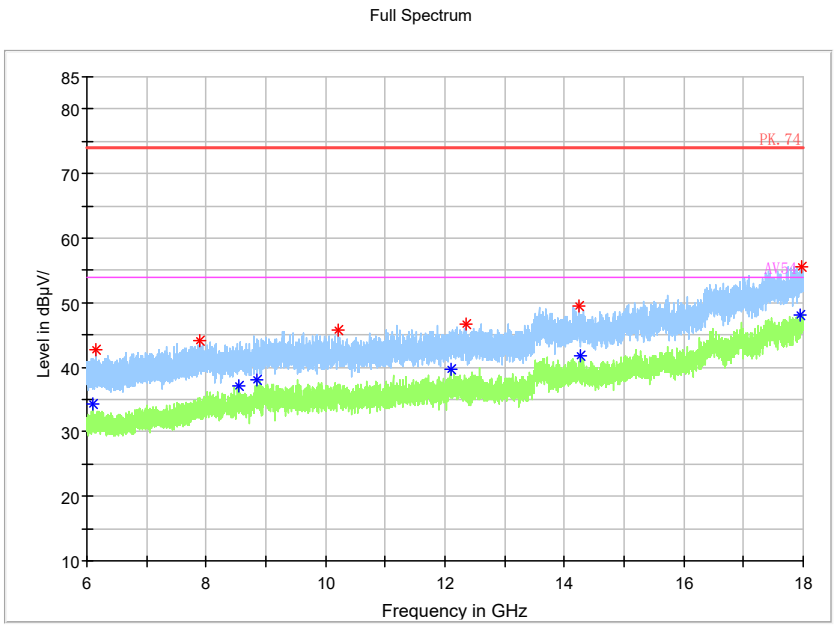

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

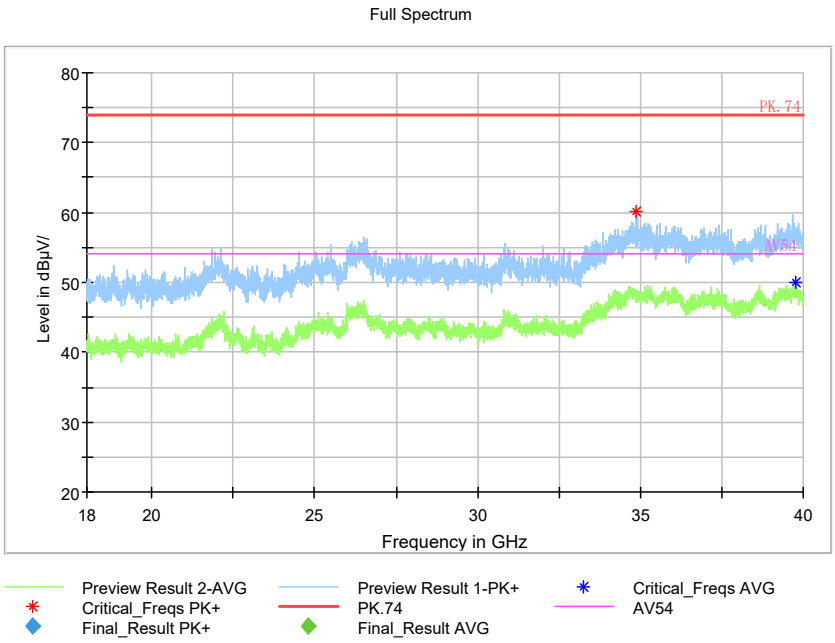

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

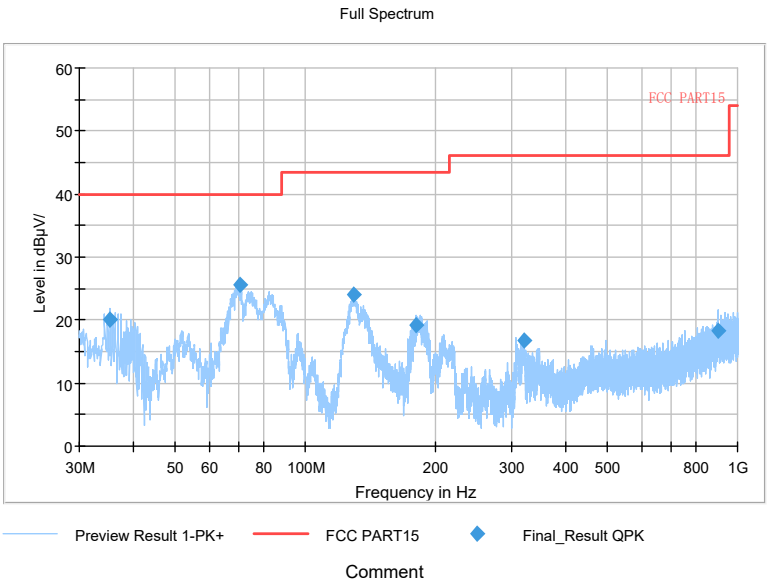

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

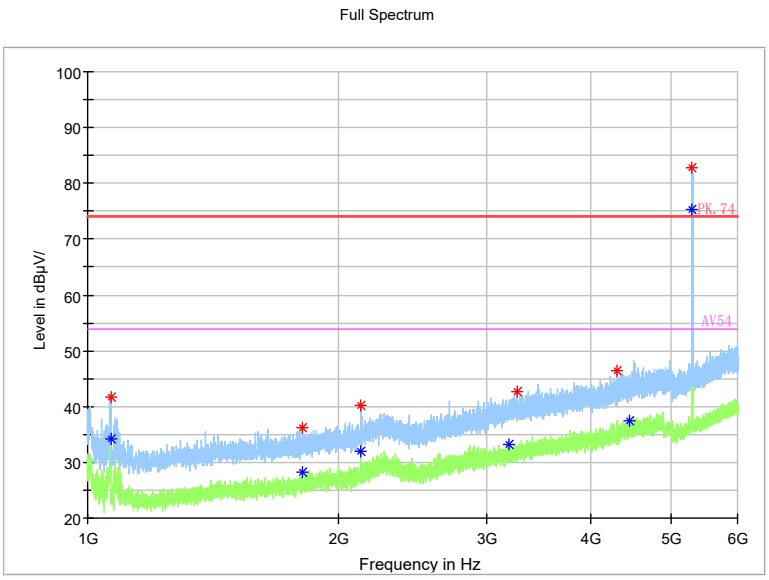

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

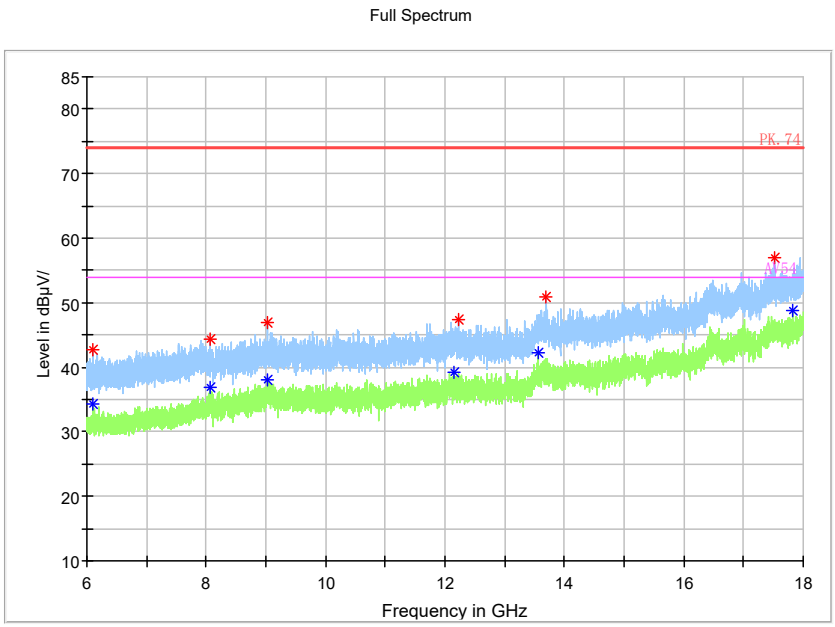

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

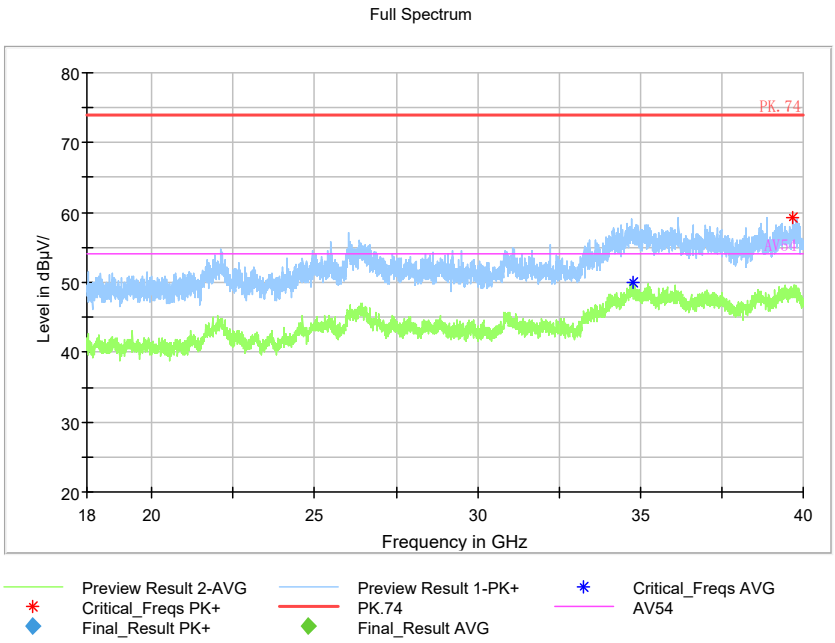

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5320
Channel No.:64

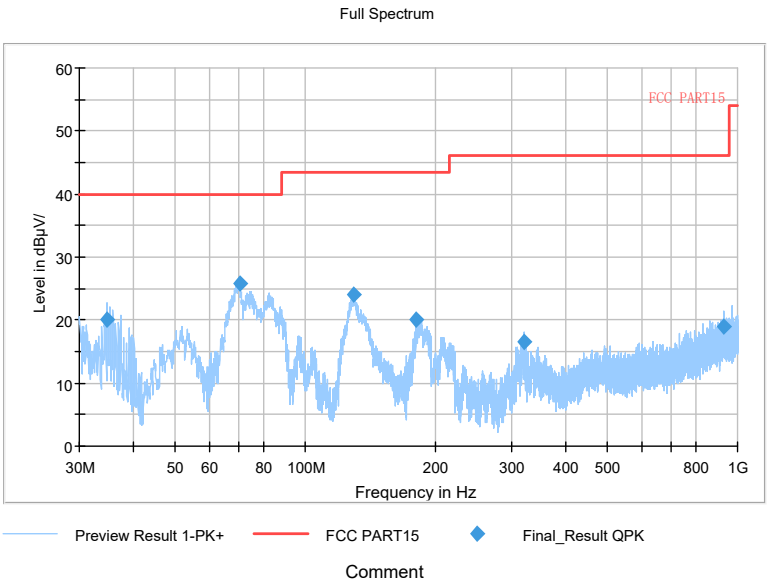

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

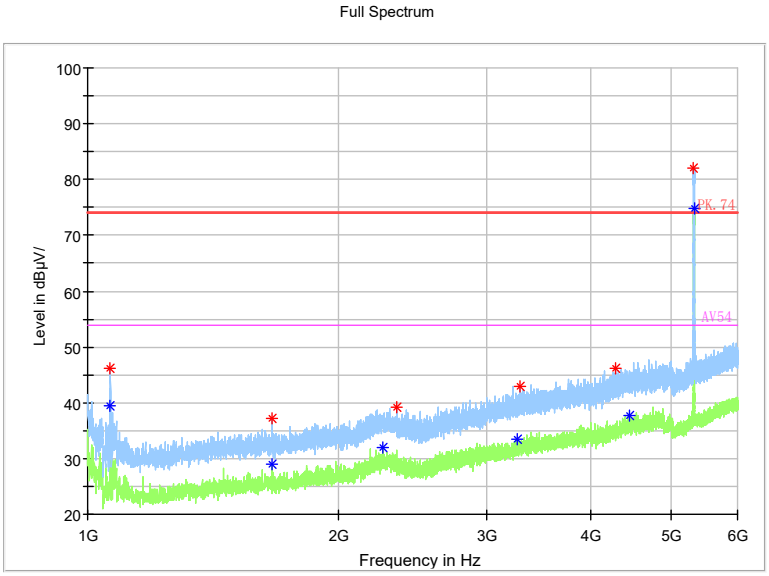

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

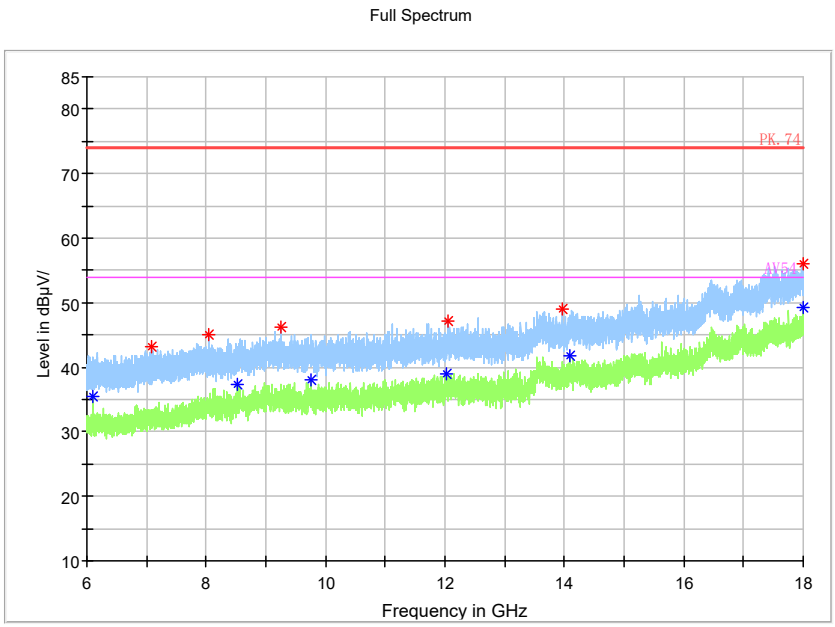

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

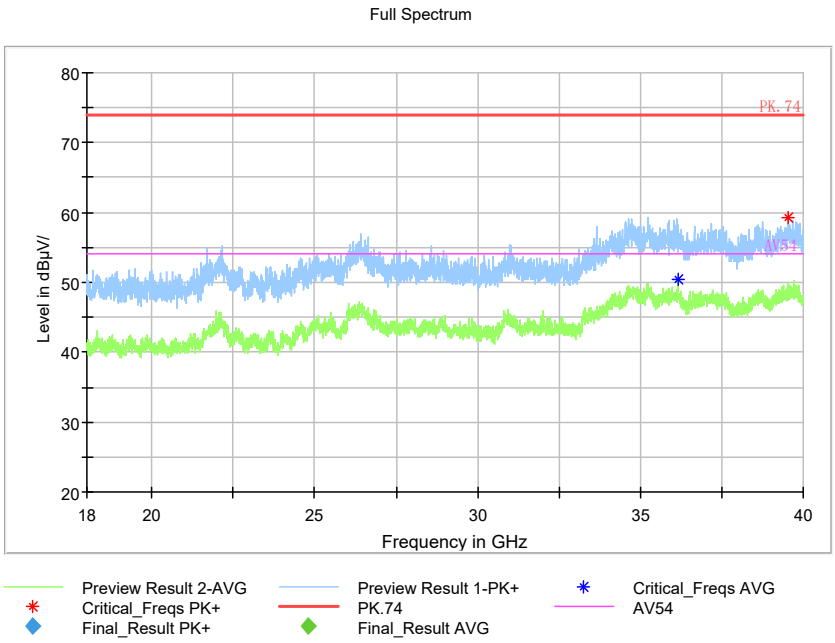

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

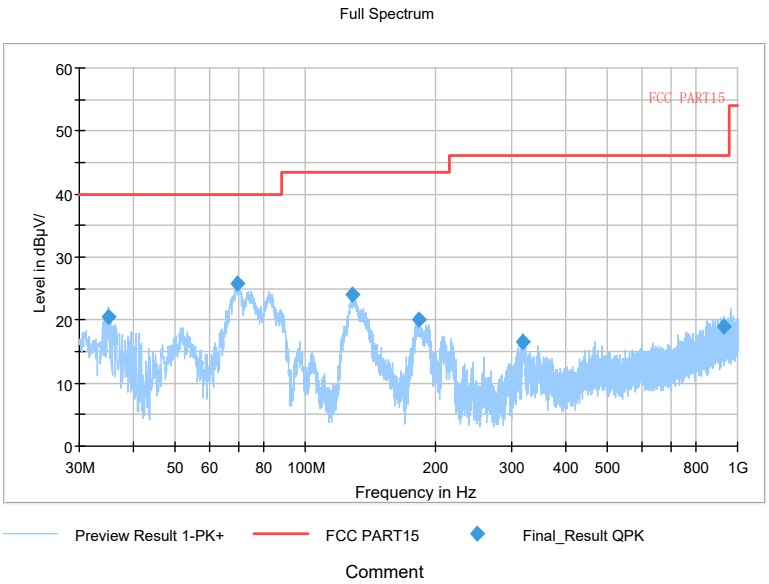

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

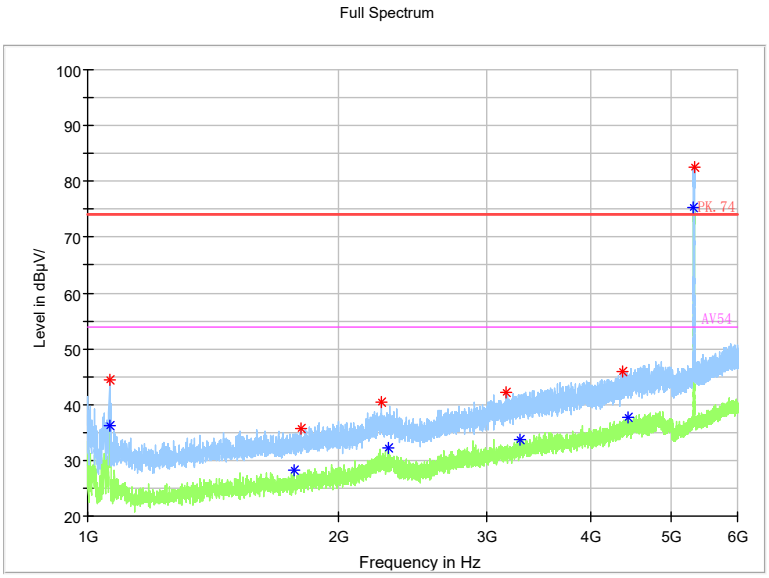

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

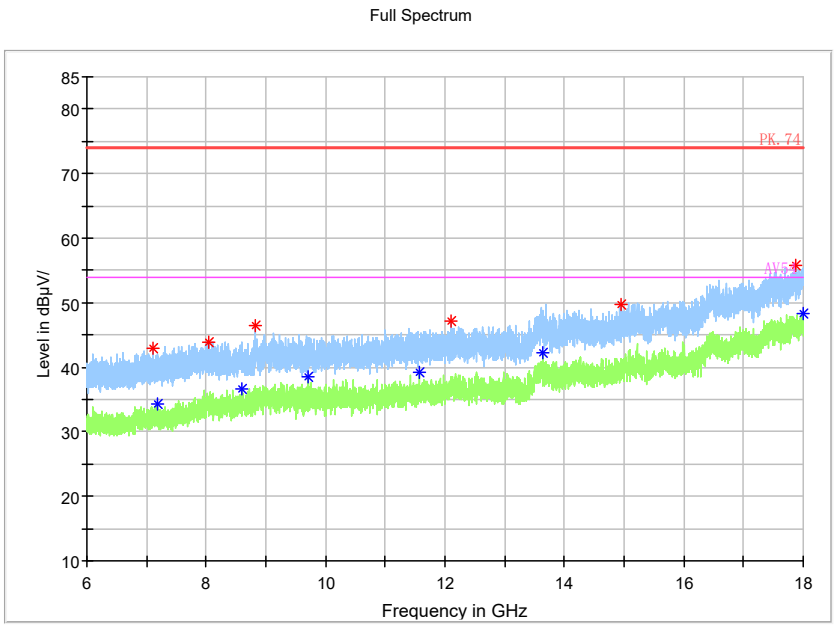

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

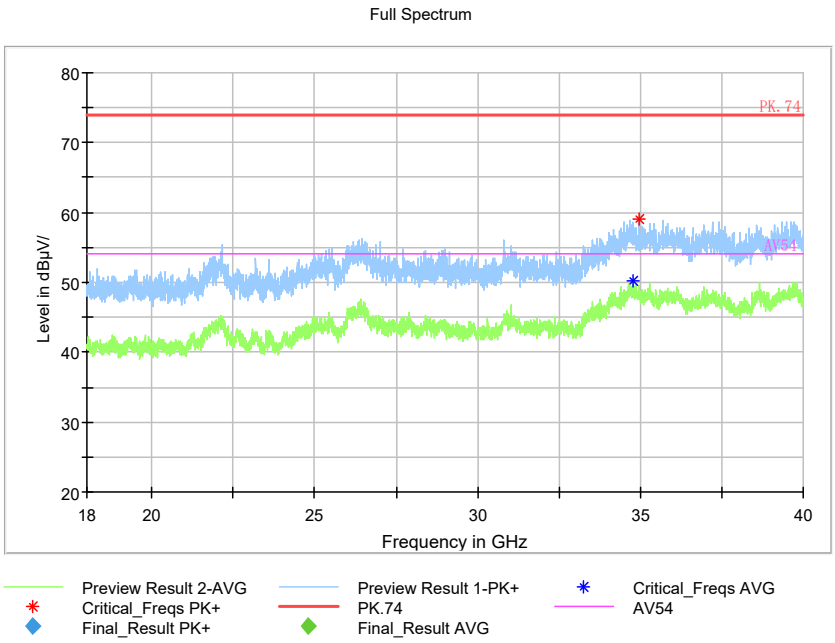

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

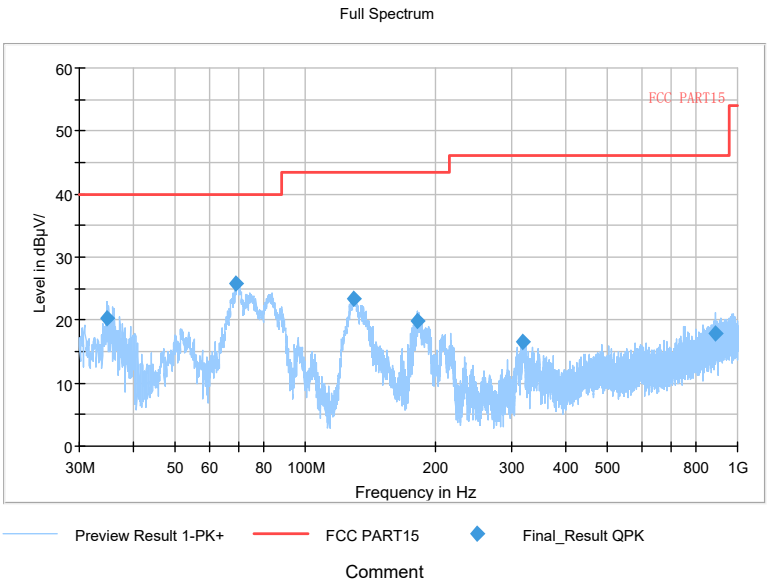

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

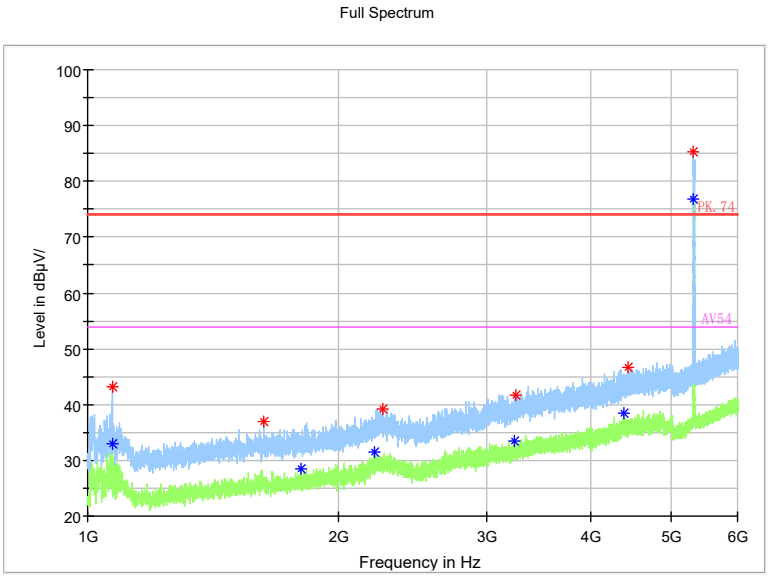

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

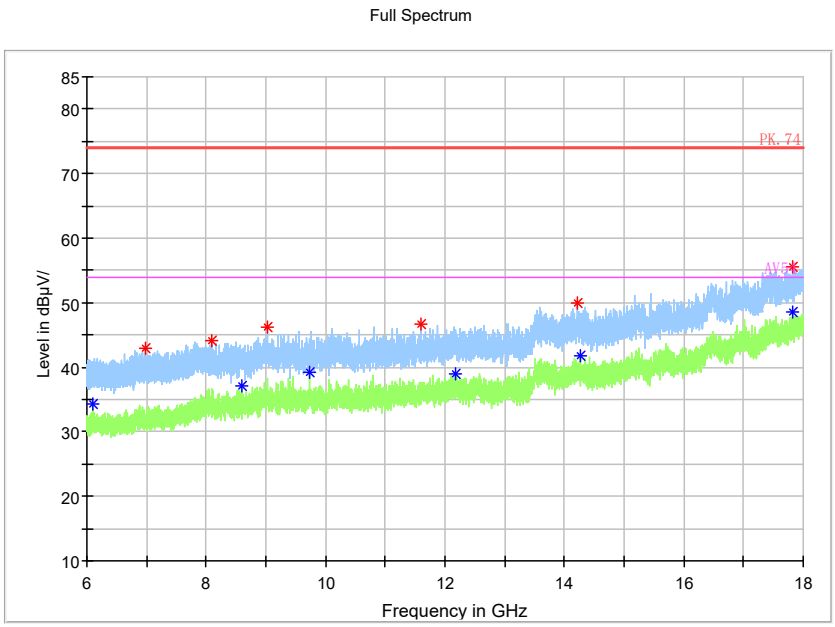

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

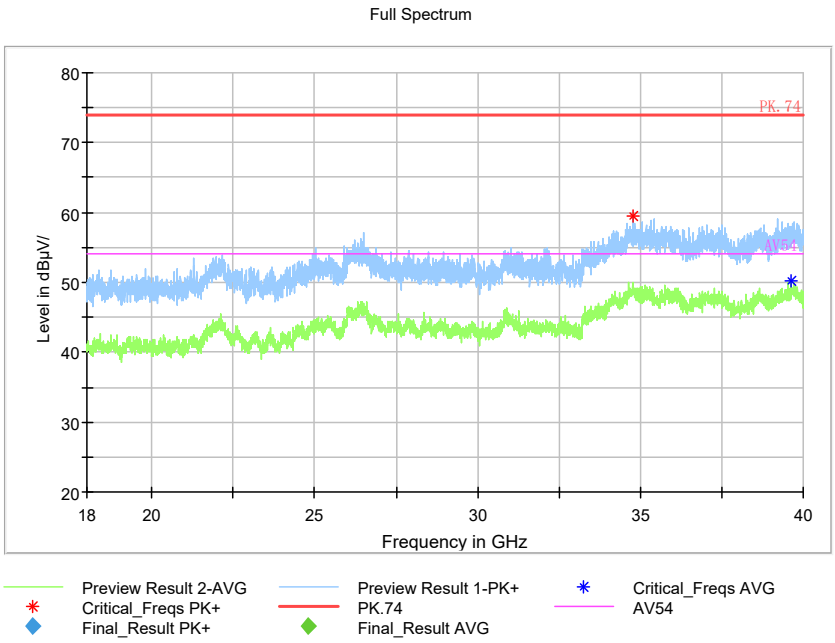

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5270
Channel No.:54

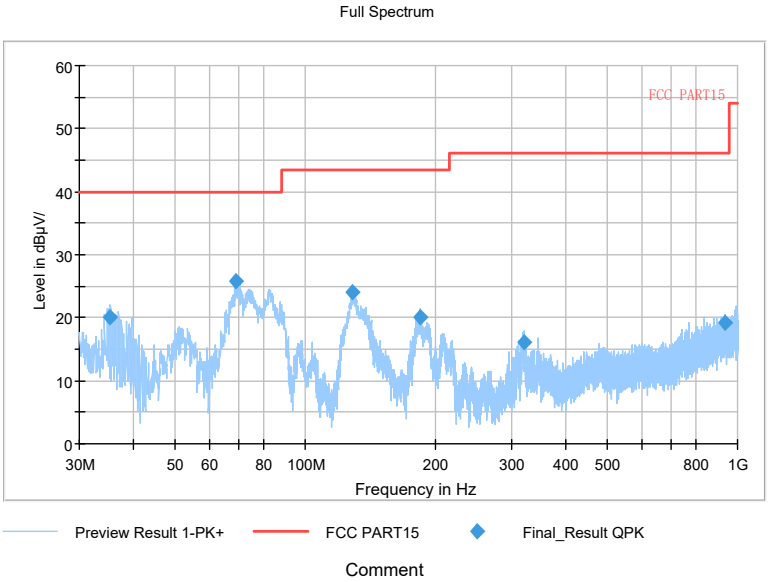

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)

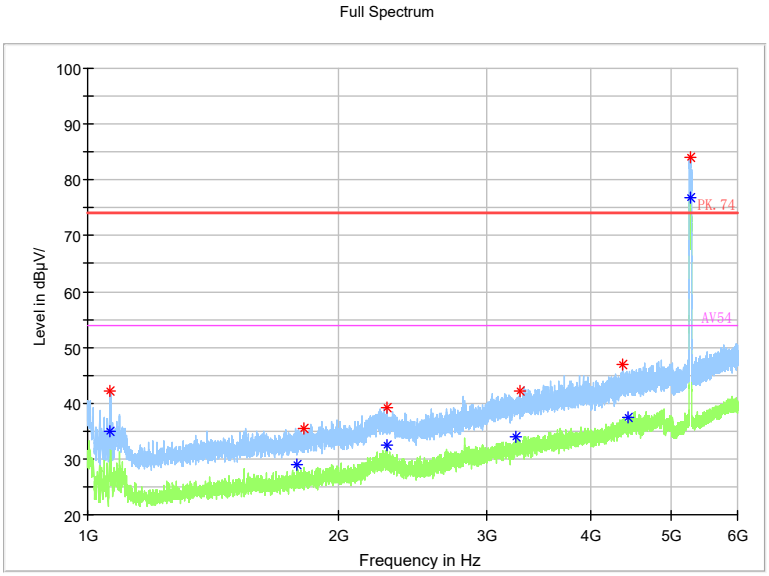

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

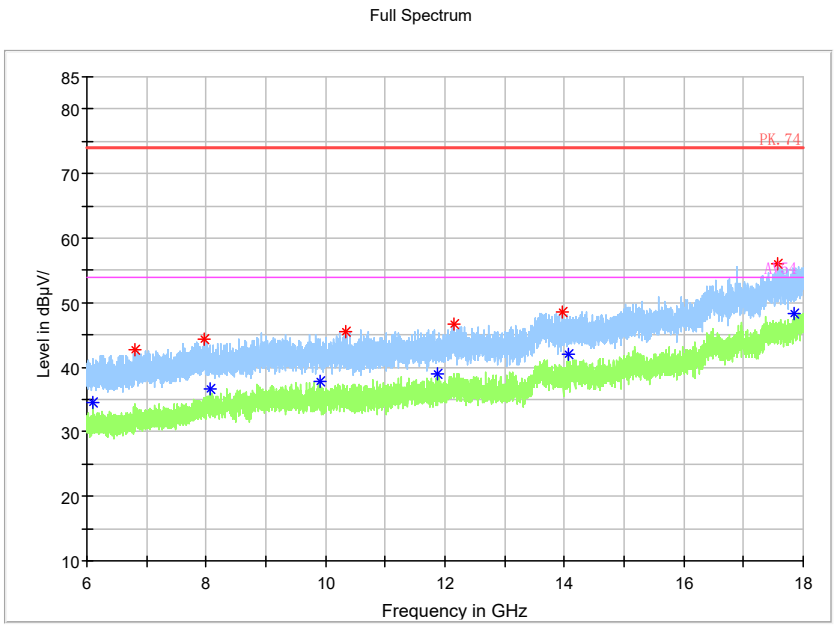

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

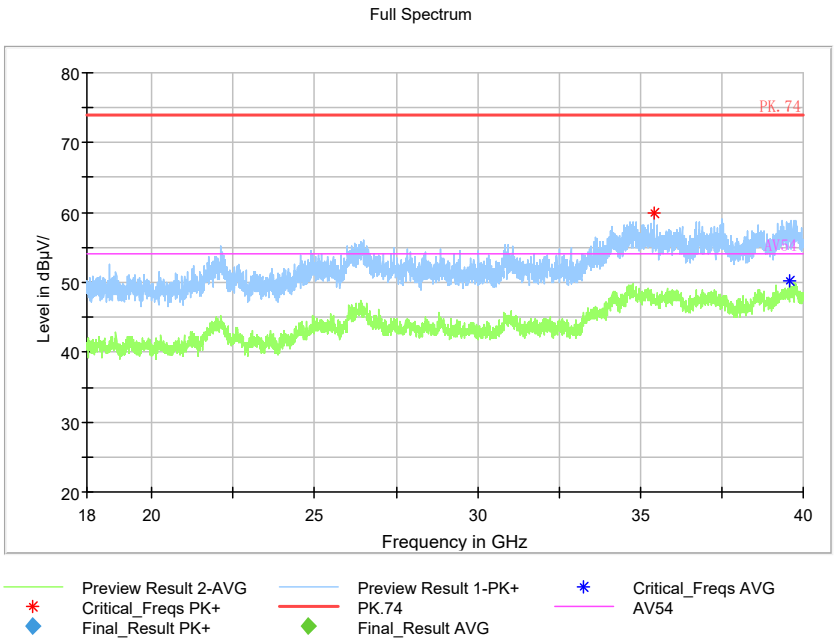

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

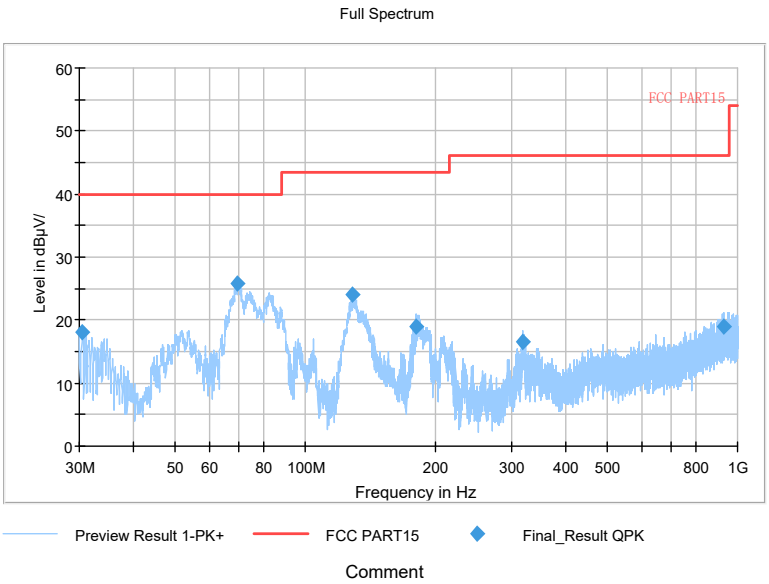

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT40)

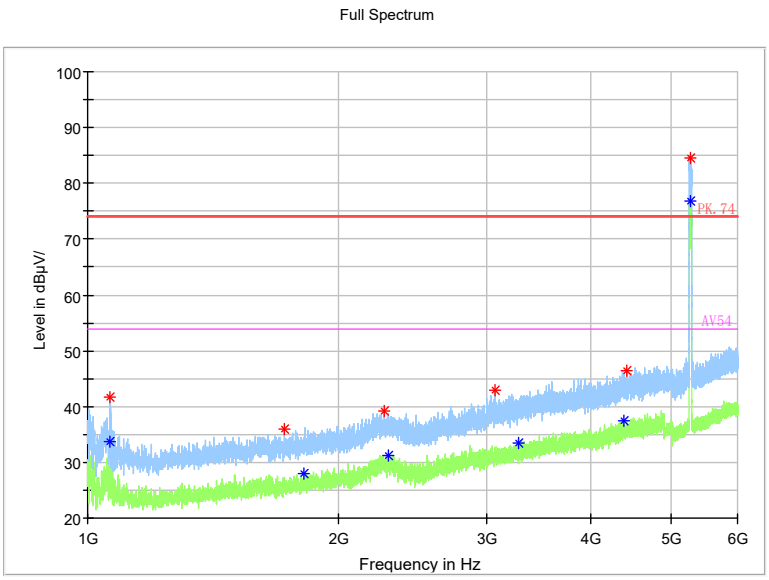

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

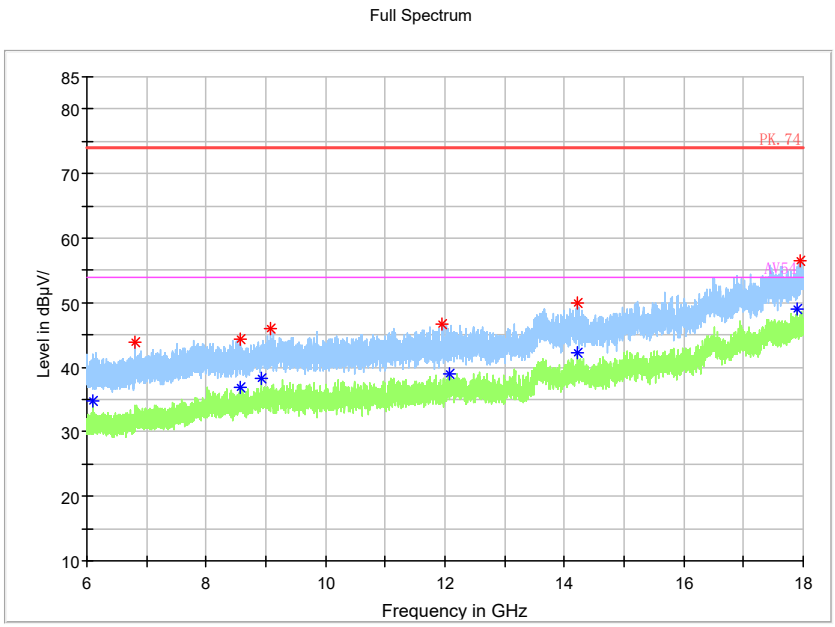

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

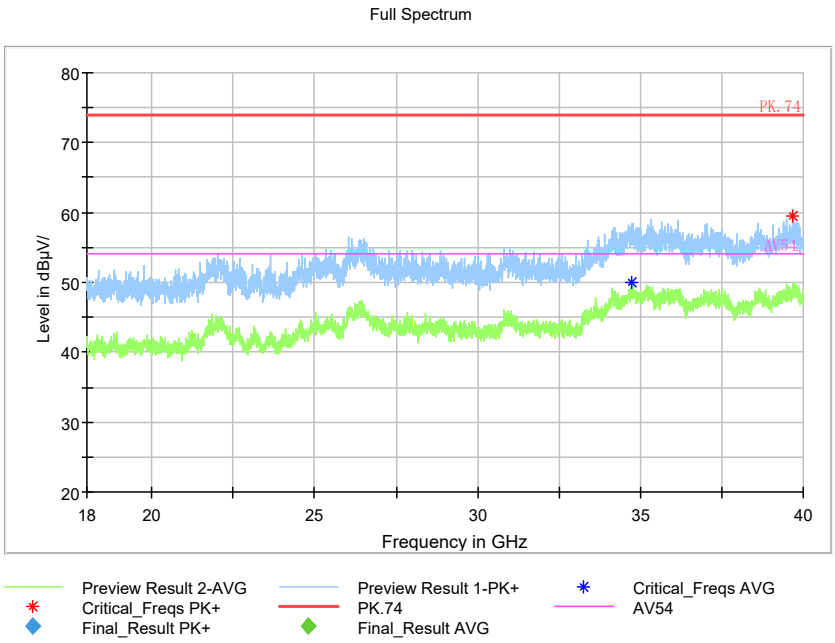

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

Carrier frequency (MHz): 5310
Channel No.:62

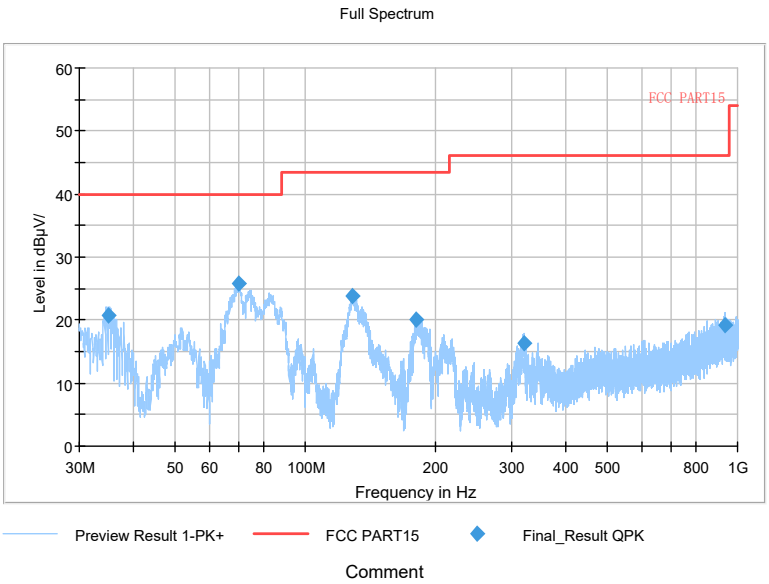

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)

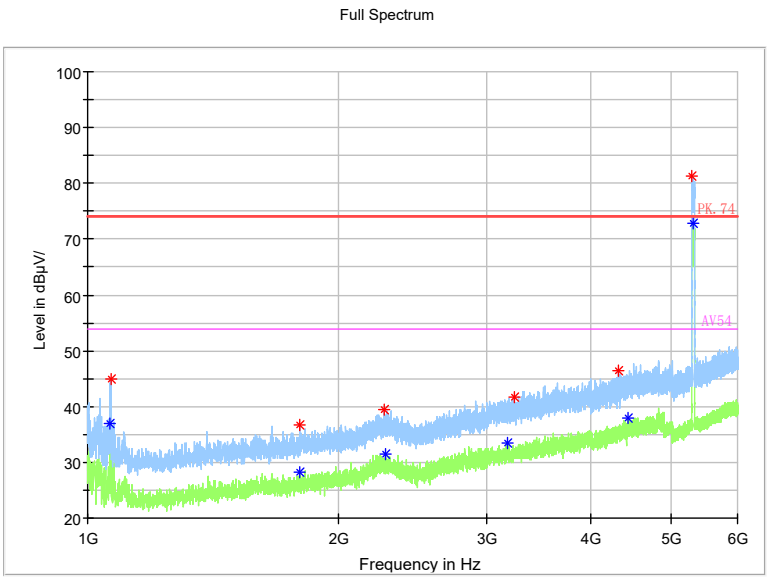

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

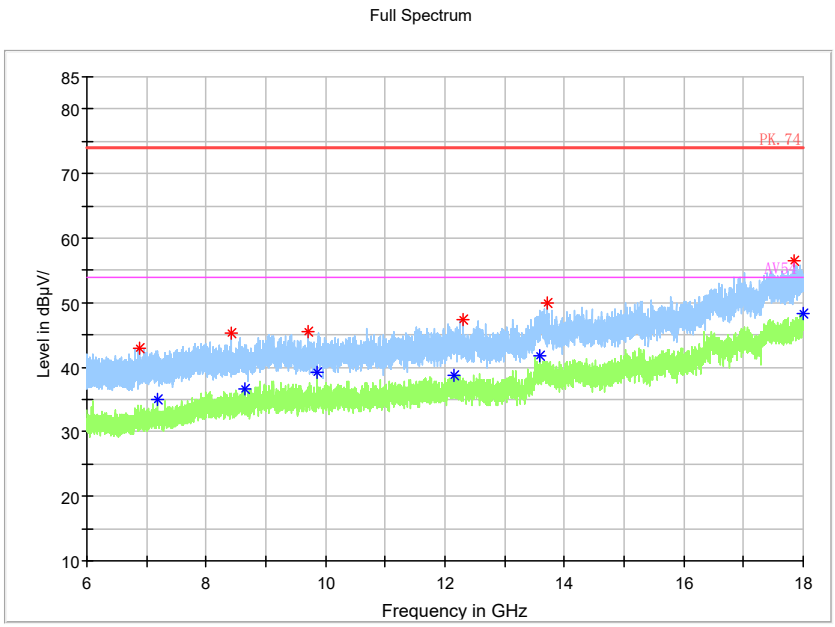

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

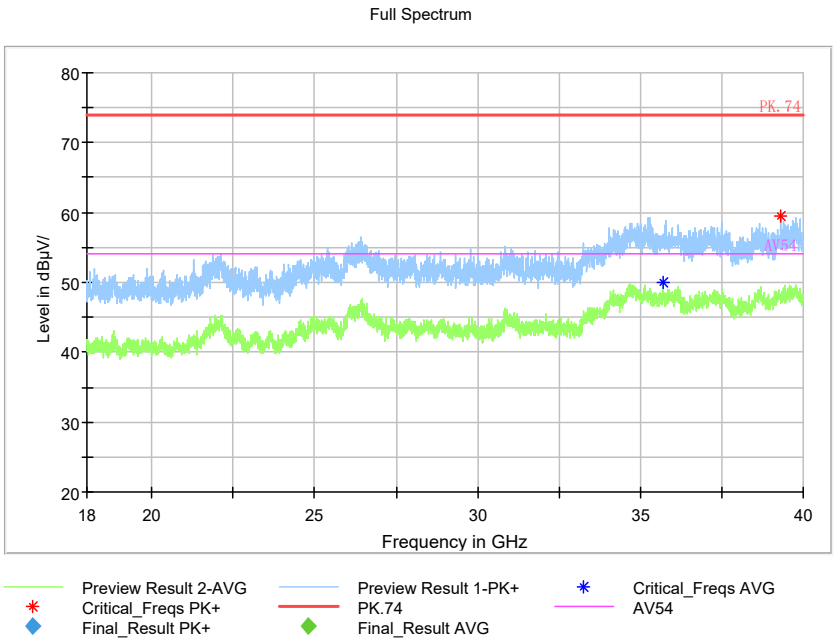

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

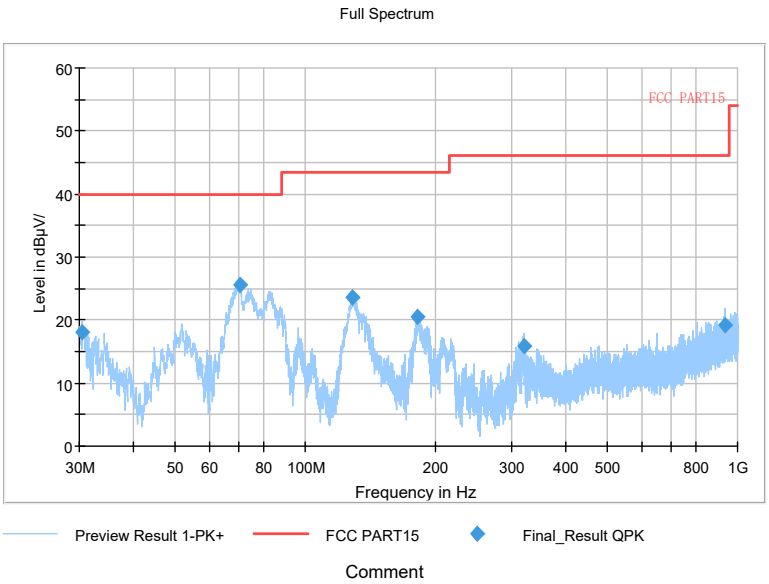

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT40)

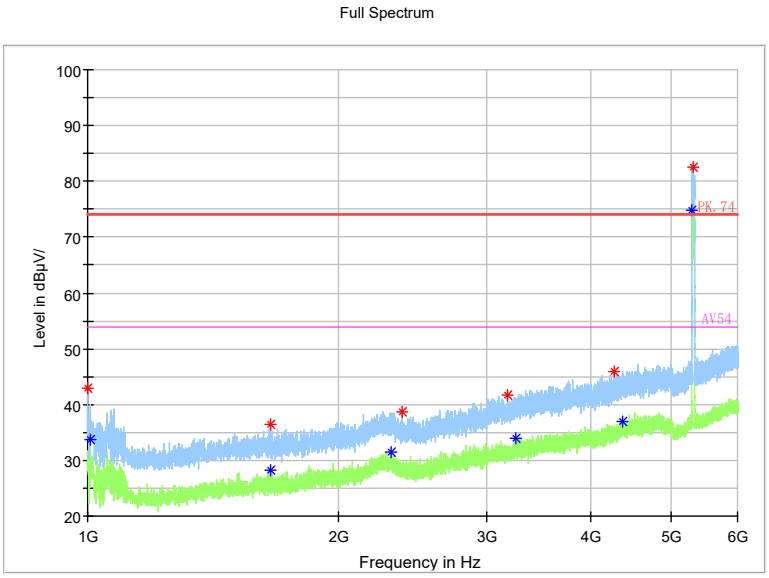

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

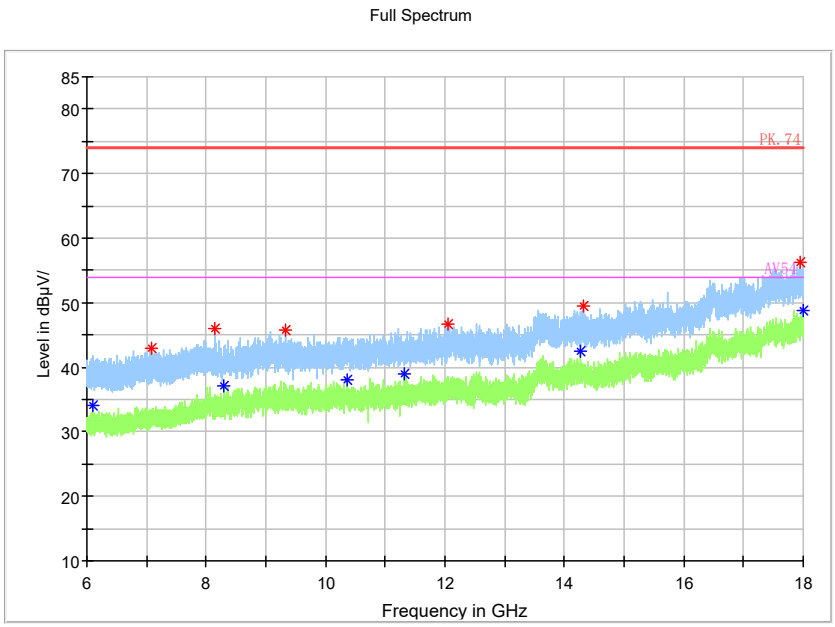

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

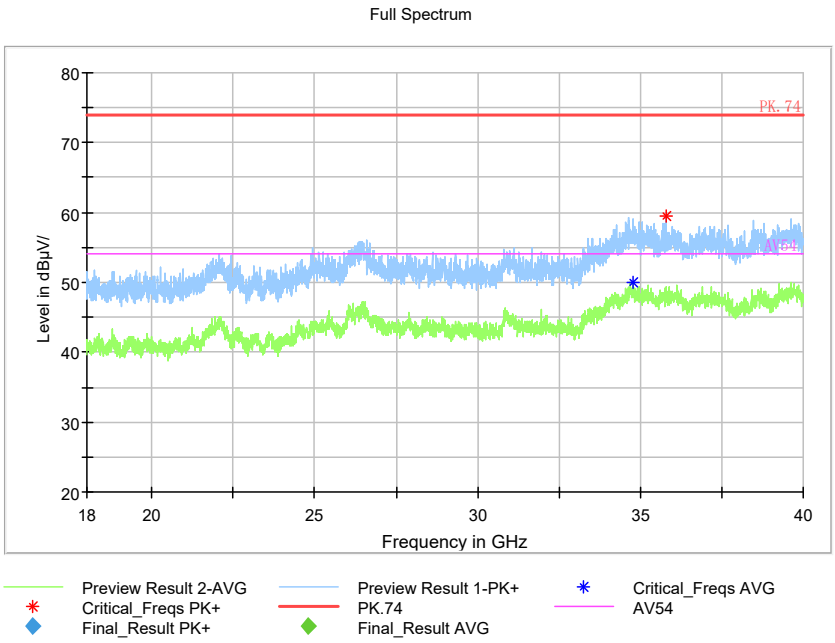

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

Carrier frequency (MHz): 5290
Channel No.:58

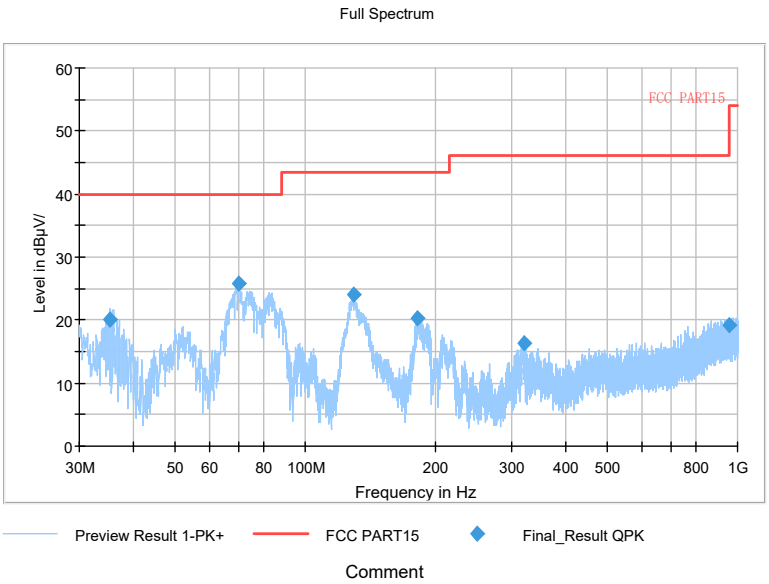

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT80)

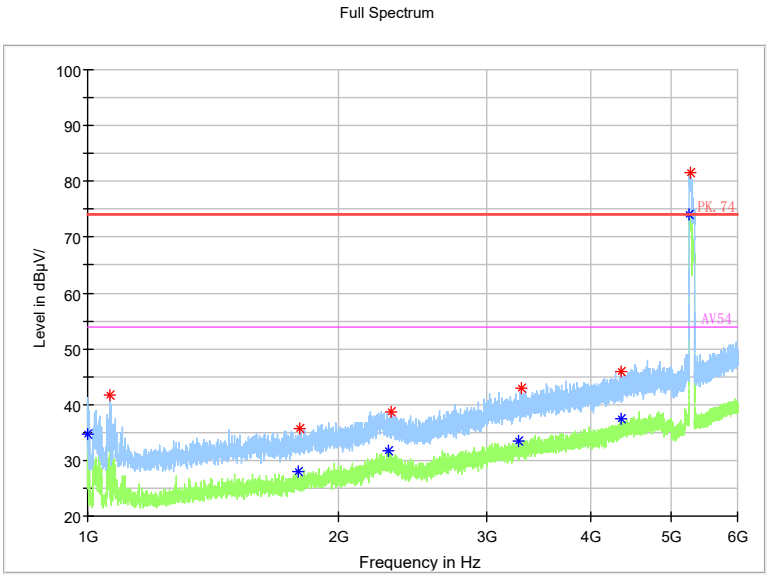

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT80)

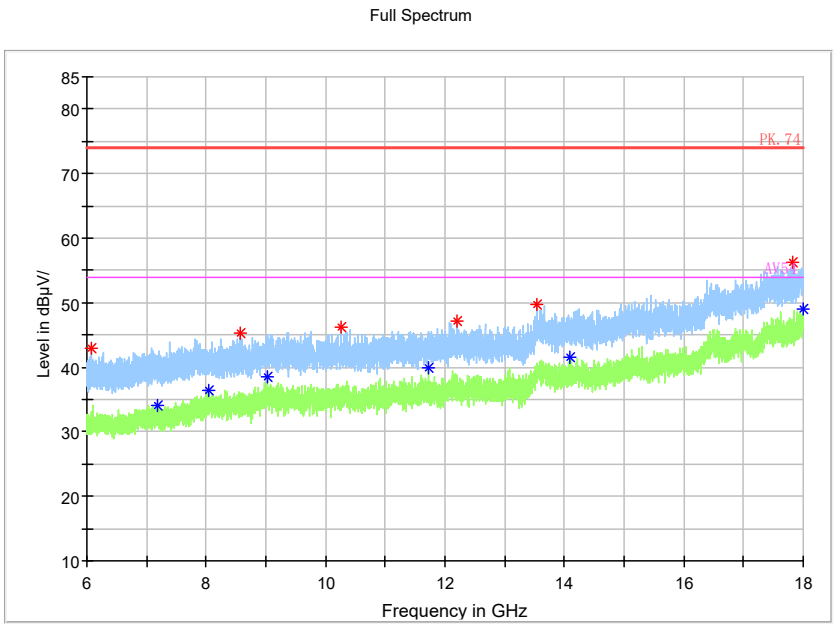

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT80)

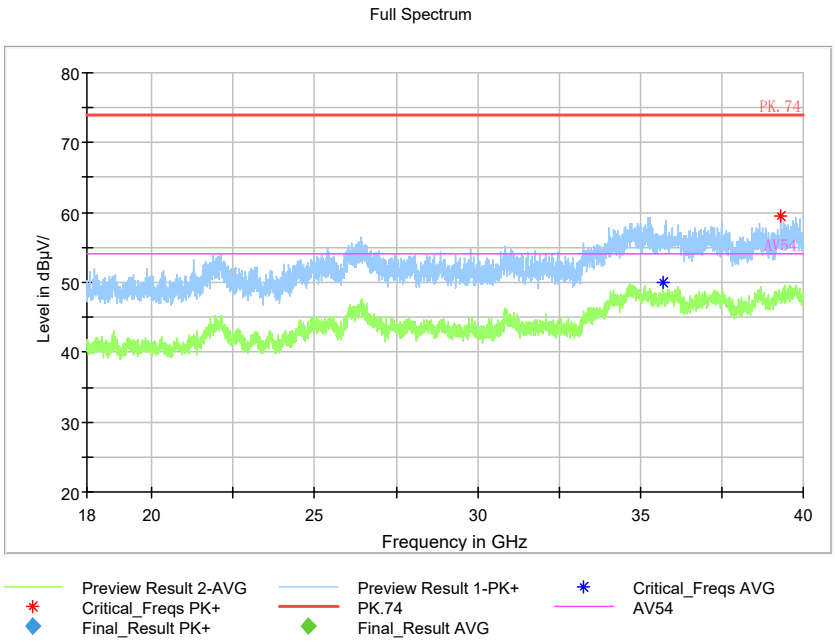

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT80)

Carrier frequency (MHz): 5500

Channel No.:100

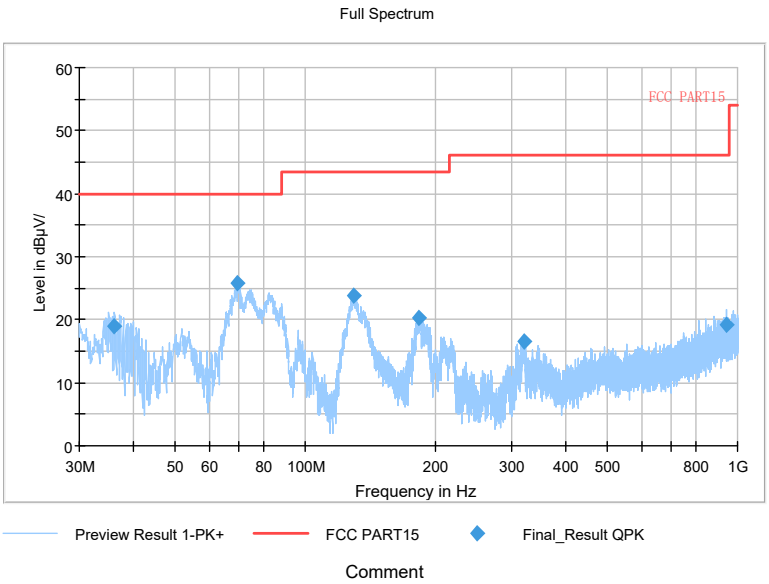

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

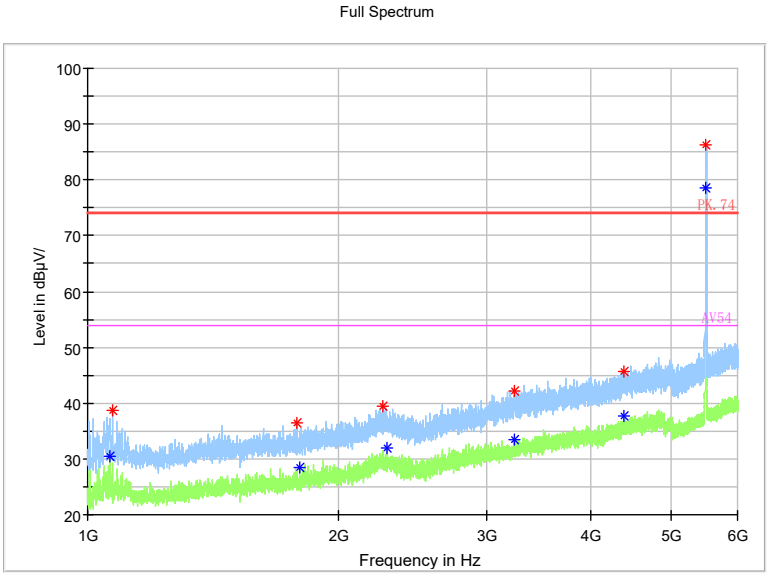

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

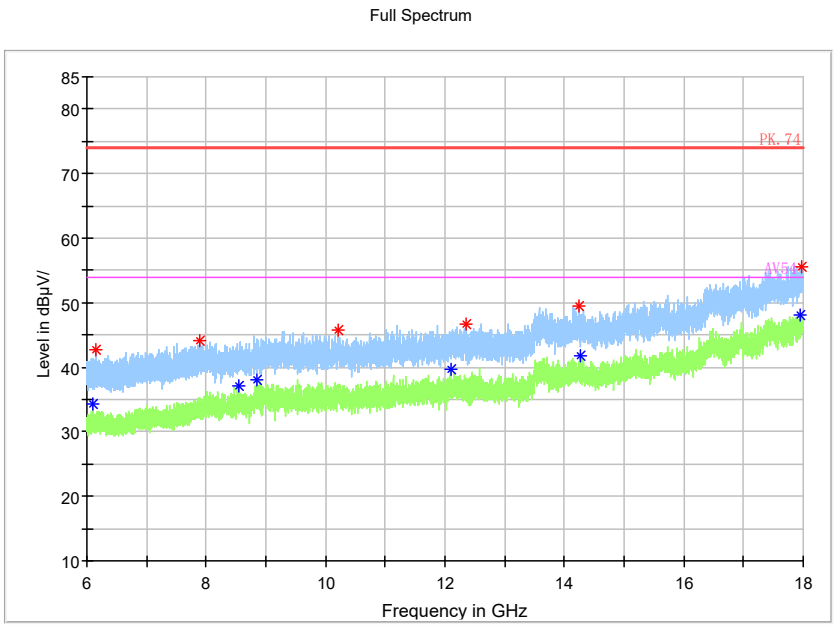

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

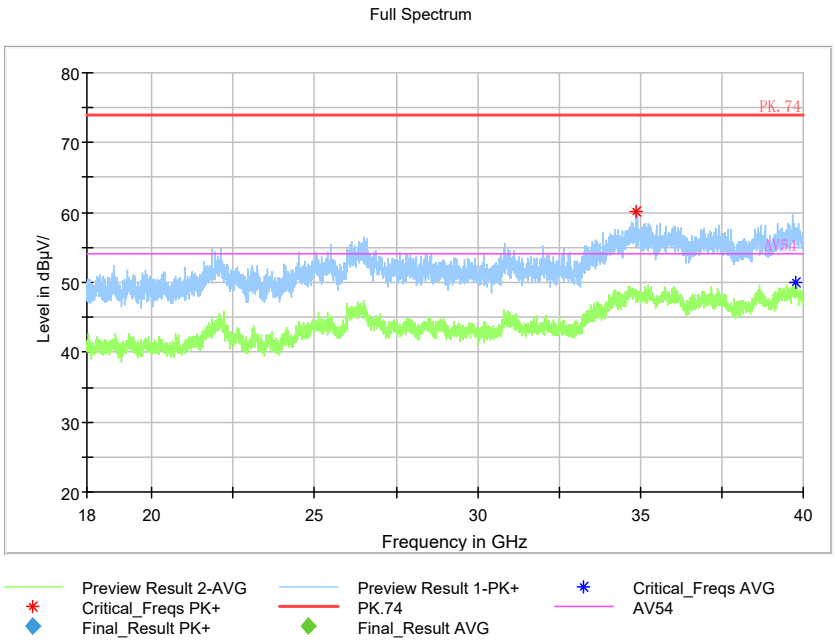

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

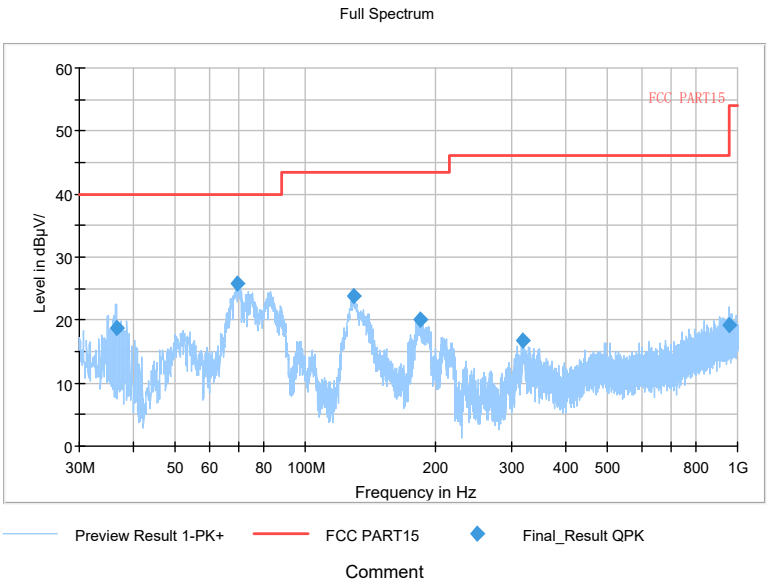

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

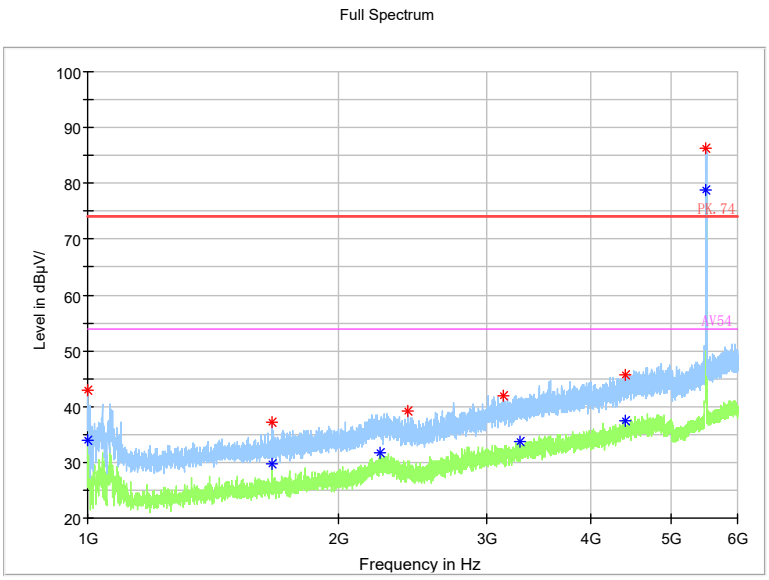

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

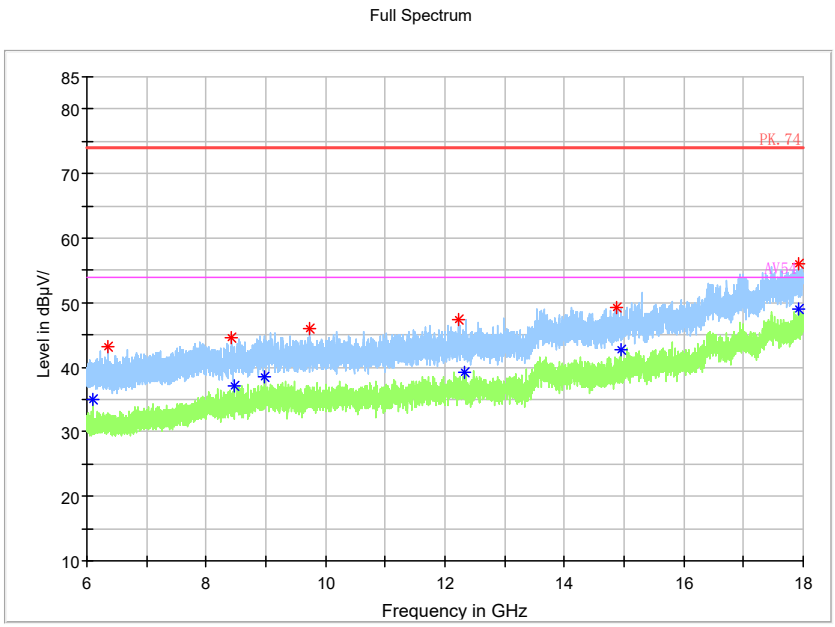

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

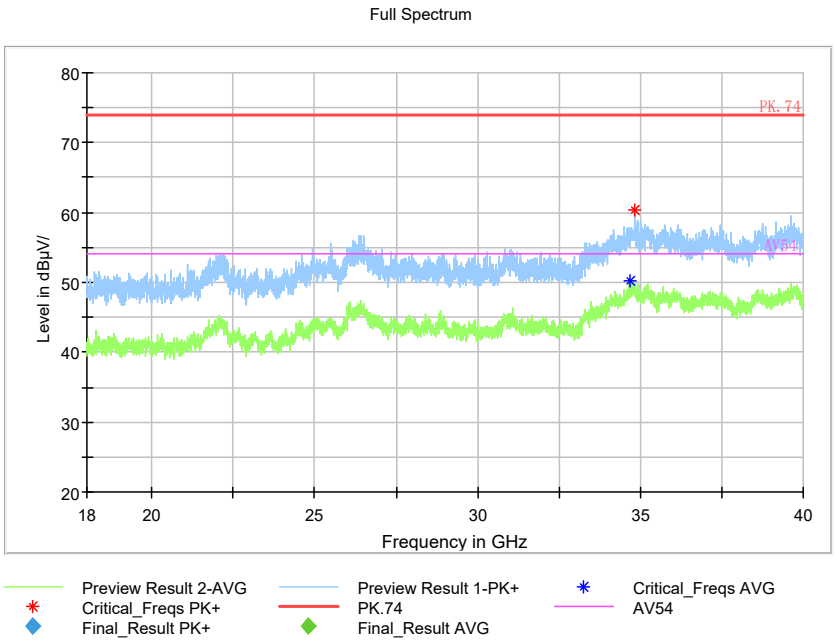

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

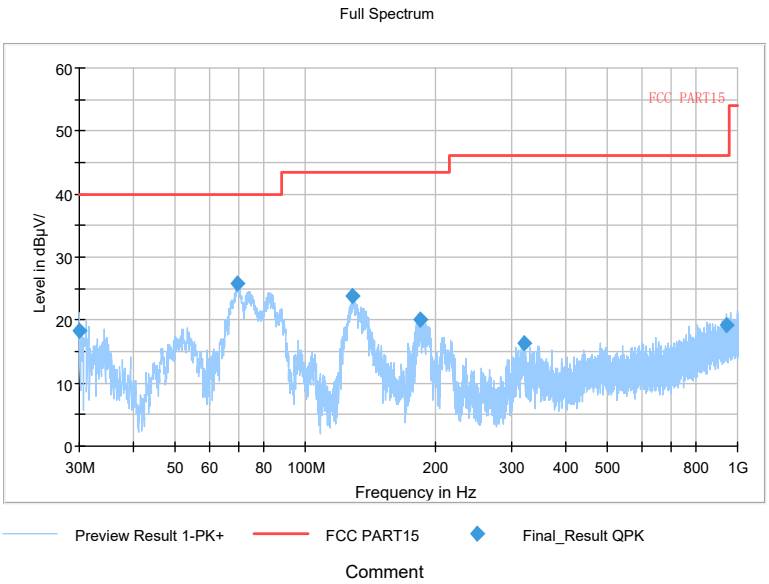

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

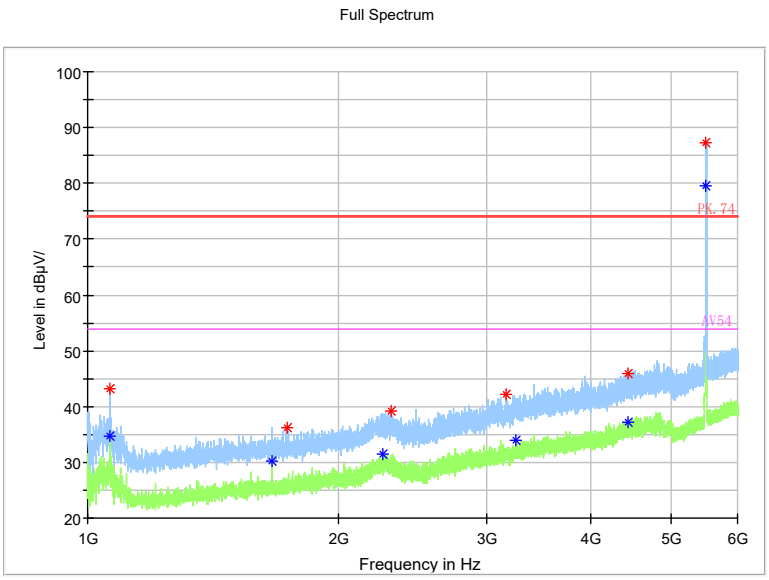

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

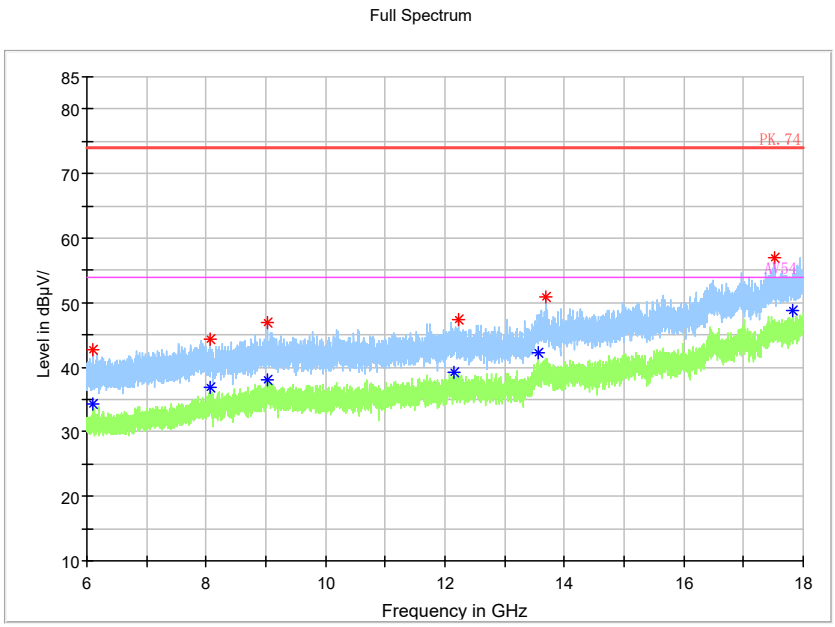

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

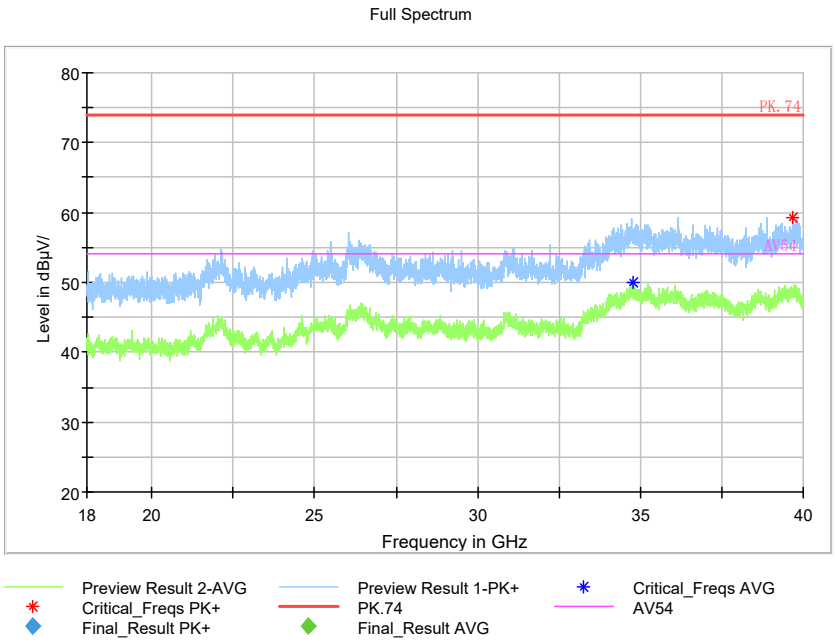

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5600
Channel No.:120

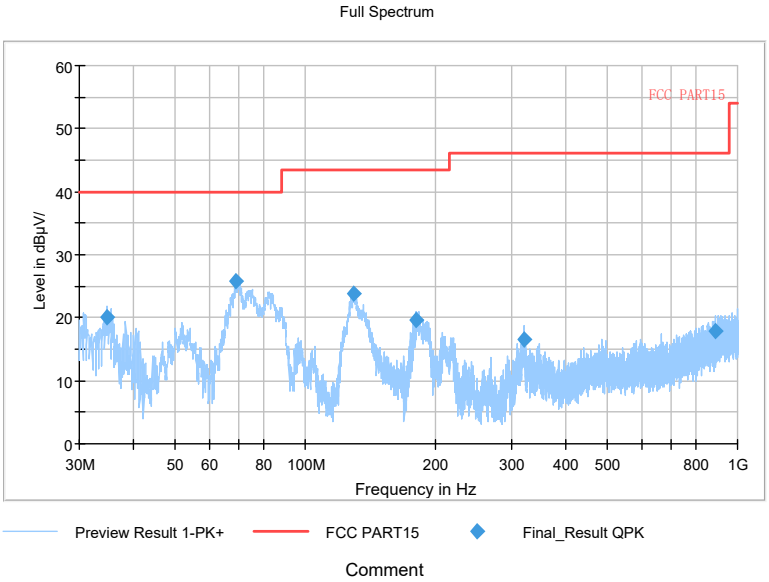

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

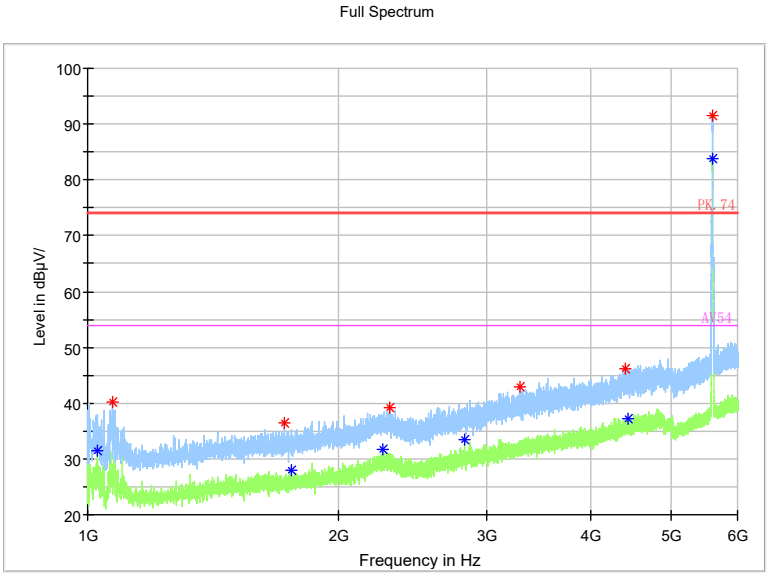

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

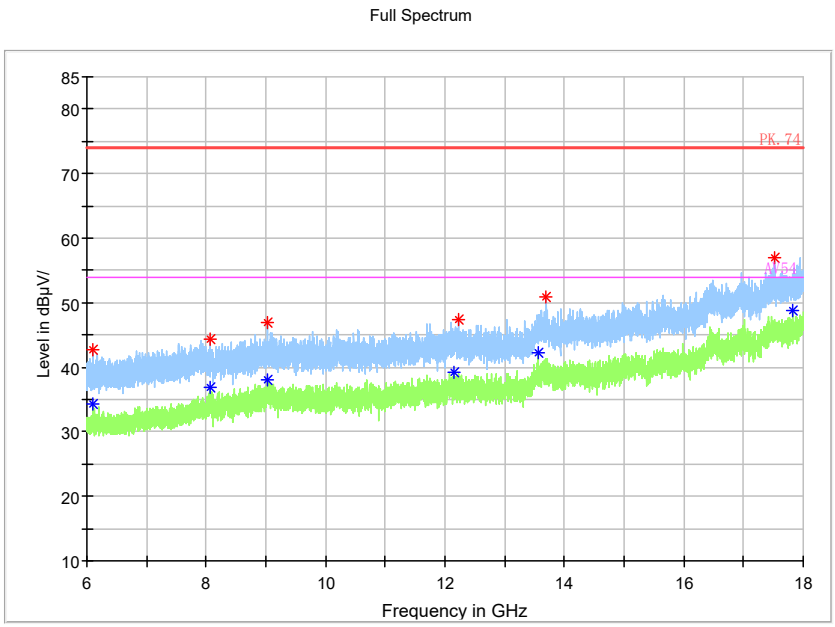

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

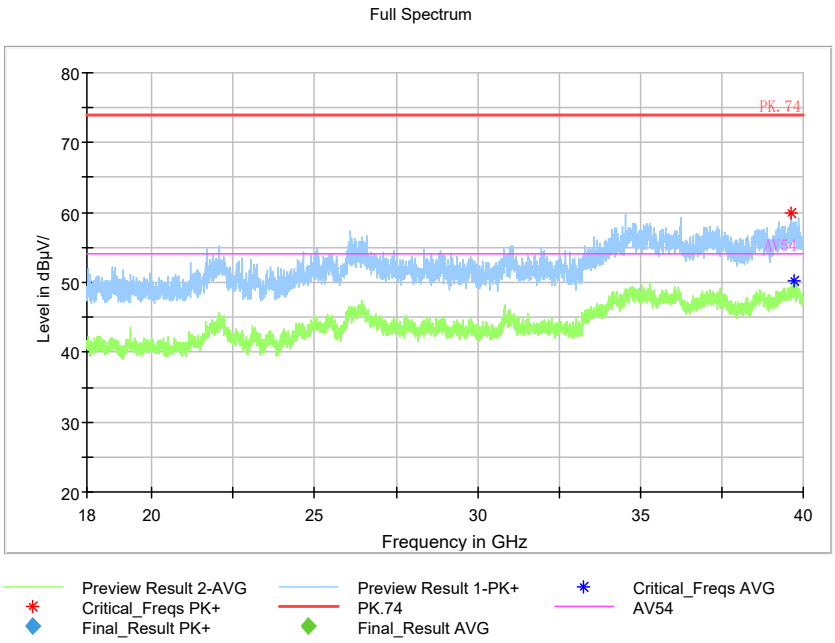

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

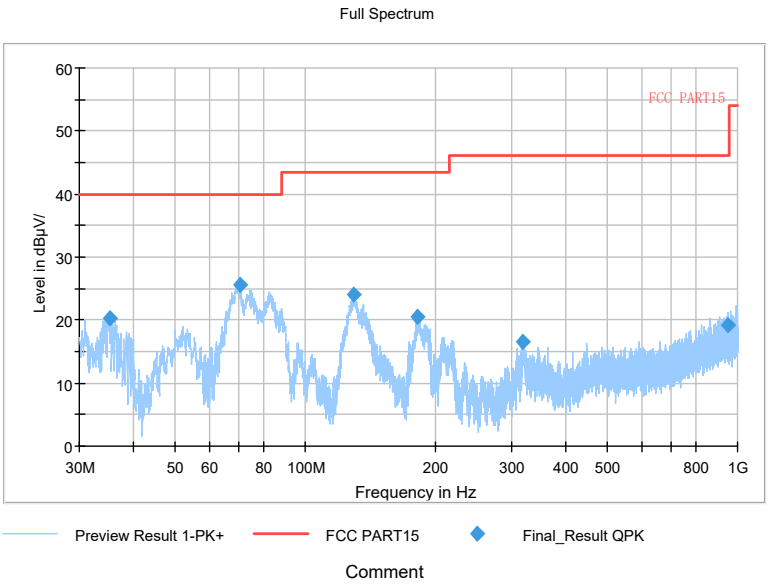

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

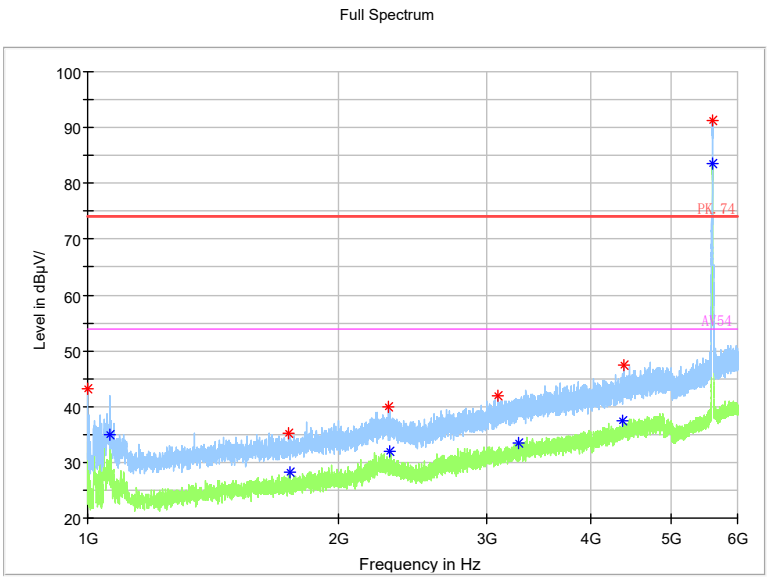

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

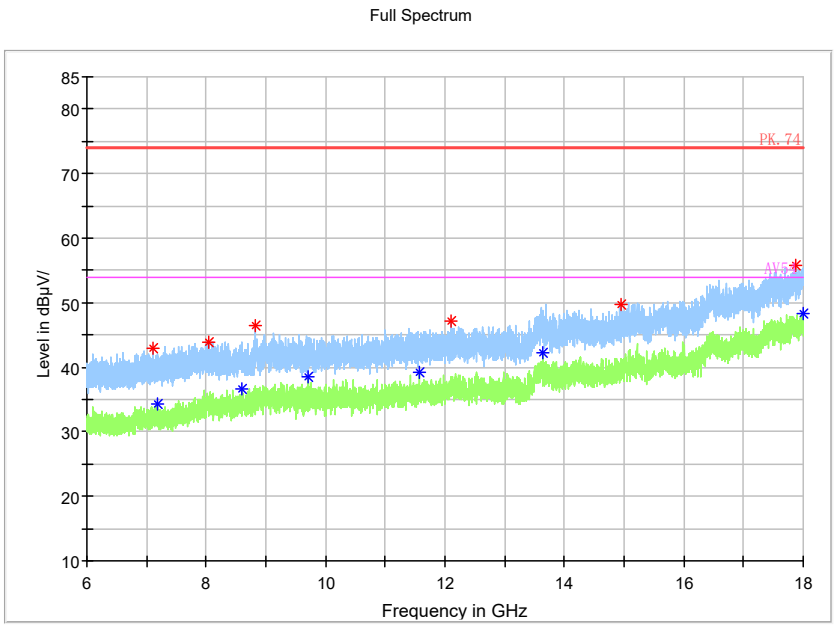

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

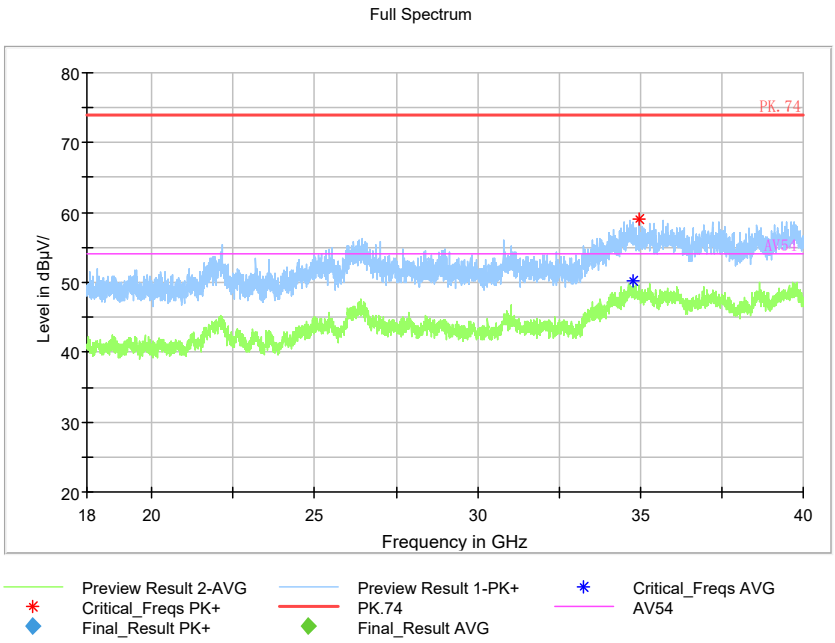

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

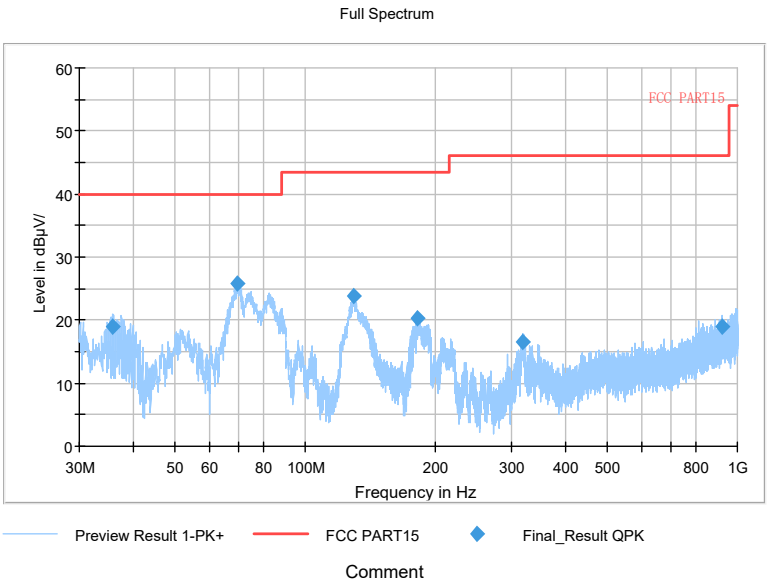

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

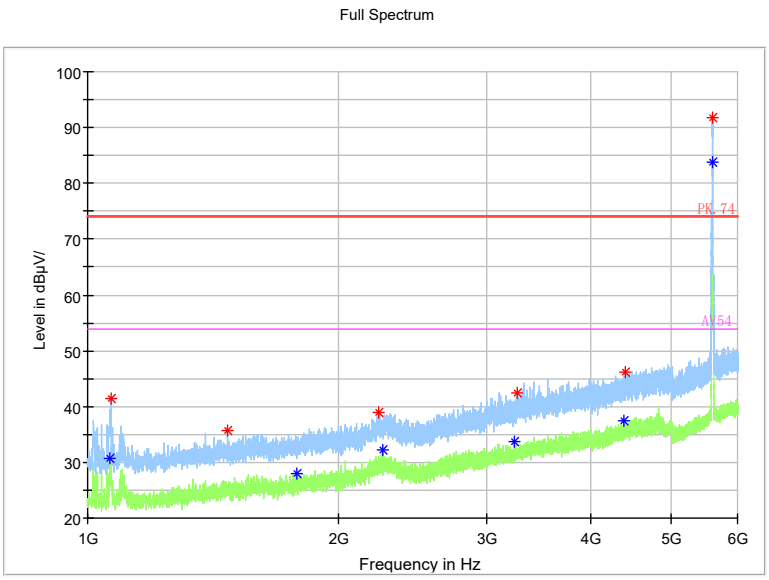

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

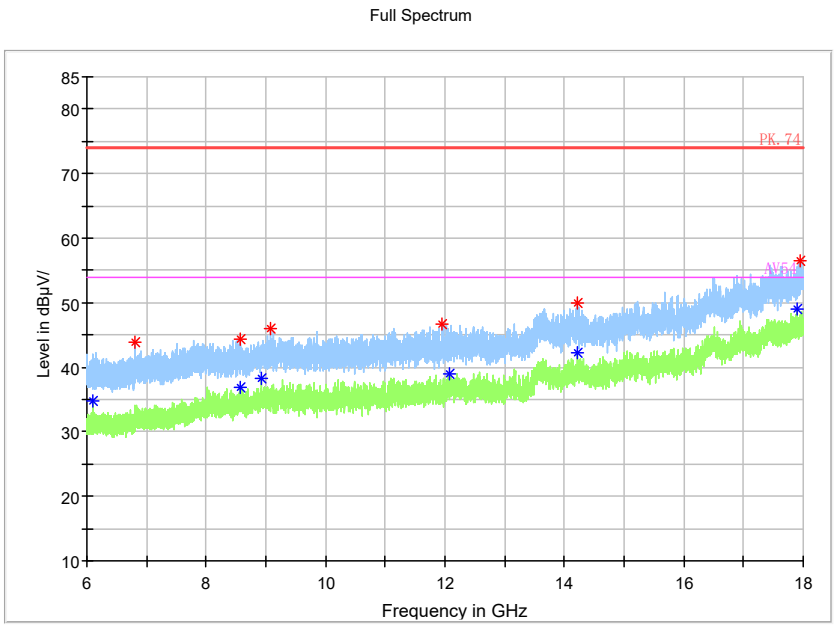

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

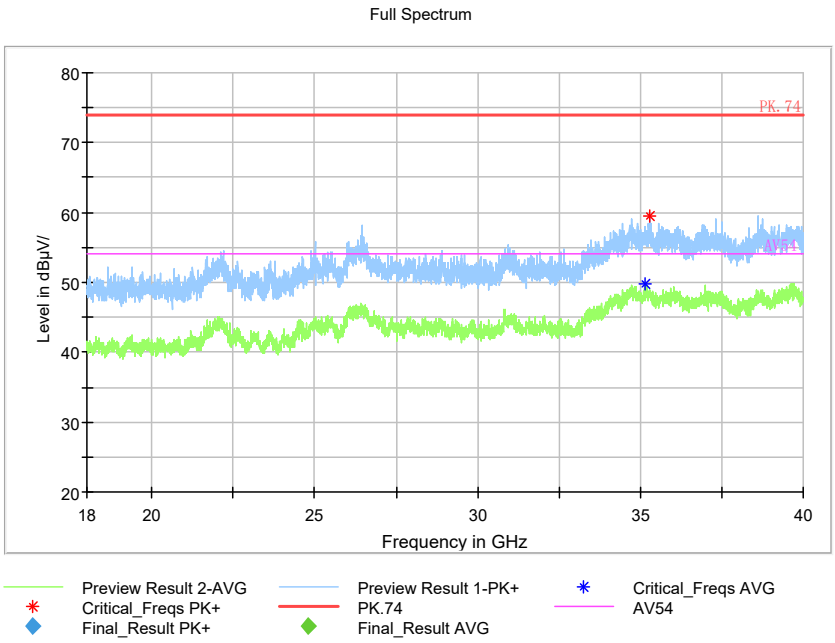

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5720

Channel No.:144

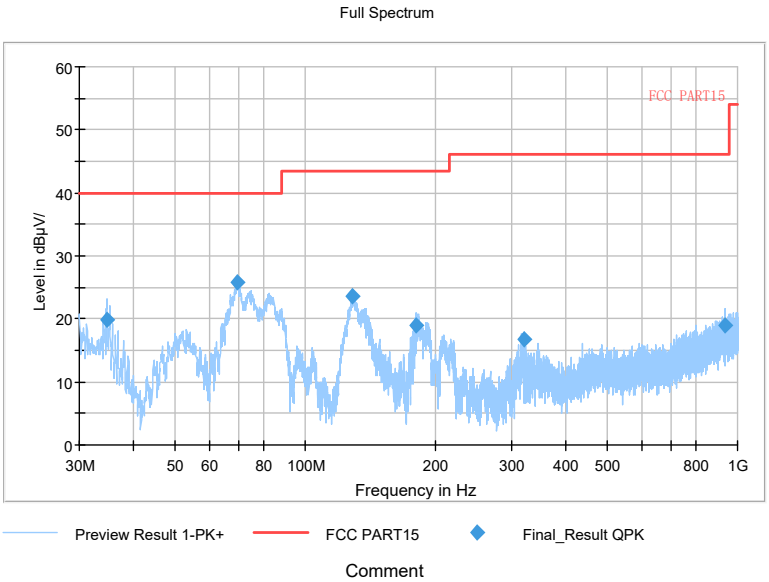

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11a

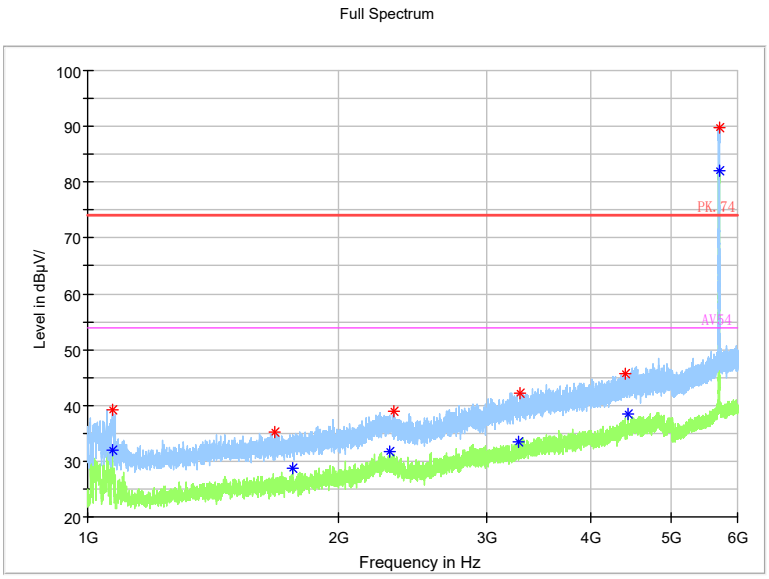

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

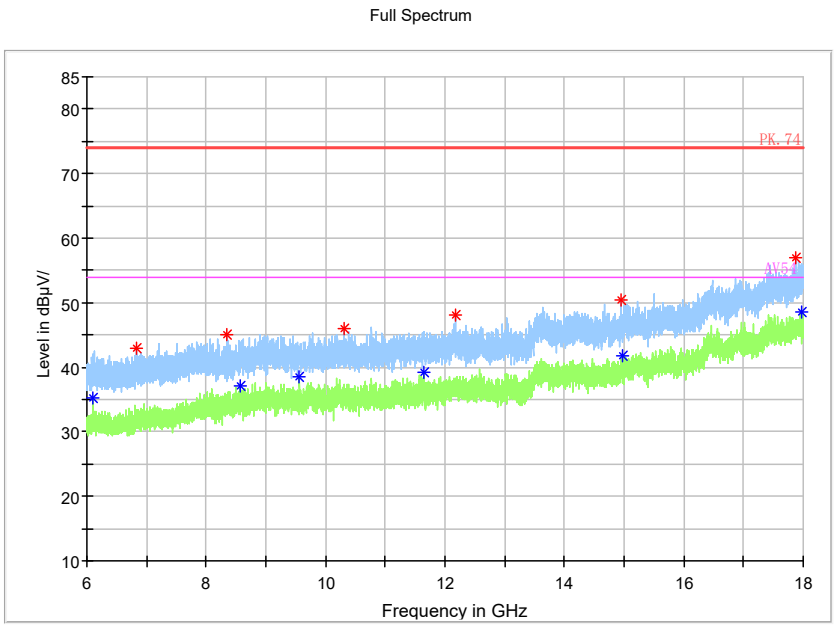

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

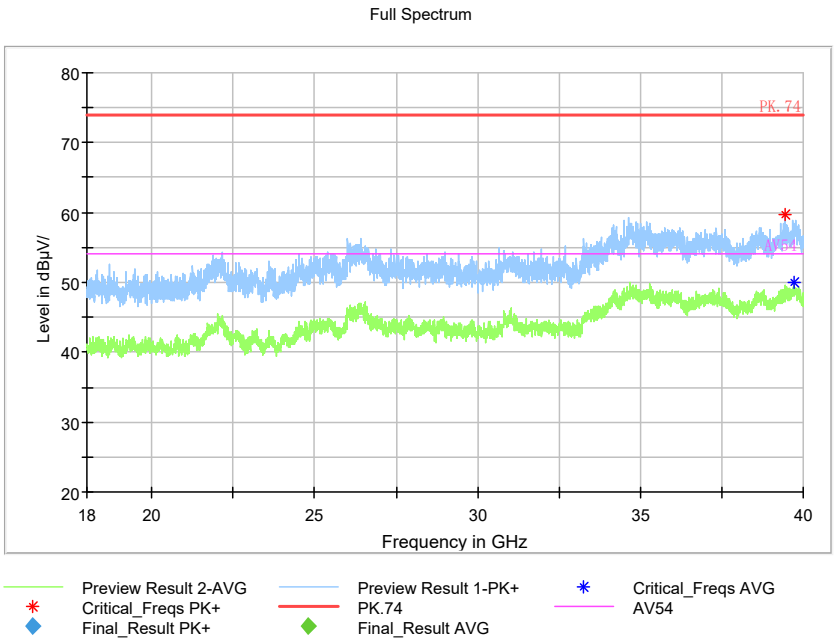

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11a

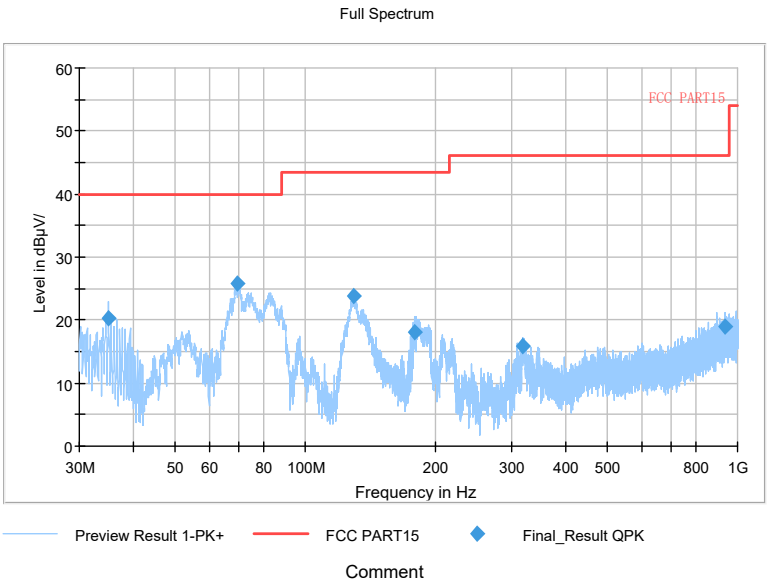

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT20)

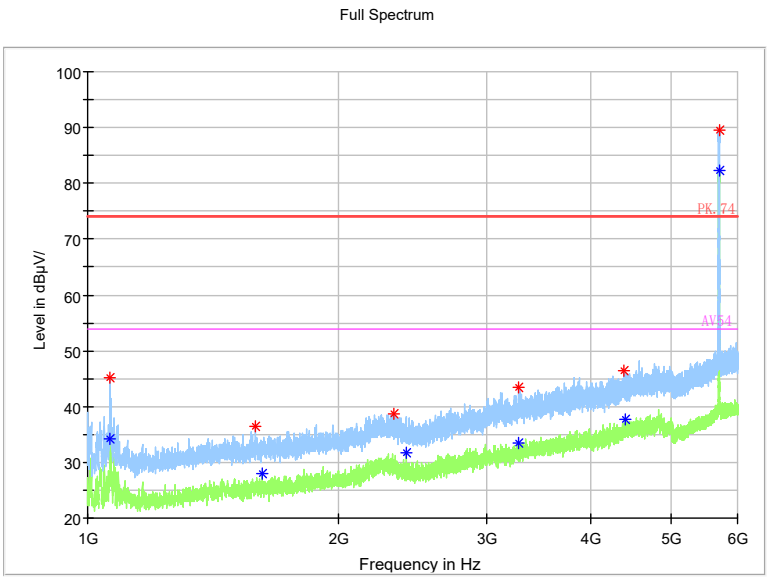

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

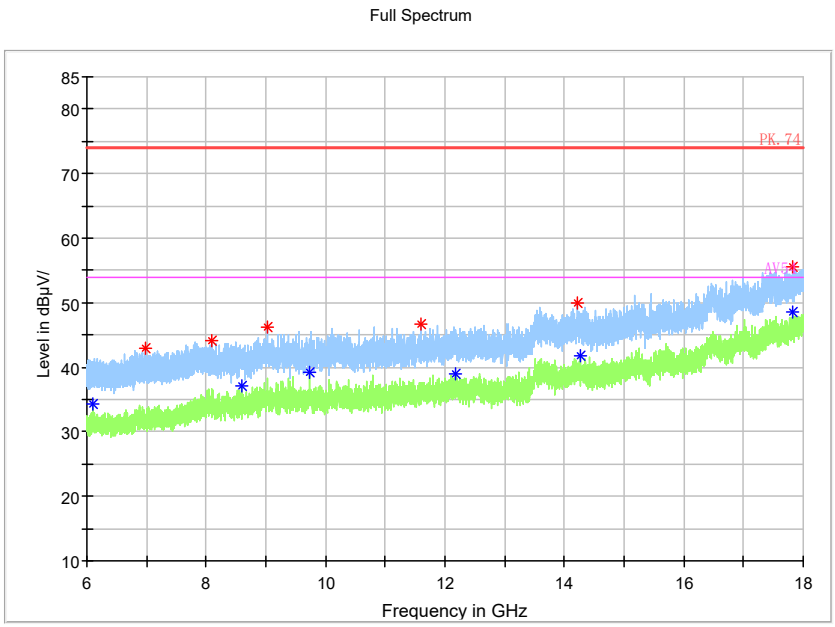

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

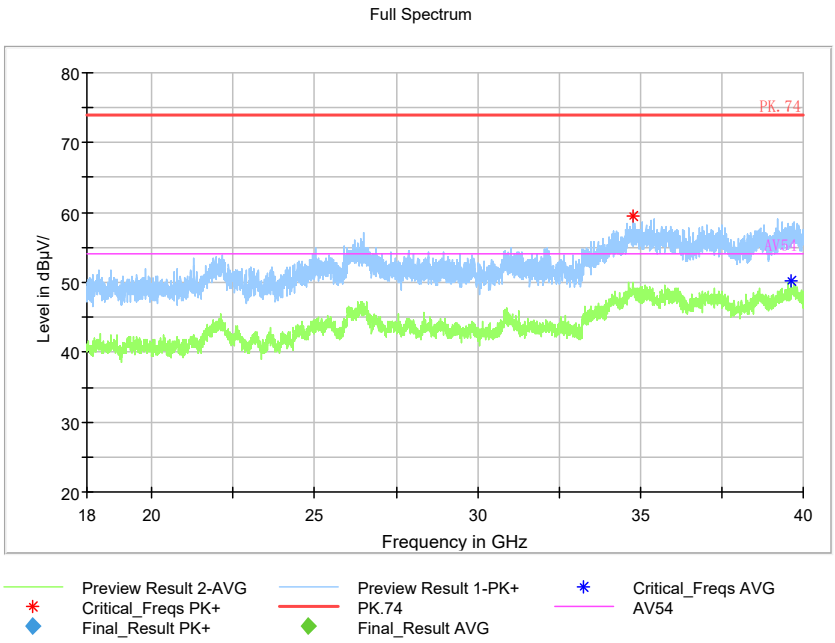

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

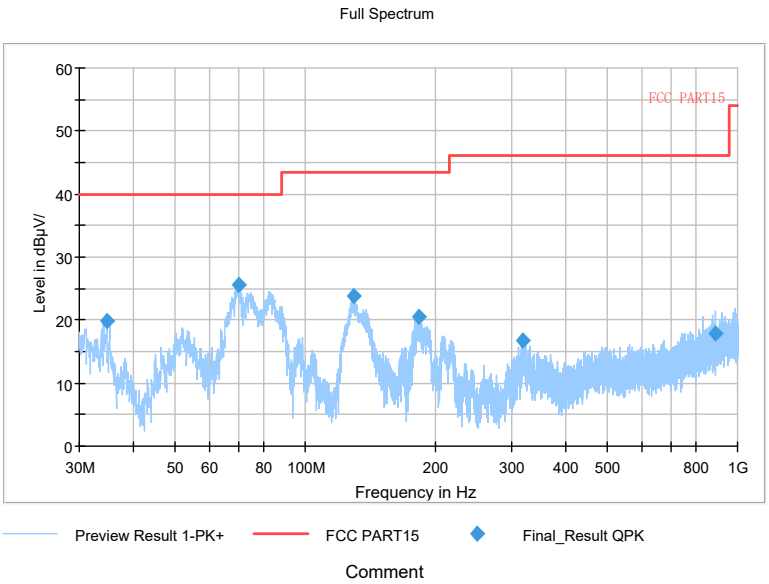

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT20)

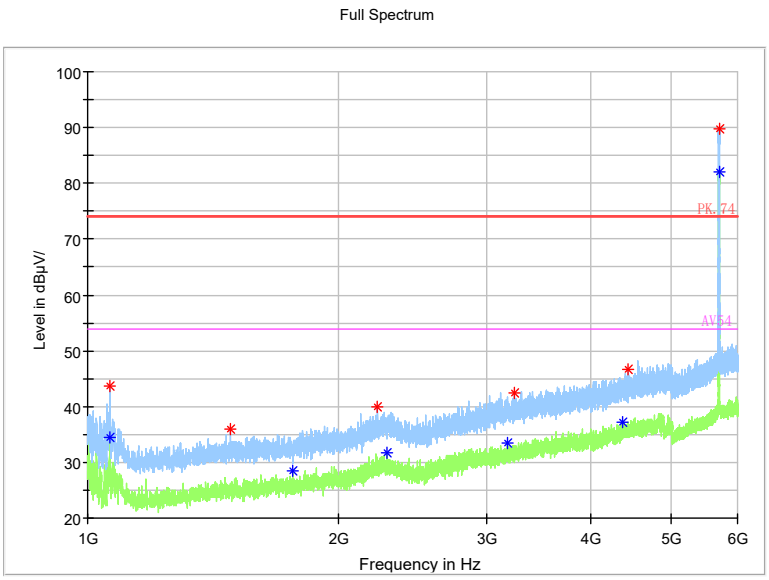

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

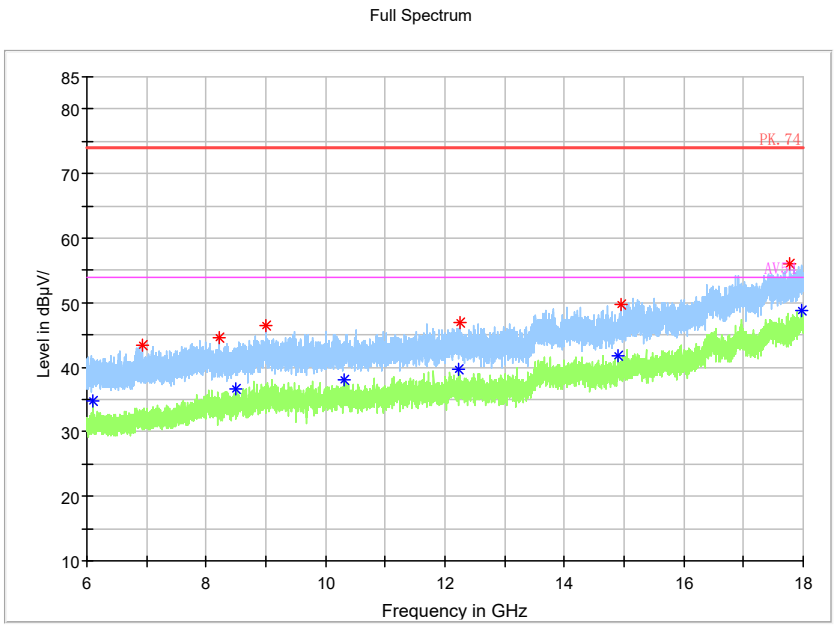

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

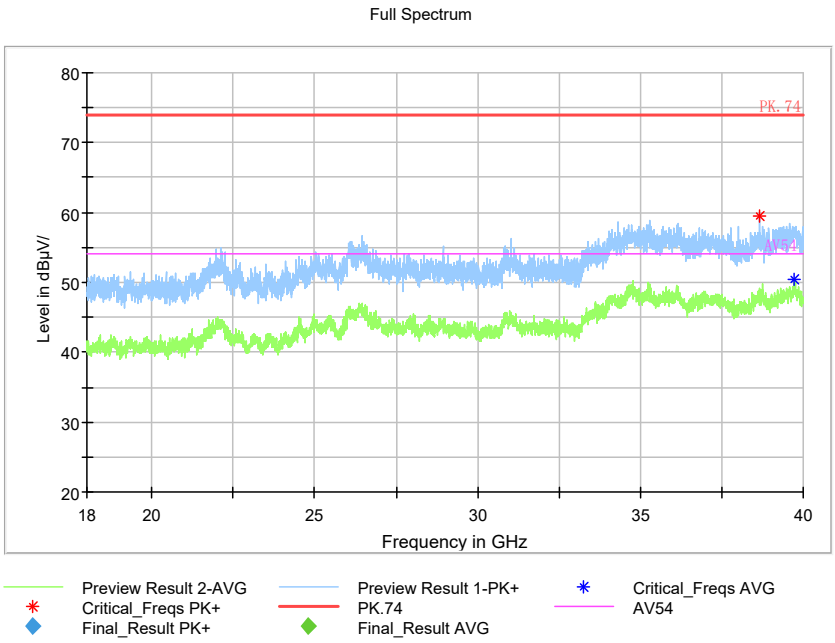

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT20)

Carrier frequency (MHz): 5510
Channel No.:102

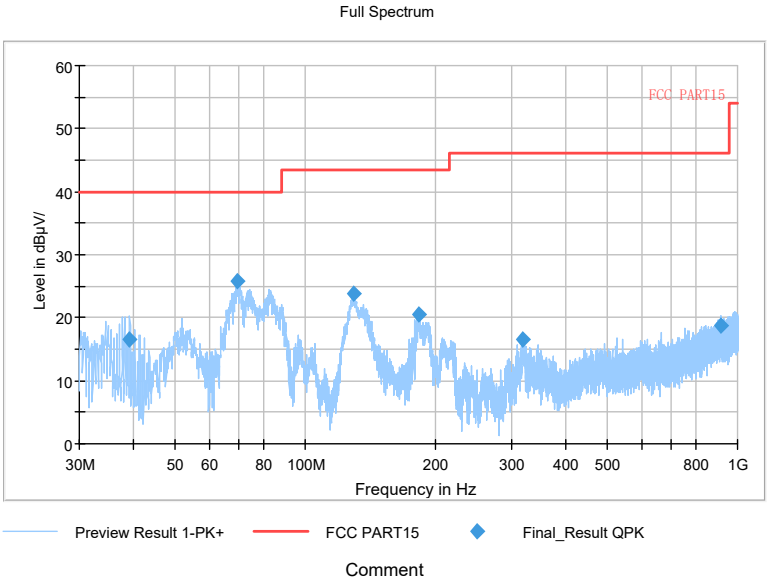

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)

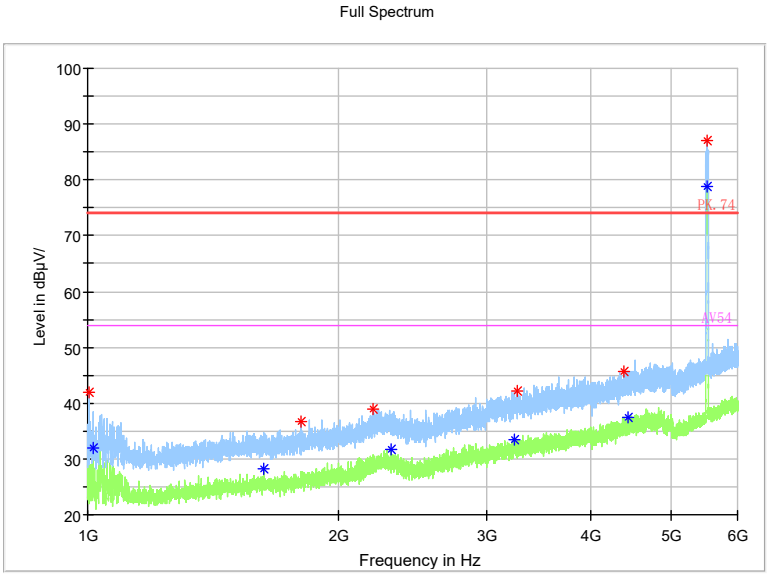

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

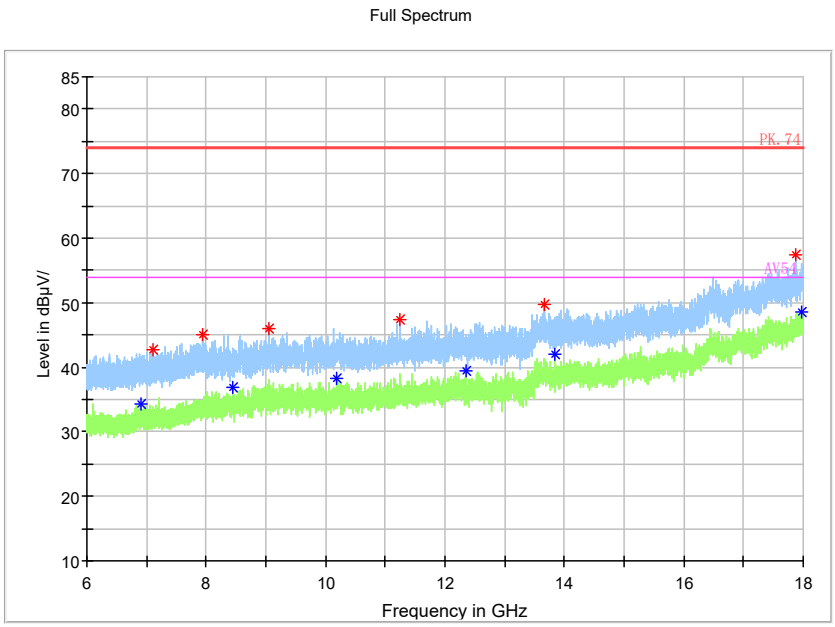

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

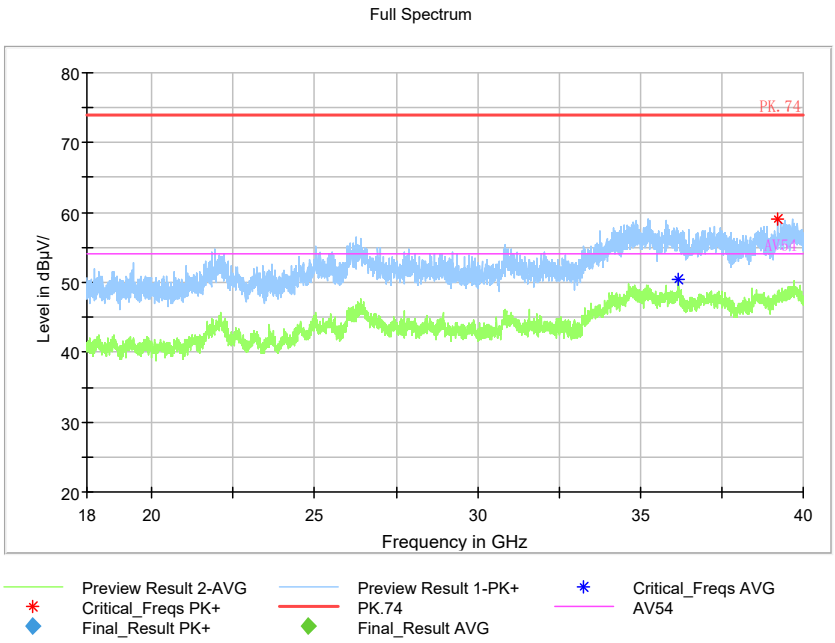

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)

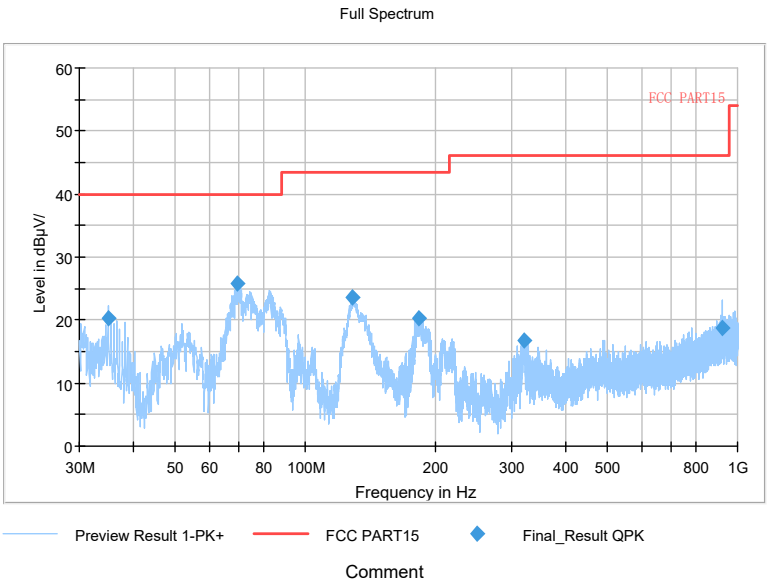

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11ac(VHT40)

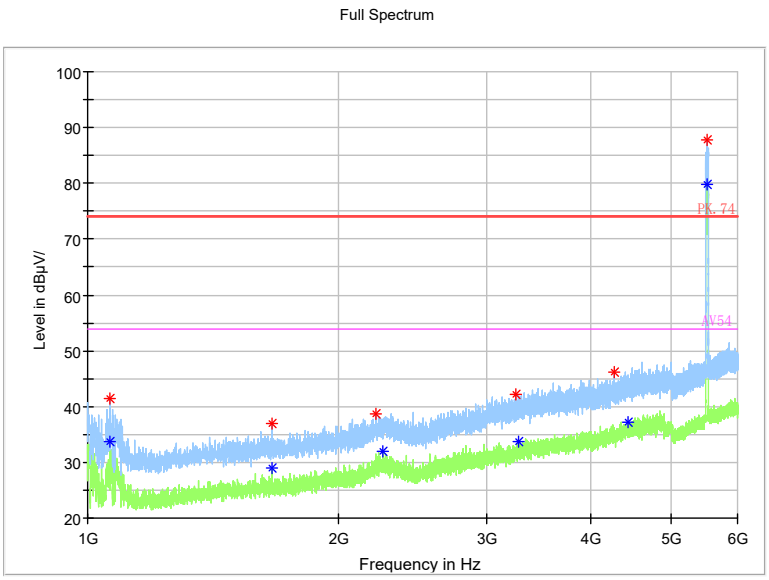

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

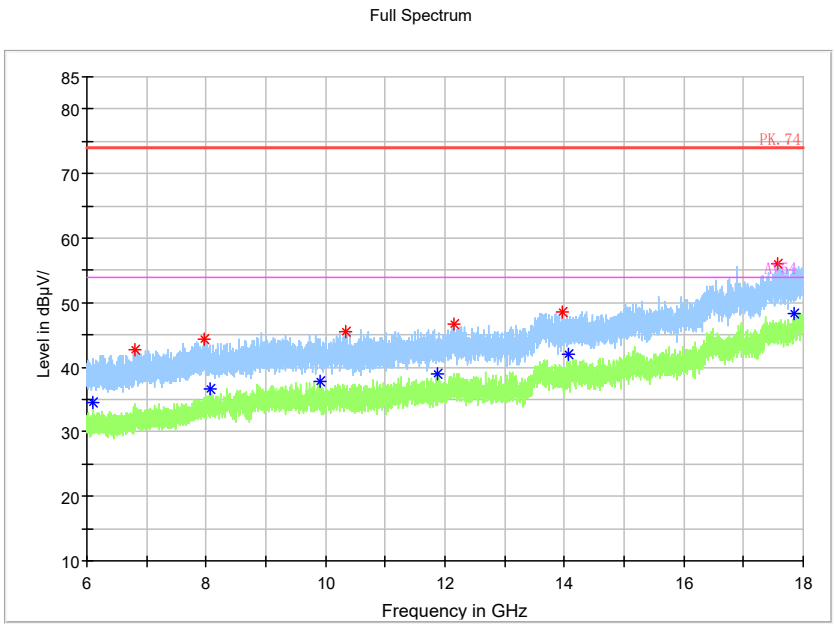

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

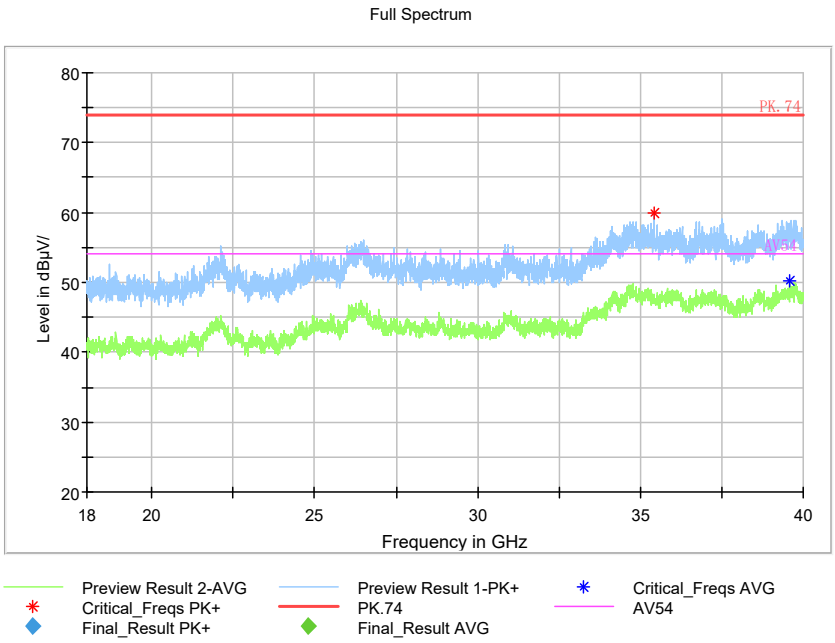

Frequency Range: 18GHz -40GHz
Detector: Av mode and PK mode
Test Mode: 802.11ac(VHT40)

Carrier frequency (MHz): 5590

Channel No.:118

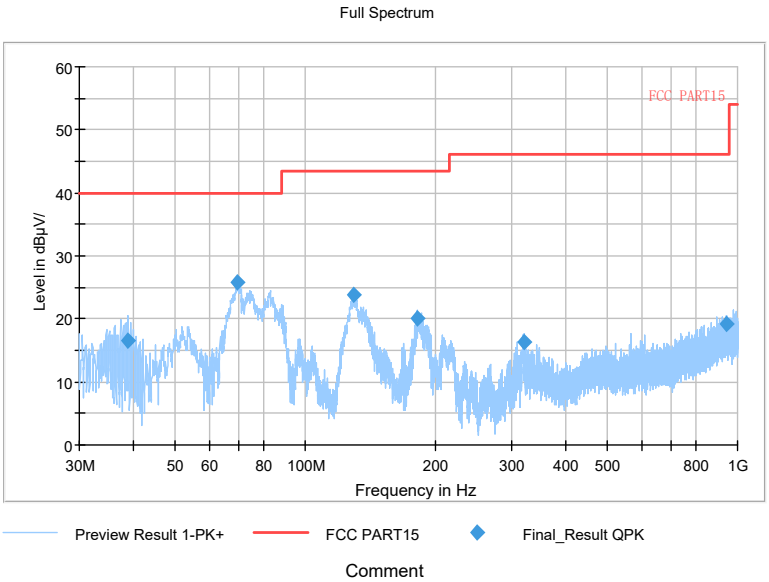

Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40)

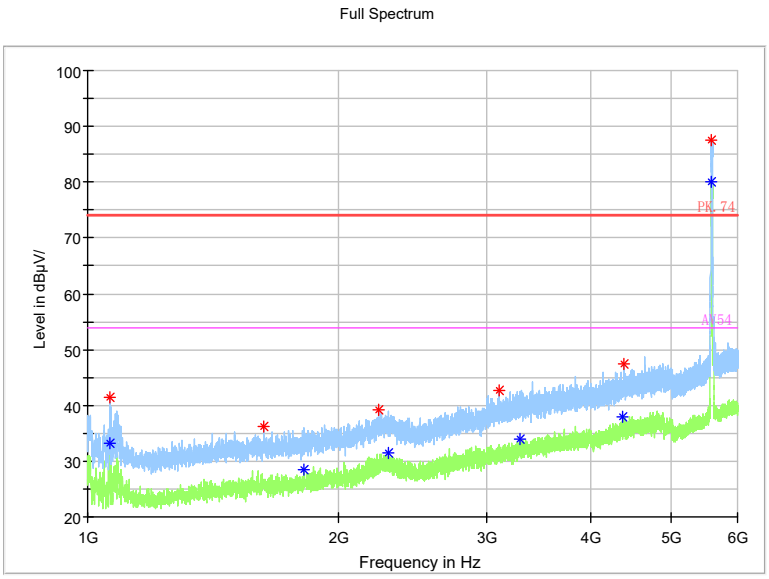

Frequency Range: 1GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40)