

#01_WCDMA V_RMC 12.2Kbps_Front_10mm_Ch4182

Communication System: WCDMA ; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_221028 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 41.244$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.32, 10.32, 10.32) @ 836.4 MHz; Calibrated: 2021/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2022/7/20
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.473 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.22 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.481 W/kg

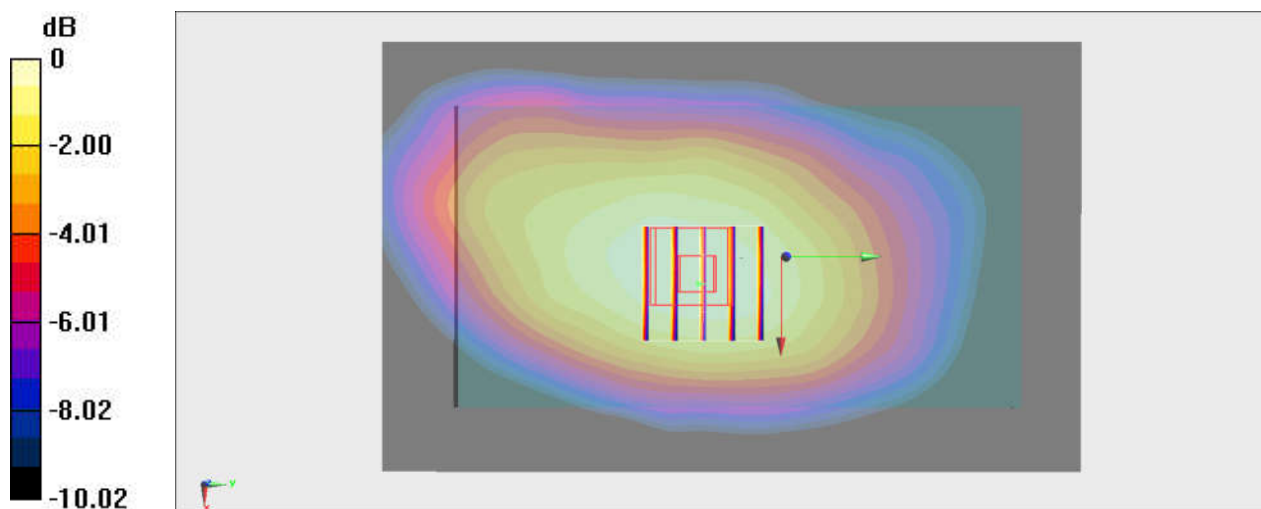

0 dB = 0.481 W/kg = -3.18 dBW/kg

#02_LTE Band 5_10M_QPSK_1_0_Front_10mm_Ch20525

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL_850_221028 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 41.243$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.32, 10.32, 10.32) @ 836.5 MHz; Calibrated: 2021/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2022/7/20
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.432 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.28 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.436 W/kg

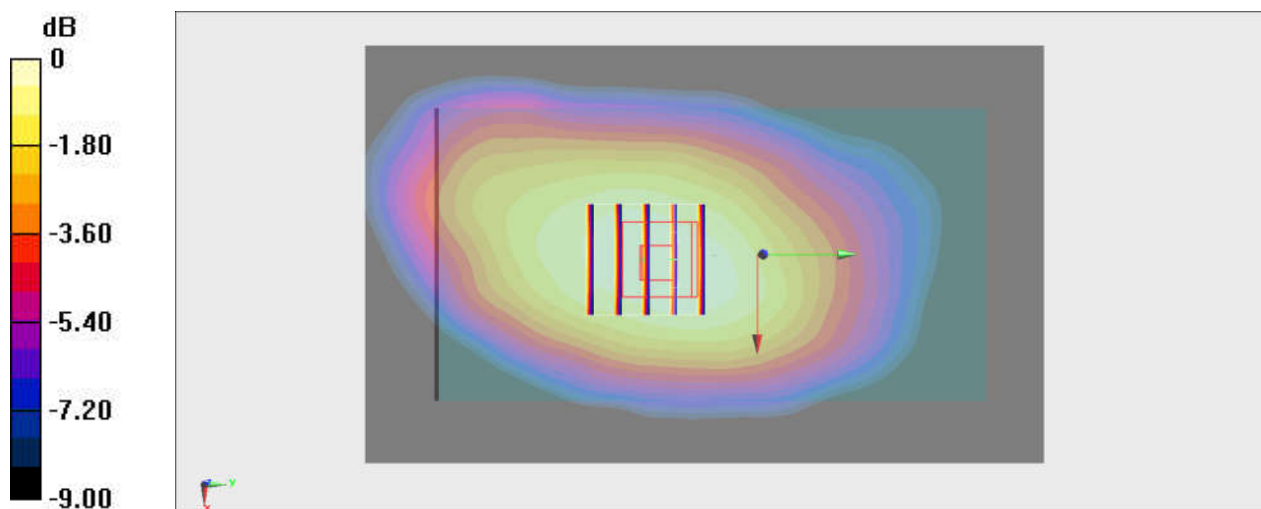

0 dB = 0.436 W/kg = -3.61 dBW/kg

#03_LTE Band 12_10M_QPSK_1_0_Front_10mm_Ch23095

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_221028 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.532$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.52, 10.52, 10.52) @ 707.5 MHz; Calibrated: 2021/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2022/7/20
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.185 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.48 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

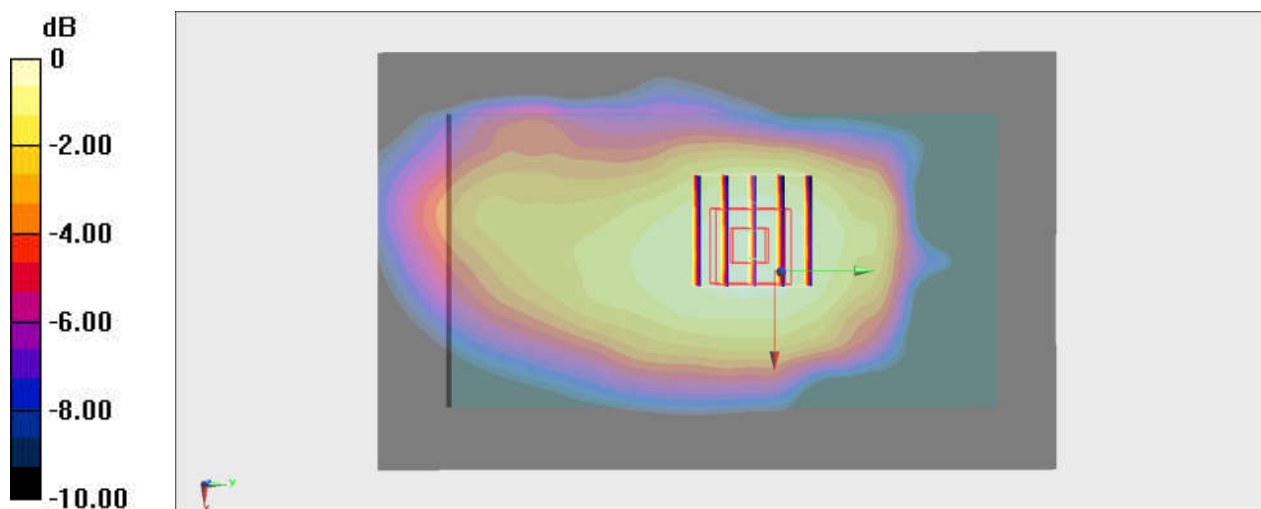

0 dB = 0.186 W/kg = -7.30 dBW/kg

#04_LTE Band 41_20M_QPSK_1_0_Front_10mm_Ch39750

Communication System: LTE; Frequency: 2506 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_221029 Medium parameters used: $f = 2506$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 38.49$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.06, 8.06, 8.06) @ 2506 MHz; Calibrated: 2021/11/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2022/7/20
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.508 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.50 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.504 W/kg

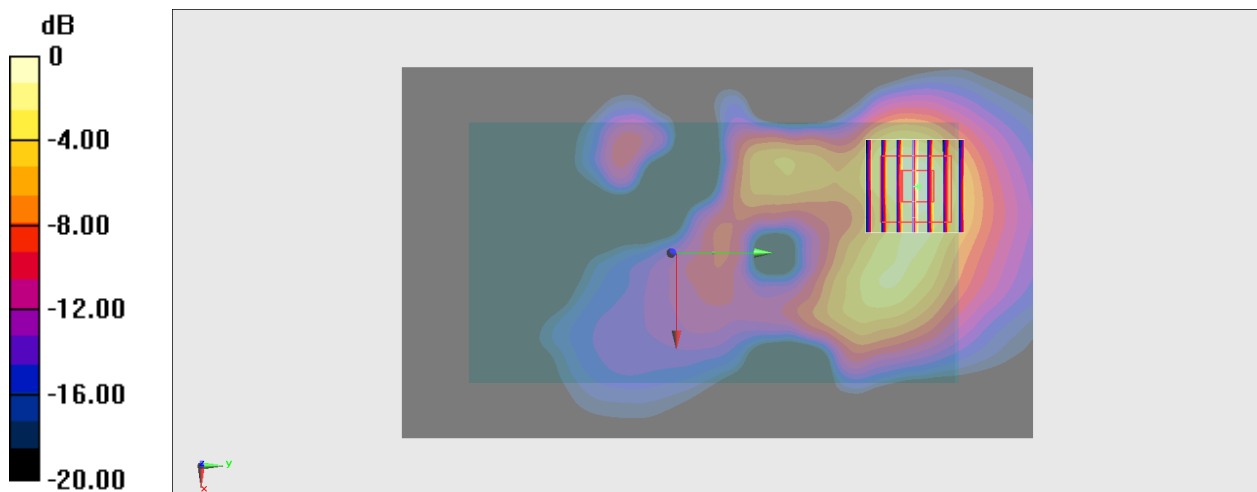

0 dB = 0.504 W/kg = -2.98 dBW/kg

#05_WLAN2.4GHz_802.11b 1Mbps_Front_10mm_Ch13

Communication System: 802.11b; Frequency: 2472 MHz; Duty Cycle: 1:1.017

Medium: HSL_2450_221105 Medium parameters used: $f = 2472$ MHz; $\sigma = 1.796$ S/m; $\epsilon_r = 38.36$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(7.34, 7.34, 7.34) @ 2472 MHz; Calibrated: 2022/7/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn316; Calibrated: 2022/1/26
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 001 BB; Serial: 1227
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.447 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.06 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.430 W/kg



Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.06 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.421 W/kg

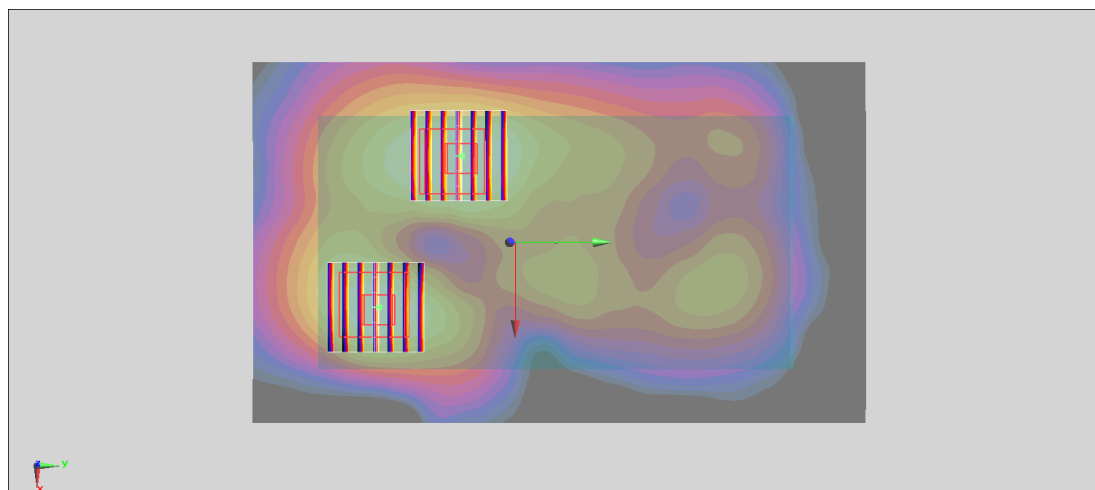

0 dB = 0.421 W/kg = -3.76 dBW/kg