



FCC RADIO TEST REPORT

FCC ID : APYHRO00331
Equipment : Smart phone
Brand Name : SHARP
Model Name : APYHRO00331
Applicant : SHARP CORPORATION
1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan
Manufacturer : SHARP CORPORATION
1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan
Standard : FCC Part 15 Subpart C §15.247

The product was received on Mar. 11, 2024 and testing was performed from Mar. 19, 2024 to Apr. 17, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR3D2225B	01	Initial issue of report	May 09, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	6.57 dB under the limit at 110.10 MHz
3.6	15.207	AC Conducted Emission	Pass	14.97 dB under the limit at 1.49 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Lucy Wu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac, NFC, and GNSS.
Antenna Type	WWAN: <Ant. 0> : Monopole Antenna <Ant. 1> : PIFA Antenna <Ant. 2> : Monopole Antenna WLAN: Loop Antenna Bluetooth: Loop Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna NFC: Loop Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-4.3

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

Item	Main		2nd Source			
	Main Sample		Sample 2		Sample 3	
	Vendor	Model Number	Vendor	Model Number	Vendor	Model Number
Memory	SAMSUNG	SA05P91D010	Hynix	SA0QG9G5010	Micron	SA0D81SF010
PA	QORVO	SA07048B020 (QM77048B)	QORVO	SA077048020 (QM77048)	QORVO	SA077048020 (QM77048)
FPC_USB	PBH	MESX314004A	SUNFLEX	MESX114012A	SUNFLEX	MESX114012A
FPC_AJ	PBH	MESX314003A	SUNFLEX	MESX114013A	SUNFLEX	MESX114013A
FPC_Main	PBH	MESX414001A	SUNFLEX	MESX414011A	SUNFLEX	MESX414011A
FPC_SPK	AKM	MESX414004A	SUNFLEX	MESX114015A	SUNFLEX	MESX114015A
FPC_Side_Key	PBH	MESX414002A	AKM	MESX414012A	AKM	MESX414012A
FPC_flashlight	PBH	MESX414003A	SUNFLEX	MESX414013A	SUNFLEX	MESX414013A
rear housing	DY	MESX461130A	COXON	MESX461131A	COXON	MESX461131A
Battery	SCUD	BPSX400001S (SX4)	EVE	BPSX400002S (X4)	EVE	BPSX400002S (X4)
Display	DJN	SLX1462BX00	CPT	SLX65WM2X00	CPT	SLX65WM2X00
Camera 50M	Shinotech	S0CNN72B000	Union Image	S0C50A350A0	Union Image	S0C50A350A0
Camera 8M	Shinotech	S0CF891B060	Union Image	S0C8F357060	Union Image	S0C8F357060
E-compass	MEMSIC	SA0C56030A0	QST	SA0C6308130	QST	SA0C6308130
DPDT	MAXSCEND	SA08546C020	CANAANTEK	SA01122N080	CANAANTEK	SA01122N080
Switch	MAXSCEND	SA08621E080	Richwave	SA086102080	Richwave	SA086102080
P-sensor	EMINENT	SA0MN789080	Sensortek	SA033562020	Sensortek	SA033562020
G- sensor	TDK	SA042670020	Bosch	SA0MI320020	Bosch	SA0MI320020

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, CO07-HY, 03CH15-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + Earphone + MPEG4 + Battery 1 + USB Cable (Charging from AC Adapter) for Main Sample
Remark: - For Radiated Test Cases, the tests were performed with Battery 1 and Main Sample. - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Earphone	NOKIA	WH-108	N/A	Unshielded, 1.5 m	N/A

2.5 EUT Operation Test Setup

The RF test items, make the EUT (SW: A3130) get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

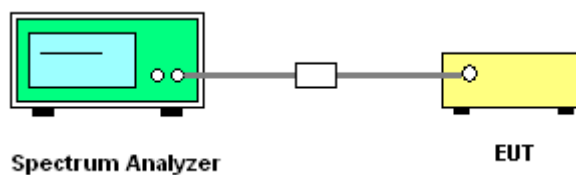

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

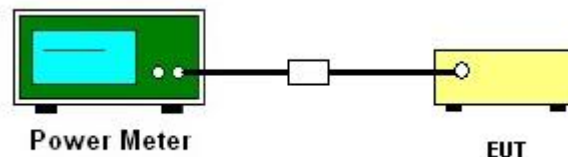

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

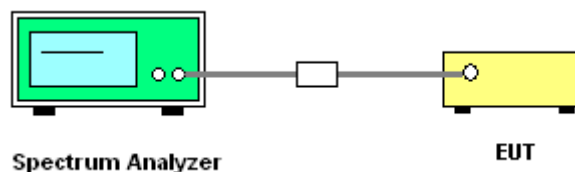

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

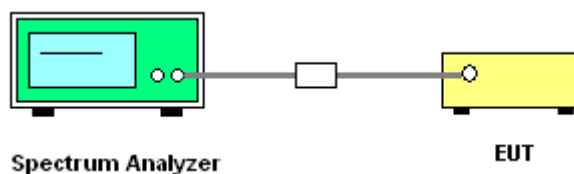

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

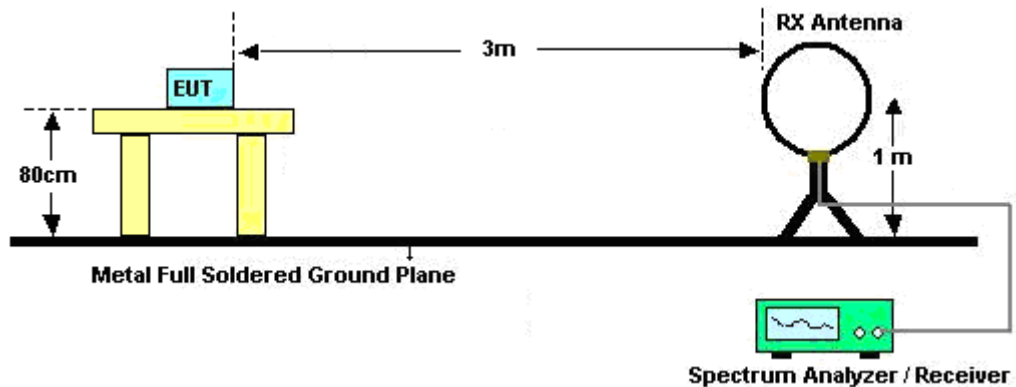


For radiated test from 30MHz to 1GHz

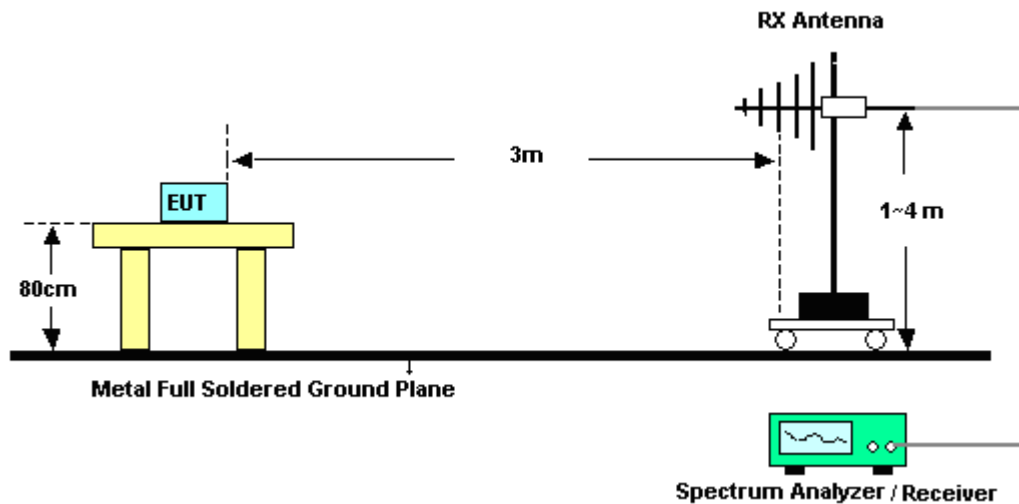

For radiated test from 1GHz to 18GHz

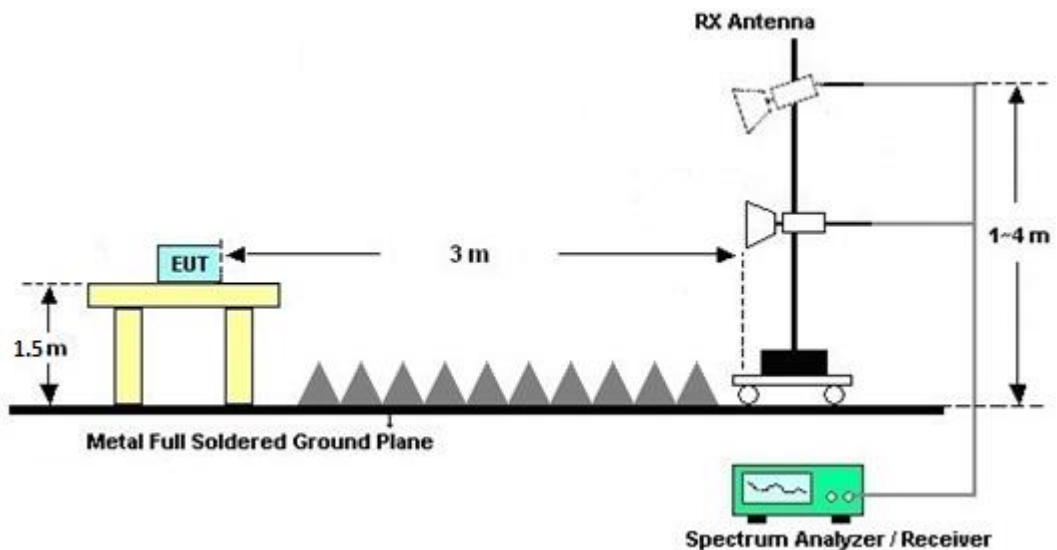

For radiated test above 18GHz

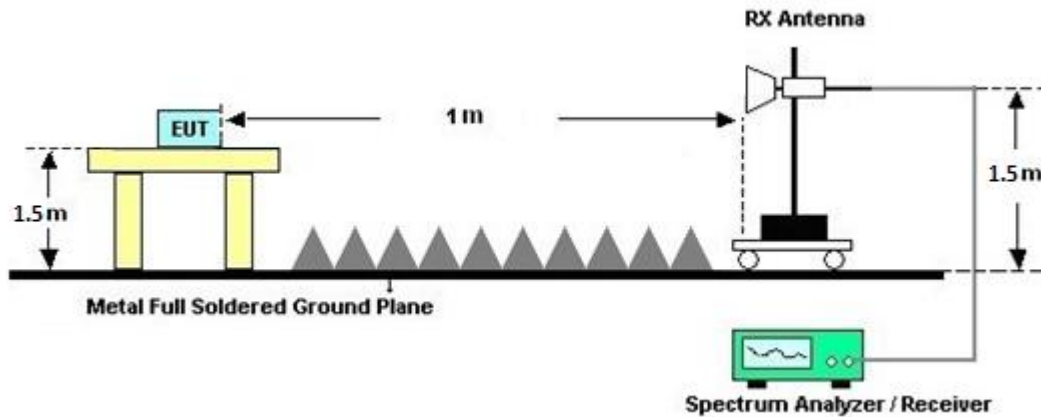

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

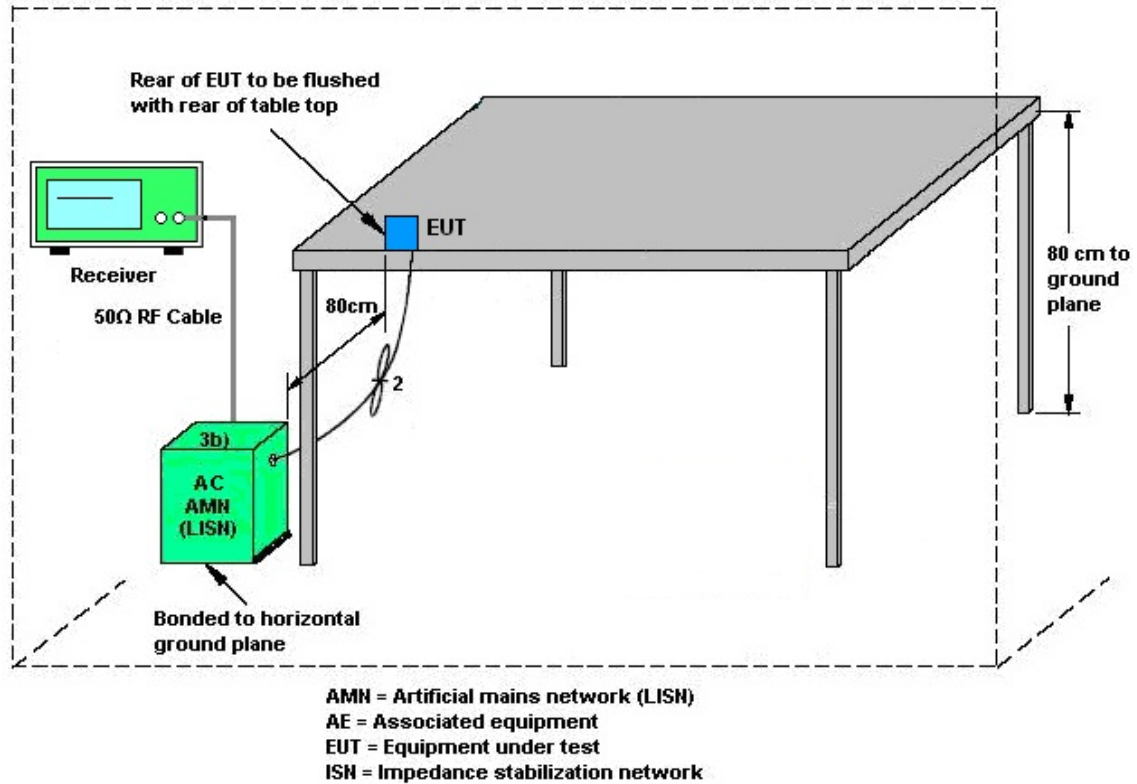

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Mar. 29, 2024~ Apr. 17, 2024	Sep. 11, 2024	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	41912 & 05	30MHz~1GHz	Feb. 04, 2024	Mar. 29, 2024~ Apr. 17, 2024	Feb. 03, 2025	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02294	1GHz~18GHz	Jun. 30, 2023	Mar. 29, 2024~ Apr. 17, 2024	Jun. 29, 2024	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1223	18GHz~40GHz	Jul. 10, 2023	Mar. 29, 2024~ Apr. 17, 2024	Jul. 09, 2024	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 25, 2023	Mar. 29, 2024~ Apr. 17, 2024	Dec. 24, 2024	Radiation (03CH15-HY)
Preamplifier	EMEC	EM01G18G	060837	1GHz~18GHz	Feb. 15, 2024	Mar. 29, 2024~ Apr. 17, 2024	Feb. 14, 2025	Radiation (03CH15-HY)
Preamplifier	EM Electronics	EM01G18G	060802	1GHz~18GHz	Feb. 29, 2024	Mar. 29, 2024~ Apr. 17, 2024	Feb. 28, 2025	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 27, 2023	Mar. 29, 2024~ Apr. 17, 2024	Jun. 26, 2024	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Oct. 06, 2023	Mar. 29, 2024~ Apr. 17, 2024	Oct. 05, 2024	Radiation (03CH15-HY)
Spectrum Analyzer	Keysight	N9010B	MY60241058	10Hz~44GHz	Jul. 06, 2023	Mar. 29, 2024~ Apr. 17, 2024	Jul. 05, 2024	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 29, 2024~ Apr. 17, 2024	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 29, 2024~ Apr. 17, 2024	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24(k5)	RK-000451	N/A	N/A	Mar. 29, 2024~ Apr. 17, 2024	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104, 102E	MY582185/4, 519228/2,803 950/2	N/A	Jun. 13, 2023	Mar. 29, 2024~ Apr. 17, 2024	Jun. 12, 2024	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18-40G	Jan. 02, 2024	Mar. 29, 2024~ Apr. 17, 2024	Jan. 01, 2025	Radiation (03CH15-HY)
Filter	Wainwright	WLJ4-1000-15 30-6000-40ST	SN4	1.53GHz Low Pass Filter	Jun. 14, 2023	Mar. 29, 2024~ Apr. 17, 2024	Jun. 13, 2024	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN4	3GHz High Pass Filter	Jun. 14, 2023	Mar. 29, 2024~ Apr. 17, 2024	Jun. 13, 2024	Radiation (03CH15-HY)
Hygrometer	TECEPEL	DTM-302	SN4	N/A	Jul. 26, 2023	Mar. 29, 2024~ Apr. 17, 2024	Jul. 25, 2024	Radiation (03CH15-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Mar. 19, 2024~ Apr. 02, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 35 (NO:109)	10MHz~6GHz	Jun. 15, 2024	Mar. 19, 2024~ Apr. 02, 2024	Jun. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Jan. 24, 2024	Mar. 19, 2024~ Apr. 02, 2024	Jan. 23, 2025	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 08, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 08, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz-200MHz	Oct. 20, 2023	Apr. 08, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Apr. 08, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Apr. 08, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 10, 2024	Apr. 08, 2024	Mar. 09, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Apr. 08, 2024	Sep. 19, 2024	Conduction (CO07-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Wei Shun	Temperature:	21~25	°C
Test Date:	2024/3/19~2024/04/02	Relative Humidity:	51~54	%

TEST RESULTS DATA **6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.032	0.691	0.50	Pass
BLE	1Mbps	1	19	2440	1.033	0.705	0.50	Pass
BLE	1Mbps	1	39	2480	1.031	0.701	0.50	Pass

TEST RESULTS DATA **Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.50	30.00	-4.30	1.20	36.00	Pass
BLE	1Mbps	1	19	2440	5.90	30.00	-4.30	1.60	36.00	Pass
BLE	1Mbps	1	39	2480	5.00	30.00	-4.30	0.70	36.00	Pass

TEST RESULTS DATA **Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	4.83	-9.79	-4.30	8.00	Pass
BLE	1Mbps	1	19	2440	5.09	-9.52	-4.30	8.00	Pass
BLE	1Mbps	1	39	2480	4.42	-10.19	-4.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.055	1.170	0.50	Pass
BLE	2Mbps	1	19	2440	2.058	1.170	0.50	Pass
BLE	2Mbps	1	39	2480	2.053	1.166	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	5.40	30.00	-4.30	1.10	36.00	Pass
BLE	2Mbps	1	19	2440	6.00	30.00	-4.30	1.70	36.00	Pass
BLE	2Mbps	1	39	2480	5.10	30.00	-4.30	0.80	36.00	Pass




TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	4.64	-11.93	-4.30	8.00	Pass
BLE	2Mbps	1	19	2440	4.90	-11.66	-4.30	8.00	Pass
BLE	2Mbps	1	39	2480	4.21	-12.34	-4.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**6dB Bandwidth**


<1Mbps>

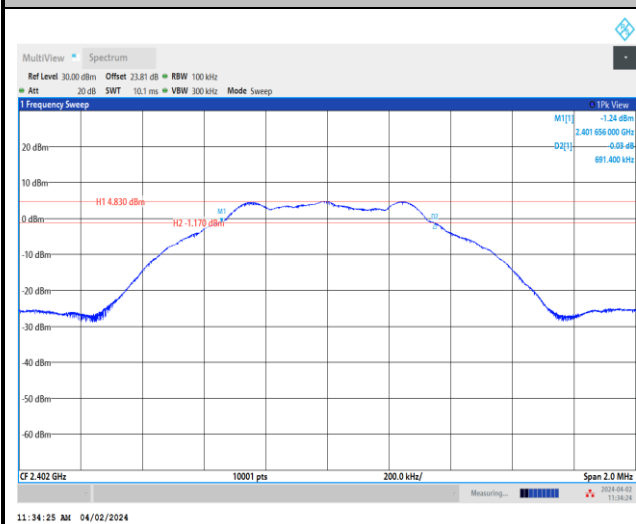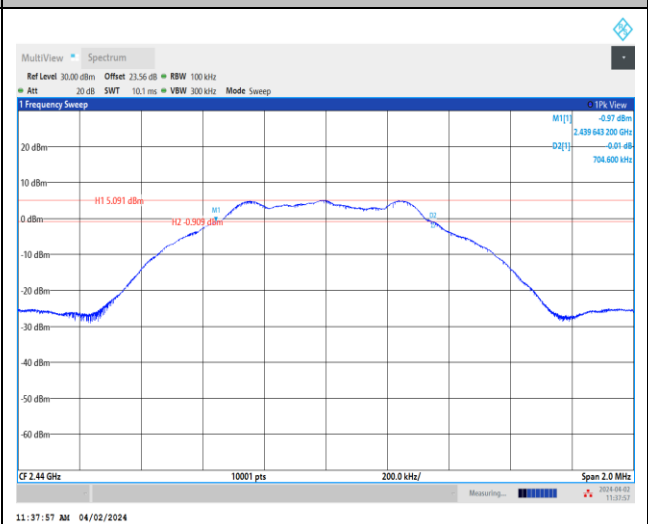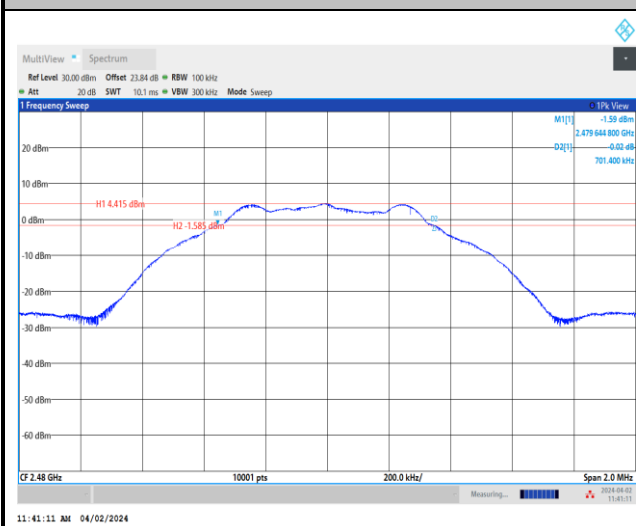6 dB Bandwidth Plot on Channel 00**6 dB Bandwidth Plot on Channel 19****6 dB Bandwidth Plot on Channel 39**




<2Mbps>


6 dB Bandwidth Plot on Channel 00

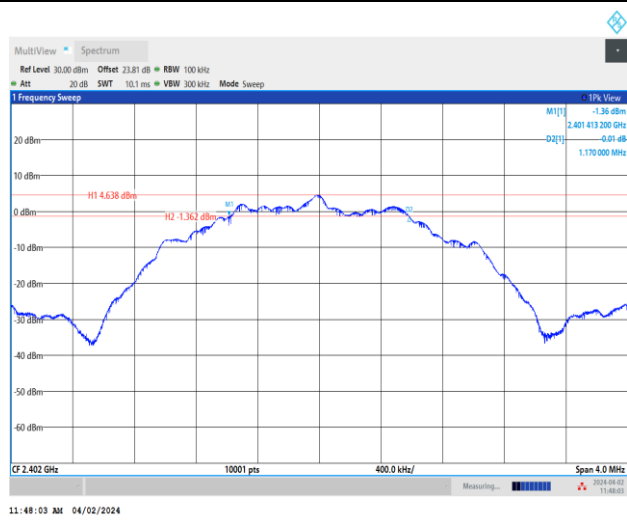

6 dB Bandwidth Plot on Channel 19



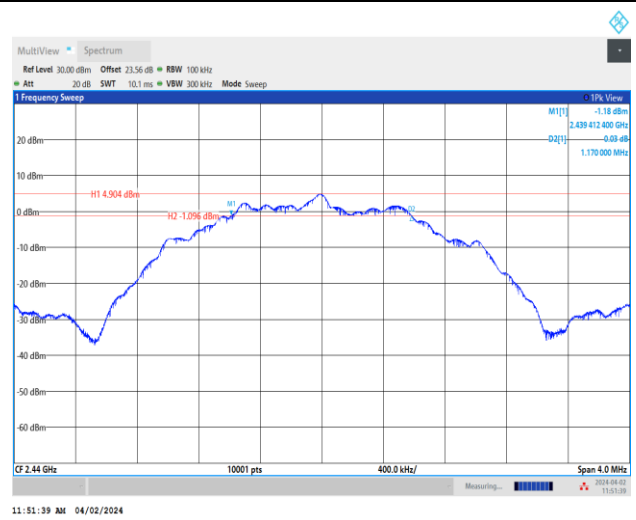


6 dB Bandwidth Plot on Channel 39

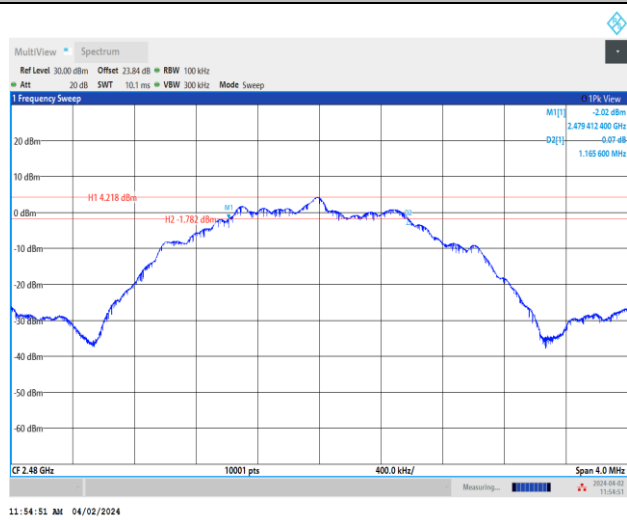

**99% Occupied Bandwidth**


<1Mbps>

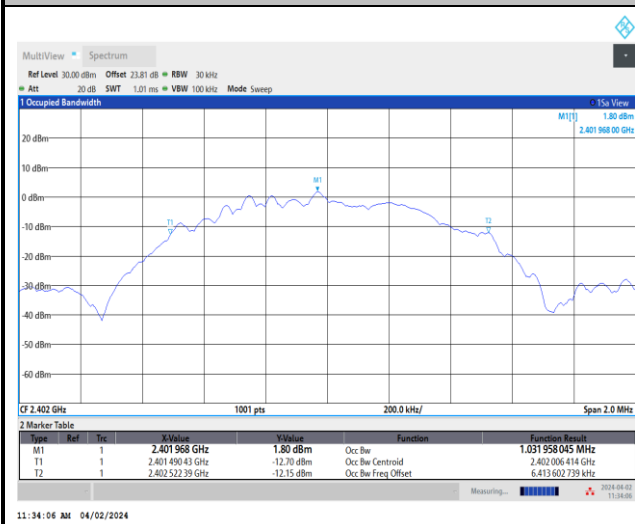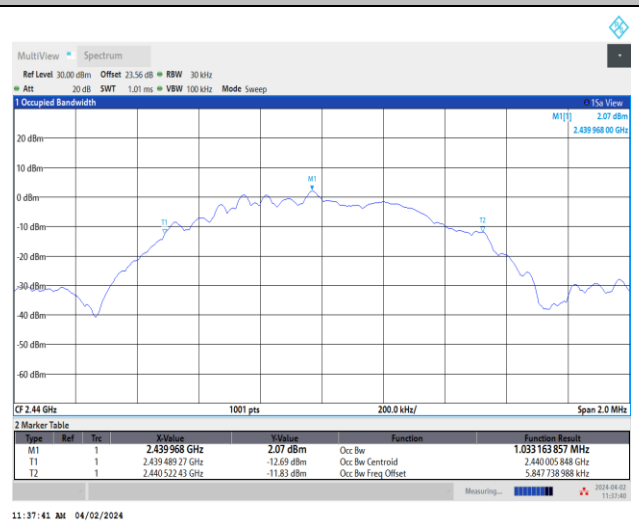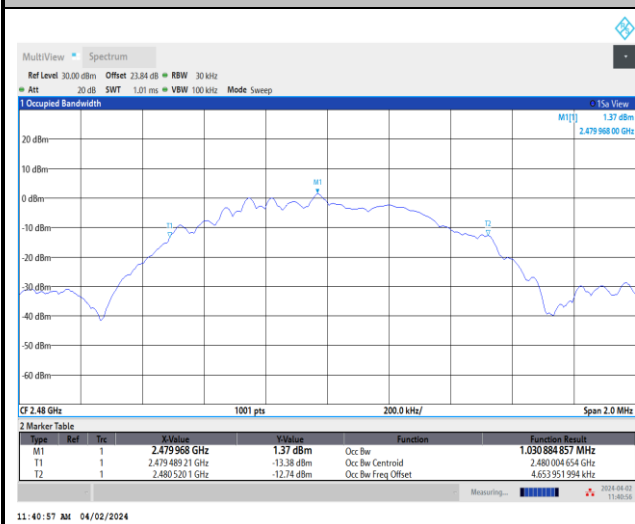99% Occupied Bandwidth Plot on Channel 00**99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 39**




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

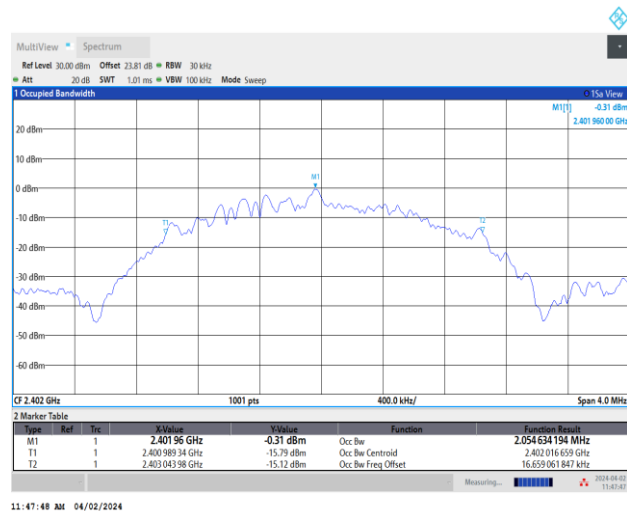


11:47:48 AM 04/02/2024

99% Occupied Bandwidth Plot on Channel 19

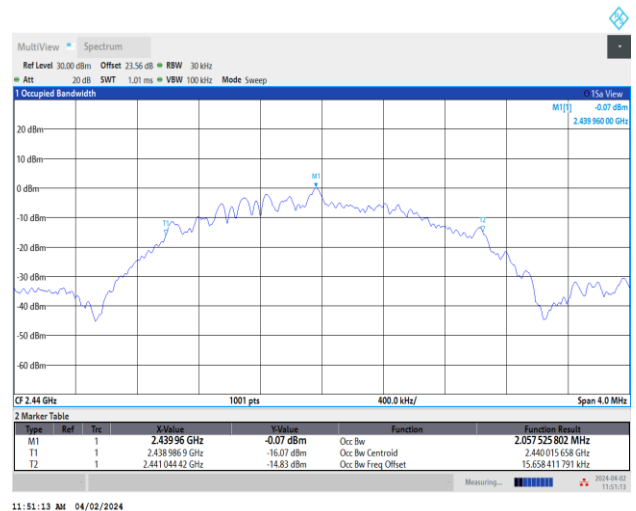

11:51:13 AM 04/02/2024




99% Occupied Bandwidth Plot on Channel 39

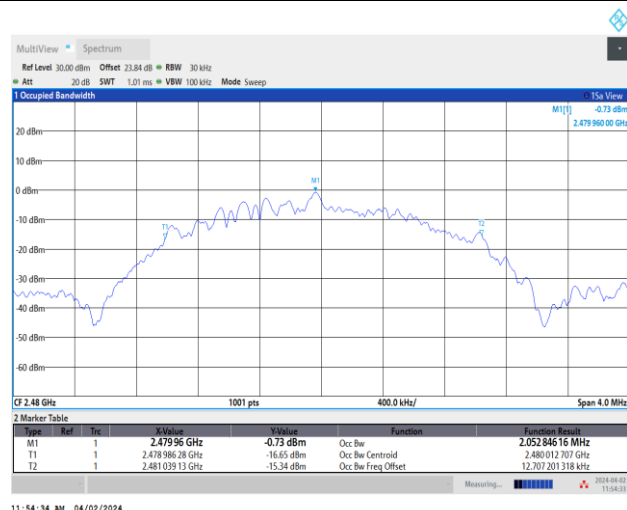

11:54:34 AM 04/02/2024

**Power Spectral Density (dBm/3kHz)**


<1Mbps>

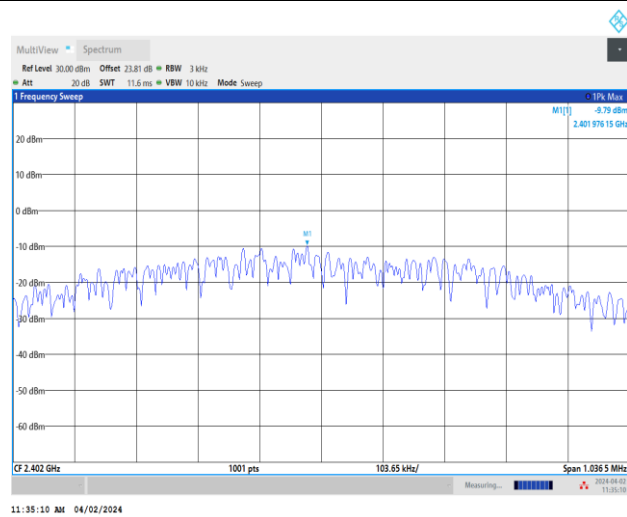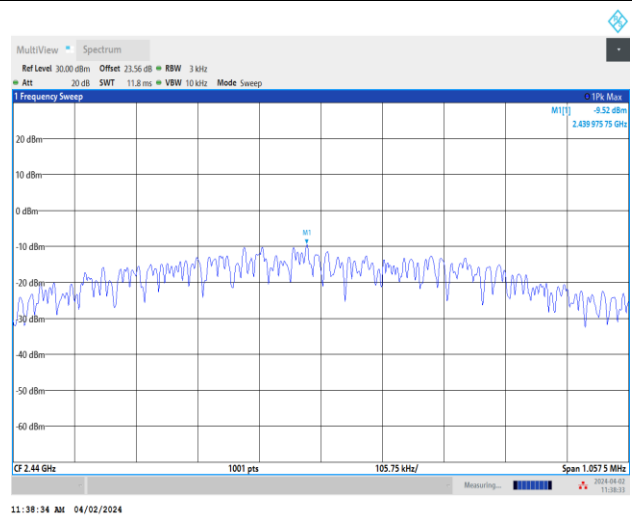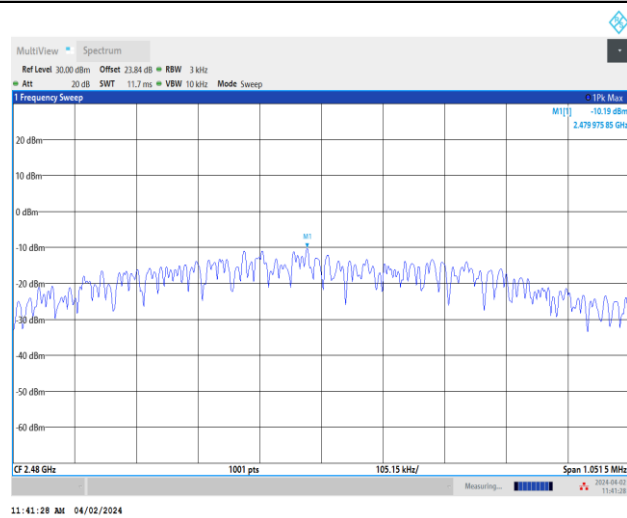Power Density (dBm/3kHz) Plot Channel 00**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




<2Mbps>


Power Density (dBm/3kHz) Plot Channel 00

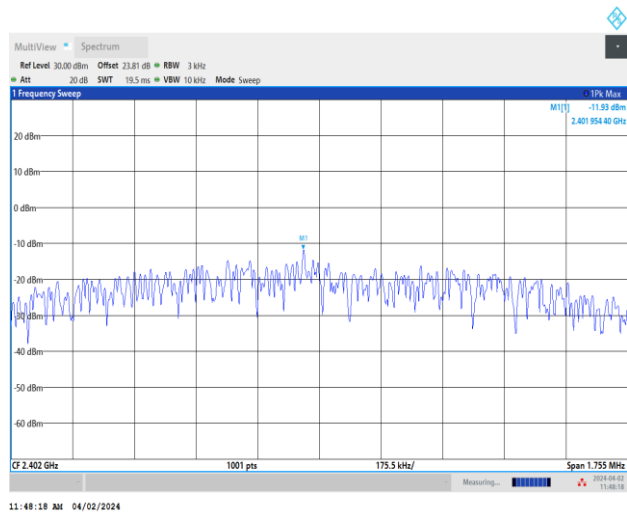

Power Density (dBm/3kHz) Plot Channel 19




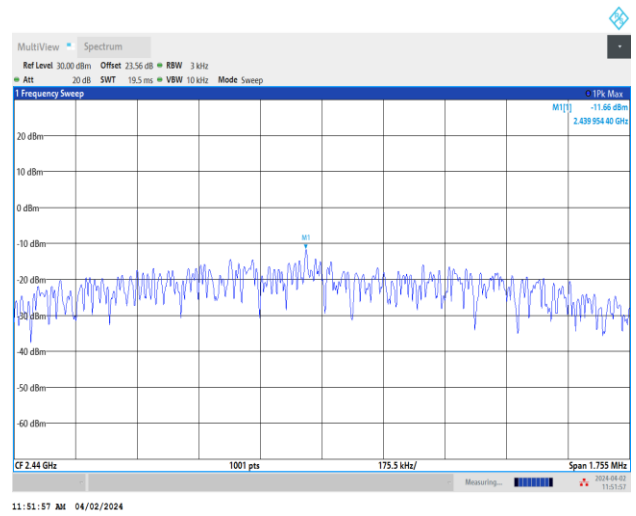


Power Density (dBm/3kHz) Plot Channel 39

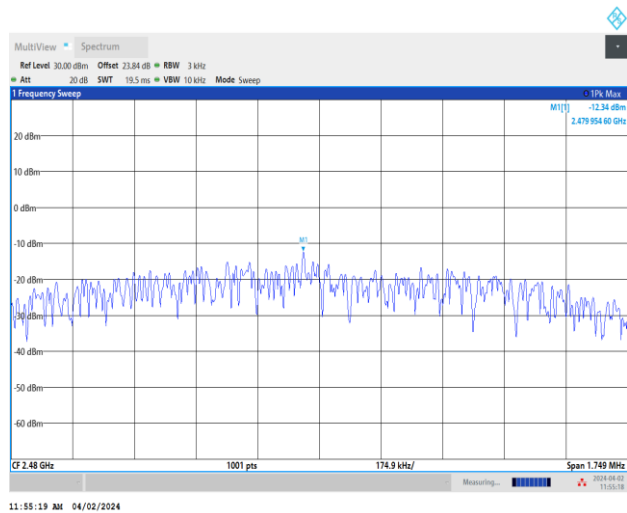

**Band Edge and Conducted Spurious Emission**


<1Mbps>

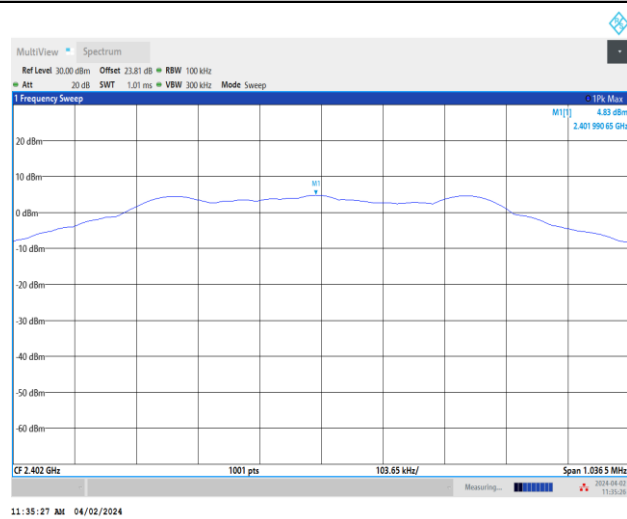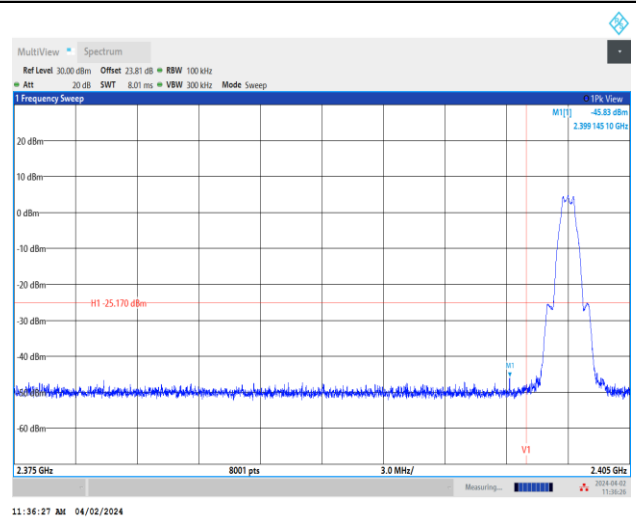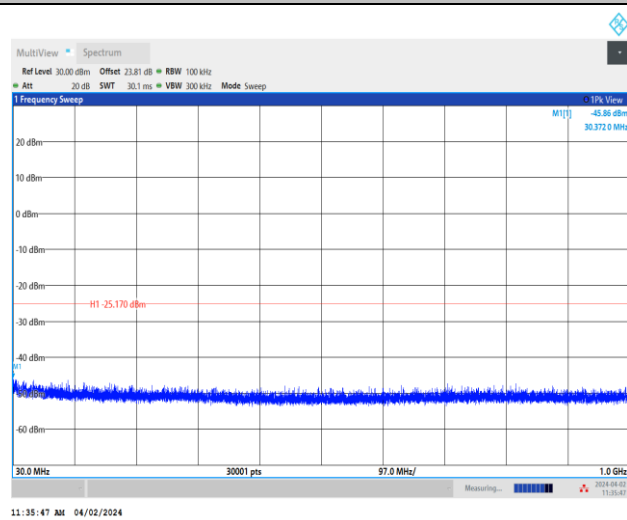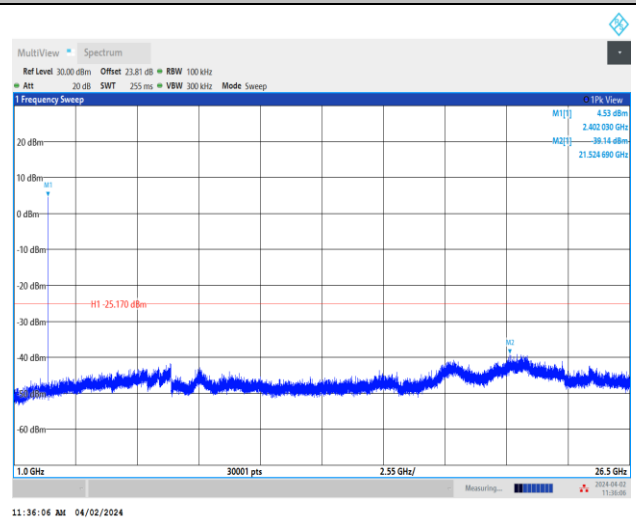Channel 00**100kHz PSD reference Level Plot****Low Channel Plot****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 19

100kHz PSD reference Level Plot

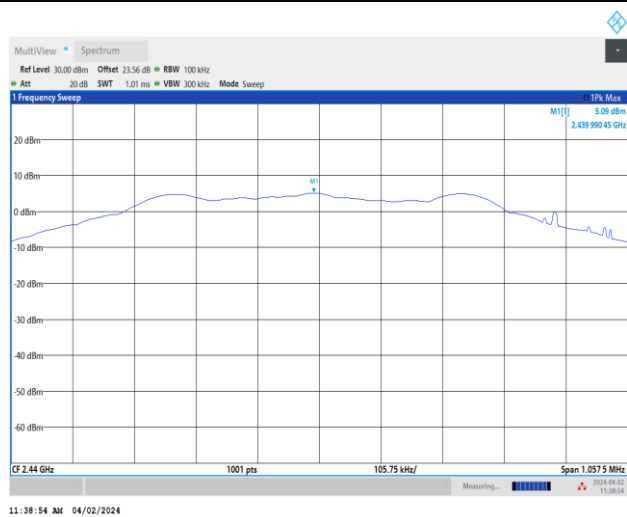


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

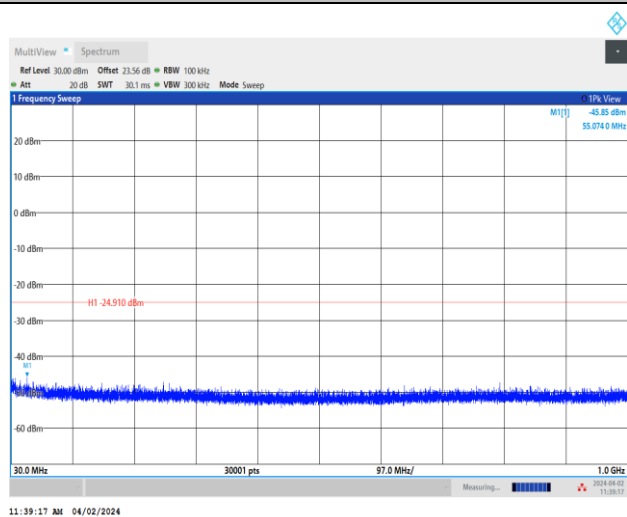


Spurious Emission 1GHz~26.5GHz Plot

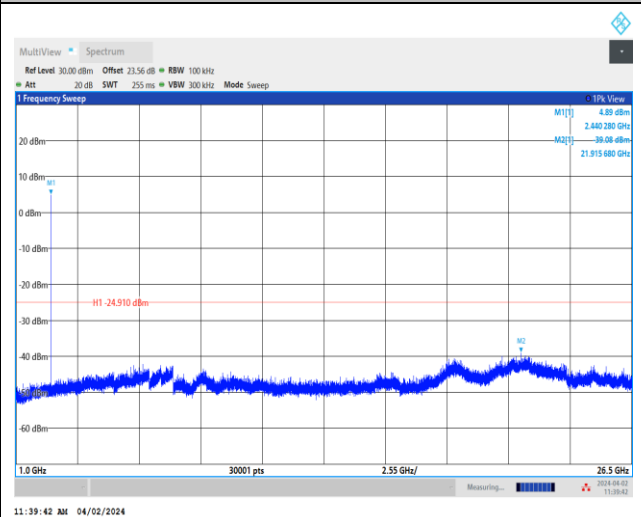




Channel 39


100kHz PSD reference Level Plot

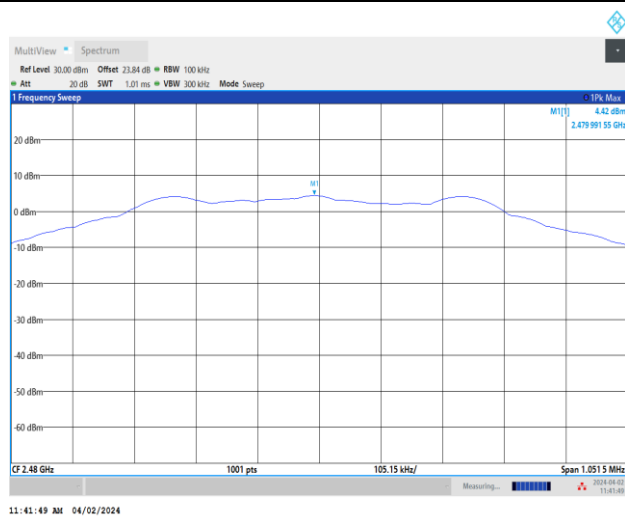


High Channel Plot

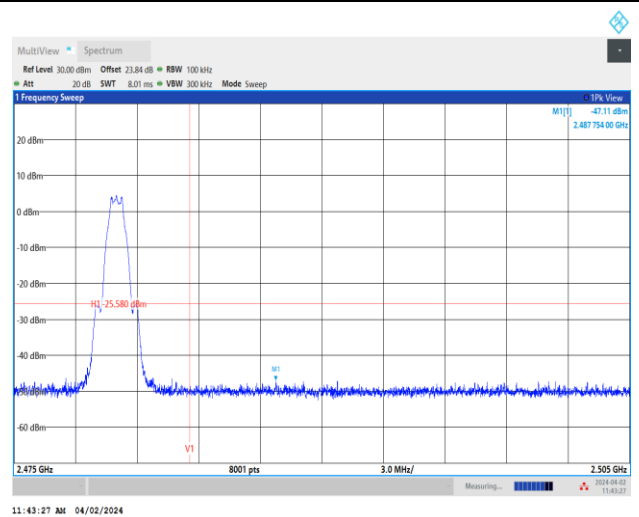

Spurious Emission 30MHz~1GHz Plot

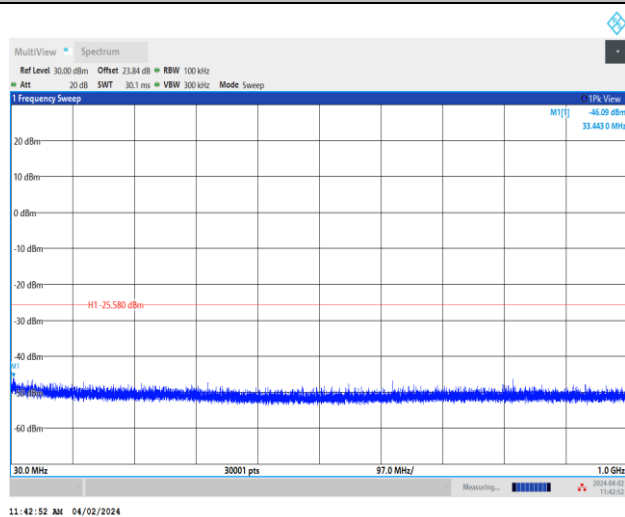


Spurious Emission 1GHz~26.5GHz Plot

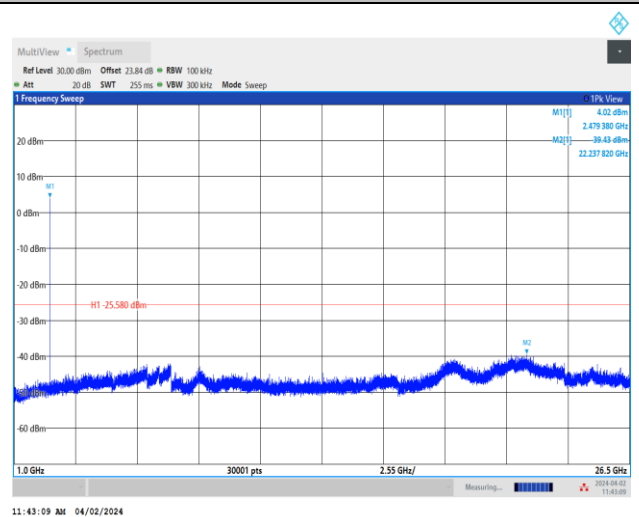




<2Mbps>

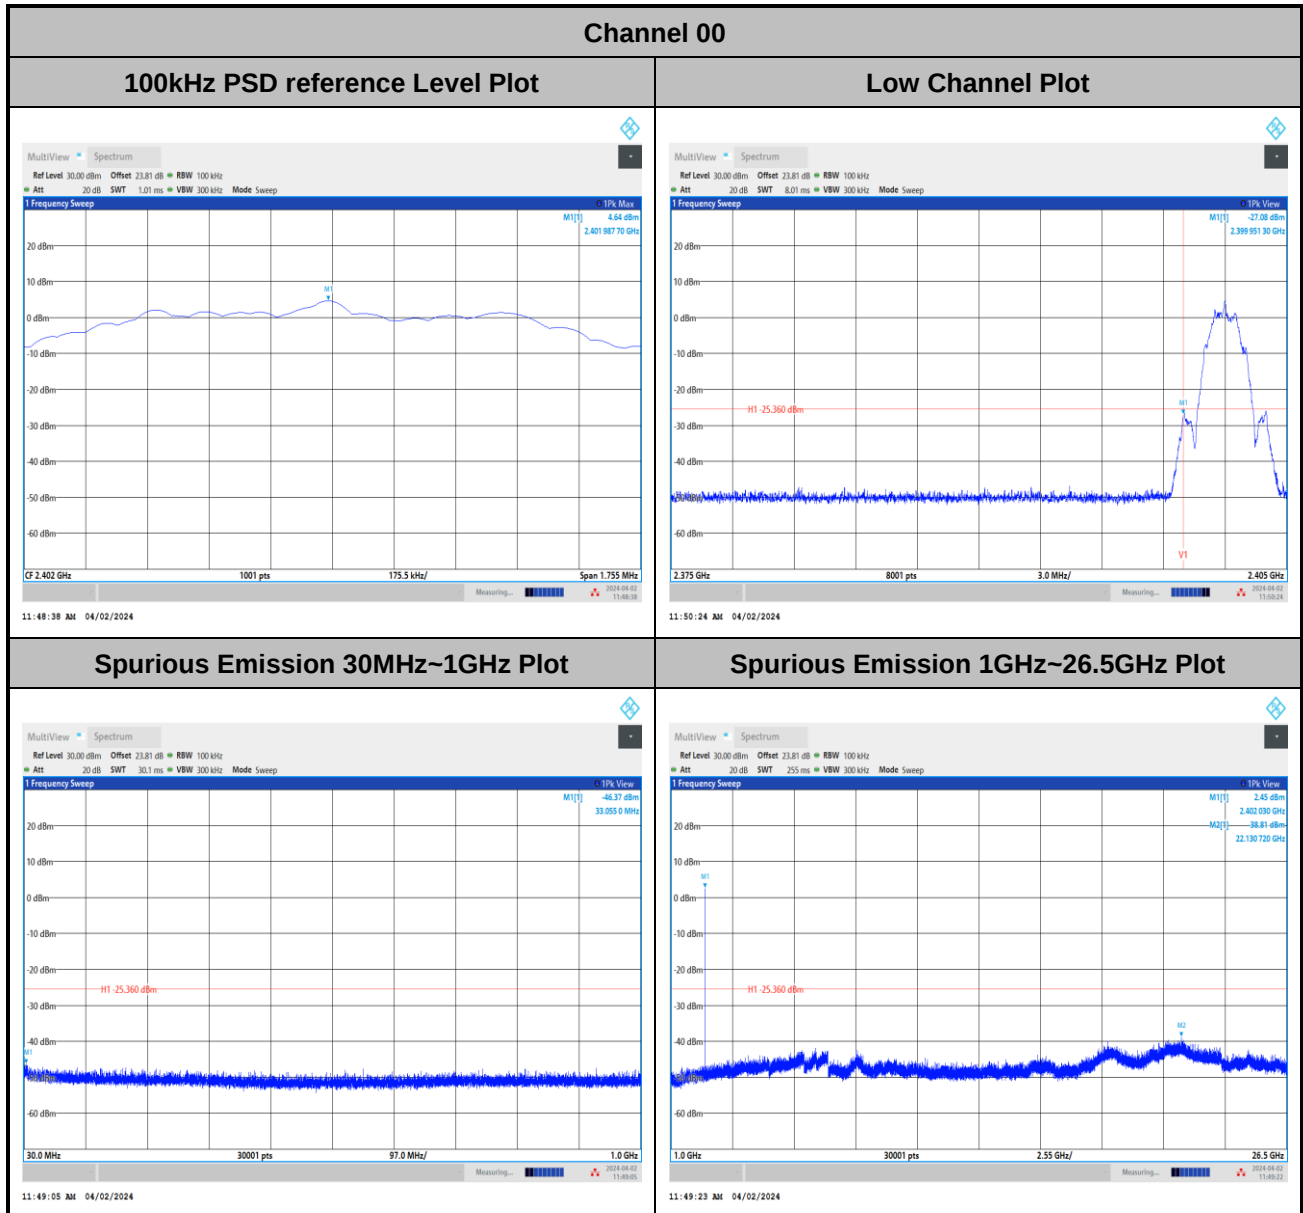




Channel 19

100kHz PSD reference Level Plot

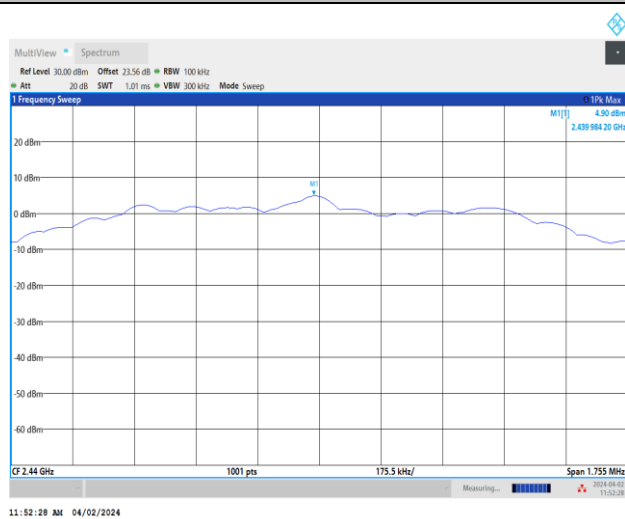


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

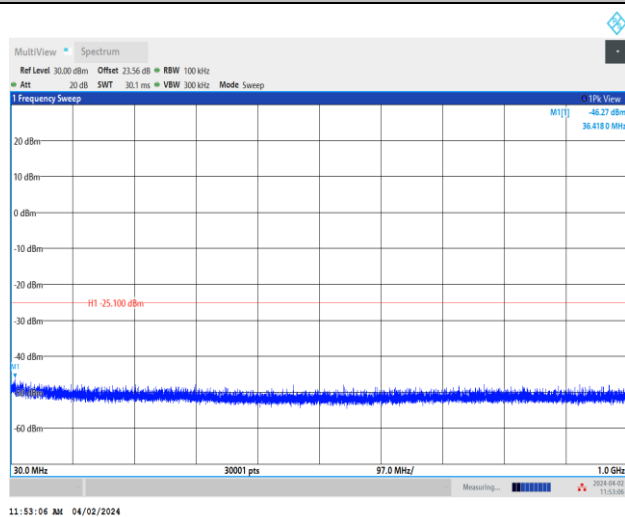


Spurious Emission 1GHz~26.5GHz Plot

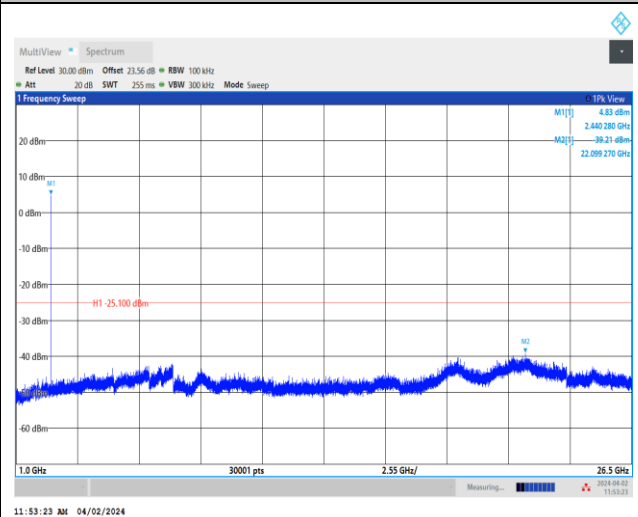




Channel 39


100kHz PSD reference Level Plot

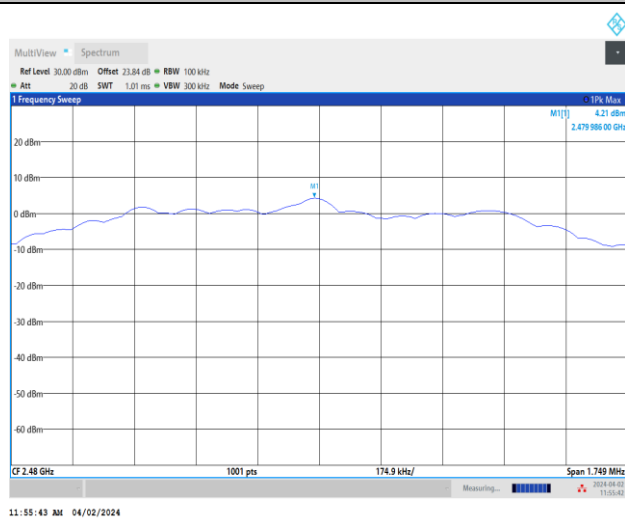


High Channel Plot

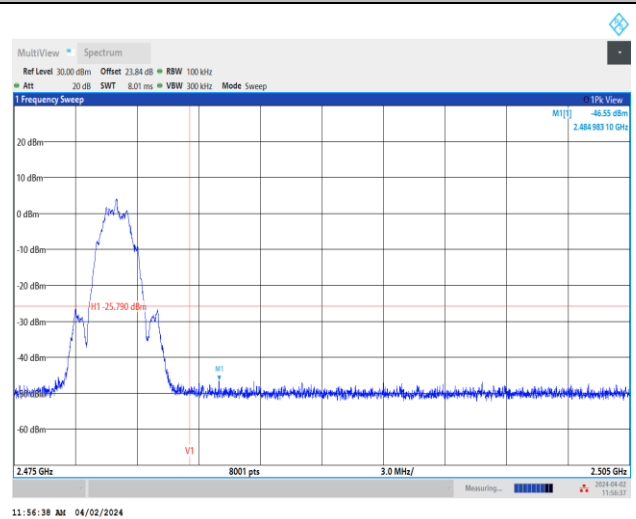

Spurious Emission 30MHz~1GHz Plot

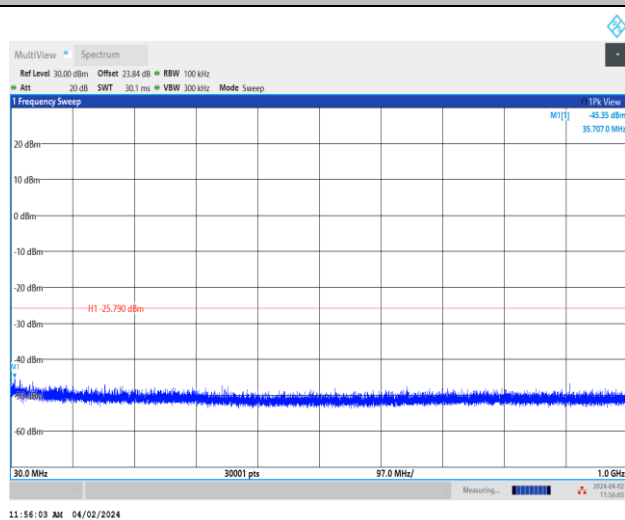

Spurious Emission 1GHz~26.5GHz Plot

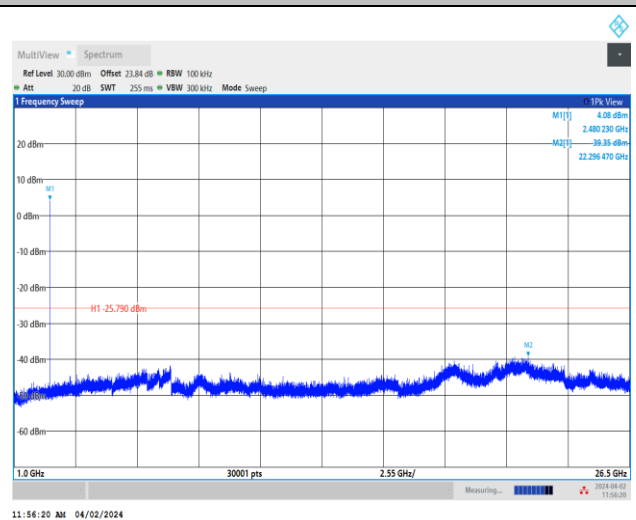




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	20.7~22.3°C
		Relative Humidity :	49~74.8%

EUT Information

Report NO : 3D2225
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

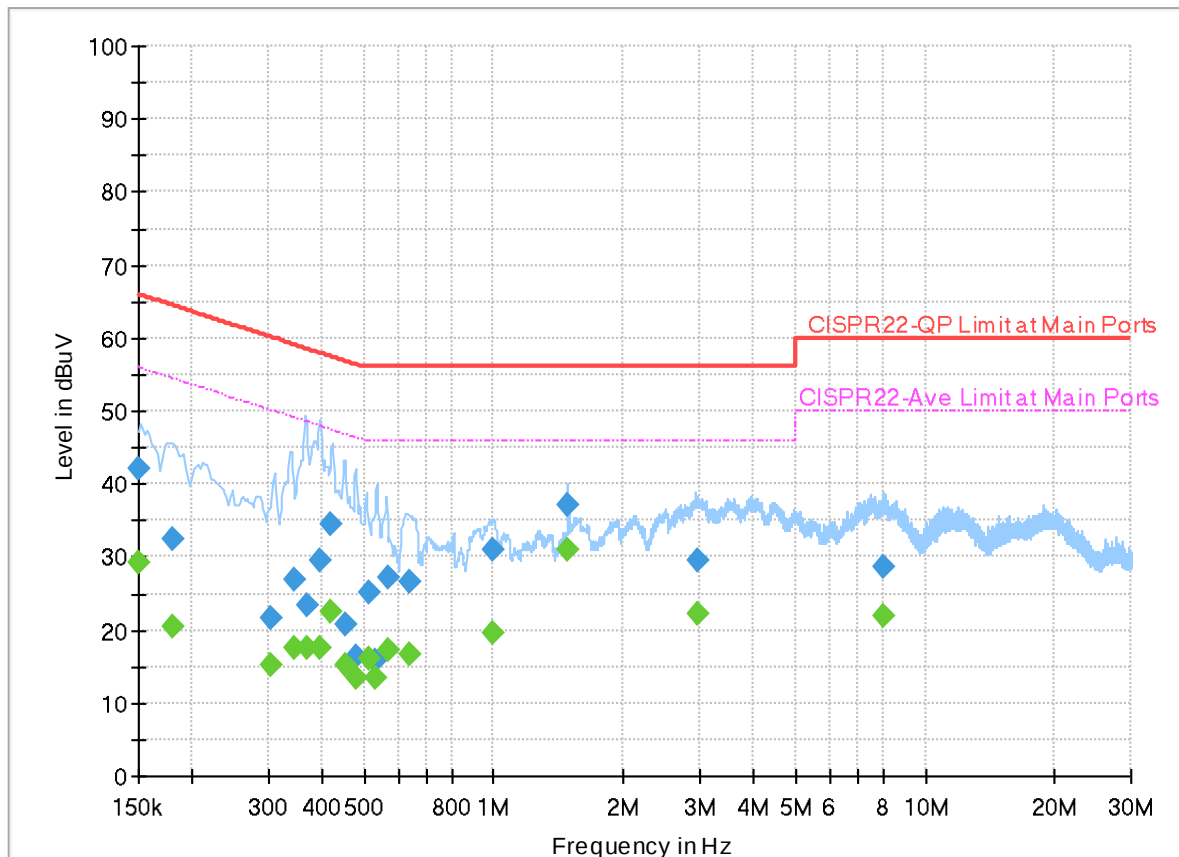

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	29.35	56.00	26.65	L1	OFF	19.9
0.150000	42.15	---	66.00	23.85	L1	OFF	19.9
0.180870	---	20.41	54.45	34.04	L1	OFF	19.9
0.180870	32.48	---	64.45	31.97	L1	OFF	19.9
0.305250	---	15.33	50.10	34.77	L1	OFF	19.9
0.305250	21.58	---	60.10	38.52	L1	OFF	19.9
0.343500	---	17.50	49.12	31.62	L1	OFF	19.9
0.343500	26.96	---	59.12	32.16	L1	OFF	19.9
0.370500	---	17.42	48.49	31.07	L1	OFF	19.9
0.370500	23.37	---	58.49	35.12	L1	OFF	19.9
0.395970	---	17.45	47.94	30.49	L1	OFF	19.9
0.395970	29.56	---	57.94	28.38	L1	OFF	19.9
0.420540	---	22.57	47.44	24.87	L1	OFF	19.9
0.420540	34.59	---	57.44	22.85	L1	OFF	19.9
0.450420	---	15.22	46.87	31.65	L1	OFF	19.9
0.450420	20.77	---	56.87	36.10	L1	OFF	19.9
0.480030	---	13.54	46.34	32.80	L1	OFF	19.9
0.480030	16.30	---	56.34	40.04	L1	OFF	19.9
0.512250	---	15.94	46.00	30.06	L1	OFF	19.9

0.512250	25.10	---	56.00	30.90	L1	OFF	19.9
0.533490	---	13.36	46.00	32.64	L1	OFF	19.9
0.533490	15.71	---	56.00	40.29	L1	OFF	19.9
0.566250	---	17.29	46.00	28.71	L1	OFF	19.9
0.566250	27.33	---	56.00	28.67	L1	OFF	19.9
0.634740	---	16.63	46.00	29.37	L1	OFF	19.9
0.634740	26.63	---	56.00	29.37	L1	OFF	19.9
0.996000	---	19.57	46.00	26.43	L1	OFF	19.9
0.996000	31.12	---	56.00	24.88	L1	OFF	19.9
1.485240	---	31.03	46.00	14.97	L1	OFF	19.9
1.485240	37.05	---	56.00	18.95	L1	OFF	19.9
2.973750	---	22.26	46.00	23.74	L1	OFF	20.0
2.973750	29.42	---	56.00	26.58	L1	OFF	20.0
8.009250	---	21.90	50.00	28.10	L1	OFF	20.0
8.009250	28.77	---	60.00	31.23	L1	OFF	20.0

EUT Information

Report NO : 3D2225
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

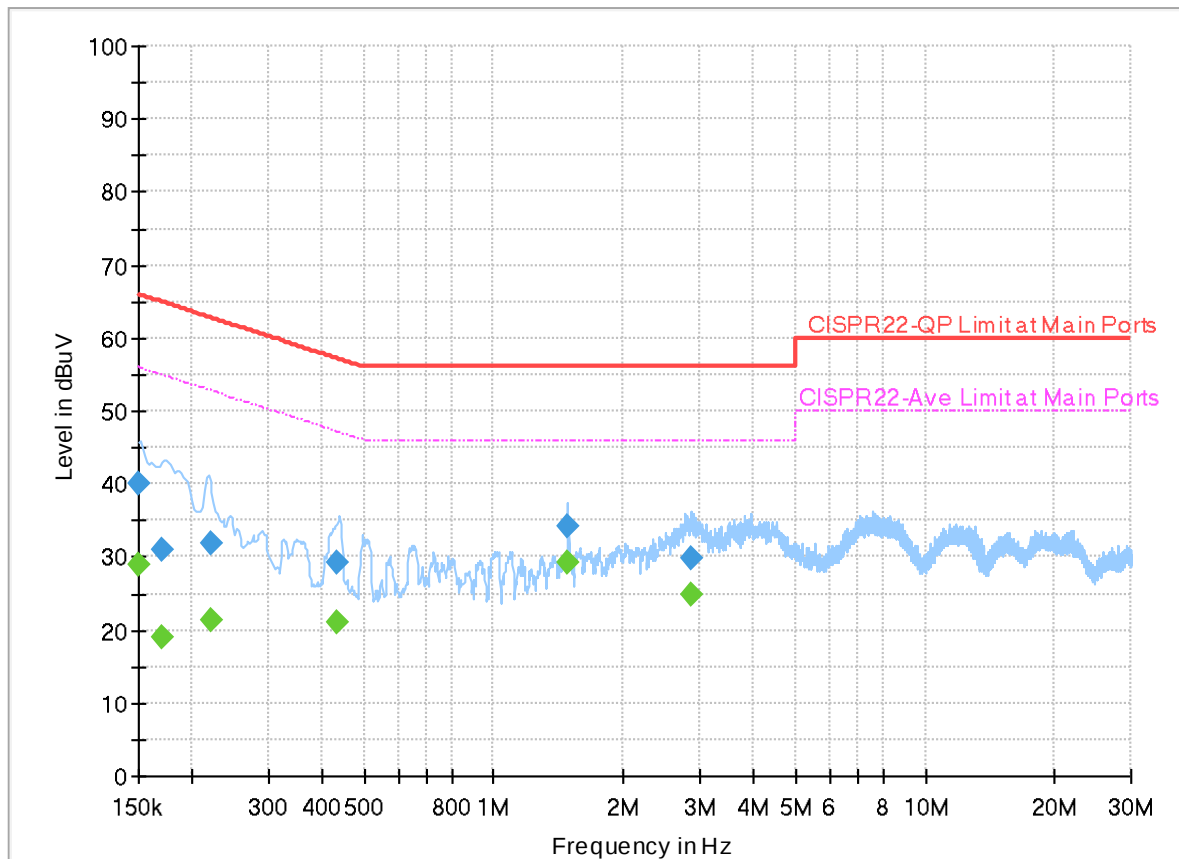

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150405	---	29.04	55.98	26.94	N	OFF	19.9
0.150405	39.92	---	65.98	26.06	N	OFF	19.9
0.170250	---	18.97	54.95	35.98	N	OFF	19.9
0.170250	30.90	---	64.95	34.05	N	OFF	19.9
0.222000	---	21.28	52.74	31.46	N	OFF	19.9
0.222000	31.78	---	62.74	30.96	N	OFF	19.9
0.433500	---	21.10	47.19	26.09	N	OFF	19.9
0.433500	29.37	---	57.19	27.82	N	OFF	19.9
1.484340	---	29.26	46.00	16.74	N	OFF	19.9
1.484340	34.25	---	56.00	21.75	N	OFF	19.9
2.872860	---	24.94	46.00	21.06	N	OFF	20.0
2.872860	29.88	---	56.00	26.12	N	OFF	20.0



Appendix C. Radiated Spurious Emission

Test Engineer :	Daniel Lee, Quentin Liu and Bigshow Wang	Temperature :	21~23.4°C
		Relative Humidity :	47~58%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2380.89	50.17	-23.83	74	43.79	27.36	15.51	36.49	100	295	P	H
		2333.46	40.51	-13.49	54	34.29	27.27	15.45	36.5	100	295	A	H
	*	2402	91.4	-	-	84.93	27.41	15.54	36.48	100	295	P	H
	*	2402	90.79	-	-	84.32	27.41	15.54	36.48	100	295	A	H
													H
													H
		2364.468	49.78	-24.22	74	43.45	27.33	15.49	36.49	200	270	P	V
		2388.846	40.71	-13.29	54	34.29	27.38	15.52	36.48	200	270	A	V
	*	2402	91.57	-	-	85.1	27.41	15.54	36.48	200	270	P	V
	*	2402	91.01	-	-	84.54	27.41	15.54	36.48	200	270	A	V
													V
													V
BLE CH 19 2440MHz		2330.02	49.88	-24.12	74	43.67	27.26	15.45	36.5	100	297	P	H
		2384.9	40.56	-13.44	54	34.16	27.37	15.52	36.49	100	297	A	H
	*	2440	94.76	-	-	88.08	27.56	15.59	36.47	100	297	P	H
	*	2440	94.16	-	-	87.48	27.56	15.59	36.47	100	297	A	H
		2492.37	50.69	-23.31	74	43.73	27.77	15.65	36.46	100	297	P	H
		2495.1	41.09	-12.91	54	34.12	27.78	15.65	36.46	100	297	A	H
		2372.02	49.87	-24.13	74	43.52	27.34	15.5	36.49	229	271	P	V
		2325.96	40.61	-13.39	54	34.42	27.25	15.44	36.5	229	271	A	V
	*	2440	95.92	-	-	89.24	27.56	15.59	36.47	229	271	P	V
	*	2440	95.31	-	-	88.63	27.56	15.59	36.47	229	271	A	V
		2498.67	50.64	-23.36	74	43.66	27.79	15.65	36.46	229	271	P	V
		2494.61	41.13	-12.87	54	34.16	27.78	15.65	36.46	229	271	A	V



BLE CH 39 2480MHz	*	2480	96.81	-	-	89.92	27.72	15.63	36.46	100	297	P	H
	*	2480	96.11	-	-	89.22	27.72	15.63	36.46	100	297	A	H
		2499.76	51.37	-22.63	74	44.38	27.8	15.65	36.46	100	297	P	H
		2496.19	41.07	-12.93	54	34.1	27.78	15.65	36.46	100	297	A	H
													H
													H
	*	2480	95.16	-	-	88.27	27.72	15.63	36.46	174	275	P	V
	*	2480	94.61	-	-	87.72	27.72	15.63	36.46	174	275	A	V
		2494.39	51.19	-22.81	74	44.22	27.78	15.65	36.46	174	275	P	V
		2487.1	41.1	-12.9	54	34.17	27.75	15.64	36.46	174	275	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	36.91	-37.09	74	55.46	32.12	8.49	59.16	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	37.38	-36.62	74	55.93	32.12	8.49	59.16	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	37.64	-36.36	74	55.69	32.58	8.56	59.19	-	-	P	H
		7320	42.82	-31.18	74	55.64	36.68	10.34	59.84	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	37.64	-36.36	74	55.69	32.58	8.56	59.19	-	-	P	V
		7320	42.74	-31.26	74	55.56	36.68	10.34	59.84	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	38.08	-35.92	74	55.67	33	8.63	59.22	-	-	P	H
		7440	43.94	-30.06	74	57.33	36.12	10.47	59.98	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4960	37.92	-36.08	74	55.51	33	8.63	59.22	-	-	P	V
		7440	42.48	-31.52	74	55.87	36.12	10.47	59.98	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2311.326	50.74	-23.26	74	44.6	27.22	15.42	36.5	100	284	P	H
		2337.132	41.72	-12.28	54	35.49	27.27	15.46	36.5	100	284	A	H
	*	2402	93.34	-	-	86.87	27.41	15.54	36.48	100	284	P	H
	*	2402	91.96	-	-	85.49	27.41	15.54	36.48	100	284	A	H
													H
													H
		2317.548	51.05	-22.95	74	44.88	27.24	15.43	36.5	100	256	P	V
		2382.726	41.87	-12.13	54	35.47	27.37	15.52	36.49	100	256	A	V
	*	2402	86.21	-	-	79.74	27.41	15.54	36.48	100	256	P	V
	*	2402	84.77	-	-	78.3	27.41	15.54	36.48	100	256	A	V
													V
													V
BLE CH 19 2440MHz		2311.82	49.96	-24.04	74	43.82	27.22	15.42	36.5	177	293	P	H
		2324	41.88	-12.12	54	35.69	27.25	15.44	36.5	177	293	A	H
	*	2440	95.45	-	-	88.77	27.56	15.59	36.47	177	293	P	H
	*	2440	93.83	-	-	87.15	27.56	15.59	36.47	177	293	A	H
		2492.79	50.52	-23.48	74	43.56	27.77	15.65	36.46	177	293	P	H
		2494.54	42.28	-11.72	54	35.31	27.78	15.65	36.46	177	293	A	H
		2351.02	50.51	-23.49	74	44.23	27.3	15.47	36.49	100	268	P	V
		2369.64	42.09	-11.91	54	35.74	27.34	15.5	36.49	100	268	A	V
	*	2440	90.44	-	-	83.76	27.56	15.59	36.47	100	268	P	V
	*	2440	89.1	-	-	82.42	27.56	15.59	36.47	100	268	A	V
		2487.96	51.08	-22.92	74	44.15	27.75	15.64	36.46	100	268	P	V
		2485.79	42.4	-11.6	54	35.48	27.74	15.64	36.46	100	268	A	V



BLE CH 39 2480MHz	*	2480	97.62	-	-	90.73	27.72	15.63	36.46	362	282	P	H
	*	2480	96.16	-	-	89.27	27.72	15.63	36.46	362	282	A	H
		2485.96	51.08	-22.92	74	44.16	27.74	15.64	36.46	362	282	P	H
		2483.5	43.48	-10.52	54	36.57	27.73	15.64	36.46	362	282	A	H
													H
													H
	*	2480	94.16	-	-	87.27	27.72	15.63	36.46	366	247	P	V
	*	2480	92.73	-	-	85.84	27.72	15.63	36.46	366	247	A	V
		2495.32	51.07	-22.93	74	44.1	27.78	15.65	36.46	366	247	P	V
		2483.65	42.31	-11.69	54	35.4	27.73	15.64	36.46	366	247	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	37.58	-36.42	74	56.13	32.12	8.49	59.16	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	37.59	-36.41	74	56.14	32.12	8.49	59.16	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	37.57	-36.43	74	55.62	32.58	8.56	59.19	-	-	P	H
		7320	43.08	-30.92	74	55.9	36.68	10.34	59.84	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	37.49	-36.51	74	55.54	32.58	8.56	59.19	-	-	P	V
		7320	43.08	-30.92	74	55.9	36.68	10.34	59.84	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

[illegible]

Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE SHF		25866	40.5	-33.5	74	57.22	39.03	-2.45	53.3	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			24840	40.4	-33.6	74	56.46	39.72	-2.42	53.36	-	-	P	V
														V
														V
														V
														V
														V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		108.12	35.6	-7.9	43.5	49.92	16.7	1.33	32.35	-	-	P	H
		110.1	36.93	-6.57	43.5	51.12	16.83	1.33	32.35	-	-	P	H
		262.4	32.52	-13.48	46	43	19.86	2.05	32.39	-	-	P	H
		843.2	31.55	-14.45	46	31.69	28.24	3.46	31.84	-	-	P	H
		888.8	30.86	-15.14	46	30.65	28.17	3.58	31.54	-	-	P	H
		948.8	31.71	-14.29	46	29.4	29.58	3.75	31.02	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
		31.8	27.07	-12.93	40	34.79	23.95	0.73	32.4	-	-	P	V
		59.88	27.98	-12.02	40	47.41	11.96	1.04	32.43	-	-	P	V
		66	28.5	-11.5	40	47.69	12.15	1.08	32.42	-	-	P	V
		80.04	29.48	-10.52	40	47.17	13.55	1.18	32.42	-	-	P	V
		110.1	29.33	-14.17	43.5	43.61	16.83	1.33	32.44	-	-	P	V
		955.2	31.87	-14.13	46	29.29	29.79	3.76	30.97	-	-	P	V
													V
													V
													V
													V
													V
												V	
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												
	3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Daniel Lee, Quentin Liu and Bigshow Wang	Temperature :	21~23.4°C
		Relative Humidity :	47~58%

Note symbol





-L	Low channel location
-R	High channel location







<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

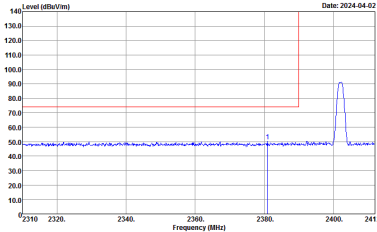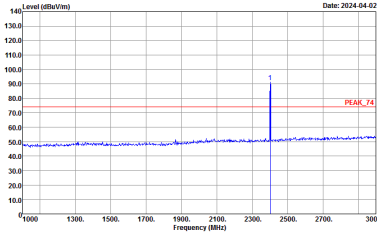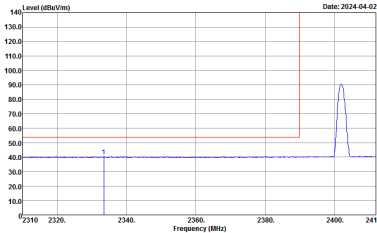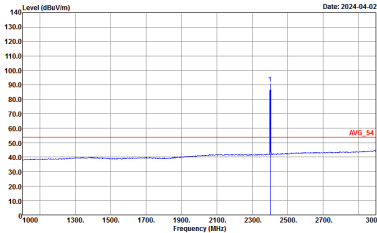BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto

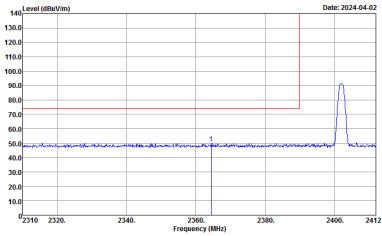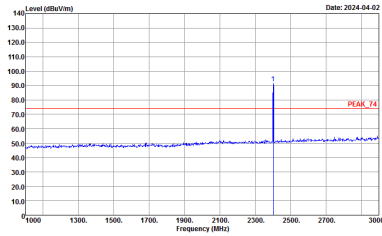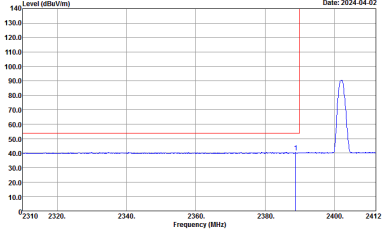
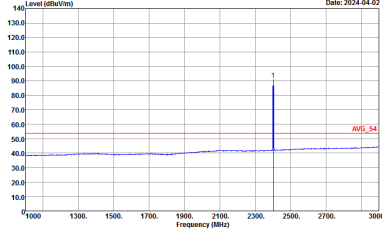


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : - PEAK_BE_74 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : - PEAK_74 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : - AV6_BE_54 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto	 Site : 03CH15-HY Condition : - AV6_54 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto
Avg.	Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto	Site : 03CH15-HY Condition : AVG_54 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto

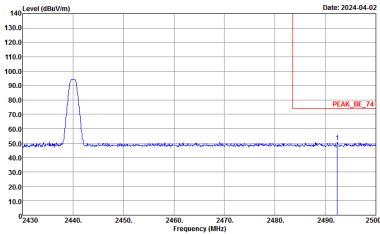
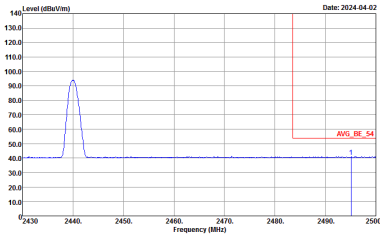


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 HORIZONTAL RBW:1000.000KHz VBW:2700KHz SWT:Auto	Left blank







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto	Site : 03CH15-HY Condition : AVG_54 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto

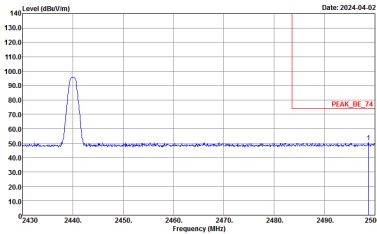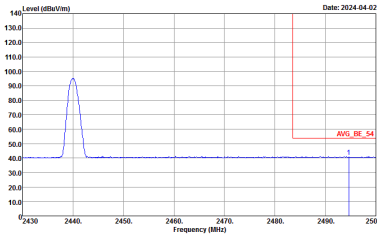

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 VERTICAL RBW:1000.000kHz VBW:2700kHz SWT:Auto	Left blank

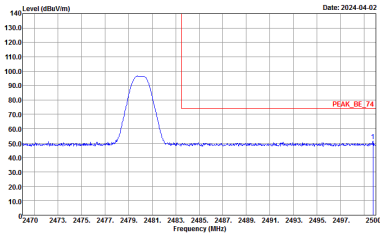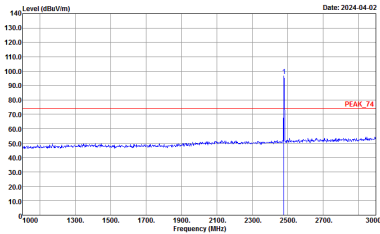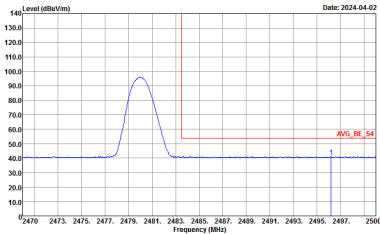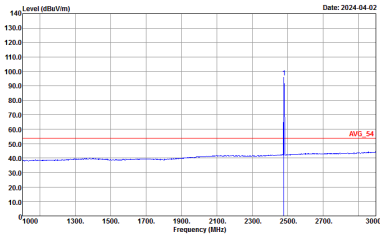

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:2700KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	Site : 03CH15-HY Condition : - PEAK_BE_74 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH15-HY Condition : - PEAK_74 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH15-HY Condition : - AVG_BE_54 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto	Site : 03CH15-HY Condition : - AVG_54 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) for 14.47G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL :	Level (dBuV/m) vs Frequency (MHz) for 14.47G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL :
17.7G ~18G Avg.	Level (dBuV/m) vs Frequency (MHz) for 17.7G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL :	Level (dBuV/m) vs Frequency (MHz) for 17.7G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL :



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL :	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 VERTICAL :



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) for 14.47G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) for 14.47G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL
17.7G ~18G Avg.	Level (dBuV/m) vs Frequency (MHz) for 17.7G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) for 17.7G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL :	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 VERTICAL :







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL
17.7G ~18G Avg.	Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL



<2Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

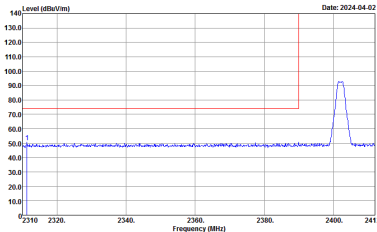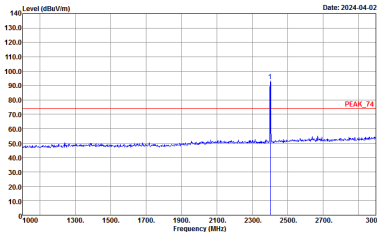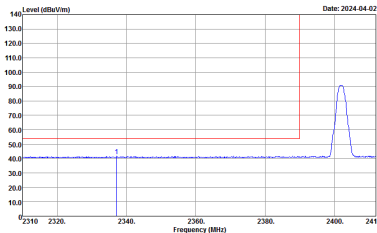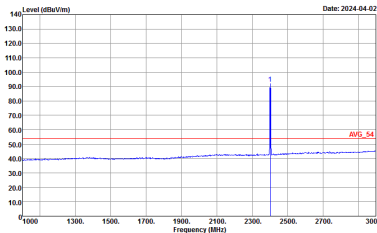BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AV6_BE_54 3m 91200_02294_230630 HORIZONTAL RBW:1000.000KHz VBW:5.600KHz SWT:Auto	 Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL RBW:1000.000KHz VBW:5.600KHz SWT:Auto





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:5.600KHz SWT:Auto	Site : 03CH15-HY Condition : AVG_54 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:5.600KHz SWT:Auto

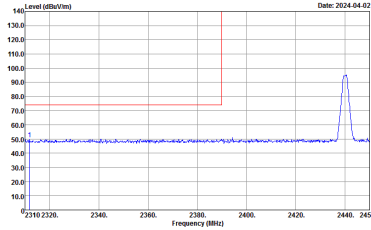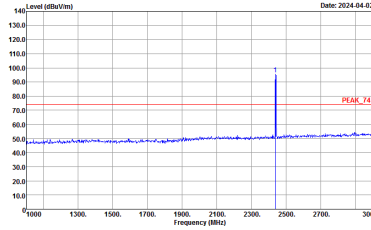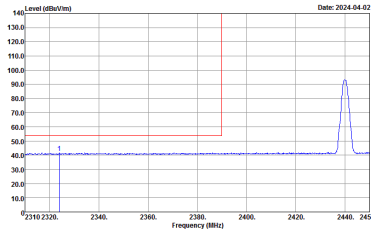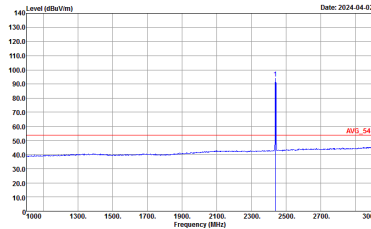

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:5.600KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:5.600KHz SWT:Auto

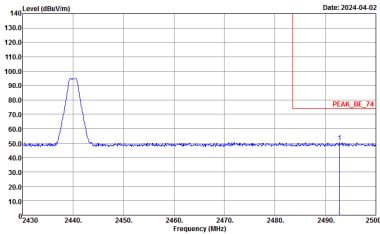
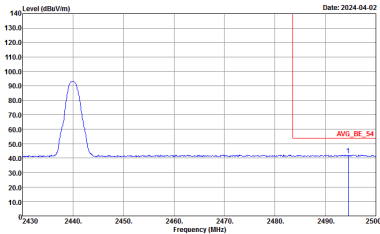


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 HORIZONTAL RBW:1000.000KHz VBW:5.000KHz SWT:Auto	Left blank







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	Site : 03CH15-HY Condition : - PEAK_BE_74 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH15-HY Condition : - PEAK_74 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH15-HY Condition : - AVG_BE_54 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:5.600KHz SWT:Auto	Site : 03CH15-HY Condition : - AVG_54 3m 91200_02294_230630 VERTICAL : RBW:1000.000KHz VBW:5.600KHz SWT:Auto

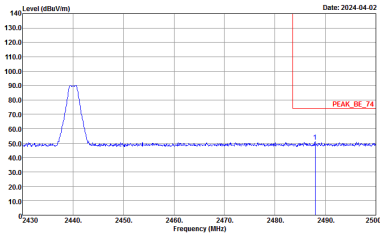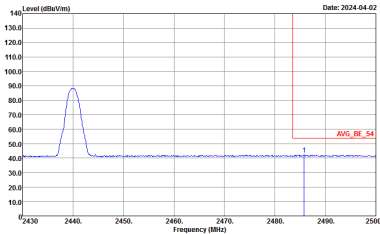

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 VERTICAL RBW:1000.000KHz VBW:5.000KHz SWT:Auto	Left blank

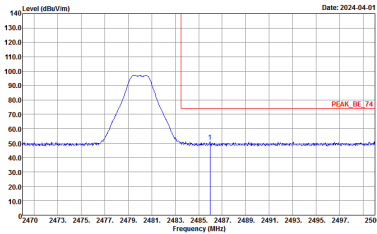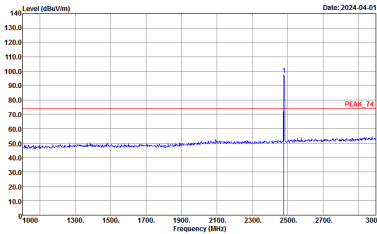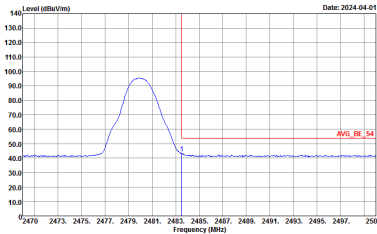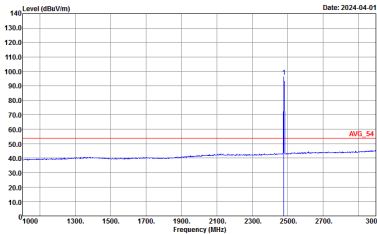

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : -PEAK_BE_74 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : -PEAK_74 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : -AVG_BE_54 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:5.600KHz SWT:Auto	 Site : 03CH15-HY Condition : -AVG_54 3m 91200_02294_230630 HORIZONTAL : RBW:1000.000KHz VBW:5.600KHz SWT:Auto



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_02294_230630 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_02294_230630 VERTICAL RBW:1000.000KHz VBW:5.600KHz SWT:Auto	Site : 03CH15-HY Condition : AVG_54 3m 91200_02294_230630 VERTICAL RBW:1000.000KHz VBW:5.600KHz SWT:Auto







2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2024.04.02 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL	Level (dBuV/m) Date: 2024.04.02 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 VERTICAL

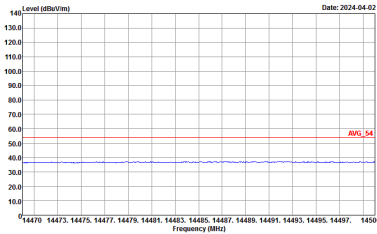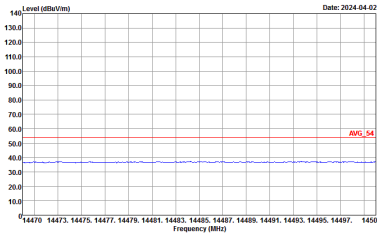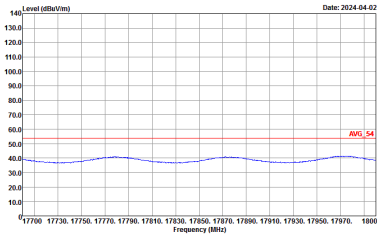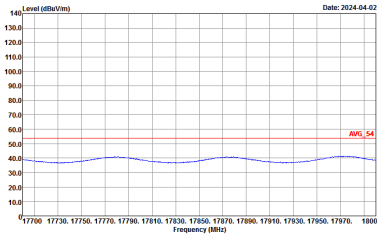

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL :	 Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL :
17.7G ~18G Avg.	 Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL :	 Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL :



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL :	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 VERTICAL :



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) for 14.47G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) for 14.47G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 14470 to 14500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL
17.7G ~18G Avg.	Level (dBuV/m) vs Frequency (MHz) for 17.7G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) for 17.7G. The plot shows a blue line representing the signal level, which is relatively flat around 40 dBuV/m. A red line labeled 'AVG_54' is positioned at approximately 55 dBuV/m. The x-axis ranges from 17700 to 18000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m. Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	Level (dBuV/m) Date: 2024-04-02 Frequency (MHz) Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 HORIZONTAL	Level (dBuV/m) Date: 2024-04-02 Frequency (MHz) Site : 03CH15-HY Condition : PEAK_74 3m 91200_02294_230630 VERTICAL



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL :	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL :
17.7G ~18G Avg.	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 HORIZONTAL :	Level (dBuV/m) Date: 2024-04-02 Site : 03CH15-HY Condition : AV6_54 3m 91200_02294_230630 VERTICAL :



Emission above 18GHz
2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2024.04.11 Site : 03CH15-HY Condition : PEAK_74 1m SHF1223_230710 HORIZONTAL :	Level (dBuV/m) Date: 2024.04.11 Site : 03CH15-HY Condition : PEAK_74 1m SHF1223_230710 VERTICAL :



Emission below 1GHz
2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	Level (dBuV/m) Date: 2024.04.02 Site : 03CH15-HY Condition : QP 3m BIL06_20240203_16 HORIZONTAL	Level (dBuV/m) Date: 2024.04.02 Site : 03CH15-HY Condition : QP 3m BIL06_20240203_16 VERTICAL

Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	61.60	385	2.60	2.7kHz
Bluetooth - LE for 2Mbps	31.41	196	5.10	5.6kHz

