









Mode	20																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																																			
ANT	4																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.38</td><td>61.75</td><td>74.00</td><td>-12.25</td><td>46.77</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>300</td><td>80</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.38	61.75	74.00	-12.25	46.77	27.50	7.86	30.30	9.92	300	80	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.18</td><td>-----</td><td>-----</td><td>84.35</td><td>27.40</td><td>7.82</td><td>30.31</td><td>9.92</td><td>300</td><td>80</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.18	-----	-----	84.35	27.40	7.82	30.31	9.92	300	80	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2484.38	61.75	74.00	-12.25	46.77	27.50	7.86	30.30	9.92	300	80	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	99.18	-----	-----	84.35	27.40	7.82	30.31	9.92	300	80	PEAK																																																																																								
Avg	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>47.16</td><td>54.00</td><td>-6.84</td><td>32.18</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>300</td><td>80</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	47.16	54.00	-6.84	32.18	27.50	7.86	30.30	9.92	300	80	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.62</td><td>-----</td><td>-----</td><td>76.79</td><td>27.40</td><td>7.82</td><td>30.31</td><td>9.92</td><td>300</td><td>80</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	91.62	-----	-----	76.79	27.40	7.82	30.31	9.92	300	80	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.58	47.16	54.00	-6.84	32.18	27.50	7.86	30.30	9.92	300	80	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	91.62	-----	-----	76.79	27.40	7.82	30.31	9.92	300	80	AVERAGE																																																																																								


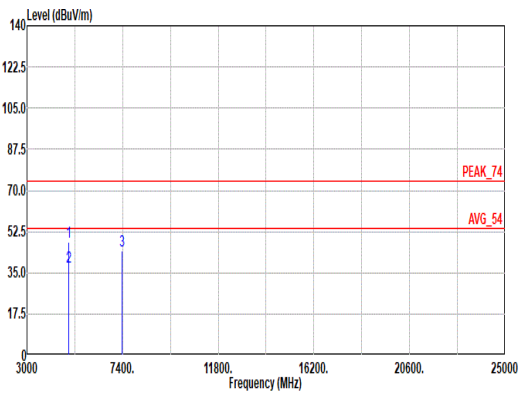


Mode	20																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																													
ANT	4																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>48.33</td><td>74.00</td><td>-25.67</td><td>71.71</td><td>31.35</td><td>11.05</td><td>66.30</td><td>0.52</td><td>100</td><td>118</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>37.39</td><td>54.00</td><td>-16.61</td><td>60.77</td><td>31.35</td><td>11.05</td><td>66.30</td><td>0.52</td><td>100</td><td>118</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>44.52</td><td>74.00</td><td>-29.48</td><td>60.02</td><td>36.43</td><td>13.34</td><td>65.76</td><td>0.49</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	48.33	74.00	-25.67	71.71	31.35	11.05	66.30	0.52	100	118	PEAK	2	4924.00	37.39	54.00	-16.61	60.77	31.35	11.05	66.30	0.52	100	118	AVERAGE	3	7386.00	44.52	74.00	-29.48	60.02	36.43	13.34	65.76	0.49	--	--	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>45.63</td><td>74.00</td><td>-28.37</td><td>69.01</td><td>31.35</td><td>11.05</td><td>66.30</td><td>0.52</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>34.25</td><td>54.00</td><td>-19.75</td><td>57.63</td><td>31.35</td><td>11.05</td><td>66.30</td><td>0.52</td><td>100</td><td>322</td><td>AVERAGE</td></tr><tr><td>3</td><td>7386.00</td><td>43.91</td><td>74.00</td><td>-30.09</td><td>59.41</td><td>36.43</td><td>13.34</td><td>65.76</td><td>0.49</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	45.63	74.00	-28.37	69.01	31.35	11.05	66.30	0.52	100	322	PEAK	2	4924.00	34.25	54.00	-19.75	57.63	31.35	11.05	66.30	0.52	100	322	AVERAGE	3	7386.00	43.91	74.00	-30.09	59.41	36.43	13.34	65.76	0.49	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4924.00	48.33	74.00	-25.67	71.71	31.35	11.05	66.30	0.52	100	118	PEAK																																																																																																																																		
2	4924.00	37.39	54.00	-16.61	60.77	31.35	11.05	66.30	0.52	100	118	AVERAGE																																																																																																																																		
3	7386.00	44.52	74.00	-29.48	60.02	36.43	13.34	65.76	0.49	--	--	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4924.00	45.63	74.00	-28.37	69.01	31.35	11.05	66.30	0.52	100	322	PEAK																																																																																																																																		
2	4924.00	34.25	54.00	-19.75	57.63	31.35	11.05	66.30	0.52	100	322	AVERAGE																																																																																																																																		
3	7386.00	43.91	74.00	-30.09	59.41	36.43	13.34	65.76	0.49	--	--	PEAK																																																																																																																																		




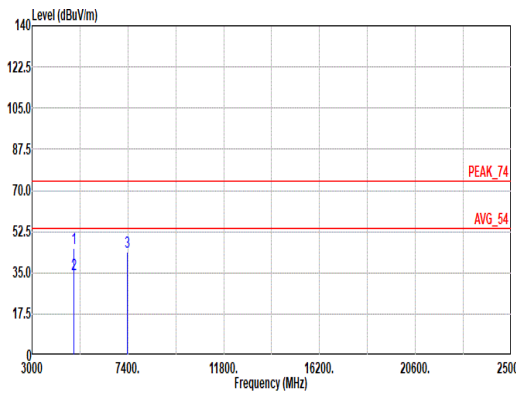


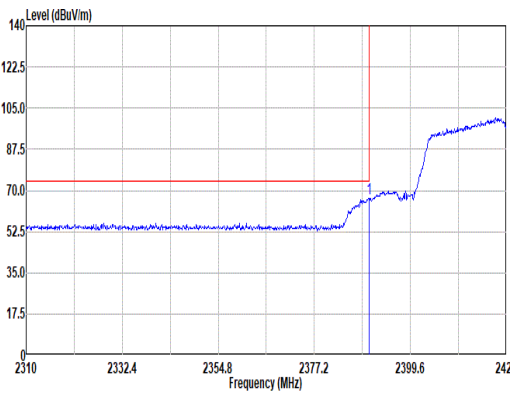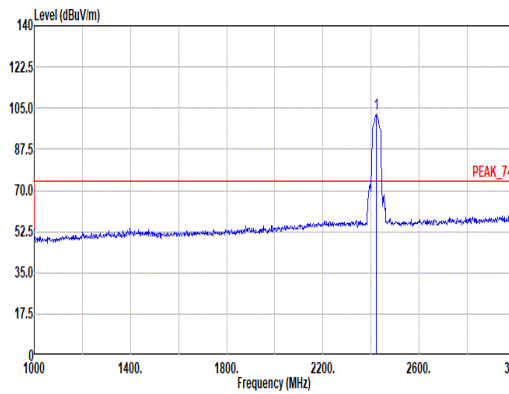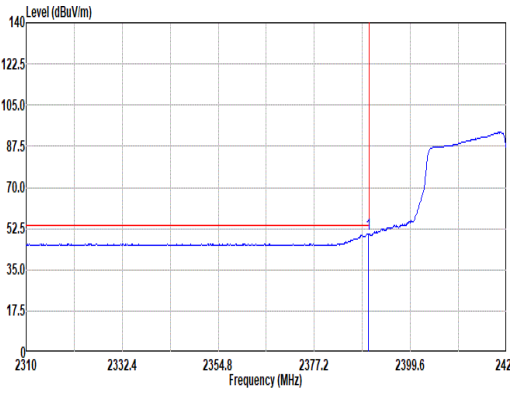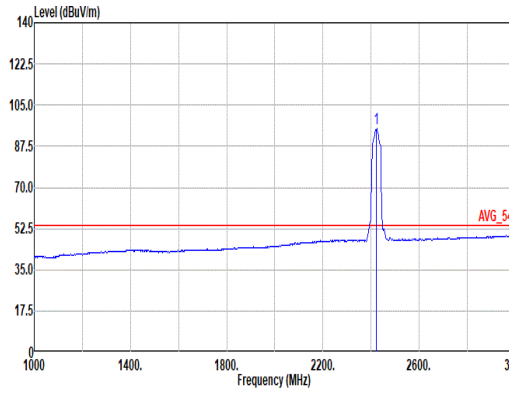Mode	21																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																		
ANT	4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.97</td><td>66.51</td><td>74.00</td><td>-7.49</td><td>51.51</td><td>27.70</td><td>7.71</td><td>30.33</td><td>9.92</td><td>146</td><td>109</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.97	66.51	74.00	-7.49	51.51	27.70	7.71	30.33	9.92	146	109	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>102.38</td><td>-----</td><td>-----</td><td>87.41</td><td>27.60</td><td>7.77</td><td>30.32</td><td>9.92</td><td>146</td><td>109</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	102.38	-----	-----	87.41	27.60	7.77	30.32	9.92	146	109
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.97	66.51	74.00	-7.49	51.51	27.70	7.71	30.33	9.92	146	109	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	102.38	-----	-----	87.41	27.60	7.77	30.32	9.92	146	109	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.74</td><td>50.36</td><td>54.00</td><td>-3.64</td><td>35.36</td><td>27.70</td><td>7.71</td><td>30.33</td><td>9.92</td><td>146</td><td>109</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.74	50.36	54.00	-3.64	35.36	27.70	7.71	30.33	9.92	146	109	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>95.02</td><td>-----</td><td>-----</td><td>80.05</td><td>27.60</td><td>7.77</td><td>30.32</td><td>9.92</td><td>146</td><td>109</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	95.02	-----	-----	80.05	27.60	7.77	30.32	9.92	146	109
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.74	50.36	54.00	-3.64	35.36	27.70	7.71	30.33	9.92	146	109	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	95.02	-----	-----	80.05	27.60	7.77	30.32	9.92	146	109	AVERAGE																																																																																							

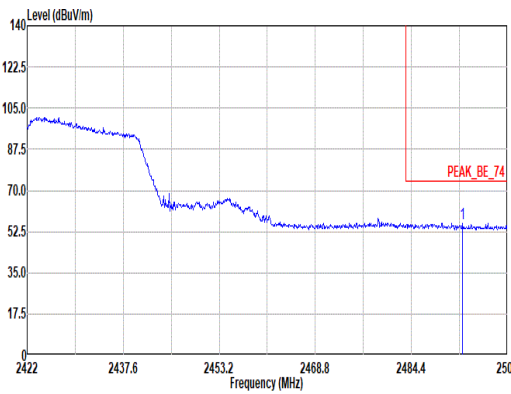
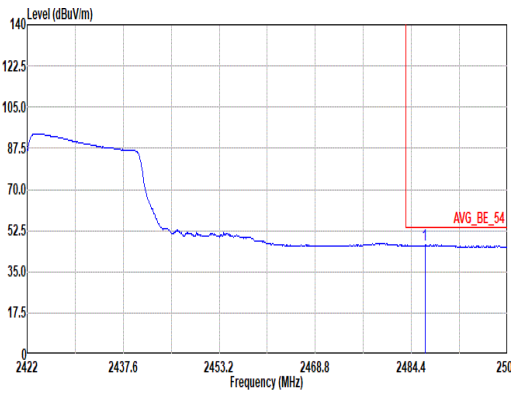


Mode	21																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																						
ANT	4																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.75</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>41.14</td><td>27.50</td><td>7.87</td><td>30.29</td><td>9.92</td><td>146</td><td>109</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2492.75	56.14	74.00	-17.86	41.14	27.50	7.87	30.29	9.92	146	109	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																														
1	2492.75	56.14	74.00	-17.86	41.14	27.50	7.87	30.29	9.92	146	109	PEAK																																											
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.58</td><td>46.44</td><td>54.00</td><td>-7.56</td><td>31.46</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>146</td><td>109</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2486.58	46.44	54.00	-7.56	31.46	27.50	7.86	30.30	9.92	146	109	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																														
1	2486.58	46.44	54.00	-7.56	31.46	27.50	7.86	30.30	9.92	146	109	AVERAGE																																											

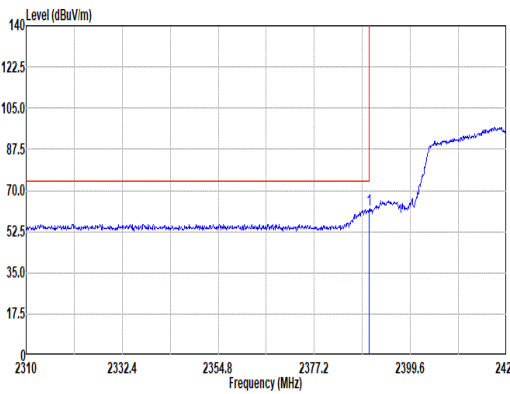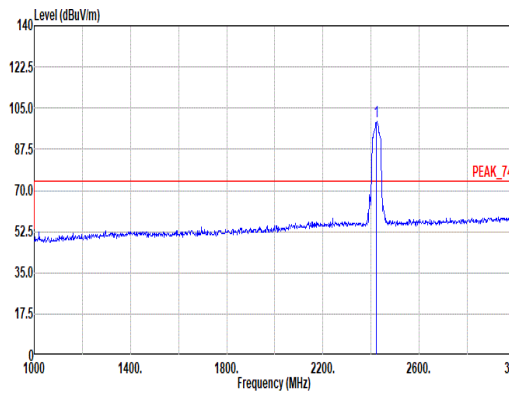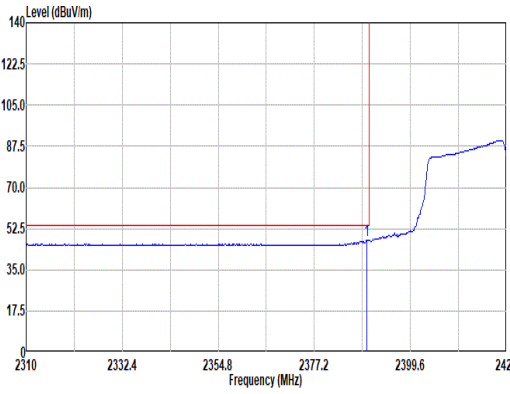
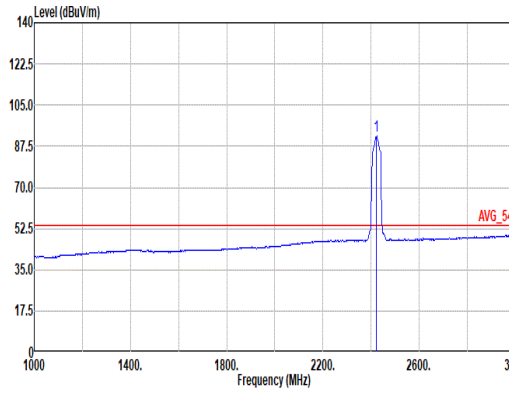


Mode	21																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																																																																																		
ANT	4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.97</td><td>61.98</td><td>74.00</td><td>-12.02</td><td>46.98</td><td>27.70</td><td>7.71</td><td>30.33</td><td>9.92</td><td>381</td><td>82</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.97	61.98	74.00	-12.02	46.98	27.70	7.71	30.33	9.92	381	82	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>99.42</td><td>-----</td><td>-----</td><td>84.45</td><td>27.60</td><td>7.77</td><td>30.32</td><td>9.92</td><td>381</td><td>82</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	99.42	-----	-----	84.45	27.60	7.77	30.32	9.92	381	82
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.97	61.98	74.00	-12.02	46.98	27.70	7.71	30.33	9.92	381	82	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	99.42	-----	-----	84.45	27.60	7.77	30.32	9.92	381	82	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.52</td><td>47.75</td><td>54.00</td><td>-6.25</td><td>32.75</td><td>27.70</td><td>7.71</td><td>30.33</td><td>9.92</td><td>381</td><td>82</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.52	47.75	54.00	-6.25	32.75	27.70	7.71	30.33	9.92	381	82	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>91.80</td><td>-----</td><td>-----</td><td>76.83</td><td>27.60</td><td>7.77</td><td>30.32</td><td>9.92</td><td>381</td><td>82</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	91.80	-----	-----	76.83	27.60	7.77	30.32	9.92	381	82
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.52	47.75	54.00	-6.25	32.75	27.70	7.71	30.33	9.92	381	82	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	91.80	-----	-----	76.83	27.60	7.77	30.32	9.92	381	82	AVERAGE																																																																																							



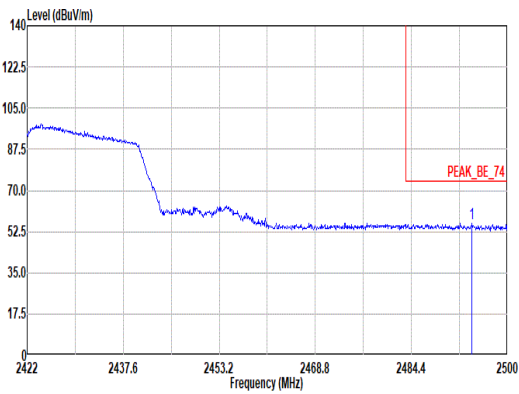
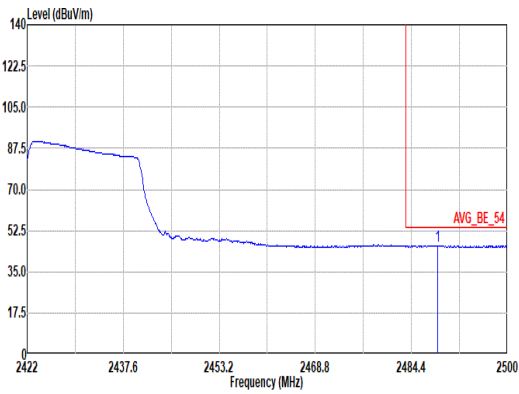


Mode	21																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																						
ANT	4																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.23</td><td>56.01</td><td>74.00</td><td>-17.99</td><td>41.00</td><td>27.50</td><td>7.88</td><td>30.29</td><td>9.92</td><td>381</td><td>82</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2494.23	56.01	74.00	-17.99	41.00	27.50	7.88	30.29	9.92	381	82	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																														
1	2494.23	56.01	74.00	-17.99	41.00	27.50	7.88	30.29	9.92	381	82	PEAK																																											
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.69</td><td>46.12</td><td>54.00</td><td>-7.88</td><td>31.12</td><td>27.50</td><td>7.87</td><td>30.29</td><td>9.92</td><td>381</td><td>82</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2488.69	46.12	54.00	-7.88	31.12	27.50	7.87	30.29	9.92	381	82	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																														
1	2488.69	46.12	54.00	-7.88	31.12	27.50	7.87	30.29	9.92	381	82	AVERAGE																																											

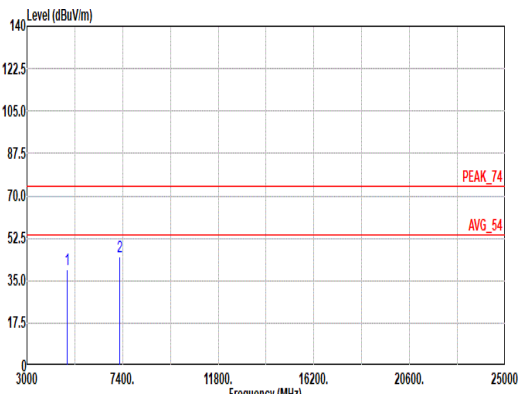
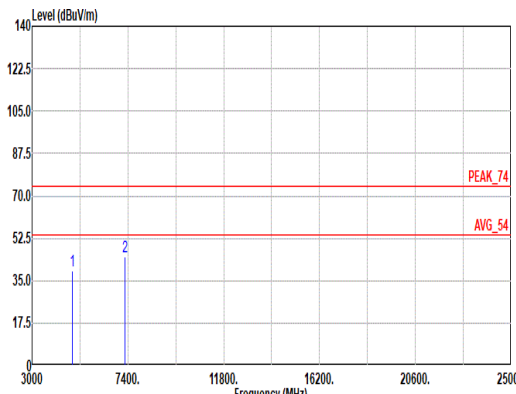


Mode	21																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																															
ANT	4																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>39.73</td><td>74.00</td><td>-34.27</td><td>63.27</td><td>31.30</td><td>11.04</td><td>66.37</td><td>0.49</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7266.00</td><td>45.10</td><td>74.00</td><td>-28.90</td><td>60.67</td><td>36.53</td><td>13.26</td><td>65.75</td><td>0.39</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4844.00	39.73	74.00	-34.27	63.27	31.30	11.04	66.37	0.49	--	PEAK	2	7266.00	45.10	74.00	-28.90	60.67	36.53	13.26	65.75	0.39	--	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>39.02</td><td>74.00</td><td>-34.98</td><td>62.56</td><td>31.30</td><td>11.04</td><td>66.37</td><td>0.49</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7266.00</td><td>45.06</td><td>74.00</td><td>-28.94</td><td>60.63</td><td>36.53</td><td>13.26</td><td>65.75</td><td>0.39</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4844.00	39.02	74.00	-34.98	62.56	31.30	11.04	66.37	0.49	--	PEAK	2	7266.00	45.06	74.00	-28.94	60.63	36.53	13.26	65.75	0.39	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4844.00	39.73	74.00	-34.27	63.27	31.30	11.04	66.37	0.49	--	PEAK																																																																																																					
2	7266.00	45.10	74.00	-28.90	60.67	36.53	13.26	65.75	0.39	--	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4844.00	39.02	74.00	-34.98	62.56	31.30	11.04	66.37	0.49	--	PEAK																																																																																																					
2	7266.00	45.06	74.00	-28.94	60.63	36.53	13.26	65.75	0.39	--	PEAK																																																																																																					

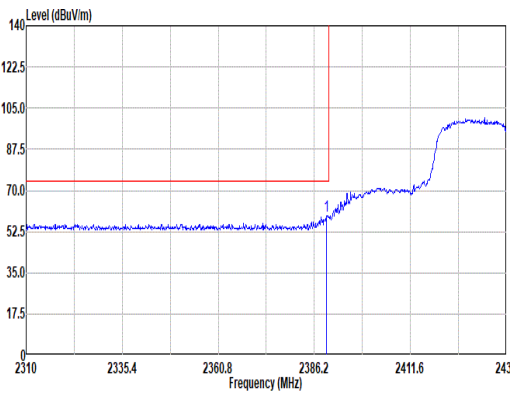
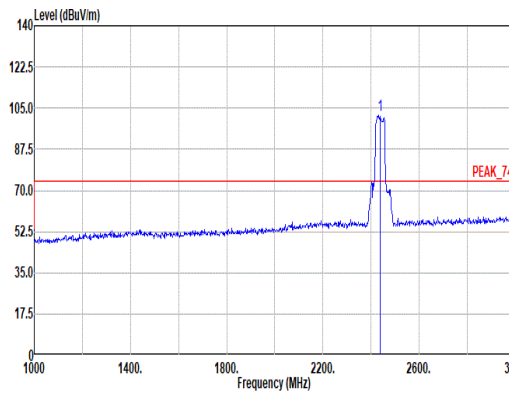
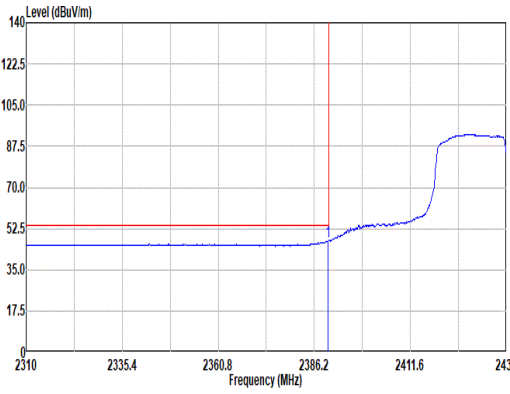
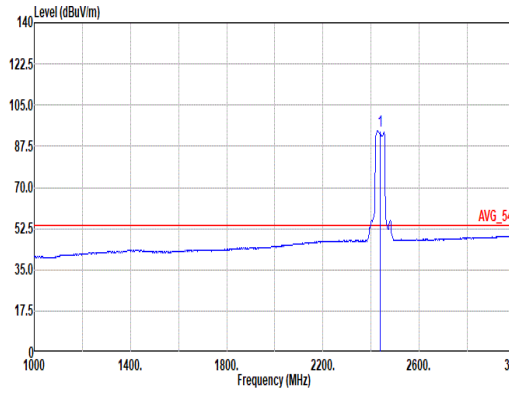


Mode	22																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																			
ANT	4																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.50</td><td>59.38</td><td>74.00</td><td>-14.62</td><td>44.38</td><td>27.70</td><td>7.71</td><td>30.33</td><td>9.92</td><td>113</td><td>112</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.50	59.38	74.00	-14.62	44.38	27.70	7.71	30.33	9.92	113	112	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>101.82</td><td>-----</td><td>-----</td><td>86.84</td><td>27.60</td><td>7.78</td><td>30.32</td><td>9.92</td><td>113</td><td>112</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	101.82	-----	-----	86.84	27.60	7.78	30.32	9.92	113	112	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.50	59.38	74.00	-14.62	44.38	27.70	7.71	30.33	9.92	113	112	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	101.82	-----	-----	86.84	27.60	7.78	30.32	9.92	113	112	PEAK																																																																																								
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.76</td><td>47.28</td><td>54.00</td><td>-6.72</td><td>32.28</td><td>27.70</td><td>7.71</td><td>30.33</td><td>9.92</td><td>113</td><td>112</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.76	47.28	54.00	-6.72	32.28	27.70	7.71	30.33	9.92	113	112	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>93.90</td><td>-----</td><td>-----</td><td>78.93</td><td>27.60</td><td>7.77</td><td>30.32</td><td>9.92</td><td>113</td><td>112</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	93.90	-----	-----	78.93	27.60	7.77	30.32	9.92	113	112	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.76	47.28	54.00	-6.72	32.28	27.70	7.71	30.33	9.92	113	112	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	93.90	-----	-----	78.93	27.60	7.77	30.32	9.92	113	112	AVERAGE																																																																																								

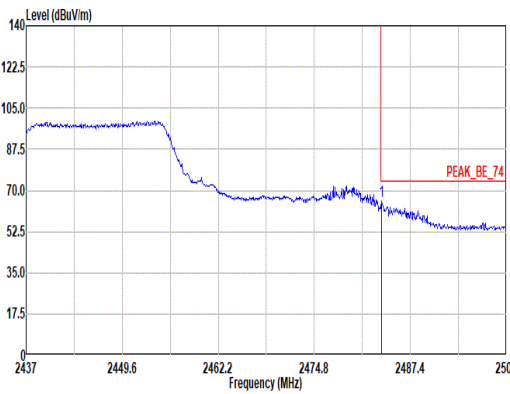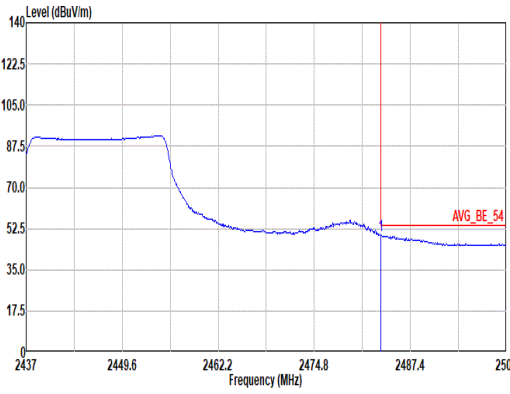

Mode	22																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																						
ANT	4																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>65.43</td><td>74.00</td><td>-8.57</td><td>50.45</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>113</td><td>112</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	65.43	74.00	-8.57	50.45	27.50	7.86	30.30	9.92	113	112	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.62	65.43	74.00	-8.57	50.45	27.50	7.86	30.30	9.92	113	112	PEAK																																											
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>49.47</td><td>54.00</td><td>-4.53</td><td>34.49</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>113</td><td>112</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	49.47	54.00	-4.53	34.49	27.50	7.86	30.30	9.92	113	112	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.56	49.47	54.00	-4.53	34.49	27.50	7.86	30.30	9.92	113	112	AVERAGE																																											

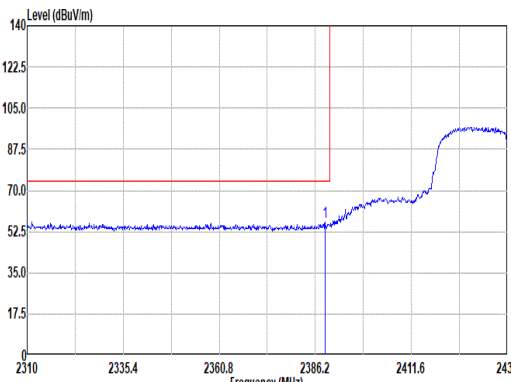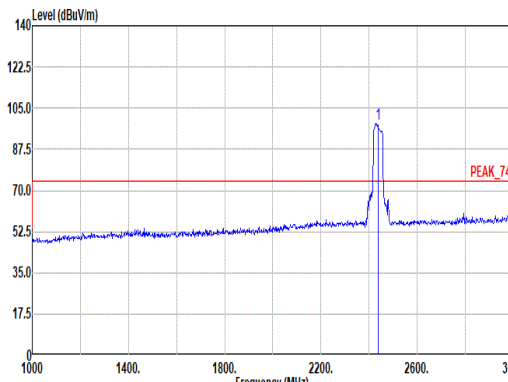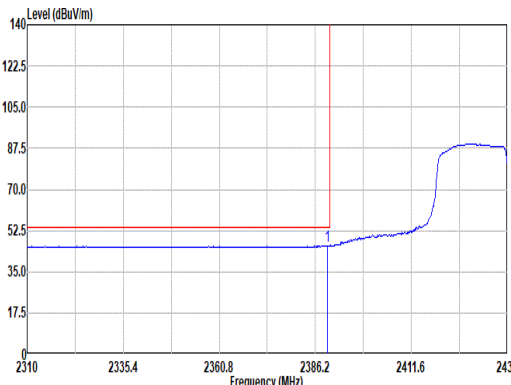
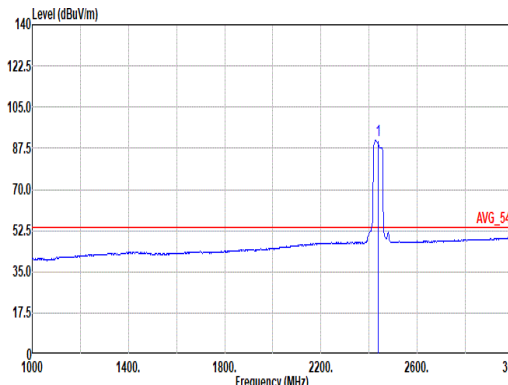


Mode	22																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																	
ANT	4																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.74</td><td>56.53</td><td>74.00</td><td>-17.47</td><td>41.54</td><td>27.69</td><td>7.71</td><td>30.33</td><td>9.92</td><td>385</td><td>69 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.74	56.53	74.00	-17.47	41.54	27.69	7.71	30.33	9.92	385	69 PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>98.41</td><td>-----</td><td>-----</td><td>83.43</td><td>27.60</td><td>7.78</td><td>30.32</td><td>9.92</td><td>385</td><td>69 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	98.41	-----	-----	83.43	27.60	7.78	30.32	9.92	385	69 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2388.74	56.53	74.00	-17.47	41.54	27.69	7.71	30.33	9.92	385	69 PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	98.41	-----	-----	83.43	27.60	7.78	30.32	9.92	385	69 PEAK																																																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.38</td><td>46.11</td><td>54.00</td><td>-7.89</td><td>31.12</td><td>27.69</td><td>7.71</td><td>30.33</td><td>9.92</td><td>385</td><td>69 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.38	46.11	54.00	-7.89	31.12	27.69	7.71	30.33	9.92	385	69 AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>90.98</td><td>-----</td><td>-----</td><td>76.01</td><td>27.60</td><td>7.77</td><td>30.32</td><td>9.92</td><td>385</td><td>69 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	90.98	-----	-----	76.01	27.60	7.77	30.32	9.92	385	69 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.38	46.11	54.00	-7.89	31.12	27.69	7.71	30.33	9.92	385	69 AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	90.98	-----	-----	76.01	27.60	7.77	30.32	9.92	385	69 AVERAGE																																																																																							







Mode	22																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																						
ANT	4																																																						
Pol.	Vertical						Fundamental																																																
Peak	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>58.79</td><td>74.00</td><td>-15.21</td><td>43.81</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>385</td><td>69</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	58.79	74.00	-15.21	43.81	27.50	7.86	30.30	9.92	385	69	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.56	58.79	74.00	-15.21	43.81	27.50	7.86	30.30	9.92	385	69	PEAK																																											
Avg	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.06</td><td>47.01</td><td>54.00</td><td>-6.99</td><td>32.03</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>385</td><td>69</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.06	47.01	54.00	-6.99	32.03	27.50	7.86	30.30	9.92	385	69	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.06	47.01	54.00	-6.99	32.03	27.50	7.86	30.30	9.92	385	69	AVERAGE																																											

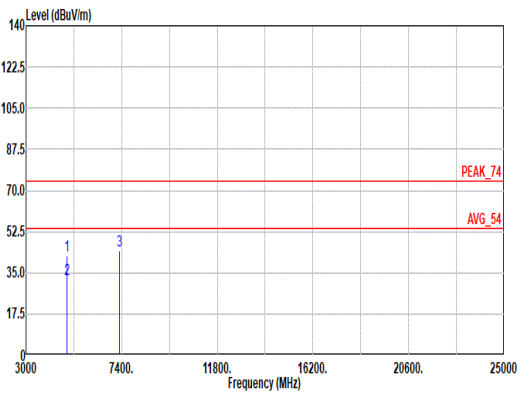
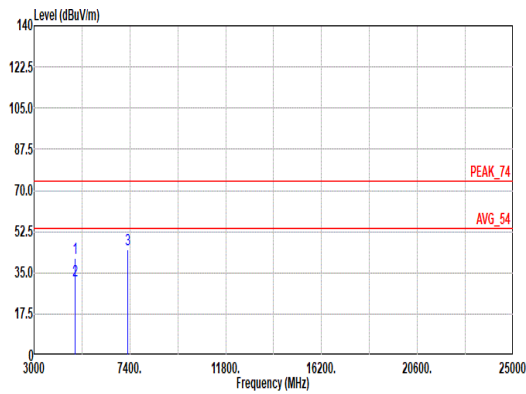


Mode	22																																																																																																																																																			
	Harmonic																																																																																																																																																			
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																																																																			
ANT	4																																																																																																																																																			
Pol.	Horizontal							Vertical																																																																																																																																												
Peak Avg																																																																																																																																																				
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL							Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL																																																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>42.50</td><td>74.00</td><td>-31.50</td><td>65.99</td><td>31.30</td><td>11.05</td><td>66.34</td><td>0.50</td><td>100</td><td>95</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>32.46</td><td>54.00</td><td>-21.54</td><td>55.95</td><td>31.30</td><td>11.05</td><td>66.34</td><td>0.50</td><td>100</td><td>95</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>44.42</td><td>74.00</td><td>-29.58</td><td>59.87</td><td>36.58</td><td>13.29</td><td>65.75</td><td>0.43</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	42.50	74.00	-31.50	65.99	31.30	11.05	66.34	0.50	100	95	PEAK	2	4874.00	32.46	54.00	-21.54	55.95	31.30	11.05	66.34	0.50	100	95	AVERAGE	3	7311.00	44.42	74.00	-29.58	59.87	36.58	13.29	65.75	0.43	--	--	PEAK	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>41.22</td><td>74.00</td><td>-32.78</td><td>64.71</td><td>31.30</td><td>11.05</td><td>66.34</td><td>0.50</td><td>103</td><td>338</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>31.87</td><td>54.00</td><td>-22.13</td><td>55.36</td><td>31.30</td><td>11.05</td><td>66.34</td><td>0.50</td><td>103</td><td>338</td><td>AVERAGE</td></tr><tr><td>3</td><td>7311.00</td><td>44.70</td><td>74.00</td><td>-29.30</td><td>60.15</td><td>36.58</td><td>13.29</td><td>65.75</td><td>0.43</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	41.22	74.00	-32.78	64.71	31.30	11.05	66.34	0.50	103	338	PEAK	2	4874.00	31.87	54.00	-22.13	55.36	31.30	11.05	66.34	0.50	103	338	AVERAGE	3	7311.00	44.70	74.00	-29.30	60.15	36.58	13.29	65.75	0.43	--	--	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																								
1	4874.00	42.50	74.00	-31.50	65.99	31.30	11.05	66.34	0.50	100	95	PEAK																																																																																																																																								
2	4874.00	32.46	54.00	-21.54	55.95	31.30	11.05	66.34	0.50	100	95	AVERAGE																																																																																																																																								
3	7311.00	44.42	74.00	-29.58	59.87	36.58	13.29	65.75	0.43	--	--	PEAK																																																																																																																																								
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																								
1	4874.00	41.22	74.00	-32.78	64.71	31.30	11.05	66.34	0.50	103	338	PEAK																																																																																																																																								
2	4874.00	31.87	54.00	-22.13	55.36	31.30	11.05	66.34	0.50	103	338	AVERAGE																																																																																																																																								
3	7311.00	44.70	74.00	-29.30	60.15	36.58	13.29	65.75	0.43	--	--	PEAK																																																																																																																																								

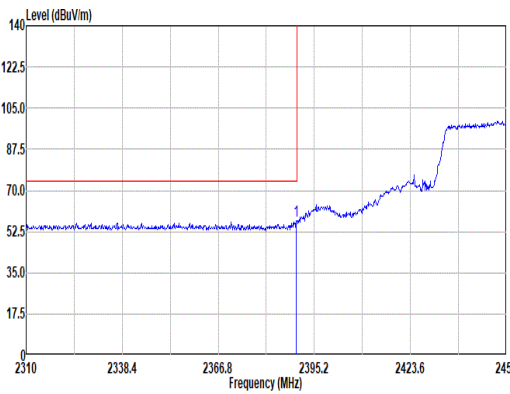
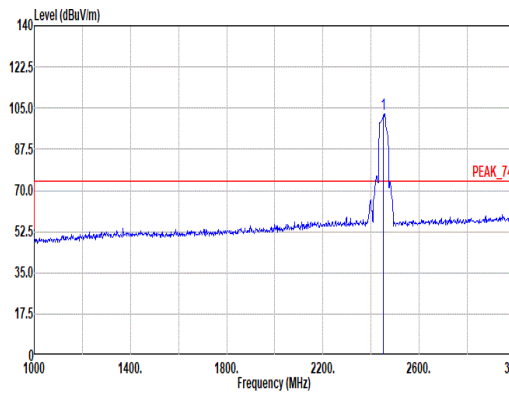
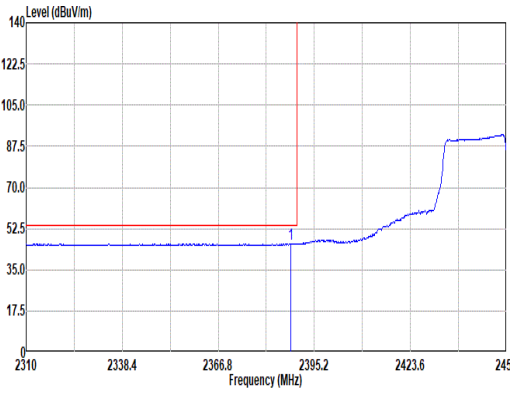
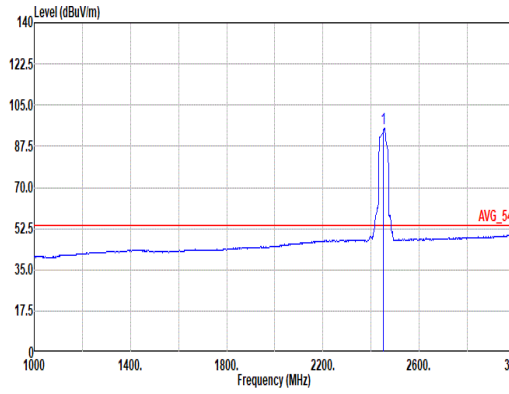


Mode	23																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11n_HT40_CH09_2452MHz																																																																																																			
ANT	4																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>57.02</td><td>74.00</td><td>-16.98</td><td>42.02</td><td>27.70</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>108</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	57.02	74.00	-16.98	42.02	27.70	7.71	30.33	9.92	100	108	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>102.62</td><td>-----</td><td>-----</td><td>87.79</td><td>27.40</td><td>7.82</td><td>30.31</td><td>9.92</td><td>100</td><td>108</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	102.62	-----	-----	87.79	27.40	7.82	30.31	9.92	100	108	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	57.02	74.00	-16.98	42.02	27.70	7.71	30.33	9.92	100	108	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2452.00	102.62	-----	-----	87.79	27.40	7.82	30.31	9.92	100	108	PEAK																																																																																								
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.24</td><td>46.05</td><td>54.00</td><td>-7.95</td><td>31.07</td><td>27.68</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>108</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.24	46.05	54.00	-7.95	31.07	27.68	7.71	30.33	9.92	100	108	AVERAGE	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>94.98</td><td>-----</td><td>-----</td><td>80.15</td><td>27.40</td><td>7.82</td><td>30.31</td><td>9.92</td><td>100</td><td>108</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	94.98	-----	-----	80.15	27.40	7.82	30.31	9.92	100	108	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2388.24	46.05	54.00	-7.95	31.07	27.68	7.71	30.33	9.92	100	108	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2452.00	94.98	-----	-----	80.15	27.40	7.82	30.31	9.92	100	108	AVERAGE																																																																																								

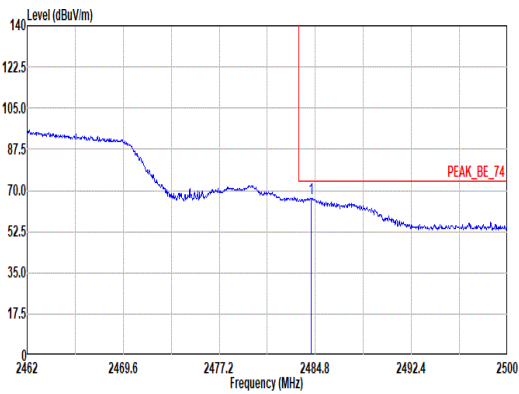
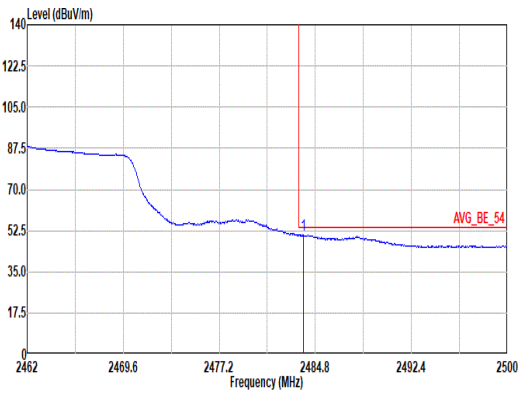


Mode	23																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																							
ANT	4																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.50</td><td>66.76</td><td>74.00</td><td>-7.24</td><td>51.78</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>100</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2484.50	66.76	74.00	-7.24	51.78	27.50	7.86	30.30	9.92	100	100	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	2484.50	66.76	74.00	-7.24	51.78	27.50	7.86	30.30	9.92	100	100	PEAK																																												
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.85</td><td>50.57</td><td>54.00</td><td>-3.43</td><td>35.59</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>100</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2483.85	50.57	54.00	-3.43	35.59	27.50	7.86	30.30	9.92	100	100	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	2483.85	50.57	54.00	-3.43	35.59	27.50	7.86	30.30	9.92	100	100	AVERAGE																																												

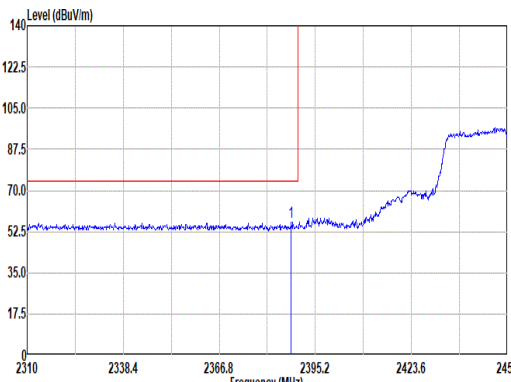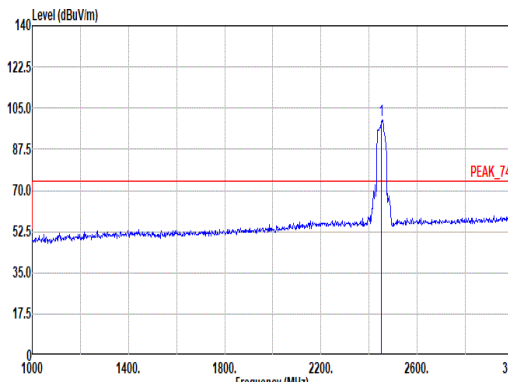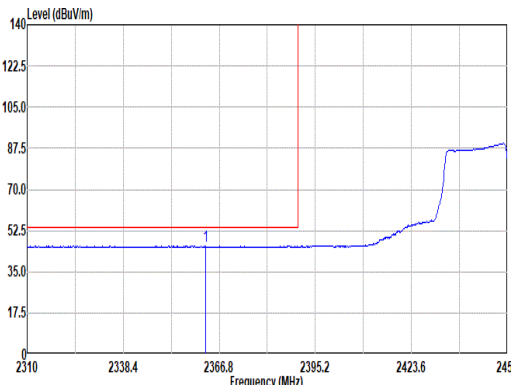
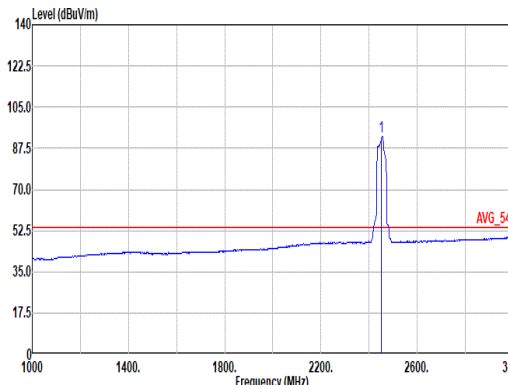


Mode	23																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																		
ANT	4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.10</td><td>56.42</td><td>74.00</td><td>-17.58</td><td>41.44</td><td>27.68</td><td>7.71</td><td>30.33</td><td>9.92</td><td>330</td><td>80</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.10	56.42	74.00	-17.58	41.44	27.68	7.71	30.33	9.92	330	80	PEAK	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>99.93</td><td>-----</td><td>-----</td><td>85.11</td><td>27.40</td><td>7.81</td><td>30.31</td><td>9.92</td><td>330</td><td>80</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	99.93	-----	-----	85.11	27.40	7.81	30.31	9.92	330	80
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2388.10	56.42	74.00	-17.58	41.44	27.68	7.71	30.33	9.92	330	80	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	99.93	-----	-----	85.11	27.40	7.81	30.31	9.92	330	80	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:1.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2362.82</td><td>45.98</td><td>54.00</td><td>-8.02</td><td>30.89</td><td>27.84</td><td>7.67</td><td>30.34</td><td>9.92</td><td>330</td><td>80</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2362.82	45.98	54.00	-8.02	30.89	27.84	7.67	30.34	9.92	330	80	AVERAGE	Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:1.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>92.29</td><td>-----</td><td>-----</td><td>77.47</td><td>27.40</td><td>7.81</td><td>30.31</td><td>9.92</td><td>330</td><td>80</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	92.29	-----	-----	77.47	27.40	7.81	30.31	9.92	330	80
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2362.82	45.98	54.00	-8.02	30.89	27.84	7.67	30.34	9.92	330	80	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	92.29	-----	-----	77.47	27.40	7.81	30.31	9.92	330	80	AVERAGE																																																																																							

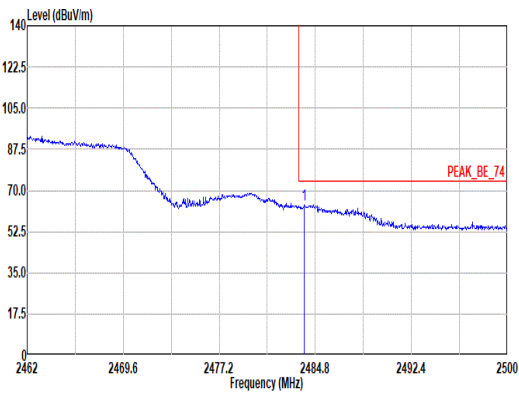
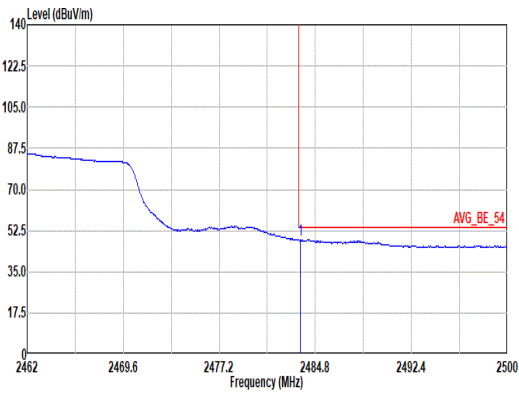


Mode	23																																												
	Band Edge - R																																												
	2400-2483.5_802.11n HT40_CH09_2452MHz																																												
ANT	4																																												
Pol.	Vertical	Fundamental																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.93</td><td>63.93</td><td>74.00</td><td>-10.07</td><td>48.95</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>330</td><td>80</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.93	63.93	74.00	-10.07	48.95	27.50	7.86	30.30	9.92	330	80	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																							
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																				
1	2483.93	63.93	74.00	-10.07	48.95	27.50	7.86	30.30	9.92	330	80	PEAK																																	
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>48.48</td><td>54.00</td><td>-5.52</td><td>33.50</td><td>27.50</td><td>7.86</td><td>30.30</td><td>9.92</td><td>330</td><td>80</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.58	48.48	54.00	-5.52	33.50	27.50	7.86	30.30	9.92	330	80	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																							
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																				
1	2483.58	48.48	54.00	-5.52	33.50	27.50	7.86	30.30	9.92	330	80	AVERAGE																																	

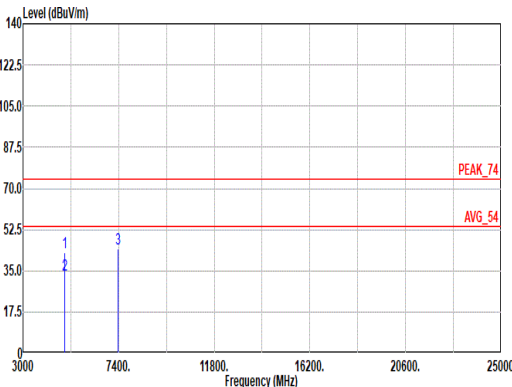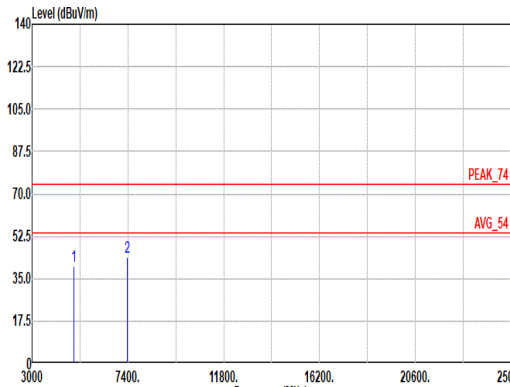

Mode	23																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																																																											
ANT	4																																																																																																																																											
Pol.	Horizontal							Vertical																																																																																																																																				
Peak Avg	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 HORIZONTAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4904.00</td><td>42.75</td><td>74.00</td><td>-31.25</td><td></td><td>66.20</td><td>31.31</td><td>11.05</td><td>66.32</td><td>0.51</td><td>100</td><td>118</td><td>PEAK</td></tr><tr><td>2</td><td>4904.00</td><td>33.51</td><td>54.00</td><td>-20.49</td><td></td><td>56.96</td><td>31.31</td><td>11.05</td><td>66.32</td><td>0.51</td><td>100</td><td>118</td><td>AVERAGE</td></tr><tr><td>3</td><td>7356.00</td><td>44.25</td><td>74.00</td><td>-29.75</td><td></td><td>59.74</td><td>36.49</td><td>13.32</td><td>65.76</td><td>0.46</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	4904.00	42.75	74.00	-31.25		66.20	31.31	11.05	66.32	0.51	100	118	PEAK	2	4904.00	33.51	54.00	-20.49		56.96	31.31	11.05	66.32	0.51	100	118	AVERAGE	3	7356.00	44.25	74.00	-29.75		59.74	36.49	13.32	65.76	0.46	--	--	PEAK	 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1328_241206 VERTICAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4904.00</td><td>40.33</td><td>74.00</td><td>-33.67</td><td></td><td>63.78</td><td>31.31</td><td>11.05</td><td>66.32</td><td>0.51</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>44.04</td><td>74.00</td><td>-29.96</td><td></td><td>59.53</td><td>36.49</td><td>13.32</td><td>65.76</td><td>0.46</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	4904.00	40.33	74.00	-33.67		63.78	31.31	11.05	66.32	0.51	--	--	PEAK	2	7356.00	44.04	74.00	-29.96		59.53	36.49	13.32	65.76	0.46	--	--	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4904.00	42.75	74.00	-31.25		66.20	31.31	11.05	66.32	0.51	100	118	PEAK																																																																																																																															
2	4904.00	33.51	54.00	-20.49		56.96	31.31	11.05	66.32	0.51	100	118	AVERAGE																																																																																																																															
3	7356.00	44.25	74.00	-29.75		59.74	36.49	13.32	65.76	0.46	--	--	PEAK																																																																																																																															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4904.00	40.33	74.00	-33.67		63.78	31.31	11.05	66.32	0.51	--	--	PEAK																																																																																																																															
2	7356.00	44.04	74.00	-29.96		59.53	36.49	13.32	65.76	0.46	--	--	PEAK																																																																																																																															

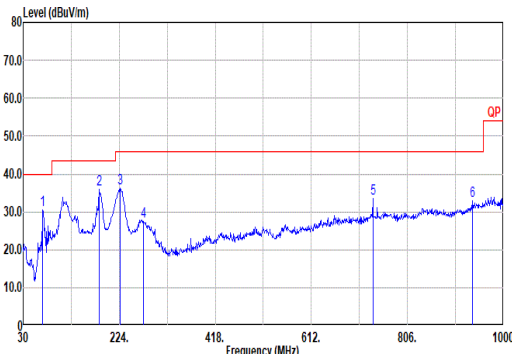
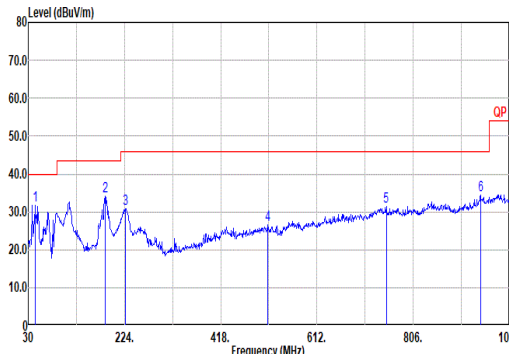


Mode	24																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																																																					
ANT	4																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QP/ Peak	 Site : 03CH16-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_241005 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>69.77</td><td>30.36</td><td>40.00</td><td>-9.64</td><td>48.83</td><td>12.54</td><td>1.31</td><td>32.37</td><td>0.05 -- -- Peak</td></tr><tr><td>2</td><td>183.26</td><td>35.79</td><td>43.50</td><td>-7.71</td><td>50.66</td><td>15.20</td><td>2.11</td><td>32.26</td><td>0.08 -- -- Peak</td></tr><tr><td>3</td><td>225.94</td><td>36.11</td><td>46.00</td><td>-9.89</td><td>50.27</td><td>15.95</td><td>2.33</td><td>32.51</td><td>0.07 -- -- Peak</td></tr><tr><td>4</td><td>273.47</td><td>27.61</td><td>46.00</td><td>-18.39</td><td>38.43</td><td>18.05</td><td>2.56</td><td>32.30</td><td>0.07 -- -- Peak</td></tr><tr><td>5</td><td>736.16</td><td>33.47</td><td>46.00</td><td>-12.53</td><td>33.05</td><td>28.16</td><td>4.22</td><td>32.10</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>937.92</td><td>32.89</td><td>46.00</td><td>-13.11</td><td>29.13</td><td>30.62</td><td>4.78</td><td>31.88</td><td>0.24 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	69.77	30.36	40.00	-9.64	48.83	12.54	1.31	32.37	0.05 -- -- Peak	2	183.26	35.79	43.50	-7.71	50.66	15.20	2.11	32.26	0.08 -- -- Peak	3	225.94	36.11	46.00	-9.89	50.27	15.95	2.33	32.51	0.07 -- -- Peak	4	273.47	27.61	46.00	-18.39	38.43	18.05	2.56	32.30	0.07 -- -- Peak	5	736.16	33.47	46.00	-12.53	33.05	28.16	4.22	32.10	0.14 -- -- Peak	6	937.92	32.89	46.00	-13.11	29.13	30.62	4.78	31.88	0.24 -- -- Peak	 Site : 03CH16-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_241005 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>43.58</td><td>31.84</td><td>40.00</td><td>-8.16</td><td>45.64</td><td>17.63</td><td>1.02</td><td>32.50</td><td>0.05 -- -- Peak</td></tr><tr><td>2</td><td>185.20</td><td>34.06</td><td>43.50</td><td>-9.44</td><td>49.02</td><td>15.14</td><td>2.12</td><td>32.30</td><td>0.08 -- -- Peak</td></tr><tr><td>3</td><td>225.94</td><td>30.91</td><td>46.00</td><td>-15.09</td><td>45.07</td><td>15.95</td><td>2.33</td><td>32.51</td><td>0.07 -- -- Peak</td></tr><tr><td>4</td><td>512.09</td><td>26.50</td><td>46.00</td><td>-19.50</td><td>31.89</td><td>23.88</td><td>3.51</td><td>32.93</td><td>0.15 -- -- Peak</td></tr><tr><td>5</td><td>751.68</td><td>31.35</td><td>46.00</td><td>-14.65</td><td>30.65</td><td>28.37</td><td>4.26</td><td>32.07</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>941.00</td><td>34.36</td><td>46.00</td><td>-11.64</td><td>30.35</td><td>30.82</td><td>4.79</td><td>31.84</td><td>0.24 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	43.58	31.84	40.00	-8.16	45.64	17.63	1.02	32.50	0.05 -- -- Peak	2	185.20	34.06	43.50	-9.44	49.02	15.14	2.12	32.30	0.08 -- -- Peak	3	225.94	30.91	46.00	-15.09	45.07	15.95	2.33	32.51	0.07 -- -- Peak	4	512.09	26.50	46.00	-19.50	31.89	23.88	3.51	32.93	0.15 -- -- Peak	5	751.68	31.35	46.00	-14.65	30.65	28.37	4.26	32.07	0.14 -- -- Peak	6	941.00	34.36	46.00	-11.64	30.35	30.82	4.79	31.84	0.24 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	69.77	30.36	40.00	-9.64	48.83	12.54	1.31	32.37	0.05 -- -- Peak																																																																																																																																																																													
2	183.26	35.79	43.50	-7.71	50.66	15.20	2.11	32.26	0.08 -- -- Peak																																																																																																																																																																													
3	225.94	36.11	46.00	-9.89	50.27	15.95	2.33	32.51	0.07 -- -- Peak																																																																																																																																																																													
4	273.47	27.61	46.00	-18.39	38.43	18.05	2.56	32.30	0.07 -- -- Peak																																																																																																																																																																													
5	736.16	33.47	46.00	-12.53	33.05	28.16	4.22	32.10	0.14 -- -- Peak																																																																																																																																																																													
6	937.92	32.89	46.00	-13.11	29.13	30.62	4.78	31.88	0.24 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	43.58	31.84	40.00	-8.16	45.64	17.63	1.02	32.50	0.05 -- -- Peak																																																																																																																																																																													
2	185.20	34.06	43.50	-9.44	49.02	15.14	2.12	32.30	0.08 -- -- Peak																																																																																																																																																																													
3	225.94	30.91	46.00	-15.09	45.07	15.95	2.33	32.51	0.07 -- -- Peak																																																																																																																																																																													
4	512.09	26.50	46.00	-19.50	31.89	23.88	3.51	32.93	0.15 -- -- Peak																																																																																																																																																																													
5	751.68	31.35	46.00	-14.65	30.65	28.37	4.26	32.07	0.14 -- -- Peak																																																																																																																																																																													
6	941.00	34.36	46.00	-11.64	30.35	30.82	4.79	31.84	0.24 -- -- Peak																																																																																																																																																																													



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
4	802.11b	99.70	-	-	10Hz
4	802.11g	97.54	1390	0.72	750Hz
4	2.4GHz 802.11n HT20	97.38	1300	0.77	820Hz
4	2.4GHz 802.11n HT40	95.01	648	1.54	1.6kHz

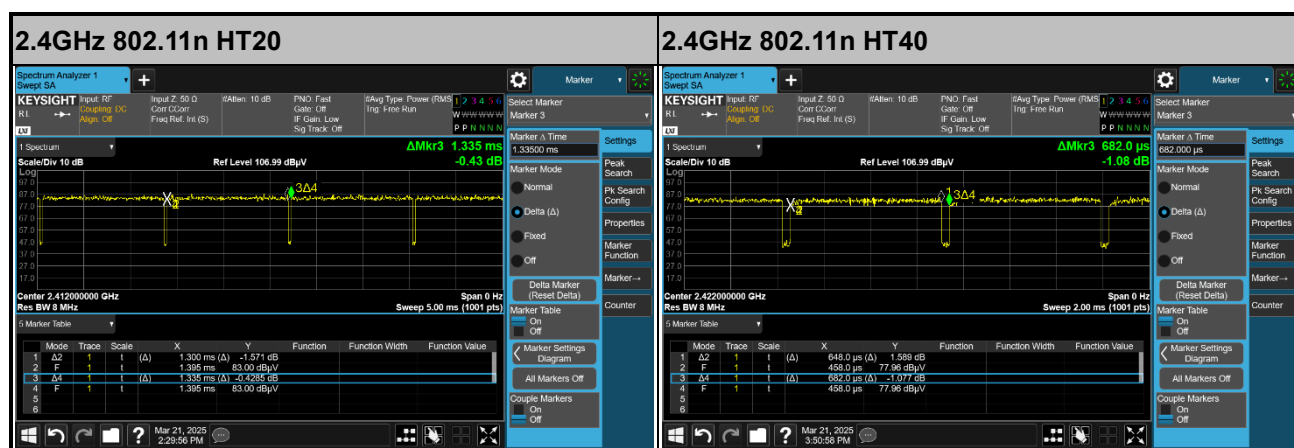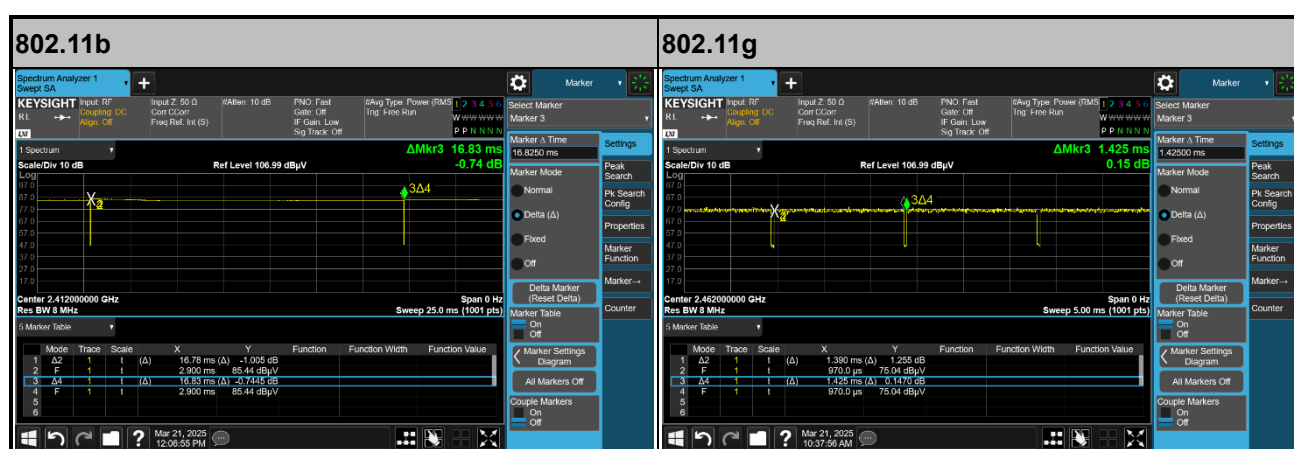

—THE END—