



FCC RADIO TEST REPORT

FCC ID : APYHRO00342
Equipment : Smart phone
Brand Name : SHARP
Model Name : APYHRO00342
Applicant : SHARP CORPORATION
2-1-25, Kyutaromachi, Chuo-ku, Osaka city,
Osaka 541-8522, JAPAN
Manufacturer : SHARP CORPORATION
2-1-25, Kyutaromachi, Chuo-ku, Osaka city,
Osaka 541-8522, JAPAN
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27

The product was received on May. 15, 2026 and testing was performed from May. 28, 2026 to Jun. 09, 2026. We, Sporton International Inc. would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.26-2015 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system	8
2.4 Measurement Results Explanation Example.....	8
2.5 Frequency List of Low/Middle/High Channels	9
3 Conducted Test Items.....	14
3.1 Measuring Instruments	14
3.2 Conducted Output Power and ERP/EIRP	15
3.3 Peak-to-Average Ratio	16
3.4 Occupied Bandwidth.....	17
3.5 Conducted Band Edge	18
3.6 Conducted Spurious Emission	20
3.7 Frequency Stability	21
4 Radiated Test Items	22
4.1 Measuring Instruments	22
4.2 Radiated Spurious Emission Measurement	24
5 List of Measuring Equipment.....	26
6 Measurement Uncertainty	28
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG5D2218B	01	Initial issue of report	Jul. 16, 2026



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (Band 5)	Pass	
	§27.50 (c)(10)	Effective Radiated Power (Band 12) (Band 17)		
	§24.232(c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7) (Band 38) (Band 41)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Band Edge Measurement (Band 2) (Band 5) (Band 12) (Band 17)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (Band 7) (Band 38) (Band 41)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Spurious Emission (Band 2) (Band 5) (Band 12) (Band 17)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (Band 7) (Band 38) (Band 41)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (g)	Radiated Spurious Emission (Band 2) (Band 5) (Band 12) (Band 17)	Pass	-
	§2.1053 §27.53 (m)(4)	Radiated Spurious Emission (Band 7) (Band 38) (Band 41)		

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Julia Chang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Specification subject to this standard	
General Specs	GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac, and GNSS/NFC
Antenna Type	WWAN: PIFA & Monopole Antenna WLAN: LOOP Antenna Bluetooth: LOOP Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna

Support band and evaluated information	
Supported band	B2,B5,B7,B12,B17,B38,B41,B38C,B41C
Evaluated and Tested band	B2,B5,B7,B12,B17,B38,B41,B38C,B41C

FDD/TDD band Power Class				
	SISO PC3	SISO PC2		
B2	√			
B5	√			
B7	√			
B12	√			
B17	√			
B38/B38C	√			
B41/B41C	√			

Max Antenna Gain information(dBi)						
Band	Ant 0	Ant 1				Main Ant. #
B2		0.11				1
B5	-2.09					0
B7		-2.02				1
B12	-2.94					0
B17	-2.94					0
B38		-2.42				1
B41		-2.02				1

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH12-HY
Test Engineer	Cotty Hsu	Tim Lee, Wilson Wu, and Gerry Wei
Temperature (°C)	22.2 ~ 22.7	20 ~ 25
Relative Humidity (%)	53.6 ~ 55.4	50 ~ 60

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW3786

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..


Modulation Type	Modulation
A	QPSK
B	16QAM
C	64QAM

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C	All	1, Half, Full	L, M, H
EIRP	A, B, C	All	1, Half, Full	L, M, H
PAR	A, B, C	Max	Full	M
Bandwidth	A, B	All	Full	M
CBE	A	All	1RB Full	L, H
CSE	A	All	1RB	L, M, H
Frequency Stability	A	10 MHz or less	Full	M
RSE	A	Max	1RB	L, M, H

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. One representative bandwidth is selected to perform PAR and frequency stability.

2.2 Connection Diagram of Test System

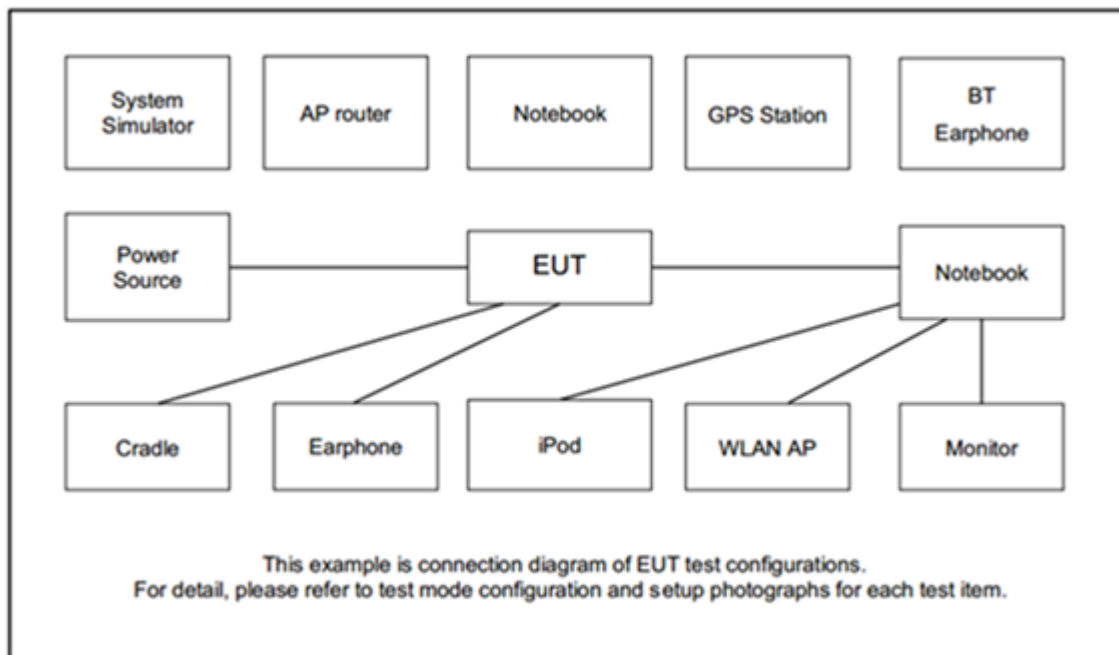

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	8821C	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss

$$\text{Offset} = \text{RF cable loss}$$

Following shows an offset computation example with cable loss 7.70 dB

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 7.70(\text{dB}) \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5



LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3

LTE Band 17 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23780	23790	23800
	Frequency	709	710	711
5	Channel	23755	23790	23825
	Frequency	706.5	710	713.5

LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580.0	2595.0	2610.0
15	Channel	37825	38000	38175
	Frequency	2577.5	2595.0	2612.5
10	Channel	37800	38000	38200
	Frequency	2575.0	2595.0	2615.0
5	Channel	37775	38000	38225
	Frequency	2572.5	2595.0	2617.5



LTE Band 41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	39750	40620	41490
	Frequency	2506.0	2593.0	2680.0
15	Channel	39725	40620	41515
	Frequency	2503.5	2593.0	2682.5
10	Channel	39700	40620	41540
	Frequency	2501.0	2593.0	2685.0
5	Channel	39675	40620	41565
	Frequency	2498.5	2593.0	2687.5

LTE Band 38C Channel and Frequency List_CA					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	37850	37901	37952
		Frequency	2580.0	2585.1	2590.2
	SCC	Channel	38048	38099	38150
		Frequency	2599.8	2604.9	2610.0
15+ 15	PCC	Channel	37825	37925	38025
		Frequency	2577.5	2587.5	2597.5
	SCC	Channel	37975	38075	38175
		Frequency	2592.5	2602.5	2612.5



LTE Band 41C Channel and Frequency List_CA					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
20 + 20	PCC	Channel	39750	40521	41292
		Frequency	2506.0	2583.1	2660.2
	SCC	Channel	39948	40719	41490
		Frequency	2525.8	2602.9	2680.0
20 + 15	PCC	Channel	39750	40546	41341
		Frequency	2506.0	2585.6	2665.1
	SCC	Channel	39921	40717	41512
		Frequency	2523.1	2602.7	2682.2
15 + 20	PCC	Channel	39728	40523	41319
		Frequency	2503.8	2583.3	2662.9
	SCC	Channel	39899	40694	41490
		Frequency	2520.9	2600.4	2680.0
20 + 10	PCC	Channel	39750	40571	41391
		Frequency	2506.0	2588.1	2670.1
	SCC	Channel	39894	40715	41535
		Frequency	2520.4	2602.5	2684.5
10 + 20	PCC	Channel	39705	40526	41346
		Frequency	2501.5	2583.6	2665.6
	SCC	Channel	39849	40670	41490
		Frequency	2515.9	2598.0	2680.0



LTE Band 41C Channel and Frequency List_CA					
15 + 15	PCC	Channel	39725	40545	41365
		Frequency	2503.5	2585.5	2667.5
	SCC	Channel	39875	40695	41515
		Frequency	2518.5	2600.5	2682.5
10 + 15	PCC	Channel	39703	40549	41395
		Frequency	2501.3	2585.9	2670.5
	SCC	Channel	39823	40669	41515
		Frequency	2513.3	2597.9	2682.5
15 + 10	PCC	Channel	39725	40571	41417
		Frequency	2503.5	2588.1	2672.7
	SCC	Channel	39845	40691	41537
		Frequency	2515.5	2600.1	2684.7

3 Conducted Test Items


Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

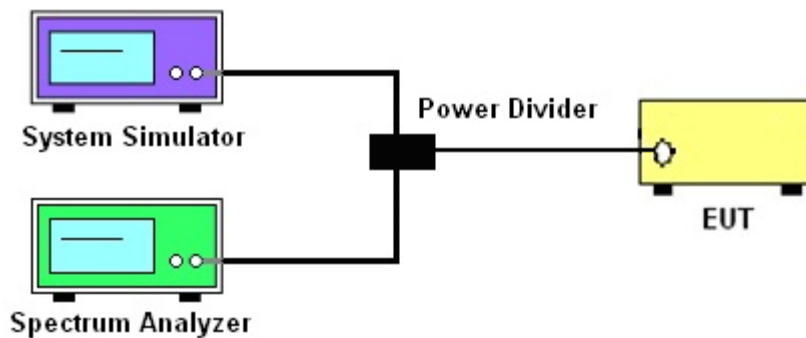

3.1.4 Frequency Stability

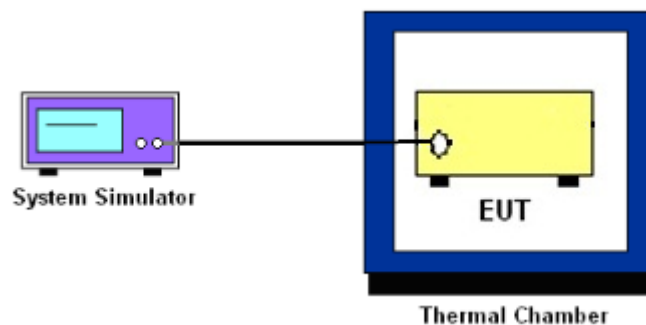

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 12, Band 17

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2, Band 7, Band 38, Band 41

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600MHz band and 698-746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For LTE Band 7, 38, 41

The other 40 dB, and 55 dB have additionally applied same calculation above.

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For LTE Band 7, 38, 41

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The conducted spurious emission for the whole frequency range was taken.
4. Make the measurement with the spectrum analyzer's RBW = 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz, VBW = 3 * RBW.
5. Set spectrum analyzer with RMS detector.
6. Taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
- 9.

For LTE Band 7, 38, 41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

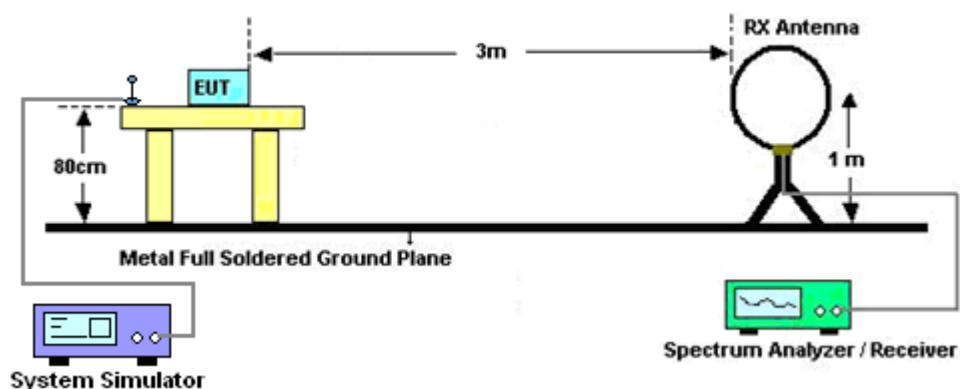


For radiated test from 30MHz to 1GHz

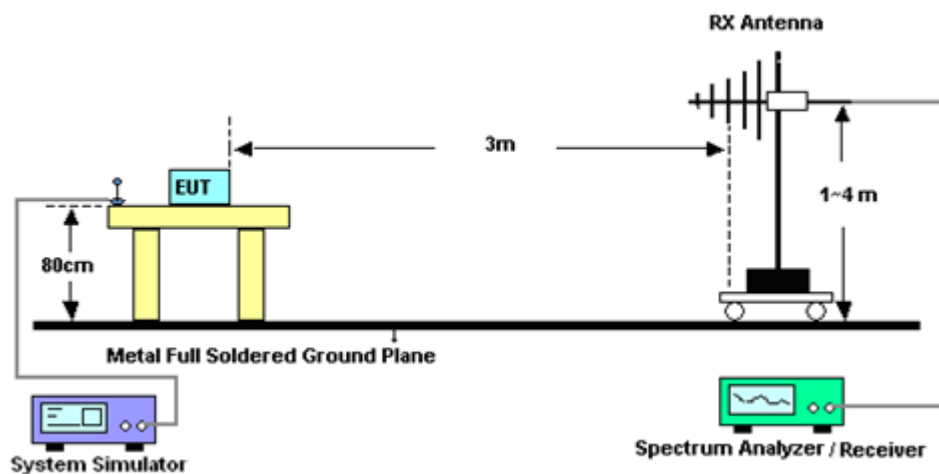

For radiated test from 1GHz to 18GHz

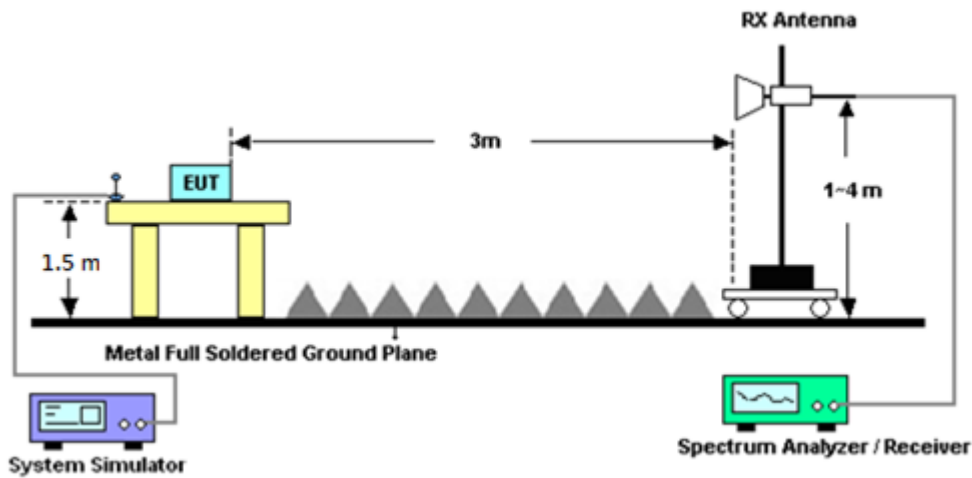

For radiated test above 18GHz

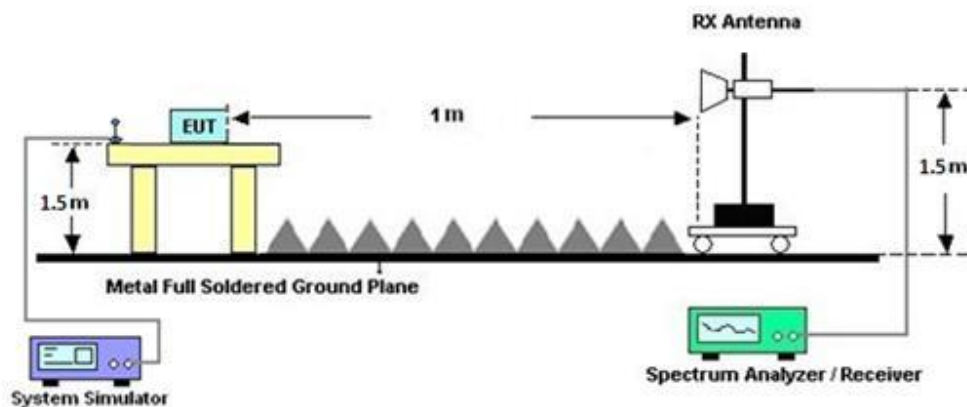

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

For LTE Band 7, 38, 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)
For LTE Band 7, 38, 41
The limit line is derived from $55 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	May. 28, 2026~ Jun. 09, 2026	Dec. 10, 2026	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	37059 & 01	30MHz~1GHz	Nov. 26, 2025	May. 28, 2026~ Jun. 09, 2026	Nov. 25, 2026	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1GHz~18GHz	Jul. 02, 2025	May. 28, 2026~ Jun. 09, 2026	Jul. 01, 2026	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 02, 2025	May. 28, 2026~ Jun. 09, 2026	Jul. 01, 2026	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 18, 2026	May. 28, 2026~ Jun. 09, 2026	Mar. 17, 2027	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	Feb. 06, 2026	May. 28, 2026~ Jun. 09, 2026	Feb. 05, 2027	Radiation (03CH12-HY)
Amplifier	EMCI	EMC051845S E	980729	1GHz-18GHz	Dec. 17, 2025	May. 28, 2026~ Jun. 09, 2026	Dec. 16, 2026	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 02, 2025	May. 28, 2026~ Jun. 09, 2026	Dec. 01, 2026	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Sep. 09, 2025	May. 28, 2026~ Jun. 09, 2026	Sep. 08, 2026	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz~26.5GHz	Sep. 08, 2025	May. 28, 2026~ Jun. 09, 2026	Sep. 07, 2026	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN2	6.75GHz High Pass Filter	Mar. 11, 2026	May. 28, 2026~ Jun. 09, 2026	Mar. 10, 2027	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX12-270 0-3000-18000- 60ST	SN2	3GHz High Pass Filter	Mar. 11, 2026	May. 28, 2026~ Jun. 09, 2026	Mar. 10, 2027	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX12-900- 1000-15000-6 0SS	SN11	1GHz High Pass Filter	Mar. 11, 2026	May. 28, 2026~ Jun. 09, 2026	Mar. 10, 2027	Radiation (03CH12-HY)
Notch Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN111	1.53GHz Low Pass Filter	Nov. 04, 2025	May. 28, 2026~ Jun. 09, 2026	Nov. 03, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803955/2	30MHz~40GHz	Oct. 31, 2025	May. 28, 2026~ Jun. 09, 2026	Oct. 30, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Oct. 31, 2025	May. 28, 2026~ Jun. 09, 2026	Oct. 30, 2026	Radiation (03CH12-HY)
RF Cable	EMCI	EMC101Y-KM -KM-1000	240905	30MHz~40GHz	Oct. 31, 2025	May. 28, 2026~ Jun. 09, 2026	Oct. 30, 2026	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP210090	N/A	Aug. 26, 2025	May. 28, 2026~ Jun. 09, 2026	Aug. 25, 2026	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May. 28, 2026~ Jun. 09, 2026	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	May. 28, 2026~ Jun. 09, 2026	N/A	Radiation (03CH12-HY)
Radio Communication Analyzer	Anritsu	MT8821C	6272278353	LTE FDD/TDD DLCA/ULCA	Oct. 28, 2025	May. 28, 2026~ Jun. 09, 2026	Oct. 27, 2026	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	May. 28, 2026~ Jun. 09, 2026	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	May. 28, 2026~ Jun. 09, 2026	N/A	Radiation (03CH12-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyzer	Anritsu	MT8821C	6262025341	LTE FDD/TDD LTE-2CC ULCA/DLCA	Sep. 16, 2025	May. 28, 2026~ Jun. 01, 2026	Sep. 15, 2026	Conducted (TH05-HY)
DC Power Supply	GW Instek	GPE-2323	GET861546	0V~64V ; 0A~6A	Jun. 03, 2025	May. 28, 2026~ Jun. 01, 2026	Jun. 02, 2026	Conducted (TH05-HY)
Coupler	MVE	MVE4816	#Z	0.009MHz-18G Hz	Oct. 16, 2025	May. 28, 2026~ Jun. 01, 2026	Oct. 15, 2026	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101907	10Hz~40GHz	Aug. 25, 2025	May. 28, 2026~ Jun. 01, 2026	Aug. 24, 2026	Conducted (TH05-HY)
Thermal Chamber	ESPEC	SU-241	92003713	-30℃ ~95℃	Feb. 23, 2026	May. 28, 2026~ Jun. 01, 2026	Feb. 22, 2027	Conducted (TH05-HY)
Power divider	Anritsu	K241C	2143398	9KHz~40GHz	Jun. 13,2025	May. 28, 2026~ Jun. 01, 2026	Jun. 12,2026	Conducted (TH05-HY)
Software	Sporton	LTE Conducted Test Tools	N/A	Conducted Test Item	N/A	May. 28, 2026~ Jun. 01, 2026	N/A	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303B	TP200886	-10 ~ 50℃ / 20 ~ 95%RH	Mar. 04,2026	May. 28, 2026~ Jun. 01, 2026	Mar. 03,2027	Conducted (TH05-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)Vertical

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90 dB
---	---------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.70 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90 dB
---	---------

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power and ERP/EIRP)

LTE Band 2 Maximum Average Power [dBm] (GT - LC = -0.11 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	23.44	23.17	23.18	23.33	0.2153
20	1	49		23.38	23.19	22.95		
20	1	99		23.28	23.01	22.87		
20	50	0		22.44	22.21	21.99		
20	50	24		22.42	22.14	22.20		
20	50	50		22.39	22.06	21.94		
20	100	0		22.40	22.12	21.95		
20	1	0	16-QAM	22.66	22.52	22.31	22.55	0.1799
20	1	49		22.66	22.54	22.33		
20	1	99		22.48	22.20	22.26		
20	50	0		21.54	21.35	21.13		
20	50	24		21.55	21.28	21.10		
20	50	50		21.54	21.20	21.09		
20	100	0		21.53	21.27	21.06		
20	1	0	64-QAM	21.62	21.52	21.34	21.54	0.1426
20	1	49		21.65	21.41	21.19		
20	1	99		21.54	21.30	21.23		
20	50	0		20.53	20.37	20.12		
20	50	24		20.56	20.28	20.08		
20	50	50		20.52	20.18	20.06		
20	100	0		20.53	20.26	20.04		
Limit	EIRP < 2W			Result			Pass	

LTE Band 2 Maximum Average Power [dBm] (GT - LC = -0.11 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	23.37	23.23	22.91	23.27	0.2123
15	1	37		23.38	23.17	22.93		
15	1	74		23.36	23.01	22.83		
15	36	0		22.37	22.13	21.93		
15	36	20		22.38	22.11	21.91		
15	36	39		22.36	22.02	21.86		
15	75	0		22.38	22.12	21.93		
15	1	0	16-QAM	22.69	22.29	22.31	22.58	0.1811
15	1	37		22.56	22.33	22.30		
15	1	74		22.56	22.39	22.06		
15	36	0		21.47	21.30	21.01		
15	36	20		21.50	21.22	21.04		
15	36	39		21.51	21.16	21.02		
15	75	0		21.48	21.24	21.01		
15	1	0	64-QAM	21.64	21.44	21.21	21.55	0.1429
15	1	37		21.66	21.46	21.08		
15	1	74		21.63	21.26	21.24		
15	36	0		20.49	20.30	20.08		
15	36	20		20.50	20.24	20.03		
15	36	39		20.54	20.19	20.03		
15	75	0		20.46	20.23	19.99		
Limit	EIRP < 2W			Result			Pass	

LTE Band 2 Maximum Average Power [dBm] (GT - LC = -0.11 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	23.44	23.17	22.91	23.33	0.2153
10	1	25		23.39	23.12	22.94		
10	1	49		23.40	23.03	22.90		
10	25	0		22.42	22.15	21.96		
10	25	12		22.42	22.14	21.96		
10	25	25		22.43	22.08	21.91		
10	50	0		22.44	22.13	21.95		
10	1	0	16-QAM	22.68	22.33	22.33	22.72	0.1871
10	1	25		22.67	22.45	22.25		
10	1	49		22.83	22.35	22.39		
10	25	0		21.49	21.25	21.03		
10	25	12		21.46	21.22	21.01		
10	25	25		21.47	21.20	21.02		
10	50	0		21.48	21.22	21.04		
10	1	0	64-QAM	21.67	21.38	21.27	21.66	0.1466
10	1	25		21.77	21.32	21.20		
10	1	49		21.70	21.34	21.26		
10	25	0		20.50	20.26	20.04		
10	25	12		20.47	20.22	20.00		
10	25	25		20.48	20.14	19.99		
10	50	0		20.45	20.22	20.02		
Limit	EIRP < 2W			Result			Pass	

LTE Band 2 Maximum Average Power [dBm] (GT - LC = -0.11 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	23.38	23.18	22.96	23.31	0.2143
5	1	12		23.38	23.20	22.92		
5	1	24		23.42	23.06	22.83		
5	12	0		22.45	22.14	21.96		
5	12	7		22.42	22.10	21.91		
5	12	13		22.41	22.09	21.86		
5	25	0		22.44	22.14	21.95		
5	1	0	16-QAM	22.59	22.38	22.26	22.55	0.1799
5	1	12		22.62	22.44	22.25		
5	1	24		22.66	22.33	22.07		
5	12	0		21.50	21.29	21.08		
5	12	7		21.49	21.21	21.02		
5	12	13		21.52	21.20	21.04		
5	25	0		21.52	21.24	21.07		
5	1	0	64-QAM	21.66	21.37	21.13	21.60	0.1445
5	1	12		21.71	21.44	21.18		
5	1	24		21.62	21.27	21.13		
5	12	0		20.56	20.27	20.07		
5	12	7		20.52	20.23	20.04		
5	12	13		20.52	20.23	20.02		
5	25	0		20.47	20.21	20.03		
Limit	EIRP < 2W			Result			Pass	

LTE Band 2 Maximum Average Power [dBm] (GT - LC = -0.11 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
3	1	0	QPSK	23.35	23.07	22.84	23.27	0.2123
3	1	8		23.38	23.19	22.88		
3	1	14		23.33	23.06	22.88		
3	8	0		22.37	22.11	21.90		
3	8	4		22.42	22.07	21.83		
3	8	7		22.40	22.08	21.84		
3	15	0		22.38	22.06	21.85		
3	1	0	16-QAM	22.71	22.30	22.07	22.64	0.1837
3	1	8		22.66	22.30	22.02		
3	1	14		22.75	22.28	22.16		
3	8	0		21.50	21.33	21.07		
3	8	4		21.54	21.28	21.07		
3	8	7		21.53	21.25	21.08		
3	15	0		21.49	21.26	21.04		
3	1	0	64-QAM	21.60	21.29	21.16	21.60	0.1445
3	1	8		21.64	21.46	21.17		
3	1	14		21.71	21.33	21.20		
3	8	0		20.51	20.28	20.10		
3	8	4		20.51	20.26	20.02		
3	8	7		20.54	20.24	20.03		
3	15	0		20.46	20.17	19.98		
Limit	EIRP < 2W			Result			Pass	

LTE Band 2 Maximum Average Power [dBm] (GT - LC = -0.11 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
1.4	1	0	QPSK	23.32	23.05	22.75	23.26	0.2118
1.4	1	3		23.29	23.07	22.77		
1.4	1	5		23.33	23.08	22.83		
1.4	3	0		23.33	23.11	22.83		
1.4	3	1		23.37	23.06	22.86		
1.4	3	3		23.37	23.03	22.81		
1.4	6	0		22.33	22.04	21.80		
1.4	1	0	16-QAM	22.47	22.33	22.07	22.55	0.1799
1.4	1	3		22.66	22.38	22.18		
1.4	1	5		22.47	22.30	22.08		
1.4	3	0		22.37	21.98	21.81		
1.4	3	1		22.35	22.05	21.87		
1.4	3	3		22.32	22.00	21.75		
1.4	6	0		21.53	21.24	20.99		
1.4	1	0	64-QAM	21.63	21.27	21.07	21.60	0.1445
1.4	1	3		21.46	21.32	21.24		
1.4	1	5		21.71	21.32	21.23		
1.4	3	0		21.52	21.21	21.12		
1.4	3	1		21.48	21.33	21.02		
1.4	3	3		21.52	21.23	21.13		
1.4	6	0		20.36	20.08	19.92		
Limit	EIRP < 2W			Result			Pass	

LTE Band 5 Maximum Average Power [dBm] (GT - LC = -2.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
10	1	0	QPSK	23.32	23.51	23.60	19.44	0.0879
10	1	25		23.36	23.55	23.63		
10	1	49		23.58	23.68	23.66		
10	25	0		22.33	22.56	22.61		
10	25	12		22.39	22.57	22.65		
10	25	25		22.47	22.61	22.67		
10	50	0		22.39	22.60	22.66		
10	1	0	16-QAM	22.56	22.70	22.93	18.69	0.0740
10	1	25		22.60	22.78	22.86		
10	1	49		22.74	22.87	22.89		
10	25	0		21.38	21.63	21.70		
10	25	12		21.49	21.62	21.67		
10	25	25		21.53	21.66	21.70		
10	50	0		21.48	21.66	21.72		
10	1	0	64-QAM	21.51	21.73	21.74	17.67	0.0585
10	1	25		21.54	21.88	21.78		
10	1	49		21.68	21.81	21.91		
10	25	0		20.40	20.58	20.65		
10	25	12		20.45	20.61	20.67		
10	25	25		20.51	20.67	20.69		
10	50	0		20.44	20.64	20.68		
Limit	ERP < 7W			Result			Pass	

LTE Band 5 Maximum Average Power [dBm] (GT - LC = -2.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
5	1	0	QPSK	23.26	23.48	23.61	19.40	0.0871
5	1	12		23.31	23.56	23.58		
5	1	24		23.32	23.64	23.62		
5	12	0		22.29	22.54	22.67		
5	12	7		22.31	22.53	22.62		
5	12	13		22.33	22.57	22.61		
5	25	0		22.36	22.58	22.68		
5	1	0	16-QAM	22.43	22.85	22.84	18.72	0.0745
5	1	12		22.52	22.74	22.87		
5	1	24		22.65	22.85	22.96		
5	12	0		21.42	21.65	21.72		
5	12	7		21.40	21.64	21.75		
5	12	13		21.41	21.64	21.69		
5	25	0		21.42	21.68	21.71		
5	1	0	64-QAM	21.50	21.65	21.81	17.65	0.0582
5	1	12		21.50	21.80	21.83		
5	1	24		21.53	21.77	21.89		
5	12	0		20.45	20.67	20.74		
5	12	7		20.45	20.66	20.72		
5	12	13		20.45	20.66	20.74		
5	25	0		20.44	20.64	20.70		
Limit	ERP < 7W			Result			Pass	

LTE Band 5 Maximum Average Power [dBm] (GT - LC = -2.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
3	1	0	QPSK	23.24	23.51	23.57	19.39	0.0869
3	1	8		23.27	23.53	23.63		
3	1	14		23.28	23.53	23.53		
3	8	0		22.32	22.49	22.64		
3	8	4		22.25	22.52	22.58		
3	8	7		22.28	22.56	22.57		
3	15	0		22.27	22.50	22.60		
3	1	0	16-QAM	22.50	22.83	22.94	18.74	0.0748
3	1	8		22.51	22.70	22.98		
3	1	14		22.51	22.80	22.98		
3	8	0		21.51	21.65	21.80		
3	8	4		21.42	21.69	21.78		
3	8	7		21.48	21.69	21.76		
3	15	0		21.38	21.64	21.74		
3	1	0	64-QAM	21.53	21.73	21.89	17.66	0.0583
3	1	8		21.50	21.90	21.80		
3	1	14		21.45	21.71	21.79		
3	8	0		20.46	20.68	20.79		
3	8	4		20.39	20.66	20.76		
3	8	7		20.49	20.65	20.73		
3	15	0		20.42	20.63	20.72		
Limit	ERP < 7W			Result			Pass	

LTE Band 5 Maximum Average Power [dBm] (GT - LC = -2.09 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
1.4	1	0	QPSK	23.19	23.53	23.55	19.32	0.0855
1.4	1	3		23.29	23.51	23.51		
1.4	1	5		23.23	23.52	23.56		
1.4	3	0		23.23	23.52	23.54		
1.4	3	1		23.31	23.52	23.56		
1.4	3	3		23.30	23.54	23.54		
1.4	6	0		22.21	22.48	22.56		
1.4	1	0	16-QAM	22.52	22.70	22.84	18.62	0.0728
1.4	1	3		22.48	22.75	22.80		
1.4	1	5		22.56	22.86	22.71		
1.4	3	0		22.19	22.41	22.51		
1.4	3	1		22.23	22.43	22.49		
1.4	3	3		22.26	22.53	22.52		
1.4	6	0		21.42	21.66	21.72		
1.4	1	0	64-QAM	21.45	21.78	21.82	17.58	0.0573
1.4	1	3		21.43	21.73	21.76		
1.4	1	5		21.40	21.80	21.79		
1.4	3	0		21.41	21.61	21.72		
1.4	3	1		21.42	21.69	21.73		
1.4	3	3		21.36	21.73	21.70		
1.4	6	0		20.25	20.51	20.65		
Limit	ERP < 7W			Result			Pass	

LTE Band 7 Maximum Average Power [dBm] (GT - LC = -2.02 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	23.49	23.66	23.57	21.64	0.1459
20	1	49		23.58	23.60	23.59		
20	1	99		23.57	23.57	23.60		
20	50	0		22.59	22.71	22.65		
20	50	24		22.57	22.65	22.62		
20	50	50		22.63	22.63	22.61		
20	100	0		22.60	22.69	22.62		
20	1	0	16-QAM	22.63	22.79	22.93	21.05	0.1274
20	1	49		22.88	22.89	22.85		
20	1	99		22.80	23.07	22.80		
20	50	0		21.56	21.73	21.68		
20	50	24		21.60	21.65	21.64		
20	50	50		21.65	21.65	21.62		
20	100	0		21.59	21.69	21.63		
20	1	0	64-QAM	21.65	21.72	21.73	19.83	0.0962
20	1	49		21.74	21.85	21.75		
20	1	99		21.71	21.79	21.80		
20	50	0		20.70	20.79	20.75		
20	50	24		20.71	20.73	20.73		
20	50	50		20.78	20.75	20.73		
20	100	0		20.74	20.75	20.74		
Limit	EIRP < 2W			Result			Pass	

LTE Band 7 Maximum Average Power [dBm] (GT - LC = -2.02 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	23.43	23.68	23.58	21.66	0.1466
15	1	37		23.54	23.68	23.62		
15	1	74		23.56	23.60	23.57		
15	36	0		22.46	22.66	22.60		
15	36	20		22.51	22.59	22.61		
15	36	39		22.56	22.59	22.59		
15	75	0		22.54	22.63	22.59		
15	1	0	16-QAM	22.58	22.74	22.88	20.96	0.1247
15	1	37		22.80	22.98	22.91		
15	1	74		22.74	22.77	22.82		
15	36	0		21.46	21.64	21.59		
15	36	20		21.52	21.60	21.59		
15	36	39		21.56	21.59	21.61		
15	75	0		21.54	21.60	21.59		
15	1	0	64-QAM	21.59	21.83	21.71	19.93	0.0984
15	1	37		21.73	21.95	21.64		
15	1	74		21.66	21.79	21.68		
15	36	0		20.63	20.75	20.73		
15	36	20		20.66	20.69	20.75		
15	36	39		20.73	20.66	20.73		
15	75	0		20.64	20.63	20.72		
Limit	EIRP < 2W			Result			Pass	

LTE Band 7 Maximum Average Power [dBm] (GT - LC = -2.02 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	23.44	23.64	23.61	21.62	0.1452
10	1	25		23.39	23.55	23.51		
10	1	49		23.56	23.52	23.60		
10	25	0		22.45	22.63	22.53		
10	25	12		22.43	22.57	22.52		
10	25	25		22.49	22.56	22.57		
10	50	0		22.51	22.58	22.54		
10	1	0	16-QAM	22.70	23.00	22.81	21.04	0.1271
10	1	25		22.70	22.89	22.83		
10	1	49		22.72	23.06	22.81		
10	25	0		21.44	21.59	21.52		
10	25	12		21.40	21.56	21.46		
10	25	25		21.46	21.51	21.52		
10	50	0		21.45	21.59	21.50		
10	1	0	64-QAM	21.50	21.75	21.74	19.73	0.0940
10	1	25		21.48	21.69	21.64		
10	1	49		21.72	21.72	21.69		
10	25	0		20.60	20.72	20.72		
10	25	12		20.57	20.70	20.73		
10	25	25		20.66	20.67	20.73		
10	50	0		20.60	20.69	20.73		
Limit	EIRP < 2W			Result			Pass	

LTE Band 7 Maximum Average Power [dBm] (GT - LC = -2.02 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	23.47	23.64	23.60	21.62	0.1452
5	1	12		23.42	23.59	23.61		
5	1	24		23.45	23.56	23.60		
5	12	0		22.47	22.59	22.58		
5	12	7		22.49	22.61	22.62		
5	12	13		22.46	22.59	22.58		
5	25	0		22.49	22.60	22.60		
5	1	0	16-QAM	22.62	22.69	22.88	20.92	0.1236
5	1	12		22.79	22.94	22.70		
5	1	24		22.82	22.90	22.77		
5	12	0		21.45	21.66	21.57		
5	12	7		21.44	21.65	21.62		
5	12	13		21.47	21.58	21.62		
5	25	0		21.49	21.58	21.60		
5	1	0	64-QAM	21.57	21.76	21.74	19.85	0.0966
5	1	12		21.59	21.78	21.66		
5	1	24		21.56	21.87	21.78		
5	12	0		20.67	20.73	20.76		
5	12	7		20.65	20.75	20.80		
5	12	13		20.64	20.70	20.79		
5	25	0		20.63	20.67	20.75		
Limit	EIRP < 2W			Result			Pass	

LTE Band 12 Maximum Average Power [dBm] (GT - LC = -2.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
10	1	0	QPSK	24.01	24.01	24.09	19.24	0.0839
10	1	25		24.05	24.07	24.17		
10	1	49		24.13	24.29	24.33		
10	25	0		23.17	23.11	23.29		
10	25	12		23.22	23.22	23.30		
10	25	25		23.30	23.25	23.36		
10	50	0		23.24	23.19	23.35		
10	1	0	16-QAM	23.40	23.45	23.51	18.64	0.0731
10	1	25		23.42	23.46	23.53		
10	1	49		23.56	23.64	23.73		
10	25	0		22.16	22.13	22.29		
10	25	12		22.22	22.24	22.28		
10	25	25		22.31	22.20	22.34		
10	50	0		22.24	22.19	22.37		
10	1	0	64-QAM	22.34	22.29	22.40	17.50	0.0562
10	1	25		22.33	22.37	22.40		
10	1	49		22.48	22.51	22.59		
10	25	0		21.15	21.13	21.27		
10	25	12		21.23	21.23	21.28		
10	25	25		21.29	21.20	21.35		
10	50	0		21.22	21.18	21.34		
Limit	ERP < 3W			Result			Pass	

LTE Band 12 Maximum Average Power [dBm] (GT - LC = -2.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
5	1	0	QPSK	23.92	23.90	24.01	19.00	0.0794
5	1	12		23.95	23.94	24.09		
5	1	24		24.00	24.01	24.09		
5	12	0		23.12	23.08	23.27		
5	12	7		23.21	23.20	23.27		
5	12	13		23.22	23.18	23.30		
5	25	0		23.19	23.18	23.27		
5	1	0	16-QAM	23.35	23.39	23.49	18.61	0.0726
5	1	12		23.31	23.44	23.42		
5	1	24		23.51	23.53	23.70		
5	12	0		22.04	22.06	22.26		
5	12	7		22.13	22.15	22.21		
5	12	13		22.21	22.19	22.27		
5	25	0		22.15	22.15	22.29		
5	1	0	64-QAM	22.23	22.22	22.28	17.48	0.0560
5	1	12		22.22	22.34	22.28		
5	1	24		22.40	22.39	22.57		
5	12	0		21.04	21.09	21.19		
5	12	7		21.09	21.19	21.25		
5	12	13		21.23	21.12	21.31		
5	25	0		21.14	21.16	21.30		
Limit	ERP < 3W			Result			Pass	

LTE Band 12 Maximum Average Power [dBm] (GT - LC = -2.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
3	1	0	QPSK	23.94	23.98	24.06	19.00	0.0794
3	1	8		23.91	23.94	24.07		
3	1	14		23.99	24.01	24.09		
3	8	0		23.11	23.09	23.21		
3	8	4		23.09	23.15	23.27		
3	8	7		23.18	23.22	23.23		
3	15	0		23.16	23.11	23.30		
3	1	0	16-QAM	23.39	23.44	23.49	18.58	0.0721
3	1	8		23.39	23.34	23.40		
3	1	14		23.41	23.51	23.67		
3	8	0		22.13	22.12	22.25		
3	8	4		22.07	22.22	22.26		
3	8	7		22.21	22.11	22.20		
3	15	0		22.15	22.15	22.34		
3	1	0	64-QAM	22.31	22.15	22.39	17.36	0.0545
3	1	8		22.31	22.28	22.28		
3	1	14		22.33	22.38	22.45		
3	8	0		21.10	21.00	21.12		
3	8	4		21.09	21.21	21.20		
3	8	7		21.15	21.05	21.25		
3	15	0		21.10	21.10	21.33		
Limit	ERP < 3W			Result			Pass	

LTE Band 12 Maximum Average Power [dBm] (GT - LC = -2.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
1.4	1	0	QPSK	24.07	24.09	24.27	19.21	0.0834
1.4	1	3		24.00	24.10	24.27		
1.4	1	5		24.00	24.08	24.28		
1.4	3	0		24.07	24.07	24.29		
1.4	3	1		24.04	24.08	24.29		
1.4	3	3		24.04	24.09	24.30		
1.4	6	0		23.14	23.21	23.33		
1.4	1	0	16-QAM	23.38	23.46	23.58	18.51	0.0710
1.4	1	3		23.41	23.46	23.58		
1.4	1	5		23.45	23.46	23.60		
1.4	3	0		23.13	23.19	23.32		
1.4	3	1		23.15	23.20	23.33		
1.4	3	3		23.13	23.17	23.34		
1.4	6	0		22.24	22.28	22.41		
1.4	1	0	64-QAM	22.29	22.40	22.48	17.44	0.0555
1.4	1	3		22.29	22.36	22.48		
1.4	1	5		22.34	22.37	22.53		
1.4	3	0		22.23	22.30	22.44		
1.4	3	1		22.26	22.27	22.45		
1.4	3	3		22.26	22.30	22.47		
1.4	6	0		21.13	21.15	21.32		
Limit	ERP < 3W			Result			Pass	

LTE Band 17 Maximum Average Power [dBm] (GT - LC = -2.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
10	1	0	QPSK	23.60	23.59	23.65	18.82	0.0762
10	1	25		23.73	23.79	23.79		
10	1	49		23.86	23.86	23.91		
10	25	0		22.83	22.89	22.93		
10	25	12		22.91	22.93	22.94		
10	25	25		22.91	22.95	23.00		
10	50	0		22.86	22.92	22.99		
10	1	0	16-QAM	23.04	23.10	23.08	18.24	0.0667
10	1	25		23.13	23.13	23.17		
10	1	49		23.31	23.33	23.33		
10	25	0		21.82	21.90	21.91		
10	25	12		21.90	21.91	21.91		
10	25	25		21.89	21.94	21.98		
10	50	0		21.86	21.93	21.99		
10	1	0	64-QAM	21.89	21.99	21.98	17.13	0.0516
10	1	25		22.04	22.03	22.05		
10	1	49		22.18	22.19	22.22		
10	25	0		20.79	20.84	20.90		
10	25	12		20.85	20.89	20.89		
10	25	25		20.88	20.94	20.98		
10	50	0		20.85	20.89	20.95		
Limit	ERP < 3W			Result			Pass	

LTE Band 17 Maximum Average Power [dBm] (GT - LC = -2.94 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
5	1	0	QPSK	23.53	23.57	23.60	18.56	0.0718
5	1	12		23.60	23.59	23.64		
5	1	24		23.59	23.59	23.65		
5	12	0		22.80	22.77	22.83		
5	12	7		22.81	22.80	22.90		
5	12	13		22.80	22.80	22.89		
5	25	0		22.77	22.80	22.85		
5	1	0	16-QAM	22.95	23.05	23.04	18.22	0.0664
5	1	12		23.00	23.09	23.14		
5	1	24		23.24	23.28	23.31		
5	12	0		21.72	21.80	21.88		
5	12	7		21.84	21.88	21.83		
5	12	13		21.78	21.81	21.89		
5	25	0		21.83	21.79	21.97		
5	1	0	64-QAM	21.88	21.91	21.97	17.11	0.0514
5	1	12		21.97	22.00	21.99		
5	1	24		22.07	22.12	22.20		
5	12	0		20.65	20.73	20.79		
5	12	7		20.77	20.78	20.86		
5	12	13		20.79	20.85	20.85		
5	25	0		20.83	20.76	20.82		
Limit	ERP < 3W			Result			Pass	

LTE Band 38 PC3 Maximum Average Power [dBm] (GT - LC = -2.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	23.74	23.81	23.83	21.81	0.1517
20	1	49		23.78	23.76	23.77		
20	1	99		23.74	23.76	23.66		
20	50	0		22.75	22.79	22.78		
20	50	24		22.75	22.79	22.74		
20	50	50		22.74	22.77	22.71		
20	100	0		22.76	22.79	22.74		
20	1	0	16-QAM	22.83	22.87	22.93	20.91	0.1233
20	1	49		22.88	22.93	22.88		
20	1	99		22.84	22.85	22.78		
20	50	0		21.80	21.83	21.81		
20	50	24		21.79	21.83	21.78		
20	50	50		21.78	21.81	21.74		
20	100	0		21.79	21.84	21.79		
20	1	0	64-QAM	21.38	21.39	21.46	19.45	0.0881
20	1	49		21.41	21.47	21.42		
20	1	99		21.39	21.41	21.33		
20	50	0		20.84	20.88	20.86		
20	50	24		20.83	20.86	20.81		
20	50	50		20.84	20.84	20.80		
20	100	0		20.85	20.87	20.81		
Limit	EIRP < 2W			Result			Pass	

LTE Band 38 PC3 Maximum Average Power [dBm] (GT - LC = -2.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	23.70	23.73	23.83	21.81	0.1517
15	1	37		23.72	23.83	23.77		
15	1	74		23.72	23.77	23.66		
15	36	0		22.68	22.76	22.70		
15	36	20		22.68	22.74	22.67		
15	36	39		22.68	22.72	22.63		
15	75	0		22.70	22.77	22.69		
15	1	0	16-QAM	22.75	22.80	22.85	20.88	0.1225
15	1	37		22.76	22.90	22.80		
15	1	74		22.76	22.84	22.73		
15	36	0		21.66	21.73	21.68		
15	36	20		21.66	21.72	21.65		
15	36	39		21.67	21.70	21.61		
15	75	0		21.72	21.76	21.69		
15	1	0	64-QAM	21.29	21.35	21.40	19.39	0.0869
15	1	37		21.29	21.41	21.35		
15	1	74		21.31	21.37	21.27		
15	36	0		20.72	20.79	20.74		
15	36	20		20.75	20.79	20.71		
15	36	39		20.74	20.76	20.71		
15	75	0		20.74	20.79	20.73		
Limit	EIRP < 2W			Result			Pass	

LTE Band 38 PC3 Maximum Average Power [dBm] (GT - LC = -2.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	23.65	23.74	23.72	21.73	0.1489
10	1	25		23.60	23.70	23.62		
10	1	49		23.66	23.75	23.65		
10	25	0		22.62	22.73	22.63		
10	25	12		22.62	22.70	22.58		
10	25	25		22.62	22.70	22.59		
10	50	0		22.64	22.71	22.59		
10	1	0	16-QAM	22.71	22.81	22.79	20.79	0.1199
10	1	25		22.68	22.81	22.68		
10	1	49		22.72	22.81	22.70		
10	25	0		21.61	21.70	21.62		
10	25	12		21.61	21.67	21.59		
10	25	25		21.60	21.69	21.57		
10	50	0		21.65	21.72	21.64		
10	1	0	64-QAM	21.25	21.35	21.32	19.33	0.0857
10	1	25		21.24	21.34	21.22		
10	1	49		21.27	21.34	21.23		
10	25	0		20.74	20.86	20.78		
10	25	12		20.81	20.85	20.79		
10	25	25		20.83	20.85	20.78		
10	50	0		20.76	20.81	20.74		
Limit	EIRP < 2W			Result			Pass	

LTE Band 38 PC3 Maximum Average Power [dBm] (GT - LC = -2.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	23.62	23.78	23.67	21.76	0.1500
5	1	12		23.65	23.77	23.69		
5	1	24		23.66	23.75	23.62		
5	12	0		22.64	22.75	22.65		
5	12	7		22.65	22.74	22.61		
5	12	13		22.66	22.74	22.61		
5	25	0		22.65	22.78	22.64		
5	1	0	16-QAM	22.68	22.85	22.73	20.84	0.1213
5	1	12		22.72	22.86	22.71		
5	1	24		22.75	22.86	22.69		
5	12	0		21.58	21.72	21.60		
5	12	7		21.58	21.69	21.57		
5	12	13		21.60	21.68	21.55		
5	25	0		21.66	21.75	21.63		
5	1	0	64-QAM	21.24	21.41	21.30	19.39	0.0869
5	1	12		21.24	21.36	21.24		
5	1	24		21.28	21.39	21.25		
5	12	0		20.70	20.85	20.79		
5	12	7		20.71	20.83	20.76		
5	12	13		20.76	20.84	20.72		
5	25	0		20.75	20.87	20.77		
Limit	EIRP < 2W			Result			Pass	

LTE Band 41 PC3 Maximum Average Power [dBm] (GT - LC = -2.02 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
20	1	0	QPSK	23.50	23.83	23.62	21.81	0.1517
20	1	49		23.54	23.71	23.67		
20	1	99		23.55	23.73	23.71		
20	50	0		22.49	22.74	22.65		
20	50	24		22.52	22.72	22.67		
20	50	50		22.57	22.72	22.69		
20	100	0		22.51	22.73	22.67		
20	1	0	16-QAM	22.55	22.80	22.70	20.88	0.1225
20	1	49		22.59	22.90	22.74		
20	1	99		22.62	22.84	22.83		
20	50	0		21.53	21.78	21.69		
20	50	24		21.57	21.77	21.70		
20	50	50		21.61	21.77	21.72		
20	100	0		21.56	21.78	21.70		
20	1	0	64-QAM	21.10	21.35	21.25	19.44	0.0879
20	1	49		21.17	21.46	21.29		
20	1	99		21.19	21.38	21.35		
20	50	0		20.55	20.85	20.70		
20	50	24		20.60	20.83	20.70		
20	50	50		20.64	20.83	20.73		
20	100	0		20.60	20.83	20.72		
Limit	EIRP < 2W			Result			Pass	

LTE Band 41 PC3 Maximum Average Power [dBm] (GT - LC = -2.02 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
15	1	0	QPSK	23.46	23.72	23.64	21.81	0.1517
15	1	37		23.54	23.83	23.73		
15	1	74		23.54	23.74	23.72		
15	36	0		22.42	22.73	22.63		
15	36	20		22.46	22.72	22.65		
15	36	39		22.45	22.71	22.65		
15	75	0		22.50	22.74	22.67		
15	1	0	16-QAM	22.51	22.79	22.70	20.87	0.1222
15	1	37		22.55	22.89	22.76		
15	1	74		22.58	22.82	22.79		
15	36	0		21.40	21.70	21.61		
15	36	20		21.45	21.71	21.62		
15	36	39		21.44	21.70	21.63		
15	75	0		21.49	21.76	21.67		
15	1	0	64-QAM	21.06	21.33	21.25	19.37	0.0865
15	1	37		21.12	21.39	21.30		
15	1	74		21.13	21.37	21.34		
15	36	0		20.46	20.79	20.65		
15	36	20		20.51	20.80	20.68		
15	36	39		20.52	20.78	20.69		
15	75	0		20.52	20.81	20.69		
Limit	EIRP < 2W			Result			Pass	

LTE Band 41 PC3 Maximum Average Power [dBm] (GT - LC = -2.02 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
10	1	0	QPSK	23.46	23.70	23.63	21.69	0.1476
10	1	25		23.44	23.70	23.63		
10	1	49		23.51	23.71	23.69		
10	25	0		22.39	22.67	22.65		
10	25	12		22.38	22.65	22.66		
10	25	25		22.43	22.67	22.68		
10	50	0		22.39	22.65	22.65		
10	1	0	16-QAM	22.48	22.79	22.71	20.80	0.1202
10	1	25		22.46	22.78	22.71		
10	1	49		22.50	22.82	22.78		
10	25	0		21.38	21.66	21.63		
10	25	12		21.40	21.64	21.63		
10	25	25		21.43	21.67	21.66		
10	50	0		21.42	21.68	21.67		
10	1	0	64-QAM	21.05	21.34	21.28	19.34	0.0859
10	1	25		21.02	21.36	21.29		
10	1	49		21.09	21.35	21.34		
10	25	0		20.53	20.86	20.77		
10	25	12		20.54	20.88	20.80		
10	25	25		20.58	20.87	20.80		
10	50	0		20.51	20.81	20.75		
Limit	EIRP < 2W			Result			Pass	

LTE Band 41 PC3 Maximum Average Power [dBm] (GT - LC = -2.02 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	23.47	23.67	23.66	21.78	0.1507
5	1	12		23.49	23.80	23.68		
5	1	24		23.52	23.73	23.68		
5	12	0		22.45	22.71	22.69		
5	12	7		22.43	22.72	22.72		
5	12	13		22.45	22.71	22.71		
5	25	0		22.44	22.75	22.74		
5	1	0	16-QAM	22.47	22.76	22.77	20.82	0.1208
5	1	12		22.50	22.83	22.78		
5	1	24		22.51	22.84	22.82		
5	12	0		21.39	21.65	21.64		
5	12	7		21.38	21.67	21.65		
5	12	13		21.38	21.65	21.67		
5	25	0		21.45	21.73	21.72		
5	1	0	64-QAM	21.09	21.33	21.33	19.37	0.0865
5	1	12		21.06	21.39	21.33		
5	1	24		21.09	21.39	21.36		
5	12	0		20.51	20.87	20.77		
5	12	7		20.51	20.84	20.79		
5	12	13		20.52	20.83	20.79		
5	25	0		20.56	20.87	20.82		
Limit	EIRP < 2W			Result			Pass	

Conducted Output Power (Average power and EIRP)										
LTE Band 38C-PC3_CA Maximum Average Power [dBm] (GT - LC = -2.42 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+20	100	0	100	0	QPSK	21.06	21.03	21.06	20.64	0.1159
20+20	1	0	1	99		14.69	14.58	14.53		
20+20	1	99	1	0		22.97	23.06	23.02		
20+20	1	0	0	0		22.95	22.93	22.92		
20+20	100	0	100	0	16-QAM	20.17	20.17	20.16	20.27	0.1064
20+20	1	0	1	99		15.26	15.17	15.10		
20+20	1	99	1	0		22.60	22.69	22.68		
20+20	1	0	0	0		22.53	22.52	22.53		
20+20	100	0	100	0	64-QAM	20.14	20.14	20.15	18.06	0.0640
20+20	1	0	1	99		14.96	14.84	14.79		
20+20	1	99	1	0		20.37	20.45	20.48		
15+15	75	0	75	0	QPSK	21.04	21.05	21.09	20.63	0.1156
15+15	1	0	1	74		14.67	14.52	14.57		
15+15	1	74	1	0		22.92	23.04	23.00		
15+15	1	0	0	0		22.92	22.73	23.05		
15+15	75	0	75	0	16-QAM	20.17	20.17	20.20	20.28	0.1067
15+15	1	0	1	74		15.25	15.13	15.18		
15+15	1	74	1	0		22.58	22.68	22.66		
15+15	1	0	0	0		22.53	22.37	22.70		
15+15	75	0	75	0	64-QAM	20.16	20.14	20.21	18.07	0.0641
15+15	1	0	1	74		14.98	14.84	14.91		
15+15	1	74	1	0		20.32	20.45	20.49		
Limit	EIRP < 2W					Result			Pass	

LTE Band 41C-PC3_CA Maximum Average Power [dBm] (GT - LC = -2.02 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+20	100	0	100	0	QPSK	20.74	20.97	21.32	21.12	0.1294
20+20	1	0	1	99		14.43	14.58	14.84		
20+20	1	99	1	0		22.62	22.97	23.14		
20+20	1	0	0	0		22.79	22.81	22.93		
20+20	100	0	100	0	16-QAM	19.90	20.12	20.46	20.76	0.1191
20+20	1	0	1	99		15.01	15.14	15.40		
20+20	1	99	1	0		22.14	22.59	22.78		
20+20	1	0	0	0		22.32	22.43	22.49		
20+20	100	0	100	0	64-QAM	19.90	20.12	20.42	18.49	0.0706
20+20	1	0	1	99		14.70	14.84	15.08		
20+20	1	99	1	0		20.00	20.39	20.51		
20+15	100	0	75	0	QPSK	20.74	20.97	21.31	21.11	0.1291
20+15	1	0	1	74		14.39	14.54	14.87		
20+15	1	99	1	0		22.61	22.97	23.13		
20+15	1	0	0	0		22.79	22.84	23.00		
20+15	100	0	75	0	16-QAM	19.91	20.11	20.45	20.78	0.1197
20+15	1	0	1	74		14.99	15.11	15.43		
20+15	1	99	1	0		22.21	22.64	22.80		
20+15	1	0	0	0		22.33	22.45	22.58		
20+15	100	0	75	0	64-QAM	19.90	20.11	20.42	18.52	0.0711
20+15	1	0	1	74		14.66	14.82	15.13		
20+15	1	99	1	0		20.01	20.42	20.54		
15+20	75	0	100	0	QPSK	20.74	20.93	21.29	21.11	0.1291
15+20	1	0	1	99		14.39	14.50	14.81		
15+20	1	74	1	0		22.67	22.87	23.13		
15+20	1	0	0	0		22.40	22.82	22.77		
15+20	75	0	100	0	16-QAM	19.91	20.09	20.39	20.76	0.1191
15+20	1	0	1	99		14.99	15.09	15.42		
15+20	1	74	1	0		22.14	22.55	22.78		
15+20	1	0	0	0		21.99	22.43	22.55		
15+20	75	0	100	0	64-QAM	19.92	20.07	20.40	18.48	0.0705
15+20	1	0	1	99		14.68	14.82	15.12		
15+20	1	74	1	0		20.09	20.32	20.50		
Limit	EIRP < 2W					Result			Pass	

LTE Band 41C-PC3_CA Maximum Average Power [dBm] (GT - LC = -2.02 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
20+10	100	0	50	0	QPSK	20.75	20.98	21.35	21.19	0.1315
20+10	1	0	1	49		14.44	14.51	14.99		
20+10	1	99	1	0		22.58	23.00	23.21		
20+10	1	0	0	0		22.61	22.88	23.13		
20+10	100	0	50	0	16-QAM	19.92	20.12	20.49	20.86	0.1219
20+10	1	0	1	49		15.02	15.09	15.55		
20+10	1	99	1	0		22.20	22.66	22.88		
20+10	1	0	0	0		22.33	22.48	22.72		
20+10	100	0	50	0	64-QAM	19.91	20.11	20.45	18.57	0.0719
20+10	1	0	1	49		14.69	14.78	15.24		
20+10	1	99	1	0		20.01	20.28	20.59		
10+20	50	0	100	0	QPSK	20.79	20.93	21.30	21.10	0.1288
10+20	1	0	1	99		14.40	14.47	14.91		
10+20	1	49	1	0		22.72	22.87	23.12		
10+20	1	0	0	0		22.78	22.82	23.05		
10+20	50	0	100	0	16-QAM	19.99	20.13	20.46	20.71	0.1178
10+20	1	0	1	99		15.02	15.07	15.51		
10+20	1	49	1	0		22.34	22.45	22.73		
10+20	1	0	0	0		22.34	22.47	22.68		
10+20	50	0	100	0	64-QAM	19.97	20.09	20.44	18.48	0.0705
10+20	1	0	1	99		14.68	14.78	15.19		
10+20	1	49	1	0		20.11	20.30	20.50		
Limit	EIRP < 2W					Result			Pass	

LTE Band 41C-PC3_CA Maximum Average Power [dBm] (GT - LC = -2.02 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
15+10	75	0	50	0	QPSK	20.73	20.97	21.39	21.17	0.1309
15+10	1	0	1	49		14.41	14.48	14.94		
15+10	1	74	1	0		22.69	22.99	23.19		
15+10	1	0	0	0		22.81	22.87	23.15		
15+10	75	0	50	0	16-QAM	19.91	20.11	20.51	20.86	0.1219
15+10	1	0	1	49		15.02	15.08	15.55		
15+10	1	74	1	0		22.27	22.64	22.88		
15+10	1	0	0	0		22.36	22.49	22.78		
15+10	75	0	50	0	64-QAM	19.92	20.13	20.51	18.49	0.0706
15+10	1	0	1	49		14.73	14.80	15.26		
15+10	1	74	1	0		20.12	20.45	20.49		
10+15	50	0	75	0	QPSK	20.84	20.99	21.39	21.18	0.1312
10+15	1	0	1	74		14.43	14.52	14.97		
10+15	1	49	1	0		22.77	22.91	23.20		
10+15	1	0	0	0		22.83	22.88	23.17		
10+15	50	0	75	0	16-QAM	20.02	20.17	20.58	20.79	0.1199
10+15	1	0	1	74		15.05	15.11	15.58		
10+15	1	49	1	0		22.40	22.60	22.79		
10+15	1	0	0	0		22.41	22.53	22.81		
10+15	50	0	75	0	64-QAM	19.99	20.12	20.51	18.59	0.0723
10+15	1	0	1	74		14.73	14.80	15.27		
10+15	1	49	1	0		20.18	20.36	20.61		
Limit	EIRP < 2W					Result			Pass	


LTE Band 41C-PC3_CA Maximum Average Power [dBm] (GT - LC = -2.02 dB)										
BW [MHz]	PCC		SCC		Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
	RB Size	RB Offset	RB Size	RB Offset						
15+15	75	0	75	0	QPSK	20.79	20.92	21.31	21.15	0.1303
15+15	1	0	1	74		14.41	14.48	14.94		
15+15	1	74	1	0		22.70	22.98	23.17		
15+15	1	0	0	0		22.79	22.73	23.07		
15+15	75	0	75	0	16-QAM	19.94	20.09	20.42	20.78	0.1197
15+15	1	0	1	74		15.00	15.10	15.53		
15+15	1	74	1	0		22.28	22.64	22.80		
15+15	1	0	0	0		22.29	22.46	22.67		
15+15	75	0	75	0	64-QAM	19.96	20.09	20.43	18.44	0.0698
15+15	1	0	1	74		14.72	14.81	15.21		
15+15	1	74	1	0		20.09	20.40	20.46		
Limit	EIRP < 2W					Result			Pass	



LTE Band 2

Peak-to-Average Ratio

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	5.30	6.32	6.52	N/A	PASS

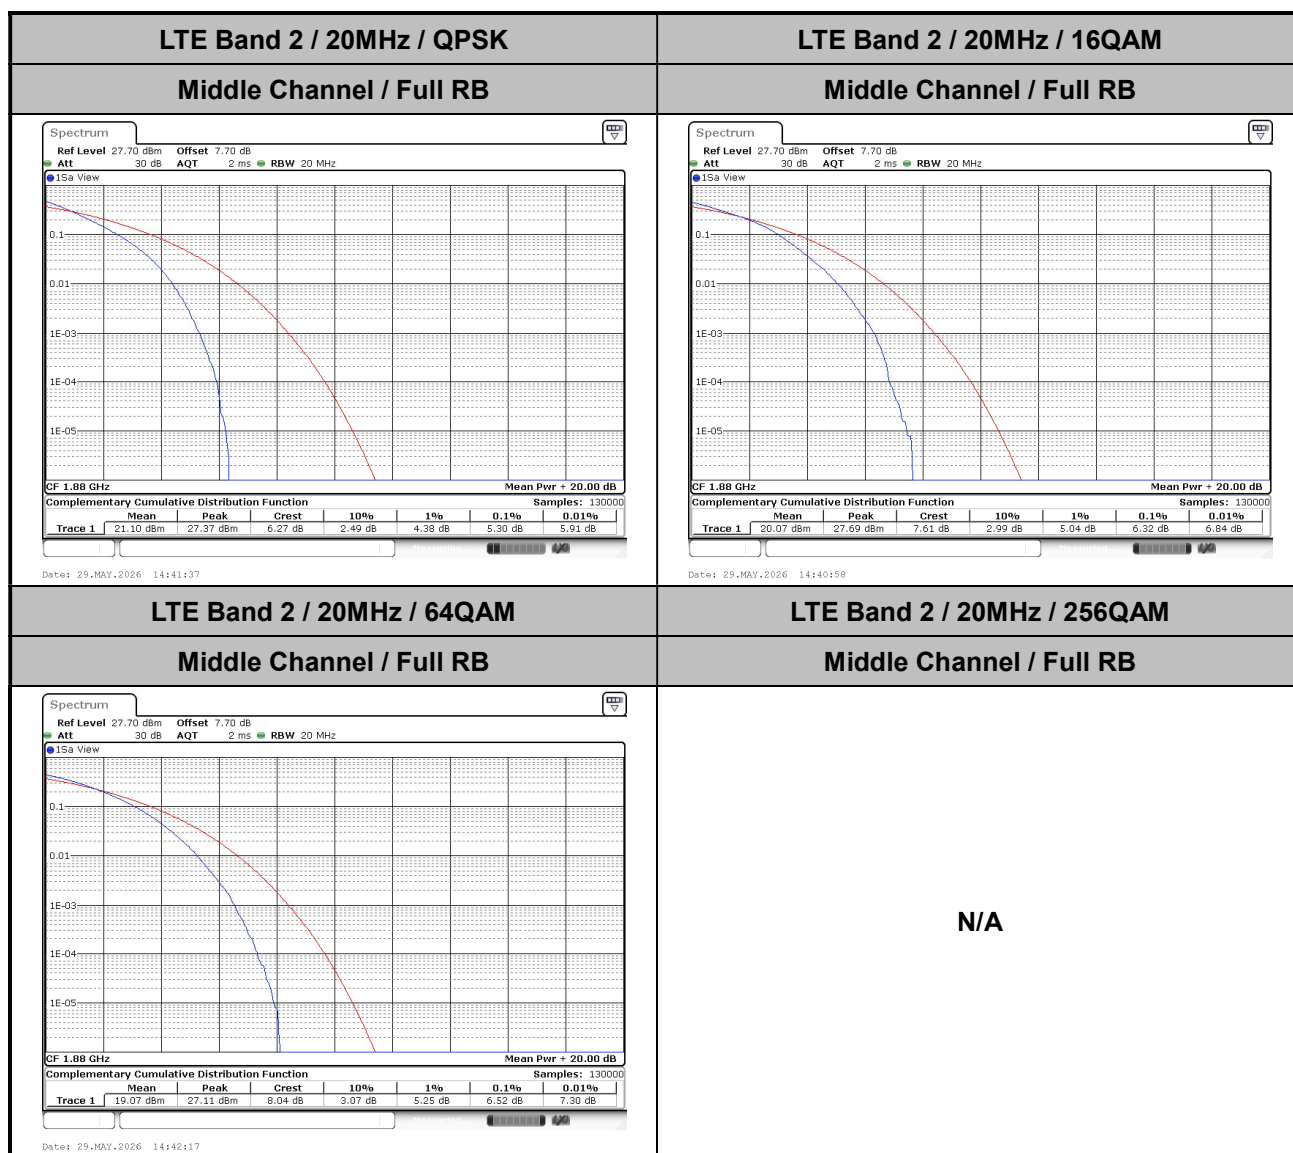




26dB Bandwidth

Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.29	1.28	3.01	2.97	4.85	4.80	9.84	9.82	14.55	14.28	19.00	19.24


LTE Band 2

Middle Channel / 1.4MHz / QPSK

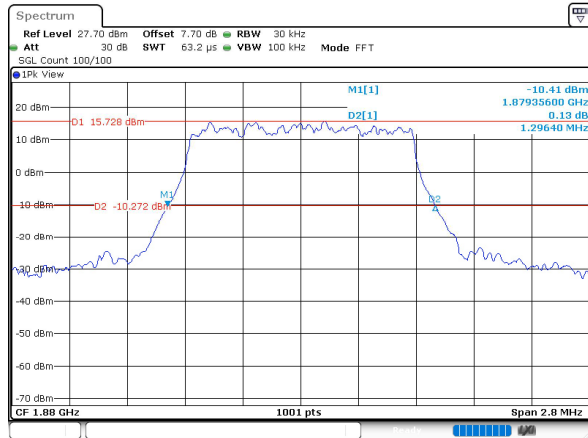


Date: 29_MAY.2026 14:51:23

Middle Channel / 1.4MHz / 16QAM

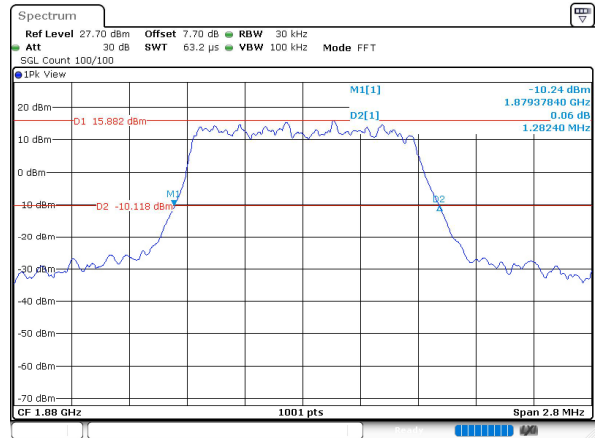


Date: 29_MAY.2026 14:52:00

Middle Channel / 3MHz / QPSK

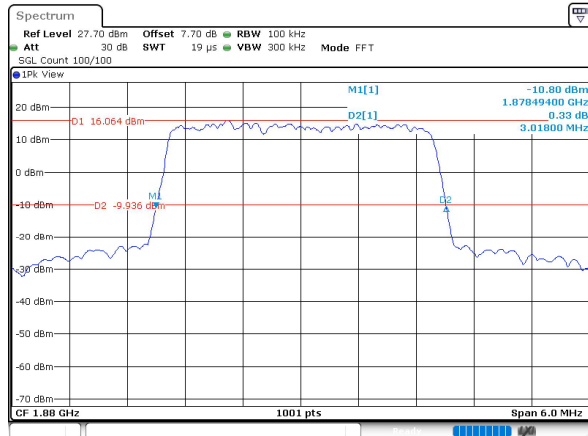


Date: 1_JUN.2026 09:37:30

Middle Channel / 3MHz / 16QAM

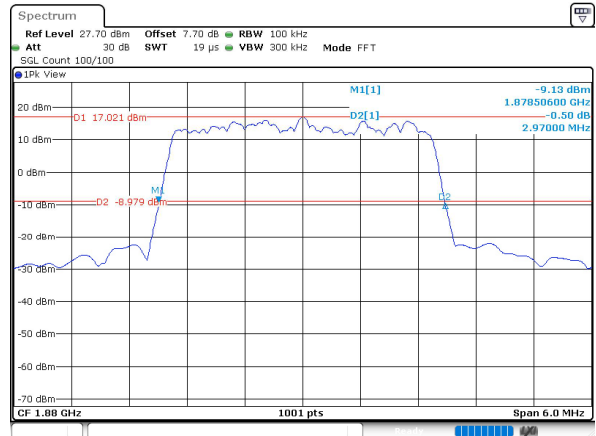


Date: 29_MAY.2026 14:56:18

Middle Channel / 5MHz / QPSK

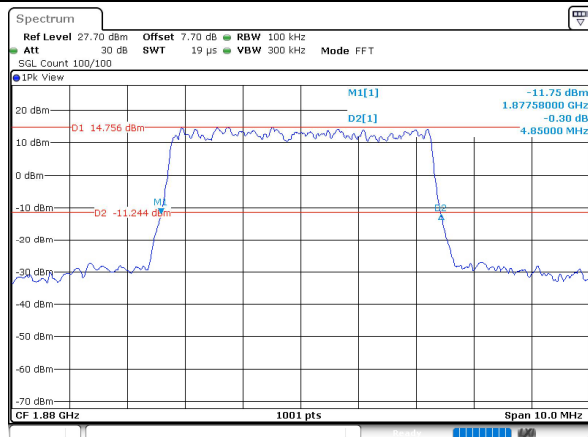

Date: 29_MAY.2026 14:56:59

Middle Channel / 5MHz / 16QAM

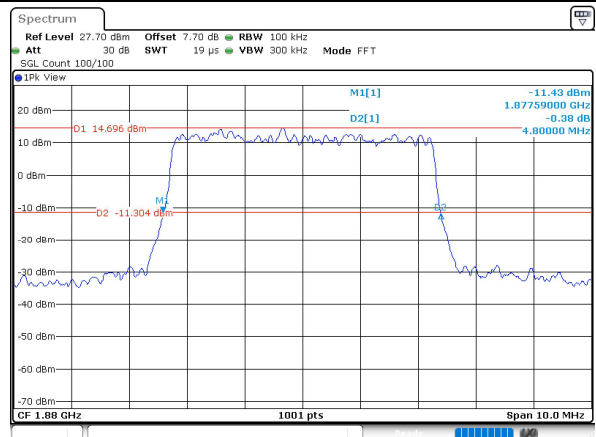


Date: 29_MAY.2026 14:57:44




LTE Band 2


Middle Channel / 10MHz / QPSK

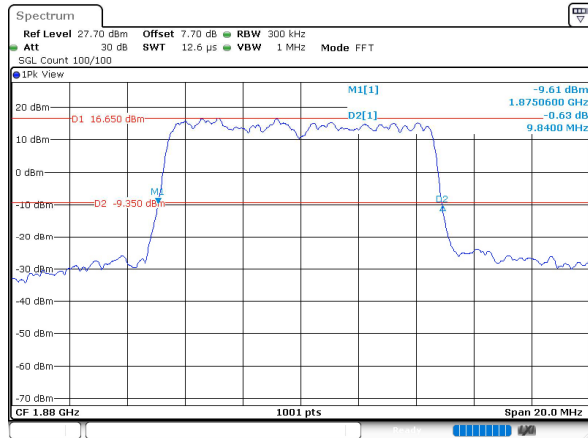


Middle Channel / 10MHz / 16QAM

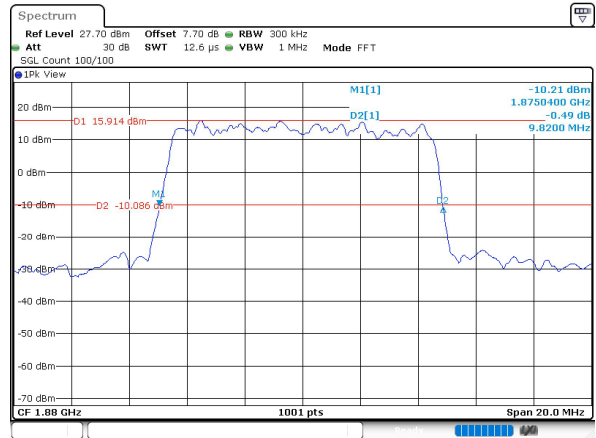


Middle Channel / 15MHz / QPSK

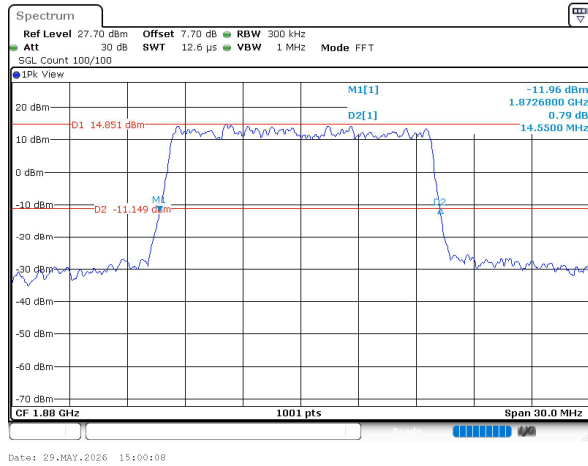


Middle Channel / 15MHz / 16QAM

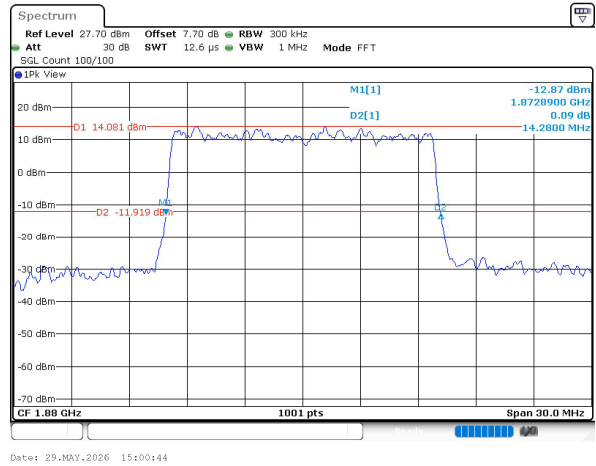

Middle Channel / 20MHz / QPSK

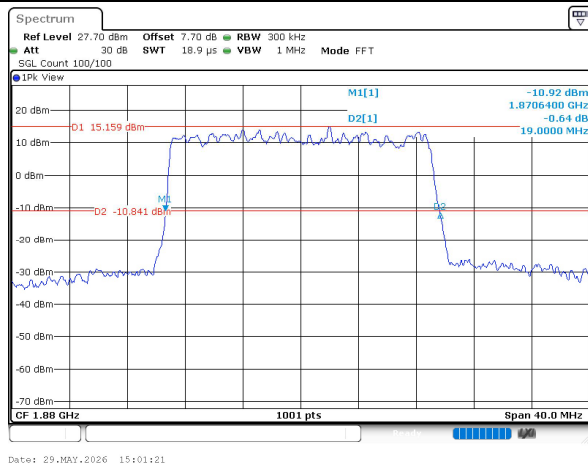

Middle Channel / 20MHz / 16QAM

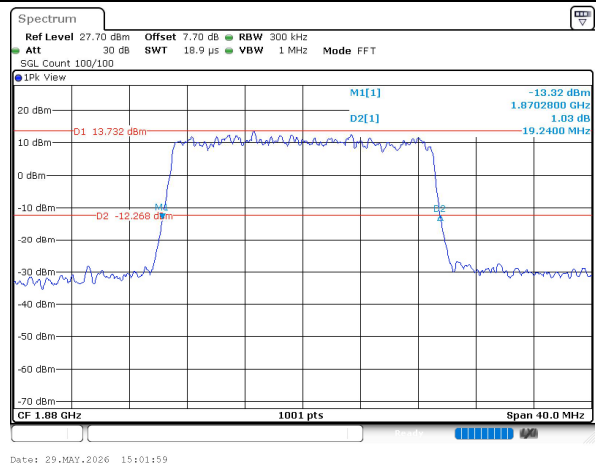



Occupied Bandwidth

Mode	LTE Band 2 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.09	1.10	2.71	2.71	4.49	4.48	9.09	9.02	13.45	13.40	17.84	17.92