

KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTERHEAD OFFICE
6-8-7 NISHITENMA
KITA-KU OSAKA 530-0047 JAPAN

Corporate Juridical Person

IKOMA TESTING LABORATORY
12128 TAKAYAMA-CHO
IKOMA-CITY NARA 630-0101 JAPAN**TEST REPORT**Report No.A-014-03-C

Date: 13 January 2004

This test report is to certify that the tested device properly complies with the requirements of:

FCC Rules and Regulations Part 15 Subpart C Intentional Radiators.

All the tests necessary to show compliance to the requirements were performed and these results met the specifications of requirement. The results of this report should not be construed to imply compliance of equipment other than that, which was tested. Unless the laboratory permission, this report should not be copied in part.

1. Applicant

Company Name : SHARP CORPORATION ENGINEERING DEPT.1
LCD DIGITAL SYSTEMS DIVISION

Mailing Address : 174, Hayakawa-cho, Yaita-city, Tochigi 329-2193 Japan

2. Identification of Tested Device

Type of Device : SS Transmitter
Type of Modulation : ☐: FHSS ☒: DSSS ☐: Other method
Kind of Equipment Authorization : ☐: DoC ☒: Certification ☐: Verification
FCC ID : APYTCG040
Device Name : LCD COLOR TV
Trade Name : SHARP
Model Number : LC-15L1U (Wireless Center)
Serial Number : 001 ☒: Prototype ☐: Pre-production ☐: Production
Date of Manufacture : November 2003

3. Test Items and Procedure

☒: 6 dB Bandwidth Measurement
☒: Peak Output Power Measurement
☒: Band Edge RF Conducted Emission Measurement
☒: Spurious RF Conducted Emission Measurement
☒: Power Density Measurement
☒: Radiated Spurious Emission Measurement
☒: AC Power Line Conducted Emission Measurement

Above all tests were performed under: FCC Public Notice DA00-705(March 30,2000)
and ANSI C63.4 – 1992

☒: without deviation, ☐: with deviation(details are found inside of this report)

4. Date of Test

Receipt of Test Sample : 13 December 2003
Condition of Test Sample : ☒: Damage is not found on the set.
☐: Damage is found on the set. (Details are described in this report)
Test Completed on : 17 December 2003

Seiichi Izumi
General Manager/ Ikoma Testing Laboratory

Table of Contents

0. LABORATORY ACCREDITATION AND MEASUREMENT UNCERTAINTY	3
0.1. Laboratory Accreditation.....	3
0.2. Measurement Uncertainty	3
1. CERTIFICATION OF THE COMPLIANCE.....	3
2. GENERAL INFORMATION	4
2.1. Product Description	4
2.2. Description for Equipment Authorization.....	5
2.3. Test Facility.....	5
3. TESTED SYSTEM	6
3.1. Test Mode	6
3.2. Operation of EUT System	7
3.3. Characterization and condition of EUT System	7
3.4. Test Setup Diagram.....	8
3.5. Block Diagram of EUT System	11
3.6. List of EUT System	12
3.7. List of Cables.....	12
4. 6 dB BANDWIDTH MEASUREMENT (§ 15.247 (a) (2)).....	13
4.1. Test Procedure.....	13
4.2. Test Results	14
5. PEAK OUTPUT POWER MEASUREMENT (§ 15.247 (b) (3))	18
5.1. Test Procedure.....	18
5.2. Test Results	19
6. BAND EDGE RF CONDUCTED EMISSION MEASUREMENT (§ 15.247 (c)).....	23
6.1. Test Procedure.....	23
6.2. Test Results	24
7. SPURIOUS RF CONDUCTED EMISSION MEASUREMENT (§ 15.247 (c)).....	27
7.1. Test Procedure.....	27
7.2. Test Results	28
8. PEAK POWER DENSITY MEASUREMENT (§ 15.247 (d)).....	33
8.1. Test procedure.....	33
8.2. Test Results	34
9. RADIATED EMISSION MEASUREMENT (§ 15.247 (c)), (§ 15.209 (a)).....	38
9.1. Test Procedure.....	38
9.2. Test Results	39
10. AC POWER LINE CONDUCTED EMISSION MEASUREMENT.....	76
10.1. Test Procedure.....	76
10.2. Test Results	77
11. USED TEST EQUIPMENTS AND CALIBRATION STATUS	81

0. LABORATORY ACCREDITATION AND MEASUREMENT UNCERTAINTY

0.1. Laboratory Accreditation

KEC is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP) for the specific scope of accreditation under Lab Code: 200207-0.

When the test report concerns with the NVLAP accreditation test, the first page of the test report is signed by NVLAP Approved Signatory accompanied by the NVLAP logo.

The report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

0.2. Measurement Uncertainty

The result of a measurement is only an approximation or estimate of the value of a specific quantity. And thus the measurand is complete only when a statement of uncertainty is given.

KEC quotes Measurement Uncertainty (U)

- of $\pm 3 \times 10^{-9}$ for 6dB Bandwidth Measurement
- of ± 0.7 dB for Peak Output Power Measurement
- of ± 0.7 dB for Band Edge RF Conducted Measurement
- of ± 0.7 dB for Spurious RF Conducted Emission Measurement
- of ± 0.7 dB for Power Density
- of ± 4.9 dB for Radiated Emissions
- of ± 2.2 dB for Conducted Emissions

1. CERTIFICATION OF THE COMPLIANCE

This test report is to certify that the tested device properly complies with the requirements of FCC Rules and Regulations Part 15 Subpart C Intentional Radiators.

KEC evaluation criteria for compliance:

The Product complies, if

the measured results are below the specification limit by a margin more than or equal to

- U 3×10^{-9} for 6dB Bandwidth Measurement
- U (0.7 dB) for Peak Output Power Measurement
- U (0.7 dB) for Band Edge RF Conducted Measurement
- U (0.7 dB) for Spurious RF Conducted Emission Measurement
- U (0.7 dB) for Power Density
- 1/2 U (2.5 dB) for Radiated Emissions
- U (2.2 dB) for Conducted Emissions

2. GENERAL INFORMATION

2.1. Product Description

The SHARP Model No. LC-15L1U (Wireless Center) (referred as EUT in this report) is a LCD COLOR TV using the SS transmitter technology.

(1) Technical Specifications

- Access type : Direct Sequence Spread Spectrum Method
- Modulation type : CCK (complementary code keying) modulation
- Tx Frequency range : 2412 MHz – 2462 MHz
- RF Local Frequency range : 2037.75 MHz – 2087.25 MHz
- Rx Frequency range : 2412 MHz – 2462 MHz
- SS Intermediated Frequency : 374.25 MHz
- Transmission mode : Far 4 Mbps
Mid 4.5 Mbps
Near 6 Mbps
- Antenna : Built in antenna Diversity method, Antenna Gain 3dBi
Impedance 50Ω (Unbalanced)

(2) Used Oscillating Frequency

- MSP Sound processor clock : 18.432 MHz
- MSP Micro processor clock : 10 MHz
- VPS Video Processor clock : 20.25 MHz
- SS Base clock : 44 MHz
- SS Micro Processor : 10 MHz
- D/D Converter clock : 250 kHz

(3) Used Oscillating Frequency

- ANT IN : Type “F” for television antenna
- ANT OUT : Type “F” for other television device
- AV-IN 1 : S-Video, Video and Audio input terminal
- AV-IN 2 / OUT : S-Video, Video and Audio input terminal or output terminal
- AV-IN 3 : S-Video, Video and Audio input terminal
- MONITOR OUT : S-Video, Video and Audio output terminal
- IR OUT : Ir sensor
- POWER INPUT DC12V : for AC Adaptor
- FACTORY SERVICE : for maintenance

(4) Rated Power Supply

- : DC 12V, 10W
(AC Adaptor Model No. UADP-A042WJPZ, trade name SHARP,
Accessory of EUT)
Input AC110~240V, 50/60 Hz
Output DC12V

2.2. Description for Equipment Authorization

(1) Type of device	: ☒ Intentional Radiators
(2) Reference Rule and Specification	: FCC Rule Part 15 Subpart C, Section 15.247 Operation with in the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
(3) Kind of Equipment Authorization	: ☐ DoC ☒ Certification ☐ Verification
(4) Procedure of Application	: ☒ Original Equipment ☐ Modification
(5) Highest Frequency used in the Device	: 2412 – 2462 MHz
(6) Upper Frequency of Radiated Emission Measurement Range	: ☐ 1000 MHz ☐ 2000 MHz ☐ 5000 MHz ☒ Tenth harmonics of the highest fundamental frequency

2.3. Test Facility

All tests described in this report were performed by:	
Name:	KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER (KEC) IKOMA TESTING LABORATORY
OpenArea Test Site	☐ No.1 ☐ No.4
Anechoic Chamber	☐ No.1 ☒ No.3
Shielded Room	☐ No.1 ☐ No.2 ☐ No.4 ☒ No.5 ☒ No.6
Address:	12128, Takayama-cho Ikoma-city, Nara, 630-0101 Japan
These test facilities have been filed with the FCC under the criteria of ANSI C63.4-1992. The KEC has been accredited by the NVLAP (Lab. Code: 200207-0) based on ISO/IEC 17025. Also the laboratory has been authorized by TUV Product Service (GER) and TUV Rheinland (GER) based on their criteria for testing laboratory (ISO/IEC 17025). EMC M.C. Anechoic Chamber No.3 has been filed with the Industry Canada under the criteria of RSS212, issue 1. (File number : IC4149-3)	

3. TESTED SYSTEM

3.1. Test Mode

The compliance tests were performed under test modes.

- Op-mode 1 : Transmitting continuous data at 2412 MHz with modulation (6 Mbps)
- Op-mode 2 : Transmitting continuous data at 2437 MHz with modulation (6 Mbps)
- Op-mode 3 : Transmitting continuous data at 2462 MHz with modulation (6 Mbps)
- Op-mode 4 : Receiving (Tx standby)

The diversity antenna system (ANT.1 and ANT.2) were equipped inside of EUT.

Therefore, compliance tests were performed both of a continuous transmitting of ANT.1 operation and continuous transmitting ANT.2

In addition, the EUT is designed both of a horizontally placed and vertically place.

The measurement was conducted each condition above f) and g) test.

- | | |
|---|---|
| a) 20dB Bandwidth measurement | : Op-mode 1, Op-mode 2 and Op-mode 3 |
| b) Peak Output Power measurement | : Op-mode 1 ,Op-mode 2 and Op-mode 3 |
| c) Band Edge RF Conducted measurement | : Op-mode 1 ,Op-mode 2 and Op-mode 3 |
| d) Spurious RF Conducted emission measurement | : Op-mode 1 ,Op-mode 2 and Op-mode 3 |
| e) Power Density measurement | : Op-mode 1 ,Op-mode 2 and Op-mode 3 |
| f) Radiated Emission measurement | : Op-mode 1 ,Op-mode 2, Op-mode 3 and Op-mode 4 |
| g) AC Power Line Conducted Emission measurement | : Op-mode 1 ,Op-mode 2, Op-mode 3 and Op-mode 4 |

3.2. Operation of EUT System

Transmitting (Op-mode 1 to 3)

1. Connect the serial port of personal computer to the factory service port of EUT by using the level converter cable.
2. Execute the test program and set the any parameter.
3. Choice the test mode.
 - a. Tx / Rx mode : Transmitting mode (Command : Telec 1)
 - b. Select Tx Channel : ch.1 (2412 MHz), ch.6 (2437 MHz) and ch.11 (2462 MHz)
 - c. Select Tx Antenna : ANT 1 (Command, 0a) and ANT 2 (Command, 4a)

Then, the EUT was set in the continuous transmitting operation above selected condition.

Receiving mode (Op-mode 4)

4. Connect the serial port of personal computer to the factory service port of EUT by using the level converter cable.
5. Execute the test program and set the any parameter.
6. Choice the test mode.
 - a. Tx / Rx mode : Receiving mode (Command : Telec 2)
 - b. Select Tx Channel : ch.1 (2412 MHz), ch.6 (2437 MHz) and ch.11 (2462 MHz)
 - c. Select Tx Antenna : ANT 1 (Command, 0a) and ANT 2 (Command, 4a)

Then, the EUT was set in the continuous receiving operation above selected condition.

[Note]


The test program is prepared by manufacture.

3.3. Characterization and condition of EUT System

☒ : normal, ☐ : not normal (that is)

3.4. Test Setup Diagram


- 6dB Bandwidth
- Peak Output Power
- Band Edge RF Conducted Emission
- Spurious RF Conducted Emission
- Peak Power Density

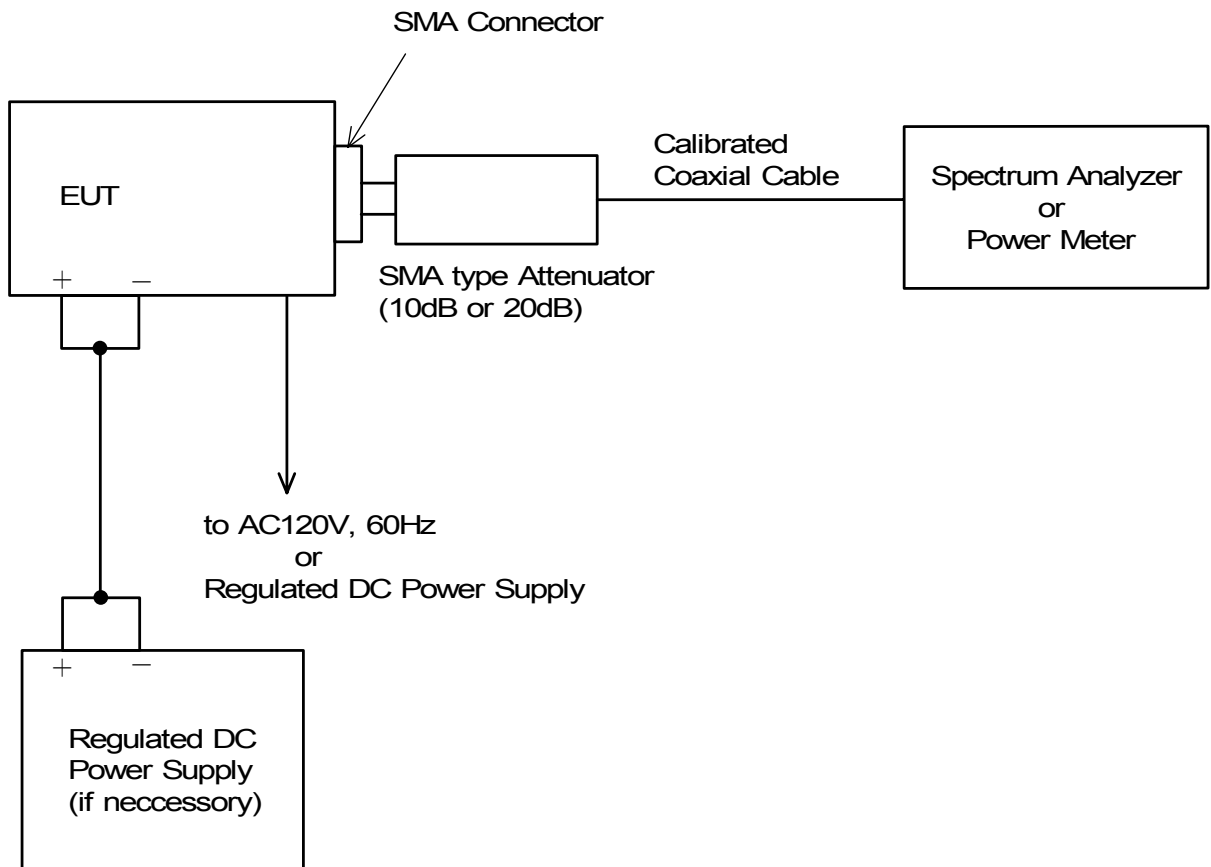

- Continued -

• Radiated Emission Measurement

[Open Area Test Site or Anechoic Chamber]

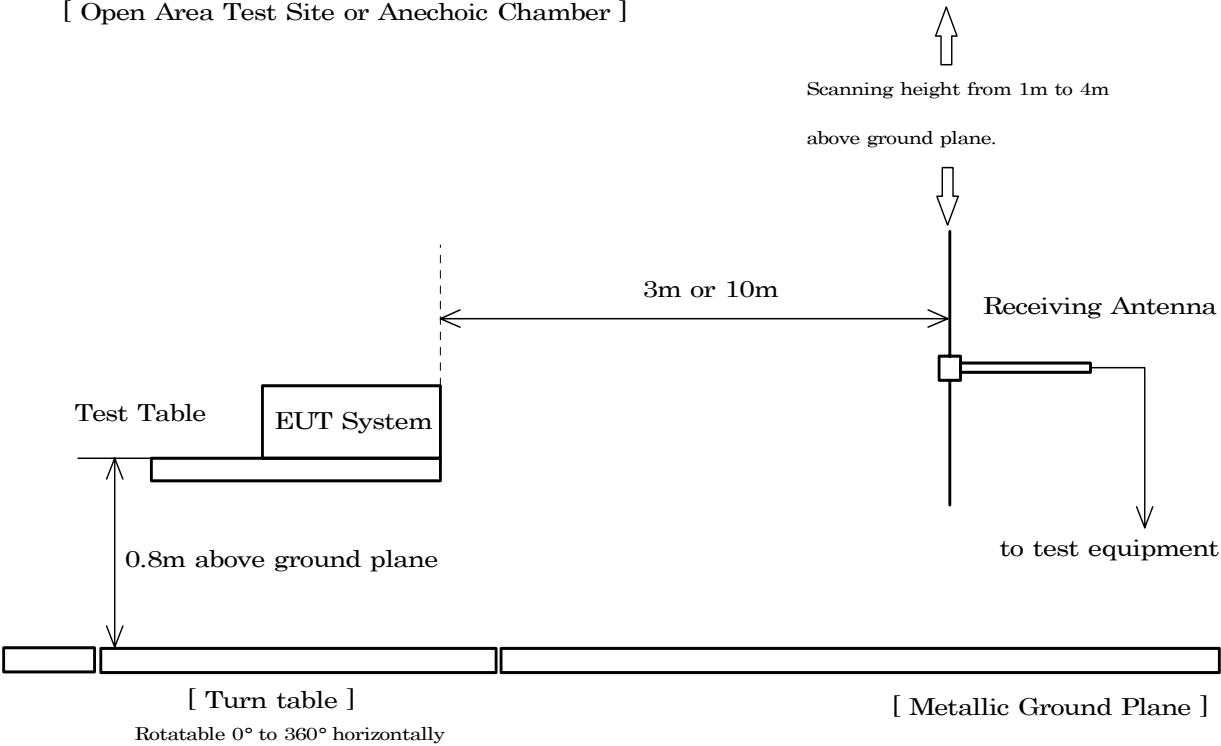


[Note]

Test Table size	: 1.0m × 1.0m, Height 0.8m, Material : Expanded Polystyrene
Receiving Antenna	: Tuned dipole antenna, Biconical(30-300MHz) antenna or Logperiodic antenna (30-1000MHz) or Standard gain horn antenna (Above 1GHz) Scan from 1.0m to 4.0m above ground plane expect for vertical polarization the minimum height of center of antenna is increased so that the lowest point of the bottom of the antenna clears the ground surface by at least 25cm.
Interconnecting cables	: Excess part of the interconnecting cables longer than 1meter are bundled in the center. Cables that hang closer than 40cm to the ground plane is folded back and forth forming bundled 30 to 40 cm long, hanging approx, in the middle between the ground plane and table.
AC Power Cables	: All AC Power cord drape to the floor and are routed over the receptacle. In case of floor-Standing Equipment, Excess power cords are bundled in the center or shortened to appropriate length.
Floor-Standing Equipment	: EUT and all cables are insulated from the ground plane by 3mm to 12mm of insulating material

- Continued -

• Conducted Emission Measurement

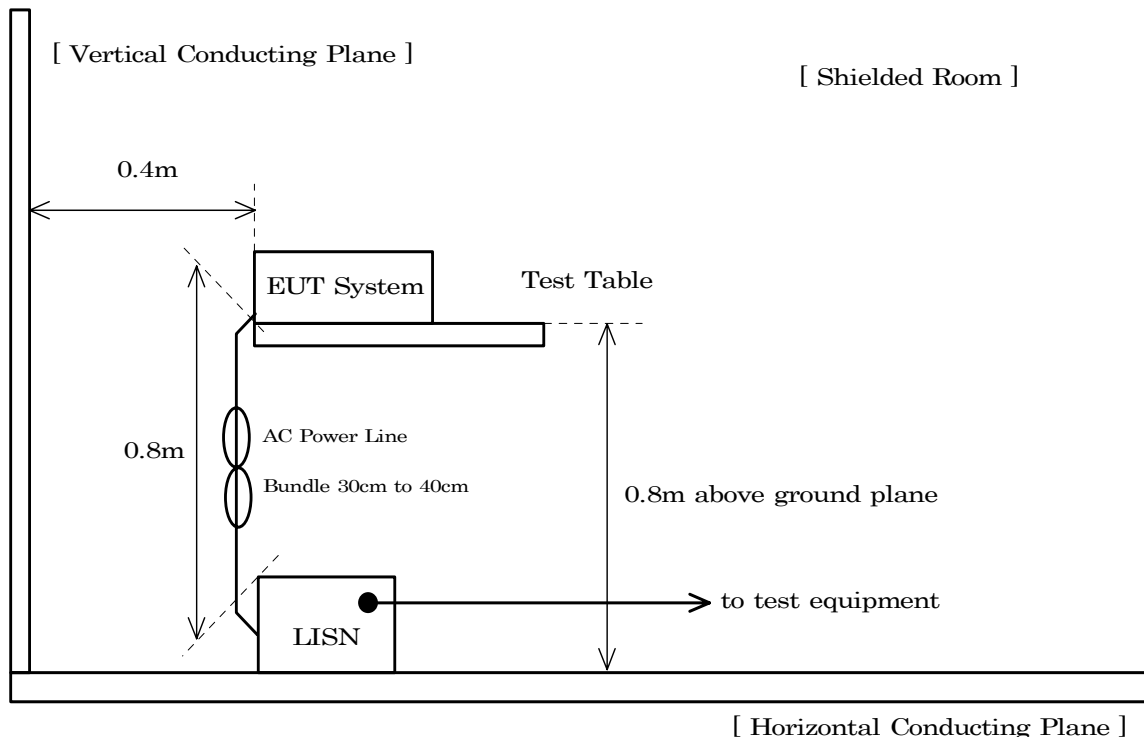


[Note]

- | | |
|--------------------------|--|
| Test Table size | : 2.0m × 1.0m, Height 0.8m, Material : Wooden |
| LISN | : All LISN are bounded on the conducting plane by using the screw.
2nd LISN RF connector is terminated in 50 Ω load. |
| Interconnecting cables | : Excess part of the interconnecting cables longer than 1meter are bundled in the center. Cables that hang closer than 40cm to the ground plane is folded back and forth forming bundled 30 to 40 cm long, hanging approx, in the middle between the ground plane and table. |
| AC Power Cables | : AC Power cord of EUT is connected to one LISN which is placed on the ground plane. The LISN place in 80cm from the nearest part of EUT chassis. The excess power cord is bundled in the center, or shortened to appropriate length. AC power cord except from the EUT are connected second LISN. |
| Floor-Standing Equipment | : EUT and all cables are insulated from the ground plane by 3mm to 12mm of insulating material |

Horizontal and vertical conducting plane (minimum 2.0m×2.0m) extends at least 0.5m beyond the EUT system footprint.

3.5. Block Diagram of EUT System

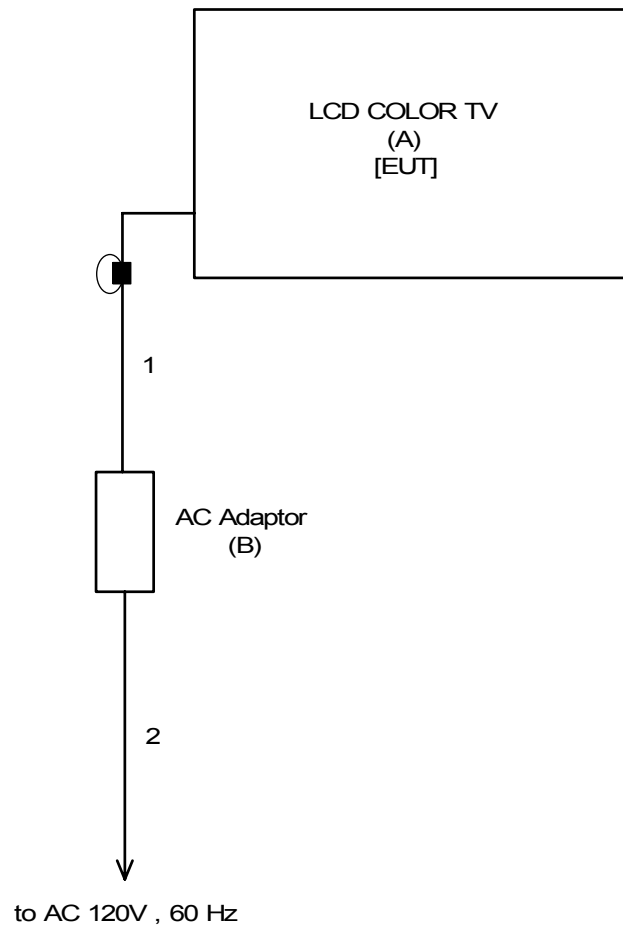

[Note]

See 3.6. List of EUT System and 3.7. List of Cables

3.6. List of EUT System

No	Device Name (Interface)	Model Number (Serial Number)	FCC ID (Trade Name)	Note	Remark
A	LCD COLOR TV	LC-15L1U (001)	APYTCG040 (SHARP)	EUT	
B	AC Adaptor	UADP-A042WJPZ (-)	N/A (SHARP)	Accessory of EUT	

[Attention]

N/A : Not Applicable

3.7. List of Cables

No	Cable Name	Shielded (Y/N)	Length (m)	Note	Remark
1	DC Output Cord of AC Adaptor (B)	N	2.0	with one ferrite core	
2	AC Input Cord of AC Adaptor (B)	N	1.75	2-wires type	

4. 6 dB BANDWIDTH MEASUREMENT (§ 15.247 (a) (2))

4.1. Test Procedure

- | | |
|-----|--|
| (1) | Connect the EUT RF output port to spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary). |
| (2) | Activates the EUT System and execute the software prepared for test, if necessary. |
| (3) | To find out the maximum emission condition, the transmitting data rate of EUT is set to maximum data rate. |
| (4) | The Spectrums are scanned and allow the trace stabilized. |
| (5) | The both side of 6dB down value from peak power were measured by using delta-maker function of the spectrum analyzer (*1). |
| (6) | Above measurement were performed under low-band hopping frequency, mid-band hopping frequency and high band hopping frequency. |

[Note]

(*1) Spectrum Analyzer Set Up Conditions

Frequency Span	: 50 MHz
Resolution bandwidth	: 1 MHz
Video bandwidth	: $\geq$ RBW
Sweep	: Auto
Detector function	: Peak
Trace Mode	: Max Hold

4.2. Test Results

(1) ANT 1 (0a)

Measured Frequency [MHz]	Measured Bandwidth [MHz]	Limit [kHz]
2412	10.25	>500
2437	10.25	>500
2462	10.33	>500

(2) ANT 2 (4a)

Measured Frequency [MHz]	Measured Bandwidth [MHz]	Limit [kHz]
2412	10.00	>500
2437	10.08	>500
2462	10.08	>500

[Note]

See next page figure 1 to 6.

[Test Condition]

EUT operation : Data transmission

EUT channel : 1, 6, 11 (2412, 2437, 2462 MHz)

[Environment]

Temperature 21°C

Humidity 43% (16 December 2003)

Temperature 23°C

Humidity 45% (17 December 2003)

[Tested Date / Tester]

16 December 2003

17 December 2003

Signature



Ikuya Minematsu

Spectrum

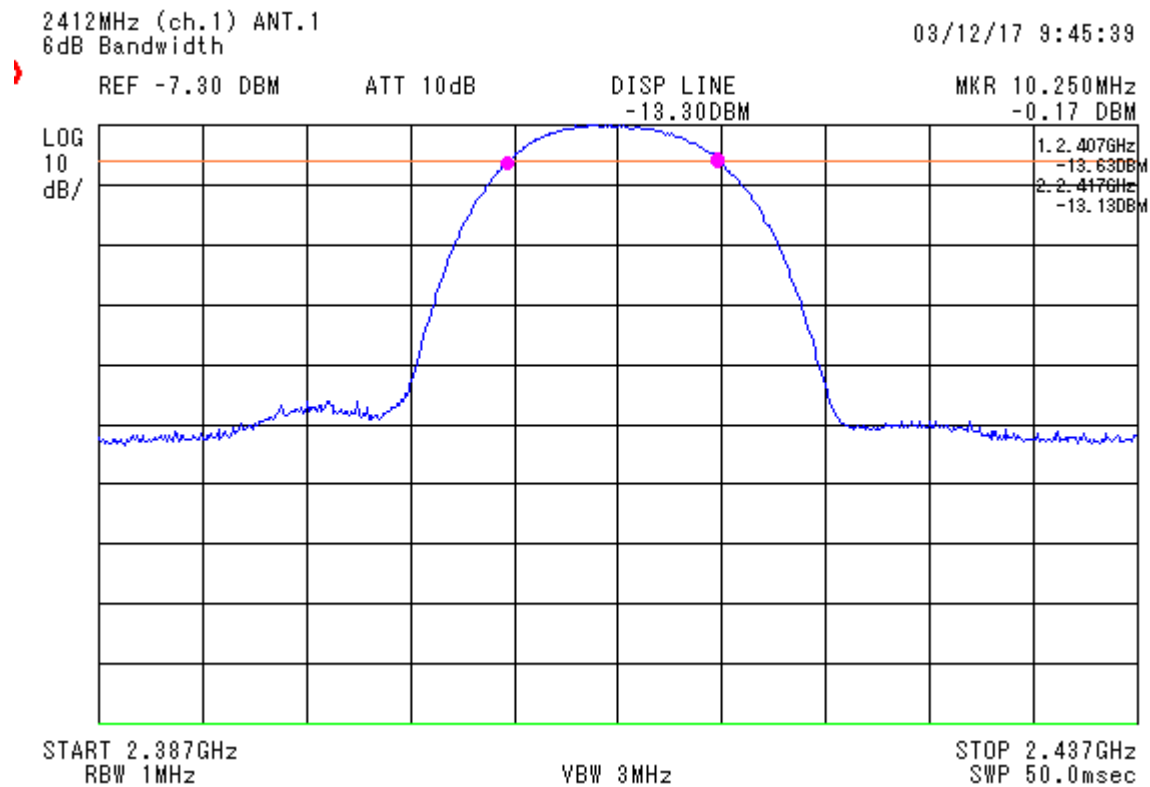


figure 1 6dB Bandwidth fc = 2412 MHz_0a

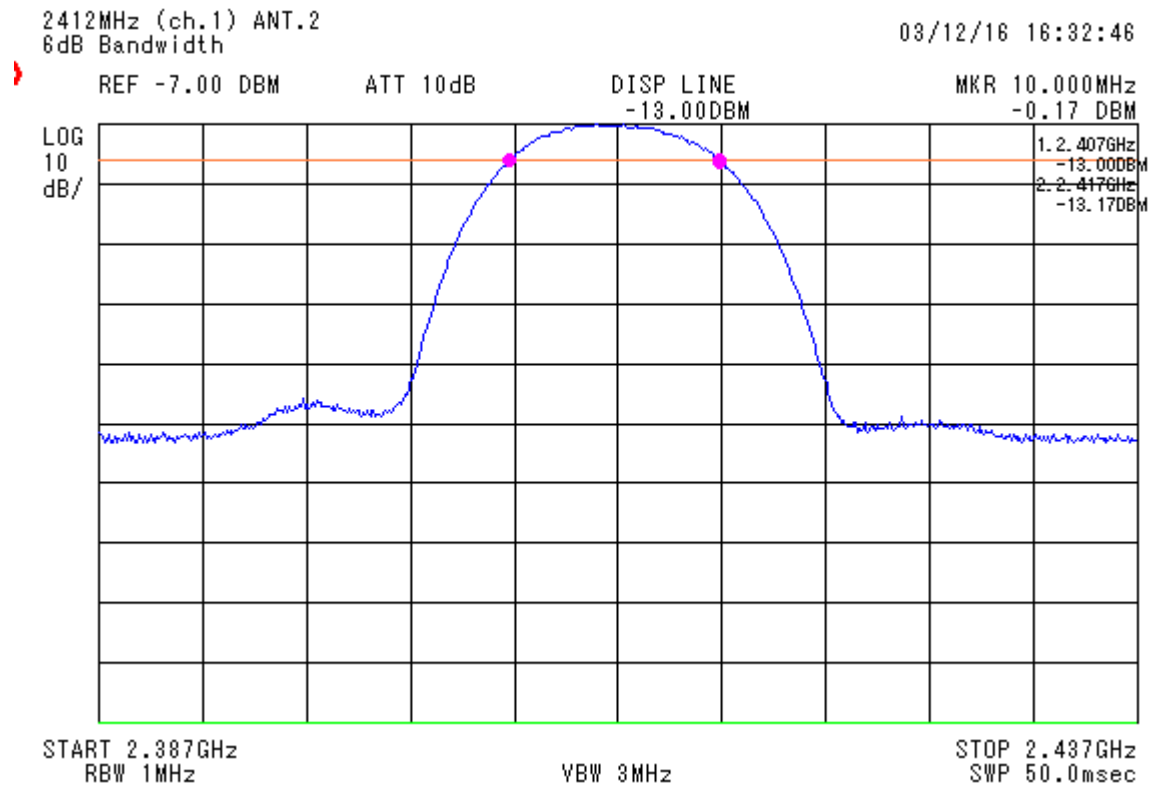


figure 2 6dB Bandwidth fc = 2412 MHz_4a

- Continued -

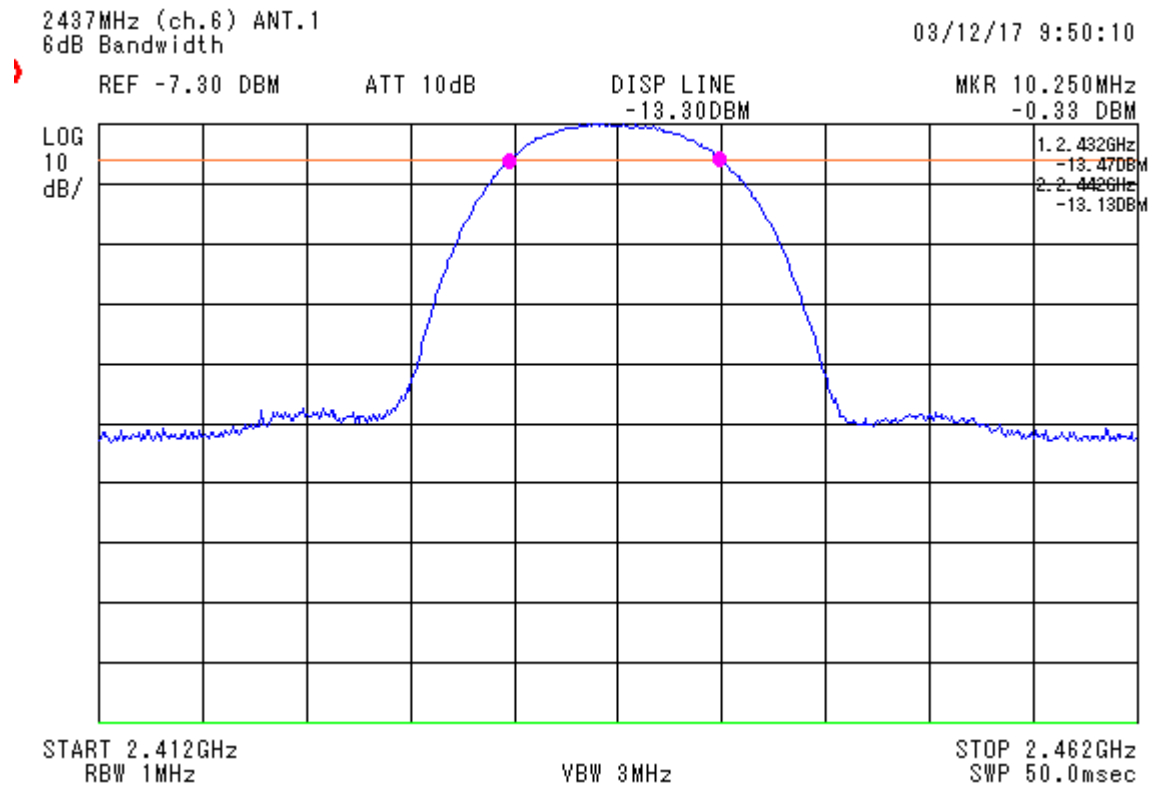


figure 3 6dB Bandwidth fc = 2437 MHz_0a

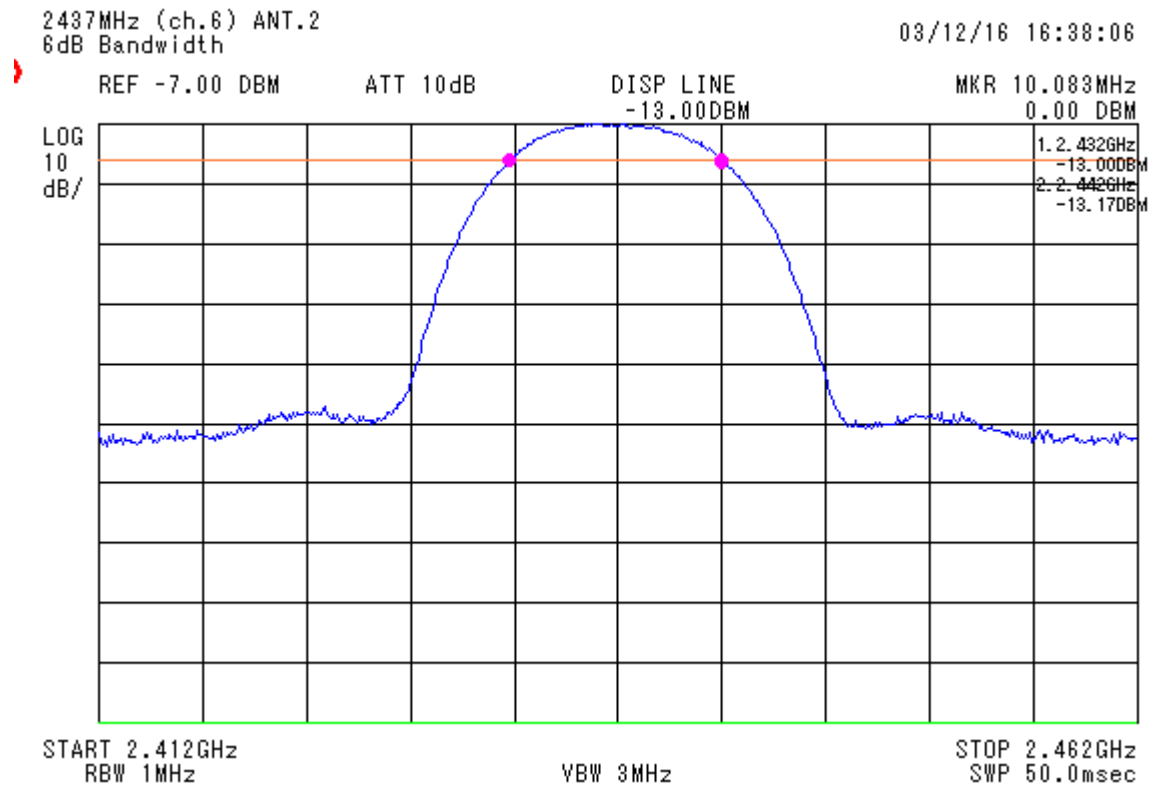


figure 4 6dB Bandwidth fc = 2437 MHz_4a

- Continued -

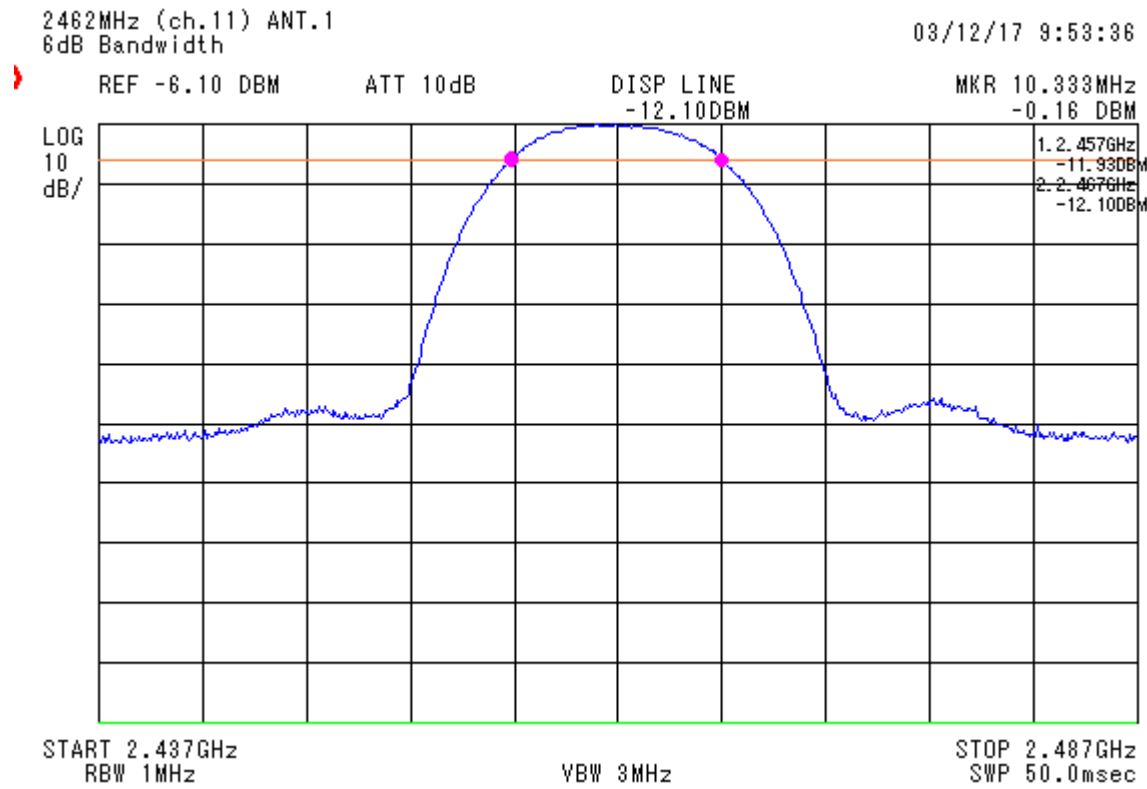


figure 5 6dB Bandwidth fc = 2462 MHz_0a

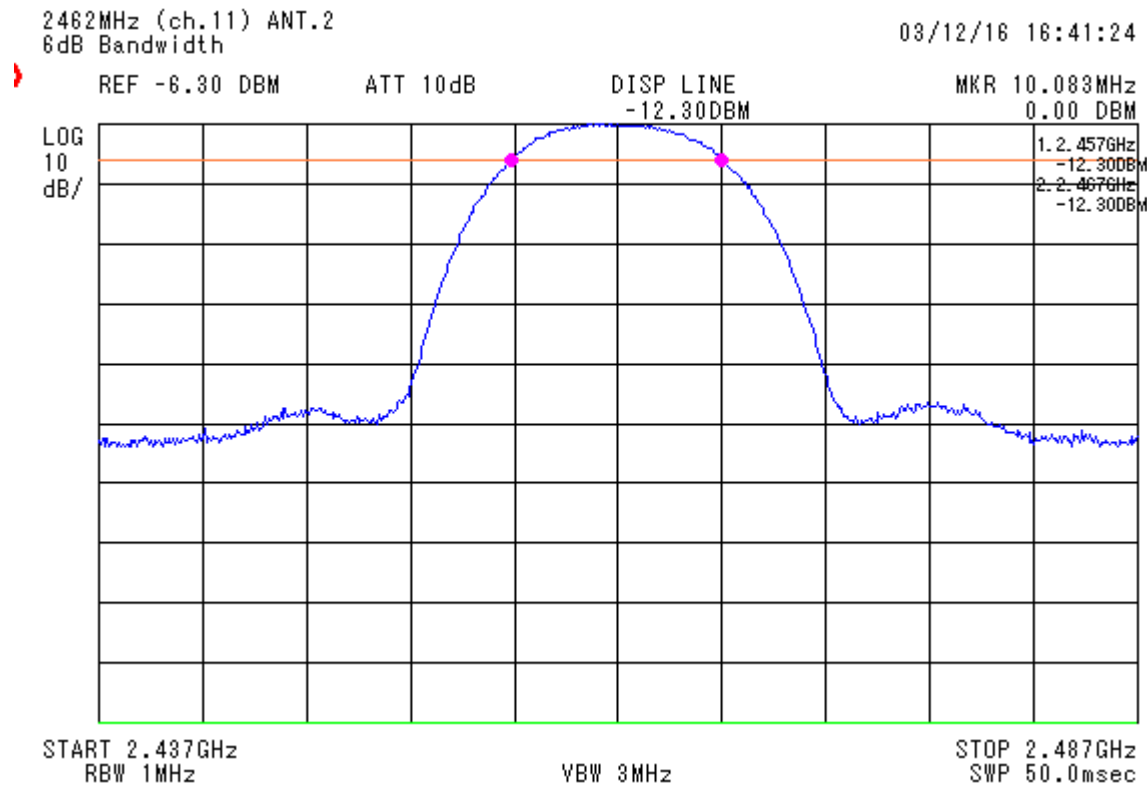


figure 6 6dB Bandwidth fc = 2462 MHz_4a

5. PEAK OUTPUT POWER MEASUREMENT (§ 15.247 (b) (3))

5.1. Test Procedure

(1)	Connect the EUT RF output port to spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary).
(2)	Activates the EUT System and executes the software prepared for test, if necessary.
(3)	To find out the worst case, the transmitting data rate of EUT is varied with the different modes of operation. The final test condition is recorded in this report.
(4)	The spectrums are scanned and allow the trace to stabilize.
(5)	The peak output power was determined by using the marker-data function of spectrum analyzer (*1) or power meter.
[Note]	
(*1)	Spectrum Analyzer Set Up Conditions
	Frequency Span : 20 dB bandwidth of the emission being measured
	Resolution bandwidth : 1 MHz
	Video bandwidth : $\geq$ RBW
	Sweep : Auto
	Detector function : Peak
	Trace Mode : Max Hold

5.2. Test Results

(1) ANT 1 (0a)

Measured Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Output Power [dBm]	Limit [dBm]	Margin for Limit [dB]
2412	20.1	-4.7	15.4	30.0	14.6
2437	20.2	-4.6	15.6	30.0	14.4
2462	20.1	-4.3	15.8	30.0	14.2

(2) ANT 2 (4a)

Measured Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Output Power [dBm]	Limit [dBm]	Margin for Limit [dB]
2412	20.1	-4.4	15.7	30.0	14.3
2437	20.2	-4.3	15.9	30.0	14.1
2462	20.1	-4.1	16.0	30.0	14.0

[Note]

- (1) Correction Factor includes the both loss of attenuator and cable used in the measurement.
 (2) The measurement was performed by peak type power meter.
 (3) See next page figure 7 to 12.

[Calculation method]

Peak Output Power (dBm) = Meter Reading (dBm) + Correction Factor (dB)

[Test Condition]

EUT operation : Data transmission
 EUT channel : 1, 6, 11 (2412, 2437, 2462 MHz)

[Environment]

Temperature 21°C Humidity 43% (16 December 2003)
 Temperature 23°C Humidity 45% (17 December 2003)

[Tested Date / Tester]

16 December 2003
 17 December 2003

Signature



Ikuya Minematsu

Spectrum Chart

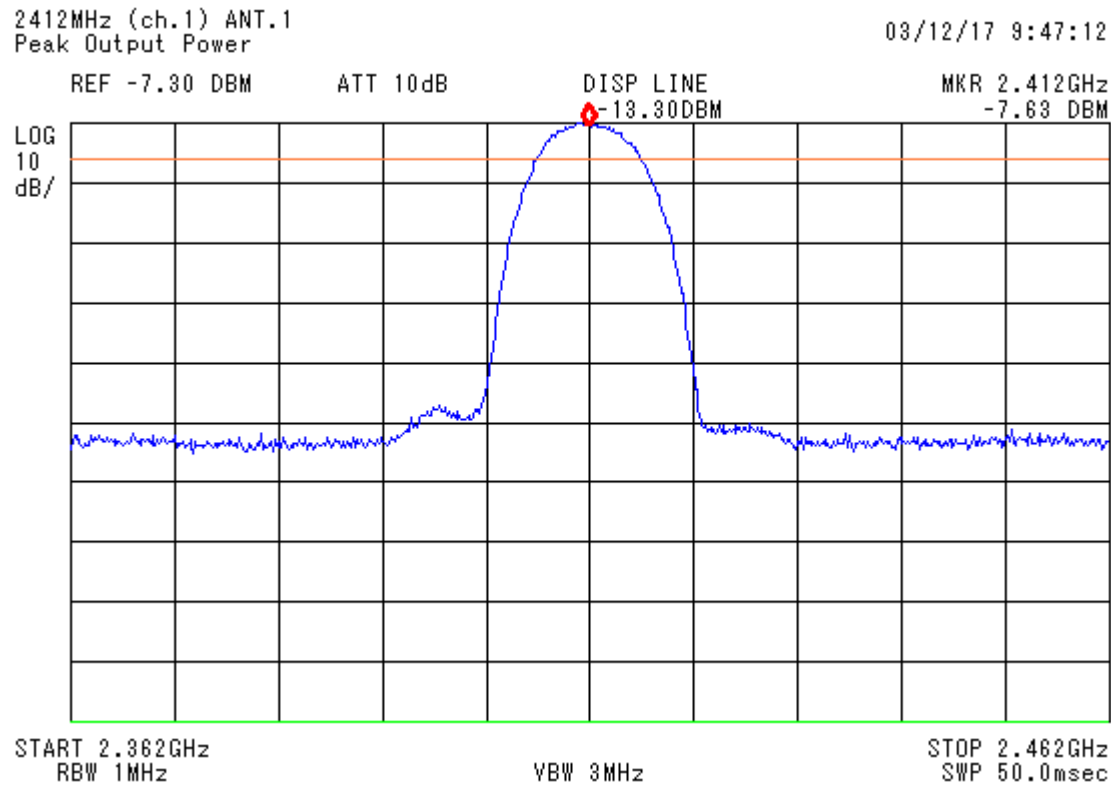


figure 7 2412 MHz_0a (channel 1)

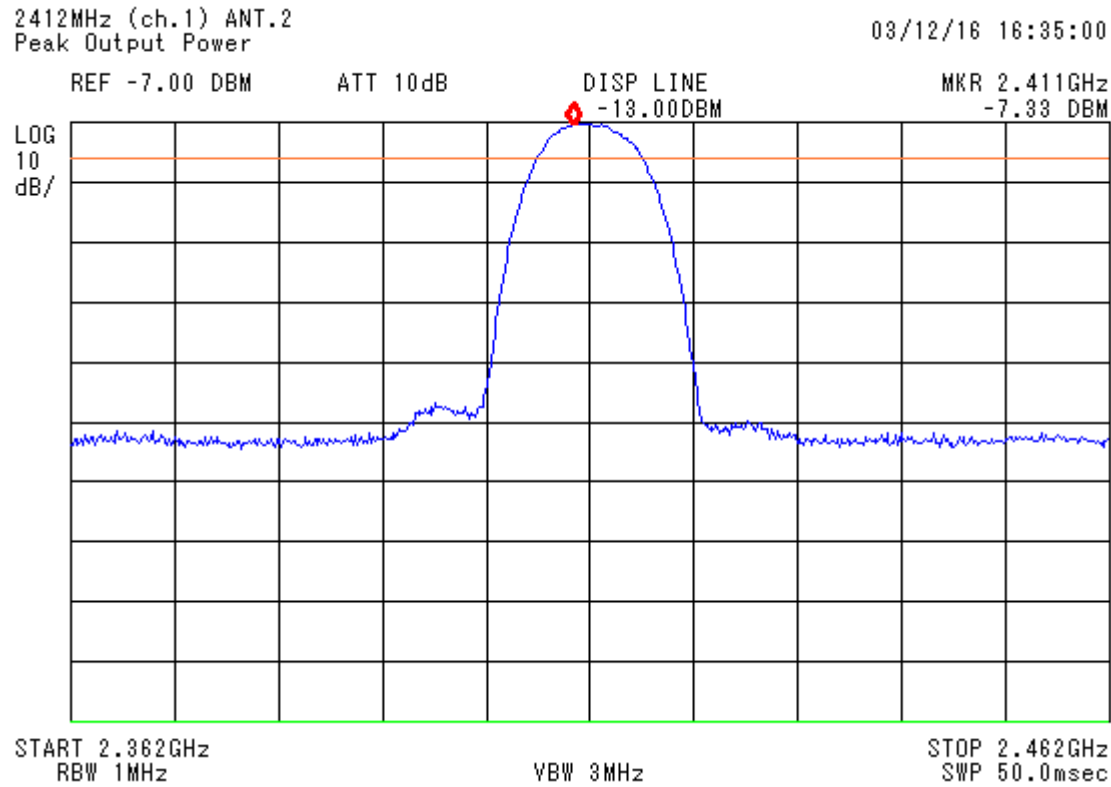


figure 8 2412 MHz_4a (channel 1)

- Continued -

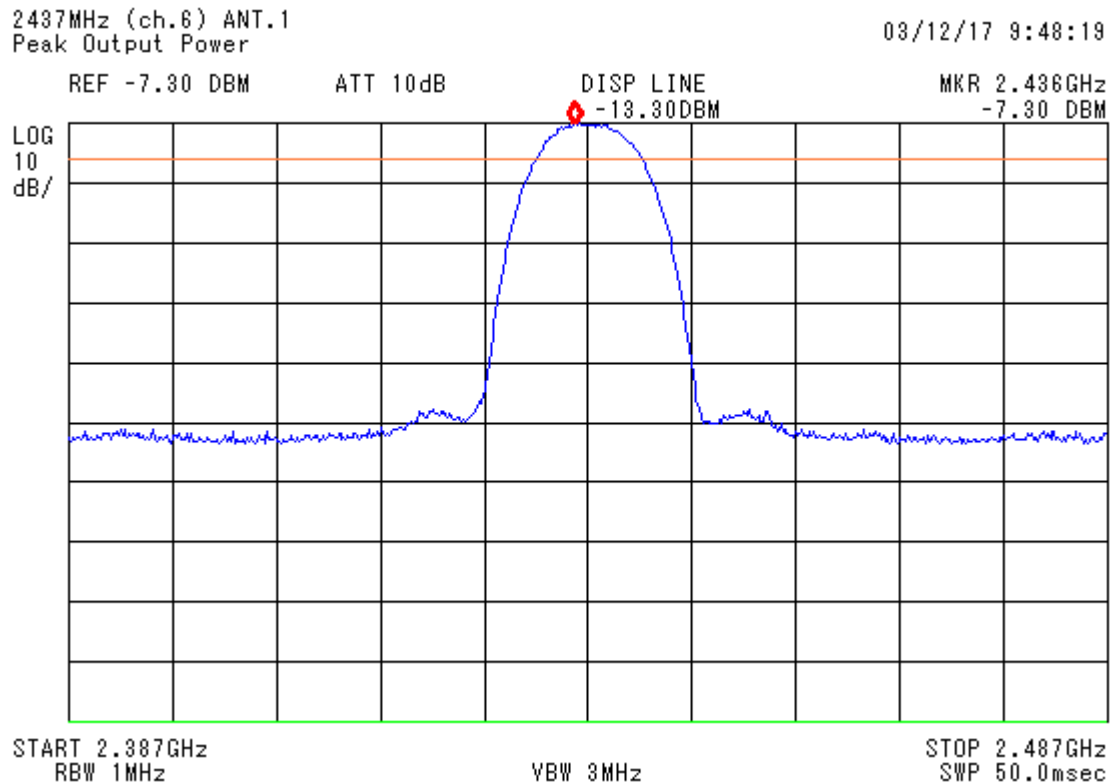


figure 9 2437 MHz_0a (channel 6)

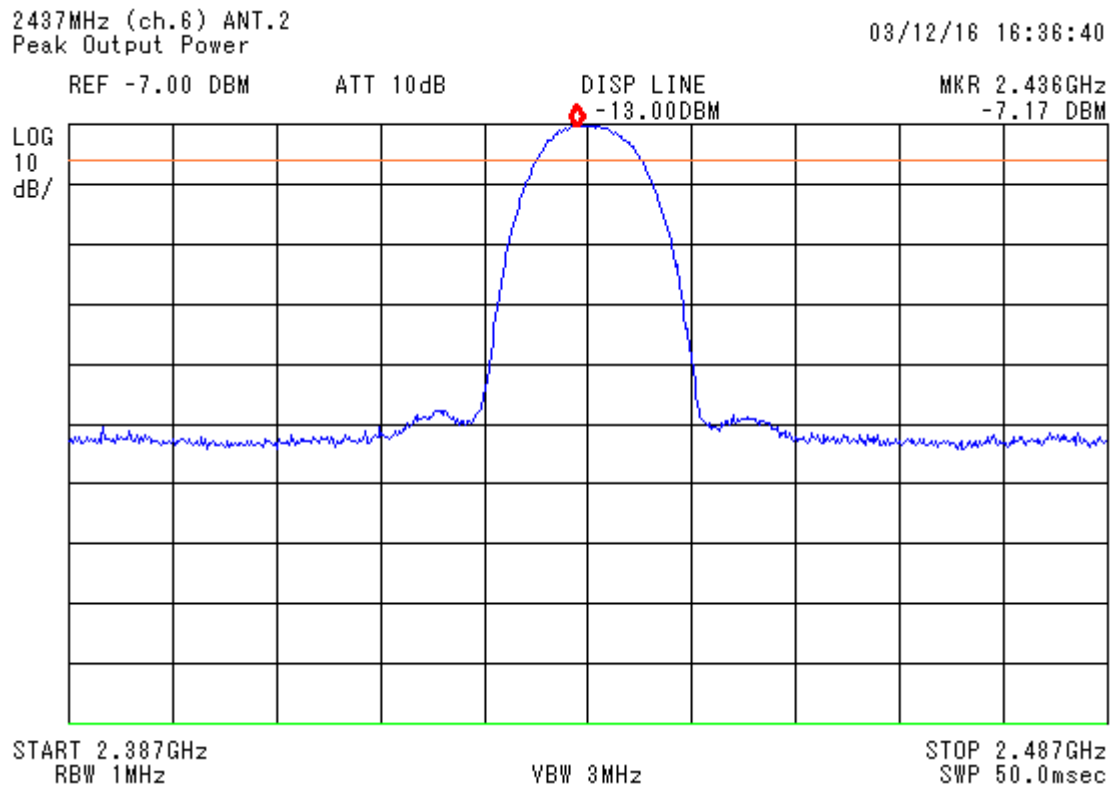


figure 10 2437 MHz_4a (channel 6)

- Continued -

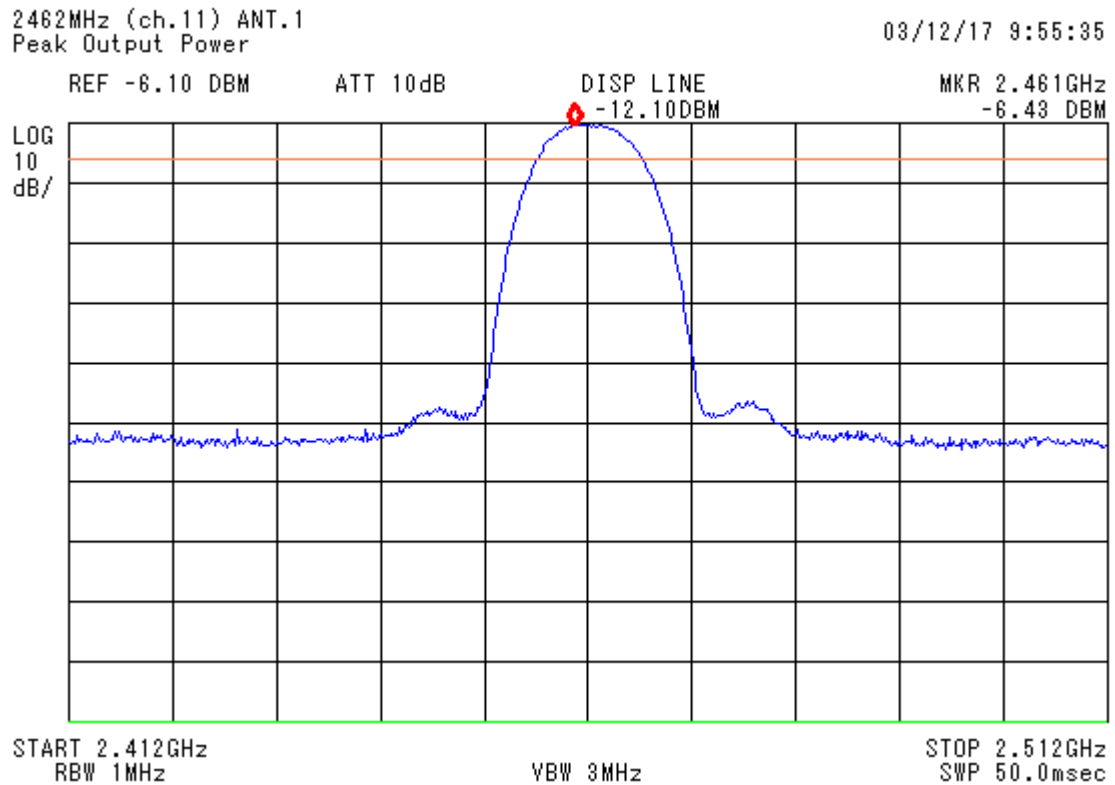


figure 11 2462 MHz_0a (channel 11)

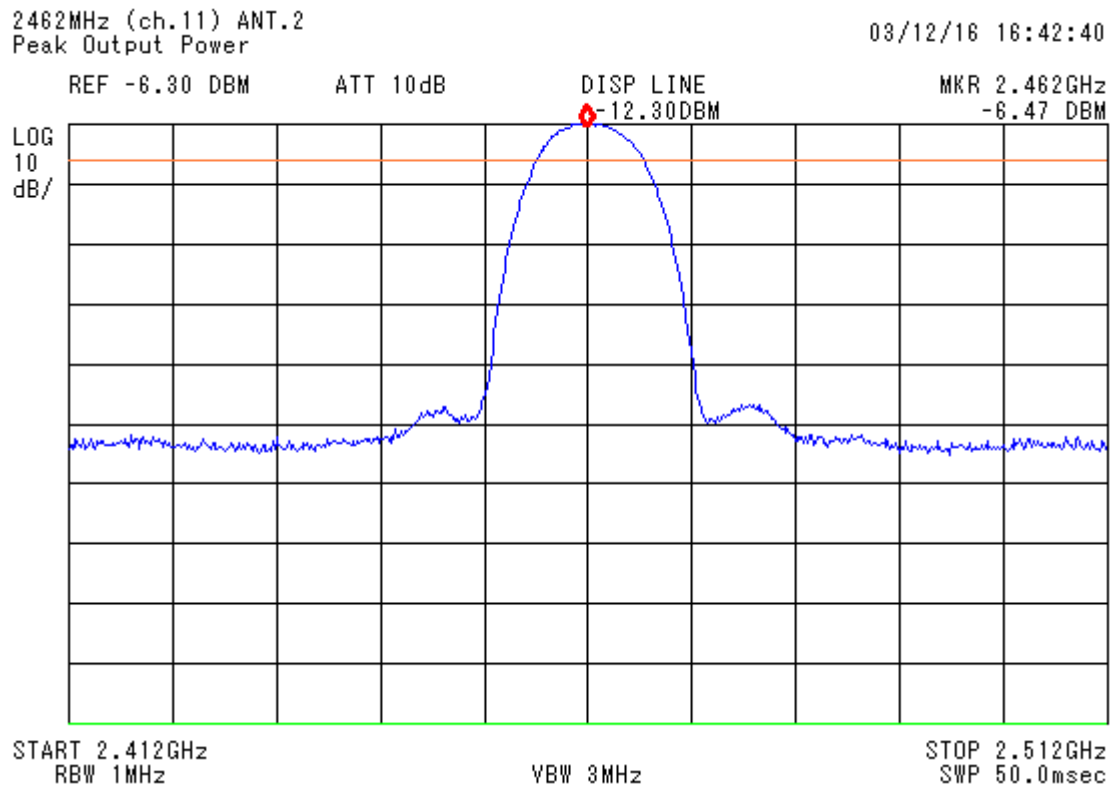


figure 12 2462 MHz_4a (channel 11)

6. BAND EDGE RF CONDUCTED EMISSION MEASUREMENT (§ 15.247 (c))

6.1. Test Procedure

(1)	Connect the EUT RF output port to the spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary).
(2)	Activates the EUT System and executes the software prepared for test, if necessary.
(3)	To find out the maximum emission condition, the transmitting data rate of EUT is set to maximum data rate.
(4)	The spectrum are scanned.
(5)	The emission at the band edge or the highest modulation product outside of band were measured by using the marker function of spectrum analyzer (*1).
(6)	The peak of the in-band emission were measured by using the marker to peak function of spectrum analyzer.
(7)	Above measurement were repeated at other side band edge.
[Note]	
(*1)	Spectrum Analyzer Set Up Conditions
	Frequency Span : Wide enough to capture the peak level of emission on the closest to the band edge
	Resolution bandwidth : 100 kHz
	Video bandwidth : $\geq$ RBW
	Sweep : Auto
	Detector function : Peak
	Trace Mode : Max Hold

6.2. Test Results

(1) ANT 1 (0a)

Measured Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Bandedge Emission [dBm]
2390.00	21.1	-69.9	-48.8
2483.50	21.1	-68.9	-47.8

(2) ANT 2 (4a)

Measured Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Bandedge Emission [dBm]
2390.00	21.1	-69.5	-48.4
2483.50	21.1	-68.4	-47.3

[Note]

See next page figure 13 to 16.

[Calculation method]

Deviation From Carrier (dBc) = Spurious RF Emission (dBm) – Peak Output Power (dBm)

[Test Condition]

EUT operation : Data transmission

EUT channel : 1, 6, 11 (2412, 2437, 2462 MHz)

[Environment]

Temperature 21°C

Humidity 43% (16 December 2003)

Temperature 23°C

Humidity 45% (17 December 2003)

[Tested Date / Tester]

16 December 2003

17 December 2003

Signature



Ikuya Minematsu

Spectrum

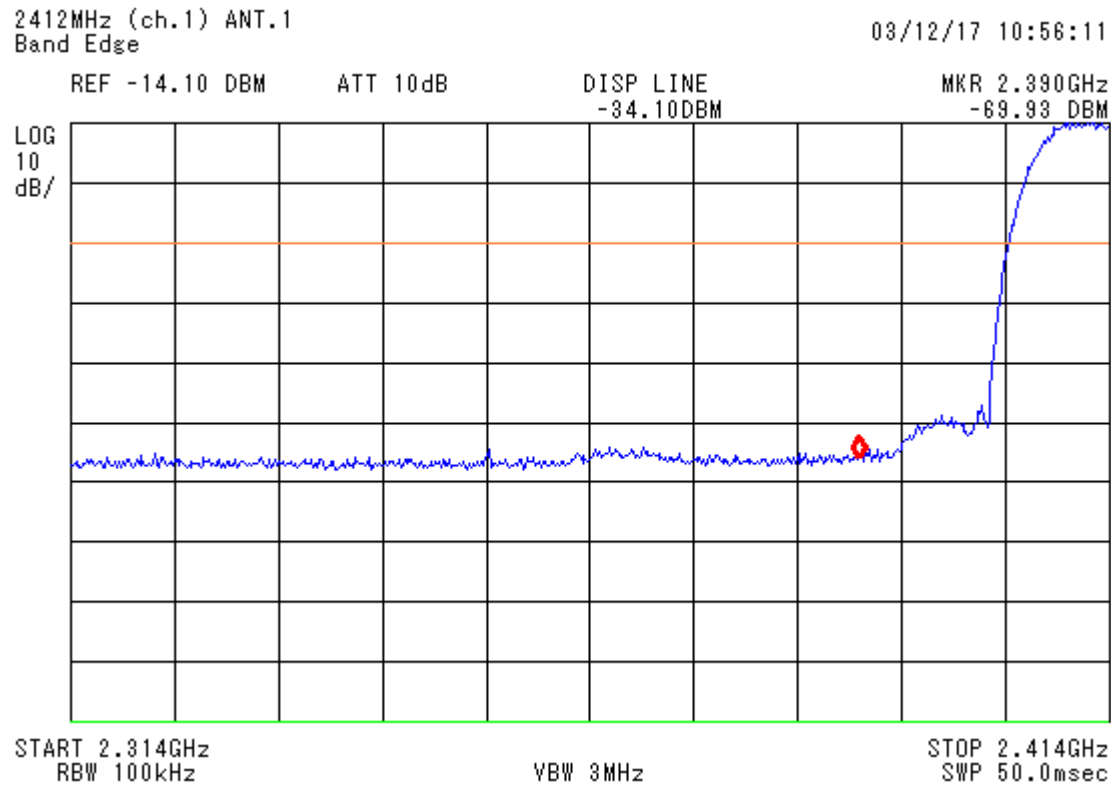


figure 13 Band Edge Low frequency side _0a

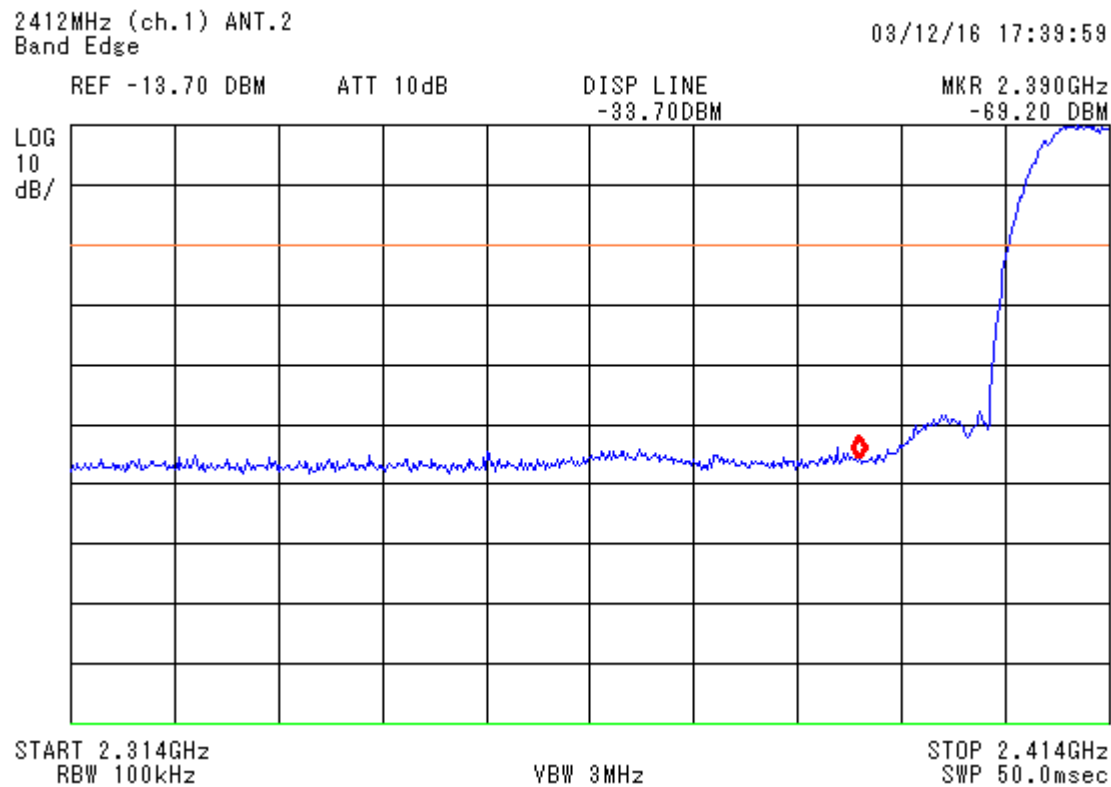


figure 14 Band Edge Low frequency side _4a

- Continued -

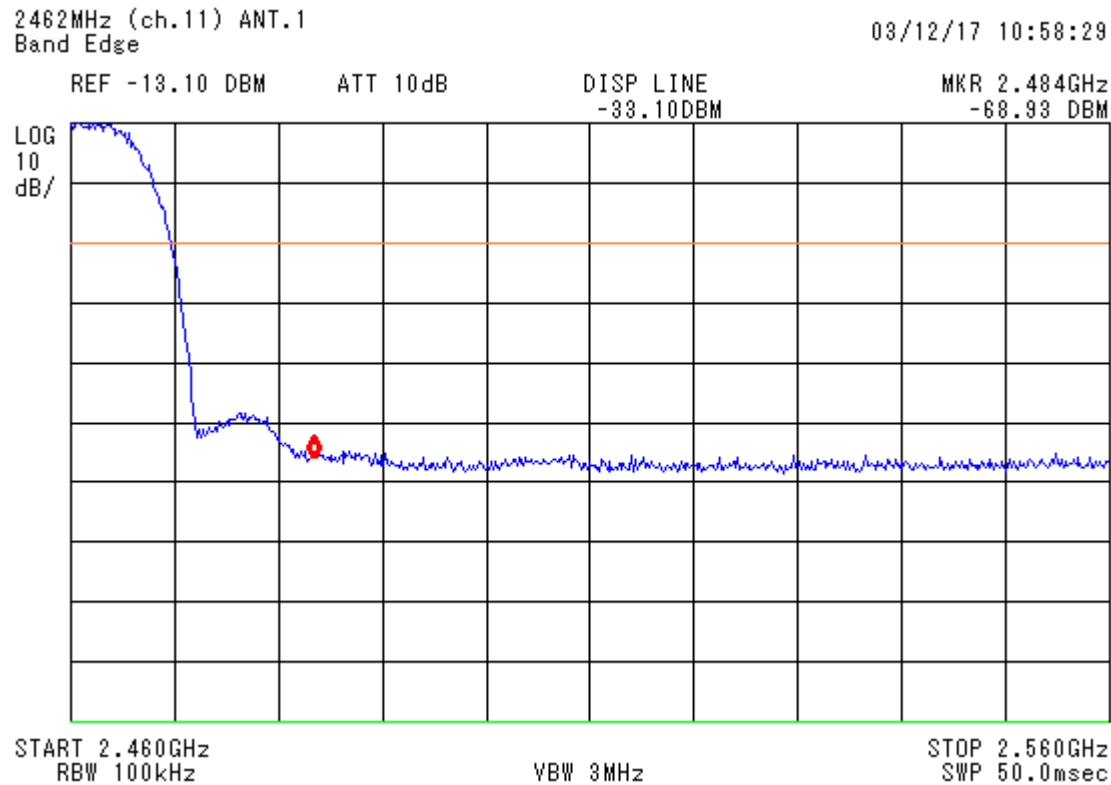


figure 15 Band Edge High frequency side _0a

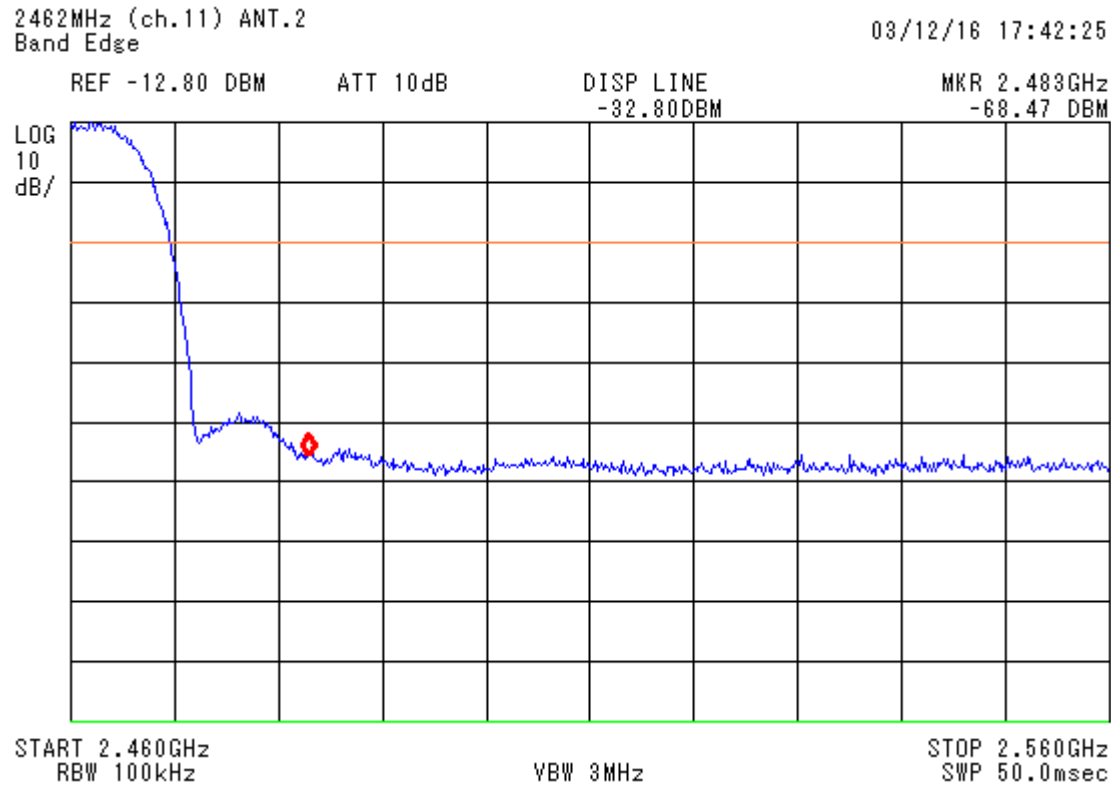


figure 16 Band Edge High frequency side _4a

7. SPURIOUS RF CONDUCTED EMISSION MEASUREMENT (§ 15.247 (c))

7.1. Test Procedure

(1)	Connect the EUT RF output port to the spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary).
(2)	Activates the EUT System and executes the software prepared for test, if necessary.
(3)	The Spectrums are scanned from the lowest generated frequency of EUT up to the 10th harmonics by using the spectrum analyzer (*1).
[Note]	
(*1)	Spectrum Analyzer Set Up Conditions
	Resolution bandwidth : 100 kHz
	Video bandwidth : $\geq$ RBW
	Sweep : Auto
	Detector function : Peak detector
	Trance : Max Hold

7.2. Test Results

(1) ANT 1 (0a)

Measured Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Spurious [dBm]	Separation From Carrier [dBc]	Margin for Limit [dBc]
[Fc =2412MHz, Carrier Power : 15.4dBm]					
2038.00	21.0	-63.4	-42.4	57.8	20.0
4824.00	22.0	<-70.0	<-48.0	>63.4	20.0
9648.00	24.4	<-70.0	<-45.6	>61.0	20.0
[Fc =2437MHz, Carrier Power : 15.6dBm]					
2063.00	21.0	-63.0	-42.0	57.6	20.0
4874.00	22.0	<-70.0	<-48.0	>63.6	20.0
9747.00	22.4	<-70.0	<-47.6	>63.2	20.0
[Fc =2437MHz, Carrier Power : 15.8dBm]					
2088.00	21.0	-64.2	-43.2	59.0	20.0
4924.00	22.0	<-70.0	<-48.0	>63.8	20.0
9848.00	22.4	<-70.0	<-47.6	>63.4	20.0

(2) ANT 2 (4a)

Measured Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Spurious [dBm]	Separation From Carrier [dBc]	Margin for Limit [dBc]
[Fc =2412MHz, Carrier Power : 15.7dBm]					
2038.00	21.0	-62.7	-41.7	57.4	20.0
4824.00	22.0	<-70.0	<-48.0	>63.7	20.0
9648.00	24.4	<-70.0	<-45.6	>61.3	20.0
[Fc =2437MHz, Carrier Power : 15.9dBm]					
2063.00	21.0	-62.4	-41.4	57.3	20.0
4874.00	22.0	<-70.0	<-48.0	>63.9	20.0
9747.00	22.4	<-70.0	<-47.6	>63.5	20.0
[Fc =2437MHz, Carrier Power : 16.0dBm]					
2088.00	21.0	-64.0	-43.0	59.0	20.0
4924.00	22.0	<-70.0	<-48.0	>64.0	20.0
9848.00	22.4	<-70.0	<-47.6	>63.6	20.0

- Continued -

[Note]	
(1) No other spurious emission found above noise level.	
(2) Correction factor includes both of a cable loss and attenuator loss.	
(3) See next page figure 17 to 22.	
[Calculation method]	
Spurious RF Emission (dBm) = Meter Reading (dBm) + Correction Factor (dB)	
Deviation From Carreier (dBc) = Spurious RF Emission (dBm) – Perk Output Power (dBm)	
[EUT Condition]	
EUT operation	: Data transmission
EUT channel	: 1, 6, 11 (2412, 2437, 2462 MHz)

[Environment]

Temperature	21°C	Humidity	43% (16 December 2003)
Temperature	23°C	Humidity	45% (17 December 2003)

[Tested Date / Tester]

16 December 2003

17 December 2003

Signature



Ikuya Minematsu

Spectrum

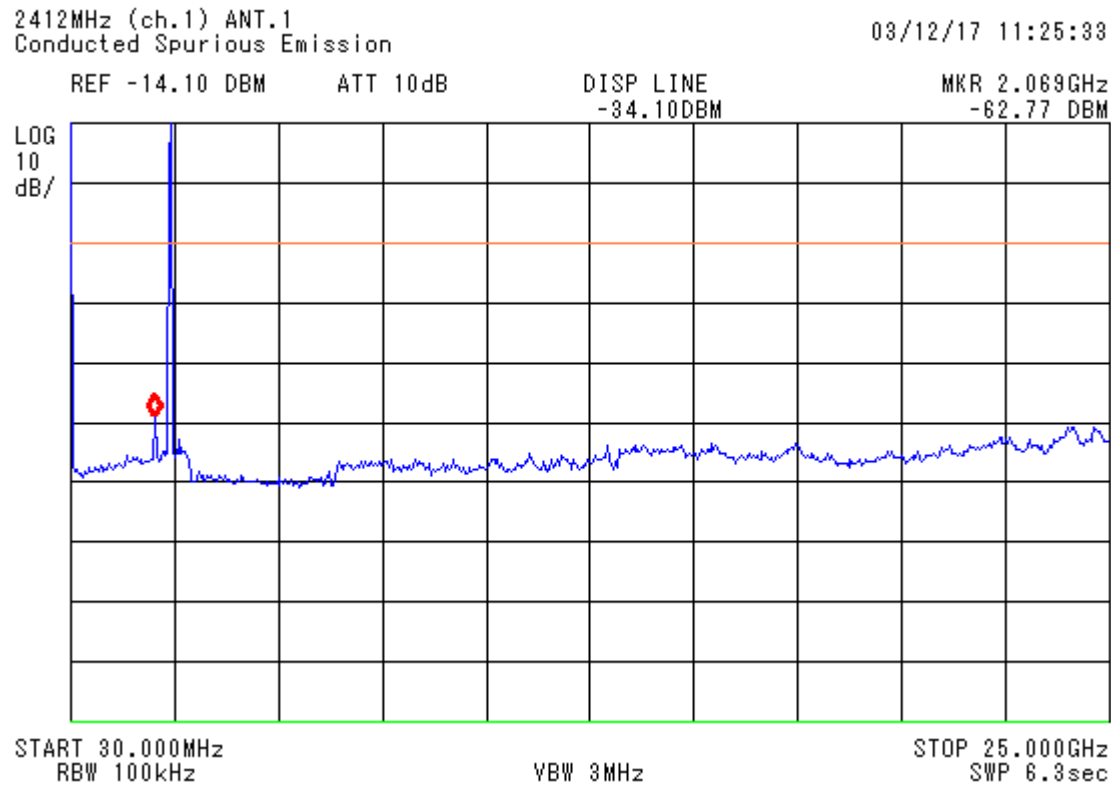


figure 17 Spurious RF conducted emission, Tx on 2412 MHz_0a

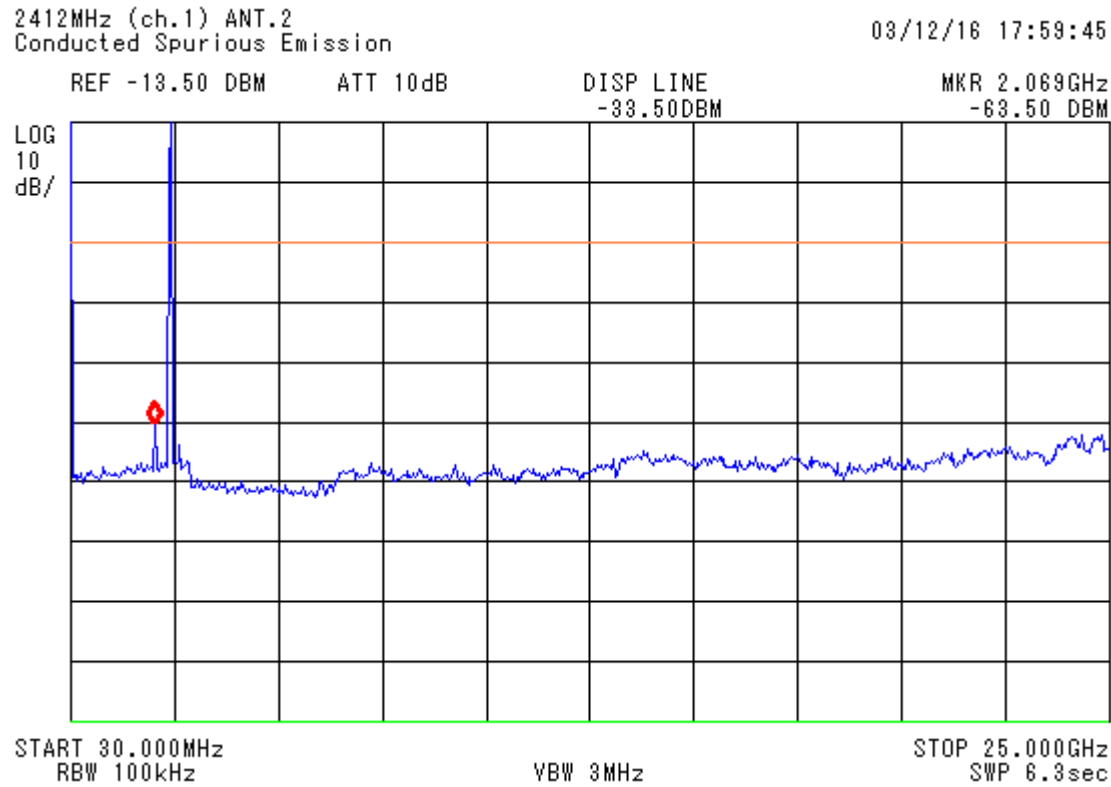


figure 18 Spurious RF conducted emission, Tx on 2412 MHz_4a

- Continued -

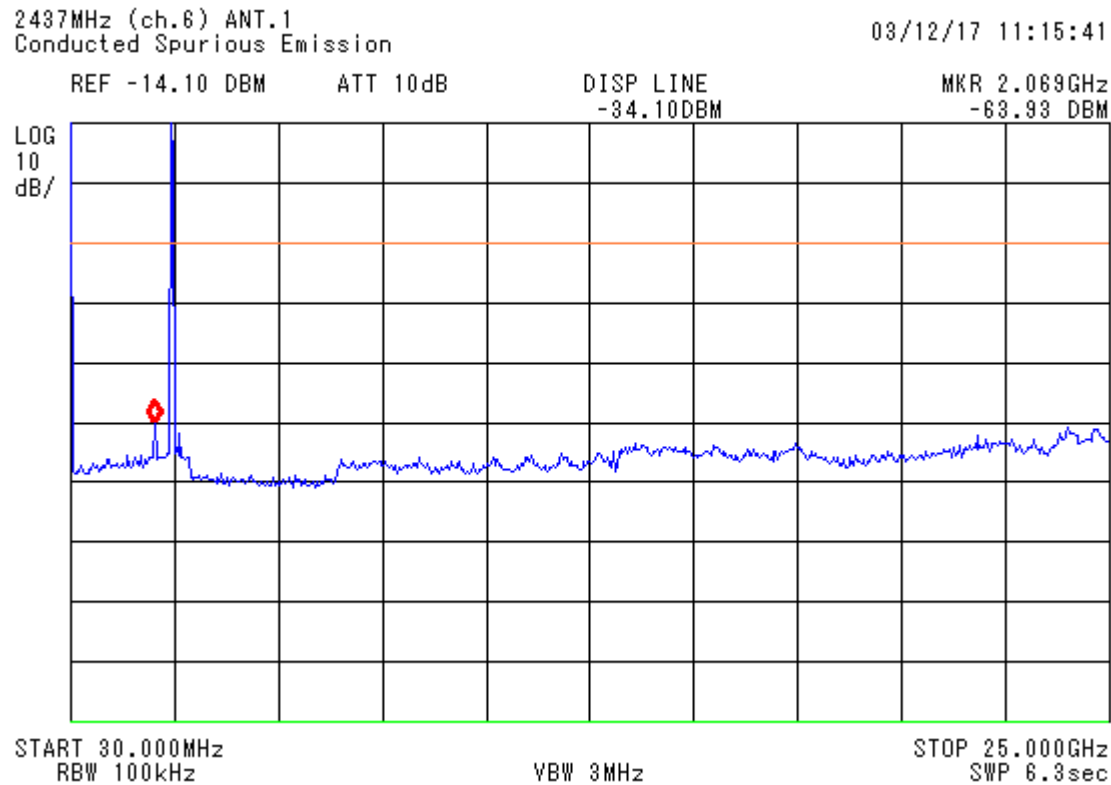


figure 19 Spurious RF conducted emission, Tx on 2437 MHz_0a

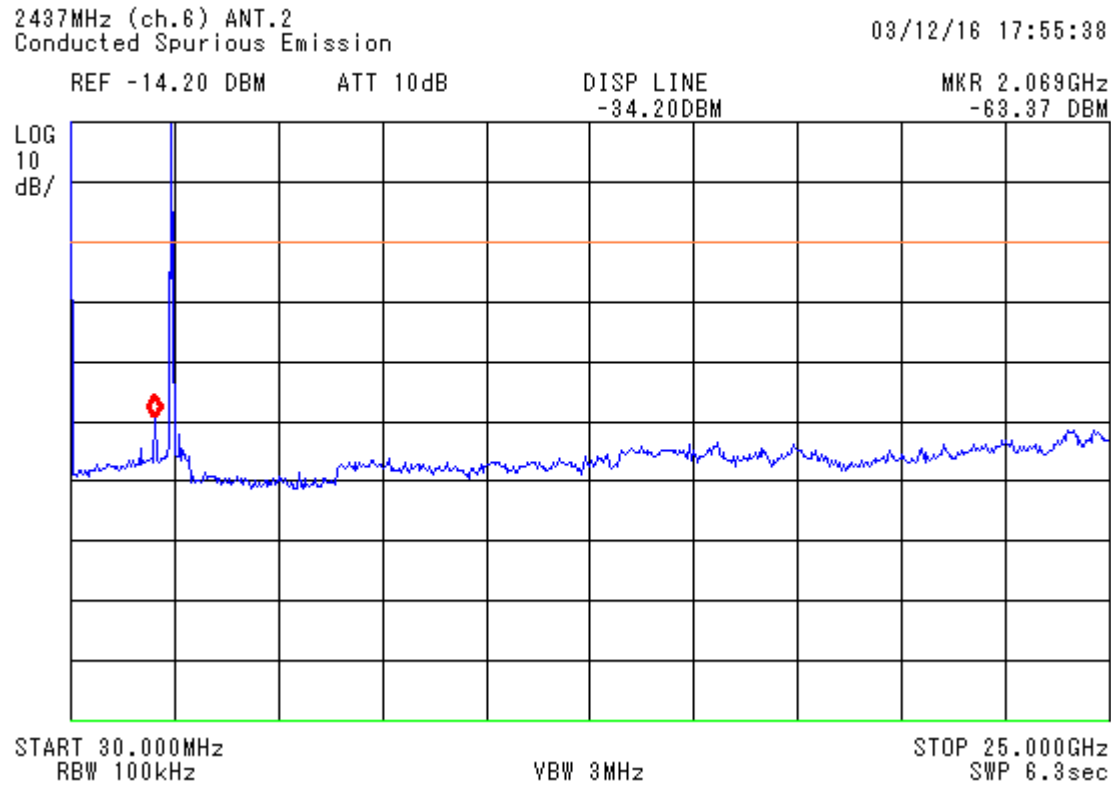


figure 20 Spurious RF conducted emission, Tx on 2437 MHz_4a

- Continued -

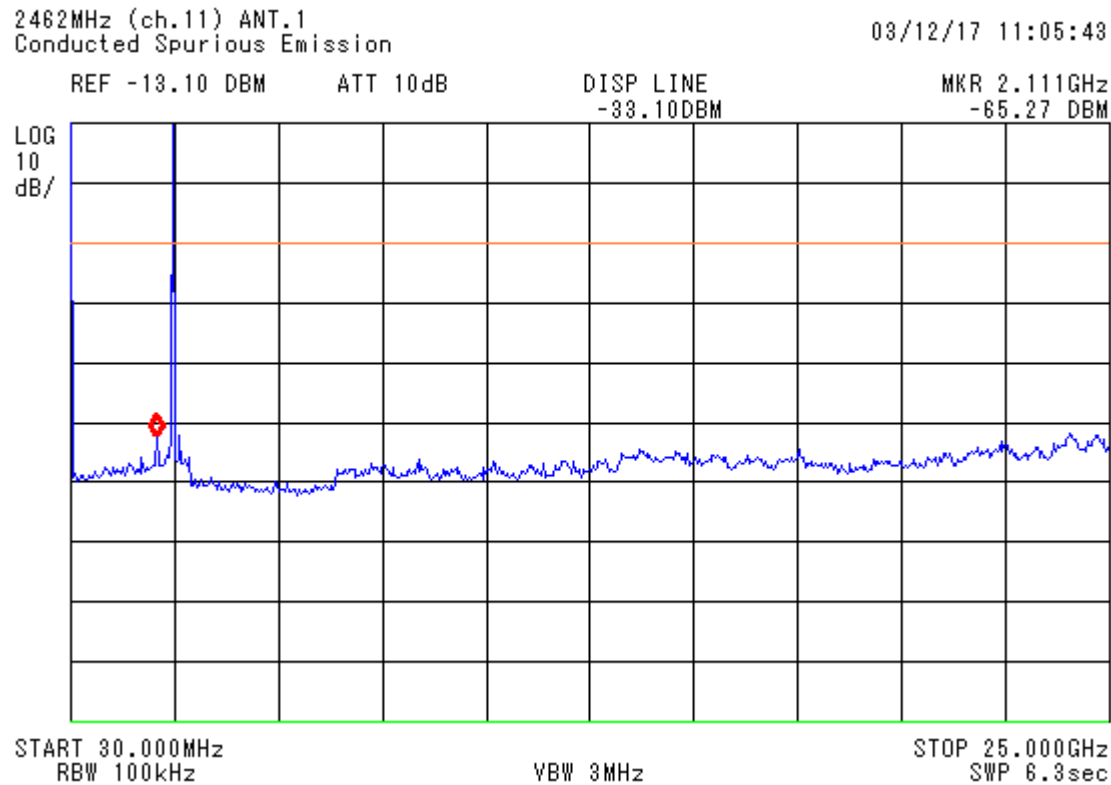


figure 21 Spurious RF conducted emission, Tx on 2462 MHz_0a

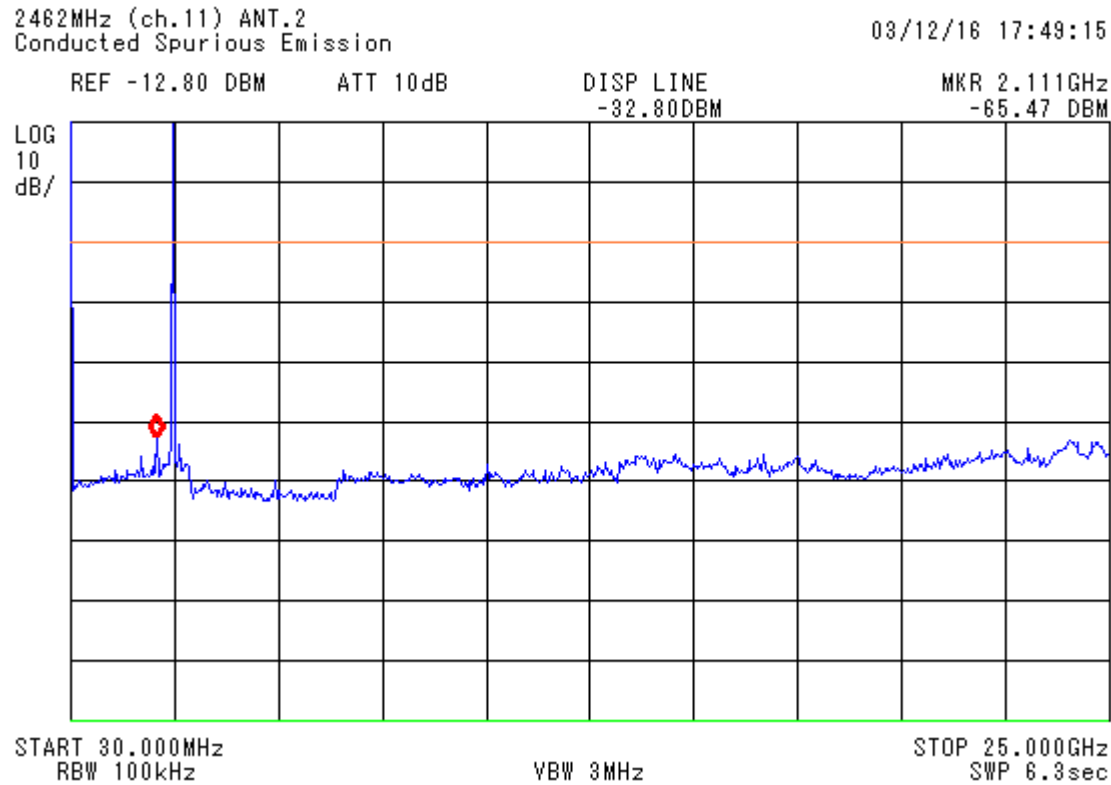


figure 22 Spurious RF conducted emission, Tx on 2462 MHz_4a

8. PEAK POWER DENSITY MEASUREMENT (§ 15.247 (d))

8.1. Test procedure

(1)	Connect the EUT RF output port to spectrum analyzer via calibrated coaxial cable and suitable attenuator (if necessary).
(2)	Activates the EUT System and executes the software prepared for test, if necessary.
(3)	To find out the worst case, the transmitting data rate of EUT is varied with the different modes of operation. The final test condition is recorded in this report.
(4)	The spectrums are scanned and allow the trace to stabilize.
(5)	The peak output power was determined by using the marker-data function of spectrum analyzer (*1).
[Note]	
(*1)	Spectrum Analyzer Set Up Conditions
	Frequency Span : 2 MHz
	Resolution bandwidth : 3 kHz
	Video bandwidth : $\geq$ RBW
	Sweep time : Span / RBW = more than 666 sec
	Detector function : Peak
	Trace Mode : Max Hold

8.2. Test Results

(1) ANT 1 (0a)

Measured Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm/3kHz]	Peak Power Density [dBm]	Limit [dBm]	Margin for Limit [dB]
2412	21.7	-27.1	-5.4	8.0	13.4
2437	21.8	-27.1	-5.3	8.0	13.3
2462	21.8	-26.1	-4.3	8.0	12.3

(2) ANT 2 (4a)

Measured Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm/3kHz]	Peak Power Density [dBm]	Limit [dBm]	Margin for Limit [dB]
2412	21.7	-26.3	-4.6	8.0	12.6
2437	21.8	-27.3	-5.5	8.0	13.5
2462	21.8	-27.0	-5.2	8.0	13.2

[Note]

(1) Correction factor includes both of a cable loss and attenuator loss.

(2) See next page figure 23 to 28.

[Calculation method]

Power Density [dBm/3kHz] = Meter Reading (dBm) + Correction Factor (dB)

[EUT Condition]

EUT operation : Data transmission

EUT channel : 1, 6, 11 (2412, 2437, 2462 MHz)

[Environment]

Temperature 21°C

Humidity 43% (16 December 2003)

Temperature 23°C

Humidity 45% (17 December 2003)

[Tested Date / Tester]

16 December 2003

17 December 2003

Signature



Ikuya Minematsu

Spectrum

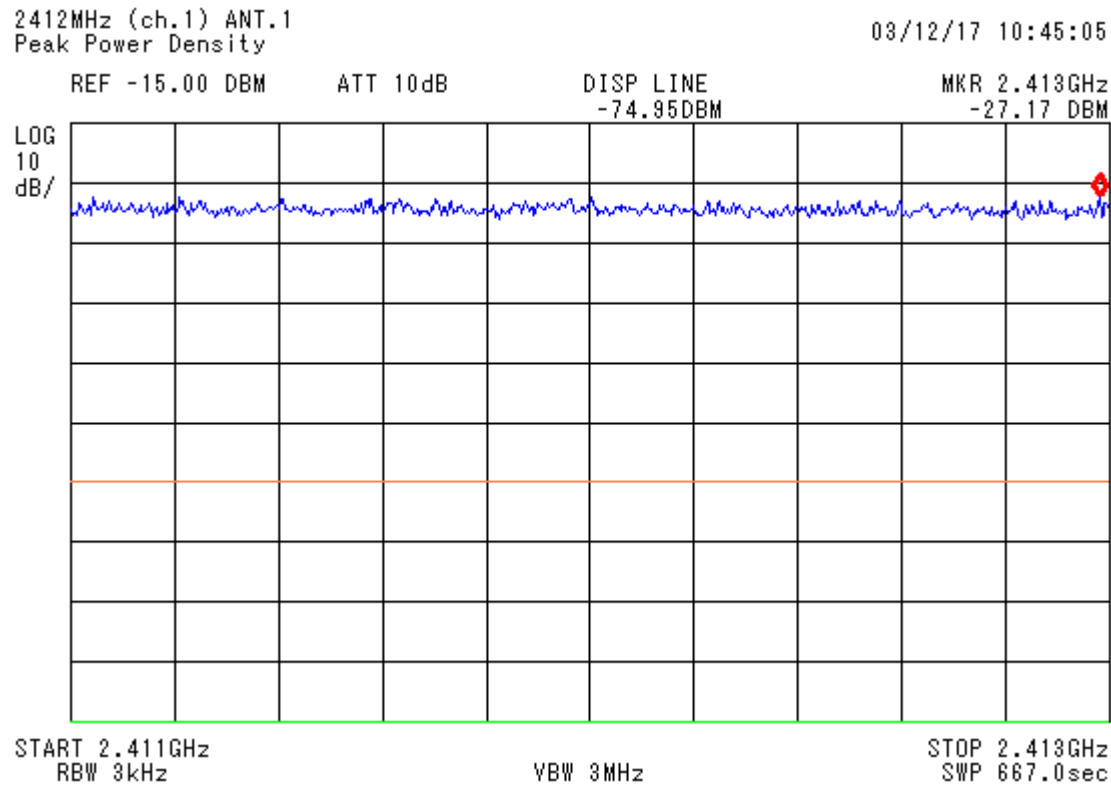


figure 23 Power Density, Tx on channel 1_0a

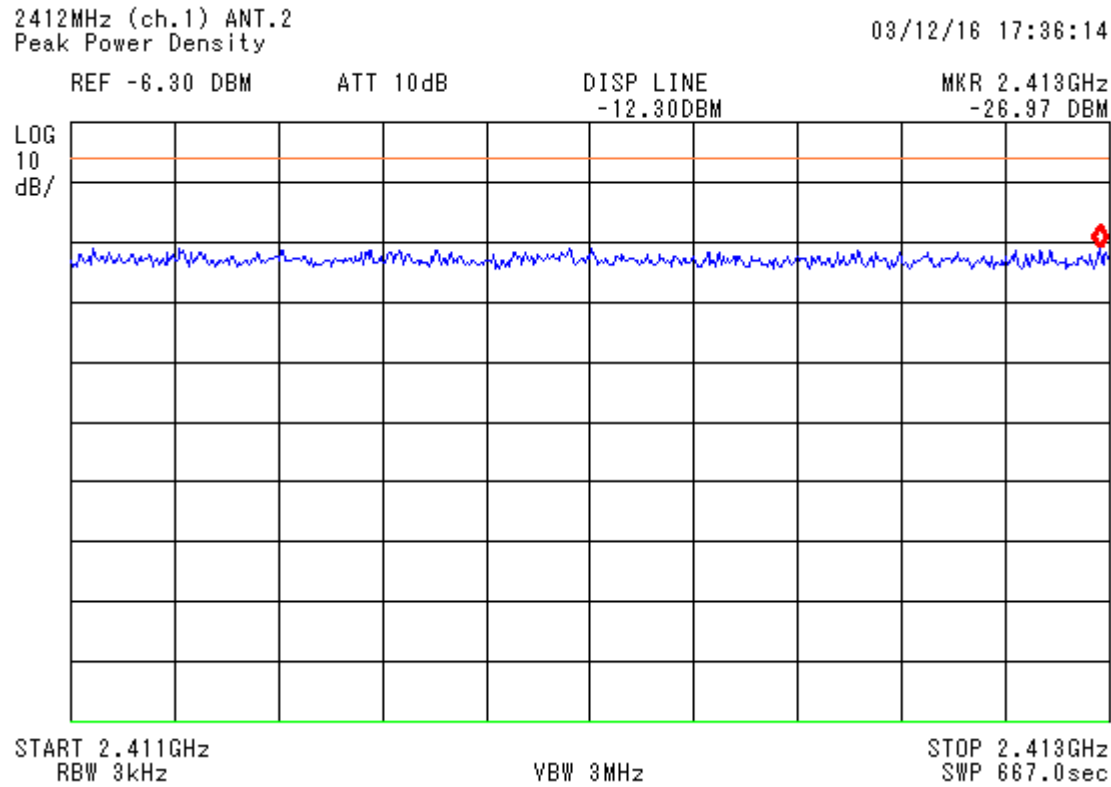


figure 24 Power Density, Tx on channel 1_4a

- Continued -

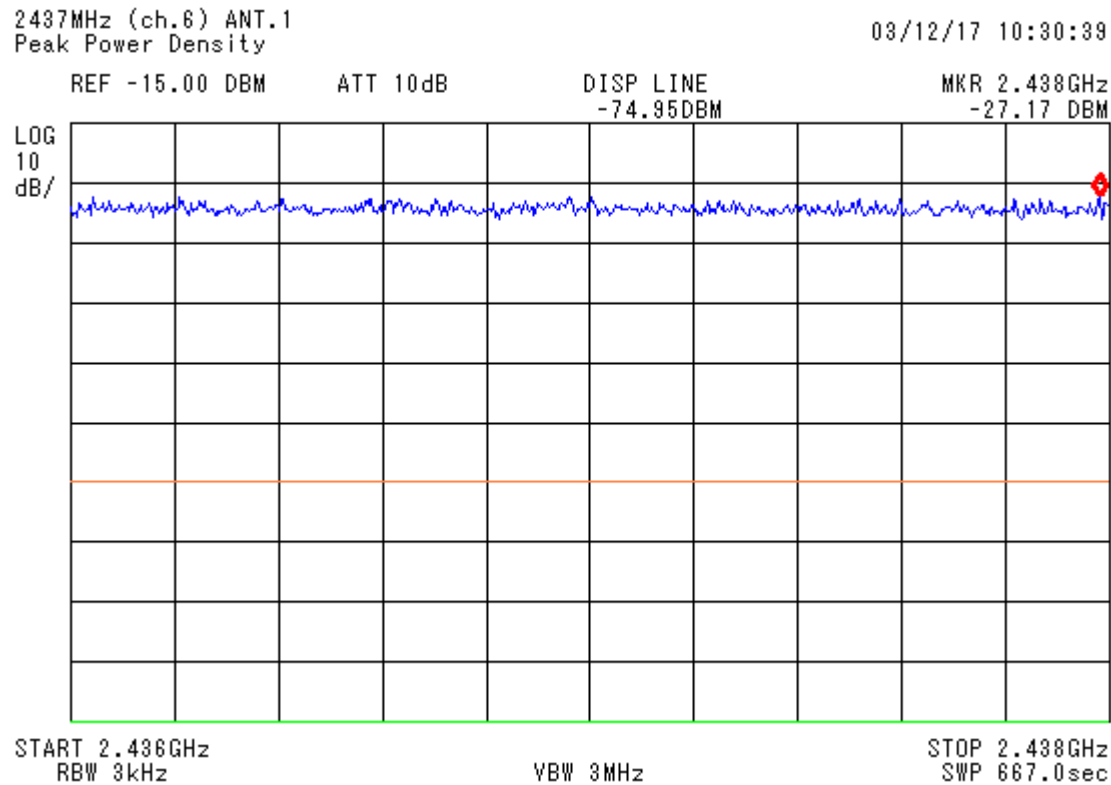


figure 25 Power Density, Tx on channel 6_0a

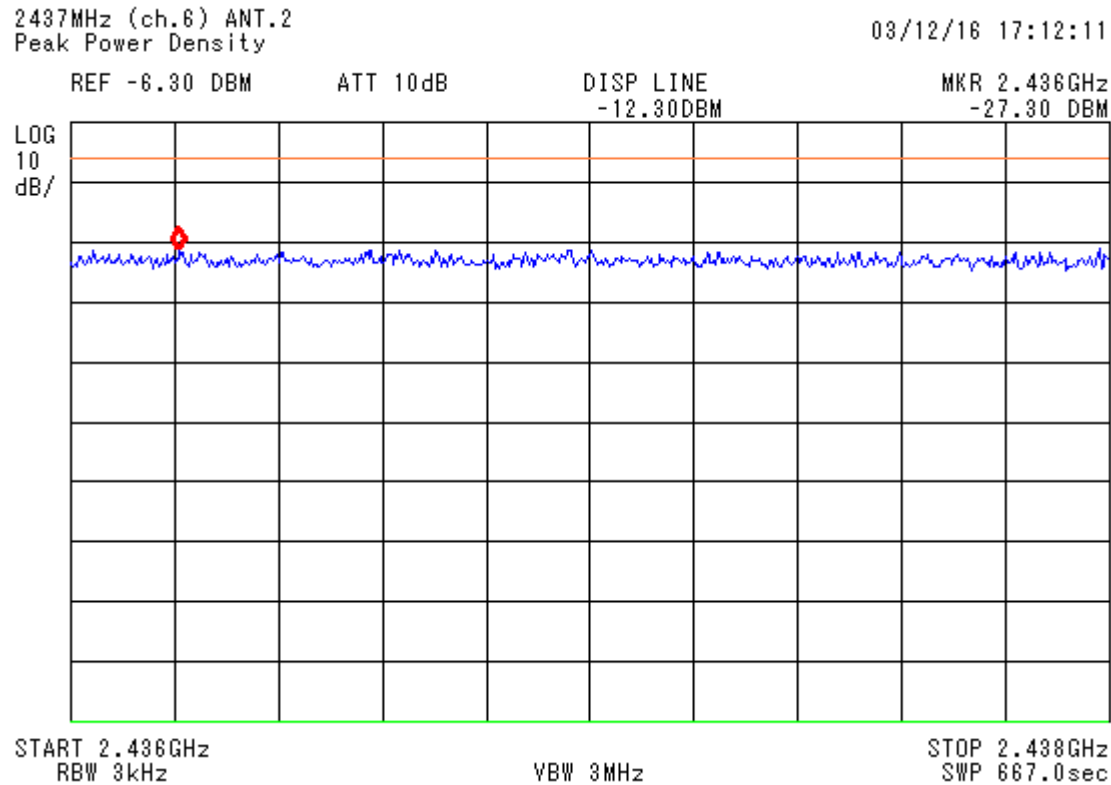


figure 26 Power Density, Tx on channel 6_4a

- Continued -

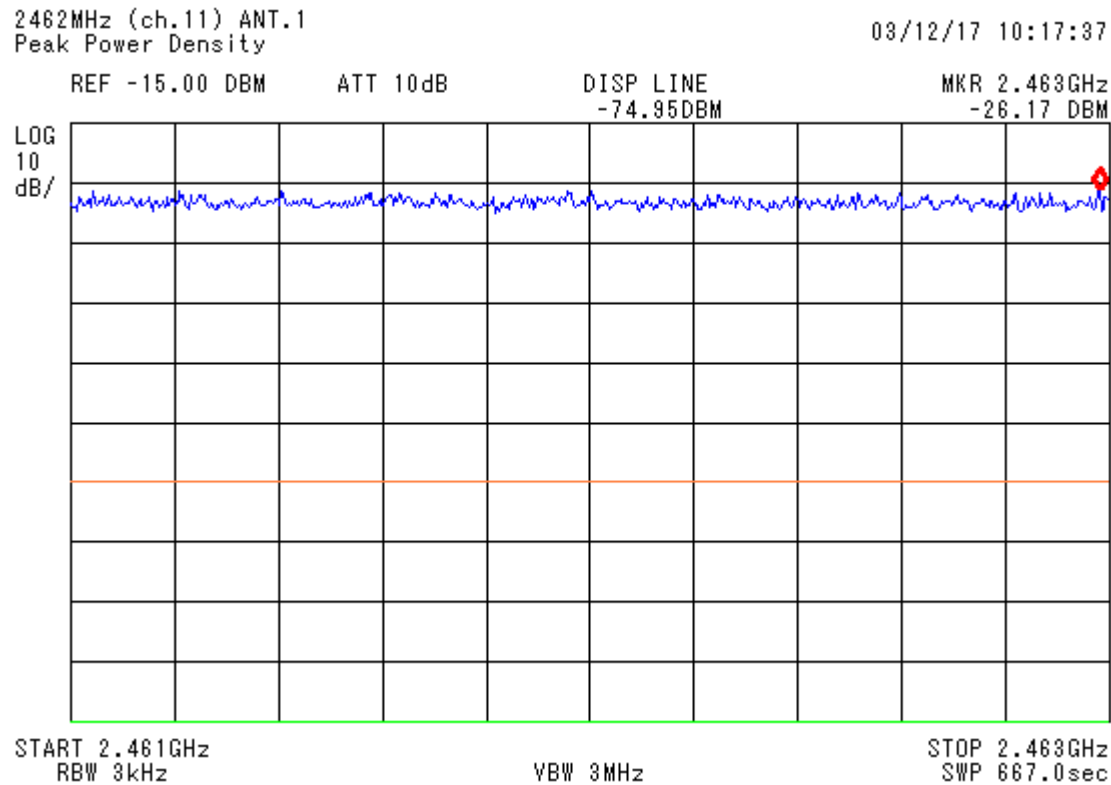


figure 27 Power Density, Tx on channel 11_0a

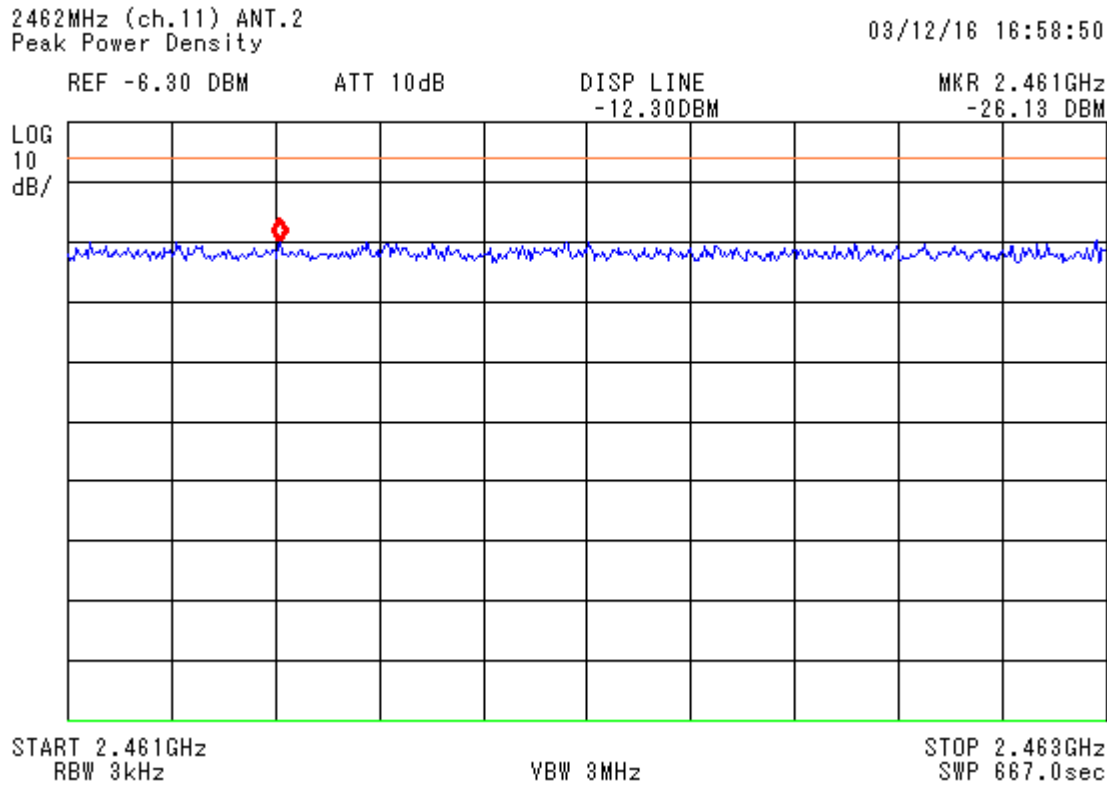


figure 28 Power Density, Tx on channel 11_4a

9. RADIATED EMISSION MEASUREMENT (§ 15.247 (c)), (§ 15.209 (a))

9.1. Test Procedure

(1)	Configure the EUT System in accordance with ANSI C63.4-1992 section 8. ☒ : without deviation, ☐ : with deviation (details are found below) See also the block diagram and the photographs of EUT System configuration in this report.
(2)	If the EUT system is connected to a public power network, all power cords for the EUT System are connected the receptacle on the turntable.
(3)	Warm up the EUT System.
(4)	Activate the EUT System and run the prepared software for the test, if necessary.
(5)	Preliminary Measurement. To find out the emissions of the EUT System, preliminary radiated measurement are performed at a closer distance than that specified for final radiated measurement using the spectrum analyzer (*1) with pre-amplifier and the broad band antenna. In the frequency above 1 GHz, it is performed using the spectrum analyzer (*2) and the horn antenna.
(6)	To find out an EUT System condition, which produces the maximum emission, the configuration of EUT System, the position of the cables, and the operation mode, are changed under normal usage of the EUT.
(7)	The spectrums are scanned from 30 MHz to the upper frequency of measurement range with rotated the turn table from 0 to 360 degree, and collect the six highest emissions minimum on the spectrum analyzer relative to the limits in the whole range.
(8)	Final Measurement. The EUT is operated in the worst case condition where maximum emission is detected by the preliminary test. The six highest emissions minimum, recorded above, are measured at the specified distance using the broad band antenna or the tuned dipole antenna and the test receiver (*3). In the frequency above 1 GHz, the measurements are performed by the horn antenna and ☐ the test receiver (*4). ☒ the spectrum analyzer (*2) or (*5) with pre-amplifier.
(9)	So that maximum field strength, the turntable azimuth and receiving antenna are adjusted the position.
[Note]	
(*1)	Spectrum Analyzer Set Up Conditions Frequency range : 30 - 1000 MHz Resolution bandwidth : 100 kHz Detector function : Peak mode
(*2)	Spectrum Analyzer Set Up Conditions (Peak detector Measurement) Frequency range : 1 GHz - Upper frequency of measurement range Resolution bandwidth : 1 MHz Video bandwidth : 1 MHz Attenuator : 10 dB Detector function : Peak mode
(*3)	Test Receiver Set Up Conditions Detector function : Quasi-Peak IF bandwidth : 120 kHz The test receiver is complied with the specification of CISPR Publication 16.
(*4)	Test Receiver Set Up Conditions Detector function : Average IF bandwidth : 1 MHz
(*5)	Spectrum Analyzer Set Up Conditions (Average detector Measurement) Frequency range : 1 GHz - Upper frequency of measurement range Resolution bandwidth : 1 MHz Video bandwidth : 10 Hz or 30 Hz Attenuator : 10 dB Y axis : Liner

9.2. Test Results

(1) In the frequency range : above 1 GHz

1) Harmonics

a. Horizontally Place

Measurement Distance ☒: 3m ☐: 10m

Fc = 2412 MHz (Ch.01) Transmitting operation ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2412.00	25.4	82.3	78.0	107.7	-	-
4824.00	-2.2	47.5	49.0	46.8	74.0	27.2
7236.00	-1.2	46.5	46.0	45.3	74.0	28.7
9648.00	2.5	<43.0	<43.0	<45.5	74.0	>28.5
12060.00	6.4	<45.0	<45.0	<51.4	74.0	>22.6
14472.00	8.4	<45.0	<45.0	<53.4	74.0	>20.6
16884.00	9.7	<44.0	<44.0	<53.7	74.0	>20.3
19296.00	5.0	<43.0	<43.0	<48.0	74.0	>26.0
21708.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24120.00	6.6	<46.0	<46.0	<52.6	74.0	>21.4
[Average Detector Measurement] (*1)						
4824.00	-2.2	35.4	36.4	34.2	54.0	19.8
7236.00	-1.2	34.8	34.7	33.6	55.0	21.4
9648.00	2.5	<33.0	<33.0	<35.5	54.0	>18.5
12060.00	6.4	<35.0	<35.0	<41.4	54.0	>12.6
14472.00	8.4	<35.0	<35.0	<43.4	54.0	>10.6
16884.00	9.7	<33.0	<33.0	<42.7	54.0	>11.3
19296.00	5.0	<33.0	<33.0	<38.0	54.0	>16.0
21708.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24120.00	6.6	<36.0	<36.0	<42.6	54.0	>11.4

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2437 MHz (Ch.06) Transmitting operation ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2437.00	25.4	82.5	80.1	107.9	-	-
4874.00	-2.2	47.6	48.0	45.8	74.0	28.2
7311.00	-1.1	46.8	46.2	45.7	74.0	28.3
9748.00	2.6	<43.0	<43.0	<45.6	74.0	>28.4
12185.00	6.6	<45.0	<45.0	<51.6	74.0	>22.4
14622.00	8.3	<45.0	<45.0	<53.3	74.0	>20.7
17059.00	10.1	<44.0	<44.0	<54.1	74.0	>19.9
19496.00	5.1	<43.0	<43.0	<48.1	74.0	>25.9
21933.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24370.00	6.5	<46.0	<46.0	<52.5	74.0	>21.5
[Average Detector Measurement] (*1)						
4874.00	-2.2	35.2	35.4	33.2	54.0	20.8
7311.00	-1.1	35.0	34.9	33.9	55.0	21.1
9748.00	2.6	<33.0	<33.0	<35.6	54.0	>18.4
12185.00	6.6	<35.0	<35.0	<41.6	54.0	>12.4
14622.00	8.3	<35.0	<35.0	<43.3	54.0	>10.7
17059.00	10.1	<33.0	<33.0	<43.1	54.0	>10.9
19496.00	5.1	<33.0	<33.0	<38.1	54.0	>15.9
21933.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24370.00	6.5	<36.0	<36.0	<42.5	54.0	>11.5

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2462 MHz (ch.11) Transmitting operation ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2462.00	25.4	84.6	80.5	110.0	-	-
4924.00	-2.2	48.0	49.4	47.2	74.0	26.8
7386.00	-1.0	47.8	47.3	46.8	74.0	27.2
9848.00	2.7	<43.0	<43.0	<45.7	74.0	>28.3
12310.00	6.8	<45.0	<45.0	<51.8	74.0	>22.2
14772.00	8.3	<45.0	<45.0	<53.3	74.0	>20.7
17234.00	10.3	<44.0	<44.0	<54.3	74.0	>19.7
19696.00	5.1	<43.0	<43.0	<48.1	74.0	>25.9
22158.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24620.00	6.3	<46.0	<46.0	<52.3	74.0	>21.7
[Average Detector Measurement] (*1)						
4924.00	-2.2	35.5	37.2	35.0	54.0	19.0
7386.00	-1.0	35.5	35.4	34.5	54.0	19.5
9848.00	2.7	<33.0	<33.0	<35.7	54.0	>18.3
12310.00	6.8	<35.0	<35.0	<41.8	54.0	>12.2
14772.00	8.3	<35.0	<35.0	<43.3	54.0	>10.7
17234.00	10.3	<33.0	<33.0	<43.3	54.0	>10.7
19696.00	5.1	<33.0	<33.0	<38.1	54.0	>15.9
22158.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24620.00	6.3	<36.0	<36.0	<42.3	54.0	>11.7

- Continued -

a. Horizontally Place

Measurement Distance ☒: 3m ☐: 10m

Fc = 2412 MHz (Ch.01) Transmitting operation ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2412.00	25.4	81.5	80.5	106.9	-	-
4824.00	-2.2	45.6	46.1	43.9	74.0	30.1
7236.00	-1.2	45.8	46.2	45.0	74.0	29.0
9648.00	2.5	<43.0	<43.0	<45.5	74.0	>28.5
12060.00	6.4	<45.0	<45.0	<51.4	74.0	>22.6
14472.00	8.4	<45.0	<45.0	<53.4	74.0	>20.6
16884.00	9.7	<44.0	<44.0	<53.7	74.0	>20.3
19296.00	5.0	<43.0	<43.0	<48.0	74.0	>26.0
21708.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24120.00	6.6	<46.0	<46.0	<52.6	74.0	>21.4
[Average Detector Measurement] (*1)						
4824.00	-2.2	33.8	34.0	31.8	54.0	22.2
7236.00	-1.2	34.5	35.2	34.0	55.0	21.0
9648.00	2.5	<33.0	<33.0	<35.5	54.0	>18.5
12060.00	6.4	<35.0	<35.0	<41.4	54.0	>12.6
14472.00	8.4	<35.0	<35.0	<43.4	54.0	>10.6
16884.00	9.7	<33.0	<33.0	<42.7	54.0	>11.3
19296.00	5.0	<33.0	<33.0	<38.0	54.0	>16.0
21708.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24120.00	6.6	<36.0	<36.0	<42.6	54.0	>11.4

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2437 MHz (Ch.06) Transmitting operation ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2437.00	25.4	82.4	79.6	107.8	-	-
4874.00	-2.2	47.0	48.4	46.2	74.0	27.8
7311.00	-1.1	47.2	48.1	47.0	74.0	27.0
9748.00	2.6	<43.0	<43.0	<45.6	74.0	>28.4
12185.00	6.6	<45.0	<45.0	<51.6	74.0	>22.4
14622.00	8.3	<45.0	<45.0	<53.3	74.0	>20.7
17059.00	10.1	<44.0	<44.0	<54.1	74.0	>19.9
19496.00	5.1	<43.0	<43.0	<48.1	74.0	>25.9
21933.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24370.00	6.5	<46.0	<46.0	<52.5	74.0	>21.5
[Average Detector Measurement] (*1)						
4874.00	-2.2	34.8	35.0	32.8	54.0	21.2
7311.00	-1.1	36.1	37.1	36.0	55.0	19.0
9748.00	2.6	<33.0	<33.0	<35.6	54.0	>18.4
12185.00	6.6	<35.0	<35.0	<41.6	54.0	>12.4
14622.00	8.3	<35.0	<35.0	<43.3	54.0	>10.7
17059.00	10.1	<33.0	<33.0	<43.1	54.0	>10.9
19496.00	5.1	<33.0	<33.0	<38.1	54.0	>15.9
21933.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24370.00	6.5	<36.0	<36.0	<42.5	54.0	>11.5

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2462 MHz (ch.11) Transmitting operation ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2462.00	25.4	83.4	80.5	108.8	-	-
4924.00	-2.2	48.0	49.6	47.4	74.0	26.6
7386.00	-1.0	48.2	49.3	48.3	74.0	25.7
9848.00	2.7	<43.0	<43.0	<45.7	74.0	>28.3
12310.00	6.8	<45.0	<45.0	<51.8	74.0	>22.2
14772.00	8.3	<45.0	<45.0	<53.3	74.0	>20.7
17234.00	10.3	<44.0	<44.0	<54.3	74.0	>19.7
19696.00	5.1	<43.0	<43.0	<48.1	74.0	>25.9
22158.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24620.00	6.3	<46.0	<46.0	<52.3	74.0	>21.7
[Average Detector Measurement] (*1)						
4924.00	-2.2	35.4	38.0	35.8	54.0	18.2
7386.00	-1.0	36.2	37.0	36.0	54.0	18.0
9848.00	2.7	<33.0	<33.0	<35.7	54.0	>18.3
12310.00	6.8	<35.0	<35.0	<41.8	54.0	>12.2
14772.00	8.3	<35.0	<35.0	<43.3	54.0	>10.7
17234.00	10.3	<33.0	<33.0	<43.3	54.0	>10.7
19696.00	5.1	<33.0	<33.0	<38.1	54.0	>15.9
22158.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24620.00	6.3	<36.0	<36.0	<42.3	54.0	>11.7

- Continued -

b.Vertically Place

Measurement Distance ☒: 3m ☐: 10m

Fc = 2412 MHz (Ch.01) Transmitting operation ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2412.00	25.4	83.7	81.4	109.1	-	-
4824.00	-2.2	49.1	52.2	50.0	74.0	24.0
7236.00	-1.2	48.3	49.0	47.8	74.0	26.2
9648.00	2.5	<43.0	<43.0	<45.5	74.0	>28.5
12060.00	6.4	<45.0	<45.0	<51.4	74.0	>22.6
14472.00	8.4	<45.0	<45.0	<53.4	74.0	>20.6
16884.00	9.7	<44.0	<44.0	<53.7	74.0	>20.3
19296.00	5.0	<43.0	<43.0	<48.0	74.0	>26.0
21708.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24120.00	6.6	<46.0	<46.0	<52.6	74.0	>21.4
[Average Detector Measurement] (*1)						
4824.00	-2.2	37.2	40.1	37.9	54.0	16.1
7236.00	-1.2	37.1	37.4	36.2	55.0	18.8
9648.00	2.5	<33.0	<33.0	<35.5	54.0	>18.5
12060.00	6.4	<35.0	<35.0	<41.4	54.0	>12.6
14472.00	8.4	<35.0	<35.0	<43.4	54.0	>10.6
16884.00	9.7	<34.0	<34.0	<43.7	54.0	>10.3
19296.00	5.0	<33.0	<33.0	<38.0	54.0	>16.0
21708.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24120.00	6.6	<36.0	<36.0	<42.6	54.0	>11.4

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2437 MHz (Ch.06) Transmitting operation ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2437.00	25.4	84.0	82.5	109.4	-	-
4874.00	-2.2	51.4	54.2	52.0	74.0	22.0
7311.00	-1.1	49.7	51.5	50.4	74.0	23.6
9748.00	2.6	<43.0	<43.0	<45.6	74.0	>28.4
12185.00	6.6	<45.0	<45.0	<51.6	74.0	>22.4
14622.00	8.3	<45.0	<45.0	<53.3	74.0	>20.7
17059.00	10.1	<44.0	<44.0	<54.1	74.0	>19.9
19496.00	5.1	<43.0	<43.0	<48.1	74.0	>25.9
21933.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24370.00	6.5	<46.0	<46.0	<52.5	74.0	>21.5
[Average Detector Measurement] (*1)						
4874.00	-2.2	39.4	42.0	39.8	54.0	14.2
7311.00	-1.1	38.3	39.5	38.4	55.0	16.6
9748.00	2.6	<33.0	<33.0	<35.6	54.0	>18.4
12185.00	6.6	<35.0	<35.0	<41.6	54.0	>12.4
14622.00	8.3	<35.0	<35.0	<43.3	54.0	>10.7
17059.00	10.1	<34.0	<34.0	<44.1	54.0	>9.9
19496.00	5.1	<33.0	<33.0	<38.1	54.0	>15.9
21933.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24370.00	6.5	<36.0	<36.0	<42.5	54.0	>11.5

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2462 MHz (ch.11) Transmitting operation ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2462.00	25.4	85.4	83.5	110.8	-	-
4924.00	-2.2	53.6	56.4	54.2	74.0	19.8
7386.00	-1.0	50.7	53.3	52.3	74.0	21.7
9848.00	2.7	48.2	<43.0	50.9	74.0	23.1
12310.00	6.8	<45.0	<45.0	<51.8	74.0	>22.2
14772.00	8.3	<45.0	<45.0	<53.3	74.0	>20.7
17234.00	10.3	<44.0	<44.0	<54.3	74.0	>19.7
19696.00	5.1	<43.0	<43.0	<48.1	74.0	>25.9
22158.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24620.00	6.3	<46.0	<46.0	<52.3	74.0	>21.7
[Average Detector Measurement] (*1)						
4924.00	-2.2	42.2	44.9	42.7	54.0	11.3
7386.00	-1.0	40.1	42.4	41.4	54.0	12.6
9848.00	2.7	38.9	<33.0	41.6	54.0	12.4
12310.00	6.8	<35.0	<35.0	<41.8	54.0	>12.2
14772.00	8.3	<35.0	<35.0	<43.3	54.0	>10.7
17234.00	10.3	<34.0	<34.0	<44.3	54.0	>9.7
19696.00	5.1	<33.0	<33.0	<38.1	54.0	>15.9
22158.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24620.00	6.3	<36.0	<36.0	<42.3	54.0	>11.7

- Continued -

b. Vertically Place

Measurement Distance ☒: 3m ☐: 10m

Fc = 2412 MHz (Ch.01) Transmitting operation ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2412.00	25.4	81.8	76.3	107.2	-	-
4824.00	-2.2	50.9	52.6	50.4	74.0	23.6
7236.00	-1.2	46.4	49.4	48.2	74.0	25.8
9648.00	2.5	<43.0	<43.0	<45.5	74.0	>28.5
12060.00	6.4	<45.0	<45.0	<51.4	74.0	>22.6
14472.00	8.4	<45.0	<45.0	<53.4	74.0	>20.6
16884.00	9.7	<44.0	<44.0	<53.7	74.0	>20.3
19296.00	5.0	<43.0	<43.0	<48.0	74.0	>26.0
21708.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24120.00	6.6	<46.0	<46.0	<52.6	74.0	>21.4
[Average Detector Measurement] (*1)						
4824.00	-2.2	38.9	40.5	38.3	54.0	15.7
7236.00	-1.2	35.0	38.3	37.1	55.0	17.9
9648.00	2.5	<33.0	<33.0	<35.5	54.0	>18.5
12060.00	6.4	<35.0	<35.0	<41.4	54.0	>12.6
14472.00	8.4	<35.0	<35.0	<43.4	54.0	>10.6
16884.00	9.7	<34.0	<34.0	<43.7	54.0	>10.3
19296.00	5.0	<33.0	<33.0	<38.0	54.0	>16.0
21708.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24120.00	6.6	<36.0	<36.0	<42.6	54.0	>11.4

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2437 MHz (Ch.06) Transmitting operation ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2437.00	25.4	81.6	77.3	107.0	-	-
4874.00	-2.2	50.8	52.7	50.5	74.0	23.5
7311.00	-1.1	46.5	49.7	48.6	74.0	25.4
9748.00	2.6	<43.0	<43.0	<45.6	74.0	>28.4
12185.00	6.6	<45.0	<45.0	<51.6	74.0	>22.4
14622.00	8.3	<45.0	<45.0	<53.3	74.0	>20.7
17059.00	10.1	<44.0	<44.0	<54.1	74.0	>19.9
19496.00	5.1	<43.0	<43.0	<48.1	74.0	>25.9
21933.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24370.00	6.5	<46.0	<46.0	<52.5	74.0	>21.5
[Average Detector Measurement] (*1)						
4874.00	-2.2	39.0	40.5	38.3	54.0	15.7
7311.00	-1.1	35.1	38.4	37.3	55.0	17.7
9748.00	2.6	<33.0	<33.0	<35.6	54.0	>18.4
12185.00	6.6	<35.0	<35.0	<41.6	54.0	>12.4
14622.00	8.3	<35.0	<35.0	<43.3	54.0	>10.7
17059.00	10.1	<34.0	<34.0	<44.1	54.0	>9.9
19496.00	5.1	<33.0	<33.0	<38.1	54.0	>15.9
21933.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24370.00	6.5	<36.0	<36.0	<42.5	54.0	>11.5

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2462 MHz (ch.11) Transmitting operation ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2462.00	25.4	82.6	78.0	108.0	-	-
4924.00	-2.2	51.2	52.0	49.8	74.0	24.2
7386.00	-1.0	46.4	49.6	48.6	74.0	25.4
9848.00	2.7	49.5	<43.0	<52.2	74.0	>21.8
12310.00	6.8	<45.0	<45.0	<51.8	74.0	>22.2
14772.00	8.3	<45.0	<45.0	<53.3	74.0	>20.7
17234.00	10.3	<44.0	<44.0	<54.3	74.0	>19.7
19696.00	5.1	<43.0	<43.0	<48.1	74.0	>25.9
22158.00	5.5	<45.0	<45.0	<50.5	74.0	>23.5
24620.00	6.3	<46.0	<46.0	<52.3	74.0	>21.7
[Average Detector Measurement] (*1)						
4924.00	-2.2	39.3	40.0	37.8	54.0	16.2
7386.00	-1.0	35.1	38.4	37.4	54.0	16.6
9848.00	2.7	41.1	<33.0	<43.8	54.0	>10.2
12310.00	6.8	<35.0	<35.0	<41.8	54.0	>12.2
14772.00	8.3	<35.0	<35.0	<43.3	54.0	>10.7
17234.00	10.3	<34.0	<34.0	<44.3	54.0	>9.7
19696.00	5.1	<33.0	<33.0	<38.1	54.0	>15.9
22158.00	5.5	<35.0	<35.0	<40.5	54.0	>13.5
24620.00	6.3	<36.0	<36.0	<42.3	54.0	>11.7

[Remark]

(*) : Spectrum analyzer setup condition.

Detector : Peak
 RBW : 1MHz
 VBW : 10Hz

2) Local Frequency

a. Horizontally Place

Measurement Distance ☒: 3m ☐: 10m

Fc = 2412 MHz (Ch.01) Transmitting operation Local Frequency ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2037.75	-11.1	54.3	53.0	43.2	74.0	30.8
4075.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6113.25	-3.1	<40.0	<40.0	<36.9	74.0	>37.1
8151.00	-0.7	<42.0	<42.0	<41.3	74.0	>32.7
10188.75	2.1	<43.0	<43.0	<45.1	74.0	>28.9
[Average Detector Measurement] (*1)						
2037.75	-11.1	51.3	49.2	40.2	54.0	13.8
4075.50	-3.7	<30.0	<30.0	<26.3	54.0	>27.7
6113.25	-3.1	<30.0	<30.0	<26.9	54.0	>27.1
8151.00	-0.7	<32.0	<32.0	<31.3	54.0	>22.7
10188.75	2.1	<33.0	<33.0	<35.1	54.0	>18.9

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2412 MHz (Ch.01) Transmitting operation Local Frequency ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2037.75	-11.1	54.5	52.8	43.4	74.0	30.6
4075.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6113.25	-3.1	<40.0	<40.0	<36.9	74.0	>37.1
8151.00	-0.7	<42.0	<42.0	<41.3	74.0	>32.7
10188.75	2.1	<43.0	<43.0	<45.1	74.0	>28.9
[Average Detector Measurement] (*1)						
2037.75	-11.1	51.0	48.6	39.9	54.0	14.1
4075.50	-3.7	<30.0	<30.0	<26.3	54.0	>27.7
6113.25	-3.1	<30.0	<30.0	<26.9	54.0	>27.1
8151.00	-0.7	<32.0	<32.0	<31.3	54.0	>22.7
10188.75	2.1	<33.0	<33.0	<35.1	54.0	>18.9

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2437 MHz (Ch.06) Transmitting operation Local Frequency ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2062.75	-11.0	55.0	54.2	44.0	74.0	30.0
4125.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6188.25	-3.2	<40.0	<40.0	<36.8	74.0	>37.2
8251.00	0.3	<42.0	<42.0	<42.3	74.0	>31.7
10313.75	2.2	<43.0	<43.0	<45.2	74.0	>28.8
[Average Detector Measurement] (*1)						
2062.75	-11.0	51.8	50.5	40.8	54.0	13.2
4125.50	-3.7	<30.0	<30.0	<26.3	54.0	>27.7
6188.25	-3.2	<30.0	<30.0	<26.8	54.0	>27.2
8251.00	0.3	<32.0	<32.0	<32.3	54.0	>21.7
10313.75	2.2	<33.0	<33.0	<35.2	54.0	>18.8

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2437 MHz (Ch.06) Transmitting operation Local Frequency ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2062.75	-11.0	54.8	54.5	43.8	74.0	30.2
4125.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6188.25	-3.2	<40.0	<40.0	<36.8	74.0	>37.2
8251.00	0.3	<42.0	<42.0	<42.3	74.0	>31.7
10313.75	2.2	<43.0	<43.0	<45.2	74.0	>28.8
[Average Detector Measurement] (*1)						
2062.75	-11.0	51.4	50.6	40.4	54.0	13.6
4125.50	-3.7	<30.0	<30.0	<26.3	54.0	>27.7
6188.25	-3.2	<30.0	<30.0	<26.8	54.0	>27.2
8251.00	0.3	<32.0	<32.0	<32.3	54.0	>21.7
10313.75	2.2	<33.0	<33.0	<35.2	54.0	>18.8

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2462 MHz (Ch.11) Transmitting operation Local Frequency ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2087.75	-11.0	54.3	54.0	43.3	74.0	30.7
4175.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6263.25	-3.1	<40.0	<40.0	<36.9	74.0	>37.1
8351.00	0.4	<42.0	<42.0	<42.4	74.0	>31.6
10438.75	2.3	<43.0	<43.0	<45.3	74.0	>28.7
[Average Detector Measurement] (*1)						
2087.75	-11.0	51.1	49.5	40.1	54.0	13.9
4175.50	-3.7	<30.0	<30.0	<26.3	74.0	>47.7
6263.25	-3.1	<30.0	<30.0	<26.9	74.0	>47.1
8351.00	0.4	<32.0	<32.0	<32.4	54.0	>21.6
10438.75	2.3	<33.0	<33.0	<35.3	54.0	>18.7

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2462 MHz (Ch.11) Transmitting operation Local Frequency ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2087.75	-11.0	54.3	54.0	43.3	74.0	30.7
4175.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6263.25	-3.1	<40.0	<40.0	<36.9	74.0	>37.1
8351.00	0.4	<42.0	<42.0	<42.4	74.0	>31.6
10438.75	2.3	<43.0	<43.0	<45.3	74.0	>28.7
[Average Detector Measurement] (*1)						
2087.75	-11.0	51.1	49.5	40.1	54.0	13.9
4175.50	-3.7	<30.0	<30.0	<26.3	74.0	>47.7
6263.25	-3.1	<30.0	<30.0	<26.9	74.0	>47.1
8351.00	0.4	<32.0	<32.0	<32.4	54.0	>21.6
10438.75	2.3	<33.0	<33.0	<35.3	54.0	>18.7

- Continued -

b. Vertically Place

Measurement Distance ☒: 3m ☐: 10m

Fc = 2412 MHz (Ch.01) Transmitting operation Local Frequency ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2037.75	-11.1	55.4	55.5	44.4	74.0	29.6
4075.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6113.25	-3.1	<40.0	<40.0	<36.9	74.0	>37.1
8151.00	-0.7	<42.0	<42.0	<41.3	74.0	>32.7
10188.75	2.1	<43.0	<43.0	<45.1	74.0	>28.9
[Average Detector Measurement] (*1)						
2037.75	-11.1	51.5	51.5	40.4	54.0	13.6
4075.50	-3.7	<30.0	<30.0	<26.3	74.0	>47.7
6113.25	-3.1	<30.0	<30.0	<26.9	74.0	>47.1
8151.00	-0.7	<32.0	<32.0	<31.3	54.0	>22.7
10188.75	2.1	<33.0	<33.0	<35.1	54.0	>18.9

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2412 MHz (Ch.01) Transmitting operation Local Frequency ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2037.75	-11.1	55.7	53.6	44.6	74.0	29.4
4075.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6113.25	-3.1	<40.0	<40.0	<36.9	74.0	>37.1
8151.00	-0.7	<42.0	<42.0	<41.3	74.0	>32.7
10188.75	2.1	<43.0	<43.0	<45.1	74.0	>28.9
[Average Detector Measurement] (*1)						
2037.75	-11.1	52.6	49.1	41.5	54.0	12.5
4075.50	-3.7	<30.0	<30.0	<26.3	74.0	>47.7
6113.25	-3.1	<30.0	<30.0	<26.9	74.0	>47.1
8151.00	-0.7	<32.0	<32.0	<31.3	54.0	>22.7
10188.75	2.1	<33.0	<33.0	<35.1	54.0	>18.9

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2437 MHz (Ch.06) Transmitting operation Local Frequency ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2062.75	-11.0	55.0	55.0	44.0	74.0	30.0
4125.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6188.25	-3.2	<40.0	<40.0	<36.8	74.0	>37.2
8251.00	0.3	<42.0	<42.0	<42.3	74.0	>31.7
10313.75	2.2	<43.0	<43.0	<45.2	74.0	>28.8
[Average Detector Measurement] (*1)						
2062.75	-11.0	50.8	50.7	39.8	54.0	14.2
4125.50	-3.7	<30.0	<30.0	<26.3	74.0	>47.7
6188.25	-3.2	<30.0	<30.0	<26.8	74.0	>47.2
8251.00	0.3	<32.0	<32.0	<32.3	54.0	>21.7
10313.75	2.2	<33.0	<33.0	<35.2	54.0	>18.8

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2437 MHz (Ch.06) Transmitting operation Local Frequency ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2062.75	-11.0	56.0	53.8	45.0	74.0	29.0
4125.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6188.25	-3.2	<40.0	<40.0	<36.8	74.0	>37.2
8251.00	0.3	<42.0	<42.0	<42.3	74.0	>31.7
10313.75	2.2	<43.0	<43.0	<45.2	74.0	>28.8
[Average Detector Measurement] (*1)						
2062.75	-11.0	52.6	49.4	41.6	54.0	12.4
4125.50	-3.7	<30.0	<30.0	<26.3	74.0	>47.7
6188.25	-3.2	<30.0	<30.0	<26.8	74.0	>47.2
8251.00	0.3	<32.0	<32.0	<32.3	54.0	>21.7
10313.75	2.2	<33.0	<33.0	<35.2	54.0	>18.8

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2462 MHz (Ch.11) Transmitting operation Local Frequency ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2087.75	-11.0	54.5	54.3	43.5	74.0	30.5
4175.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6263.25	-3.1	<40.0	<40.0	<36.9	74.0	>37.1
8351.00	0.4	<42.0	<42.0	<42.4	74.0	>31.6
10438.75	2.3	<43.0	<43.0	<45.3	74.0	>28.7
[Average Detector Measurement] (*1)						
2087.75	-11.0	50.5	50.3	39.5	54.0	14.5
4175.50	-3.7	<30.0	<30.0	<26.3	74.0	>47.7
6263.25	-3.1	<30.0	<30.0	<26.9	74.0	>47.1
8351.00	0.4	<32.0	<32.0	<32.4	54.0	>21.6
10438.75	2.3	<33.0	<33.0	<35.3	54.0	>18.7

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Fc = 2462 MHz (Ch.11) Transmitting operation Local Frequency ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
2087.75	-11.0	55.7	53.4	44.7	74.0	29.3
4175.50	-3.7	<40.0	<40.0	<36.3	74.0	>37.7
6263.25	-3.1	<40.0	<40.0	<36.9	74.0	>37.1
8351.00	0.4	<42.0	<42.0	<42.4	74.0	>31.6
10438.75	2.3	<43.0	<43.0	<45.3	74.0	>28.7
[Average Detector Measurement] (*1)						
2087.75	-11.0	52.6	49.2	41.6	54.0	12.4
4175.50	-3.7	<30.0	<30.0	<26.3	74.0	>47.7
6263.25	-3.1	<30.0	<30.0	<26.9	74.0	>47.1
8351.00	0.4	<32.0	<32.0	<32.4	54.0	>21.6
10438.75	2.3	<33.0	<33.0	<35.3	54.0	>18.7

- Continued -

(2) In the frequency range : 30 MHz to 1000 MHz (Quasi-peak measurement)

Transmitting and Receiving operation

Measurement Distance ☒: 3m ☐: 10m

Measured Frequency (MHz)	Antenna Factor (dB/m)	Meter Reading		Maximum Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin for Limit (dB)
		Horizontal Polarization (dB μ V)	Vertical Polarization (dB μ V)			
* 80.78	8.4	15.8	30.2	38.6	40.0	1.4
* 81.77	8.5	16.0	28.5	37.0	40.0	3.0
135.00	16.2	18.7	19.5	35.7	43.5	7.8
162.01	17.2	17.0	11.0	34.2	43.5	9.3
189.01	18.4	18.0	10.2	36.4	43.5	7.1
324.00	18.1	22.0	17.4	40.1	46.0	5.9
405.00	19.5	18.7	17.1	38.2	46.0	7.8
486.01	21.1	18.4	13.0	39.5	46.0	6.5
729.04	25.1	16.0	11.0	41.1	46.0	4.9
810.01	26.0	13.5	6.8	39.5	46.0	6.5

[Note]

In the restricted band emission of 30MHz to 1000MHz, the spurious emission were compliance with FCC rule. See figure 29 to 32.

- Continued -

Horizontally Place

Measurement Distance ☒: 3m ☐: 10m

Receiving Operation ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit (Average)	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
(Fundamental Local Frequency)						
2037.75	-11.4	49.3	47.4	37.9	54.0	16.1
2062.75	-11.3	50.0	47.2	38.7	54.0	15.3
2087.75	-11.2	49.4	48.5	38.2	54.0	15.8
(2nd Harmonics)						
4075.50	-6.7	49.7	51.3	44.6	54.0	9.4
4125.50	-6.7	50.2	52.4	45.7	54.0	8.3
4175.50	-6.7	50.0	52.1	45.4	54.0	8.6
(3rd Harmonics)						
6113.25	-3.1	<40.0	<40.0	<36.9	54.0	-
6188.25	-3.1	<40.0	<40.0	<36.9	54.0	-
6263.25	-3.0	<40.0	<40.0	<37.0	54.0	-
(4th Harmonics)						
8151.00	-0.7	<42.0	<42.0	<41.3	54.0	-
8251.00	0.3	<42.0	<42.0	<42.3	54.0	-
8351.00	0.4	<42.0	<42.0	<42.4	54.0	-
(5th Harmonics)						
10188.75	2.1	<43.0	<43.0	<45.1	54.0	-
10313.75	2.3	<43.0	<43.0	<45.3	54.0	-
10438.75	2.5	<43.0	<43.0	<45.5	54.0	-
[Average Detector Measurement]						
(2nd Harmonics)						
4075.50	-6.7	44.4	47.5	40.8	54.0	13.2
4125.50	-6.7	45.7	49.2	42.5	54.0	11.5
4175.50	-6.7	46.0	48.8	42.1	54.0	11.9

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Receiving Operation ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit (Average)	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
(Fundamental Local Frequency)						
2037.75	-11.4	49.0	47.2	37.6	54.0	16.4
2062.75	-11.3	50.0	47.4	38.7	54.0	15.3
2087.75	-11.2	48.2	47.0	37.0	54.0	17.0
(2nd Harmonics)						
4075.50	-6.7	50.0	53.0	46.3	54.0	7.7
4125.50	-6.7	50.3	52.4	45.7	54.0	8.3
4175.50	-6.7	50.1	52.8	46.1	54.0	7.9
(3rd Harmonics)						
6113.25	-3.1	<40.0	<40.0	<36.9	54.0	-
6188.25	-3.1	<40.0	<40.0	<36.9	54.0	-
6263.25	-3.0	<40.0	<40.0	<37.0	54.0	-
(4th Harmonics)						
8151.00	-0.7	<42.0	<42.0	<41.3	54.0	-
8251.00	0.3	<42.0	<42.0	<42.3	54.0	-
8351.00	0.4	<42.0	<42.0	<42.4	54.0	-
(5th Harmonics)						
10188.75	2.1	<43.0	<43.0	<45.1	54.0	-
10313.75	2.3	<43.0	<43.0	<45.3	54.0	-
10438.75	2.5	<43.0	<43.0	<45.5	54.0	-
[Average Detector Measurement]						
(2nd Harmonics)						
4075.50	-6.7	46.5	51.1	44.4	54.0	9.6
4125.50	-6.7	46.3	50.5	43.8	54.0	10.2
4175.50	-6.7	46.3	49.0	42.3	54.0	11.7

- Continued -

Vertically Place

Measurement Distance ☒: 3m ☐: 10m

Receiving Operation ANT.1

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit (Average)	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
(Fundamental Local Frequency)						
2037.75	-11.4	49.0	48.4	37.6	54.0	16.4
2062.75	-11.3	49.5	49.0	38.2	54.0	15.8
2087.75	-11.2	49.4	49.2	38.2	54.0	15.8
(2nd Harmonics)						
4075.50	-6.7	53.2	53.0	46.5	54.0	7.5
4125.50	-6.7	54.0	53.4	47.3	54.0	6.7
4175.50	-6.7	53.8	55.0	48.3	54.0	5.7
(3rd Harmonics)						
6113.25	-3.1	<40.0	<40.0	<36.9	54.0	-
6188.25	-3.1	<40.0	<40.0	<36.9	54.0	-
6263.25	-3.0	<40.0	<40.0	<37.0	54.0	-
(4th Harmonics)						
8151.00	-0.7	<42.0	<42.0	<41.3	54.0	-
8251.00	0.3	<42.0	<42.0	<42.3	54.0	-
8351.00	0.4	<42.0	<42.0	<42.4	54.0	-
(5th Harmonics)						
10188.75	2.1	<43.0	<43.0	<45.1	54.0	-
10313.75	2.3	<43.0	<43.0	<45.3	54.0	-
10438.75	2.5	<43.0	<43.0	<45.5	54.0	-
[Average Detector Measurement]						
(2nd Harmonics)						
4075.50	-6.7	50.3	50.1	43.6	54.0	10.4
4125.50	-6.7	51.2	51.0	44.5	54.0	9.5
4175.50	-6.7	49.1	52.9	46.2	54.0	7.8

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Receiving Operation ANT.2

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit (Average)	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Peak Detector Measurement]						
(Fundamental Local Frequency)						
2037.75	-11.4	48.2	50.0	38.6	54.0	15.4
2062.75	-11.3	48.5	49.4	38.1	54.0	15.9
2087.75	-11.2	49.2	49.3	38.1	54.0	15.9
(2nd Harmonics)						
4075.50	-6.7	53.2	53.7	47.0	54.0	7.0
4125.50	-6.7	52.0	52.8	46.1	54.0	7.9
4175.50	-6.7	52.1	54.8	48.1	54.0	5.9
(3rd Harmonics)						
6113.25	-3.1	<40.0	<40.0	<36.9	54.0	-
6188.25	-3.1	<40.0	<40.0	<36.9	54.0	-
6263.25	-3.0	<40.0	<40.0	<37.0	54.0	-
(4th Harmonics)						
8151.00	-0.7	<42.0	<42.0	<41.3	54.0	-
8251.00	0.3	<42.0	<42.0	<42.3	54.0	-
8351.00	0.4	<42.0	<42.0	<42.4	54.0	-
(5th Harmonics)						
10188.75	2.1	<43.0	<43.0	<45.1	54.0	-
10313.75	2.3	<43.0	<43.0	<45.3	54.0	-
10438.75	2.5	<43.0	<43.0	<45.5	54.0	-
[Average Detector Measurement]						
(2nd Harmonics)						
4075.50	-6.7	50.5	50.7	44.0	54.0	10.0
4125.50	-6.7	48.3	50.0	43.3	54.0	10.7
4175.50	-6.7	48.6	51.8	45.1	54.0	8.9

- (3) In frequency range : 30 MHz to 1000 MHz
Test data in graph

RADIATED EMISSION

KEC No. : A-014-03-C/A-124-03-B	Reference No. : FCC Part15 C / RSS210
Model No. : LC-15L1U (Wireless Center)	Power Supply : AC120V, 60Hz
Serial No. :	Temp/Humi : 20°C, 40%
Test Condition : Receiving mode	Operator : Ikuya Minematsu

Memo : EUT position : Horizontally placed

LIMIT : FCC Part15 Subpart B Class B(3m)
MARGIN : 3 dB

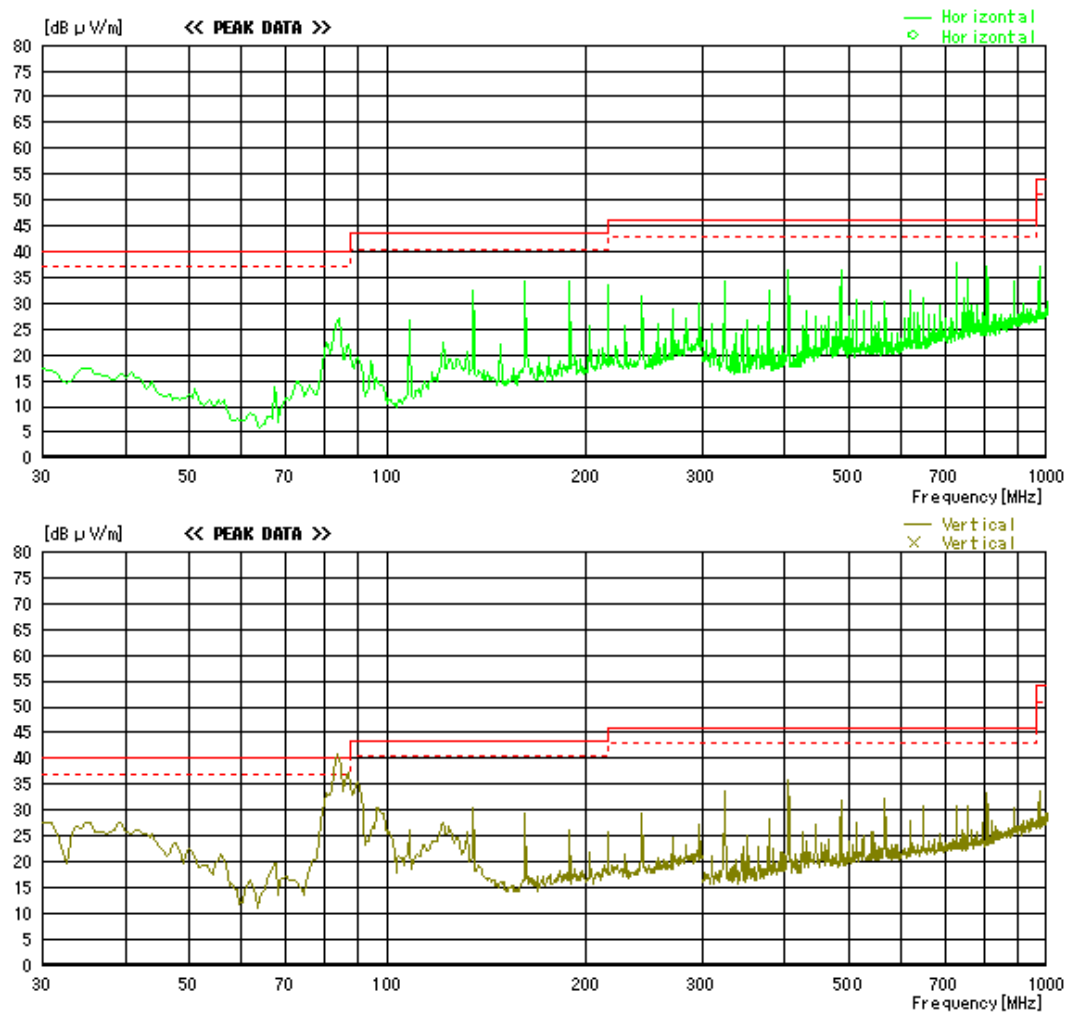


Figure 29 Rx_Horizontally Place

- Continued -

RADIATED EMISSION

KEC No. : A-014-03-C/A-124-03-B
 Model No. : LC-15L1U (Wireless Center)
 Serial No. :
 Test Condition : Receiving mode
 Reference No. : FCC Part15 C / RSS210
 Power Supply : AC120V, 60Hz
 Temp/Humi : 20°C, 40%
 Operator : Ikuya Minematsu
 Memo : EUT position : Vertically placed
 LIMIT : FCC Part15 Subpart B Class B(3m)
 MARGIN : 3 dB

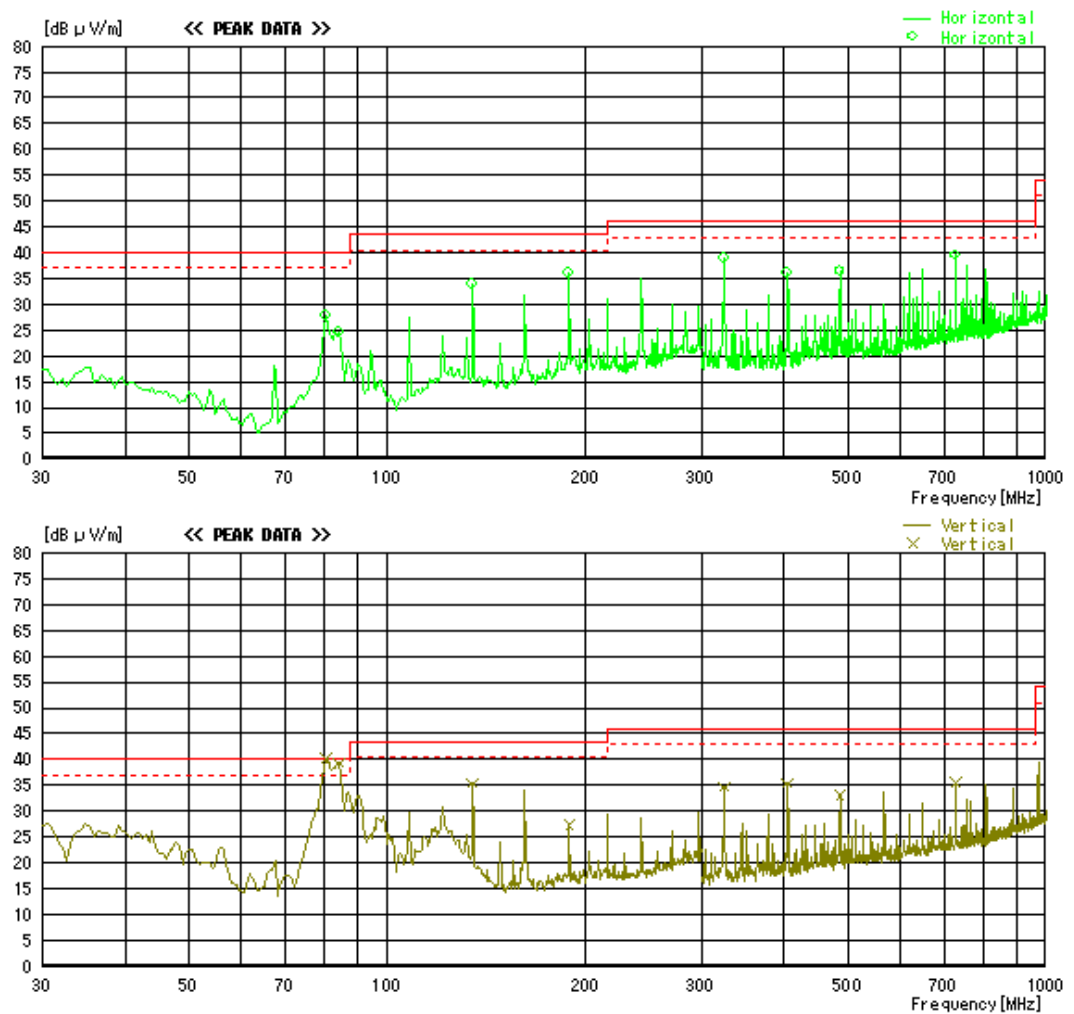


Figure 30 Rx_Vertically Place

- Continued -

RADIATED EMISSION

KEC No. : A-014-03-C/A-124-03-B
 Model No. : LC-15L1U (Wireless Center)
 Serial No. :
 Test Condition : Transmitting mode
 Reference No. : FCC Part15 C / RSS210
 Power Supply : AC120V, 60Hz
 Temp/Humi : 20°C, 40%
 Operator : Ikuya Minematsu
 Memo : EUT position : Horizontally placed
 LIMIT : FCC Part15 Subpart B Class B(3m)
 MARGIN : 3 dB

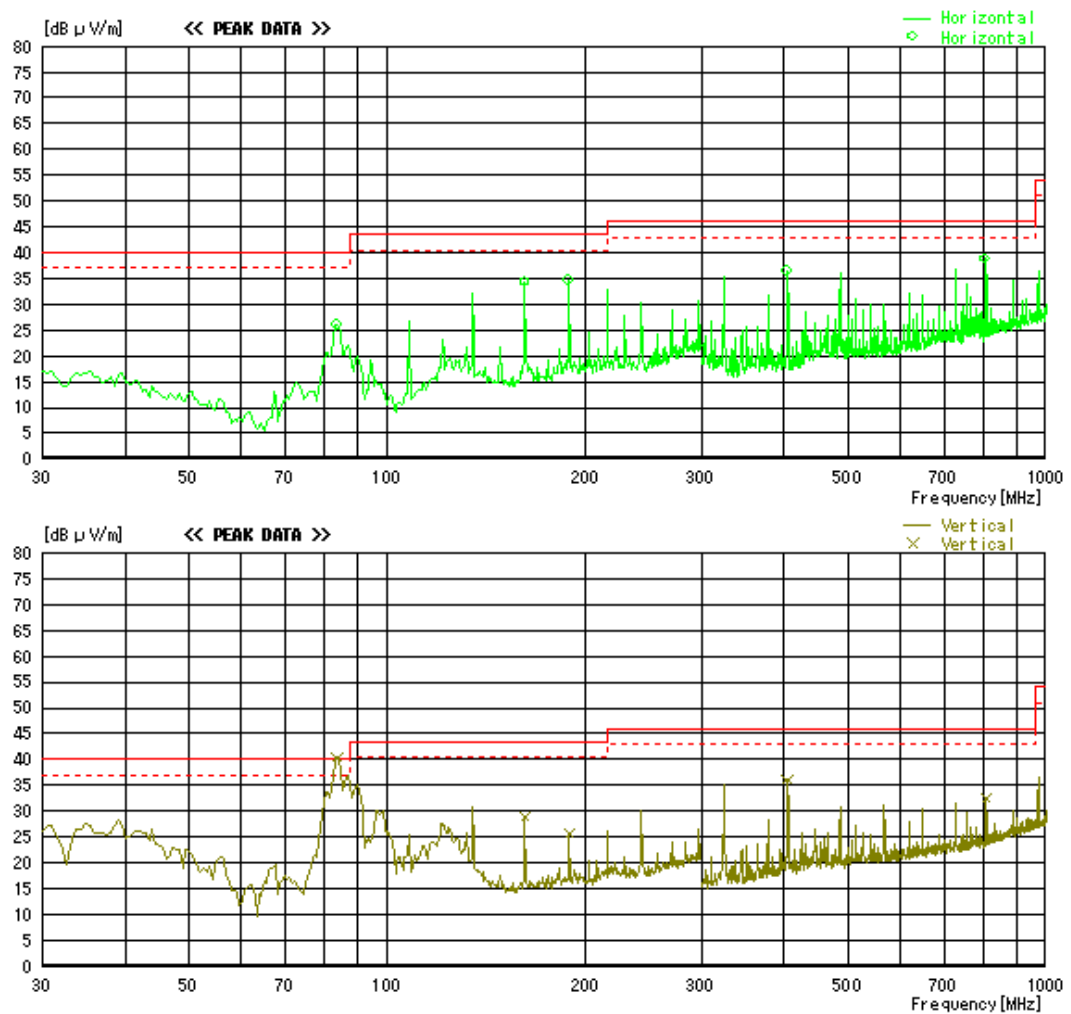


Figure 31 Tx_Horizontally Place

- Continued -

RADIATED EMISSION

KEC No. : A-014-03-C/A-124-03-B
 Model No. : LC-15L1U (Wireless Center)
 Serial No. :
 Test Condition : Transmitting mode
 Reference No. : FCC Part15 C / RSS210
 Power Supply : AC120V, 60Hz
 Temp/Humi : 20°C, 40%
 Operator : Ikuya Minematsu
 Memo : EUT position : Vertically placed
 LIMIT : FCC Part15 Subpart B Class B(3m)
 MARGIN : 3 dB

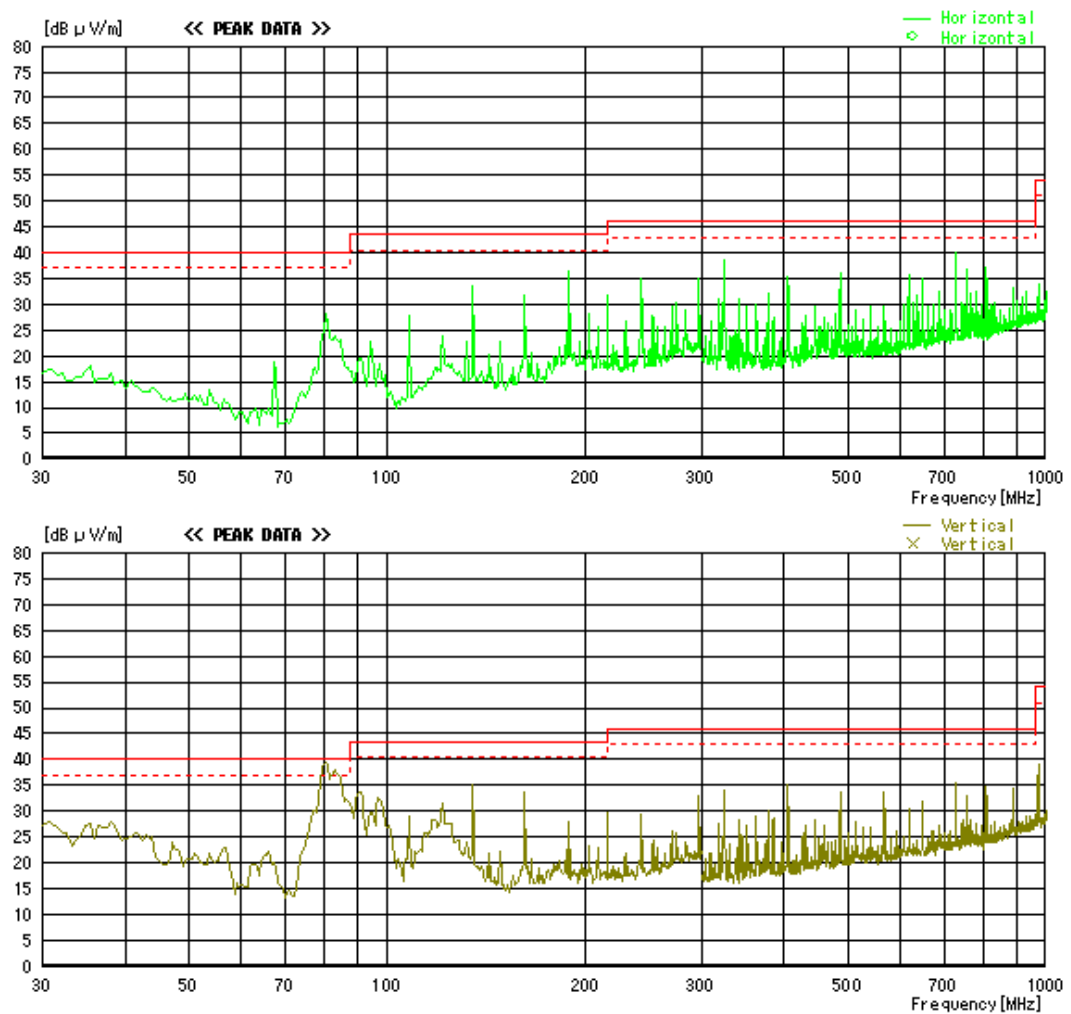


Figure 32 Tx_Vertically Place

(4) In the frequency range : above 1 GHz (Restricted Bands)

Measurement Distance ☒: 3m ☐: 10m

Transmitting Operation (Maximum Power output mode)

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Average Detector Measurement]						
1000.00	-14.0	<35.0	<35.0	<21.0	54.0	>33.0
1052.95	-13.6	47.2	54.4	40.8	54.0	13.2
1134.60	-13.3	45.6	54.7	41.4	54.0	12.6
1215.00	-12.9	44.8	55.3	42.4	54.0	11.6
1240.00	-13.1	<35.0	<35.0	<21.9	54.0	>32.1
1300.00	-12.6	<37.0	<37.0	<24.4	54.0	>29.6
1427.00	-12.4	<37.0	<37.0	<24.6	54.0	>29.4
1435.00	-12.3	<37.0	<37.0	<24.7	54.0	>29.3
1626.50	-12.8	<37.0	<37.0	<24.2	54.0	>29.8
1645.50	-12.7	<37.0	<37.0	<24.3	54.0	>29.7
1646.50	-12.7	<37.0	<37.0	<24.3	54.0	>29.7
1660.00	-12.5	<37.0	<37.0	<24.5	54.0	>29.5
1710.00	-12.2	<37.0	<37.0	<24.8	54.0	>29.2
1718.80	-12.2	<37.0	<37.0	<24.8	54.0	>29.2
1722.20	-12.2	<37.0	<37.0	<24.8	54.0	>29.2
2200.00	-11.1	<36.0	<36.0	<24.9	54.0	>29.1
2300.00	-11.1	<36.0	<36.0	<24.9	54.0	>29.1
2310.00	0.1	<32.0	<32.0	<32.1	54.0	>21.9
(*)2390.00	9.9	<33.0	<33.0	<42.9	54.0	>11.1
(*) 2483.50	9.9	<35.0	<35.0	<44.9	54.0	>9.1
2500.00	9.4	<33.0	<33.0	<42.4	54.0	>11.6
2655.00	9.5	<33.0	<33.0	<42.5	54.0	>11.5
2900.00	10.0	<33.0	<33.0	<43.0	54.0	>11.0
3260.00	-8.9	<35.0	<35.0	<26.1	54.0	>27.9
3267.00	-8.8	<35.0	<35.0	<26.2	54.0	>27.8

- Continued -

Measurement Distance ☒: 3m ☐: 10m

Restricted Band Above 1GHz

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Average Detector Measurement]						
3332.00	-8.6	<35.0	<35.0	<26.4	54.0	>27.6
3339.00	-8.6	<35.0	<35.0	<26.4	54.0	>27.6
3345.80	-8.6	<35.0	<35.0	<26.4	54.0	>27.6
3358.00	-8.6	<35.0	<35.0	<26.4	54.0	>27.6
3600.00	-8.0	<32.0	<32.0	<24.0	54.0	>30.0
4400.00	-3.3	<32.0	<32.0	<28.7	54.0	>25.3
4500.00	-2.9	<32.0	<32.0	<29.1	54.0	>24.9
4824.00	-2.4	38.9	40.5	38.1	54.0	15.9
4874.00	-2.3	39.4	42.0	39.7	54.0	14.3
4924.00	-2.2	42.2	44.9	42.7	54.0	11.3
5150.00	-1.8	<32.0	<32.0	<30.2	54.0	>23.8
5350.00	-1.6	<32.0	<32.0	<30.4	54.0	>23.6
5460.00	-1.7	<32.0	<32.0	<30.3	54.0	>23.7
7250.00	-1.9	<32.0	<32.0	<30.1	54.0	>23.9
7750.00	-1.5	<32.0	<32.0	<30.5	54.0	>23.5
8025.00	-1.2	<32.0	<32.0	<30.8	54.0	>23.2
8500.00	0.4	<32.0	<32.0	<32.4	54.0	>21.6
9000.00	1.1	<32.0	<32.0	<33.1	54.0	>20.9
9200.00	1.5	<32.0	<32.0	<33.5	54.0	>20.5
9300.00	1.4	<32.0	<32.0	<33.4	54.0	>20.6
9500.00	1.8	<32.0	<32.0	<33.8	54.0	>20.2
10600.00	4.8	<33.0	<33.0	<37.8	54.0	>16.2
12060.00	6.4	<35.0	<35.0	<41.4	54.0	>12.6
12185.00	6.6	<35.0	<35.0	<41.6	54.0	>12.4
12310.00	6.8	<35.0	<35.0	<41.8	54.0	>12.2
12700.00	7.0	<35.0	<35.0	<42.0	54.0	>12.0
13250.00	7.3	<33.0	<33.0	<40.3	54.0	>13.7
13400.00	7.5	<33.0	<33.0	<40.5	54.0	>13.5

-Continued -

Measurement Distance ☒: 3m ☐: 10m

Restricted Band Above 1GHz

Measured Frequency	Antenna Factor	Meter Reading		Maximum Field Strength	Limit	Margin for Limits
		Horizontal Polarization	Vertical Polarization			
[MHz]	[dB/m]	[dBuV]	[dBuV]	[dBuV/m]	[dBuV/m]	[dB]
[Average Detector Measurement]						
14470.00	8.4	<34.0	<34.0	<42.4	54.0	>11.6
14472.00	8.4	<34.0	<34.0	<42.4	54.0	>11.6
14500.00	8.4	<34.0	<34.0	<42.4	54.0	>11.6
15350.00	8.5	<34.0	<34.0	<42.5	54.0	>11.5
16200.00	8.7	<34.0	<34.0	<42.7	54.0	>11.3
17700.00	9.7	<34.0	<34.0	<43.7	54.0	>10.3
19260.00	5.0	<34.0	<34.0	39.0	54.0	15.0
19496.00	5.1	<34.0	<34.0	39.1	54.0	14.9
19696.00	5.1	<34.0	<34.0	39.1	54.0	14.9
21400.00	5.4	<34.0	<34.0	<39.4	54.0	>14.6
22010.00	6.1	<34.0	<34.0	<40.1	54.0	>13.9
23120.00	6.1	<34.0	<34.0	<40.1	54.0	>13.9
23600.00	6.3	<35.0	<35.0	<41.3	54.0	>12.7
24000.00	6.2	<35.0	<35.0	<41.2	54.0	>12.8
[Band Edge Measurement and Other Emission](*)						
1052.95	-13.6	57.4	64.0	50.4	74.0	23.6
1134.60	-13.3	56.5	65.0	51.7	74.0	22.3
1215.00	-12.9	55.0	65.4	52.5	74.0	21.5
2439.00	9.9	<45.0	<45.0	<54.9	74.0	>19.1
2483.50	9.9	<45.0	<45.0	<54.9	74.0	>19.1

[Remark]

(*) : Spectrum analyzer setup condition.

Detector : Peak
 RBW : 1MHz
 VBW : 1MHz

- Continued -

[Note]

- (1) The measurement were performed both of transmitting operation and receiving operation.
- (2) Antenna Factor includes the cable loss.
- (3) Above 1GHz, antenna factor includes both of the cable loss and pre-amplifier gain.
- (4) In frequency range 1to 2GHz and 3 to 4GHz, the band eliminate filter (Cut off frequency 2.4GHz) was used.

[Calculation method at Peak detector]

Maximum Field Strength (dB μ V/m)= Meter Reading (at maximum level of Horizontal or Vertical) (dB μ V) + Antenna Factor (dB/m)

[Environment]

Temperature: 20°C

Humidity: 40%

[Tested Date/ Tester]

14 December 2003

Signature



Ikuya Minematsu

10. AC POWER LINE CONDUCTED EMISSION MEASUREMENT

10.1. Test Procedure

(1) (2) (3) (4) (5) (6) a) b) c) (7)	Configure the EUT System in accordance with ANSI C63.4-1992 section 7. ☒: without deviation, ☐: with deviation(details are found below) See also the block diagram and the photographs of EUT System configuration in this report. ☒: use the test table (2.0m × 1.0m, height 0.8m material : wooden), ☐: not use the test table Connect the EUT's AC power cord to one Line Impedance Stabilization Network (LISN). Any other power cord of other equipment is connected to a LISN different from the LISN used for the EUT. The measuring port of 2nd LISN shall be terminated by the 50 Ω terminator (resistor). Warm up the EUT System. Activate the EUT System and run the software prepared for the test, if necessary. Preliminary Measurement Connect the spectrum analyzer (*1) to the measuring port of the LISN for the EUT, using a calibrated coaxial cable. To find out the EUT System condition for the final test, which produces the maximum emission, the configuration of the EUT System, manipulated the position of the cables, and the operation mode, are changed under normal usage of the EUT. The spectrums are scanned from 150 kHz to 30 MHz and collect the six highest emissions minimum on the spectrum analyzer relative to the limits in the whole range. Final Measurement The EUT is operated in the worst-case condition where maximum emission is detected by the preliminary test. The test receiver (*2) is connected to the LISN for the EUT, and the six highest emissions minimum recorded above are measured.
(*1) (*2)	[Note] Spectrum Analyzer Set Up Conditions Frequency range : 150 kHz - 30 MHz Resolution bandwidth : 10 kHz Video bandwidth : 1 MHz Detector function : Peak mode Test Receiver Set Up Conditions Detector function : Quasi-Peak/ Average (if necessary) IF bandwidth : 10 kHz The test receiver is complied with the specification of the CISPR Publication 16.

10.2. Test Results

Transmitting mode

Measurement with the Quasi-peak (Q-Peak) Detector

Measured Frequency (MHz)	LISN Factor (dB)	Meter Reading		Maximum RF Voltage (dB μ V)	Limits		Margin for Limit (dB)
		Va (dB μ V)	Vb (dB μ V)		Q-Peak (dB μ V)	Average (dB μ V)	
0.173	0.3	46.6	46.6	46.9	64.8	54.8	17.9
0.347	0.2	32.3	32.1	32.5	59.0	49.0	26.5
1.921	0.2	36.1	34.7	36.3	56.0	46.0	19.7
4.583	0.3	35.1	33.1	35.4	56.0	46.0	20.6
20.868	1.2	32.1	31.4	33.3	60.0	50.0	26.7
22.000	1.2	28.4	29.7	30.9	60.0	50.0	29.1

Measurement with the average detector

Measured Frequency (MHz)	LISN Factor (dB)	Meter Reading		Maximum RF Voltage (dB μ V)	Limits	Margin for Limit (dB)
		Va (dB μ V)	Vb (dB μ V)		Average (dB μ V)	
0.173	0.3	36.5	36.5	36.8	64.8	28.0

[Note]

- (1) LISN Correction Factor includes the cable loss.
- (2) If the measurement value with the Q-peak detector meets the average limits, the measurement with the average detector is omitted.

[Calculation method]

Maximum RF Voltage (dB μ V)

= Meter Reading (at maximum level of Va or Vb) + LISN Factor (dB)

[Environment]

Temperature: 24°C

Humidity: 60%

[Tested Date / Tester]

14 December 2003


Signature



Ikuya Minematsu

Test Results in Graph

Transmitting mode

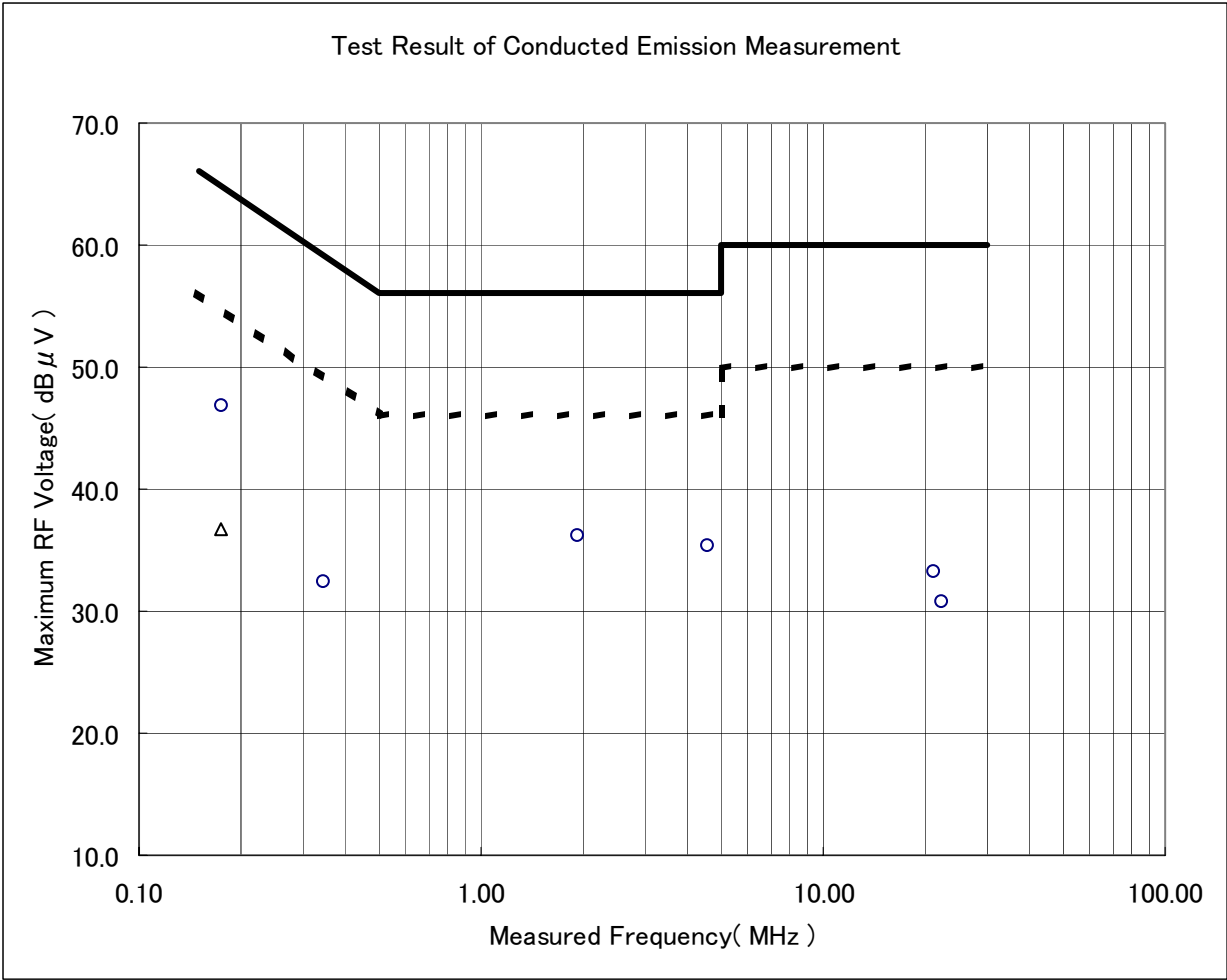

[Note]

- | | | | |
|---|---------------------|-------|----------------------|
| ○ | : Q-Peak Value | △ | : Average Value |
| — | : Q-Peak Limit Line | - - - | : Average Limit Line |

Receiving mode

Measurement with the Quasi-peak (Q-Peak) Detector

Measured Frequency (MHz)	LISN Factor (dB)	Meter Reading		Maximum RF Voltage (dB μ V)	Limits		Margin for Limit (dB)
		Va (dB μ V)	Vb (dB μ V)		Q-Peak (dB μ V)	Average (dB μ V)	
0.187	0.3	43.9	44.2	44.5	64.2	54.2	19.7
0.368	0.2	30.9	37.2	37.4	58.5	48.5	21.1
1.692	0.2	30.5	33.1	33.3	56.0	46.0	22.7
4.658	0.3	32.8	32.8	33.1	56.0	46.0	22.9
20.886	1.2	28.9	28.4	30.1	60.0	50.0	29.9
25.551	1.4	28.6	29.7	31.1	60.0	50.0	28.9
29.683	1.5	29.5	30.0	31.5	60.0	50.0	28.5

Measurement with the average detector

Measured Frequency (MHz)	LISN Factor (dB)	Meter Reading		Maximum RF Voltage (dB μ V)	Limits	Margin for Limit (dB)
		Va (dB μ V)	Vb (dB μ V)		Average (dB μ V)	
0.187	0.3	35.0	35.2	35.5	64.8	29.3

[Note]

- (1) LISN Correction Factor includes the cable loss.
- (2) If the measurement value with the Q-peak detector meets the average limits, the measurement with the average detector is omitted.

[Calculation method]

Maximum RF Voltage (dB μ V)

= Meter Reading (at maximum level of Va or Vb) + LISN Factor (dB)

[Environment]

Temperature: 24°C

Humidity: 60%

[Tested Date / Tester]

14 December 2003


Signature



Ikuya Minematsu

Test Results in Graph

Receiving mode

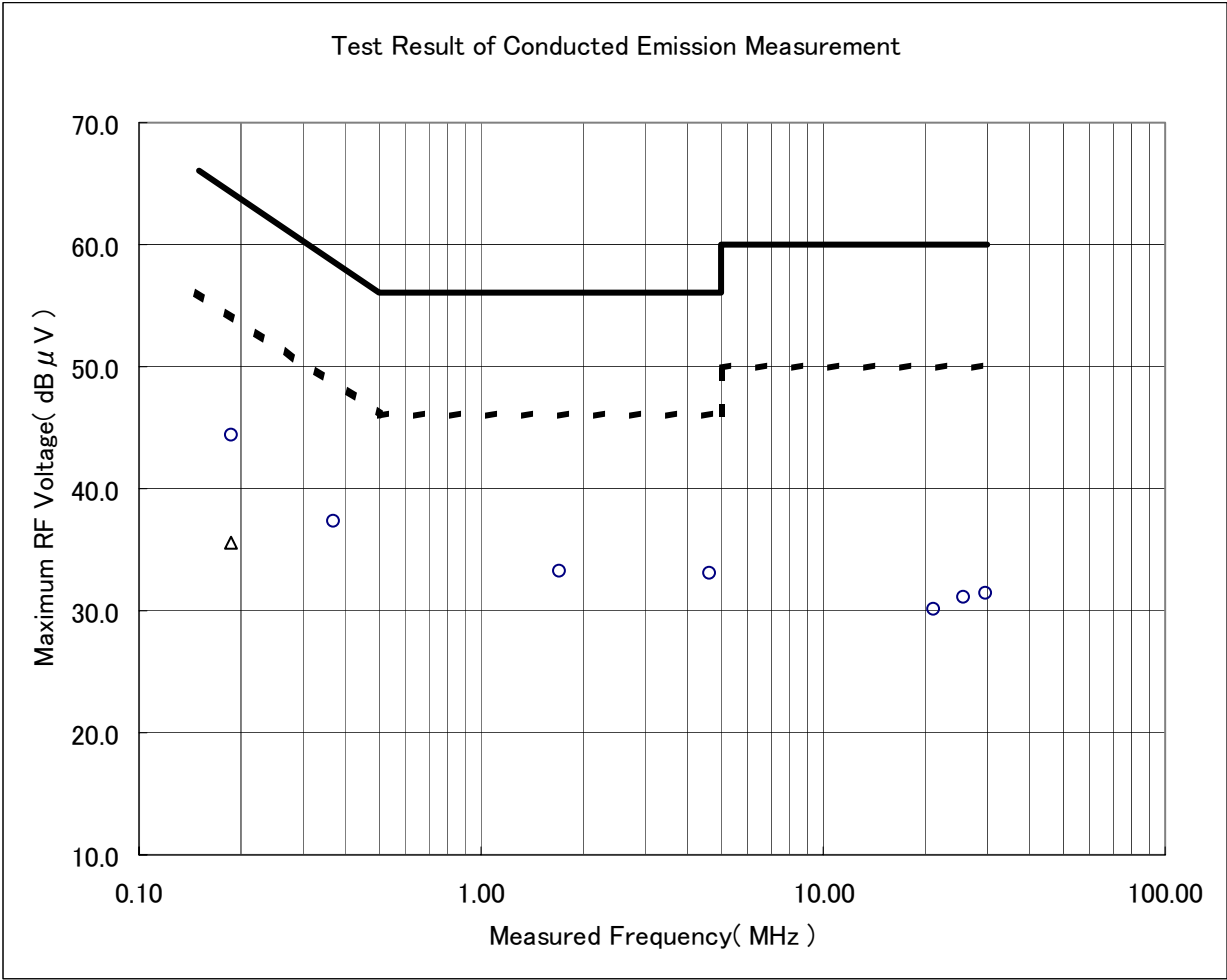

[Note]

- | | | | |
|---|---------------------|-------|----------------------|
| ○ | : Q-Peak Value | △ | : Average Value |
| — | : Q-Peak Limit Line | - - - | : Average Limit Line |

11. USED TEST EQUIPMENTS AND CALIBRATION STATUS

Equipment	Manufacturer	Model No.	Specifications	KEC Control No.	Test Item (*)	Last Cal.	Next Cal.
Spectrum Analyzer	Agilent Technologies	8564E	Frequency Range 100Hz – 40GHz	SA-39	1,2,3,4,5,6	2003/4	2004/4
	Anritsu	MS8602E	Frequency Range 9kHz – 7.8GHz	SA-46	6	2003/7	2004/7
	Agilent Technologies	E4403B	Frequency Range 9Hz – 3.0GHz	SA-48	7	2003/6	2004/6
Test Receiver	Rhode & Schwarz	ESHS10	Frequency Range 9kHz – 30 MHz	FS-83	7	2003/1	2004/1
		ESVS10	Frequency Range 20 MHz–1.0 GHz	FS-81	6	2003/5	2004/5
Pre-Amplifier	Hewlett Packard	8449B	Frequency Range 1GHz-26.5GHz Typ. Gain 30 dB	AM-52	6	2003/2	2004/2
	SONOMA Instrument	310N	Frequency Range 0.1MHz-1.3GHz Typ. Gain 30 dB	AM-69	6	2003/9	2004/8
Biconical Antenna	Schwarzbeck	VHA9103	Frequency Range 30MHz-300MHz	AN-180	6	2003/2	2004/2
Log Periodic Dipole Array Antenna	Schwarzbeck	UHAL9108A	Frequency Range 300MHz-1 GHz	AN-215	6	2003/2	2004/2
LISN	Kyoritsu	KNW407	Frequency Range 150kHz-30MHz	FL-106	7	2003/5	2004/5
		KNW242	Frequency Range 10kHz-30MHz	FL-110	N/A	2003/5	2004/5
Tuned Dipole Antenna	Kyoritsu	KBA-511AS	Frequency Range 25MHz-500MHz	AN-135	6	2003/2	2005/2
		KBA-611S	Frequency Range 500MHz-1GHz	AN-137	N/A	2003/2	2005/2
Standard Gain Horn Antenna	Raven	91888-2	Frequency Range 1GHz – 2GHz	AN-211	6	2003/9	2005/9
		91889-2	Frequency Range 2GHz – 5GHz	AN-212	6	2003/9	2005/9
	Scientific Atlanta	12-3.9	Frequency Range 3.95-5.85GHz	AN-142	6	2003/9	2005/9
		12-5.8	Frequency Range 5.85-8.2GHz	AN-104	6	2003/9	2005/9
		12-8.2	Frequency Range 8.2-12.4GHz	AN-210	6	2003/9	2005/9
		12-12.0	Frequency Range 12.4-18GHz	AN-145	6	2003/9	2005/9
		12-18.0	Frequency Range 18GHz – 26.5GHz	AN-200	6	2002/8	2004/8

- Continued -

Equipment	Manufacturer	Model No.	Specifications	KEC Control No.	Test Item (*)	Last Cal.	Next Cal.
Power Meter	Rhode & Schwarz	E4419B	Frequency Range DC – 50GHz	VV-39	2	2003/9	2005/9
Thermal Power Sensor	Hewlett Packard	E4412A	Frequency Range 10MHz – 18GHz Diod type	VV-39-1	2	2003/9	2005/9
Precision Attenuator	Hewlett Packard	HP33340C010	Frequency Range DC – 26.5GHz typ. 10dB	AT-40-3	6	2003/1	2004/1
		HP33340C020	Frequency Range DC – 26.5GHz typ. 20dB	AT-40-4	1,2,3,4, 5,6	2003/1	2004/1
Band Eliminate Filter	MICRO-TRONICS	BRM12294	Fc=2440MHz Typ. 70dB reduce	FL-174	6	2003/2	2004/2
Low Temperature Chamber	TABAI	MC-710	Temperature -75°C - 100°C	CH-31	N/A	2003/8	2004/8
Coaxial Cable	SUHNER	SUCOFLEX	Length : 10m (SMA type)	CL-45	N/A	2003/2	2004/2
			Length : 1m (SMA type)	CL-42	6	2003/2	2004/2
			Length : 10m (SMA type)	CL-46	6	2003/2	2004/2
			Length : 1.5m (3.5mm type)	CL-620	N/A	2003/2	2004/2
			Length : 2.5m (3.5mm type)	CL-621	6	2003/8	2004/8
			Length : 0.3m (3.5mm type)	CL-619	1,2,3,4, 5,6	2003/8	2004/8

[Note]

Test Item (*):

- 1 : 6 dB Bandwidth Measurement
- 2 : Peak Output Power Measurement
- 3 : Band Edge Measurement
- 4 : Spurious RF Conducted Emission Measurement
- 5 : Power Density Measurement
- 6 : Radiated Emission Measurement
- 7 : AC Power Line Conducted Emission Measurement
- N/A : Not Applicable.

The overall program of calibration and verification of equipment is designed and operated so as to ensure that measurements made by KEC are traceable to national standards of measurement or equivalent abroad.