


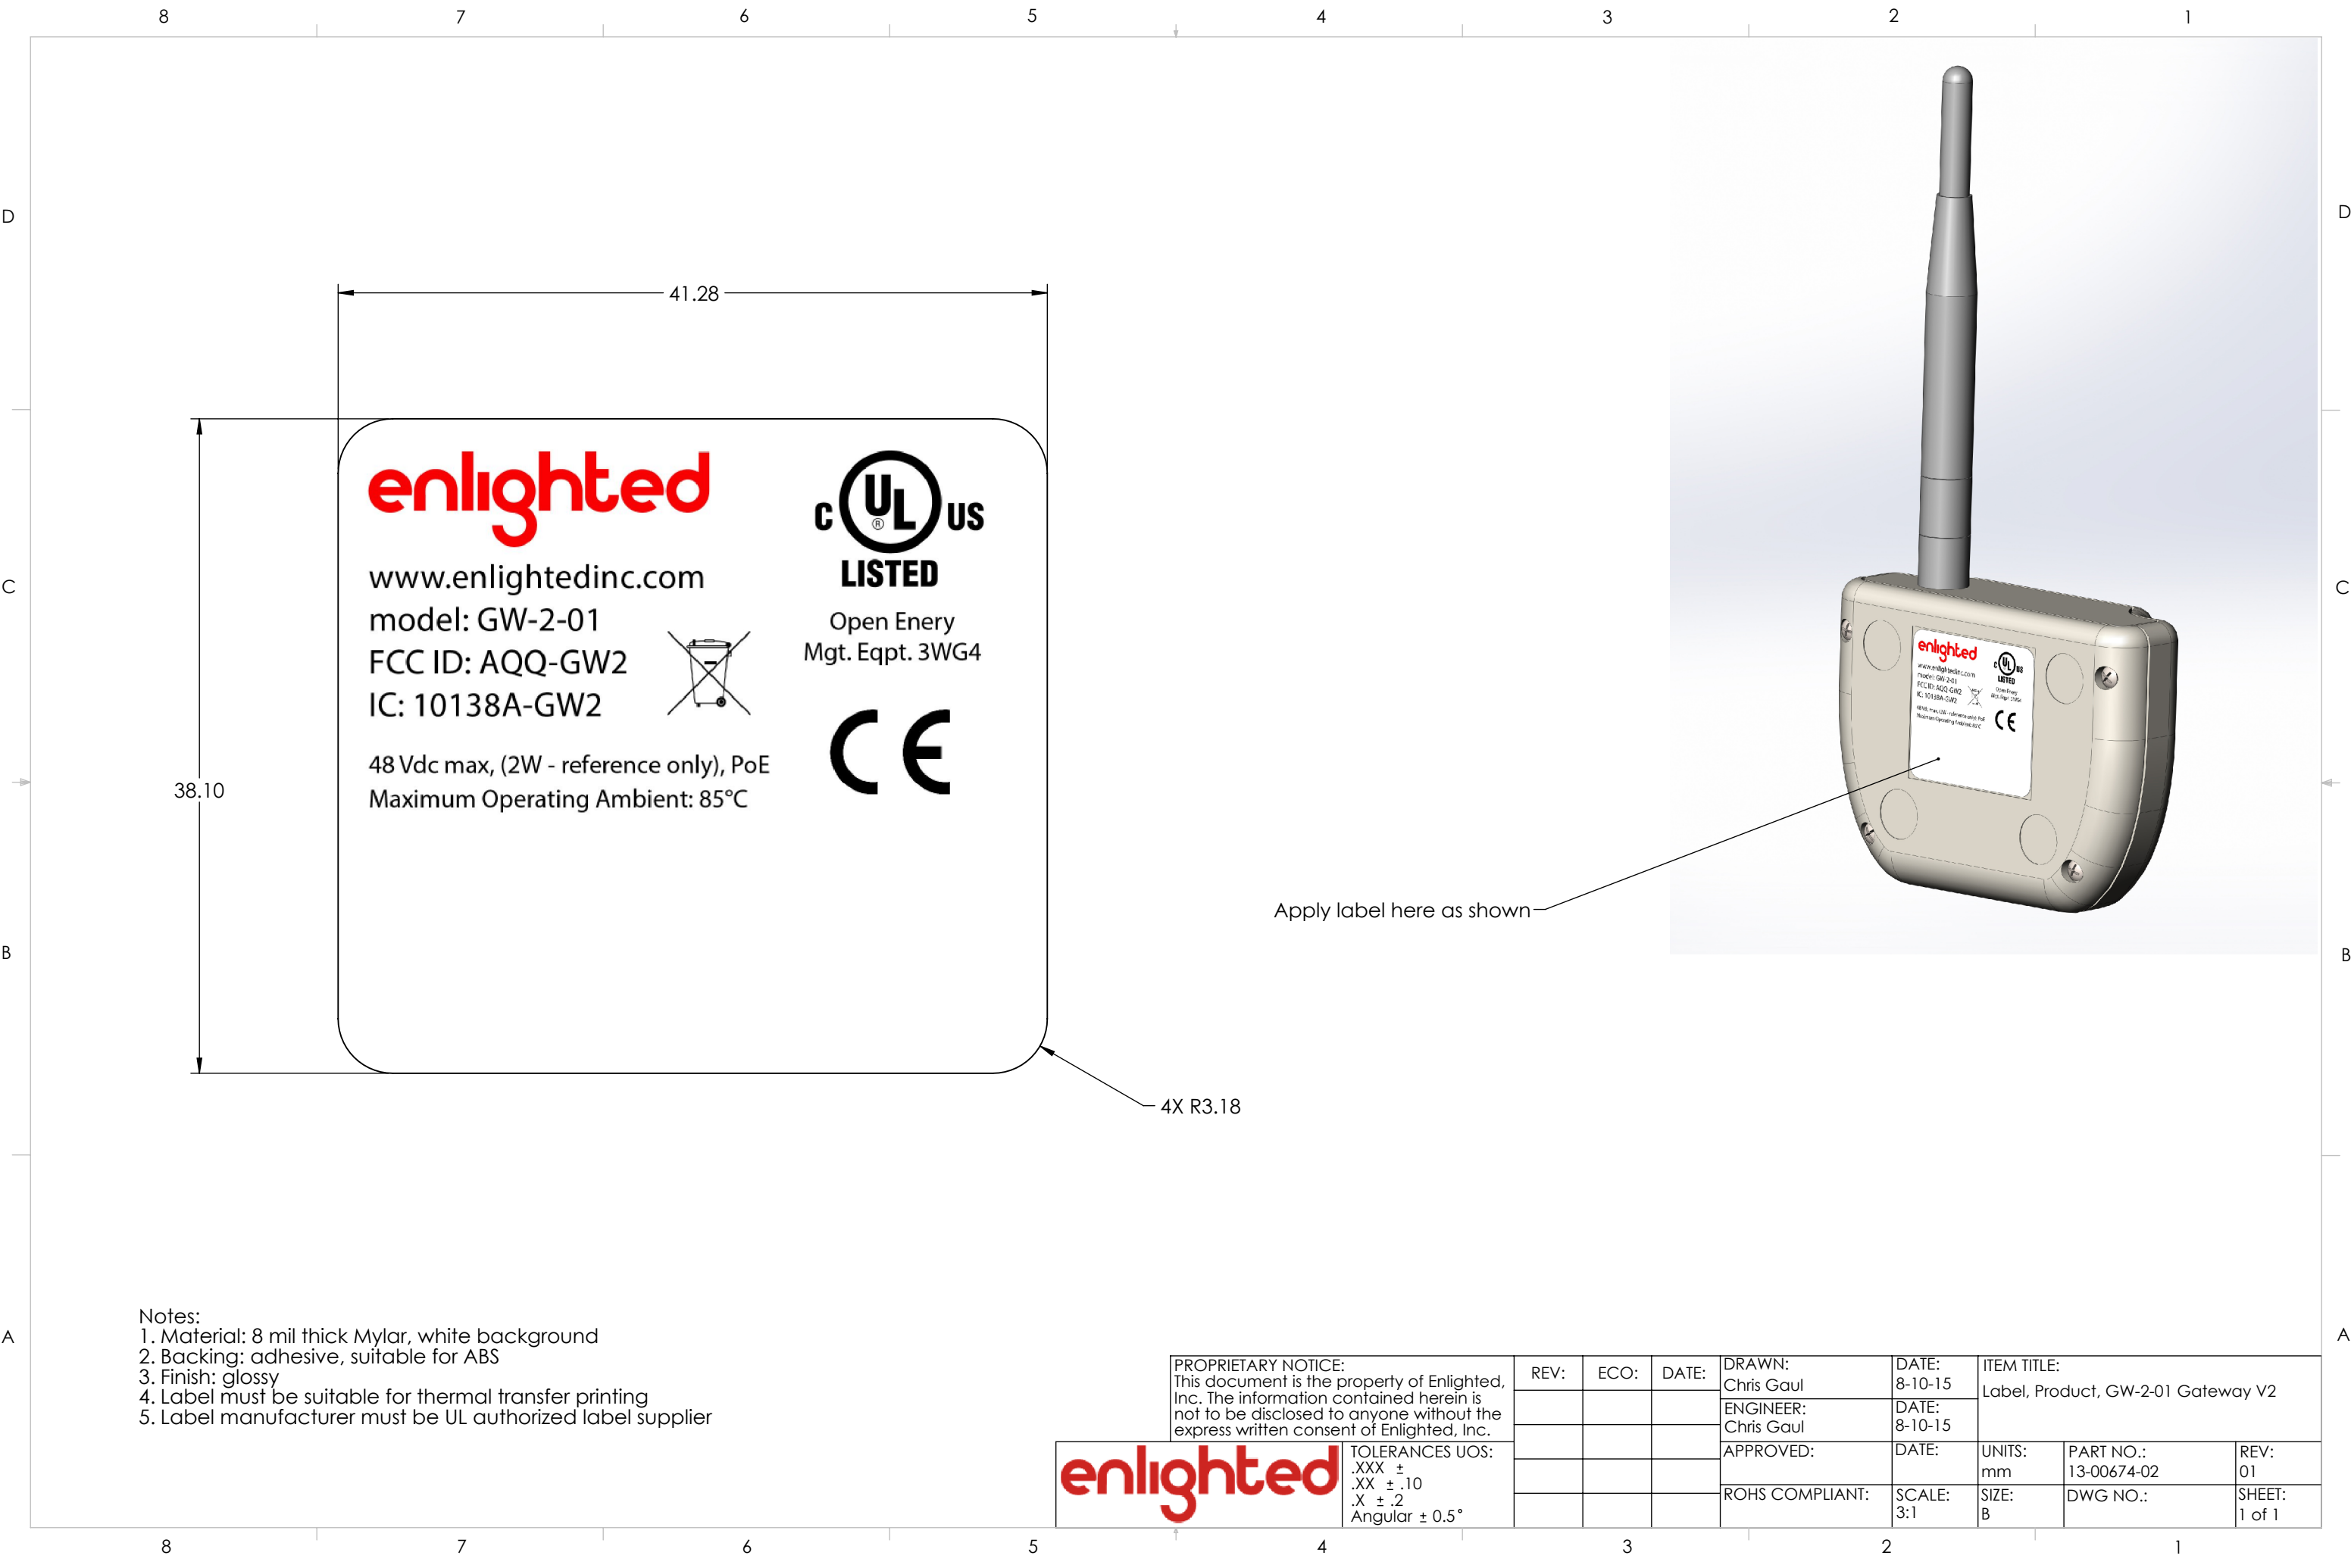

enlighted

www.enlightedinc.com

model: GW-2-01

FCC ID: AQQ-GW2

IC: 10138A-GW2



Open Energy
Mgt. Eqpt. 3WG4



48 Vdc max, (2W - reference only), PoE
Maximum Operating Ambient: 85°C

4X R3.18

Apply label here as shown



- Notes:
- 1. Material: 8 mil thick Mylar, white background
 - 2. Backing: adhesive, suitable for ABS
 - 3. Finish: glossy
 - 4. Label must be suitable for thermal transfer printing
 - 5. Label manufacturer must be UL authorized label supplier



PROPRIETARY NOTICE:
This document is the property of Enlighted, Inc. The information contained herein is not to be disclosed to anyone without the express written consent of Enlighted, Inc.

TOLERANCES UOS:
.XXX ±
.XX ± .10
.X ± .2
Angular ± 0.5°

REV:	ECO:	DATE:	DRAWN: Chris Gaul	DATE: 8-10-15	ITEM TITLE: Label, Product, GW-2-01 Gateway V2			
			ENGINEER: Chris Gaul	DATE: 8-10-15				
			APPROVED:	DATE:	UNITS: mm	PART NO.: 13-00674-02	REV: 01	
			ROHS COMPLIANT:	SCALE: 3:1	SIZE: B	DWG NO.:	SHEET: 1 of 1	