

# Enlighted, Inc.

## ADDENDUM EMC TEST REPORT TO 97329-6

**Gateway**  
**Model: GW-2-01**  
**2.4GHz Swivel Antenna-151 Model**  
**Model: S151AH-07826**

### Tested To The Following Standard:

**FCC Part 15 Subpart C Section**  
**15.247**  
**(DTS 2400-2483.5 MHz)**

**Report No.: 97329-6A**

**Date of issue: August 10, 2015**



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

## TABLE OF CONTENTS

|                                                     |    |
|-----------------------------------------------------|----|
| Administrative Information .....                    | 3  |
| Test Report Information .....                       | 3  |
| Revision History .....                              | 3  |
| Report Authorization .....                          | 3  |
| Test Facility Information .....                     | 4  |
| Software Versions .....                             | 4  |
| Site Registration & Accreditation Information ..... | 4  |
| Summary of Results .....                            | 5  |
| Modifications During Testing.....                   | 5  |
| Conditions During Testing.....                      | 5  |
| Equipment Under Test.....                           | 6  |
| FCC Part 15 Subpart C .....                         | 7  |
| 15.247(b)(3) Output Power .....                     | 7  |
| 15.247(d) Radiated Emissions & Band Edge .....      | 12 |
| Supplemental Information.....                       | 38 |
| Emissions Test Details.....                         | 38 |

## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

Enlighted, Inc.  
930 Benecia Ave.  
Sunnyvale, CA 94085

**REPORT PREPARED BY:**

Joyce Walker  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

REPRESENTATIVE: Deepak Kumar  
Customer Reference Number: 0002568

Project Number: 97329

**DATE OF EQUIPMENT RECEIPT:**

July 6, 2015

**DATE(S) OF TESTING:**

July 6-8, 2015

### Revision History

**Original:** Testing of the Gateway Model: GW-2-01, 2.4GHz Swivel Antenna-151 Model, Model: S151AH-07826 to FCC Part 15 Subpart C Section 15.247 (DTS 2400-2483.5 MHz).

**Addendum A:** The addendum is to clarify the resolution bandwidth used during testing for 1-25GHz.

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



**Steve Behm**  
**Director of Quality Assurance & Engineering Services**  
**CKC Laboratories, Inc.**

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
1120 Fulton Place  
Fremont, CA 94539

## Software Versions

| CKC Laboratories Proprietary Software | Version |
|---------------------------------------|---------|
| EMITest Emissions                     | 5.02.00 |
| EMITest Immunity                      | 5.02.00 |

## Site Registration & Accreditation Information

| Location | CB #   | TAIWAN         | CANADA  | FCC    | JAPAN  |
|----------|--------|----------------|---------|--------|--------|
| Fremont  | US0082 | SL2-IN-E-1148R | 3082B-1 | 958979 | A-0149 |

## SUMMARY OF RESULTS

### Standard / Specification: FCC Part 15 Subpart C

| Test Procedure | Description                        | Modifications | Results |
|----------------|------------------------------------|---------------|---------|
| 15.247(a)(2)   | 6dB Bandwidth                      | NA            | NP      |
| 15.247(b)(3)   | Output Power                       | NA            | Pass    |
| 15.247(e)      | Power Spectral Density             | NA            | NP      |
| 15.247(d)      | RF Conducted Emissions & Band Edge | NA            | NP      |
| 15.247(d)      | Radiated Emissions & Band Edge     | NA            | Pass    |

NA = Not applicable.

NP = Not performed because the data included in this report comprises a supplemental demonstration of continued compliance for the equipment identified herein. Only those tests which were determined to be necessary are included.

### Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

| Summary of Conditions                      |
|--------------------------------------------|
| No modifications were made during testing. |

Modifications listed above must be incorporated into all production units.

### Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

| Summary of Conditions                                                                          |
|------------------------------------------------------------------------------------------------|
| Partial testing is being performed on a previously tested EUT because the antenna has changed. |

## EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration 1

#### *Equipment Tested:*

| Device                          | Manufacturer    | Model #      | S/N          |
|---------------------------------|-----------------|--------------|--------------|
| Gateway                         | Enlighted, Inc. | GW-2-01      | 6854F5FFF245 |
| 2.4GHz Swivel Antenna-151 Model | NEARSON         | S151AH-07826 | NA           |

#### *Support Equipment:*

| Device                                   | Manufacturer | Model #           | S/N                |
|------------------------------------------|--------------|-------------------|--------------------|
| AC/ DC Adaptor for Laptop                | Lenovo       | 42T4434           | NA                 |
| Laptop                                   | Lenovo       | T420              | NA                 |
| AC/DC Power Adapter for Prosafe          | NETGEAR      | NU60-F480125-I1NN | 24143018110290054N |
| Prosafe 8 port10/100Mbps Switch with PoE | NETGEAR      | FS108p            | 3BN14871809C2      |

## FCC PART 15 SUBPART C

### 15.247(b)(3) Output Power

#### Test Conditions / Setup / Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **Enlighted, Inc.**  
 Specification: **15.247(b) Power Output (2400-2483.5 MHz DTS)**  
 Work Order #: **97329** Date: 7/6/2015  
 Test Type: **Conducted Power Measurement** Time: 17:32:04  
 Tested By: Hieu Song Nguyenpham Sequence#: 2  
 Software: EMITest 5.02.00

#### Equipment Tested:

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

#### Support Equipment:

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |


#### Test Conditions / Notes:

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Fundamental of the EUT</p> <p>Application: PuTTY version 0.64 for Zigbee</p> <p>Temperature: 22.7°C</p> <p>Humidity: 46 %</p> <p>Atmospheric Pressure: 100.3 kPa</p> <p>High Clock: 16MHz</p> <p>Transmitting operating frequency= 2.4GHz Band</p> <p>Gain of the antenna for Zigbee= 5dBi</p> <p>Number of Channel=16</p> <p>Method: 558074 D01 DTS Meas Guidance v03r02 section 9.1.1</p> <p>The EUT is placed and connected straight to the spectrum analyzer. It is powered through an Ethernet cable. The transmitter is in continuous Tx Mode fully modulated. The Ethernet port is connected to passive power over Ethernet device. The debug port is connected to the laptop via serial to an USB adapter to control the EUT for testing purpose.</p> <p>RBW=3MHz</p> <p>VBW =8MHz</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Test Equipment:**


| ID | Asset #/Serial # | Description                 | Model    | Calibration Date | Cal Due Date |
|----|------------------|-----------------------------|----------|------------------|--------------|
| T1 | ANP01211         | Attenuator                  | 23-10-34 | 3/31/2015        | 3/31/2017    |
|    | AN03471          | RF Characteristics Analyzer | E4440A   | 12/19/2013       | 12/19/2015   |

Enlighted, Inc WO#: 97329 Sequence#: 2 Date: 7/6/2015  
15.247(b) Power Output (2400-2483.5 MHz DTS) Test Distance: None None

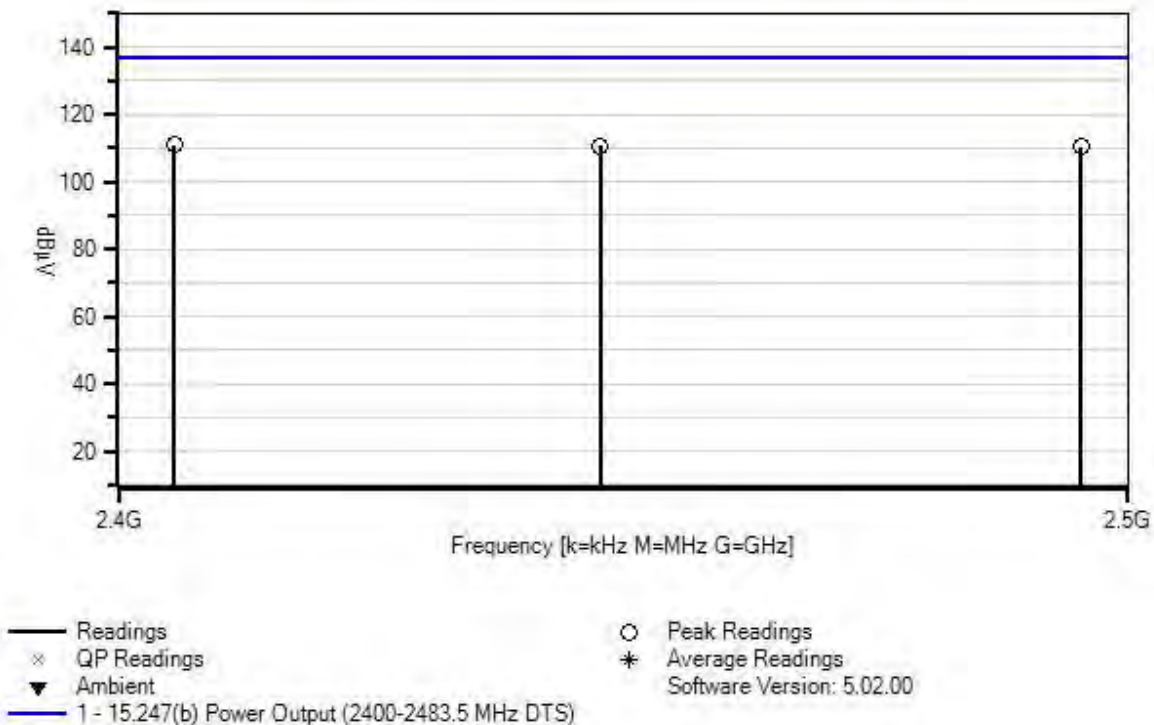


Convert equivalent electric field strength to the resultant power level


| Frequency (MHz) | Measured Power in Watt | Power Limit in Watt | Pass/Fail |
|-----------------|------------------------|---------------------|-----------|
| Low Channel     | 0.002511886            | 1.00                | Pass      |
| Middle Channel  | 0.002398833            | 1.00                | Pass      |
| High Channel    | 0.002187762            | 1.00                | Pass      |

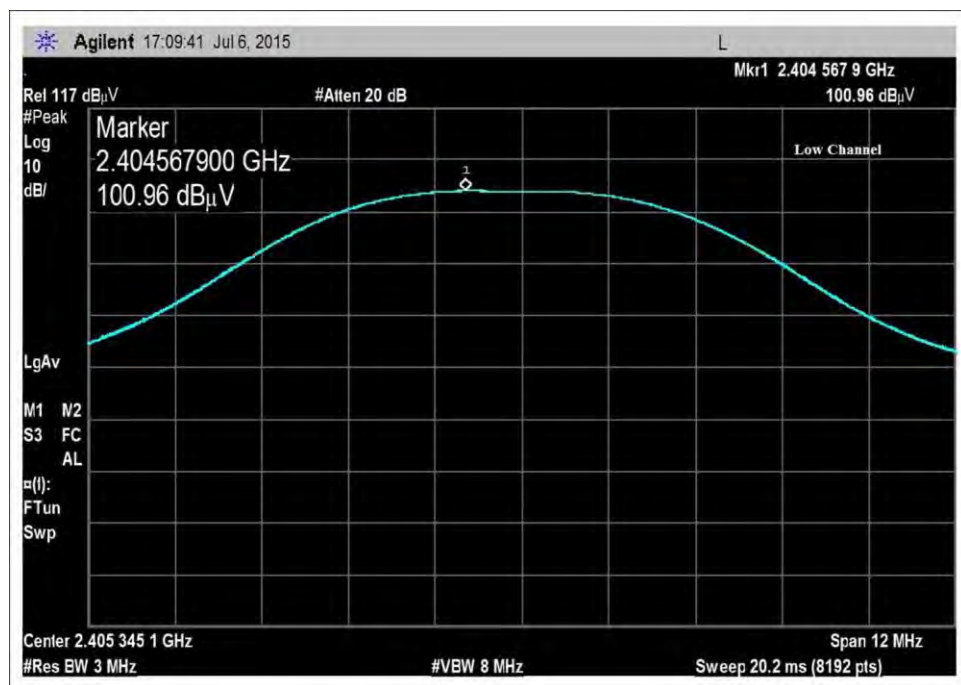

Low Channel

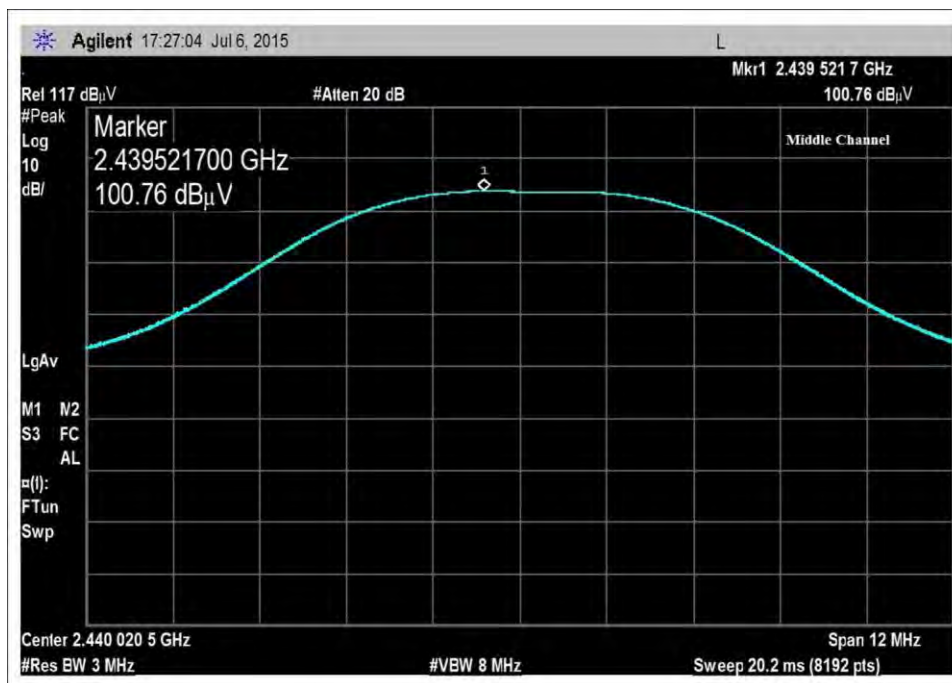


Middle Channel

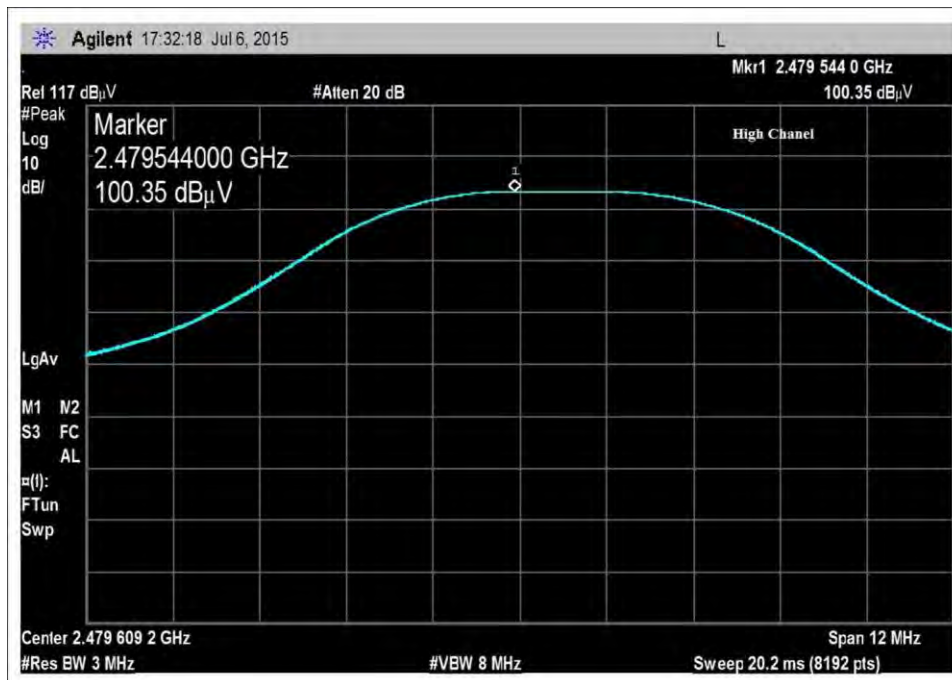

High Channel

## Test Setup Photos

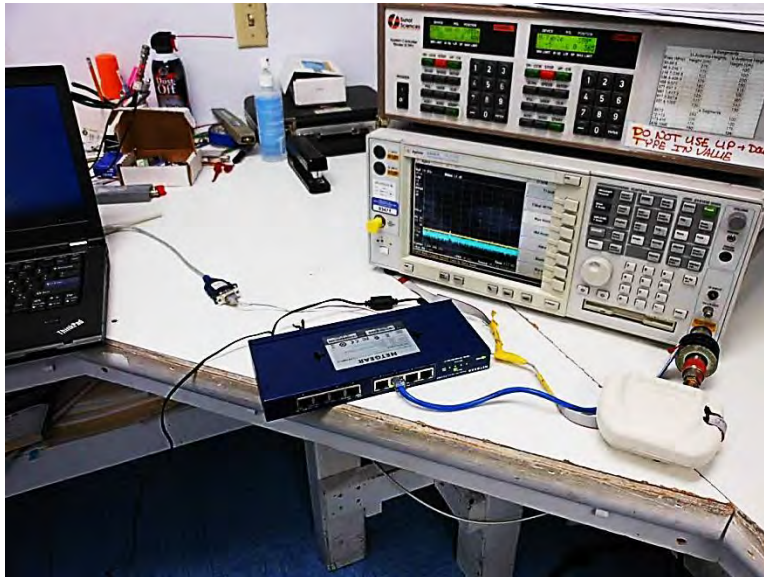

## 15.247(d) Radiated Emissions & Band Edge

### Test Conditions / Setup / Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **Enlighted, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **97329** Date: 7/8/2015  
 Test Type: **Radiated Measurement** Time: 10:39:57  
 Tested By: Hieu Song Nguyenpham Sequence#: 42  
 Software: EMITest 5.02.00

#### Equipment Tested:

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

#### Support Equipment:


| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

#### Test Conditions / Notes:

Radiated Emission  
 Frequency Range: 9kHz to 1000MHz  
  
 Application: PuTTY version 0.64 for Zigbee  
  
 Temperature: 22.7°C  
 Humidity: 46 %  
 Atmospheric Pressure: 100.3 kPa  
  
 High Clock: 16MHz  
 Transmitting operating frequency= 2.4GHz Band  
 Gain of the antenna for Zigbee= 5dBi  
 Number of Channel=16  
 Method: KDB 558074 v03r02 section 12.1 and ANSI C63.4 2009  
  
 Frequency range of measurement = 9kHz - 1GHz.  
 9kHz - 150kHz RBW=200Hz VBW=200Hz  
 150kHz - 30MHz RBW=9kHz VBW=9kHz  
 30MHz - 1000MHz RBW=120kHz VBW=120kHz  
  
 The EUT is placed on an 80cm Styrofoam table. It is powered through an Ethernet cable. The transmitter is in continuous Tx Mode fully modulated. The Ethernet port is connected to passive power over Ethernet device which is outside the chamber. The debug port is connected to the laptop which also is outside the chamber via serial to an USB adapter to control the EUT for testing purpose.

#### Low Channel

Enlighted, Inc WO#: 97329 Sequence#: 42 Date: 7/8/2015  
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Vert

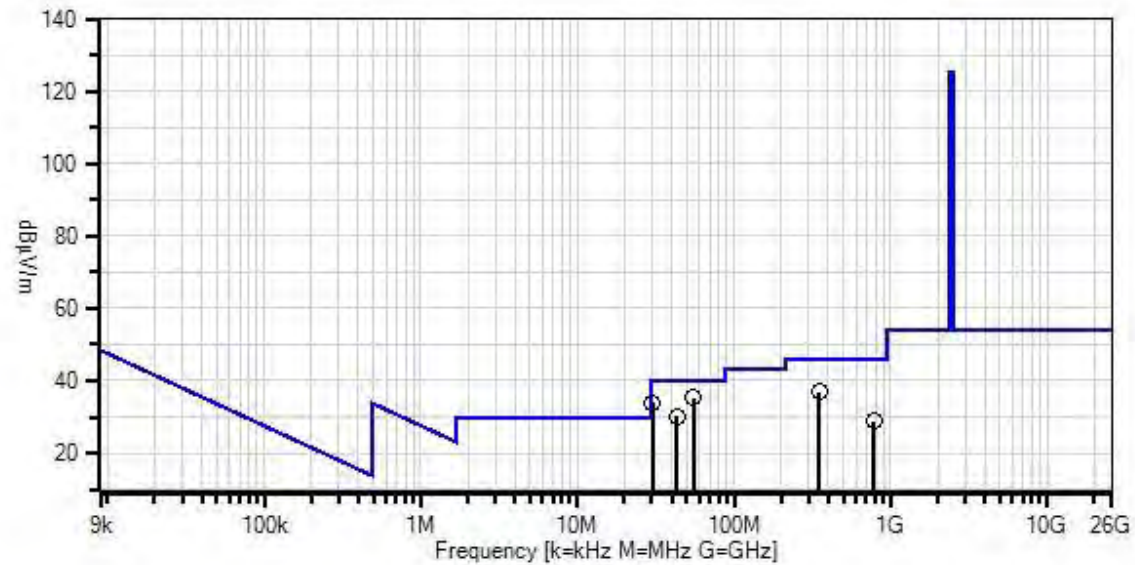

— Readings  
× QP Readings  
▼ Ambient  
— 1 - 15.247(d) / 15.209 Radiated Spurious Emissions

○ Peak Readings  
\* Average Readings  
Software Version: 5.02.00

**Test Equipment:**

| ID | Asset #/Serial # | Description                 | Model         | Calibration Date | Cal Due Date |
|----|------------------|-----------------------------|---------------|------------------|--------------|
| T1 | AN00686          | Preamp                      | 8447D Opt 010 | 5/27/2014        | 5/27/2016    |
|    | AN00432          | Loop Antenna                | 6502          | 5/8/2015         | 5/8/2017     |
| T2 | AN00852          | Biconilog Antenna           | CBL 6111C     | 11/24/2014       | 11/24/2016   |
| T3 | ANP00880         | Cable                       | RG214U        | 6/13/2014        | 6/13/2016    |
| T4 | ANP01183         | Cable                       | CNT-195       | 9/3/2013         | 9/3/2015     |
| T5 | ANP06691         | Cable                       | PE3062-180    | 8/8/2014         | 8/8/2016     |
|    | AN03471          | RF Characteristics Analyzer | E4440A        | 12/19/2013       | 12/19/2015   |

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq     | Rdng       | T1<br>T5      | T2    | T3   | T4   | Dist  | Corr         | Spec         | Margin | Polar |
|---|----------|------------|---------------|-------|------|------|-------|--------------|--------------|--------|-------|
|   | MHz      | dB $\mu$ V | dB            | dB    | dB   | dB   | Table | dB $\mu$ V/m | dB $\mu$ V/m | dB     | Ant   |
| 1 | 55.488M  | 56.2       | -29.3<br>+0.2 | +7.4  | +0.6 | +0.2 | +0.0  | 35.3         | 40.0         | -4.7   | Vert  |
| 2 | 30.333M  | 43.9       | -29.4<br>+0.2 | +18.7 | +0.4 | +0.2 | +0.0  | 34.0         | 40.0         | -6.0   | Vert  |
| 3 | 350.002M | 47.2       | -28.6<br>+0.7 | +15.0 | +1.8 | +0.7 | +0.0  | 36.8         | 46.0         | -9.2   | Vert  |
| 4 | 43.509M  | 46.3       | -29.3<br>+0.2 | +12.1 | +0.6 | +0.3 | +0.0  | 30.2         | 40.0         | -9.8   | Vert  |
| 5 | 785.557M | 31.1       | -29.5<br>+1.3 | +21.7 | +2.9 | +1.2 | +0.0  | 28.7         | 46.0         | -17.3  | Horiz |

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **Enlighted, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **97329** Date: 7/7/2015  
 Test Type: **Radiated Measurement** Time: 09:59:52  
 Tested By: Hieu Song Nguyenpham Sequence#: 10  
 Software: EMITest 5.02.00

***Equipment Tested:***

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |


***Support Equipment:***

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

***Test Conditions / Notes:***

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Radiated Emission<br/>         Frequency Range: 1000MHz to 25000MHz</p> <p>Application: PuTTY version 0.64 for Zigbee</p> <p>Temperature: 22.7°C<br/>         Humidity: 46 %<br/>         Atmospheric Pressure: 100.3 kPa</p> <p>High Clock: 16MHz<br/>         Transmitting operating frequency= 2.4GHz Band<br/>         Gain of the antenna for Zigbee= 5dBi<br/>         Number of Channel=16<br/>         Method: KDB 558074 v03r02 section 12.1 and ANSI C63.10 (2009)<br/>         RBW=VBW=1MHz</p> <p>The EUT is placed on an 80cm Styrofoam table. It is powered through an Ethernet cable. The transmitter is in continuous Tx Mode fully modulated. The Ethernet port is connected to passive power over Ethernet device which is outside the chamber. The debug port is connected to the laptop which also is outside the chamber via serial to an USB adapter to control the EUT for testing purpose.</p> <p><b>Low Channel</b></p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Enlighted, Inc WO#: 97329 Sequence#: 10 Date: 7/7/2015  
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Vert

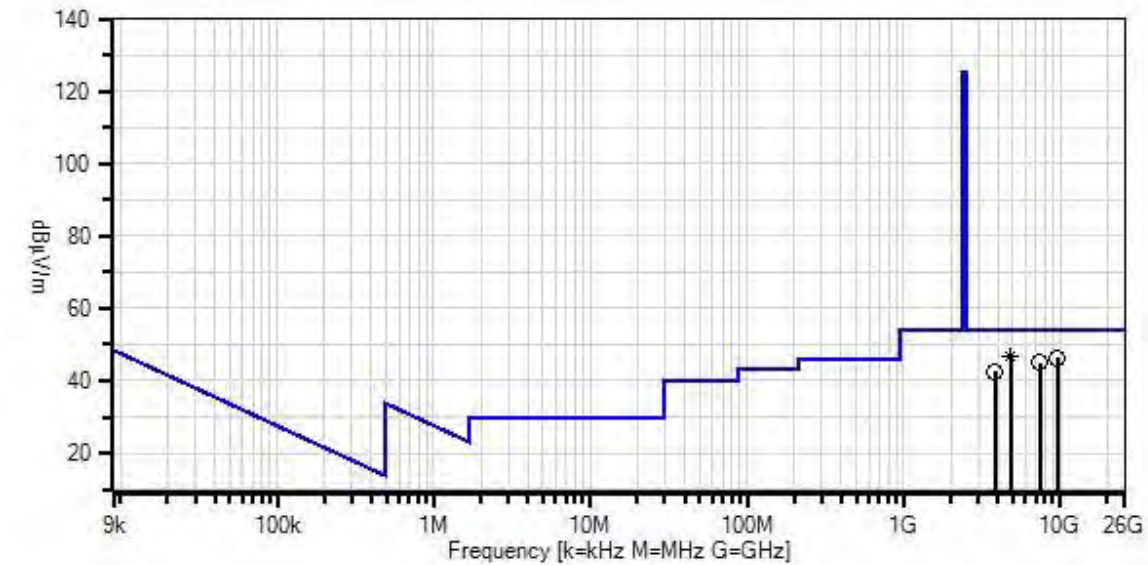

— Readings  
× QP Readings  
▼ Ambient  
○ Peak Readings  
\* Average Readings  
Software Version: 5.02.00

1 - 15.247(d) / 15.209 Radiated Spurious Emissions

**Test Equipment:**

| ID | Asset #/Serial # | Description                         | Model                     | Calibration Date | Cal Due Date |
|----|------------------|-------------------------------------|---------------------------|------------------|--------------|
| T1 | AN02157          | Horn Antenna-ANSI C63.5 Calibration | 3115                      | 12/2/2014        | 12/2/2016    |
| T2 | AN03302          | Cable                               | 32026-29094K-29094K-72TC  | 3/24/2014        | 3/24/2016    |
| T3 | AN03114          | Preamp                              | AMF-7D-00101800-30-10P    | 4/22/2015        | 4/22/2017    |
| T4 | AN03143          | Cable                               | 32022-29094K-144TC        | 3/18/2015        | 3/18/2017    |
|    | ANP00928         | Cable                               | various                   | 1/23/2014        | 1/23/2016    |
|    | ANP00929         | Cable                               | various                   | 1/23/2014        | 1/23/2016    |
| T5 | ANP06126         | Cable                               | 32022-29094K-29094K-168TC | 3/18/2015        | 3/18/2017    |
| T6 | ANP06712         | Cable                               | 32022-29094K-29094K-48TC  | 9/18/2014        | 9/18/2016    |
| T7 | AN03309          | High Pass Filter                    | 11SH10-3000/T10000-O/O    | 4/2/2014         | 4/2/2016     |
|    | AN03471          | RF Characteristics Analyzer         | E4440A                    | 12/19/2013       | 12/19/2015   |
|    | AN02693          | Active Horn Antenna-ANSI C63.5 3m   | AMFW-5F-12001800-20-10P   | 5/6/2015         | 5/6/2017     |
|    | AN02694          | Horn Antenna-ANSI C63.5 3m          | AMFW-5F-18002650-20-10P   | 5/7/2015         | 5/7/2017     |

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq      | Rdng       | T1    | T2   | T3    | T4   | Dist  | Corr         | Spec         | Margin | Polar |
|---|-----------|------------|-------|------|-------|------|-------|--------------|--------------|--------|-------|
|   | MHz       | dB $\mu$ V | T5    | T6   | T7    |      | Table | dB $\mu$ V/m | dB $\mu$ V/m | dB     | Ant   |
| 1 | 4811.305M | 61.6       | +33.2 | +1.7 | -57.8 | +2.9 | +0.0  | 46.5         | 54.0         | -7.5   | Vert  |
|   | Ave       |            | +3.6  | +1.1 | +0.2  |      |       |              |              |        |       |
| ^ | 4811.305M | 68.7       | +33.2 | +1.7 | -57.8 | +2.9 | +0.0  | 53.6         | 54.0         | -0.4   | Vert  |
|   |           |            | +3.6  | +1.1 | +0.2  |      |       |              |              |        |       |
| 3 | 9652.168M | 51.1       | +38.7 | +2.4 | -57.3 | +4.3 | +0.0  | 46.3         | 54.0         | -7.7   | Vert  |
|   |           |            | +5.3  | +1.6 | +0.2  |      |       |              |              |        |       |
| 4 | 7394.243M | 54.6       | +36.6 | +2.1 | -58.3 | +3.7 | +0.0  | 44.9         | 54.0         | -9.1   | Horiz |
|   |           |            | +4.6  | +1.4 | +0.2  |      |       |              |              |        |       |
| 5 | 3840.025M | 60.7       | +32.5 | +1.5 | -58.9 | +2.5 | +0.0  | 42.6         | 54.0         | -11.4  | Vert  |
|   |           |            | +3.1  | +0.9 | +0.3  |      |       |              |              |        |       |

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **Enlighted, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **97329** Date: 7/8/2015  
 Test Type: **Radiated Measurement** Time: 11:01:39  
 Tested By: Hieu Song Nguyenpham Sequence#: 45  
 Software: EMITest 5.02.00

**Equipment Tested:**

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |


**Support Equipment:**

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

**Test Conditions / Notes:**

|                                                                                                                                                                                                                                                                                                                                                                                                      |            |            |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|--|
| Radiated Emission                                                                                                                                                                                                                                                                                                                                                                                    |            |            |  |
| Frequency Range: 9kHz to 1000MHz                                                                                                                                                                                                                                                                                                                                                                     |            |            |  |
| Application: PuTTY version 0.64 for Zigbee                                                                                                                                                                                                                                                                                                                                                           |            |            |  |
| Temperature: 22.7C                                                                                                                                                                                                                                                                                                                                                                                   |            |            |  |
| Humidity: 46 %                                                                                                                                                                                                                                                                                                                                                                                       |            |            |  |
| Atmospheric Pressure: 100.3 kPa                                                                                                                                                                                                                                                                                                                                                                      |            |            |  |
| High Clock: 16MHz                                                                                                                                                                                                                                                                                                                                                                                    |            |            |  |
| Transmitting operating frequency= 2.4GHz Band                                                                                                                                                                                                                                                                                                                                                        |            |            |  |
| Gain of the antenna for Zigbee= 5dBi                                                                                                                                                                                                                                                                                                                                                                 |            |            |  |
| Number of Channel=16                                                                                                                                                                                                                                                                                                                                                                                 |            |            |  |
| Method: KDB 558074 v03r02 section 12.1 and ANSI C63.4 2009                                                                                                                                                                                                                                                                                                                                           |            |            |  |
| Frequency range of measurement = 9 kHz- 1GHz.                                                                                                                                                                                                                                                                                                                                                        |            |            |  |
| 9kHz - 150kHz                                                                                                                                                                                                                                                                                                                                                                                        | RBW=200Hz  | VBW=200Hz  |  |
| 150kHz - 30MHz                                                                                                                                                                                                                                                                                                                                                                                       | RBW=9kHz   | VBW=9kHz   |  |
| 30MHz - 1000MHz                                                                                                                                                                                                                                                                                                                                                                                      | RBW=120kHz | VBW=120kHz |  |
| The EUT is placed on an 80cm Styrofoam table. It is powered through an Ethernet cable. The transmitter is in continuous Tx Mode fully modulated. The Ethernet port is connected to passive power over Ethernet device which is outside the chamber. The debug port is connected to the laptop which also is outside the chamber via serial to an USB adapter to control the EUT for testing purpose. |            |            |  |
| <b>Middle Channel</b>                                                                                                                                                                                                                                                                                                                                                                                |            |            |  |

Enlighted, Inc WO#: 97329 Sequence#: 45 Date: 7/8/2015  
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Vert

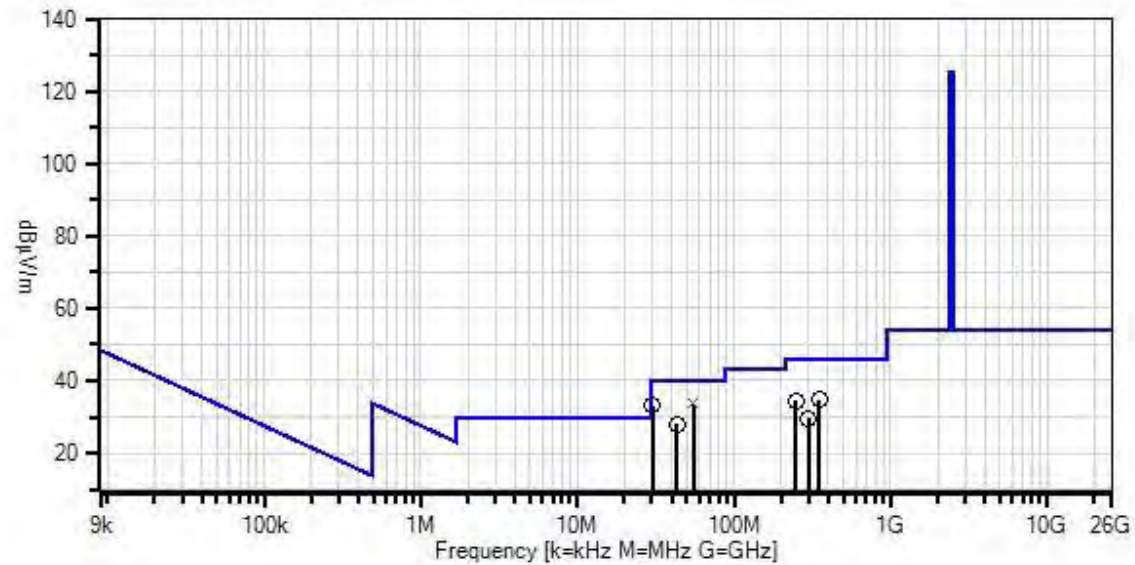

— Readings  
× QP Readings  
▼ Ambient  
— 1 - 15.247(d) / 15.209 Radiated Spurious Emissions

○ Peak Readings  
\* Average Readings  
Software Version: 5.02.00

**Test Equipment:**

| ID | Asset #/Serial # | Description                 | Model         | Calibration Date | Cal Due Date |
|----|------------------|-----------------------------|---------------|------------------|--------------|
| T1 | AN00686          | Preamp                      | 8447D Opt 010 | 5/27/2014        | 5/27/2016    |
|    | AN00432          | Loop Antenna                | 6502          | 5/8/2015         | 5/8/2017     |
| T2 | AN00852          | Biconilog Antenna           | CBL 6111C     | 11/24/2014       | 11/24/2016   |
| T3 | ANP00880         | Cable                       | RG214U        | 6/13/2014        | 6/13/2016    |
| T4 | ANP01183         | Cable                       | CNT-195       | 9/3/2013         | 9/3/2015     |
| T5 | ANP06691         | Cable                       | PE3062-180    | 8/8/2014         | 8/8/2016     |
|    | AN03471          | RF Characteristics Analyzer | E4440A        | 12/19/2013       | 12/19/2015   |

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq     | Rdng       | T1<br>T5      | T2    | T3   | T4   | Dist  | Corr         | Spec         | Margin | Polar |
|---|----------|------------|---------------|-------|------|------|-------|--------------|--------------|--------|-------|
|   | MHz      | dB $\mu$ V | dB            | dB    | dB   | dB   | Table | dB $\mu$ V/m | dB $\mu$ V/m | dB     | Ant   |
| 1 | 55.459M  | 54.5       | -29.3<br>+0.2 | +7.5  | +0.6 | +0.2 | +0.0  | 33.7         | 40.0         | -6.3   | Vert  |
| ^ | 55.459M  | 59.1       | -29.3<br>+0.2 | +7.5  | +0.6 | +0.2 | +0.0  | 38.3         | 40.0         | -1.7   | Vert  |
| 3 | 30.042M  | 42.7       | -29.4<br>+0.2 | +18.9 | +0.4 | +0.3 | +0.0  | 33.1         | 40.0         | -6.9   | Vert  |
| 4 | 350.090M | 45.2       | -28.6<br>+0.7 | +15.0 | +1.8 | +0.7 | +0.0  | 34.8         | 46.0         | -11.2  | Vert  |
| 5 | 249.985M | 47.5       | -28.5<br>+0.6 | +12.8 | +1.5 | +0.7 | +0.0  | 34.6         | 46.0         | -11.4  | Horiz |
| 6 | 43.509M  | 44.2       | -29.3<br>+0.2 | +12.1 | +0.6 | +0.3 | +0.0  | 28.1         | 40.0         | -11.9  | Vert  |
| 7 | 300.038M | 41.8       | -28.4<br>+0.7 | +13.3 | +1.7 | +0.6 | +0.0  | 29.7         | 46.0         | -16.3  | Horiz |

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **Enlighted, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **97329** Date: 7/7/2015  
 Test Type: **Radiated Measurement** Time: 10:36:52  
 Tested By: Hieu Song Nguyenpham Sequence#: 13  
 Software: EMITest 5.02.00

***Equipment Tested:***

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |


***Support Equipment:***

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

***Test Conditions / Notes:***

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Radiated Emission<br/>         Frequency Range: 1000MHz to 25000MHz</p> <p>Application: PuTTY version 0.64 for Zigbee</p> <p>Temperature: 22.7°C<br/>         Humidity: 46 %<br/>         Atmospheric Pressure: 100.3 kPa</p> <p>High Clock: 16MHz<br/>         Transmitting operating frequency= 2.4GHz Band<br/>         Gain of the antenna for Zigbee= 5dBi<br/>         Number of Channel=16<br/>         Method: KDB 558074 v03r02 section 12.1 and ANSI C63.10 (2009)<br/>         RBW=VBW=1MHz</p> <p>The EUT is placed on an 80cm Styrofoam table. It is powered through an Ethernet cable. The transmitter is in continuous Tx Mode fully modulated. The Ethernet port is connected to passive power over Ethernet device which is outside the chamber. The debug port is connected to the laptop which also is outside the chamber via serial to an USB adapter to control the EUT for testing purpose.</p> <p><b>Middle Channel</b></p> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Enlighted, Inc WO#: 97329 Sequence#: 13 Date: 7/7/2015  
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Vert

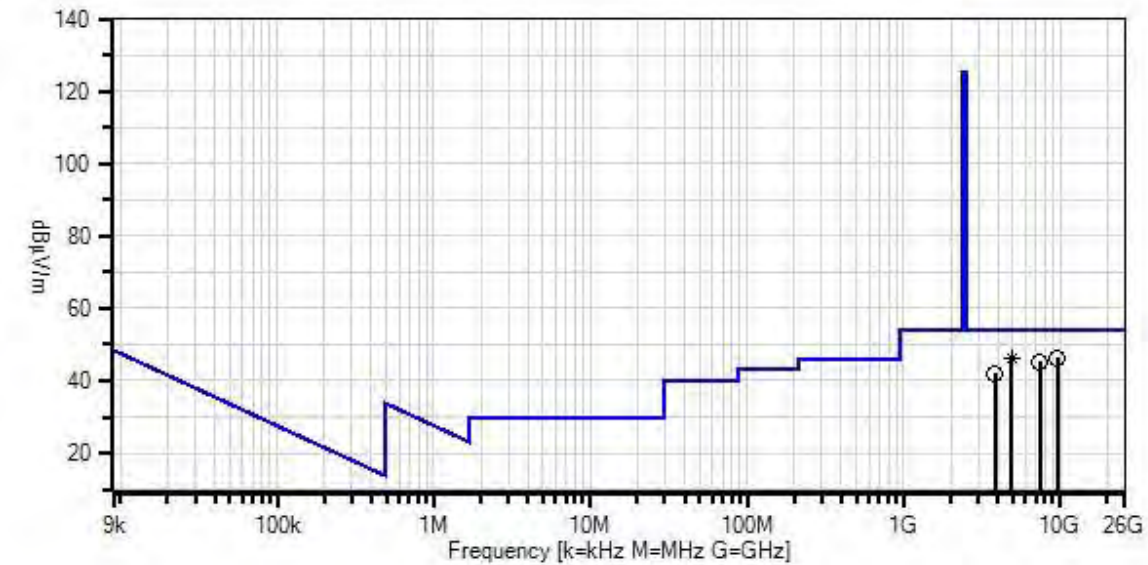

— Readings  
× QP Readings  
▼ Ambient  
— 1 - 15.247(d) / 15.209 Radiated Spurious Emissions

○ Peak Readings  
\* Average Readings  
Software Version: 5.02.00

**Test Equipment:**

| ID | Asset #/Serial # | Description                         | Model                     | Calibration Date | Cal Due Date |
|----|------------------|-------------------------------------|---------------------------|------------------|--------------|
| T1 | AN02157          | Horn Antenna-ANSI C63.5 Calibration | 3115                      | 12/2/2014        | 12/2/2016    |
| T2 | AN03302          | Cable                               | 32026-29094K-29094K-72TC  | 3/24/2014        | 3/24/2016    |
| T3 | AN03114          | Preamp                              | AMF-7D-00101800-30-10P    | 4/22/2015        | 4/22/2017    |
| T4 | AN03143          | Cable                               | 32022-29094K-144TC        | 3/18/2015        | 3/18/2017    |
|    | ANP00928         | Cable                               | various                   | 1/23/2014        | 1/23/2016    |
|    | ANP00929         | Cable                               | various                   | 1/23/2014        | 1/23/2016    |
| T5 | ANP06126         | Cable                               | 32022-29094K-29094K-168TC | 3/18/2015        | 3/18/2017    |
| T6 | ANP06712         | Cable                               | 32022-29094K-29094K-48TC  | 9/18/2014        | 9/18/2016    |
| T7 | AN03309          | High Pass Filter                    | 11SH10-3000/T10000-O/O    | 4/2/2014         | 4/2/2016     |
|    | AN03471          | RF Characteristics Analyzer         | E4440A                    | 12/19/2013       | 12/19/2015   |
|    | AN02693          | Active Horn Antenna-ANSI C63.5 3m   | AMFW-5F-12001800-20-10P   | 5/6/2015         | 5/6/2017     |
|    | AN02694          | Horn Antenna-ANSI C63.5 3m          | AMFW-5F-18002650-20-10P   | 5/7/2015         | 5/7/2017     |

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq      | Rdng | T1    | T2   | T3    | T4   | Dist  | Corr   | Spec   | Margin | Polar |
|---|-----------|------|-------|------|-------|------|-------|--------|--------|--------|-------|
|   | MHz       | dBμV | T5    | T6   | T7    |      | Table | dBμV/m | dBμV/m | dB     | Ant   |
| 1 | 9652.168M | 51.0 | +38.7 | +2.4 | -57.3 | +4.3 | +0.0  | 46.2   | 54.0   | -7.8   | Vert  |
|   |           |      | +5.3  | +1.6 | +0.2  |      |       |        |        |        |       |
| 2 | 4881.422M | 60.9 | +33.4 | +1.7 | -57.6 | +2.9 | +0.0  | 46.2   | 54.0   | -7.8   | Vert  |
|   | Ave       |      | +3.6  | +1.1 | +0.2  |      |       |        |        |        |       |
| ^ | 4881.422M | 68.2 | +33.4 | +1.7 | -57.6 | +2.9 | +0.0  | 53.5   | 54.0   | -0.5   | Vert  |
|   |           |      | +3.6  | +1.1 | +0.2  |      |       |        |        |        |       |
| 4 | 7416.610M | 54.8 | +36.6 | +2.1 | -58.2 | +3.7 | +0.0  | 45.2   | 54.0   | -8.8   | Vert  |
|   |           |      | +4.6  | +1.4 | +0.2  |      |       |        |        |        |       |
| 5 | 3840.025M | 60.2 | +32.5 | +1.5 | -58.9 | +2.5 | +0.0  | 42.1   | 54.0   | -11.9  | Vert  |
|   |           |      | +3.1  | +0.9 | +0.3  |      |       |        |        |        |       |

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **Enlighted, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **97329** Date: 7/8/2015  
 Test Type: **Radiated Measurement** Time: 11:21:27  
 Tested By: Hieu Song Nguyenpham Sequence#: 48  
 Software: EMITest 5.02.00

**Equipment Tested:**

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |


**Support Equipment:**

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

**Test Conditions / Notes:**

|                                                                                                                                                                                                                                                                                                                                                                                                      |            |            |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|--|
| Radiated Emission                                                                                                                                                                                                                                                                                                                                                                                    |            |            |  |
| Frequency Range: 9kHz to 1000MHz                                                                                                                                                                                                                                                                                                                                                                     |            |            |  |
| Application: PuTTY version 0.64 for Zigbee                                                                                                                                                                                                                                                                                                                                                           |            |            |  |
| Temperature: 22.7°C                                                                                                                                                                                                                                                                                                                                                                                  |            |            |  |
| Humidity: 46 %                                                                                                                                                                                                                                                                                                                                                                                       |            |            |  |
| Atmospheric Pressure: 100.3 kPa                                                                                                                                                                                                                                                                                                                                                                      |            |            |  |
| High Clock: 16MHz                                                                                                                                                                                                                                                                                                                                                                                    |            |            |  |
| Transmitting operating frequency= 2.4GHz Band                                                                                                                                                                                                                                                                                                                                                        |            |            |  |
| Gain of the antenna for Zigbee= 5dBi                                                                                                                                                                                                                                                                                                                                                                 |            |            |  |
| Number of Channel=16                                                                                                                                                                                                                                                                                                                                                                                 |            |            |  |
| Method: KDB 558074 v03r02 section 12.1 and ANSI C63.4 2009                                                                                                                                                                                                                                                                                                                                           |            |            |  |
| Frequency range of measurement = 9 kHz - 1GHz.                                                                                                                                                                                                                                                                                                                                                       |            |            |  |
| 9kHz - 150kHz                                                                                                                                                                                                                                                                                                                                                                                        | RBW=200Hz  | VBW=200Hz  |  |
| 150kHz - 30MHz                                                                                                                                                                                                                                                                                                                                                                                       | RBW=9kHz   | VBW=9kHz   |  |
| 30MHz - 1000MHz                                                                                                                                                                                                                                                                                                                                                                                      | RBW=120kHz | VBW=120kHz |  |
| The EUT is placed on an 80cm Styrofoam table. It is powered through an Ethernet cable. The transmitter is in continuous Tx Mode fully modulated. The Ethernet port is connected to passive power over Ethernet device which is outside the chamber. The debug port is connected to the laptop which also is outside the chamber via serial to an USB adapter to control the EUT for testing purpose. |            |            |  |
| <b>High Channel</b>                                                                                                                                                                                                                                                                                                                                                                                  |            |            |  |

Enlighted, Inc WO#: 97329 Sequence#: 48 Date: 7/8/2015  
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Vert

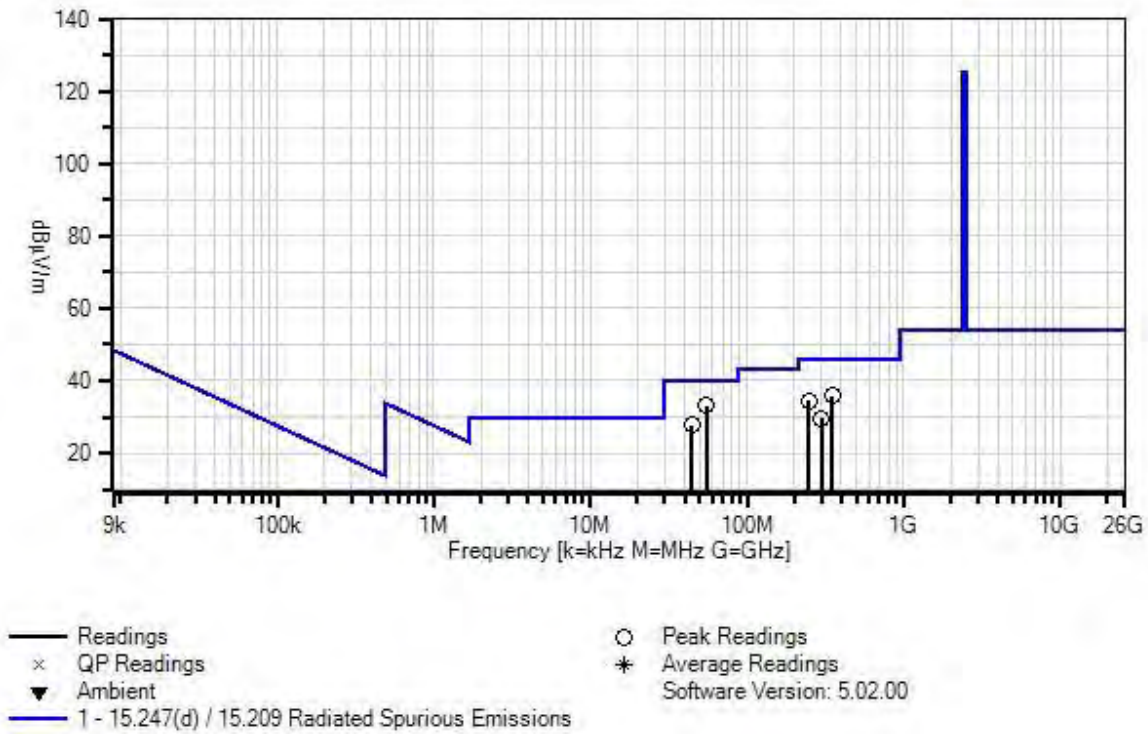

**Test Equipment:**

| ID | Asset #/Serial # | Description                 | Model         | Calibration Date | Cal Due Date |
|----|------------------|-----------------------------|---------------|------------------|--------------|
| T1 | AN00686          | Preamp                      | 8447D Opt 010 | 5/27/2014        | 5/27/2016    |
|    | AN00432          | Loop Antenna                | 6502          | 5/8/2015         | 5/8/2017     |
| T2 | AN00852          | Biconilog Antenna           | CBL 6111C     | 11/24/2014       | 11/24/2016   |
| T3 | ANP00880         | Cable                       | RG214U        | 6/13/2014        | 6/13/2016    |
| T4 | ANP01183         | Cable                       | CNT-195       | 9/3/2013         | 9/3/2015     |
| T5 | ANP06691         | Cable                       | PE3062-180    | 8/8/2014         | 8/8/2016     |
|    | AN03471          | RF Characteristics Analyzer | E4440A        | 12/19/2013       | 12/19/2015   |

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq     | Rdng       | T1<br>T5      | T2    | T3   | T4   | Dist  | Corr         | Spec         | Margin | Polar |
|---|----------|------------|---------------|-------|------|------|-------|--------------|--------------|--------|-------|
|   | MHz      | dB $\mu$ V | dB            | dB    | dB   | dB   | Table | dB $\mu$ V/m | dB $\mu$ V/m | dB     | Ant   |
| 1 | 55.461M  | 54.0       | -29.3<br>+0.2 | +7.5  | +0.6 | +0.2 | +0.0  | 33.2         | 40.0         | -6.8   | Vert  |
| 2 | 350.090M | 46.1       | -28.6<br>+0.7 | +15.0 | +1.8 | +0.7 | +0.0  | 35.7         | 46.0         | -10.3  | Vert  |
| 3 | 249.985M | 47.5       | -28.5<br>+0.6 | +12.8 | +1.5 | +0.7 | +0.0  | 34.6         | 46.0         | -11.4  | Horiz |
| 4 | 44.393M  | 44.2       | -29.3<br>+0.2 | +11.7 | +0.6 | +0.3 | +0.0  | 27.7         | 40.0         | -12.3  | Vert  |
| 5 | 300.038M | 41.8       | -28.4<br>+0.7 | +13.3 | +1.7 | +0.6 | +0.0  | 29.7         | 46.0         | -16.3  | Horiz |

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **Enlighted, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **97329** Date: 7/7/2015  
 Test Type: **Radiated Measurement** Time: 10:53:47  
 Tested By: Hieu Song Nguyenpham Sequence#: 16  
 Software: EMITest 5.02.00

***Equipment Tested:***

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |


***Support Equipment:***

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

***Test Conditions / Notes:***

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Radiated Emission<br/>         Frequency Range: 1000MHz to 25000MHz</p> <p>Application: PuTTY version 0.64 for Zigbee</p> <p>Temperature: 22.7°C<br/>         Humidity: 46 %<br/>         Atmospheric Pressure: 100.3 kPa</p> <p>High Clock: 16MHz<br/>         Transmitting operating frequency= 2.4GHz Band<br/>         Gain of the antenna for Zigbee= 5dBi<br/>         Number of Channel=16<br/>         Method: KDB 558074 v03r02 section 12.1 and ANSI C63.10 (2009)<br/>         RBW=VBW=1MHz</p> <p>The EUT is placed on an 80cm Styrofoam table. It is powered through an Ethernet cable. The transmitter is in continuous Tx Mode fully modulated. The Ethernet port is connected to passive power over Ethernet device which is outside the chamber. The debug port is connected to the laptop which also is outside the chamber via serial to an USB adapter to control the EUT for testing purpose.</p> <p><b>High Channel</b></p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Enlighted, Inc WO#: 97329 Sequence#: 16 Date: 7/7/2015  
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Vert

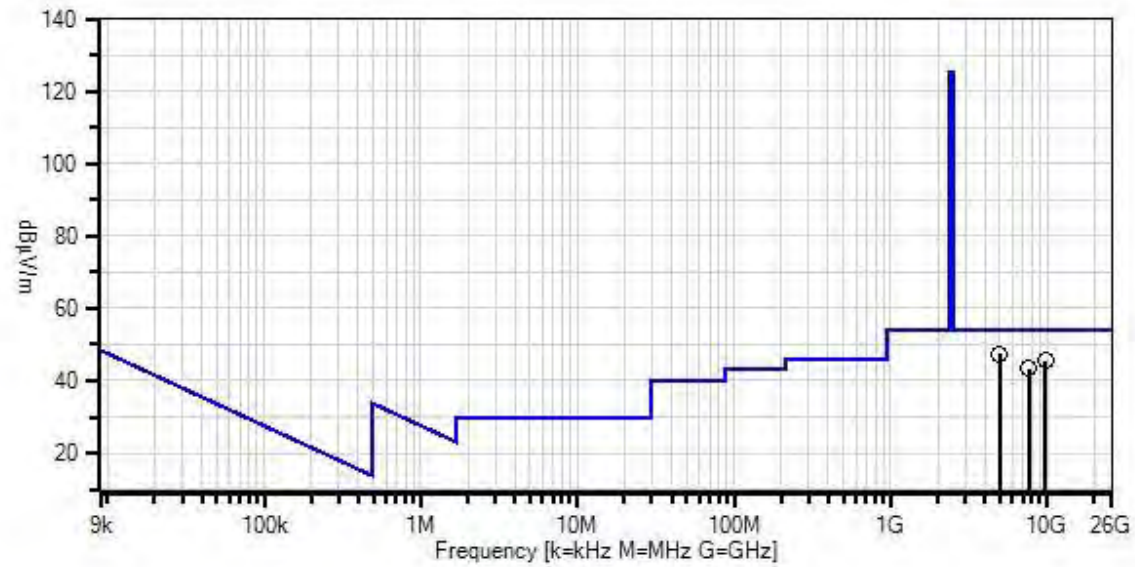

— Readings  
× QP Readings  
▼ Ambient  
— 1 - 15.247(d) / 15.209 Radiated Spurious Emissions

○ Peak Readings  
\* Average Readings  
Software Version: 5.02.00

**Test Equipment:**

| ID | Asset #/Serial # | Description                         | Model                     | Calibration Date | Cal Due Date |
|----|------------------|-------------------------------------|---------------------------|------------------|--------------|
| T1 | AN02157          | Horn Antenna-ANSI C63.5 Calibration | 3115                      | 12/2/2014        | 12/2/2016    |
| T2 | AN03302          | Cable                               | 32026-29094K-29094K-72TC  | 3/24/2014        | 3/24/2016    |
| T3 | AN03114          | Preamp                              | AMF-7D-00101800-30-10P    | 4/22/2015        | 4/22/2017    |
| T4 | AN03143          | Cable                               | 32022-29094K-144TC        | 3/18/2015        | 3/18/2017    |
|    | ANP00928         | Cable                               | various                   | 1/23/2014        | 1/23/2016    |
|    | ANP00929         | Cable                               | various                   | 1/23/2014        | 1/23/2016    |
| T5 | ANP06126         | Cable                               | 32022-29094K-29094K-168TC | 3/18/2015        | 3/18/2017    |
| T6 | ANP06712         | Cable                               | 32022-29094K-29094K-48TC  | 9/18/2014        | 9/18/2016    |
| T7 | AN03309          | High Pass Filter                    | 11SH10-3000/T10000-O/O    | 4/2/2014         | 4/2/2016     |
|    | AN03471          | RF Characteristics Analyzer         | E4440A                    | 12/19/2013       | 12/19/2015   |
|    | AN02693          | Active Horn Antenna-ANSI C63.5 3m   | AMFW-5F-12001800-20-10P   | 5/6/2015         | 5/6/2017     |
|    | AN02694          | Horn Antenna-ANSI C63.5 3m          | AMFW-5F-18002650-20-10P   | 5/7/2015         | 5/7/2017     |

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq      | Rdng       | T1            | T2           | T3            | T4   | Dist  | Corr         | Spec         | Margin | Polar |
|---|-----------|------------|---------------|--------------|---------------|------|-------|--------------|--------------|--------|-------|
|   | MHz       | dB $\mu$ V | T5            | T6           | T7            |      | Table | dB $\mu$ V/m | dB $\mu$ V/m | dB     | Ant   |
| 1 | 4959.643M | 61.8       | +33.5<br>+3.6 | +1.7<br>+1.1 | -57.3<br>+0.2 | +2.9 | +0.0  | 47.5         | 54.0         | -6.5   | Vert  |
| 2 | 9736.521M | 50.2       | +38.9<br>+5.4 | +2.4<br>+1.6 | -57.6<br>+0.2 | +4.3 | +0.0  | 45.4         | 54.0         | -8.6   | Vert  |
| 3 | 7632.830M | 52.9       | +36.5<br>+4.6 | +2.1<br>+1.4 | -58.1<br>+0.2 | +3.7 | +0.0  | 43.3         | 54.0         | -10.7  | Vert  |

## Band Edge

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **Enlighted, Inc.**  
 Specification: **Band Edge**  
 Work Order #: **97329** Date: 7/6/2015  
 Test Type: **Radiated Measurement** Time: 19:50:05  
 Tested By: Hieu Song Nguyenpham Sequence#: 7  
 Software: EMITest 5.02.00

### ***Test Equipment:***

| ID | Asset #  | Description                 | Model                    | Calibration Date | Cal Due Date |
|----|----------|-----------------------------|--------------------------|------------------|--------------|
| T1 | AN02157  | Horn Antenna-ANSI C63.5     | 3115                     | 1/23/2013        | 1/23/2015    |
| T2 | AN03302  | Cable                       | 32026-29094K-29094K-72TC | 3/24/2014        | 3/24/2016    |
| T3 | ANP01210 | Cable                       | FSJ1P-50A-4A             | 1/15/2015        | 1/15/2017    |
|    | AN03471  | RF Characteristics Analyzer | E4440A                   | 12/19/2013       | 12/19/2015   |

### ***Equipment Tested:***



| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |



### ***Support Equipment:***

| Device          | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 1 |              |         |     |

### ***Test Conditions / Notes:***

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Band edge set up</p> <p>Application: PuTTY version 0.64 for Zigbee</p> <p>Temperature: 22.7°C</p> <p>Humidity: 46 %</p> <p>Atmospheric Pressure: 100.3 kPa</p> <p>High Clock: 16MHz</p> <p>Transmitting operating frequency= 2.4GHz Band</p> <p>Gain of the antenna for Zigbee= 5dBi</p> <p>Number of Channel=16</p> <p>Method: KDB 558074 v03r02 section 13.2</p> <p>The EUT is placed on an 80cm Styrofoam table. It is powered through an Ethernet cable. The transmitter is in continuous Tx Mode fully modulated. The Ethernet port is connected to passive power over Ethernet device which is outside the chamber. The debug port is connected to the laptop which also is outside the chamber via serial to an USB adapter to control the EUT for testing purpose.</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

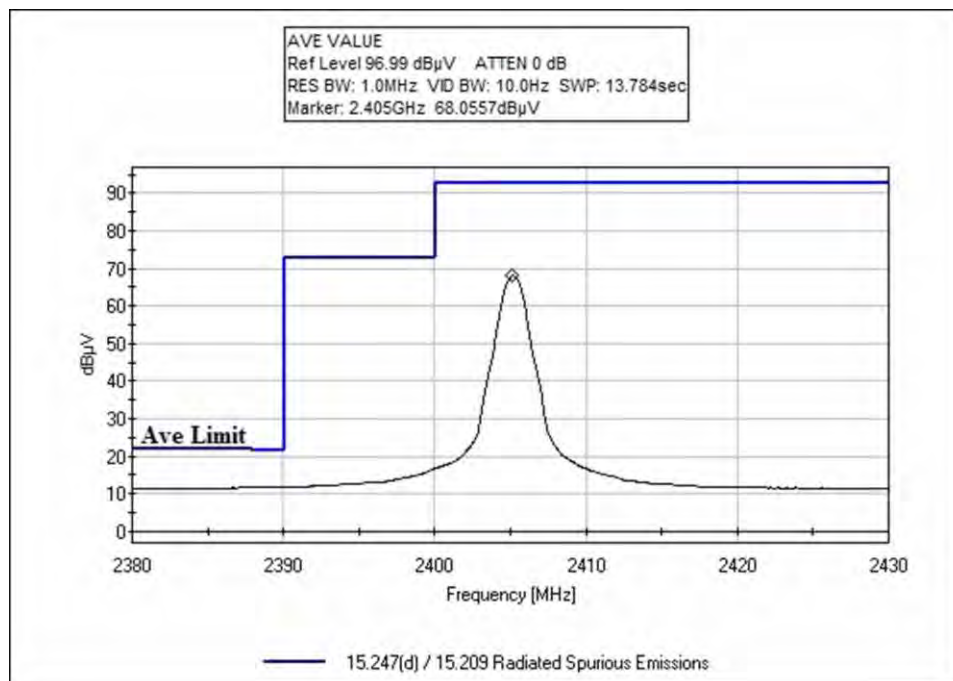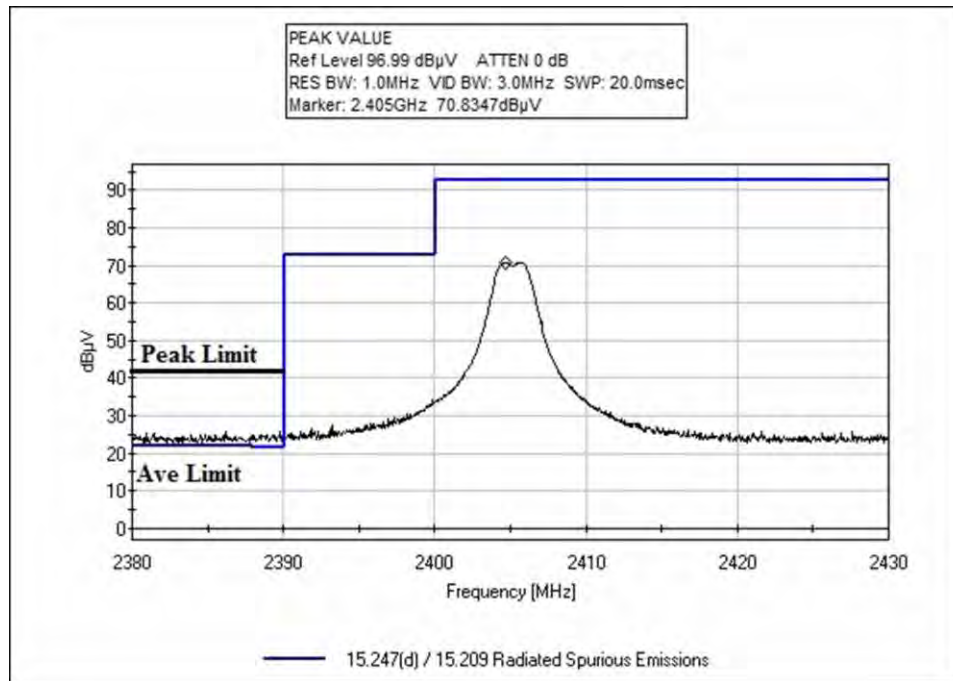


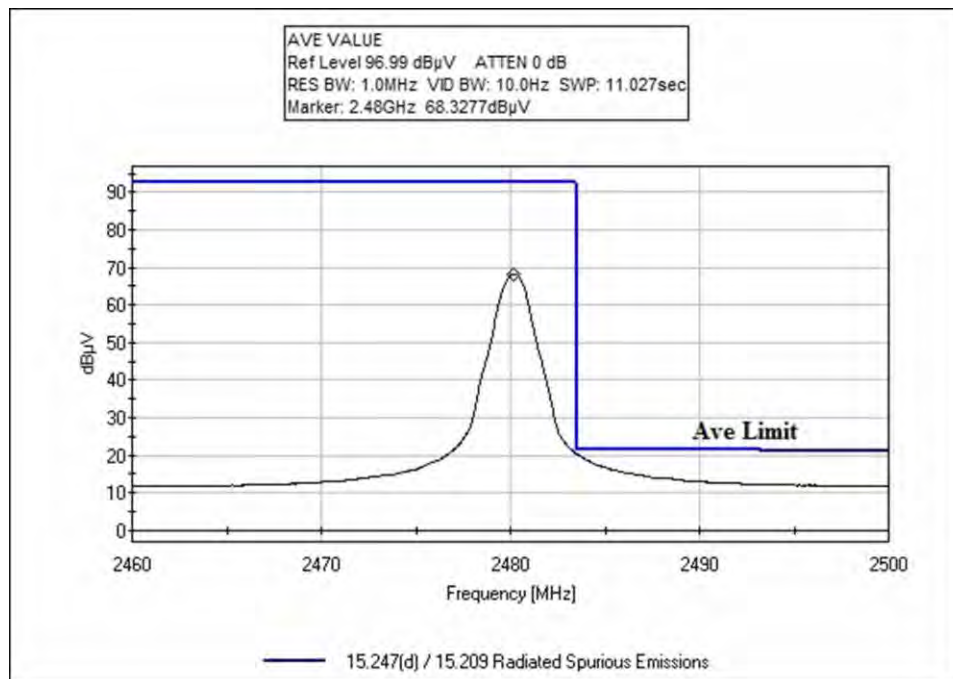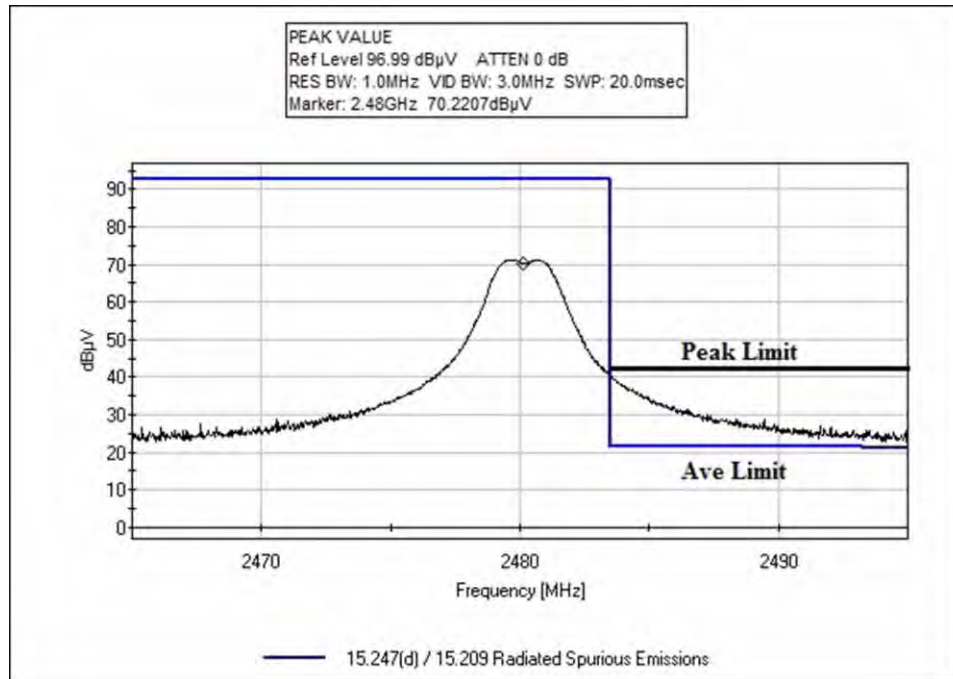

## Test Setup Photos




9kHz – 30MHz

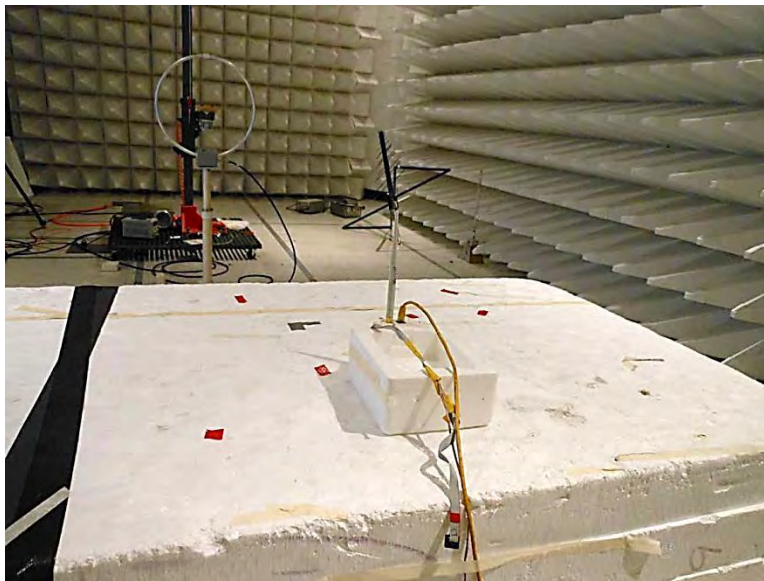


9kHz – 30MHz




30MHz – 1GHz

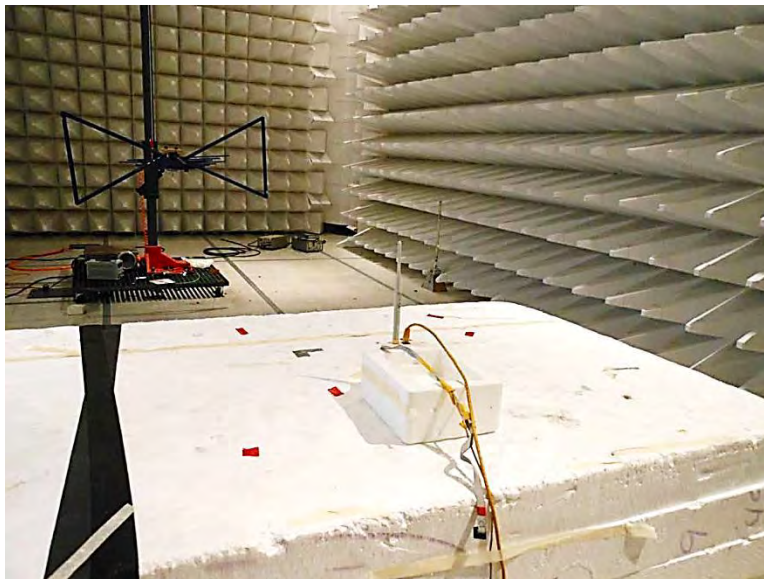


30MHz – 1GHz

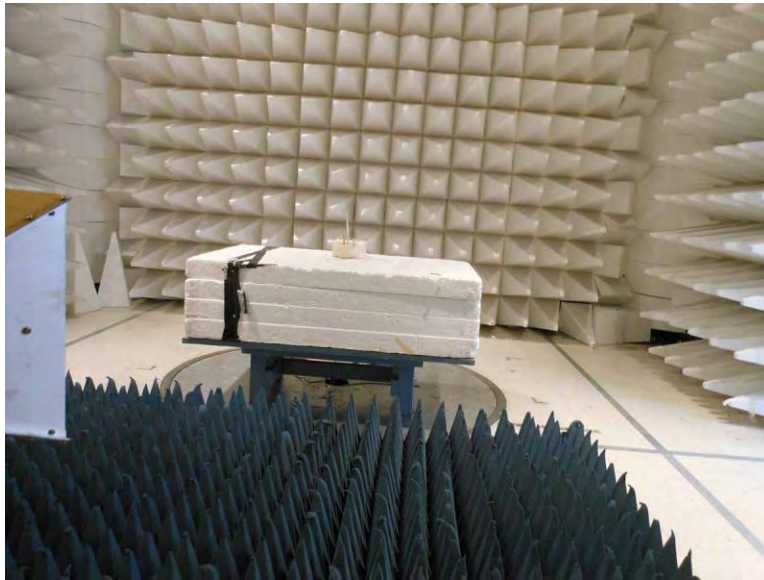


1 – 12GHz

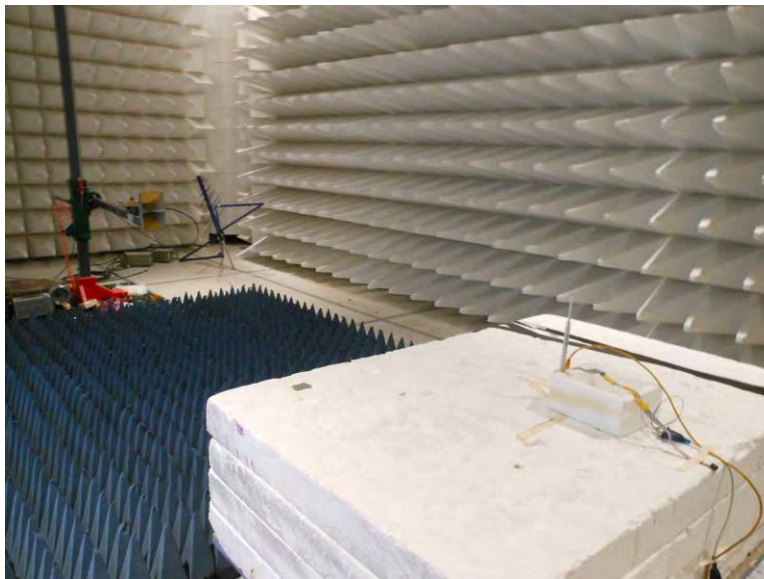


1 – 12GHz

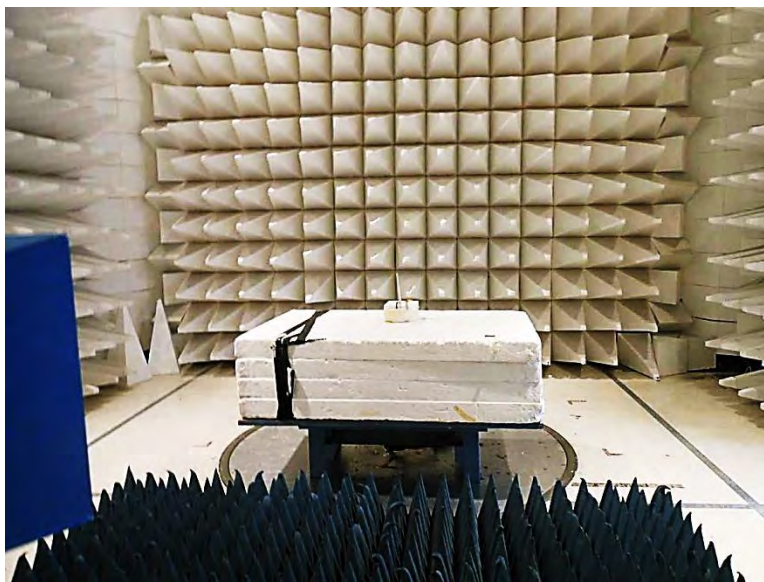


12 – 25GHz

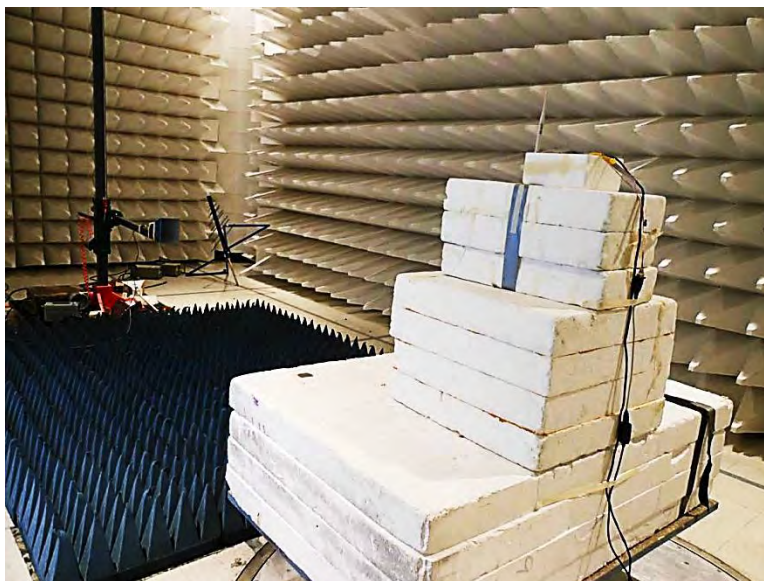

12 – 25GHz

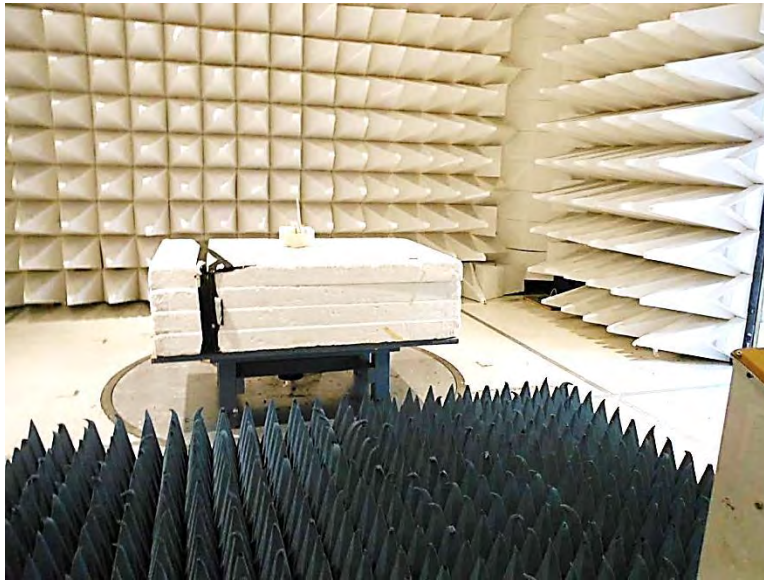

Band Edge

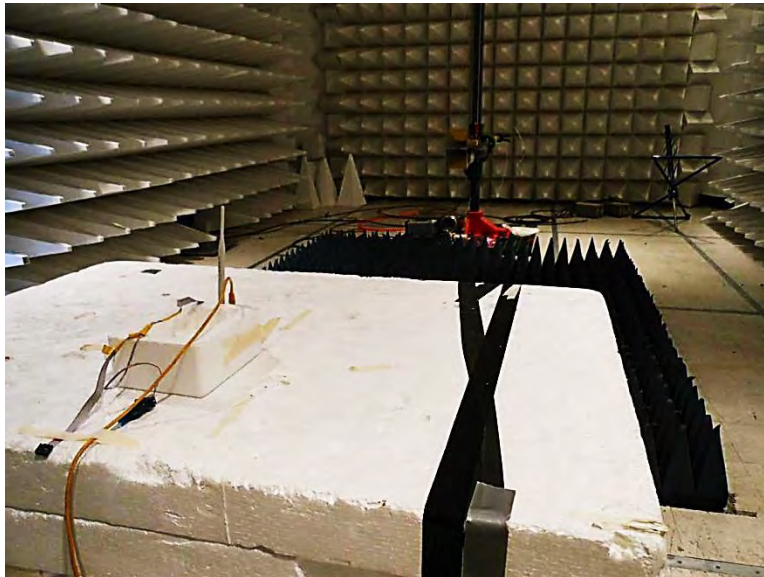

Band Edge

## SUPPLEMENTAL INFORMATION

### Emissions Test Details

#### TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

#### CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB $\mu$ V/m, the spectrum analyzer reading in dB $\mu$ V was corrected by using the following formula. This reading was then compared to the applicable specification limit.

| SAMPLE CALCULATIONS |                     |          |
|---------------------|---------------------|----------|
|                     | Meter reading       | (dBμV)   |
| +                   | Antenna Factor      | (dB)     |
| +                   | Cable Loss          | (dB)     |
| -                   | Distance Correction | (dB)     |
| -                   | Preamplifier Gain   | (dB)     |
| =                   | Corrected Reading   | (dBμV/m) |

#### TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

| MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE |                     |                  |                   |
|------------------------------------------------------------|---------------------|------------------|-------------------|
| TEST                                                       | BEGINNING FREQUENCY | ENDING FREQUENCY | BANDWIDTH SETTING |
| CONDUCTED EMISSIONS                                        | 150 kHz             | 30 MHz           | 9 kHz             |
| RADIATED EMISSIONS                                         | 9 kHz               | 150 kHz          | 200 Hz            |
| RADIATED EMISSIONS                                         | 150 kHz             | 30 MHz           | 9 kHz             |
| RADIATED EMISSIONS                                         | 30 MHz              | 1000 MHz         | 120 kHz           |
| RADIATED EMISSIONS                                         | 1000 MHz            | >1 GHz           | 1 MHz             |

#### SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or carrot ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

##### **Peak**

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

##### **Quasi-Peak**

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

##### **Average**

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.