

Electromagnetic Compatibility Test Report

Prepared in accordance with

FCC Parts 2 and 90 (Subpart Y)

On

BROADBAND ETHERNET RADIO

RF-7800W

**Harris RF Communications
221 Jefferson Ridge Parkway
Lynchburg, VA 24501**

Prepared by:

TUV Rheinland of North America, Inc.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 2 of 89

Client:	Harris RF Communications 221 Jefferson Ridge Parkway Lynchburg, VA 24501		William Pertner 434-455-9295 wpertner@harris.com	
Identification:	BROADBAND ETHERNET RADIO	Serial No.:	A00451	
Test item:	RF-7800W	Date tested:	7/9/2015	
Testing location:	TUV Rheinland of North America 710 Resende Road Building 199 Webster, NY 14580 U.S.A.		Tel: (585) 645-0125	
Test specification:	Emissions: FCC Part 90, FCC Parts 90.210 FCC Parts 90.210 FCC Part 90.1213 and Section 2.1049, FCC Part 90.1215, FCC Part 90.1215, FCC Parts 90.1217, Part 1.1307 and 1.1310,			
Test Result	The above product was found to be Compliant to the above test standard(s)			
tested by: Randall E Masline		reviewed by: Cecil Gittens		
 10 September 2015 Signature		 10 September 2015 Signature		
Other Aspects:	None			
Abbreviations: OK, Pass, Compliant, Complies = passed Fail, Not Compliant, Does Not Comply = failed N/A = not applicable				
	 	Industry Canada	VCCI	BSMI
US5253	Testing Cert.# 3331.08	482B-1	A-0203	SL2-IN-E-050R

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	SCOPE	5
1.2	PURPOSE	5
1.3	SUMMARY OF TEST RESULTS	6
2	LABORATORY INFORMATION	7
2.1	ACCREDITATIONS & ENDORSEMENTS.....	7
2.2	MEASUREMENT UNCERTAINTY EMISSIONS	8
2.3	MEASUREMENT EQUIPMENT USED	10
3	PRODUCT INFORMATION	11
3.1	PRODUCT	11
3.2	EQUIPMENT MODIFICATIONS	11
3.3	TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS LIMITS @ 90.210(M)	12
3.4	EMISSION MASK 90.210(M).....	16
3.5	CONDUCTED EMISSIONS ON AC MAINS	27
4	POWER LIMITS	30
4.1	CONDUCTED OUTPUT POWER, FCC 90.1215	30
4.2	PEAK POWER SPECTRAL DENSITY	39
4.3	99% OCCUPIED BANDWIDTH	49
4.4	FREQUENCY STABILITY FCC PART 90.213 AND 2.1055	59
5	CONDUCTED EMISSION LIMITS FCC 90.210.....	61
6	RF EXPOSURE.....	83
6.1	EXPOSURE REQUIREMENTS – FCC PARTS 90.1217, 1.1307 AND 1.1310	83

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Manufacturer's statement - attestation

The manufacturer; Harris Corporation, as the responsible party for the equipment tested, hereby affirms:

- a) That they have reviewed and concurs that the test shown in this report are reflective of the operational characteristics of the device for which certification is sought;
- b) That the device in this test report will be representative of production units;
- c) That all changes (in hardware and software/firmware) to the subject device will be reviewed.
- d) That any changes impacting the attributes, functionality or operational characteristics documented in this report will be communicated to the body responsible for approving (certifying) the subject equipment.

William H. Pertner
Printed name of official



Signature of official

221 Jefferson Ridge Parkway
Lynchburg, VA 24501
Address

07/22/2015
Date

434-455-9295
Telephone number

william.pertner@harris.com
Email address of official

1 General Information

1.1 Scope

This report is intended to document the status of conformance with the requirements of the FCC Part 90 and Part 2 based on the results of testing performed on 7/9/2015 on the BROADBAND ETHERNET RADIO, RF-7800W Model No. RF-7800W, manufactured by Harris RF Communications. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this RF-7800W are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 6 of 89

1.3 Summary of Test Results

Applicant	Harris RF Communications 221 Jefferson Ridge Parkway Lynchburg, VA 24501	Tel	434-455-9295	Contact	William Pertner
		Fax	434-455-6851	e-mail	wpertner@harris.com
Broadband Ethernet Radio	BROADBAND ETHERNET RADIO	RF-7800W:		RF-7800W	
Serial Number	A00451	Test Voltage/Freq.		Power over Ethernet	
Test Date Completed:	7/9/2015	Test Engineer		Randall E Masline	
Standards	Description	Severity Level or Limit		Criteria	Test Result
FCC Part 90 Standard	Regulations Governing licensing and use of frequencies in the 4940-4990 MHz band	See called out parts below		See Below	Complies
FCC Part 90.1215		Below the applicable limits		Below Limit	Complies
FCC Parts 90.210	Spurious and Harmonic Emissions (EUT in Transmit Mode)	Below the applicable limits		Below Limit	Complies
FCC Parts 90.210	Conducted Emissions on AC Mains	EUT is operated by POE		Below Limit	Complies
FCC Part 90.1215	Power Limits	Shall not exceed 1.0 Watt		Below Limit	Complies
FCC Part 90.1213 and Section 2.1049	99% Occupied Bandwidth	99% BW		Within Limit	Complies
FCC Part 90.1215	Peak Power Spectral Density	≤ 21 dBm in any 1 MHz		Below Limit	Complies
FCC Part 90.213 and Part 2.1055	Frequency Stability			Below Limit	Complies
FCC Parts 90.1217, Part 1.1307 and 1.1310	RF Exposure	SAR or MPE Requirements		Below Limit	Complies (without testing)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission

TUV Rheinland of North America located at, 710 Resende Road, Building 199, Webster, NY 14580 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90575). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

2.1.2 ILAC/A2LA

This is a program which is administered under the auspices of A2LA. The laboratory has been assessed and accredited in accordance with ISO Standard 17025:2005 (Certificate Number: 3331.08). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 VCCI

VCCI Accredited test lab. Registration numbers A-0203

2.1.4 Industry Canada

(Registration No.: 482B-1) The 10M SEMI-ANECHOIC CHAMBER has been accepted by Industry Canada to perform testing to 3 and to 10m, based on the test procedures described in ANSI C63.4-2009.

2.1.5 BSMI

Registration No.: SL2-IN-E-050R. The BSMI accreditation was obtained by NIST MRA with the BSMI.

2.1.6 Korea

Recognized by Radio Research Agency as an accredited Conformity Assessment Body (CAB) under the terms of Phase I of the APEC TEL.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

2.1.7 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBμV/m)

$$25 \text{ dB}\mu\text{V/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dB}\mu\text{V/m}$$

2.2 Measurement Uncertainty Emissions

Per CISPR 16-4-2	Ulab	Ucisp
Radiated Disturbance @ 10m		
30 MHz – 1,000 MHz	4.57 dB	5.2 dB
Radiated Disturbance @ 3m		
1.0 GHz – 6.0 GHz	5.08 dB	5.2 dB
6.0 GHz – 18.0 GHz	5.16 dB	5.5 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	2.62 dB	3.6 dB
Disturbance Power		
30 MHz – 300 MHz	3.88 dB	4.5 dB

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Measurement Uncertainty Immunity

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 2.98\%$.	Per EN61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is $\pm 2.0\text{dB}$.	Per EN61000-4-3
The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 5.0\%$.	Per EN61000-4-6
The estimated combined standard uncertainty for surge immunity measurements is $\pm 5.0\%$.	Per EN61000-4-5
The estimated combined standard uncertainty for conducted immunity measurements is $\pm 2.0\text{dB}$.	Per EN61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity measurements is $\pm 2.57\%$.	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 2.48\%$.	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for radiated emissions measurements is $\pm 4.57\text{ dB}$	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for radiated emissions measurements from 1 GHz to 6 GHz is $\pm 4.57\text{dB}$	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for radiated emissions measurements from 6 GHz to 18 GHz is $\pm 4.57\text{dB}$	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for conducted emissions measurements is $\pm 2.62\text{dB}$.	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 11.15\%$.	Per CISPR16-4-2 Method

Expanded measurement uncertainty numbers are shown in the tables above. Compliance criteria are not based on measurement uncertainty.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

2.3 Measurement Equipment Used

Equipment	Manufacturer	Model #	Ref.	Serial #	Last Cal dd/mm/yy	Next Cal dd/mm/yy	Test
Radiated Emissions							
Analyzer w RF Filter Section 85460A	HP	8546A		3325A00134	12-Aug-14	12-Aug-15	RE
Multimeter	Fluke	83	C437	48162892	12-Aug-14	12-Aug-15	RE
BiLog	Chase	CBL6111	C017	1169	22 Aug 13	22 Aug 15	RE
Receiver (20Hz-40GHz)	Rohde & Schwarz	ESI(B) 40		100274	15-Aug-14	15-Aug-15	RE
Horn(1-18 GHz)	ETS	3117			1-16-14	1-16-16	RE
Horn(18-26.5 GHz)	ETS	3160-09		1275	1-16-14	1-16-16	RE
Horn(26.5-40 GHz)	ETS	3160-10		1180	1-16-14	1-16-16	RE
Conducted Emissions							
LISN	Schwarzbeck	8126	C109	189	12-Aug-14	12-Aug-15	CE
Analyzer w RF Filter Section 85460A	HP	8546A		3325A00134	12-Aug-14	12-Aug-15	CE
Multimeter	Fluke	87	C445	59890224	12-Aug-14	12-Aug-15	CE
General Laboratory Equipment							
Multimeter	Fluke	87	C405	49050672	12-Aug-14	12-Aug-15	
Multimeter	Fluke	8062A	C452	4715199	12-Aug-14	12-Aug-15	
Pressure/Temperature/RH	Extech	SD700	C480	Q668876	12-Aug-14	12-Aug-15	

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

3 Product Information

3.1 Product

Broadband Ethernet Radio RF-7800W

3.2 Equipment Modifications

No modifications were needed to bring product into compliance.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

3.3 Transmitter Spurious/Harmonic Radiated Emissions Limits @ 90.210(M)

3.3.1 Over View of Test

Results	Complies (as tested per this report)					Date	7/11/2015	
Standard	FCC Part 90.210 M Mask							
Product	RF-7800W				Serial#	A00451		
Test Set-up	Tested in a 10m Semi-Anechoic Chamber, placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table.							
EUT Powered By	Power over Ethernet	Temp	76 °F	Humidity	36%	Pressure	1007 mbar	
Perf. Criteria	(Below Limit)		Perf. Verification			Readings Under Limit		
Mod. to EUT	None		Test Performed By			Randall E Masline		

3.3.2 Test Procedure

- (a) The power of emission outside any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or $55 + 10 \log (P)$ dB, whichever is the lesser attenuation.
- (b) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

3.3.3 Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Exhibit 7, § 7.1 of this report and its value in dBc is calculated as follows:

1. If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
2. If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:
3. Lowest ERP of the carrier = $EIRP - 2.15 \text{ dB} = P_c + G - 2.15 \text{ dB} = \text{xxx dBm (conducted)} + 0 \text{ dBi} - 2.15 \text{ dB}$
4. Spurious /harmonic emissions levels expressed in dBc (dB below carrier) are as follows:

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

3.3.4 Deviations

There were no deviations from the test methodology listed in the test plan for the Transmitter Spurious/Harmonic radiated emission test.

3.3.5 Final Test

All final radiated spurious emissions measurements were below (in compliance) the limits.

3.3.5.1 Near Lowest Frequency (4942.5 MHz)

Fundamental Frequency: 4942.5 MHz

Test Frequency Range: 30 MHz – 40 GHz

All emissions are more than 20 dB below the limit.

3.3.5.2 Near Middle Frequency (4965 MHz)

Fundamental Frequency: 4965 MHz

Test Frequency Range: 30 MHz – 40 GHz

All emissions are more than 20 dB below the limit.

3.3.5.3 Near Highest Frequency (4985 MHz)

Fundamental Frequency: 4985

Test Frequency Range: 30 MHz – 40 GHz

All emissions are more than 20 dB below the limit.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

3.3.6 MEASURING THE EIRP OF SPURIOUS/HARMONIC EMISSIONS USING SUBSTITUTION METHOD:

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source

Resolution BW: 10 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

$E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels obtained in the Section 7.2.1 for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):

- ◆ DIPOLE antenna for frequency from 30-1000 MHz or
- ◆ HORN antenna for frequency above 1 GHz }.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna:

- ◆ DIPOLE antenna for frequency from 30-1000 MHz or
- ◆ HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the

transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

3.4 Emission Mask 90.210(M)

3.4.1 Over View of Test

Results	Complies (as tested per this report)					Date	6/24/2015	
Standard	FCC Part 90.210 M Mask							
Product	RF-7800W				Serial#	A00451		
Test Set-up	Tested at a 10m O.A.T.S., placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table.							
EUT Powered By	Power over Ethernet	Temp	76 °F	Humidity	36%	Pressure	1007 mbar	
Perf. Criteria	(Below Limit)		Perf. Verification		Readings Under Limit			
Mod. to EUT	None		Test Performed By		Randall E Masline			

3.4.2 Test Procedure

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating in the frequency bands governed under this part.

m) Emission Mask M. For high power transmitters (greater than 20 dBm) operating in the 4940-4990 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:

- (1) On any frequency removed from the assigned frequency between 0-45% of the authorized bandwidth (BW): 0 dB.
- (2) On any frequency removed from the assigned frequency between 45-50% of the authorized bandwidth: $568 \log (\% \text{ of } (BW)/45)$ dB.
- (3) On any frequency removed from the assigned frequency between 50-55% of the authorized bandwidth: $26 + 145 \log (\% \text{ of } (BW)/50)$ dB.
- (4) On any frequency removed from the assigned frequency between 55-100% of the authorized bandwidth: $32 + 31 \log (\% \text{ of } (BW)/55)$ dB.
- (5) On any frequency removed from the assigned frequency between 100-150% of the authorized bandwidth: $40 + 57 \log (\% \text{ of } (BW)/100)$ dB.
- (6) On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or $55 + 10 \log (P)$ dB, whichever is the lesser attenuation.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

(7) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth

3.4.3 Method of Measurements

The Emission masks are measured using EMI receiver (spectrum analyzer) with RBW = 1% of 99% OBW, VBW $\geq$ RBW.

3.4.4 Deviations

There were no deviations from the test methodology listed in the test plan for the emission mask M test.


3.4.5 Final Test

All final radiated spurious emissions measurements were below (in compliance) the limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.



Marker 1 [T1] RBW 50 kHz RF Att 10 dB
Ref Lvl 12.60 dBm VBW 30 kHz
34 dBm 4.94260020 GHz SWT 34 ms Unit dBm

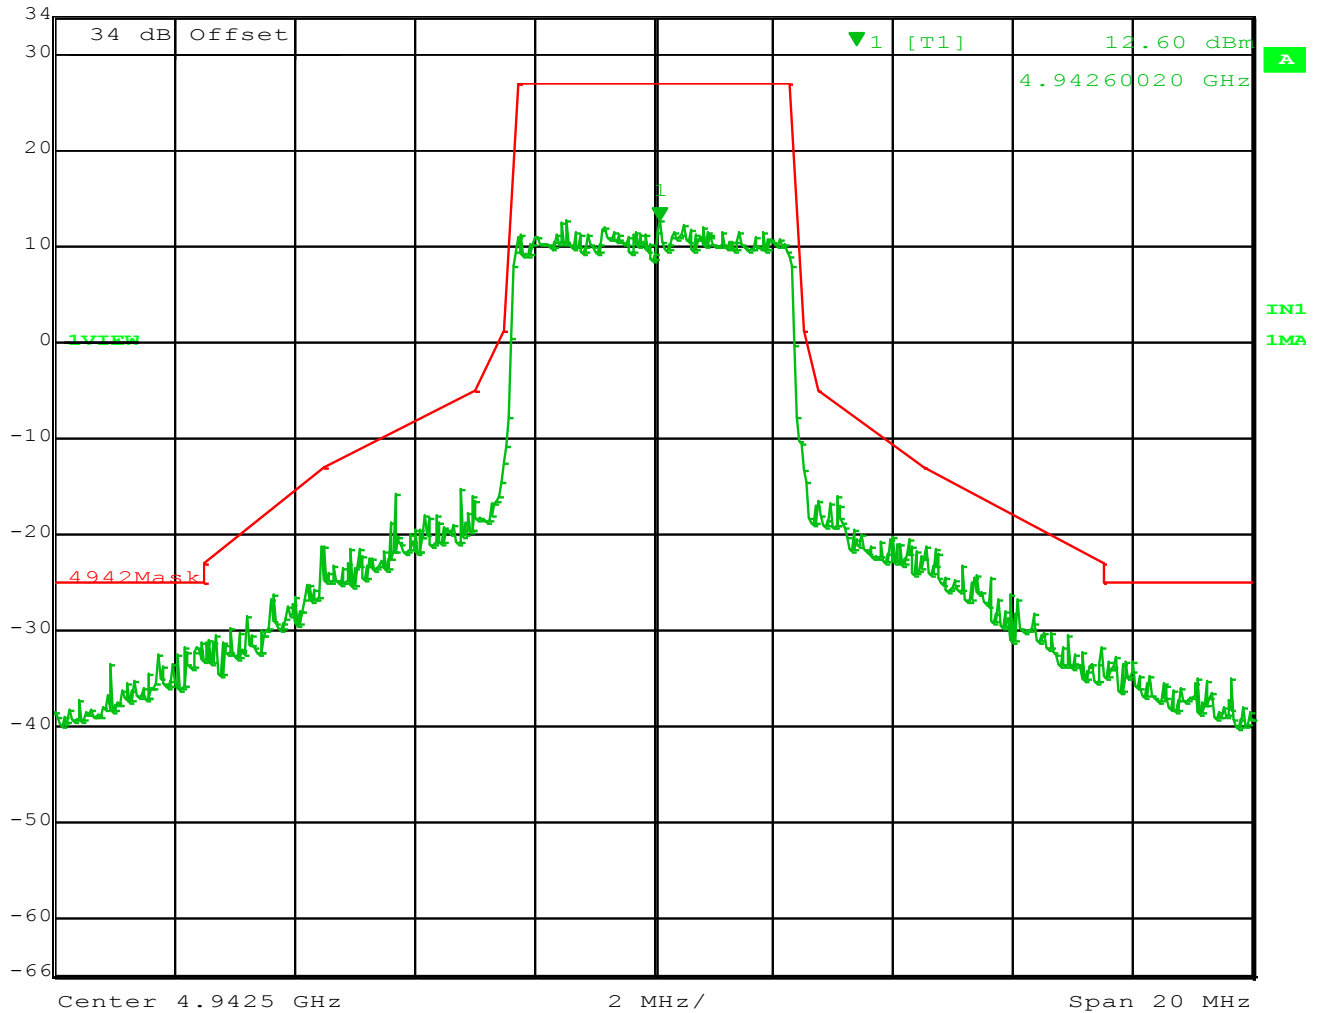

Date: 24.JUN.2015 04:16:26

Figure 1 – Center Frequency 4942.5 MHz - 5 MHz Channel Spacing


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 19 of 89



Ref Lvl	Marker 1 [T1]	RBW	50 kHz	RF Att	10 dB
34 dBm	12.40 dBm	VBW	30 kHz		
	4.96872244 GHz	SWT	34 ms	Unit	dBm

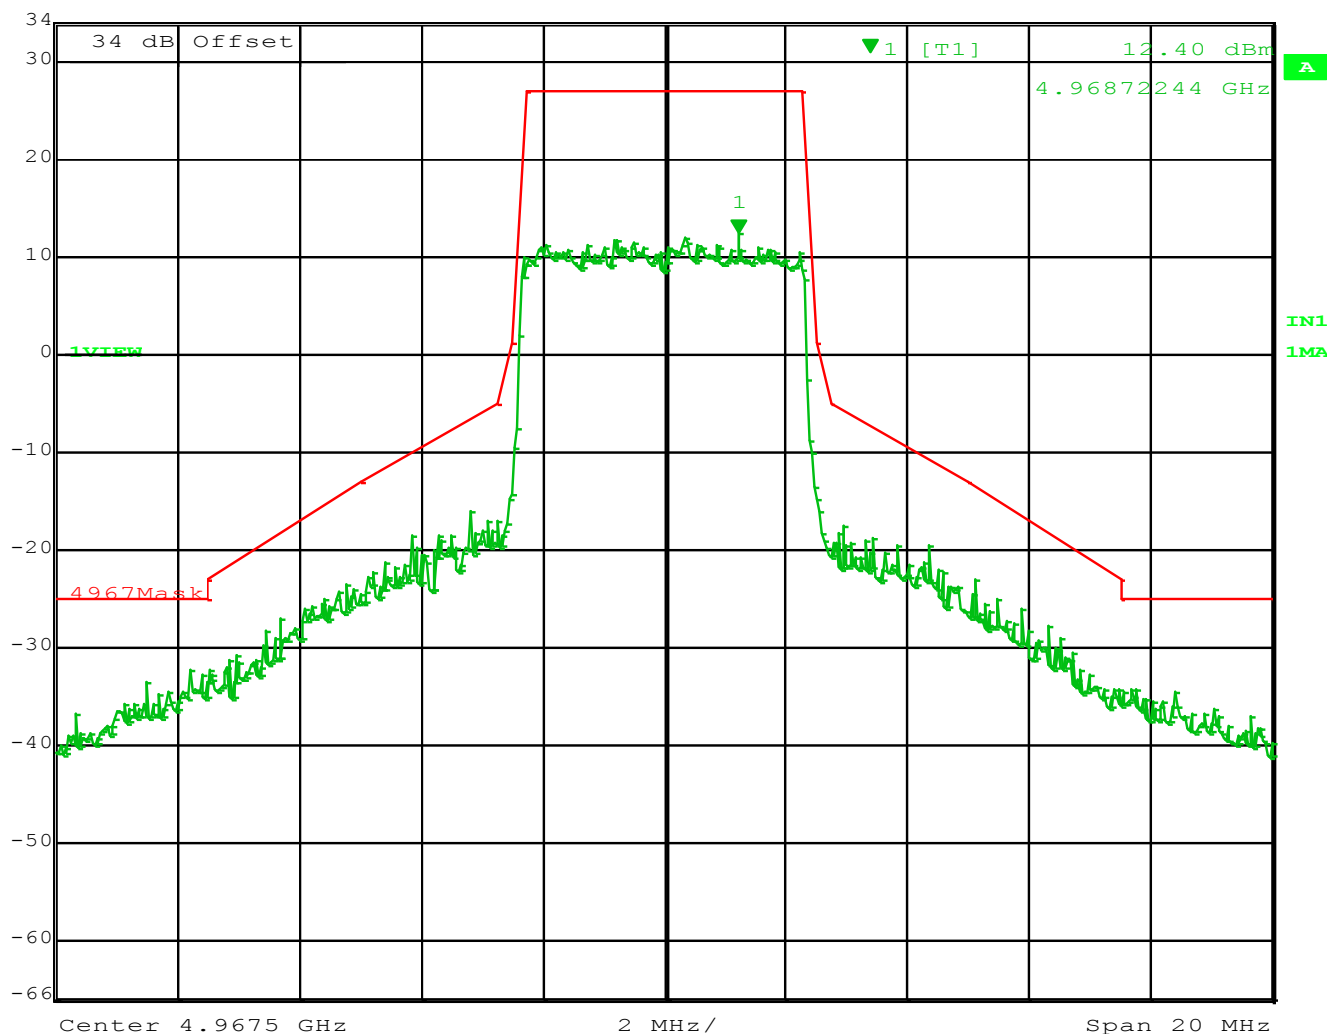

Date: 24.JUN.2015 04:52:35

Figure 2 – Center Frequency 4967.5 MHz - 5 MHz Channel Spacing


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 20 of 89



Marker 1 [T1]	RBW	50 kHz	RF Att	10 dB
Ref Lvl	12.49 dBm	VBW	30 kHz	
34 dBm	4.98611723 GHz	SWT	34 ms	Unit dBm

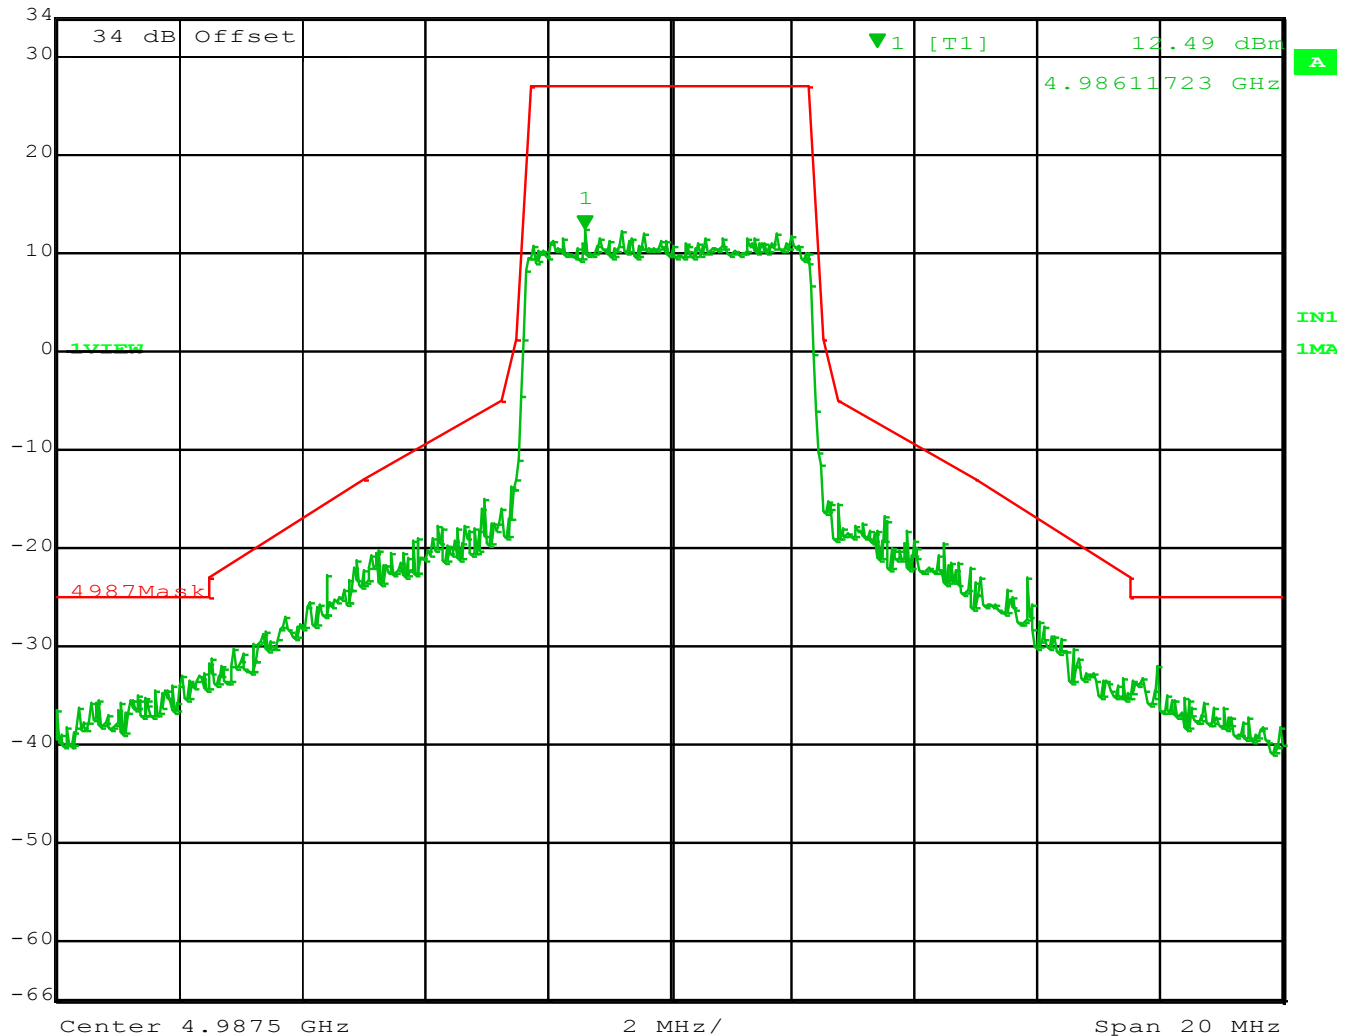


Date: 24.JUN.2015 04:55:51

Figure 3 – Center Frequency 4987.5 MHz - 5 MHz Channel Spacing

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.



Marker 1 [T1] RBW 50 kHz RF Att 10 dB
Ref Lvl 9.60 dBm VBW 30 kHz
34 dBm 4.94538076 GHz SWT 34 ms Unit dBm

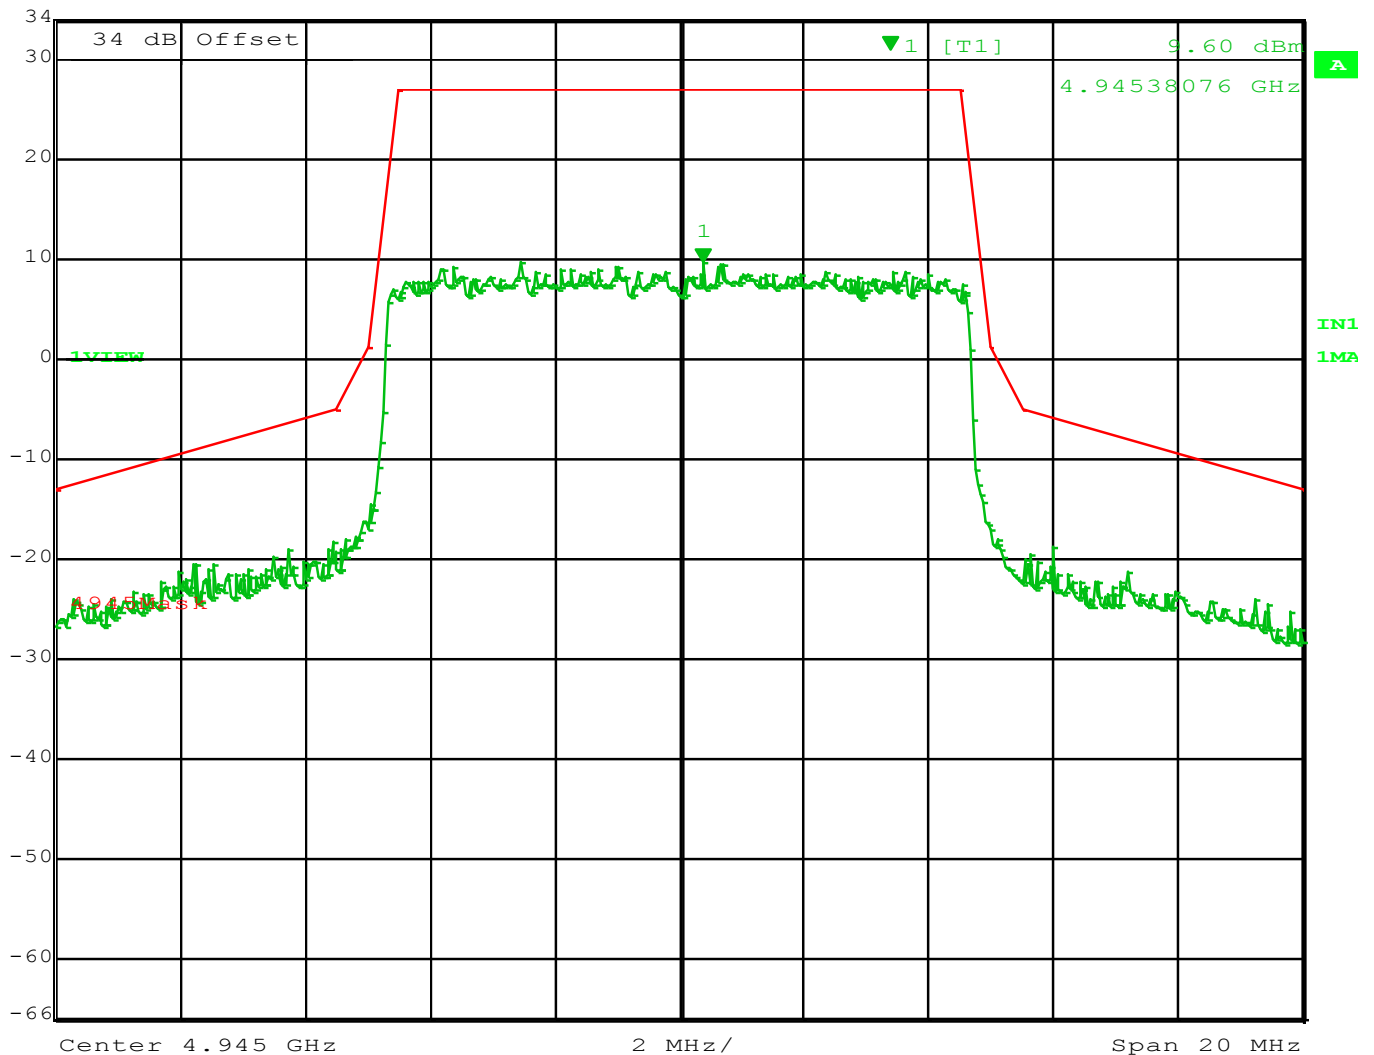

Date: 24.JUN.2015 04:58:25

Figure 4 – Center Frequency 4945 MHz - 10 MHz Channel Spacing


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 22 of 89



Ref Lvl	Marker 1 [T1]	RBW	50 kHz	RF Att	10 dB
34 dBm	9.52 dBm	VBW	30 kHz		
	4.96586172 GHz	SWT	34 ms	Unit	dBm

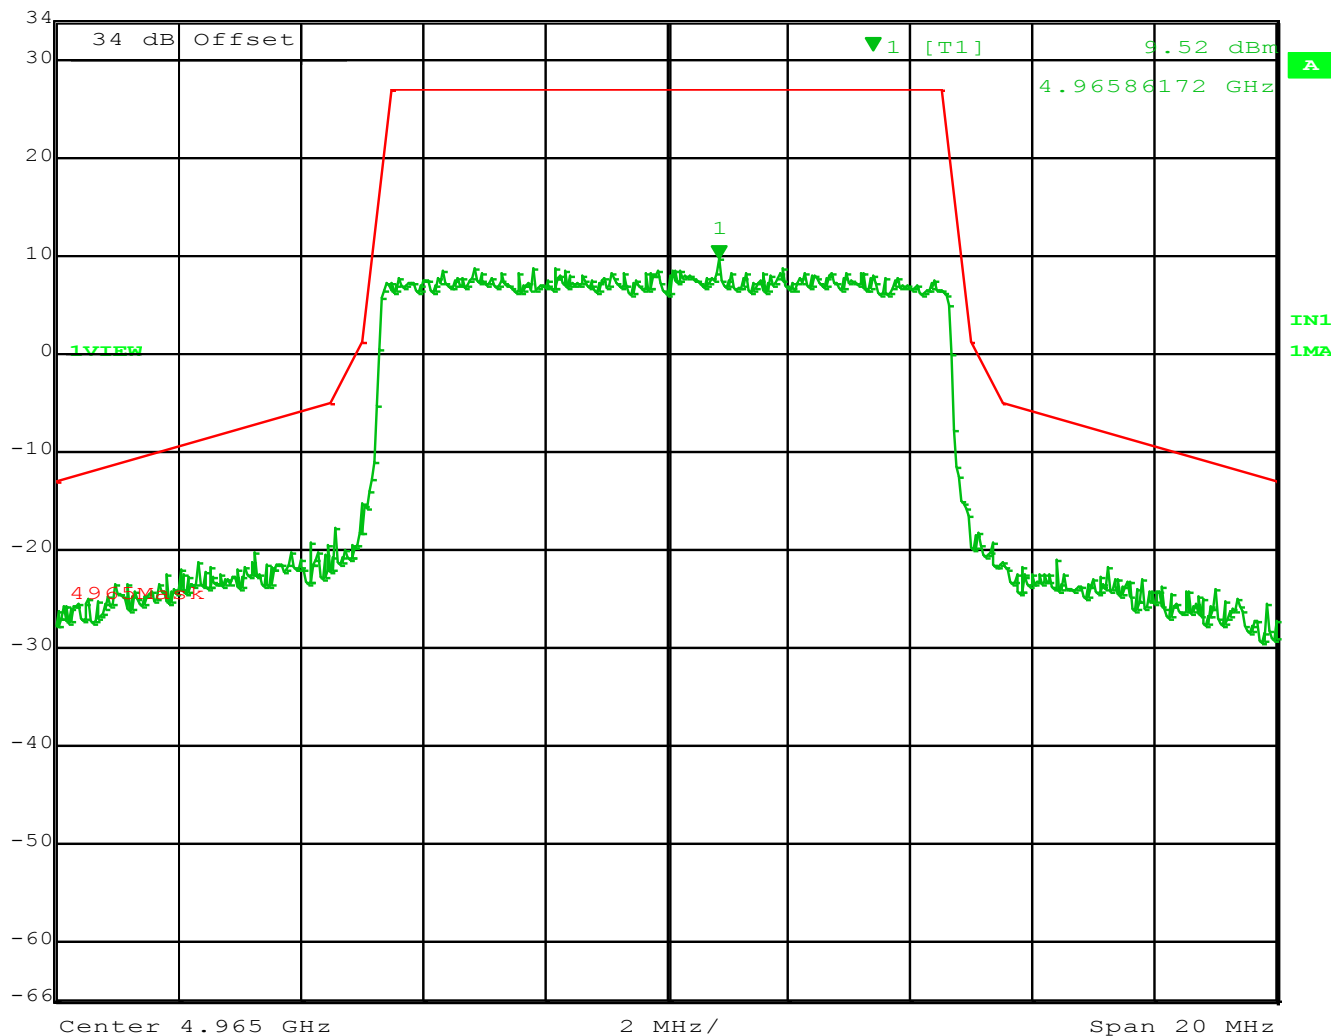

Date: 24.JUN.2015 05:03:32

Figure 5 – Center Frequency 4965 MHz - 10 MHz Channel Spacing


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 23 of 89



Marker 1 [T1] RBW 50 kHz RF Att 10 dB
Ref Lvl 9.30 dBm VBW 30 kHz
34 dBm 4.98437876 GHz SWT 34 ms Unit dBm

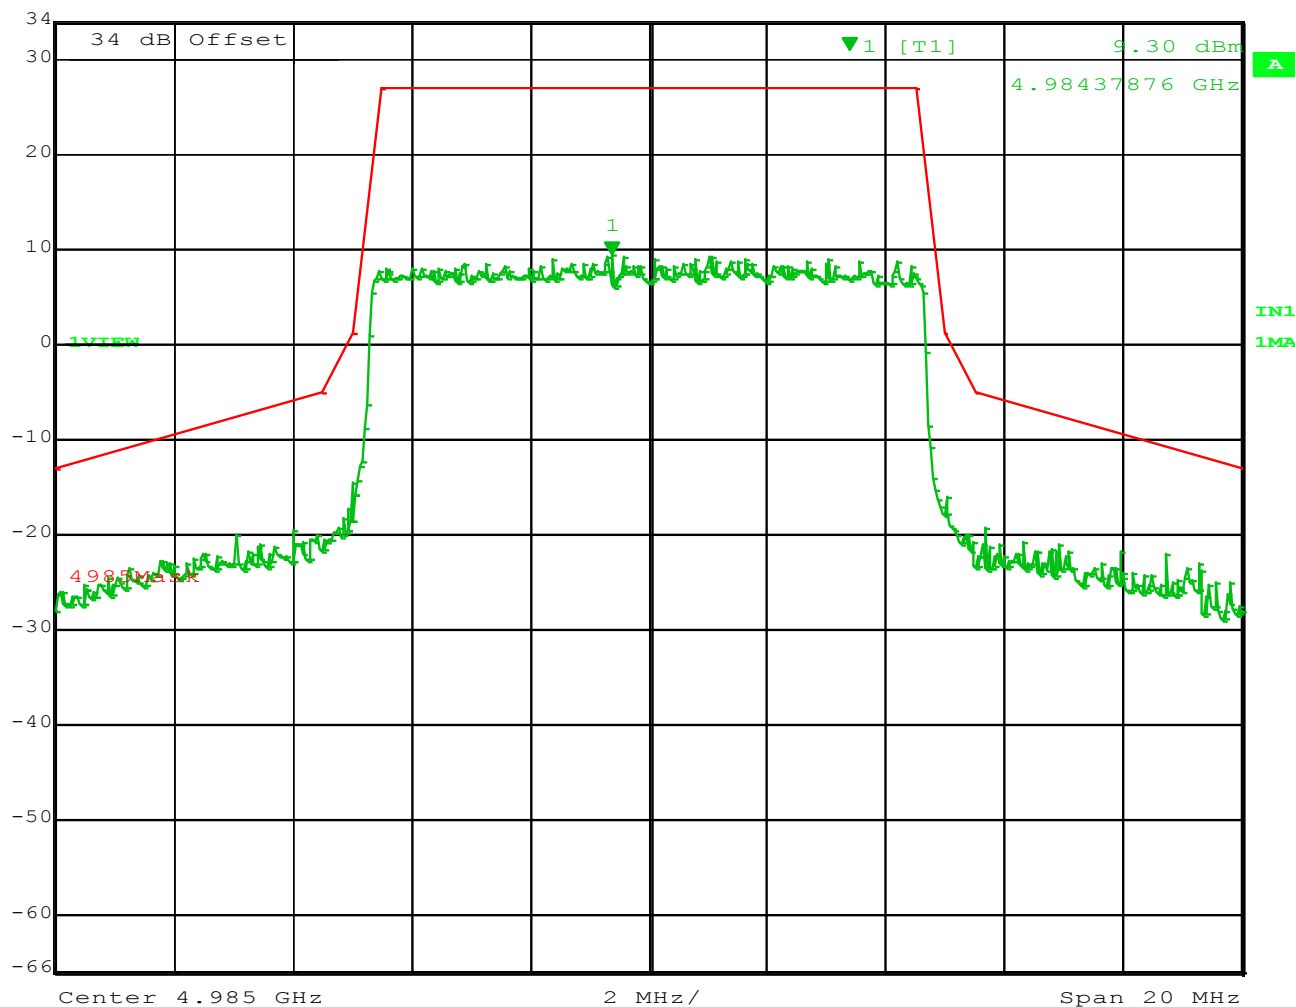

Date: 24.JUN.2015 05:02:08

Figure 6 – Center Frequency 4985 MHz - 10 MHz Channel Spacing


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 24 of 89



Ref Lvl	Marker 1 [T1]	RBW	50 kHz	RF Att	10 dB
34 dBm	6.29 dBm	VBW	30 kHz		
	4.94371743 GHz	SWT	50 ms	Unit	dBm

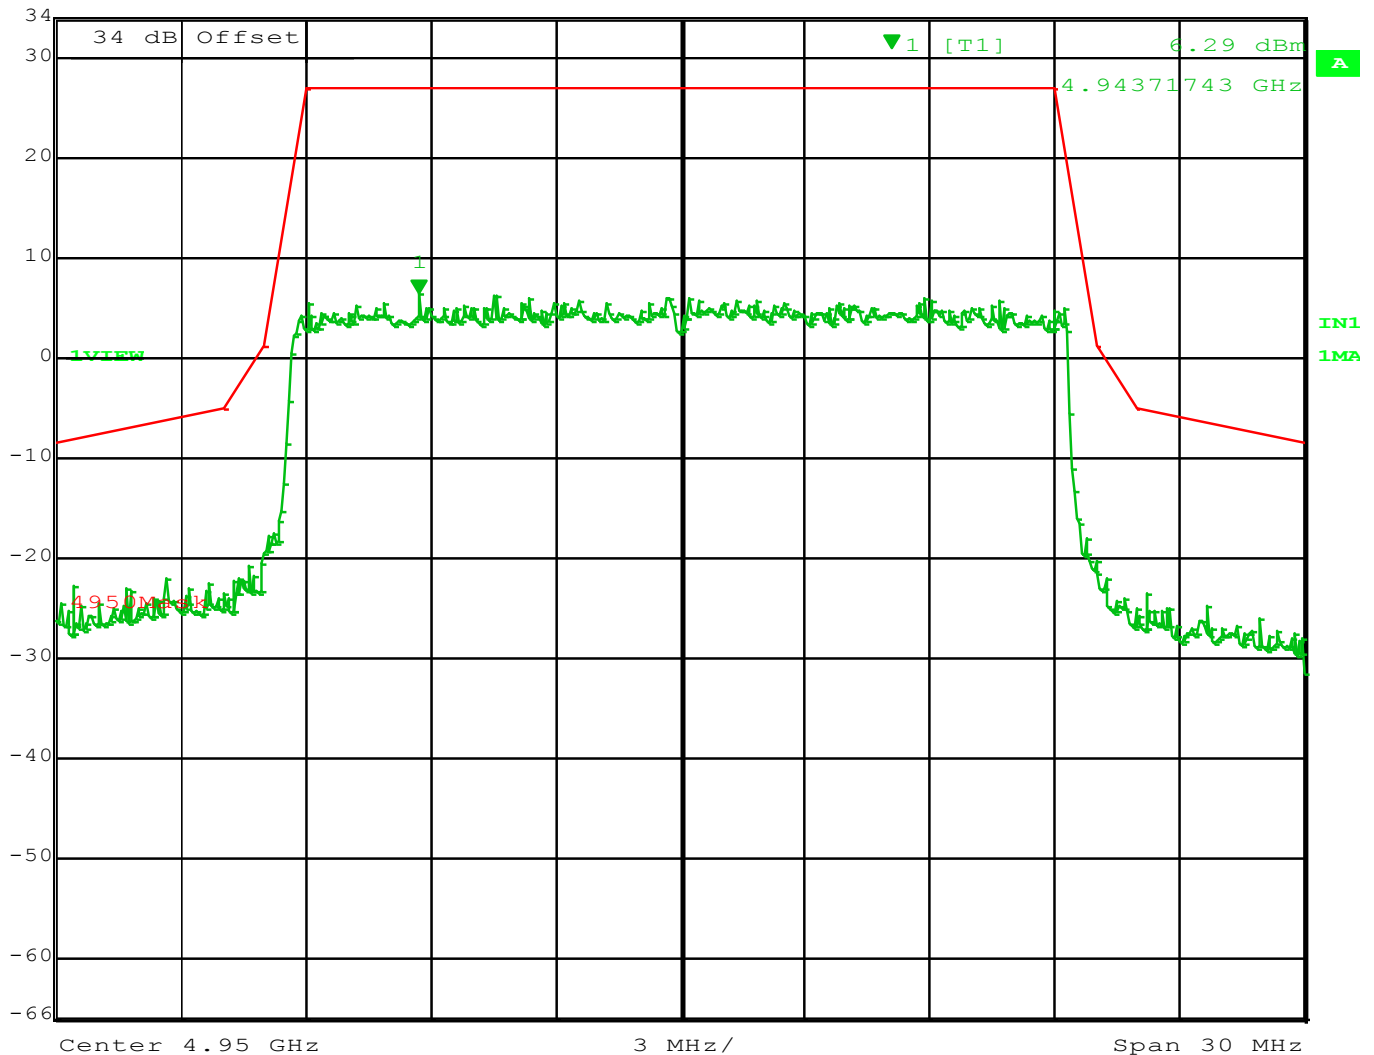

Date: 24.JUN.2015 05:05:22

Figure 7 – Center Frequency 4950 MHz - 20 MHz Channel Spacing


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 25 of 89



Marker 1 [T1] RBW 50 kHz RF Att 10 dB
Ref Lvl 6.75 dBm VBW 30 kHz
34 dBm 4.95528056 GHz SWT 50 ms Unit dBm

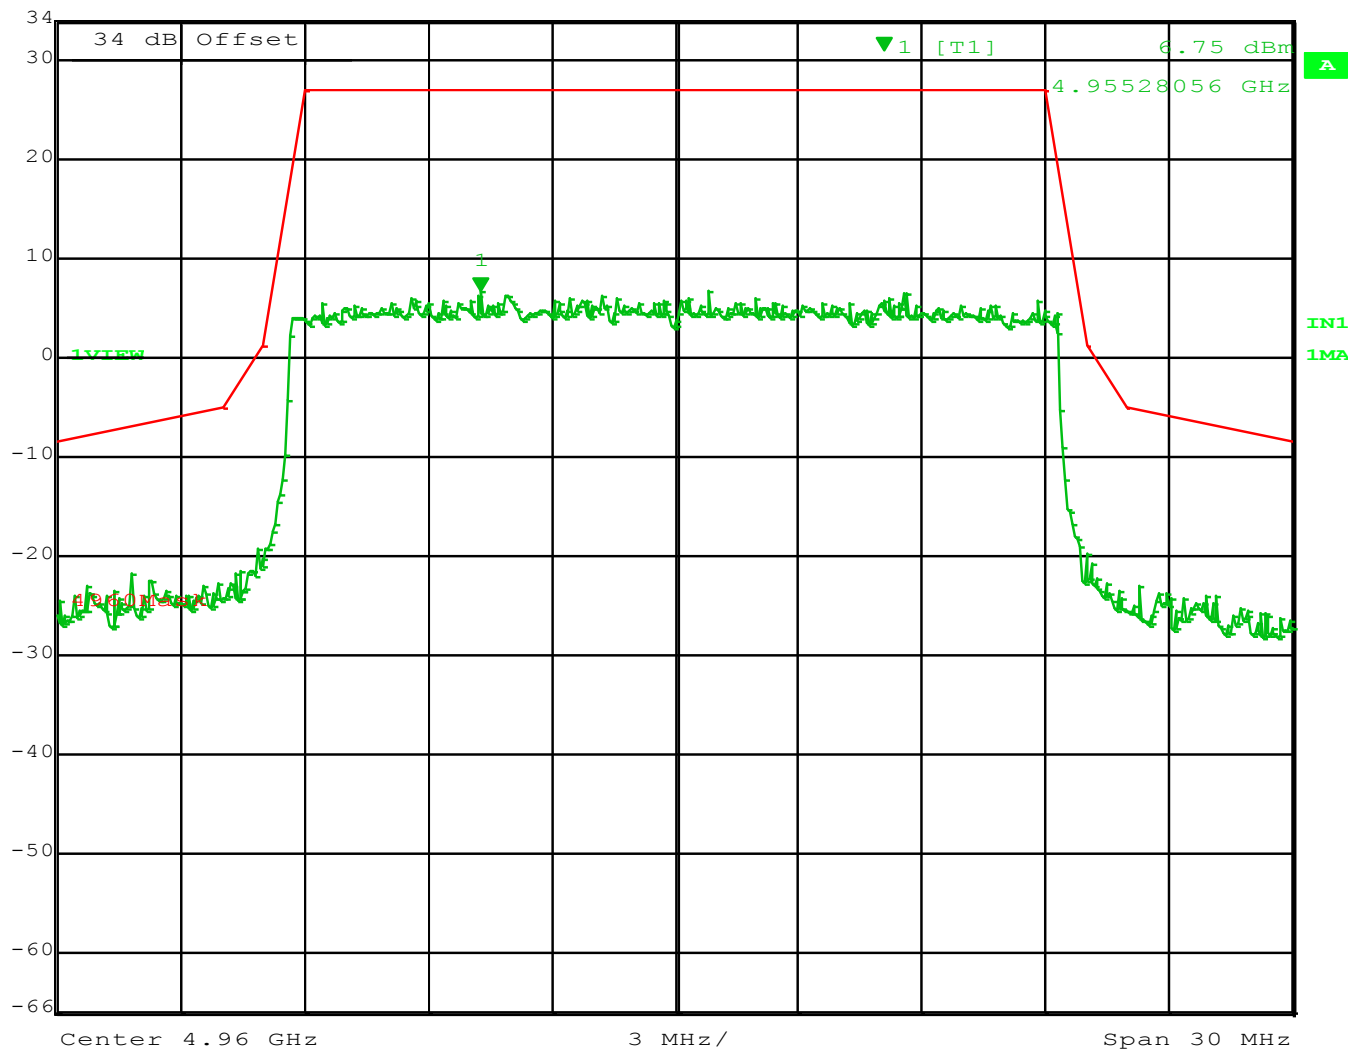

Date: 24.JUN.2015 05:06:30

Figure 8 – Center Frequency 4960 MHz - 20 MHz Channel Spacing


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 26 of 89



Marker 1 [T1] RBW 50 kHz RF Att 10 dB
Ref Lvl 6.24 dBm VBW 30 kHz
34 dBm 4.98153307 GHz SWT 50 ms Unit dBm

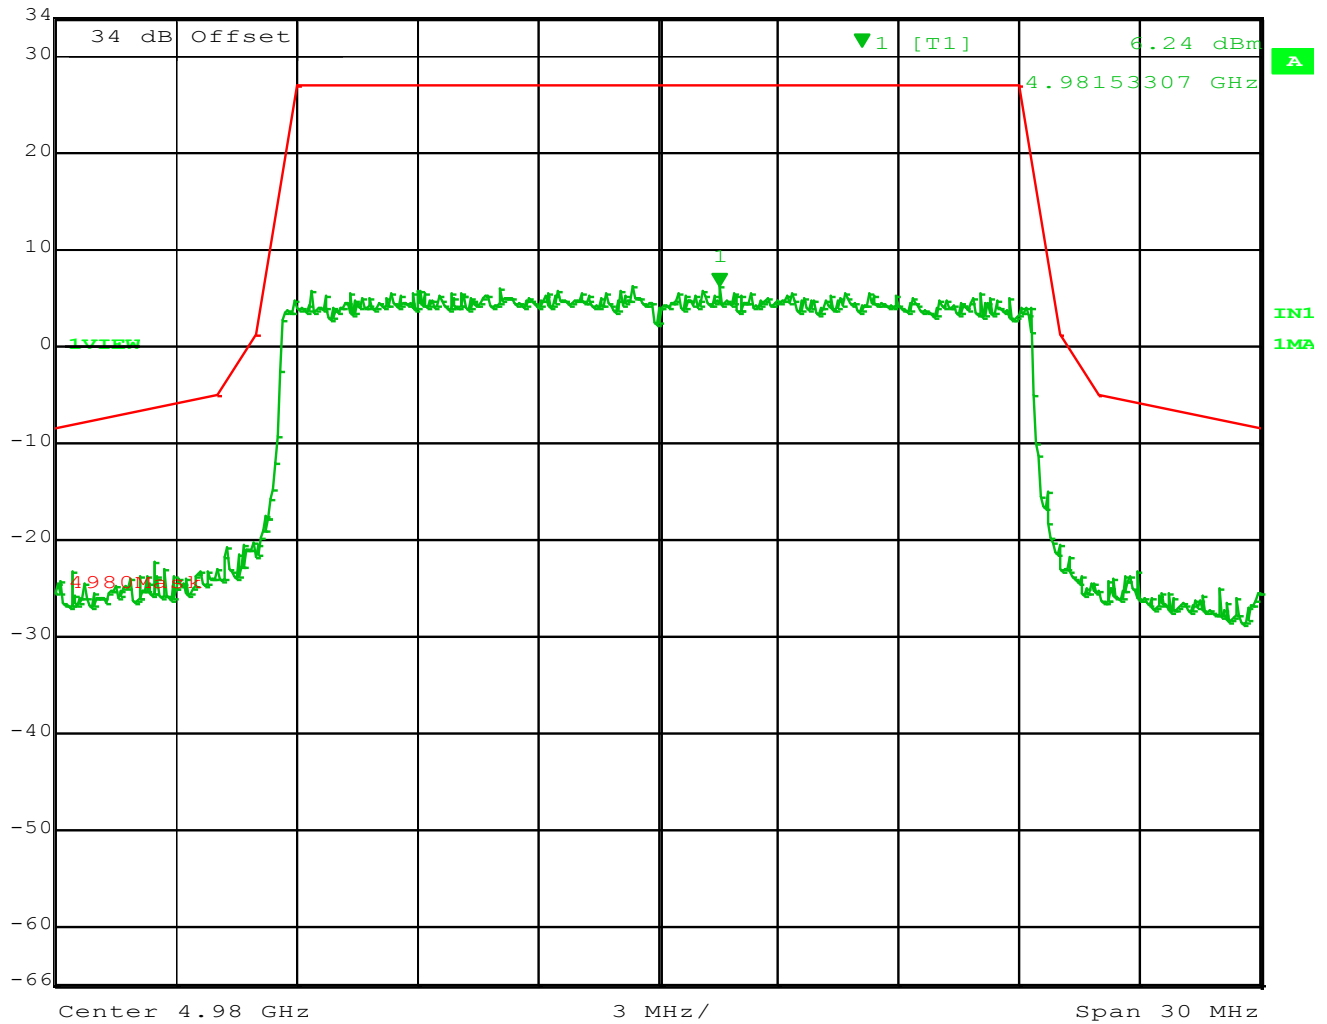

Date: 24.JUN.2015 05:08:13

Figure 9 – Center Frequency 4980 MHz - 20 MHz Channel Spacing

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

3.5 Conducted Emissions on AC Mains

This test measures the electromagnet levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other near by electronic equipment.

3.5.1 Over View of Test

Results	Complies (as tested per this report)					Date	7/2/2015	
Standard	FCC Parts 90.210							
Product	RF-7800W				Serial#	A00451		
Test Set-up	Tested in 10m Semi- Anechoic Chamber. EUT placed on table, see test plans for details							
EUT Powered By	120VAC/60Hz	Temp	23° C	Humidity	25%	Pressure	1011 mbar	
Frequency Range	150 kHz – 30 MHz							
Perf. Criteria	(Below Limit)		Perf. Verification		Readings Under Limit for L1 & Neutral			
Mod. to EUT	None		Test Performed By		Randall E Masline			

3.5.2 Test Procedure

This device is powered by POE (Power over Ethernet), therefore per FCC Part 15.207(c) this test is required.

3.5.3 Final Test


Since the EUT is a powered via POE (Power over Ethernet). Product Complies.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

NOTES:

Conducted Emissions @ 120V/60Hz
Neutral

Neutral

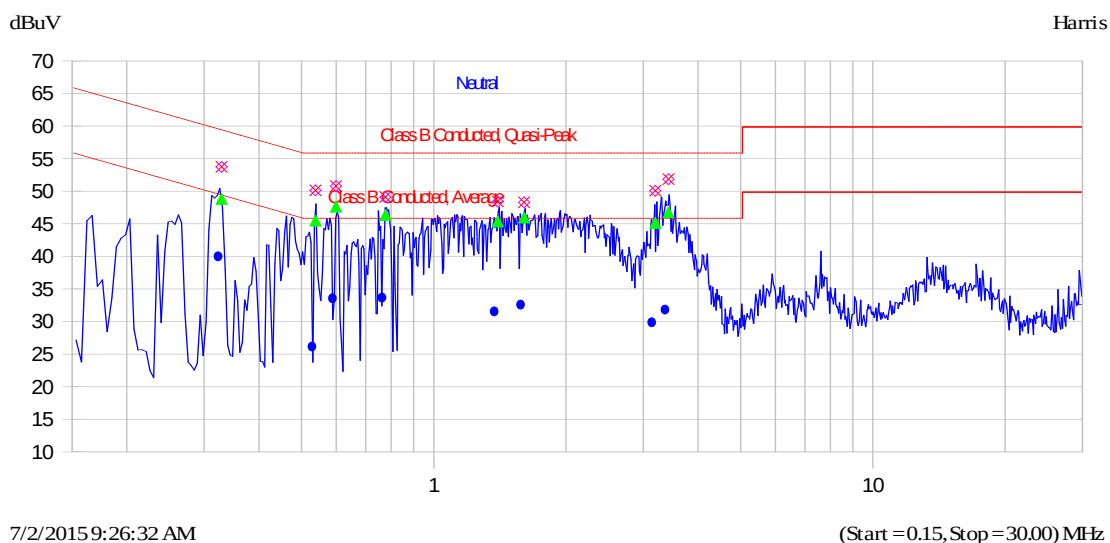


Frequency MHz	Peak dBuV	QP dBuV	Delta QP-QP Limit dB	Avg dBuV	Delta Avg-Avg Limit dB	Transducer Correction dB	Cable Correction dB
0.326	53.9	48.9	-10.6	39.9	-9.7	0.0	10.3
0.533	50.3	45.6	-10.4	26.0	-20.0	0.0	10.3
0.593	50.9	47.7	-8.3	33.4	-12.6	0.0	10.3
0.769	49.2	46.5	-9.5	33.5	-12.5	0.0	10.3
1.387	48.6	45.5	-10.5	31.4	-14.6	0.0	10.4
1.592	48.4	46.1	-9.9	32.5	-13.5	0.1	10.4
3.166	50.2	45.3	-10.7	29.7	-16.3	0.1	10.6
3.393	52.0	46.9	-9.1	31.7	-14.3	0.1	10.6

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

NOTES:

Conducted Emissions @ 120V/60Hz
Line

Line 1

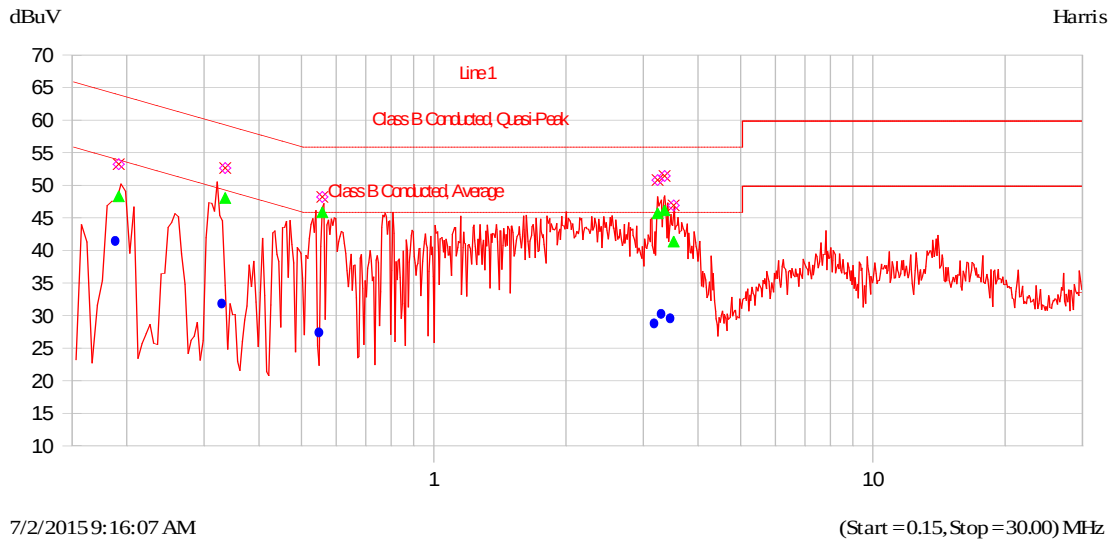

Frequency MHz	Peak dBuV	QP dBuV	Delta QP-QP Limit dB	Avg dBuV	Delta Avg-Avg Limit dB	Transducer Correction dB	Cable Correction dB
0.190	53.4	48.4	-15.6	41.3	-12.7	0.0	10.2
0.332	52.8	48.2	-11.2	31.7	-17.7	0.0	10.3
0.552	48.3	46.0	-10.0	27.3	-18.7	0.0	10.3
3.204	50.9	45.8	-10.2	28.7	-17.3	0.1	10.6
3.325	51.6	46.3	-9.7	30.1	-15.9	0.1	10.6
3.488	47.0	41.5	-14.5	29.4	-16.6	0.1	10.6

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4 Power Limits

For conducted tests, the emissions were measured at the antenna port.

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2009, RSP-100 Issue 9. These test methods are listed under the laboratory's NVLAP Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

4.1 Conducted Output Power, FCC 90.1215

The transmitting power of stations operating in the 4940–4990 MHz band must not exceed the maximum limits in this section. (a) The peak transmit power should not exceed:

Channel bandwidth (MHz)	Low power peak trans- mitter power (dBm)	High power peak trans- mitter power (dBm)
1	7	20
5	14	27
10	17	30
15	18.8	31.8
20	20	33

4.1.1 Test Over View


Results	Complies (as tested per this report)					Date	6/27/2015	
Standard	FCC Part 90.1215							
Product	RF-7800W				Serial#	A00451		
Test Set-up	Direct Measurement from antenna port							
EUT Powered By	Power over Ethernet	Temp	22° C	Humidity	32%	Pressure	1010mbar	
Perf. Criteria	(Below Limit)		Perf. Verification			Readings Under Limit		
Mod. to EUT	None		Test Performed By			Randall E Masline		

4.1.2 Test Procedure

The peak output power was measured at the low, mid and high band frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The cable loss and the attenuator was measured and added in the reference level offset in the spectrum analyzer. The spectrum analyzer's resolution bandwidth was greater than the 20dB bandwidth of the modulated carrier and the video bandwidth was equal to the resolution bandwidth.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Test Setup:



4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Power output test.

4.1.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

4.1.5 Peak Power Output Results

As tested, the EUT was found to be compliant to the requirements of the test standard.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

5 MHz Spacing		8 dBi Antenna							
							8 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4942.5	22	256-QAM	28	22.50	27	-5.5	31	53	-22
4967.5	22	256-QAM	28	22.27	27	-4.73	30.77	53	-22.23
4987.5	22	256-QAM	28	24.32	27	-2.68	32.82	53	-20.18

Figure 10 – Highest Peak Conducted Power Output for all Modulations with 5 MHz channel spacing with EIRP for a 8 dBi Gain antenna

10 MHz Spacing		8 dBi Antenna							
							8 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4945	22	256-QAM	59	23.49	30	-6.51	31.99	56	-24.01
4965	22	256-QAM	59	25.55	30	-4.45	34.05	56	-21.95
4985	22	256-QAM	59	24.93	30	-5.07	33.43	56	-22.57

Figure 11 – Highest Peak Conducted Power Output for all Modulations with 10 MHz channel spacing with EIRP for a 8 dBi Gain antenna

20 MHz Spacing		8 dBi Antenna							
							8 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4950	22	256-QAM	119	22.49	33	-10.51	30.99	59	-28.01
4965	22	256-QAM	119	25.55	33	-7.45	34.05	59	-24.95
4980	22	256-QAM	119	21.85	33	-11.15	30.35	59	-28.65

Figure 12 – Highest Peak Conducted Power Output for all Modulations with 20 MHz channel spacing with EIRP for a 8 dBi Gain antenna

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

5 MHz Spacing		13.5 dBi Antenna							
							13.5 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4942.5	22	256-QAM	29	22.50	27	-4.5	36.5	53	-16.5
4967.5	22	256-QAM	29	22.27	27	-4.73	36.27	53	-16.73
4987.5	22	256-QAM	29	24.32	27	-2.68	38.32	53	-14.68

Figure 13 – Highest Peak Conducted Power Output for all Modulations with 5 MHz channel spacing with EIRP for a 13.5 dBi Gain antenna

10 MHz Spacing									
							13.5 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4945	22	256-QAM	59	23.49	30	-6.51	37.49	56	-18.51
4965	22	256-QAM	59	25.55	30	-4.45	39.55	56	-16.45
4985	22	256-QAM	59	24.93	30	-5.07	38.93	56	-17.07

Figure 14 – Highest Peak Conducted Power Output for all Modulations with 10 MHz channel spacing with EIRP for a 13.5 dBi Gain antenna

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

20 MHz Spacing									
							13.5 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4950	22	256-QAM	119	22.49	33	-10.51	36.49	59	-22.51
4965	22	256-QAM	119	25.55	33	-7.45	39.55	59	-19.45
4980	22	256-QAM	119	21.85	33	-11.15	35.85	59	-23.15

Figure 15 – Highest Peak Conducted Power Output for all Modulations with 20 MHz channel spacing with EIRP for a 13.5 dBi Gain antenna

5 MHz Spacing									
							21 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4942.5	22	256-QAM	29	22.50	27	-4.5	43.5	53	-9.5
4967.5	22	256-QAM	29	22.27	27	-4.73	43.27	53	-9.73
4987.5	22	256-QAM	29	24.32	27	-2.68	45.32	53	-7.68

Figure 16 – Highest Peak Conducted Power Output for all Modulations with 5 MHz channel spacing with EIRP for a 21 dBi Gain antenna

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

10 MHz Spacing									
							21 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4945	22	256-QAM	59	23.49	30	-6.51	44.49	56	-11.51
4965	22	256-QAM	59	25.55	30	-4.45	46.55	56	-9.45
4985	22	256-QAM	59	24.93	30	-5.07	45.93	56	-10.07

Figure 17 -- Highest Peak Conducted Power Output for all Modulations with 10 MHz channel spacing with EIRP for a 21 dBi Gain antenna

20 MHz Spacing									
							21 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4950	22	256-QAM	119	22.49	33	-10.51	43.49	59	-15.51
4965	22	256-QAM	119	25.55	33	-7.45	46.55	59	-12.45
4980	22	256-QAM	119	21.85	33	-11.15	42.85	59	-16.15

Figure 18 -- Highest Peak Conducted Power Output for all Modulations with 20 MHz channel spacing with EIRP for a 21 dBi Gain antenna

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

5 MHz Spacing									
							27.5 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4942.5	22	256-QAM	29	22.50	27	-4.5	50	53	-3
4967.5	22	256-QAM	29	22.27	27	-4.73	49.77	53	-3.23
4987.5	22	256-QAM	29	24.32	27	-2.68	51.82	53	-1.18

Figure 19 – Highest Peak Conducted Power Output for all Modulations with 5 MHz channel spacing with EIRP for a 27.5 dBi Gain antenna

10 MHz Spacing									
							26 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4945	22	256-QAM	59	23.49	30	-6.51	49.49	56	-6.51
4965	22	256-QAM	59	25.55	30	-4.45	51.55	56	-4.45
4985	22	256-QAM	59	24.93	30	-5.07	50.93	56	-5.07

Figure 20 – – Highest Peak Conducted Power Output for all Modulations with 10 MHz channel spacing with EIRP for a 27.5 dBi Gain antenna

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

20 MHz Spacing									
							26 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4950	22	256-QAM	119	22.49	33	-10.51	48.49	59	-10.51
4965	22	256-QAM	119	25.55	33	-7.45	51.55	59	-7.45
4980	22	256-QAM	119	21.85	33	-11.15	47.85	59	-11.15

Figure 21 -- Highest Peak Conducted Power Output for all Modulations with 20 MHz channel spacing with EIRP for a 27.5 dBi Gain antenna

5 MHz Spacing									
							30 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4942.5	22	256-QAM	29	22.50	27	-2.5	52.50	53	-0.5
4967.5	22	256-QAM	29	22.27	27	-2.73	52.27	53	-0.73
4987.5	22	256-QAM	29	22.32	27	-2.68	52.32	53	-0.68

Figure 22 – Highest Peak Conducted Power Output for all Modulations with 5 MHz channel spacing with EIRP for 30 dBi Gain antenna

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

10 MHz Spacing									
							30 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4945	22	256-QAM	59	23.49	30	-6.51	53.49	56	-2.51
4965	22	256-QAM	59	25.55	30	-4.45	55.55	56	-0.45
4985	22	256-QAM	59	24.93	30	-5.07	54.93	56	-1.07

Figure 23 -- Highest Peak Conducted Power Output for all Modulations with 10 MHz channel spacing with EIRP for 30 dBi Gain antenna

20 MHz Spacing									
							30 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4950	22	256-QAM	119	22.49	33	-10.51	52.49	59	-6.51
4965	22	256-QAM	119	25.55	33	-7.45	55.55	59	-3.45
4980	22	256-QAM	119	21.85	33	-11.15	51.85	59	-7.15

Figure 24 -- Highest Peak Conducted Power Output for all Modulations with 20 MHz channel spacing with EIRP for 30 dBi Gain antenna

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4.2 Peak Power Spectral Density

4.2.1 Test Over View

High power devices are also limited to a peak power spectral density of 21 dBm per one MHz. High power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 21 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the peak transmit power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi. However, high power point-to-point or point-to-multipoint operation (both fixed and temporary-fixed rapid deployment) may employ transmitting antennas with directional gain up to 26 dBi without any corresponding reduction in the transmitter power or spectral density. Corresponding reduction in the peak transmit power and peak power spectral density should be the amount in decibels that the directional gain of the antenna exceeds 26dBi.

Results	Complies (as tested per this report)					Date	6/24/2015	
Standard	FCC Part 90.1215							
Product	RF-7800W				Serial#	A00451		
Test Set-up	Direct Measurement from antenna port							
EUT Powered By	Power over Ethernet	Temp	22° C	Humidity	32%	Pressure	1010mbar	
Perf. Criteria	Below Limit (10dBm)		Perf. Verification			≤21 dBm in any 1 MHz		
Mod. to EUT	None		Test Performed By			Randall E Masline		

4.2.2 Test Procedure

Using the methods of ANSI C63.10:2009.

4.2.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Peak Power Spectral Density test.

4.2.4 Final Test


The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4.2.5 Final Data



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -28.90 dBm VBW 3 MHz
34 dBm 4.94207916 GHz SWT 5 ms Unit dBm

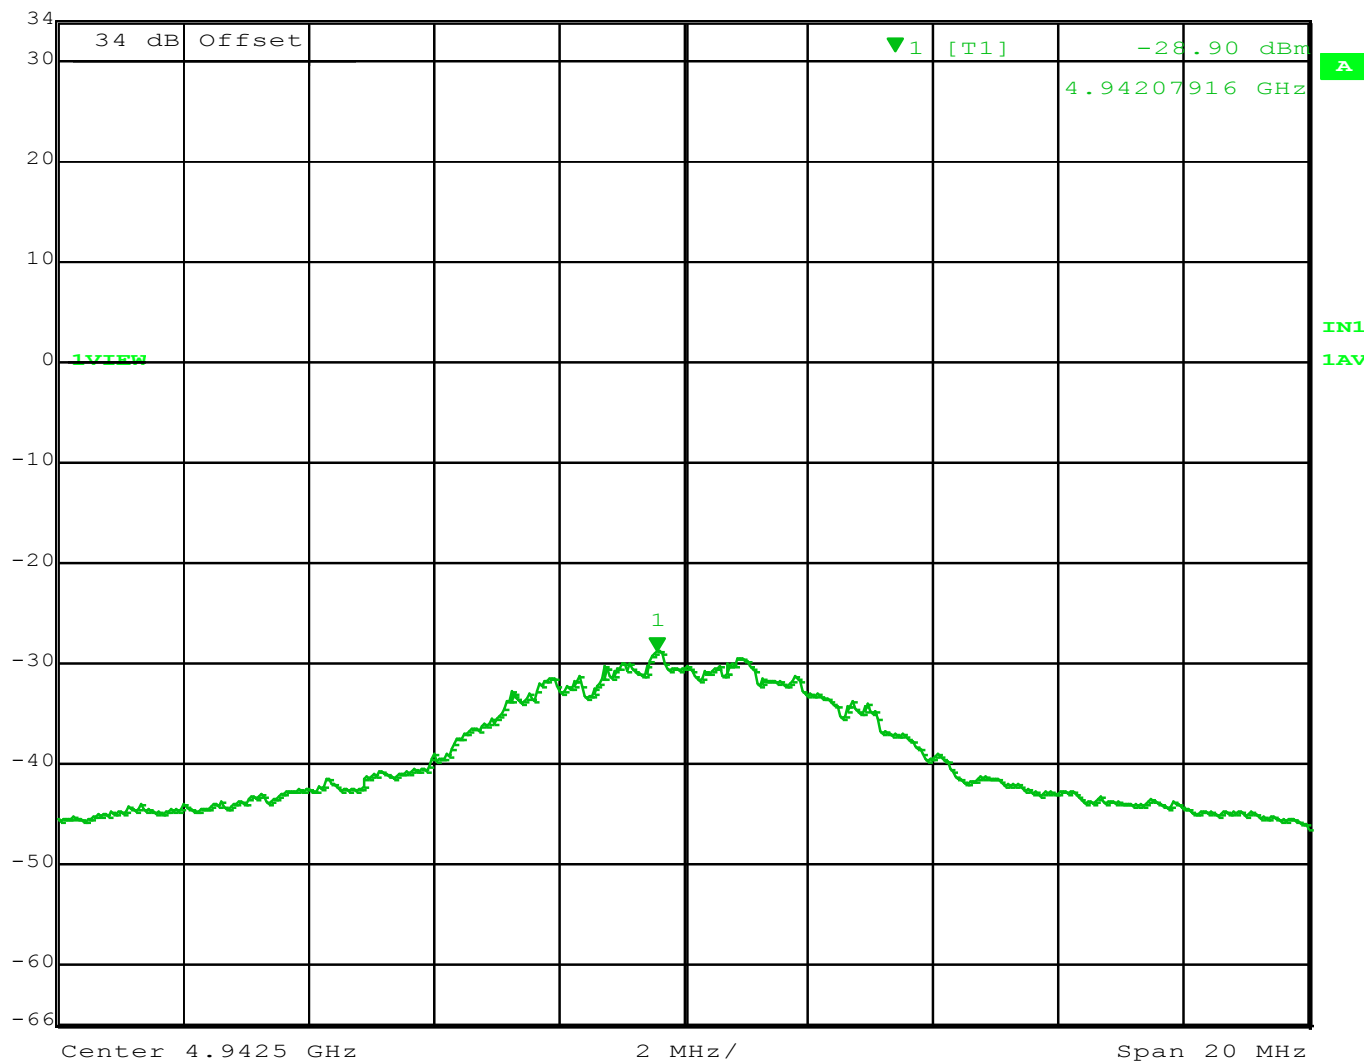

Date: 24.JUN.2015 21:50:50

Figure 25: 4942.5 MHz at 5MHz BW


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 41 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -17.32 dBm VBW 3 MHz
34 dBm 4.96503507 GHz SWT 5 ms Unit dBm

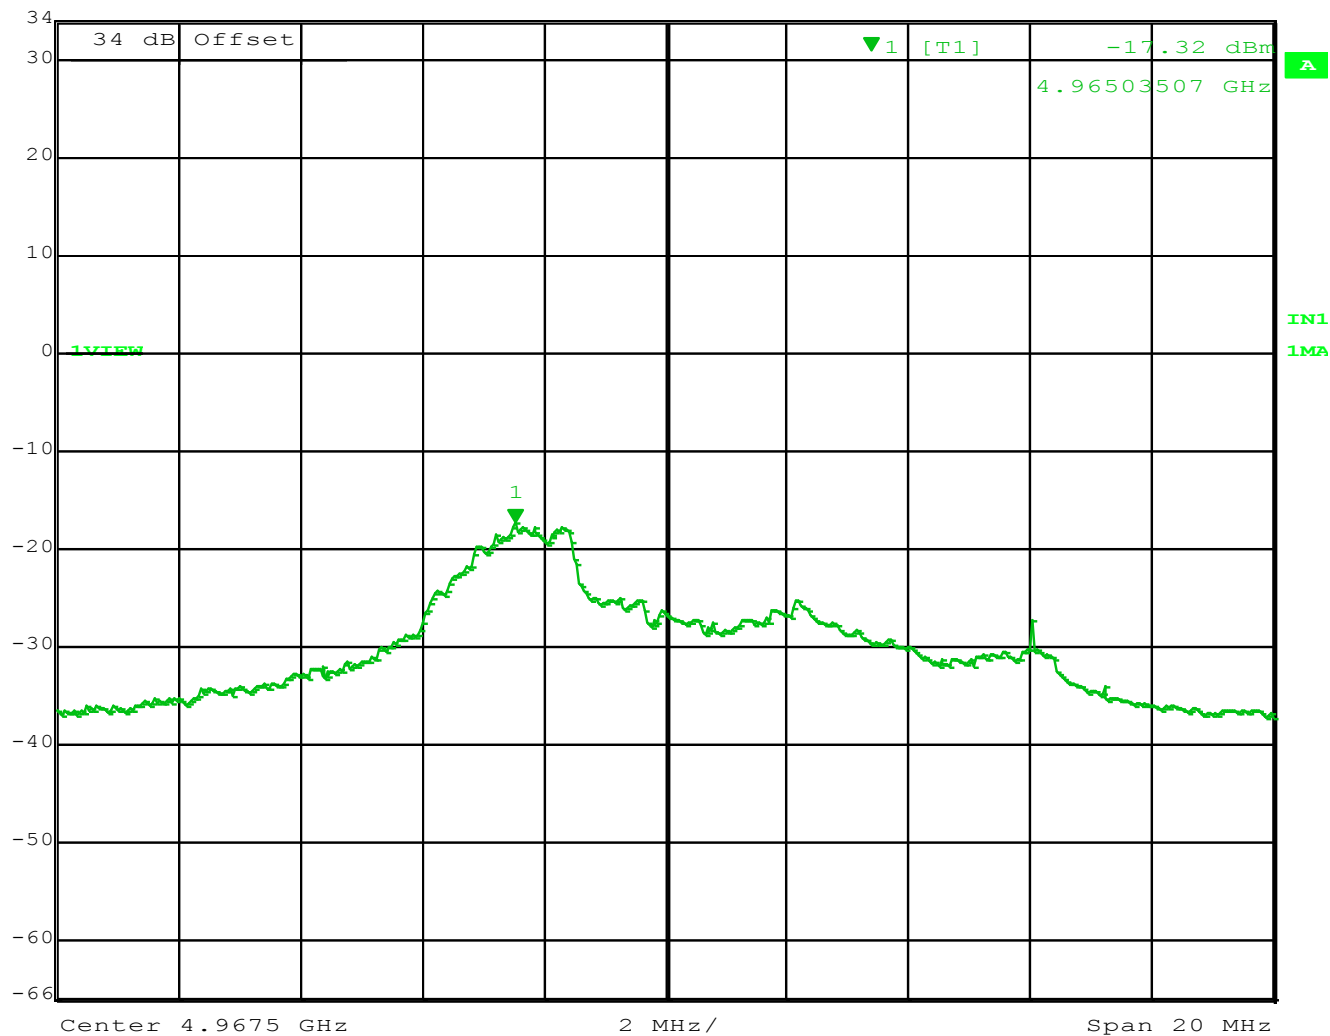

Date: 24.JUN.2015 21:52:12

Figure 26: 4967.5 MHz at 5 MHz BW


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 42 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -14.87 dBm VBW 3 MHz
34 dBm 4.98719940 GHz SWT 5 ms Unit dBm

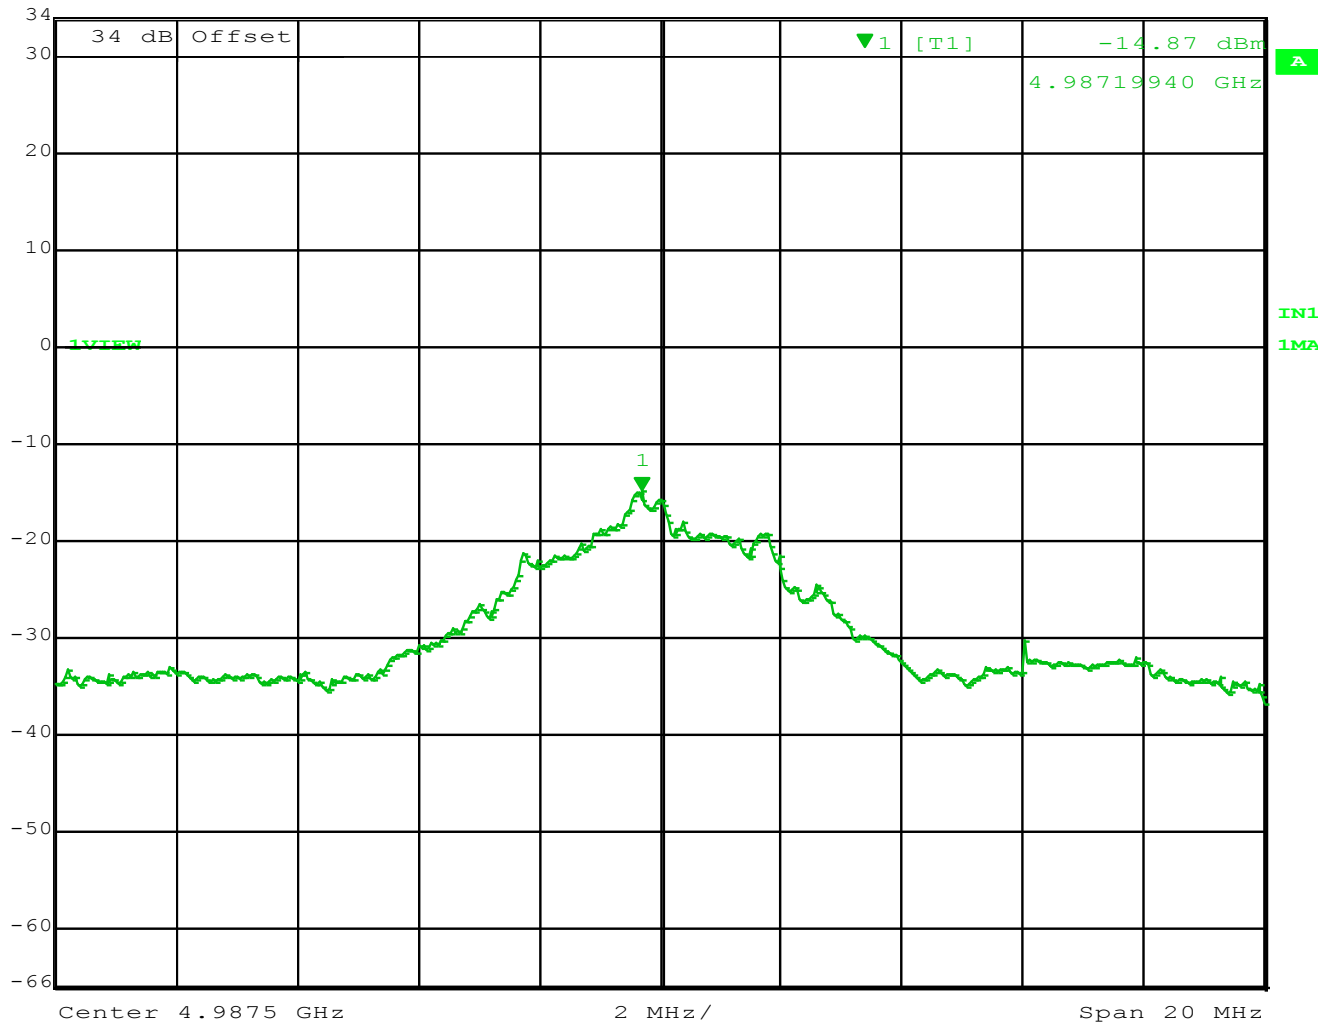

Date: 24.JUN.2015 21:53:26

Figure 27: 4987.5 MHz at 5 MHz BW


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 43 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -22.64 dBm VBW 3 MHz
34 dBm 4.94173347 GHz SWT 5 ms Unit dBm

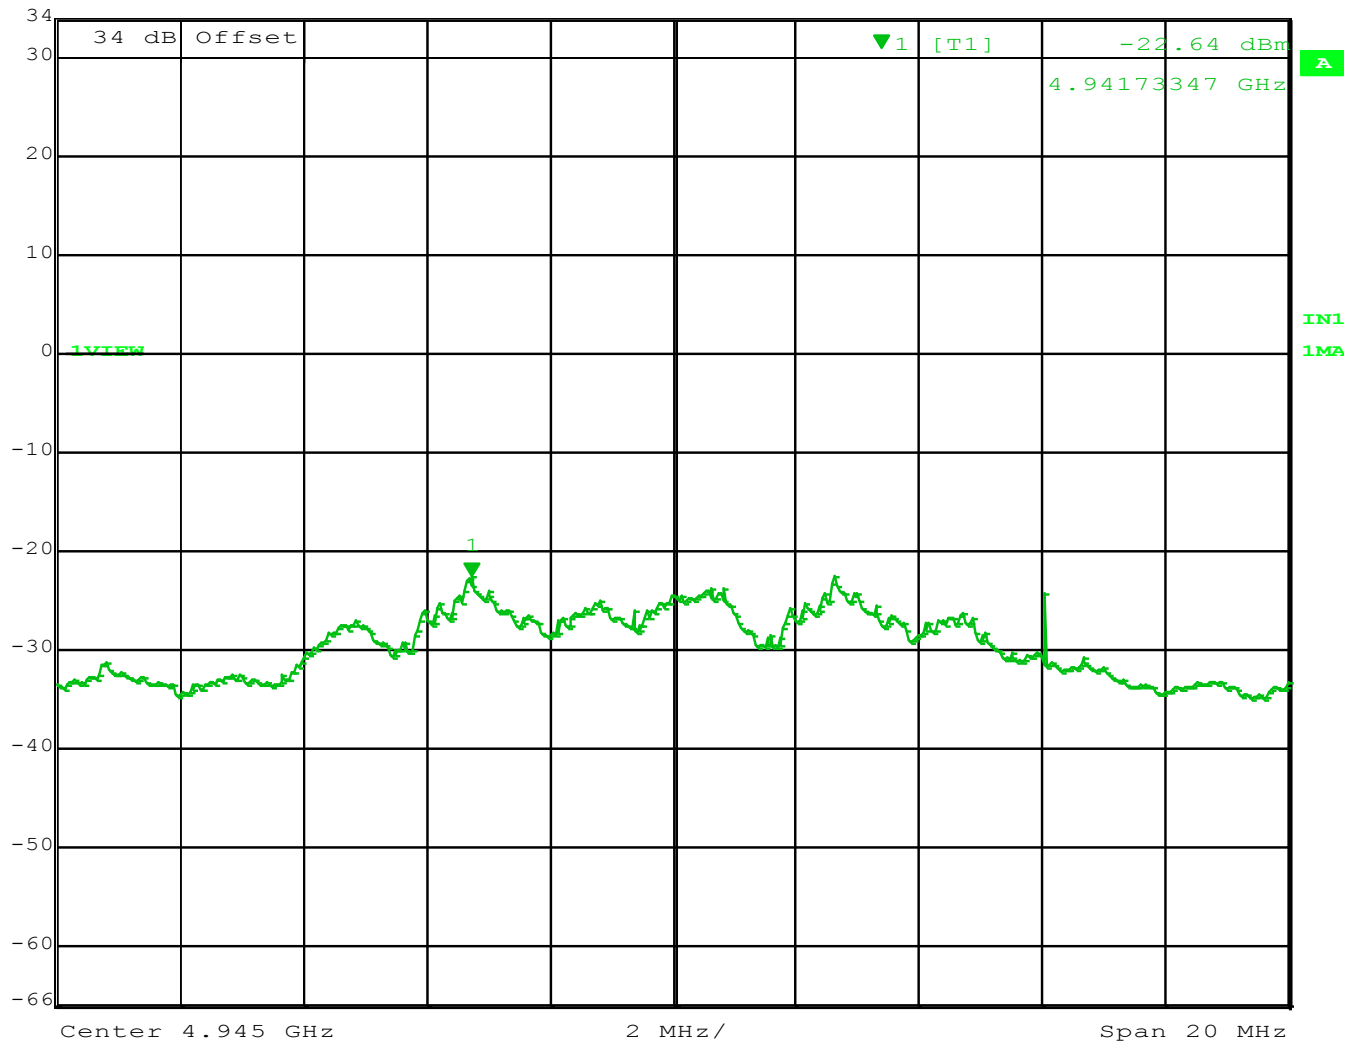

Date: 24.JUN.2015 21:54:43

Figure 28: 4945 MHz at 10 MHz BW


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 44 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -21.88 dBm VBW 3 MHz
34 dBm 4.96269539 GHz SWT 5 ms Unit dBm

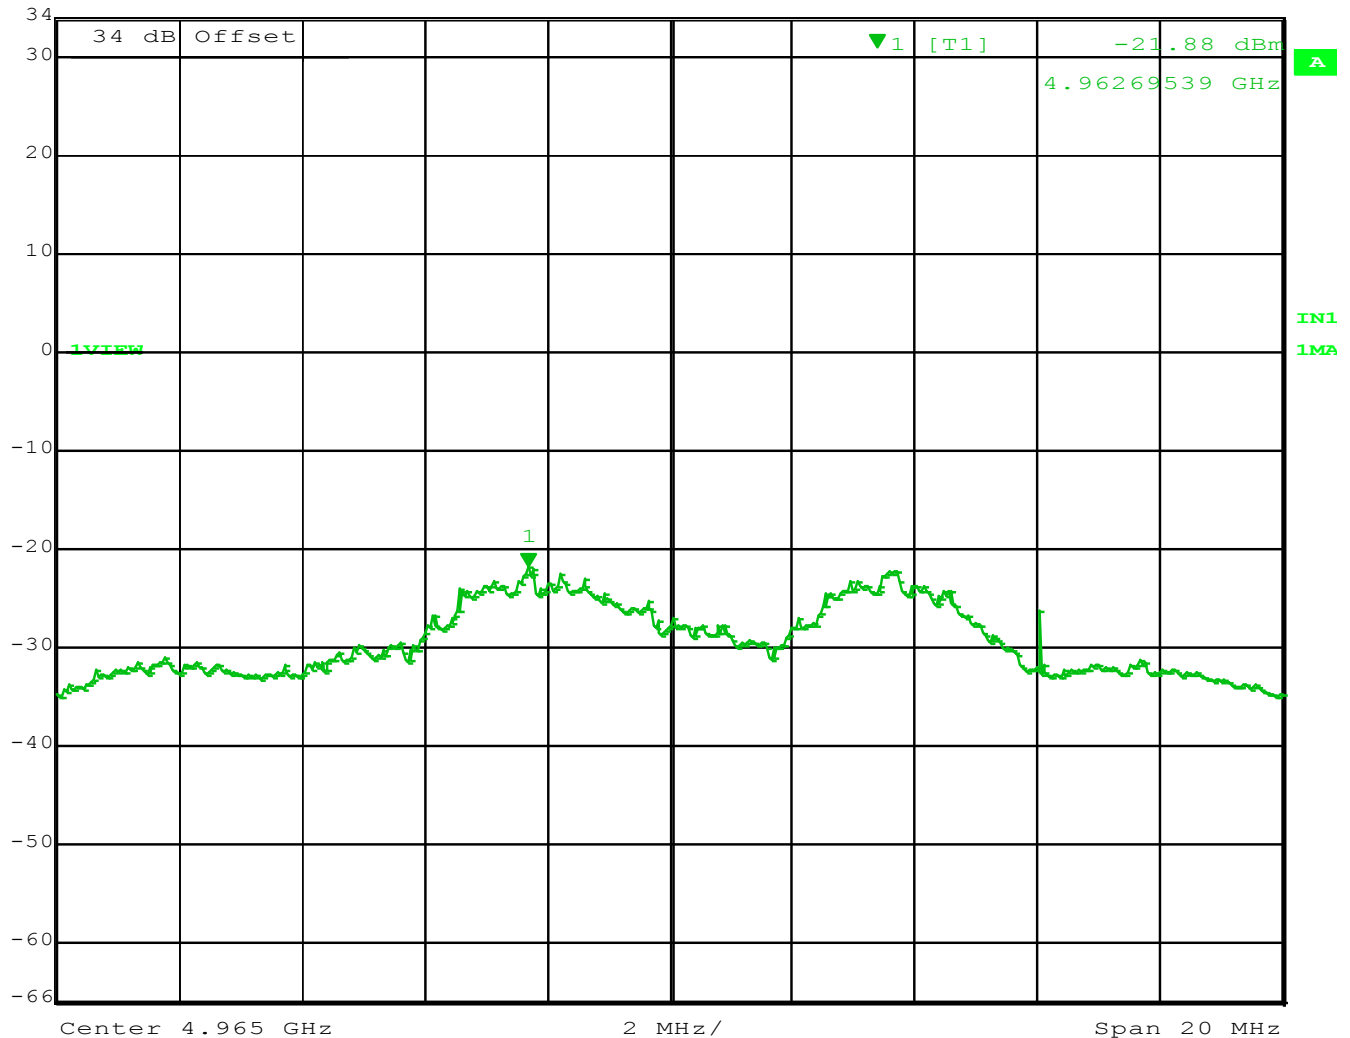

Date: 24.JUN.2015 21:55:39

Figure 29: 4965 MHz at 10 MHz BW


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 45 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -21.90 dBm VBW 3 MHz
34 dBm 4.98874749 GHz SWT 5 ms Unit dBm

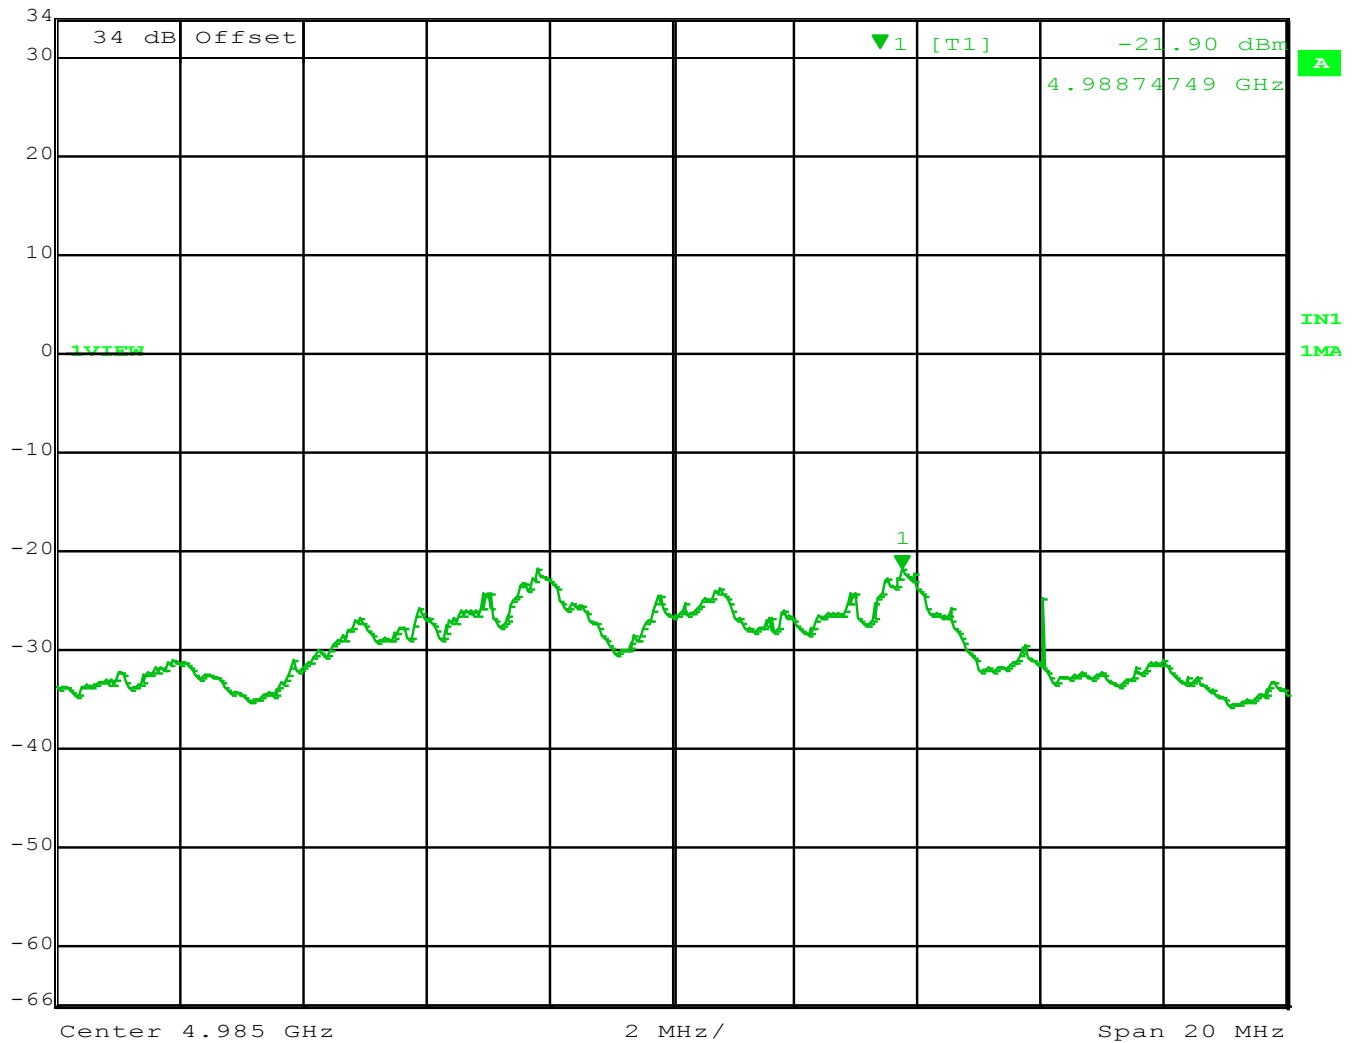

Date: 24.JUN.2015 21:56:37

Figure 30: 4985 MHz at 10 MHz BW


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 46 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -24.74 dBm VBW 3 MHz
34 dBm 4.95904810 GHz SWT 5 ms Unit dBm

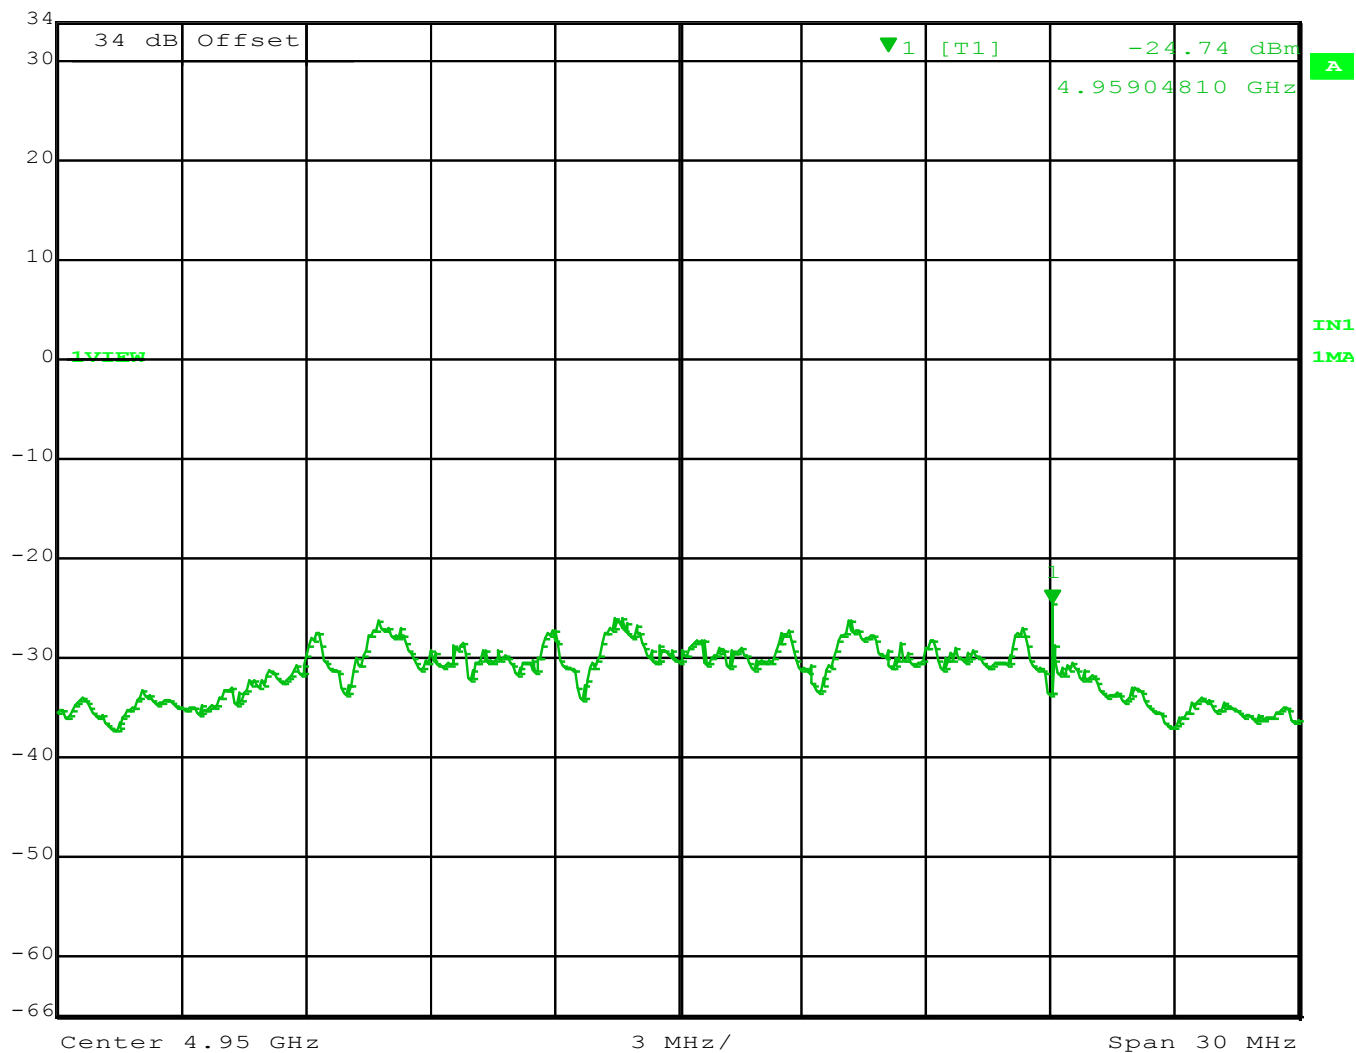

Date: 24.JUN.2015 21:58:15

Figure 31: 4950 MHz at 20 MHz BW


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 47 of 89



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
34 dBm	-24.90 dBm	VBW	3 MHz		
	4.96904810 GHz	SWT	5 ms	Unit	dBm

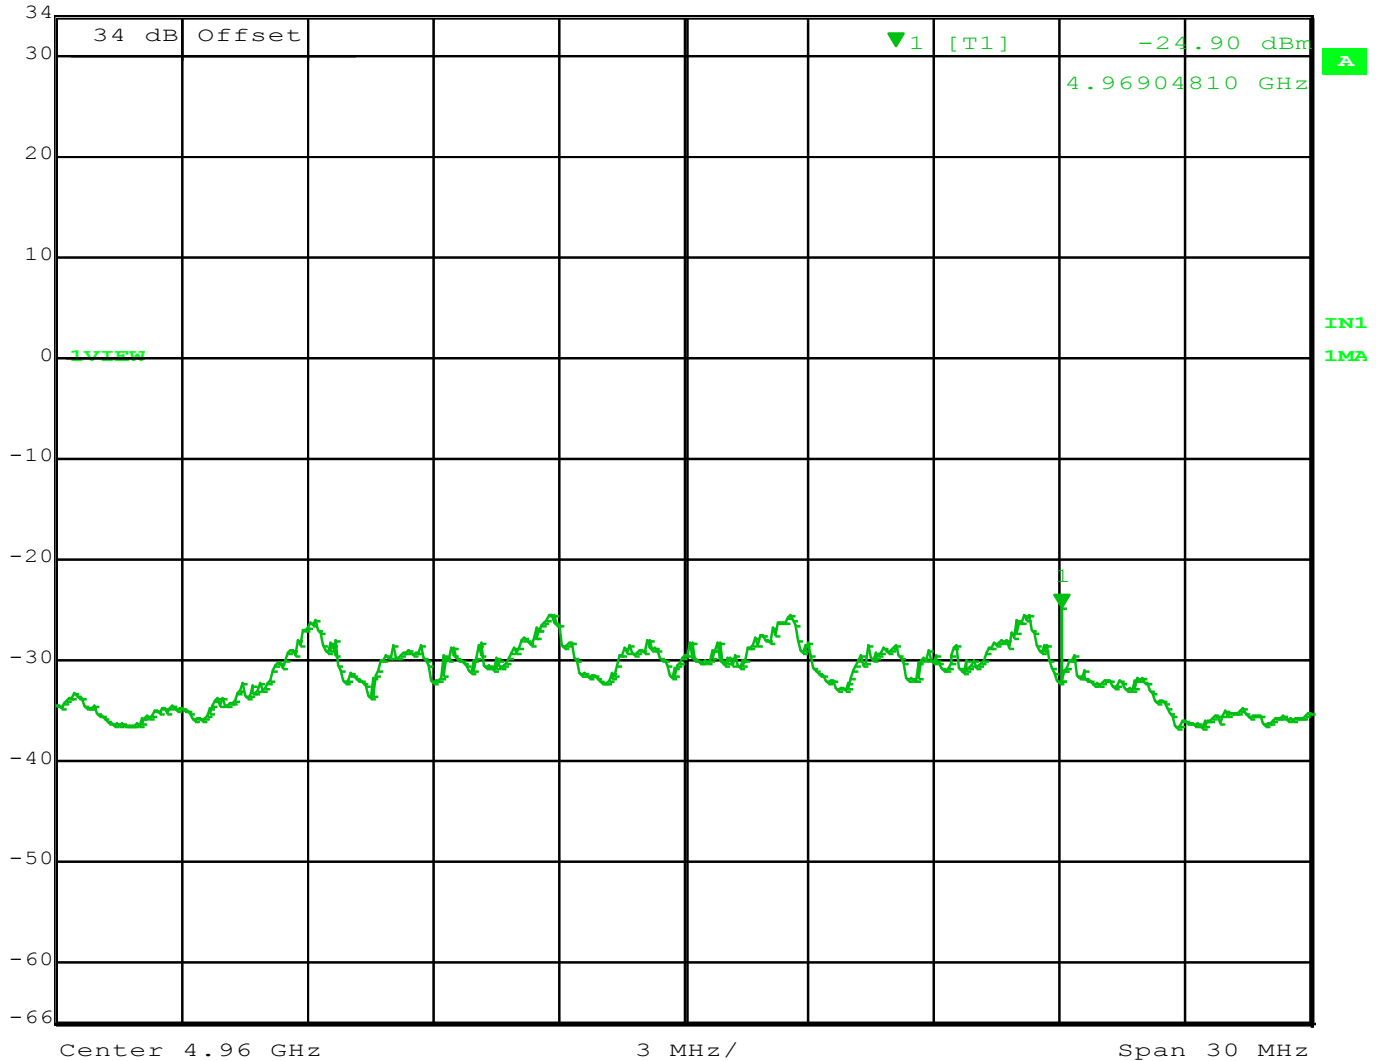

Date: 24.JUN.2015 21:59:03

Figure 32: 4960 MHz at 20 MHz BW


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 48 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -23.22 dBm VBW 3 MHz
34 dBm 4.98904810 GHz SWT 5 ms Unit dBm

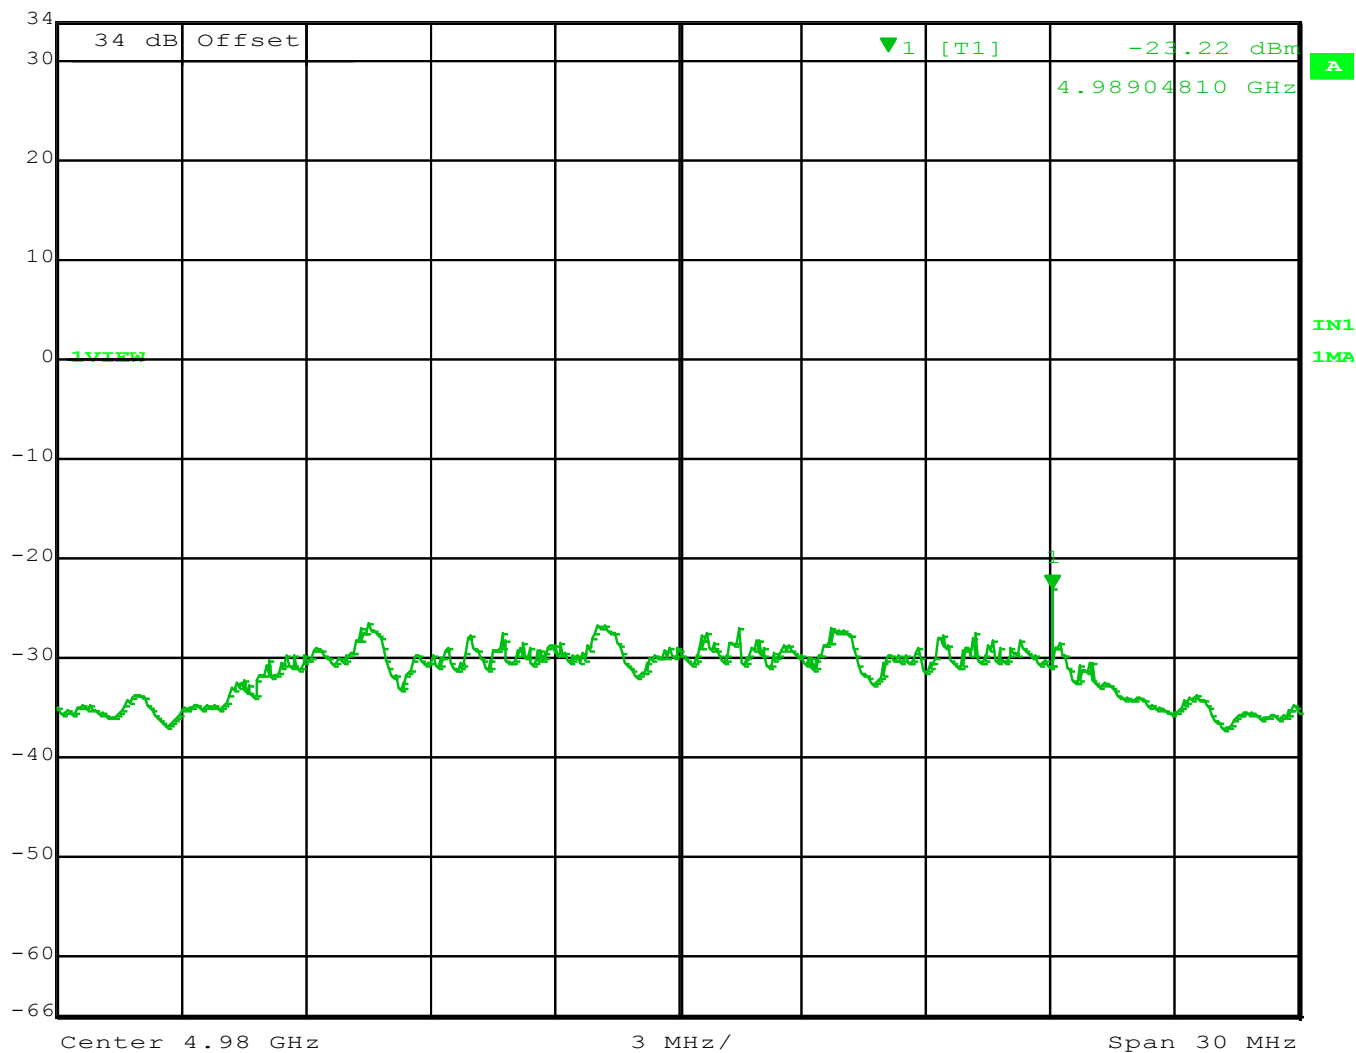

Date: 24.JUN.2015 21:59:53

Figure 33: 4980 MHz at 20 MHz BW

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4.3 99% Occupied Bandwidth

The following channel center frequencies are permitted to be aggregated for channel bandwidths of 5, 10, 15 or 20 MHz Channel numbers 1 through 5 and 15 through 18 are 1 MHz channels and channels numbers 6 through 14 are 5 MHz channels.

4.3.1 Test Over View

Results	Complies (as tested per this report)					Date	6/27/2015	
Standard	FCC Part 90.1213 & 2.1049							
Product	RF-7800W				Serial#	A00451		
Test Set-up	Direct Measurement from antenna port							
EUT Powered By	Power over Ethernet	Temp	22° F	Humidity	32%	Pressure	1010 mbar	
Perf. Criteria	(Below Limit) No limit Specified		Perf. Verification			Readings Under Limit		
Mod. to EUT	None		Test Performed By			Randall E Masline		

4.3.2 Test Procedure

The 99% occupied bandwidth is measured using EMI receiver (spectrum analyzer) with RBW = 1% of 99% OBW, VBW >=RBW.

4.3.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Occupied Bandwidth test.

4.3.4 Final Test

The EUT met the performance criteria requirement as specified in the standards.

4.3.5 Final Data


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 50 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 27.35 dBm VBW 3 MHz
30.5 dBm 4.94348196 GHz SWT 5 ms Unit dBm

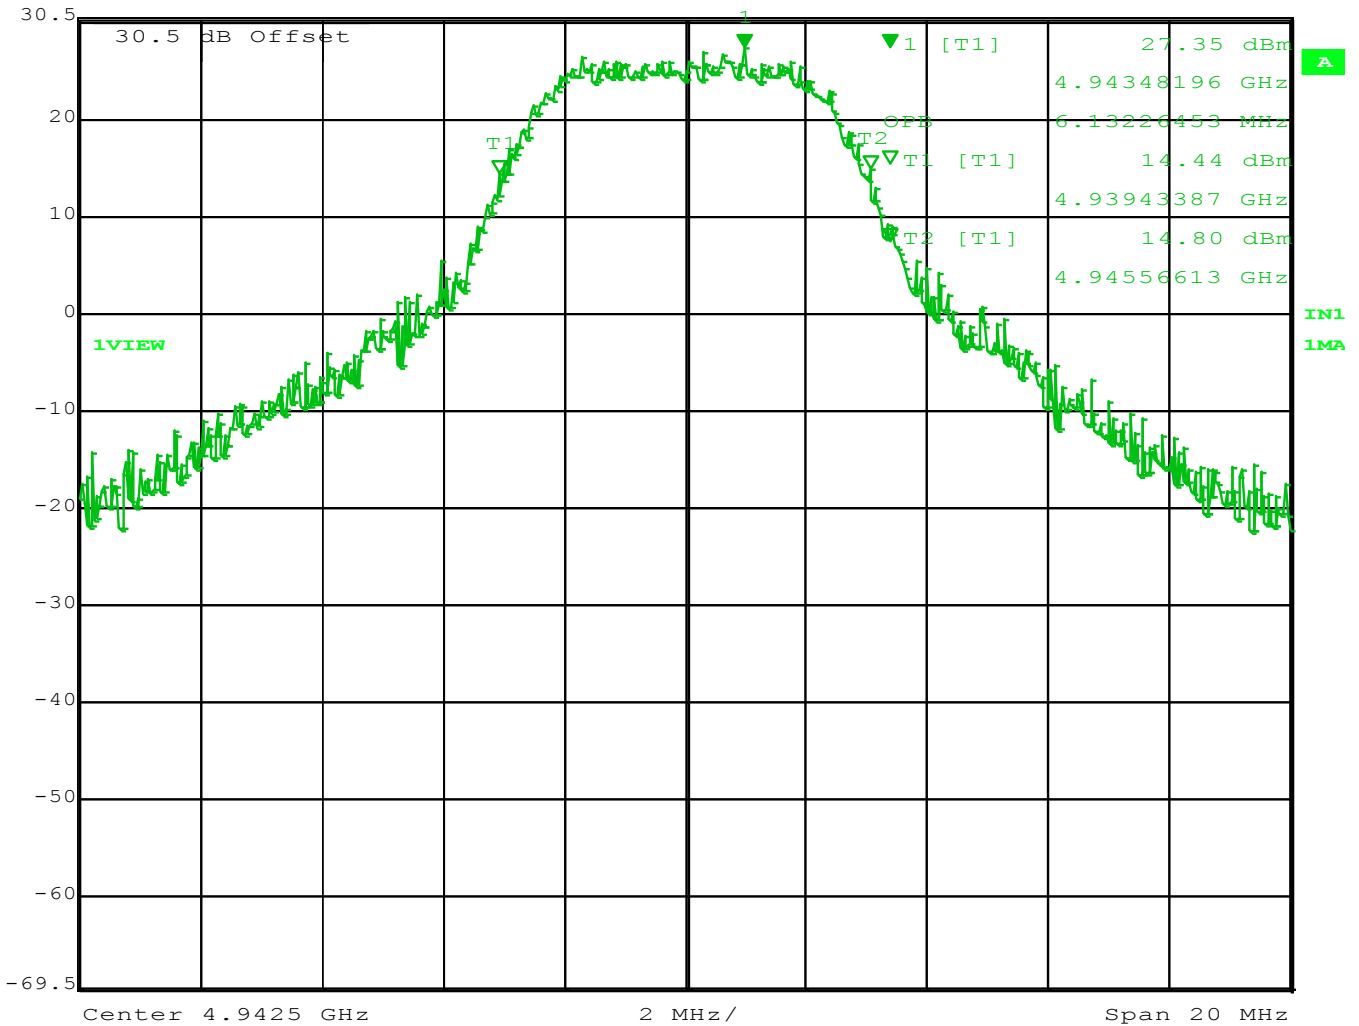

Date: 1.JUL.2015 18:34:35

Figure 34: 99% Occupied Bandwidth 4942.5 MHz - 5 MHz Channel

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 51 of 89



Marker 1 [T1]


RBW 1 MHz RF Att 10 dB

Ref Lvl 26.68 dBm

VBW 3 MHz

30.5 dBm 4.96836172 GHz

SWT 5 ms Unit dBm

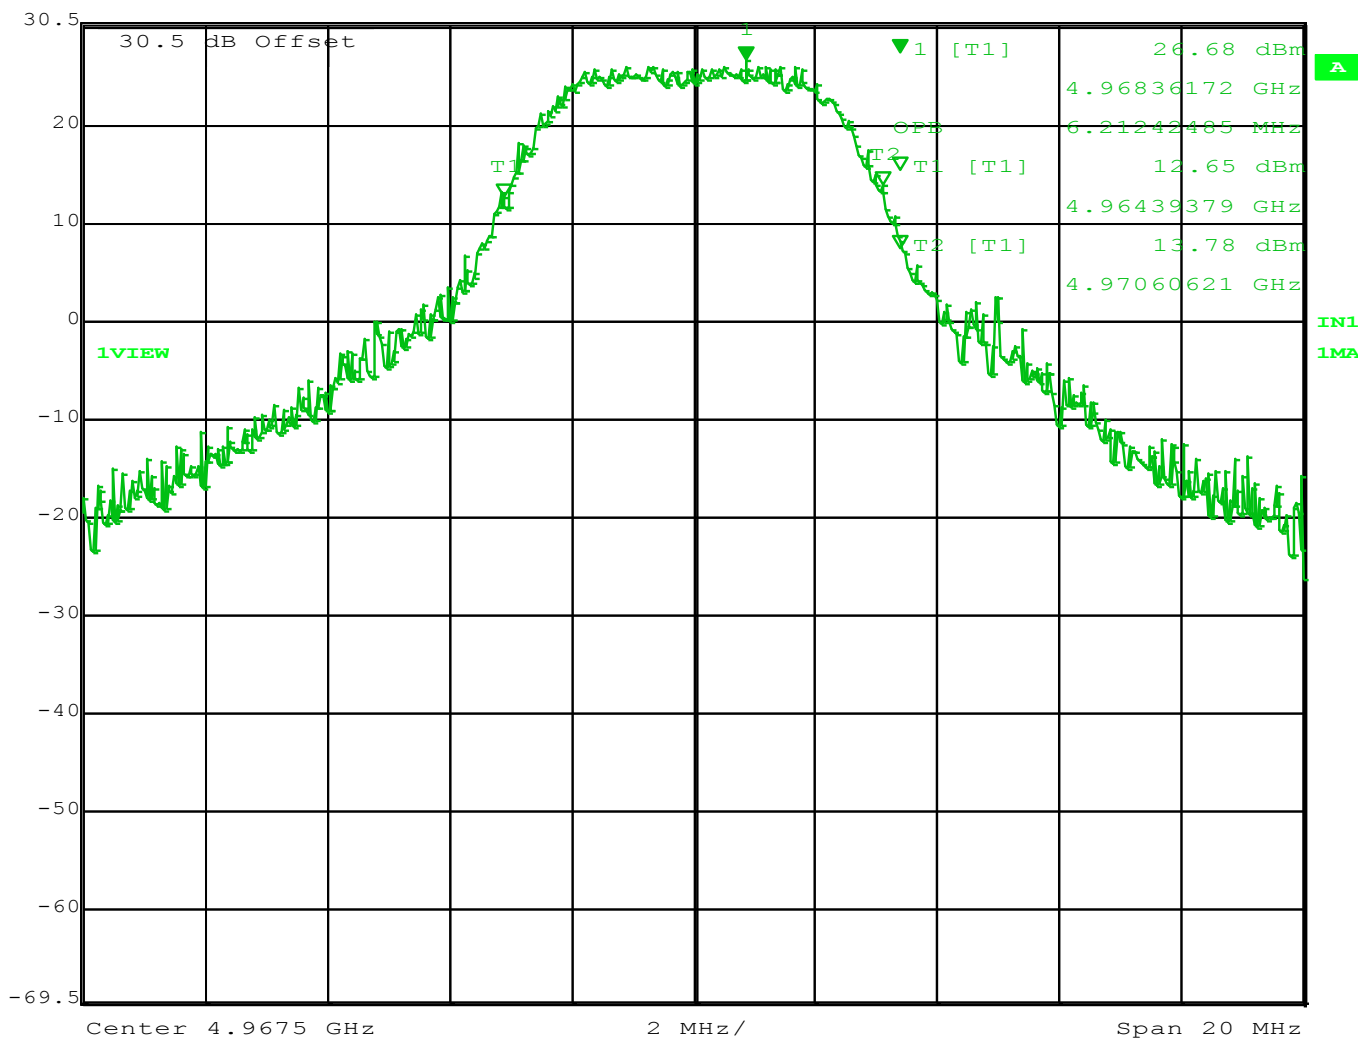

Date: 1.JUL.2015 18:35:24

Figure 35: 99% Occupied Bandwidth 4967.5 MHz - 5 MHz Channel


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 52 of 89



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
30.5 dBm	26.10 dBm	VBW	3 MHz		
	4.98808116 GHz	SWT	5 ms	Unit	dBm

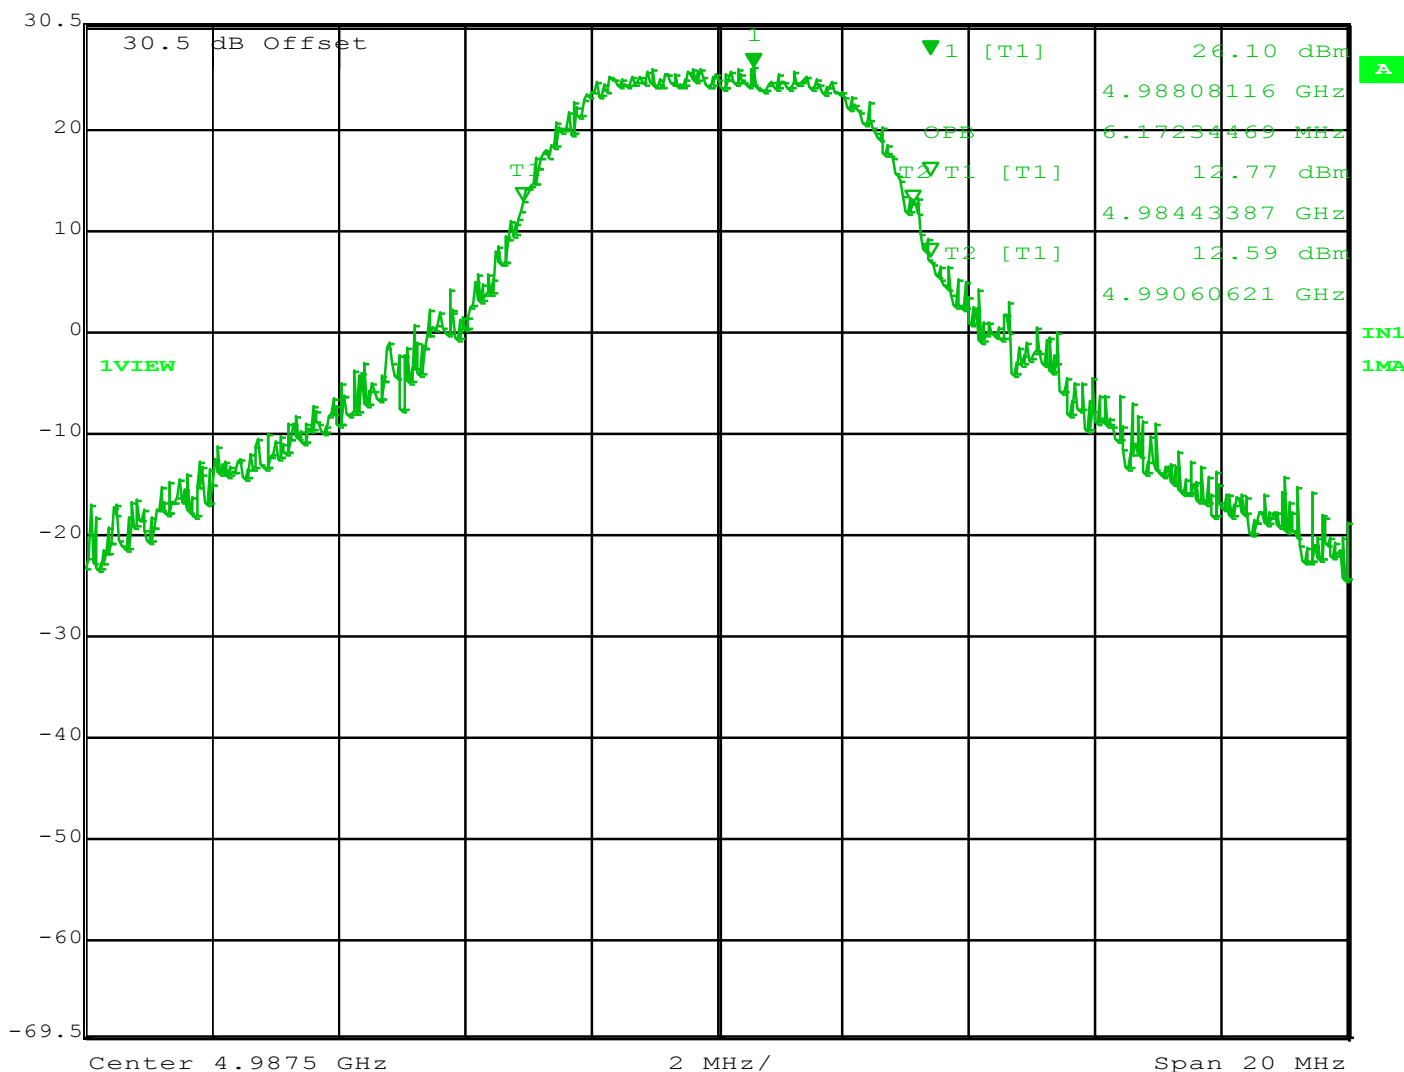


Date: 1.JUL.2015 18:36:19

Figure 36: 99% Occupied Bandwidth 4987.5 MHz - 5 MHz Channel

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 25.24 dBm VBW 3 MHz
34 dBm 4.94247996 GHz SWT 5 ms Unit dBm

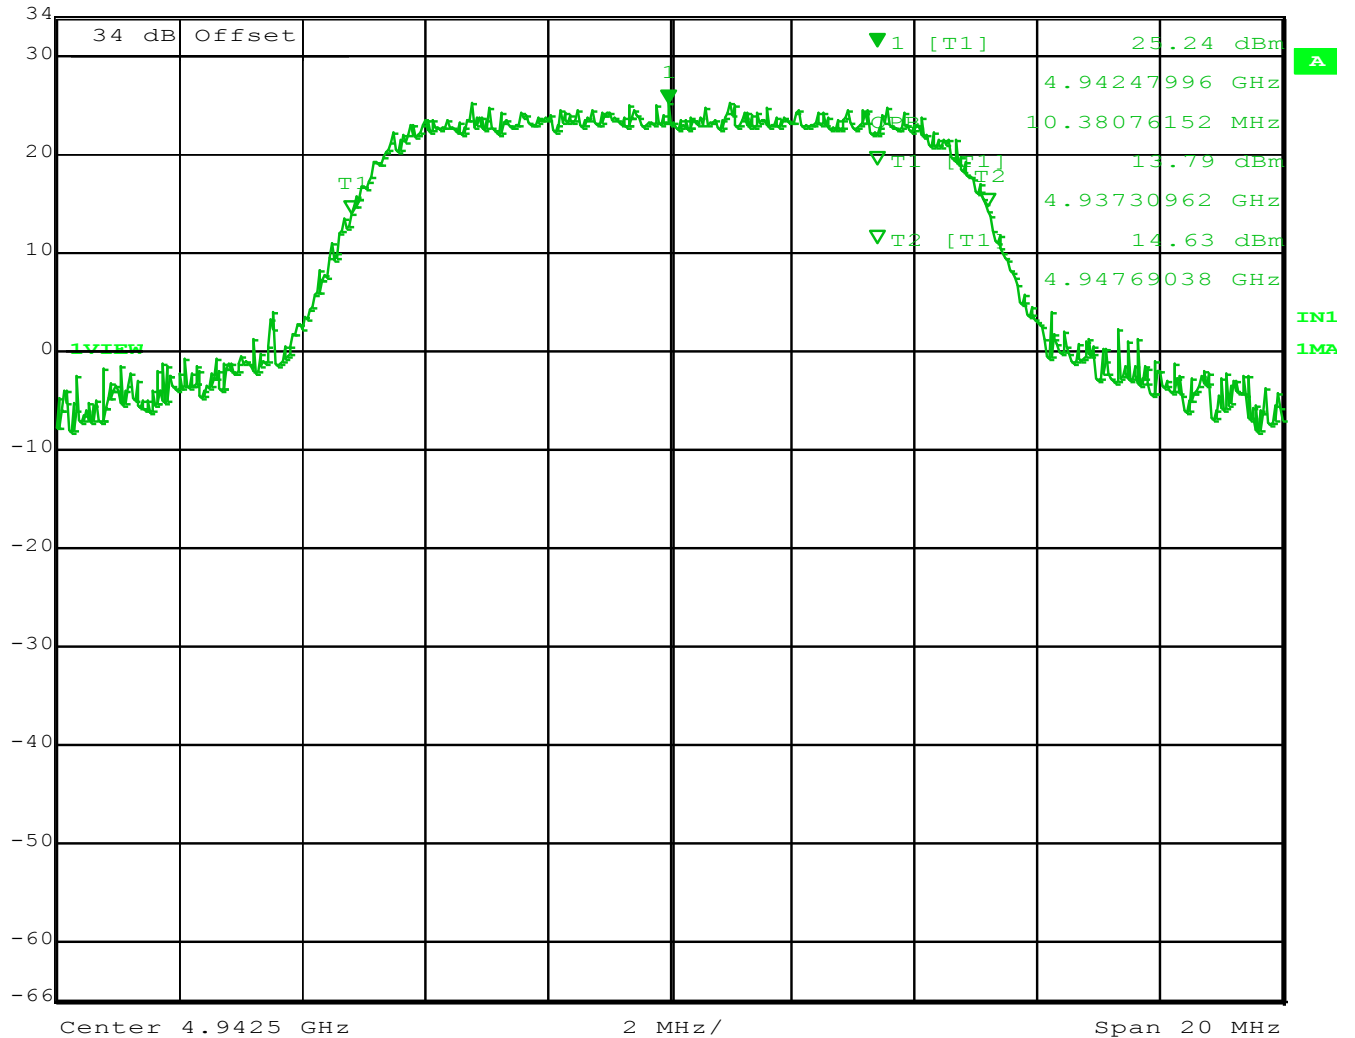

Date: 23.JUN.2015 23:25:43

Figure 37: 99% Occupied Bandwidth 4945 MHz - 10 MHz Channel


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 54 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 24.76 dBm VBW 3 MHz
34 dBm 4.96506012 GHz SWT 5 ms Unit dBm

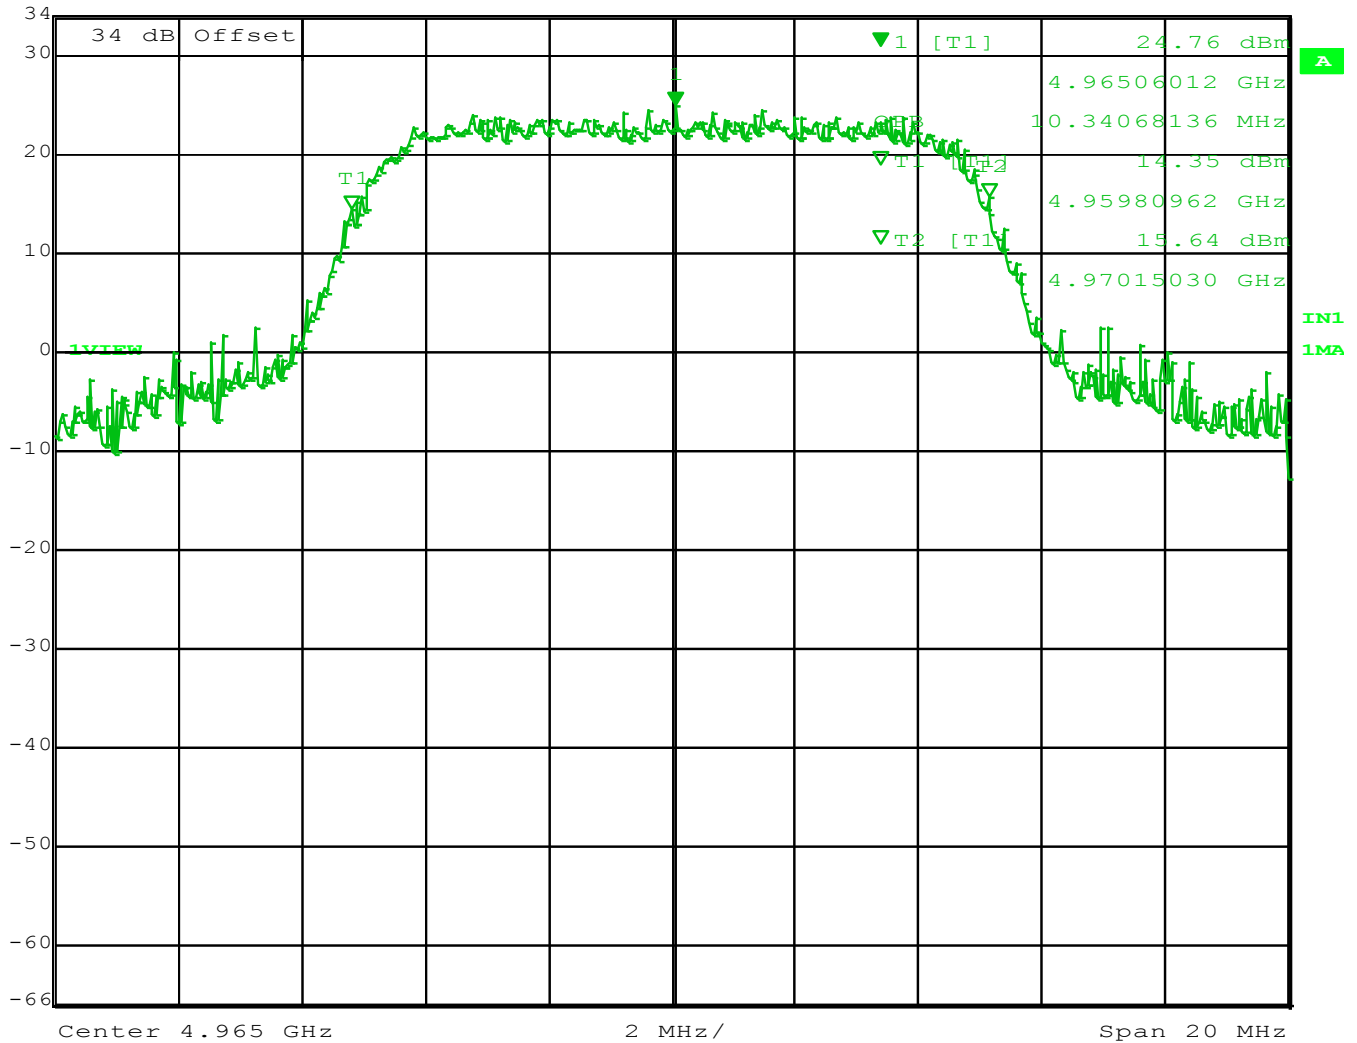

Date: 23.JUN.2015 23:53:07

Figure 38: 99% Occupied Bandwidth 4965 MHz - 10 MHz Channel


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 55 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 25.21 dBm VBW 3 MHz
34 dBm 4.98285571 GHz SWT 5 ms Unit dBm

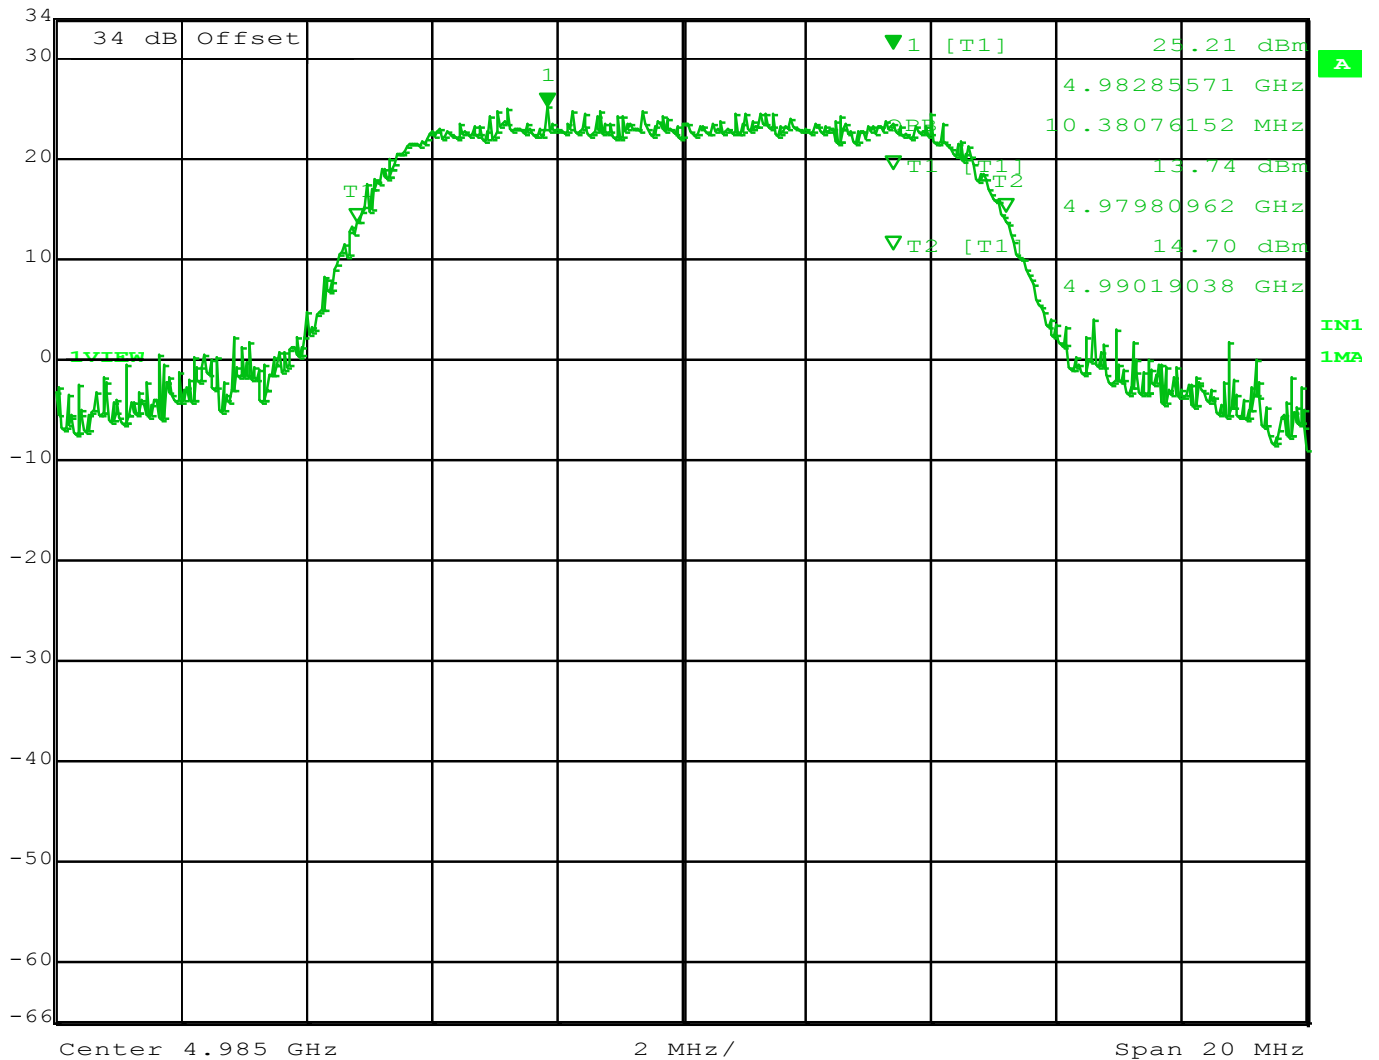

Date: 23.JUN.2015 23:32:15

Figure 39: 99% Occupied Bandwidth 4985 MHz - 10 MHz Channel


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 56 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 21.99 dBm VBW 3 MHz
34 dBm 4.94942886 GHz SWT 5 ms Unit dBm

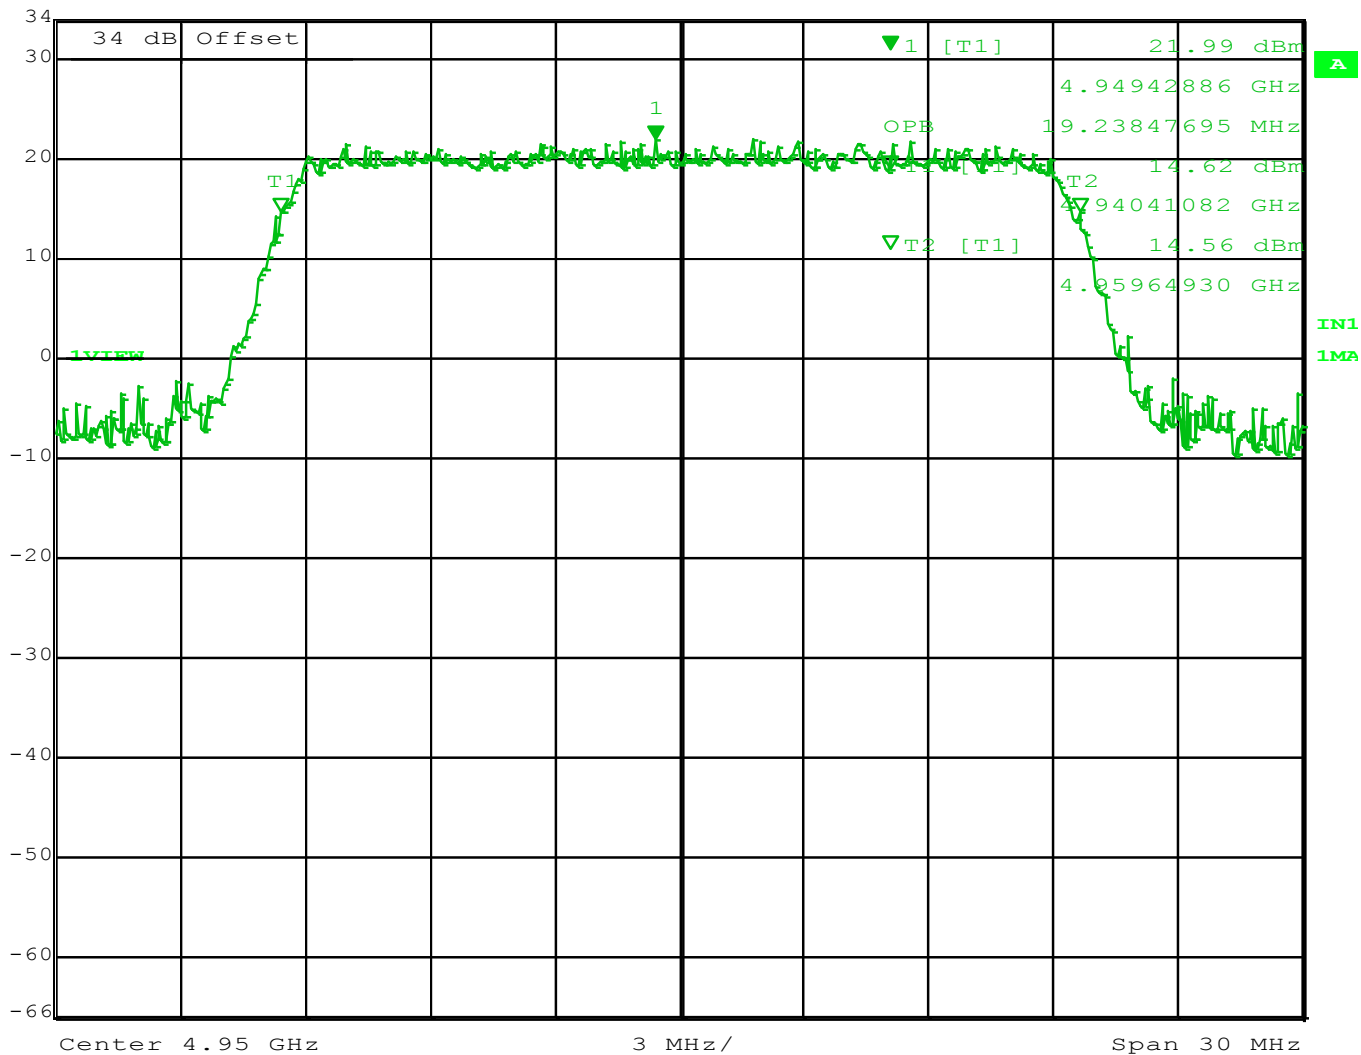

Date: 23.JUN.2015 23:43:46

Figure 40: 99% Occupied Bandwidth 4950 MHz - 20 MHz Channel


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 57 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 22.59 dBm VBW 3 MHz
34 dBm 4.96111222 GHz SWT 5 ms Unit dBm

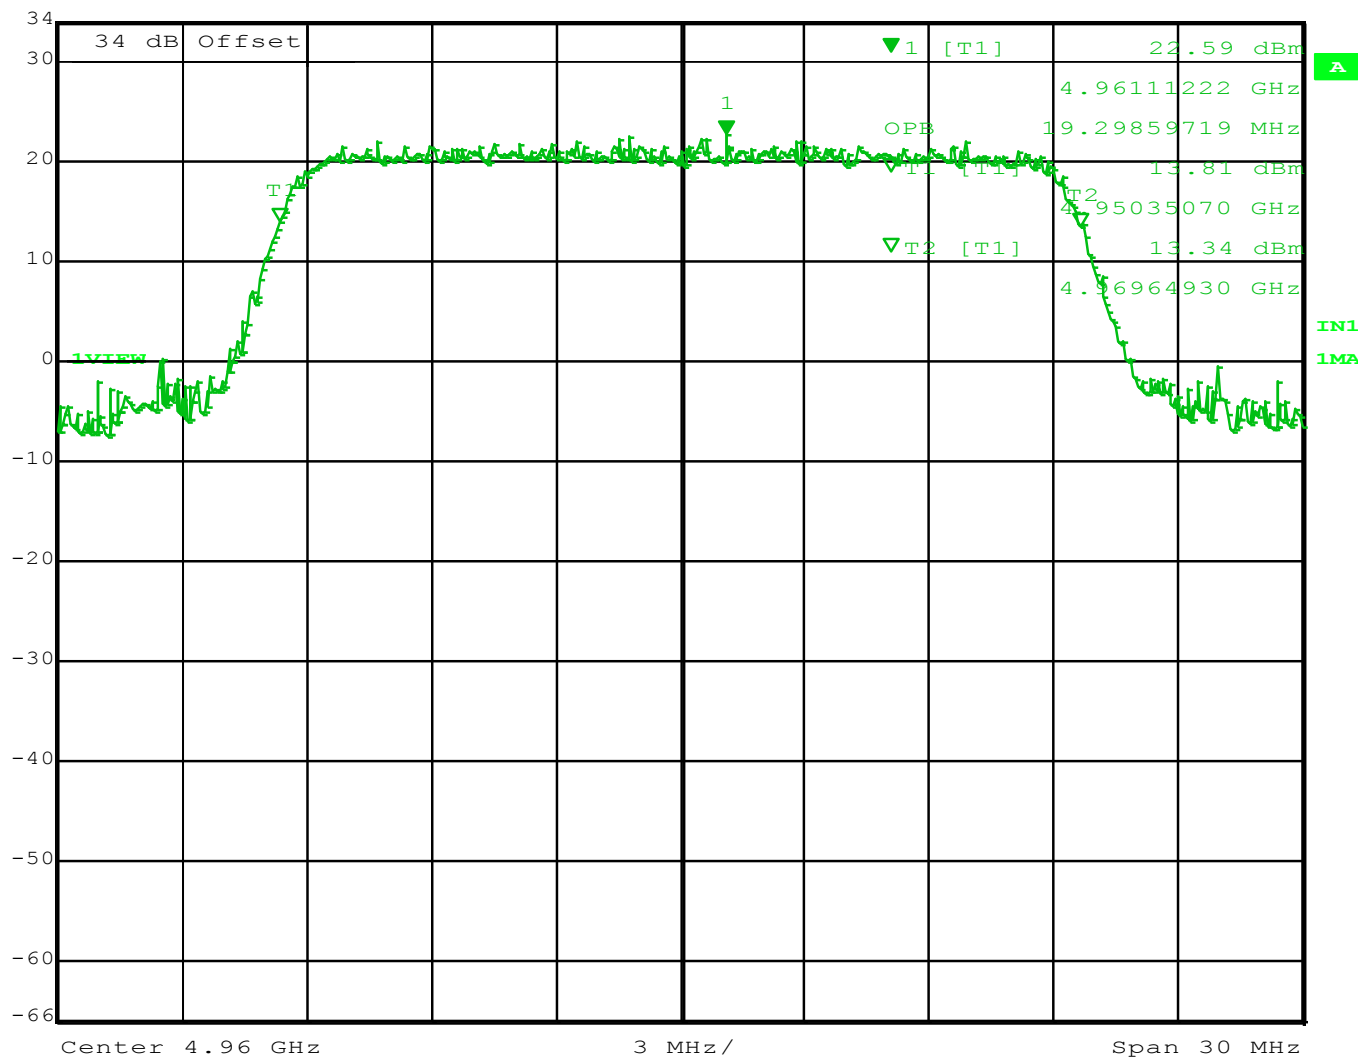

Date: 23.JUN.2015 23:45:33

Figure 41: 99% Occupied Bandwidth 4960 MHz - 20 MHz Channel


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 58 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 22.17 dBm VBW 3 MHz
34 dBm 4.97942886 GHz SWT 5 ms Unit dBm

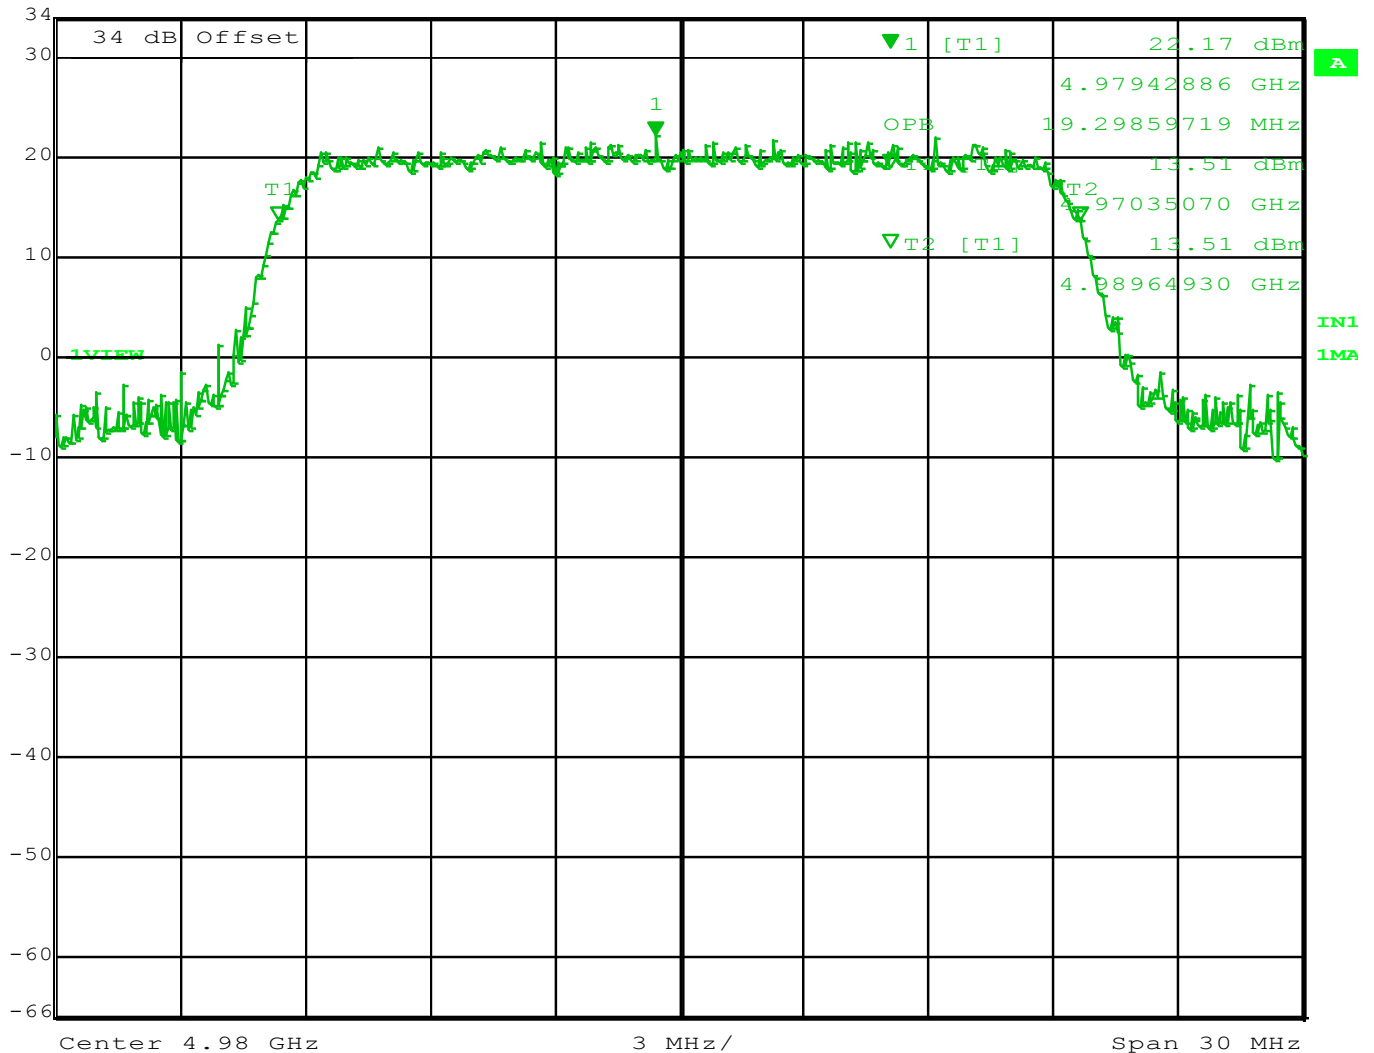

Date: 23.JUN.2015 23:46:48

Figure 42: 99% Occupied Bandwidth 4980 MHz - 20 MHz Channel

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4.4 Frequency Stability FCC Part 90.213 and 2.1055

4.4.1 Over View of Test

Results	Complies (as tested per this report)		Date	7/2/2015
Standard	FCC Part 90.213 and Part 2.1055			
Product	RF-7800W	Serial#	A00451	
Test Set-up	Tested in shielded room. EUT placed on table, see test plans for details			
Mod. to EUT	None	Test Performed By	Randall E Masline	

4.4.2 Test Procedure

- (a) The frequency stability shall be measured with variation of ambient temperature as follows:
From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

4.4.3 Final Test

As tested, the EUT was found to be compliant to the requirements of the test standard.

The output power and frequency did not change or waiver by varying the input voltage to the POE black box.

Center Frequency	4945 MHz
Power Level	22 dBm
Frequency Tolerance Limit	Not Specified
Max Frequency Tolerance Measured	
Input Voltage Rating	100-240VAC

CENTER FREQUENCY & RF POWER OUTPUT VARIATION

Ambient Temperature	Supply Voltage Nominal 120 VAC	Supply Voltage 85% of Nominal 100VAC	Supply Voltage 115% of Nominal 230VAC
(C°)	Hz	Hz	Hz
-40	+29850	+29850	+29850
+20	0	0	0
+60	+46500	+46500	+46500

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

5 Conducted Emission Limits FCC 90.210

- (a) The power of emission outside any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or $55 + 10 \log (P)$ dB, whichever is the lesser attenuation..
- (b) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

Results	Complies (as tested per this report)					Date	7/2/2015	
Standard	FCC 90.210							
Product	RF-7800W				Serial#	A00451		
Configuration	See test plan for details							
Test Set-up	Tested in a 10m Semi-Anechoic Chamber placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table. See test plans for details							
EUT Powered By	Power over Ethernet	Temp	23° C	Humidity	32%	Pressure	1010mbar	
Frequency Range	30 MHz to 40 GHz @ 3m							
Perf. Criteria	(Below Limit)			Perf. Verification		Readings Under Limit		
Mod. to EUT	None			Test Performed By		Randall E Masline		

5.1.1 Test Procedure

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049 and the transmitter was operated in full rated power, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 1 MHz, VBW > RBW and SWEEP TIME = AUTO)..

5.1.2 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.


5.1.3 Final Test

All final radiated emissions measurements were below (in compliance) the limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -38.82 dBm VBW 3 MHz
30.5 dBm 648.83767535 MHz SWT 5 ms Unit dBm

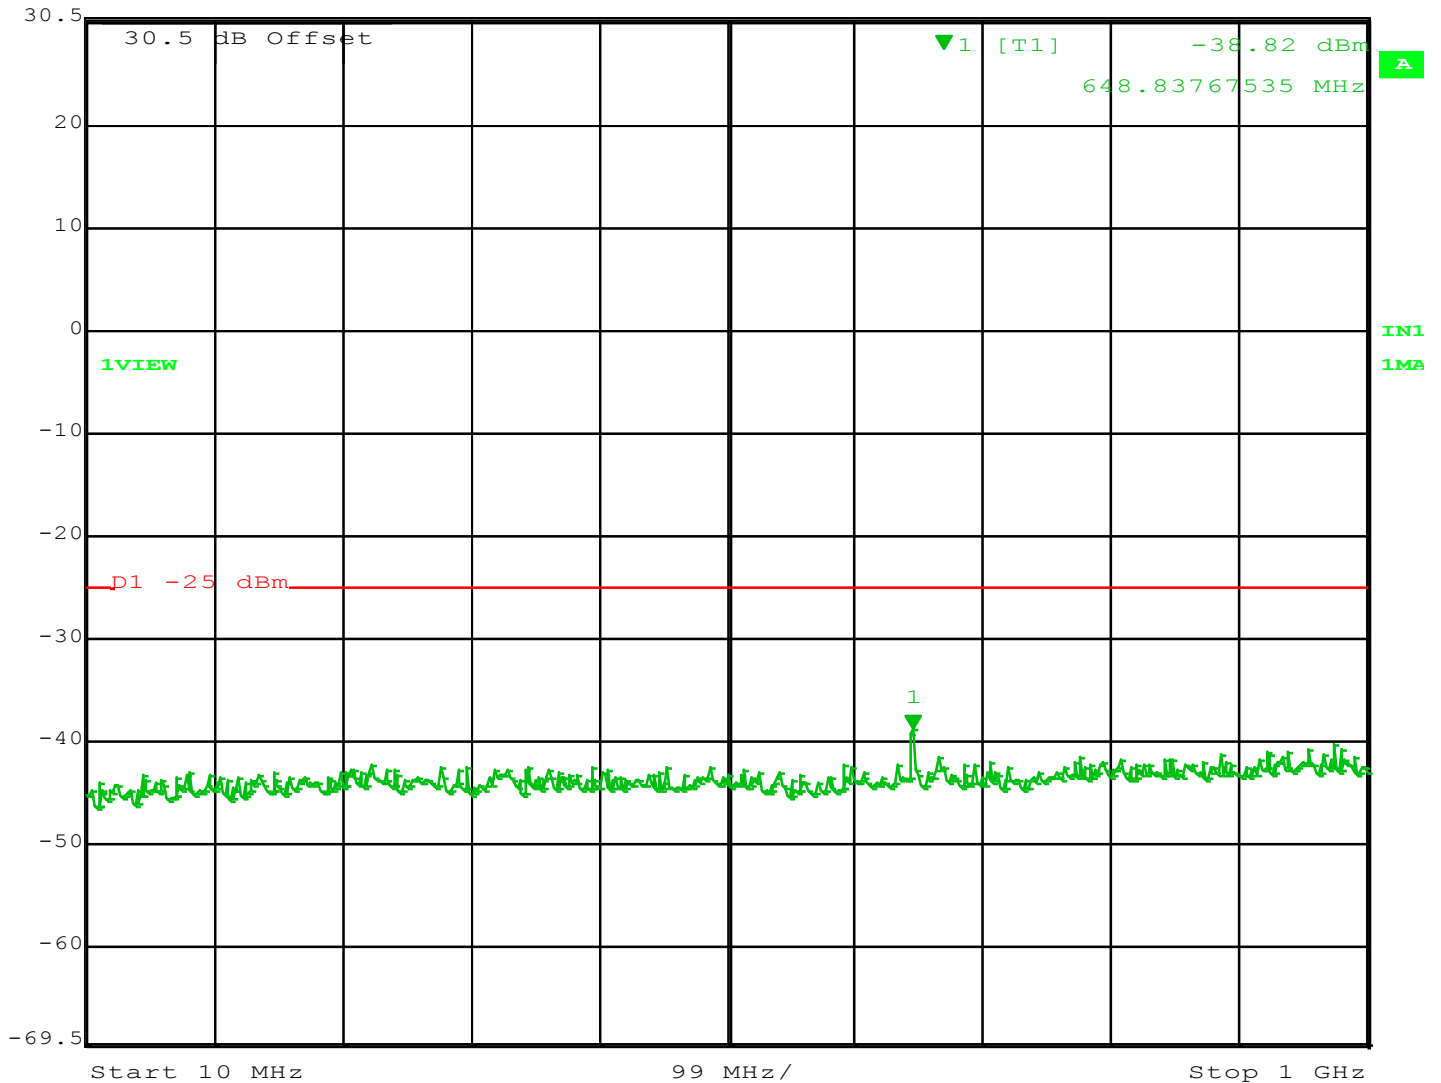

Date: 1.JUL.2015 19:07:28

Figure 43 – Spurs 4942.5 MHz – 5 MHz Channel, 10 MHz - 1 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 63 of 89



Marker 2 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -31.06 dBm VBW 3 MHz
34 dBm 6.97895792 GHz SWT 260 ms Unit dBm

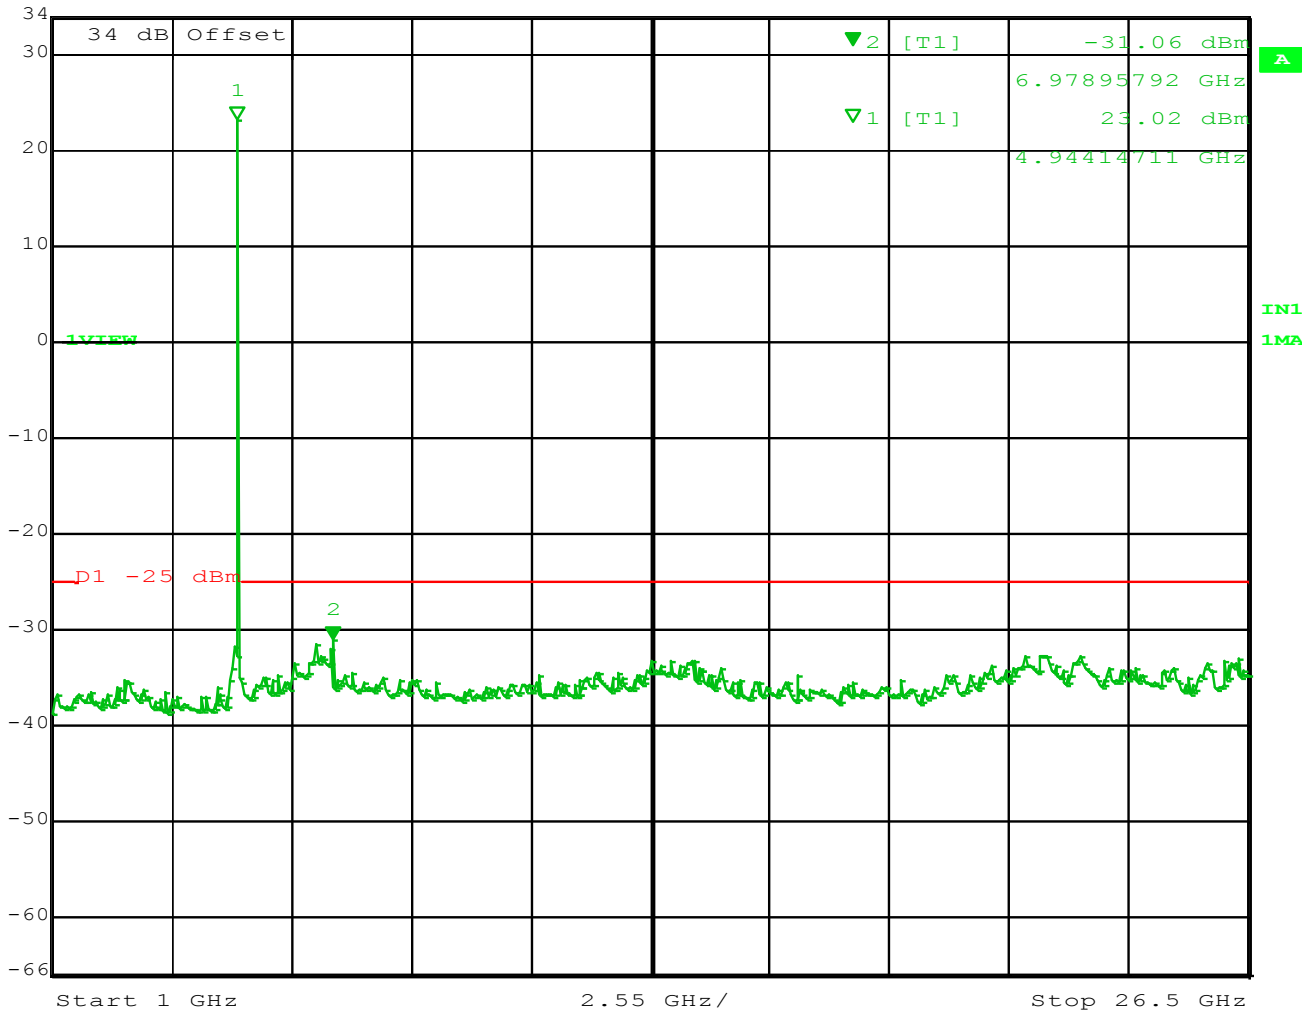

Date: 26.JUN.2015 03:02:26

Figure 44 – Spurs 4942.5 MHz – 5 MHz Channel, 1-26.5 GHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.


Report No.: 31551685.004 Harris Part 90.doc

Page 64 of 89



Ref Lvl
24 dBm

RBW 1 MHz RF Att 0 dB
VBW 1 MHz
SWT 205 ms Unit dBm

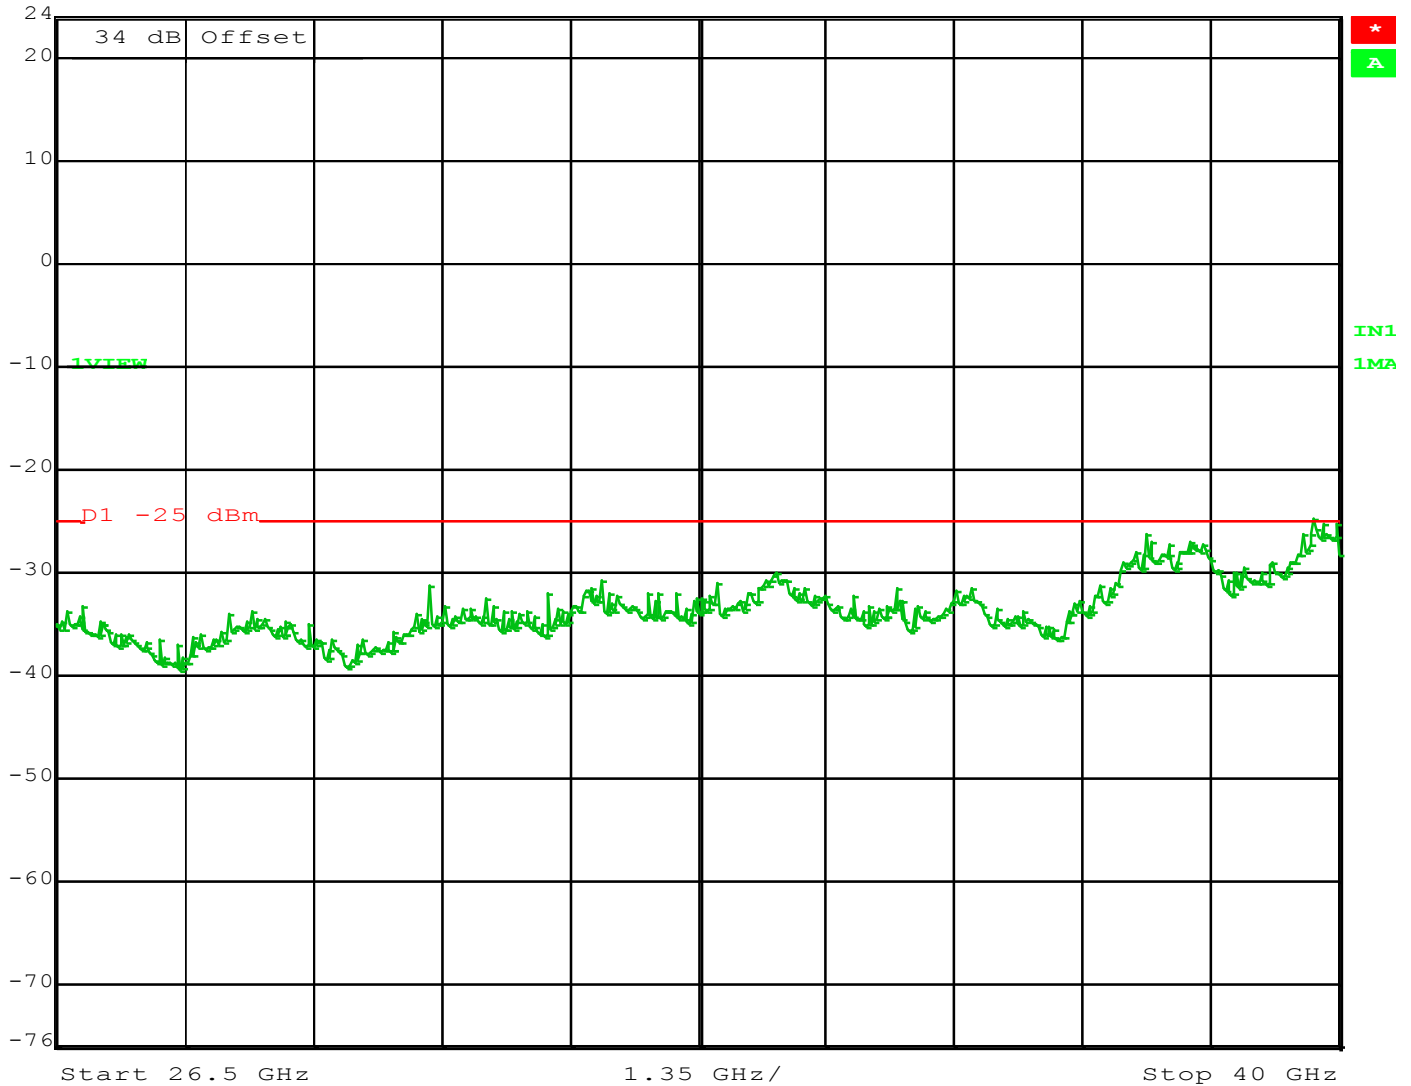

Date: 26.JUN.2015 03:45:38

Figure 45 - Spurs 4942.5 MHz – 5 MHz Channel, 26.5 - 40 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 65 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl 20.57 dBm VBW 3 MHz
24 dBm 4.93486974 GHz SWT 260 ms Unit dBm

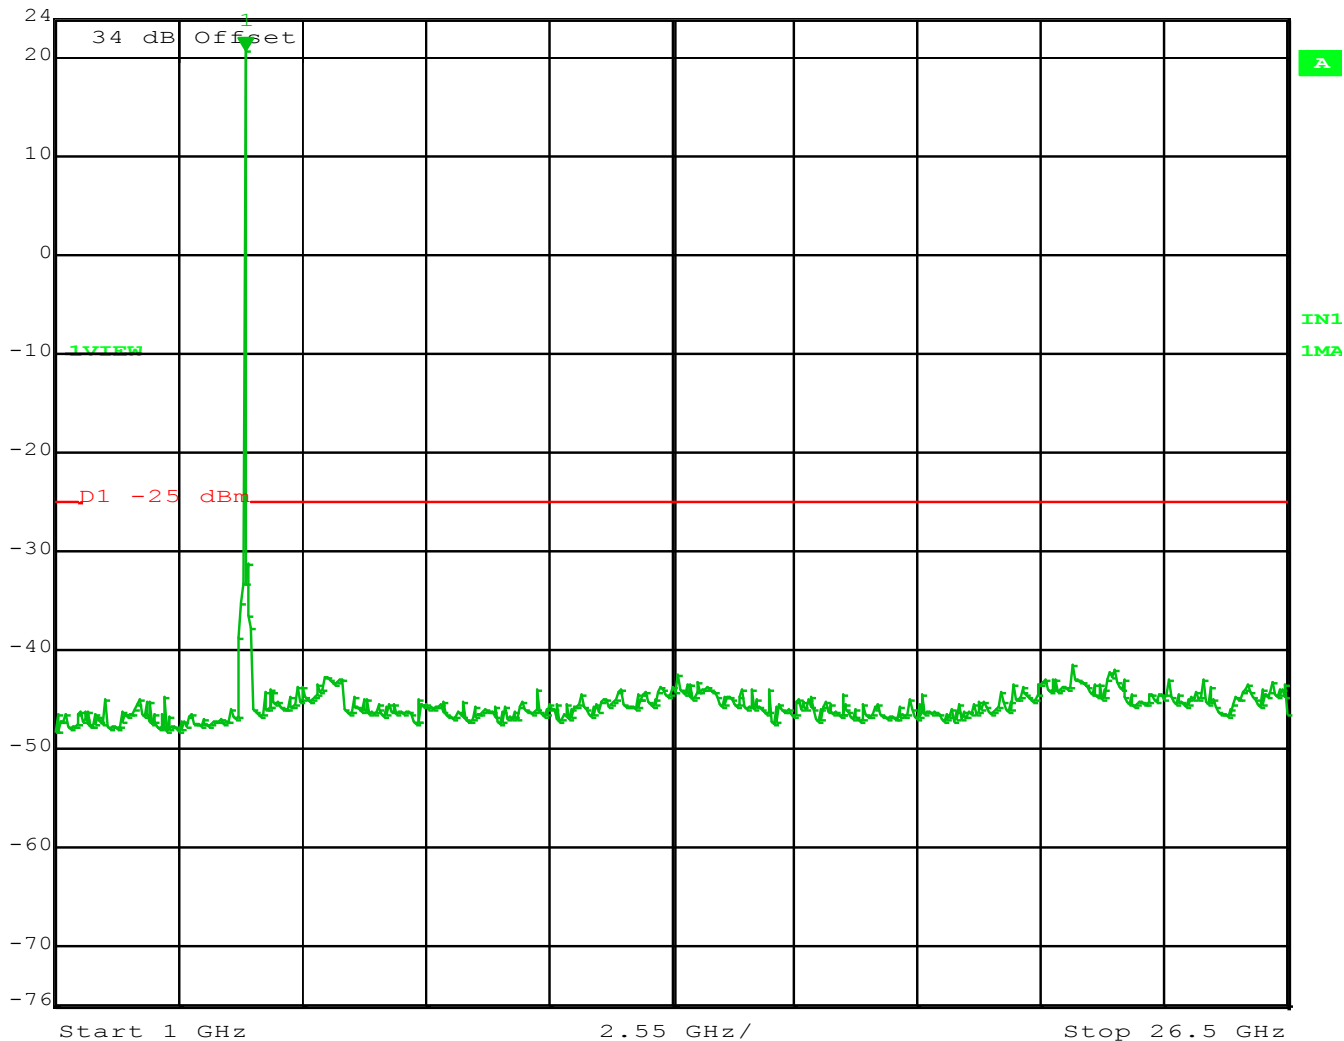

Date: 26.JUN.2015 03:55:55

Figure 46 - Spurs 4967.5 MHz – 5 MHz Channel, 1-26.5 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 66 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -33.54 dBm VBW 3 MHz
24 dBm 26.50000000 GHz SWT 205 ms Unit dBm

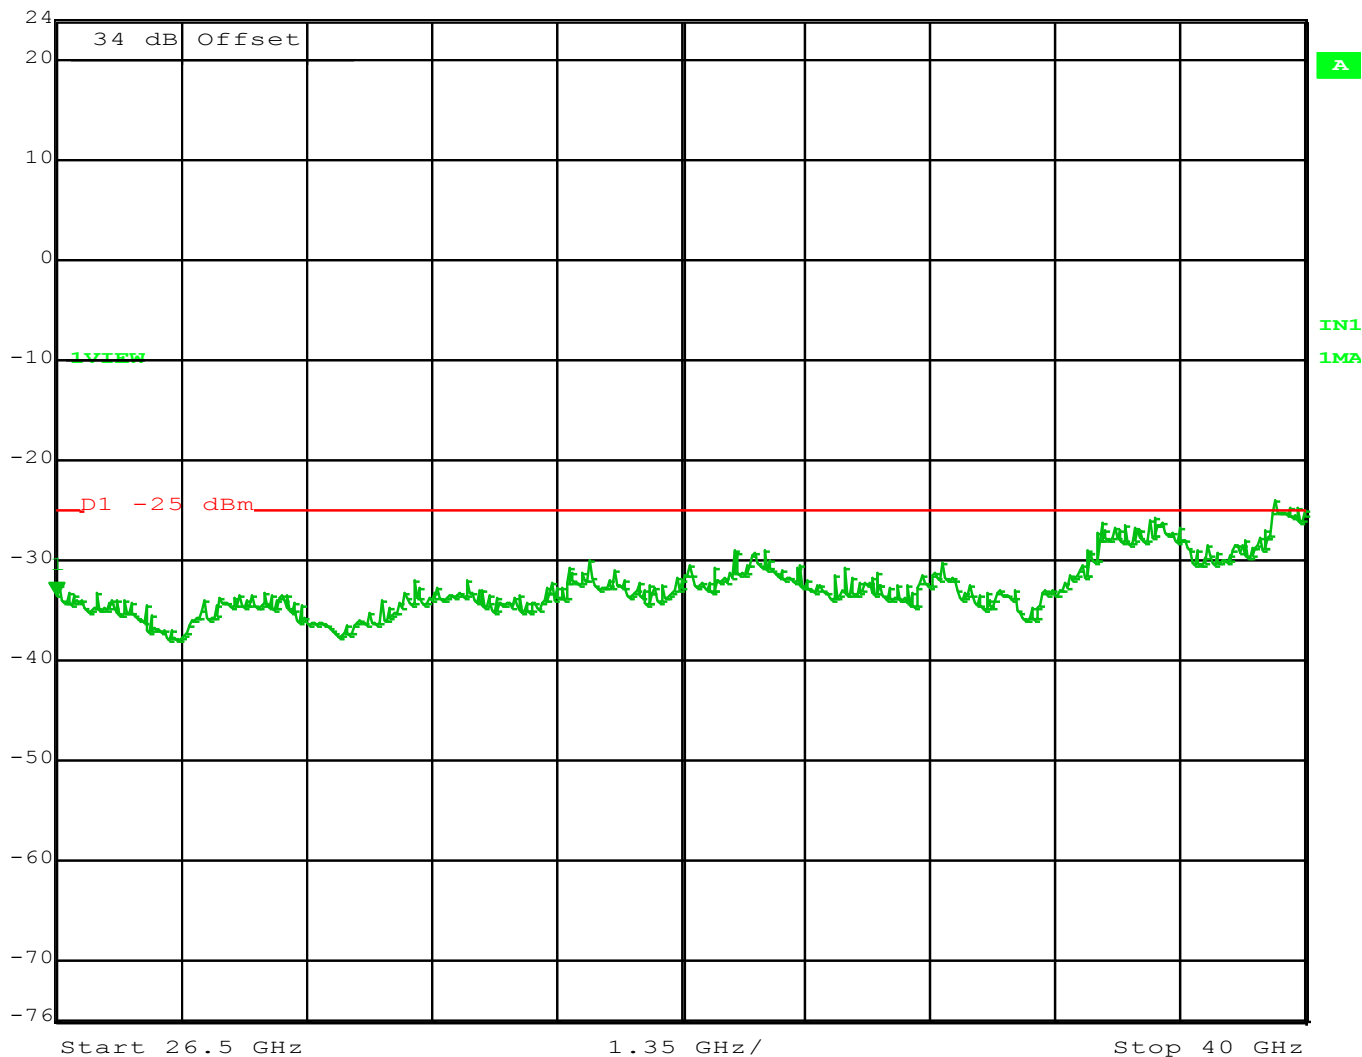

Date: 26.JUN.2015 03:56:41

Figure 47 - Spurs 4967.5 MHz – 5 MHz Channel, 26.5 - 40 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 67 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl 21.76 dBm VBW 3 MHz
24 dBm 4.98597194 GHz SWT 260 ms Unit dBm

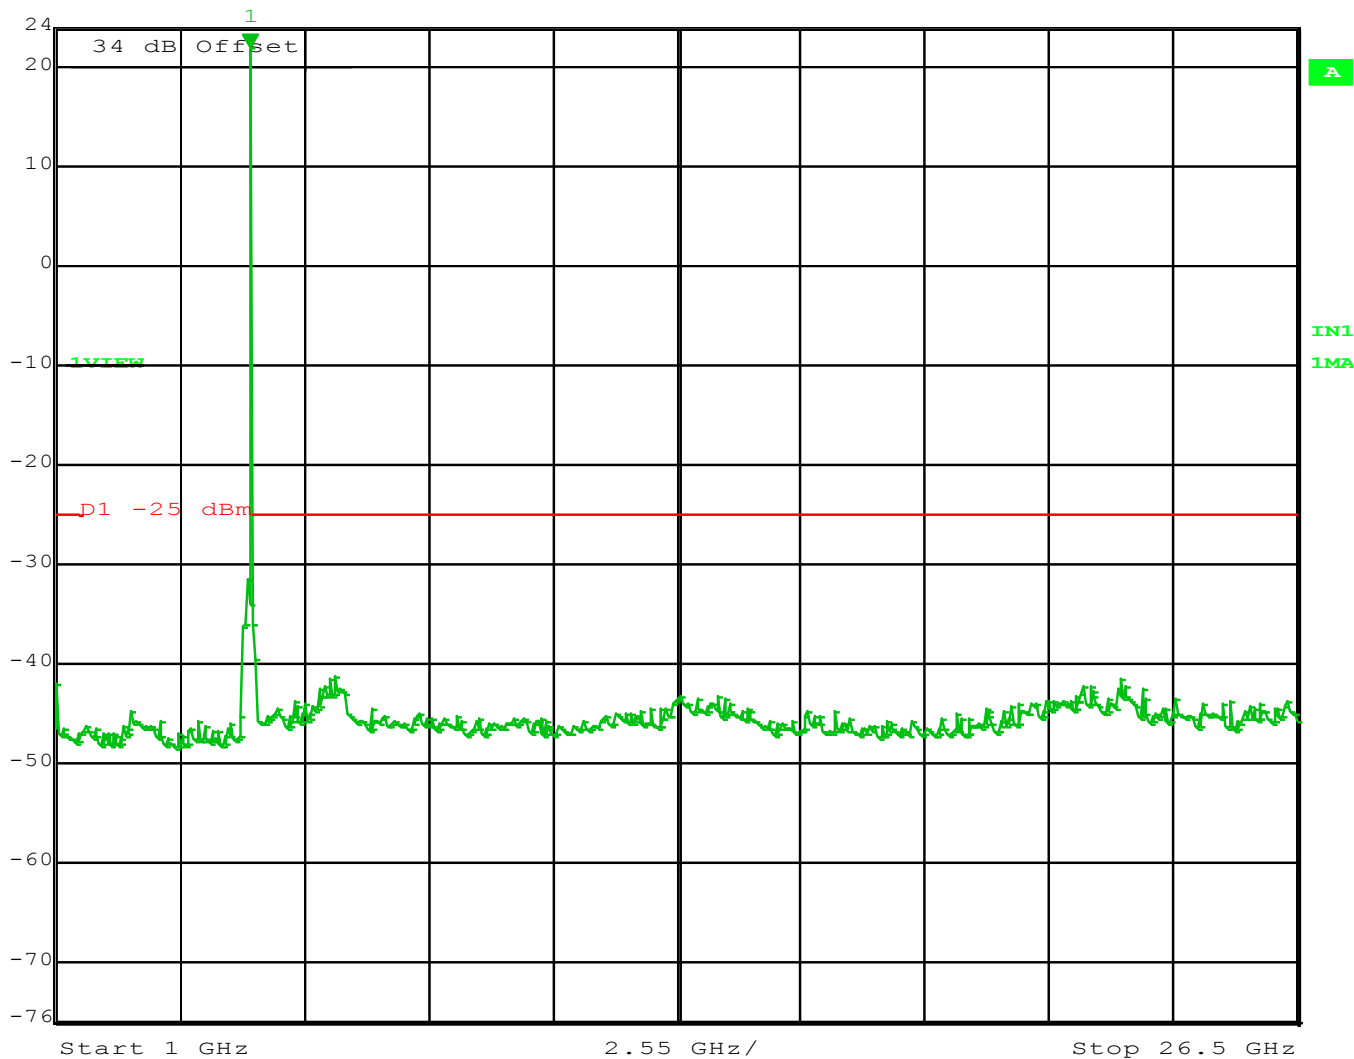

Date: 26.JUN.2015 04:06:32

Figure 48 - Spurs 4987.5 MHz – 5 MHz Channel, 1 - 26.5GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 68 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -33.05 dBm VBW 3 MHz
24 dBm 26.50000000 GHz SWT 205 ms Unit dBm

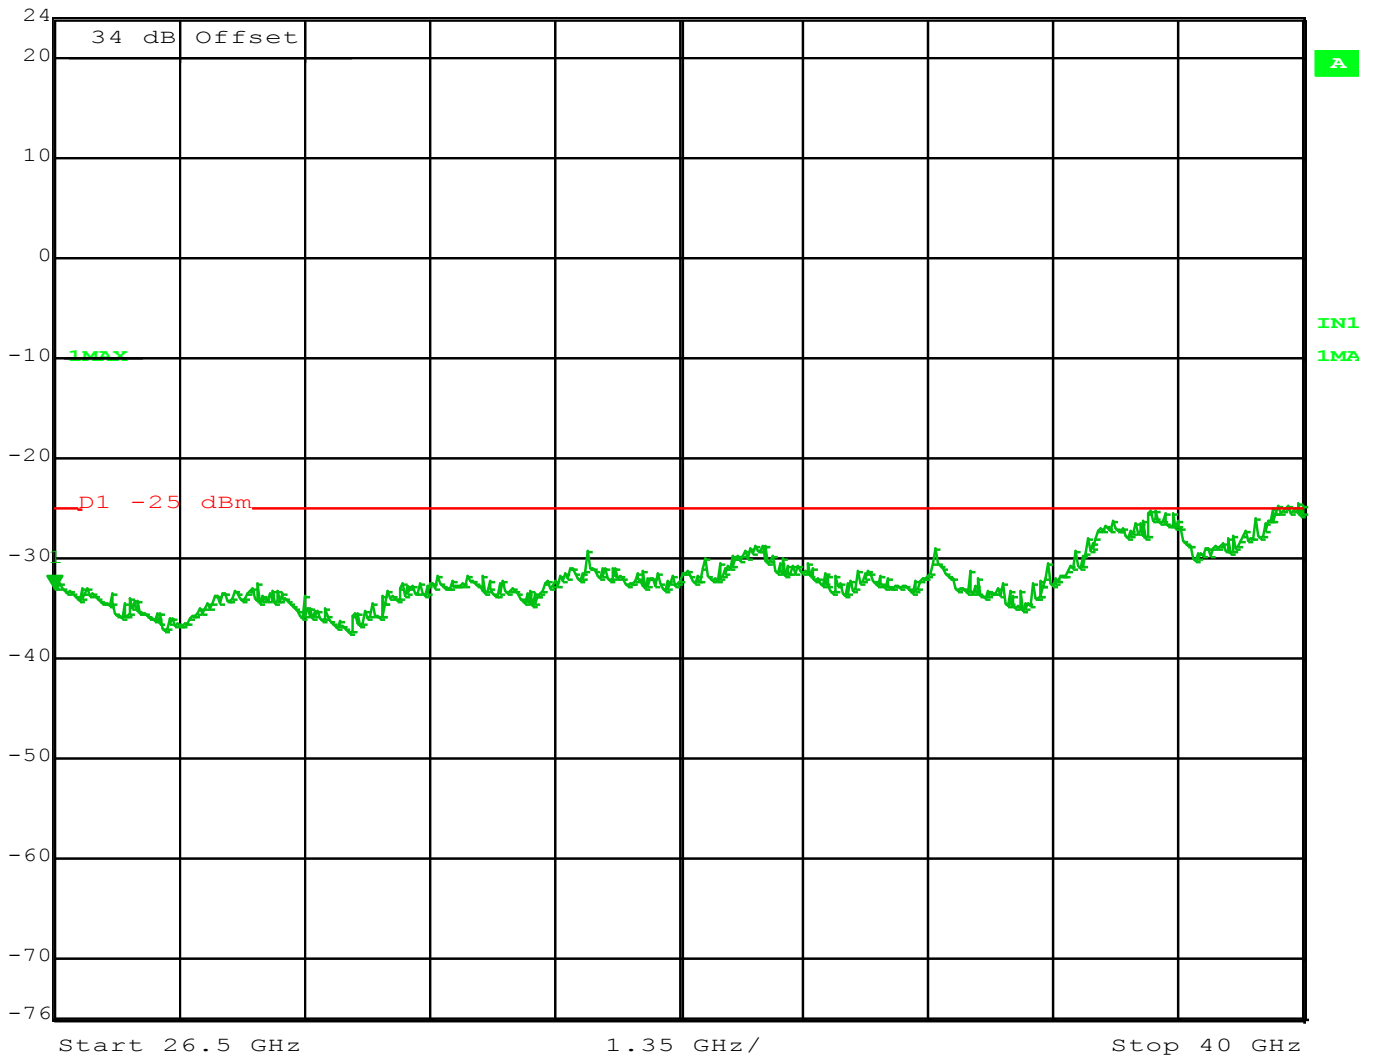

Date: 26.JUN.2015 04:04:33

Figure 49 - Spurs 4987.5 MHz – 5 MHz Channel, 26.5 - 40 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 69 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -39.52 dBm VBW 3 MHz
30.5 dBm 648.83767535 MHz SWT 5 ms Unit dBm

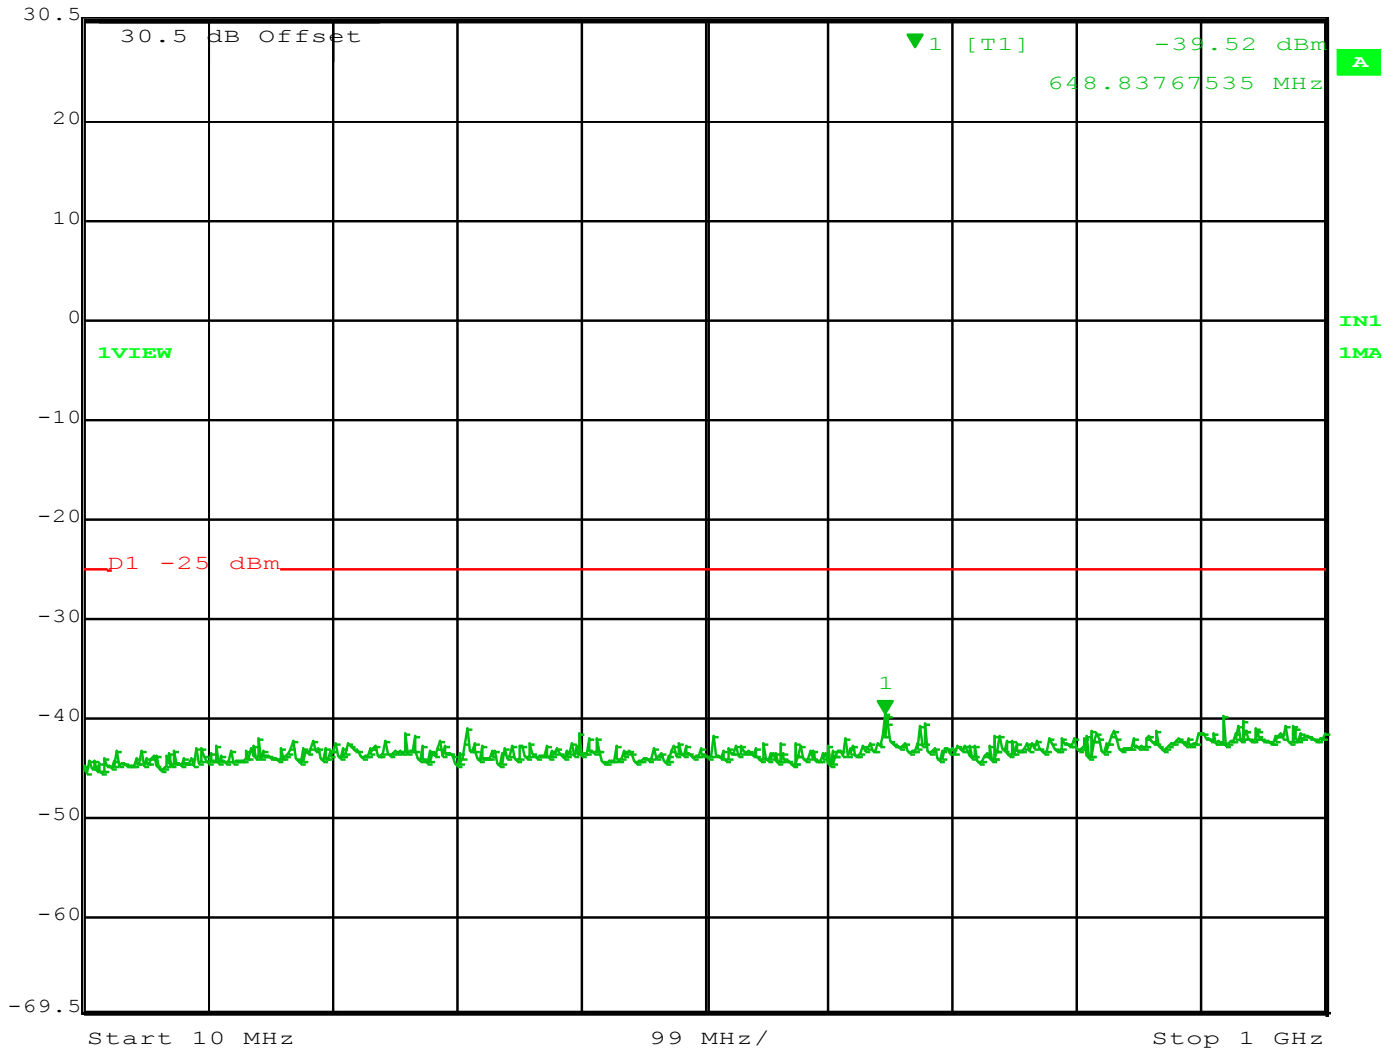

Date: 2.JUL.2015 09:11:31

Figure 50 - Spurs 4945 MHz – 10 MHz Channel, 10 MHz - 1 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 70 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 22.18 dBm VBW 3 MHz
34 dBm 4.94401804 GHz SWT 260 ms Unit dBm

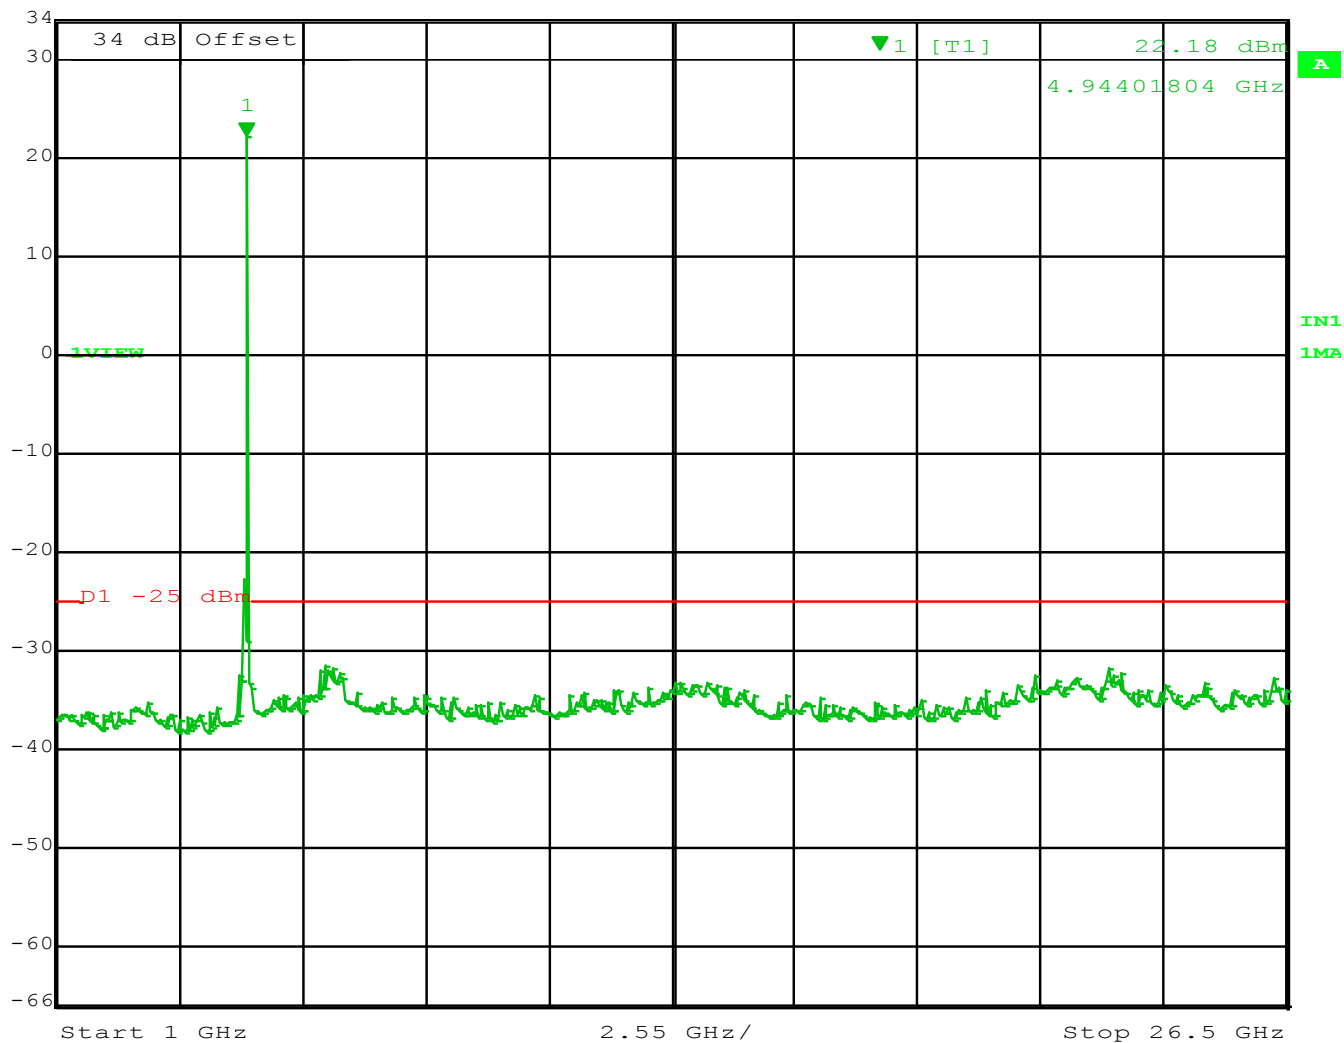

Date: 29.JUN.2015 12:14:50

Figure 51 - Spurs 4945 MHz – 10 MHz Channel, 1 - 26.5 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 71 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -33.40 dBm VBW 3 MHz
24 dBm 26.50000000 GHz SWT 205 ms Unit dBm

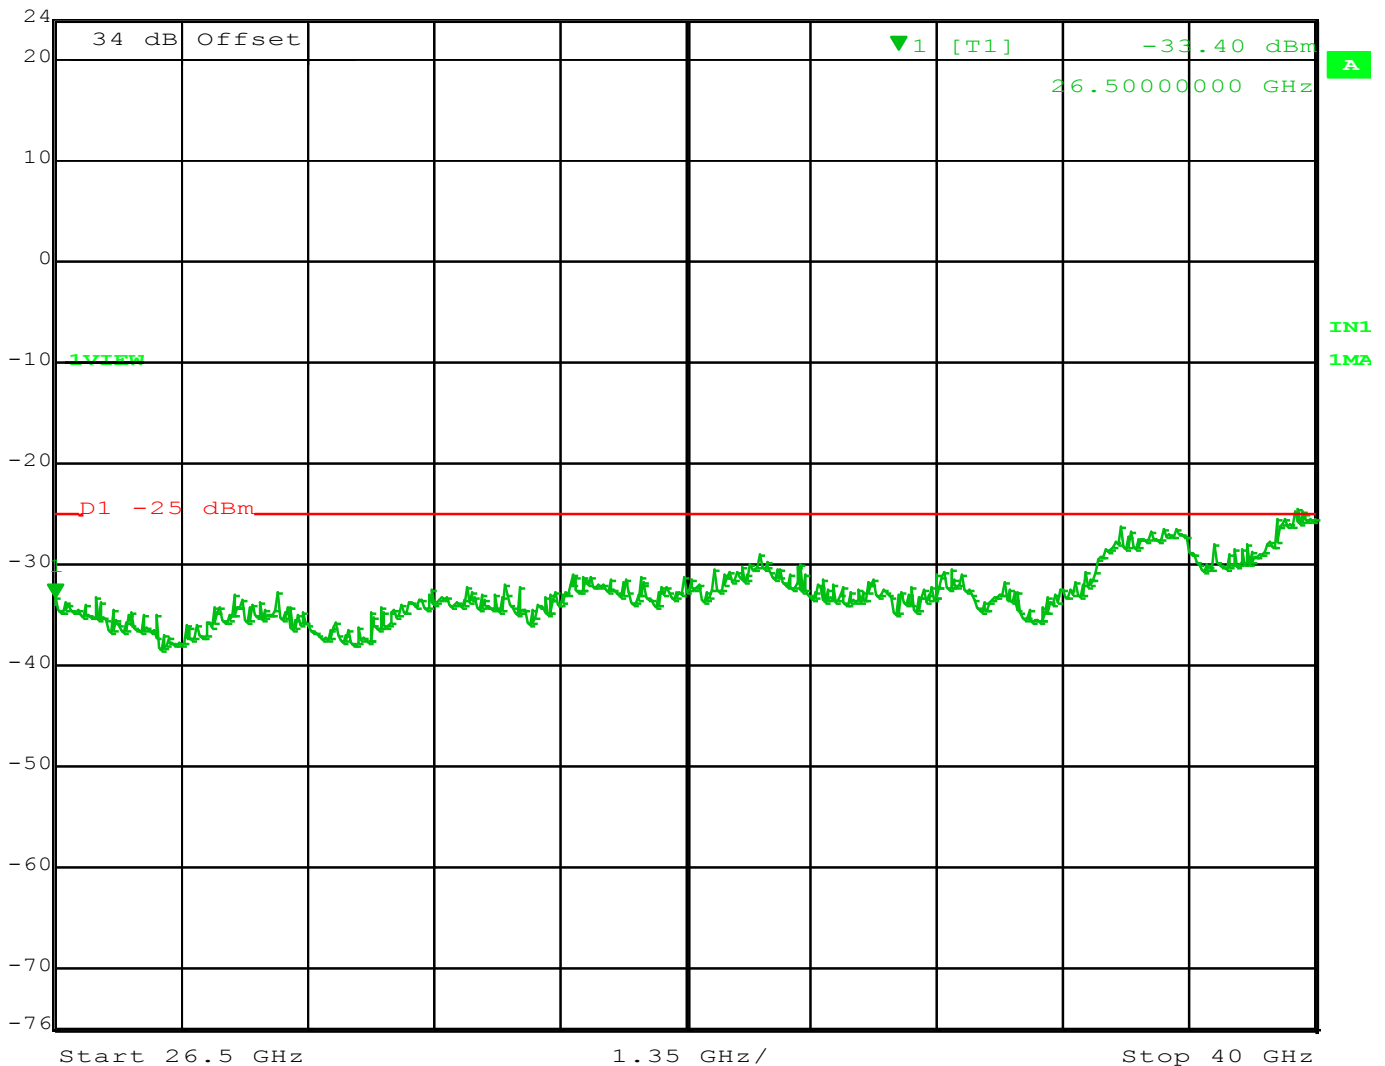

Date: 29.JUN.2015 12:15:42

Figure 52 - Spurs 4945 MHz – 10 MHz Channel, 26.5 - 40 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 72 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl 23.82 dBm VBW 3 MHz
24 dBm 4.93486974 GHz SWT 260 ms Unit dBm

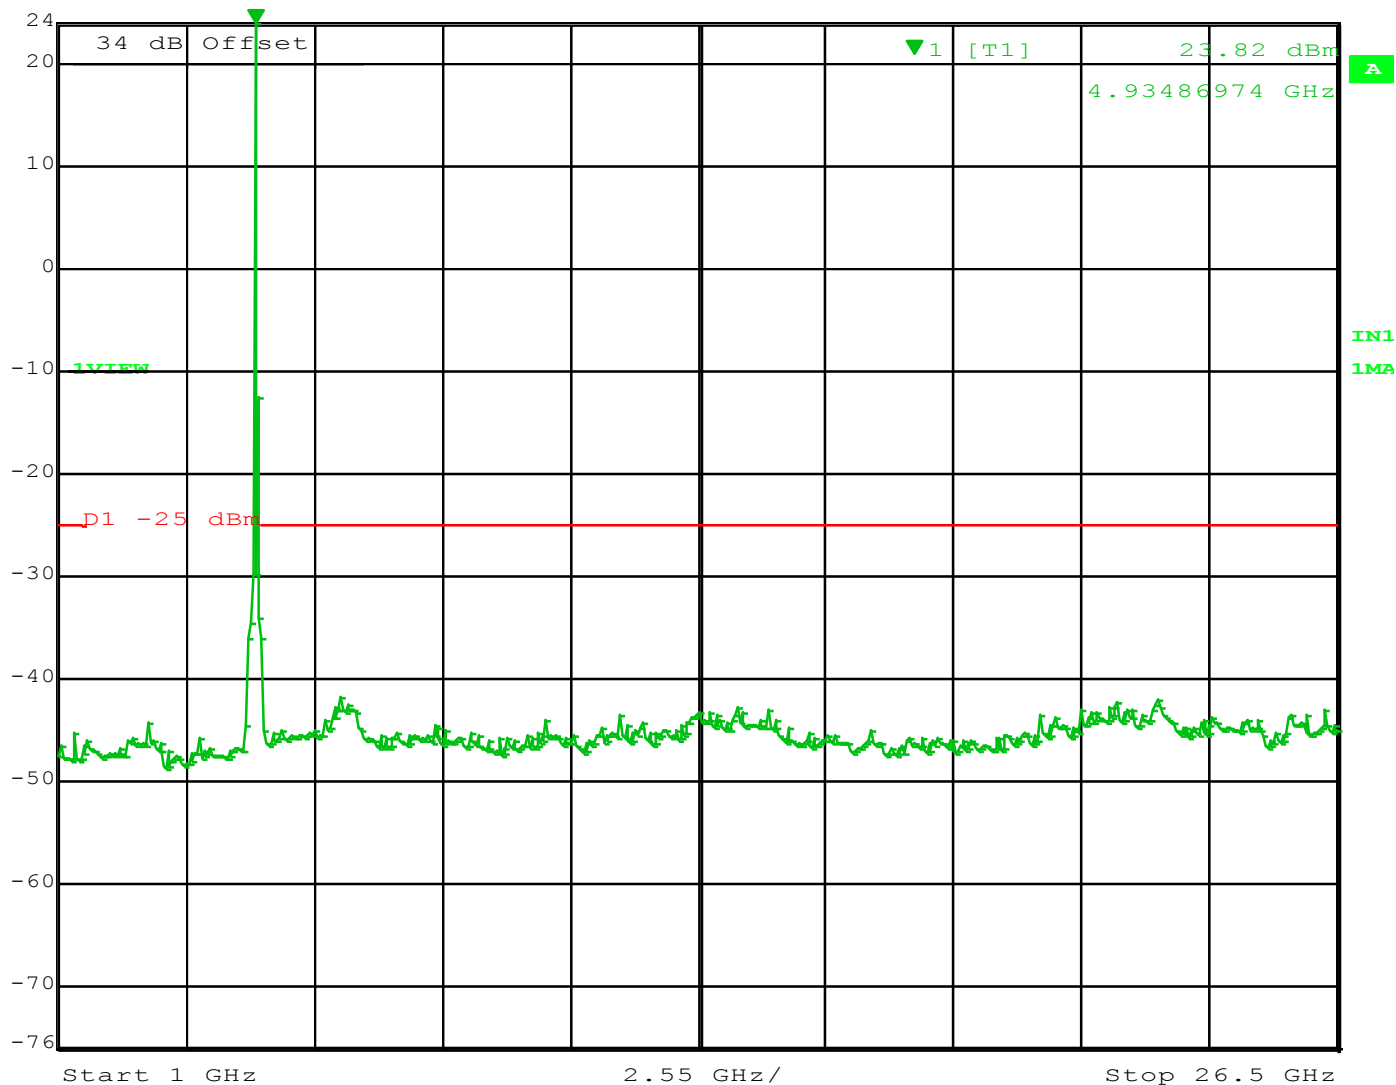

Date: 29.JUN.2015 12:17:19

Figure 53 - Spurs 4965 MHz – 10 MHz Channel, 1 - 26.5 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 73 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -34.64 dBm VBW 3 MHz
24 dBm 26.50000000 GHz SWT 205 ms Unit dBm

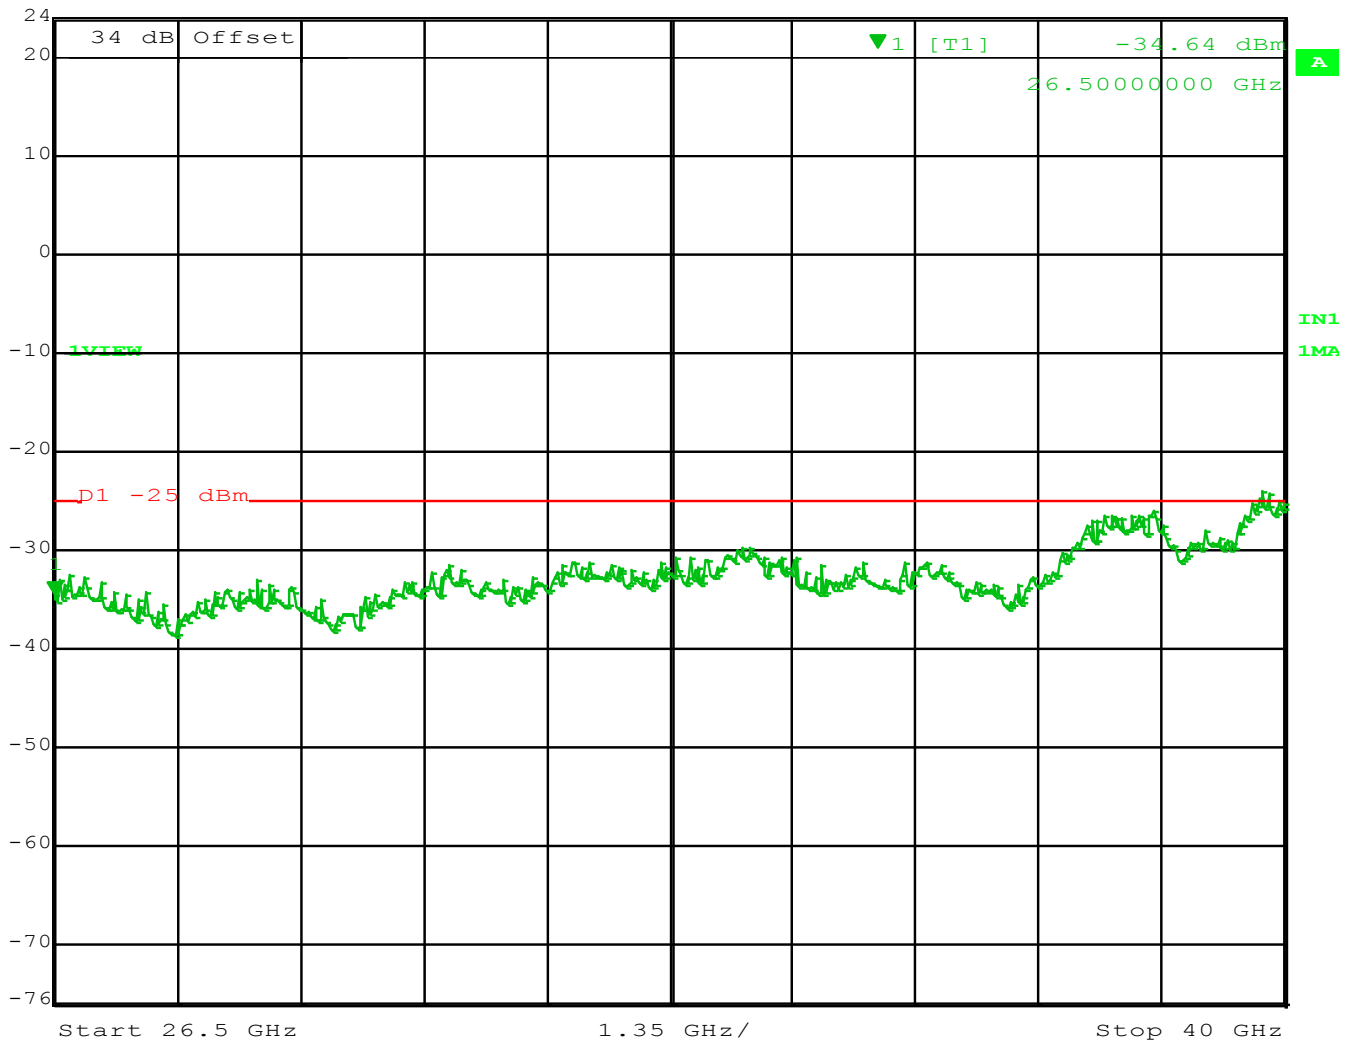

Date: 29.JUN.2015 12:16:40

Figure 54 - Spurs 4965 MHz – 10 MHz Channel, 26.5 - 40 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 74 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 23.10 dBm VBW 3 MHz
34 dBm 4.98522044 GHz SWT 260 ms Unit dBm

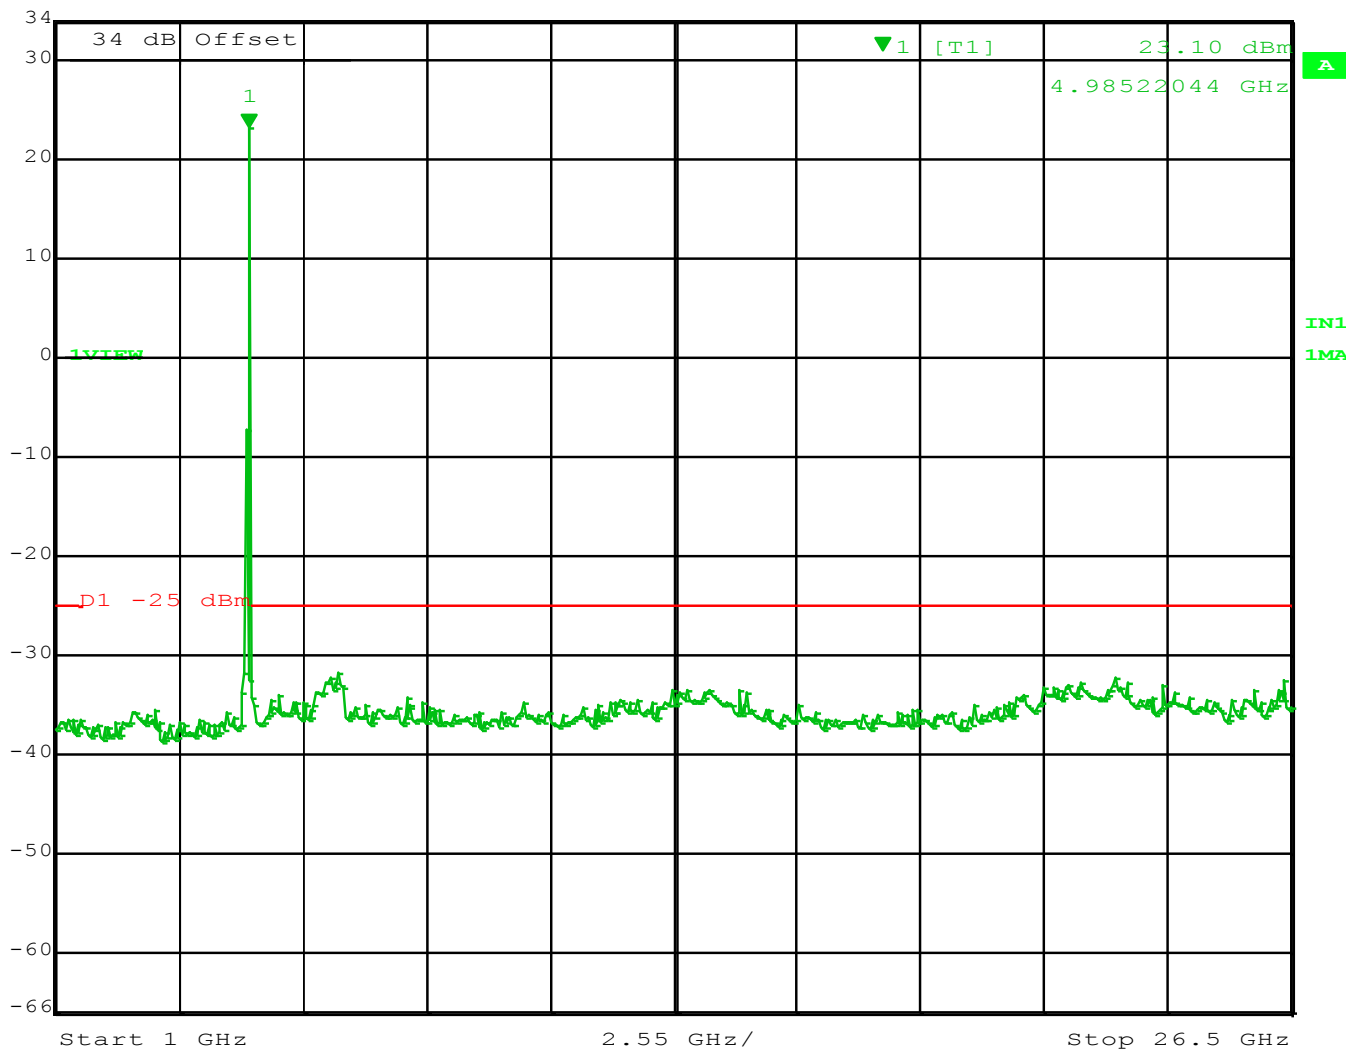

Date: 29.JUN.2015 12:20:10

Figure 55 - Spurs 4985 MHz – 10 MHz Channel, 1 - 26.5 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 75 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -33.59 dBm VBW 3 MHz
24 dBm 26.50000000 GHz SWT 205 ms Unit dBm

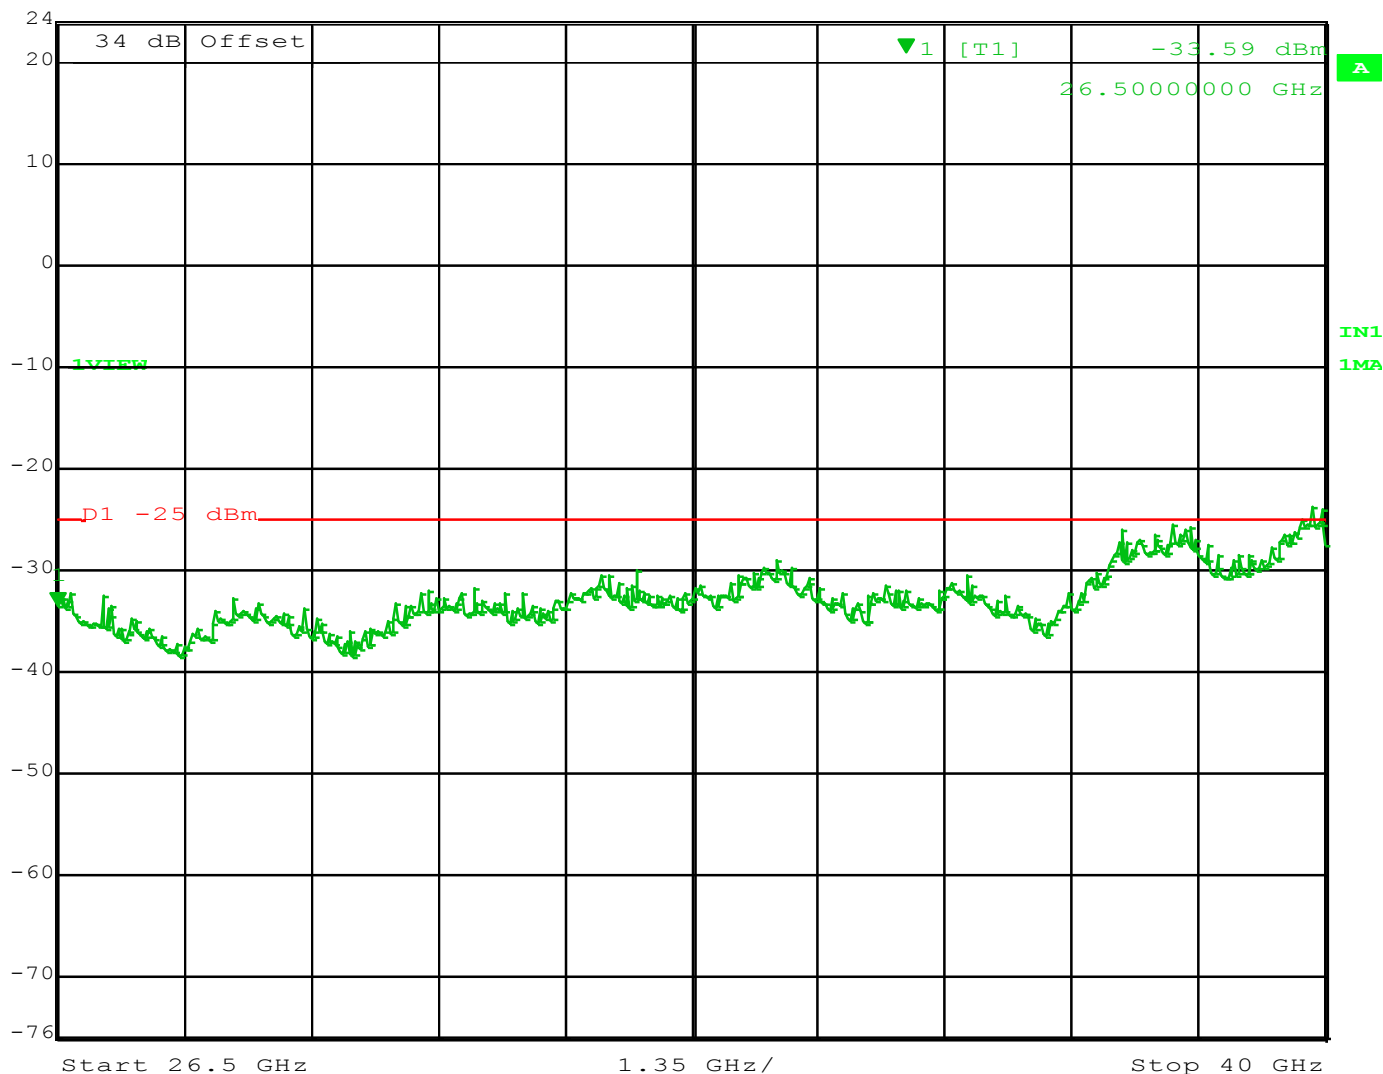

Date: 29.JUN.2015 12:20:50

Figure 56 - Spurs 4985 MHz – 10 MHz Channel, 26.5 - 40 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 76 of 89



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -39.99 dBm VBW 3 MHz
30.5 dBm 648.83767535 MHz SWT 5 ms Unit dBm

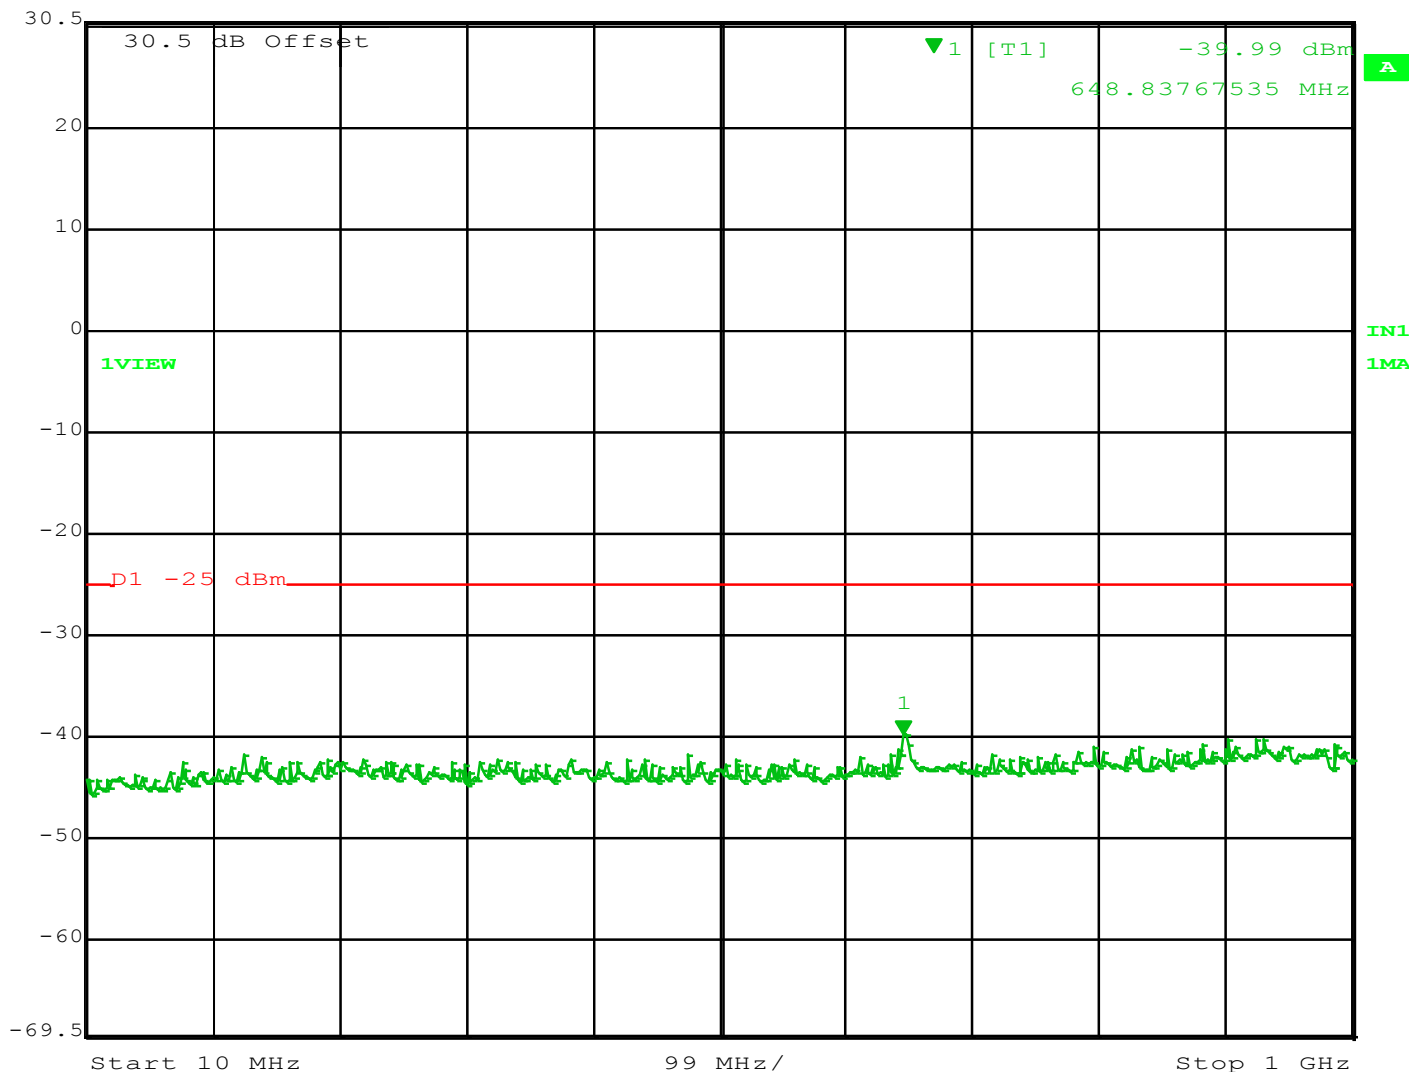

Date: 2.JUL.2015 09:12:51

Figure 57 - Spurs 4950 MHz – 20 MHz Channel, 10 MHz - 1 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 77 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl 19.57 dBm VBW 3 MHz
24 dBm 4.95231463 GHz SWT 260 ms Unit dBm

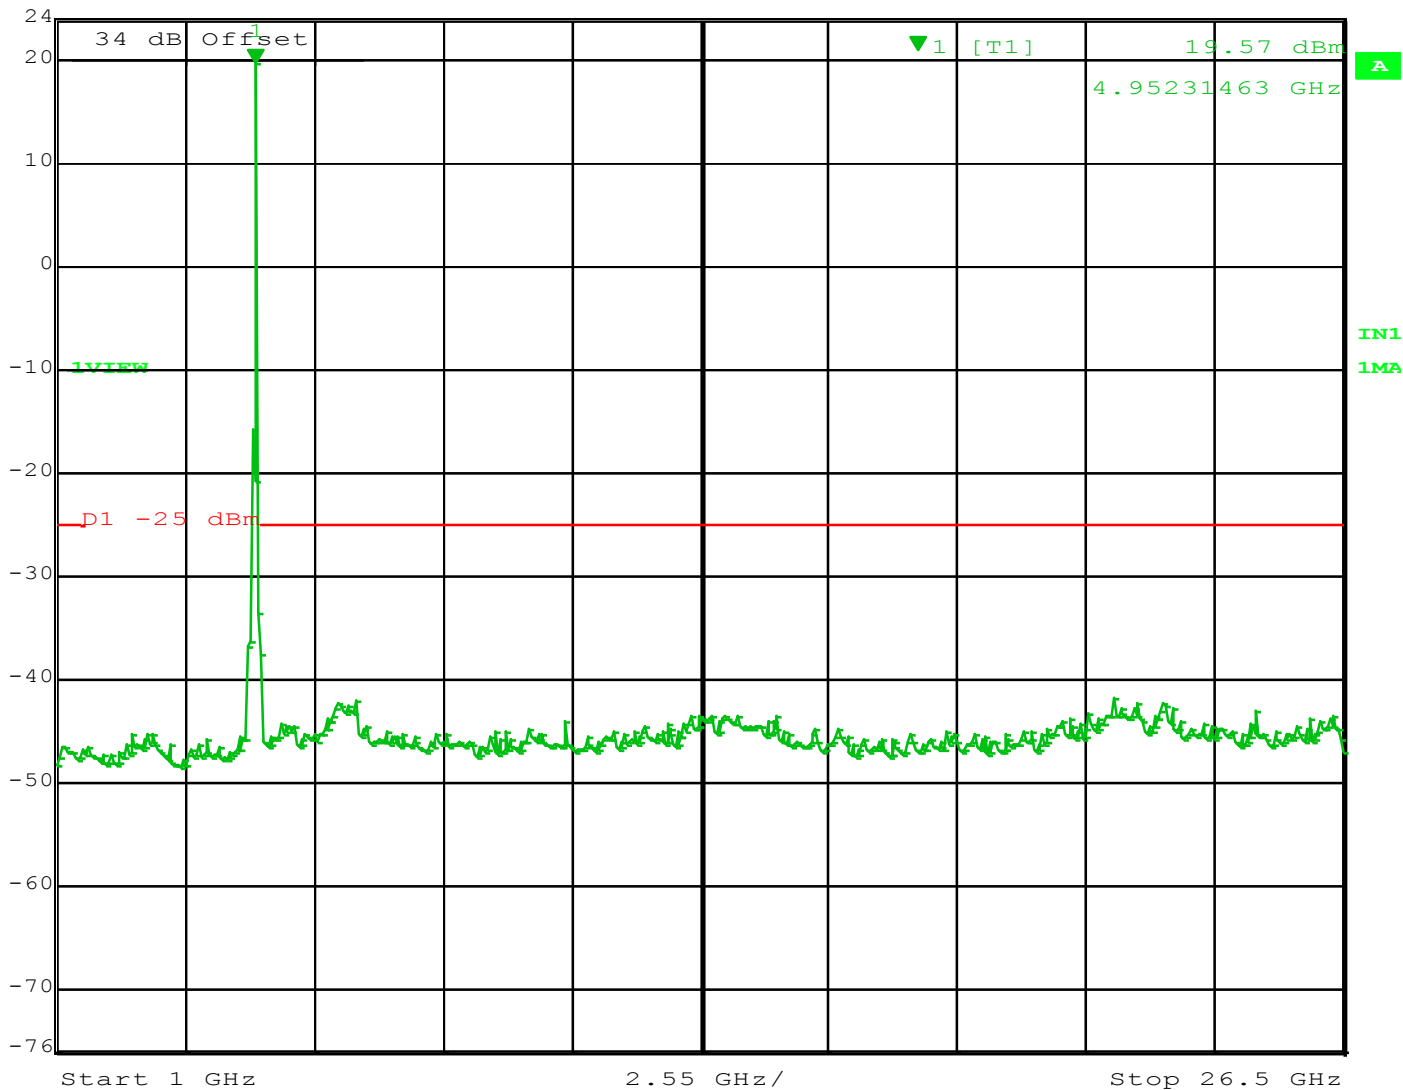

Date: 29.JUN.2015 12:32:32

Figure 58 - Spurs 4950 MHz – 20 MHz Channel, 1 - 26.5 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 78 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -32.78 dBm VBW 3 MHz
24 dBm 26.50000000 GHz SWT 205 ms Unit dBm

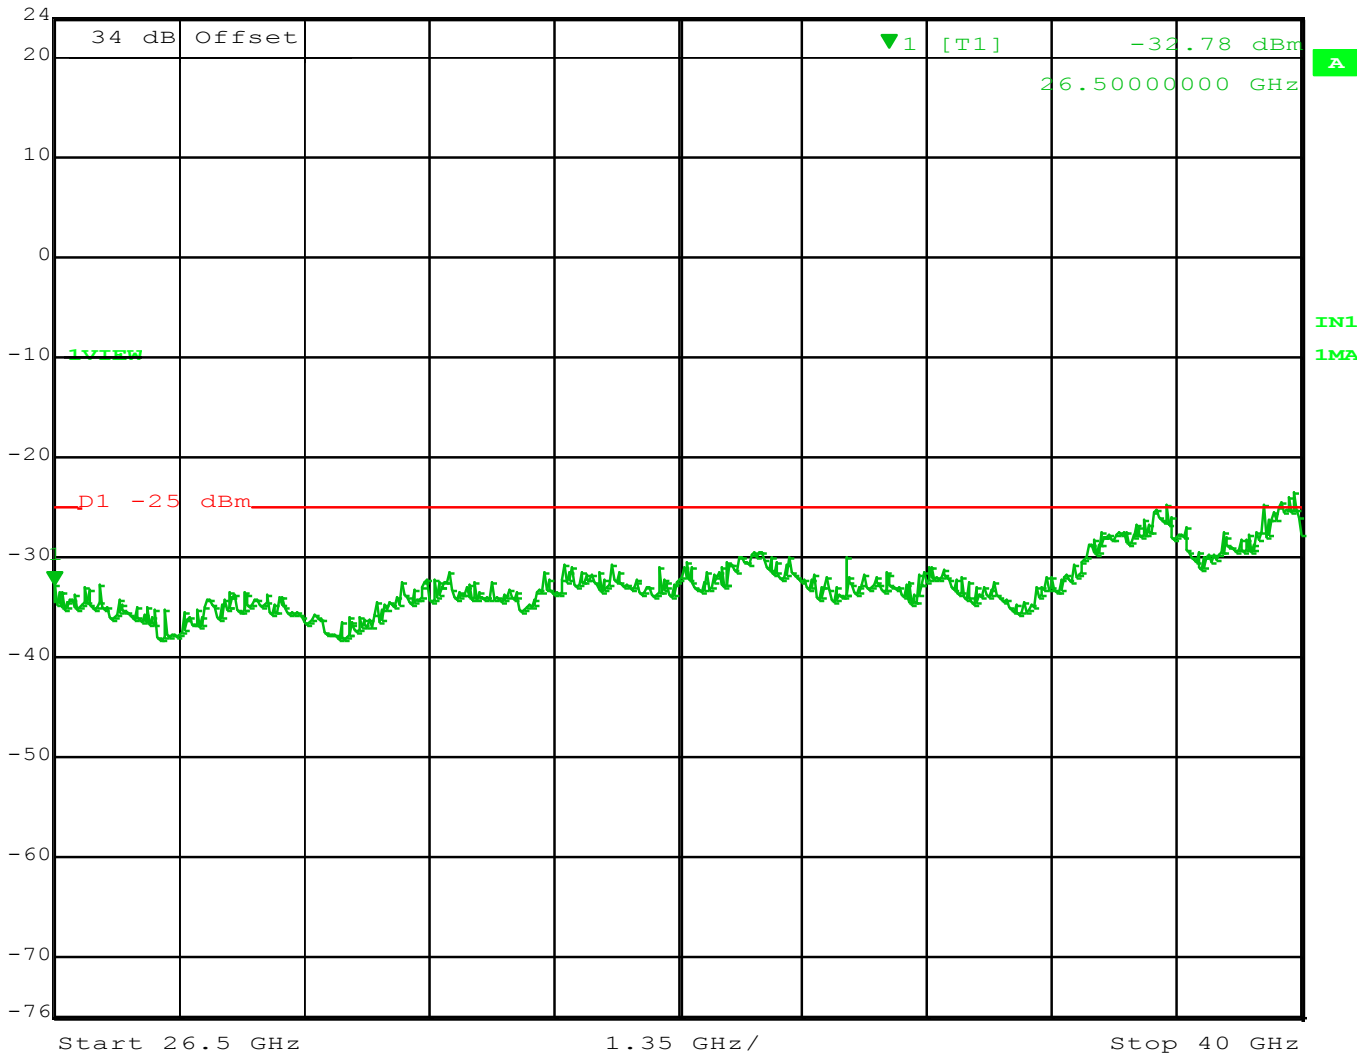

Date: 29.JUN.2015 12:33:25

Figure 59 - Spurs 4950 MHz – 20 MHz Channel, 26.5 - 40 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 79 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl 20.00 dBm VBW 3 MHz
24 dBm 4.93486974 GHz SWT 260 ms Unit dBm

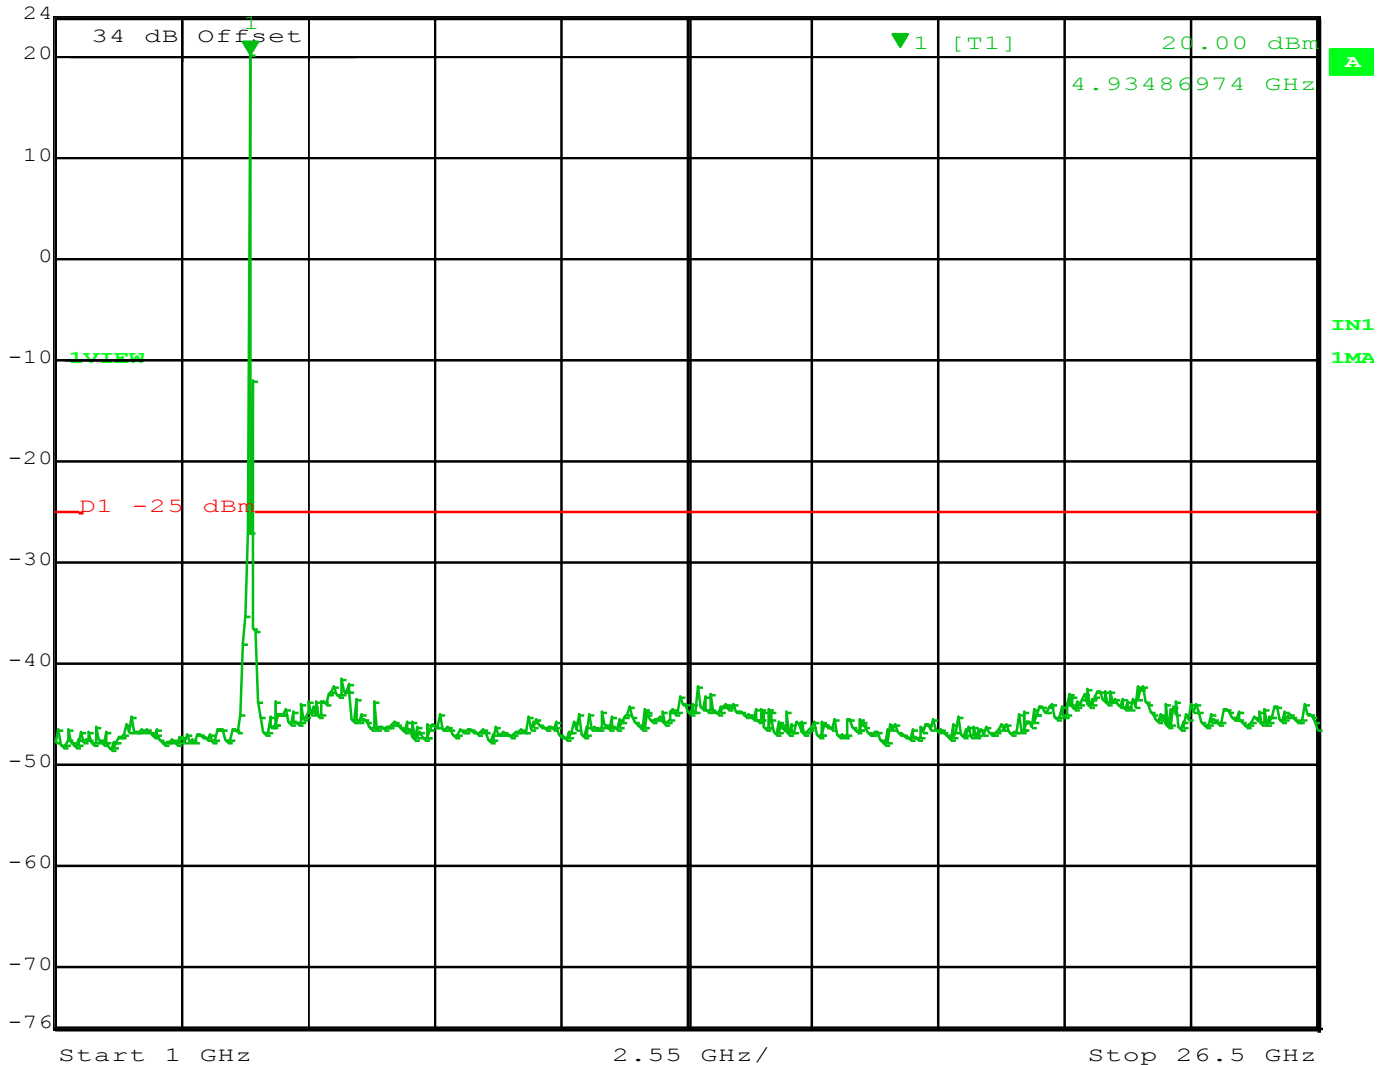

Date: 29.JUN.2015 12:35:19

Figure 60 - Spurs 4960 MHz -20 MHz Channel, 1 - 26.5 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 80 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -33.67 dBm VBW 3 MHz
24 dBm 26.50000000 GHz SWT 205 ms Unit dBm

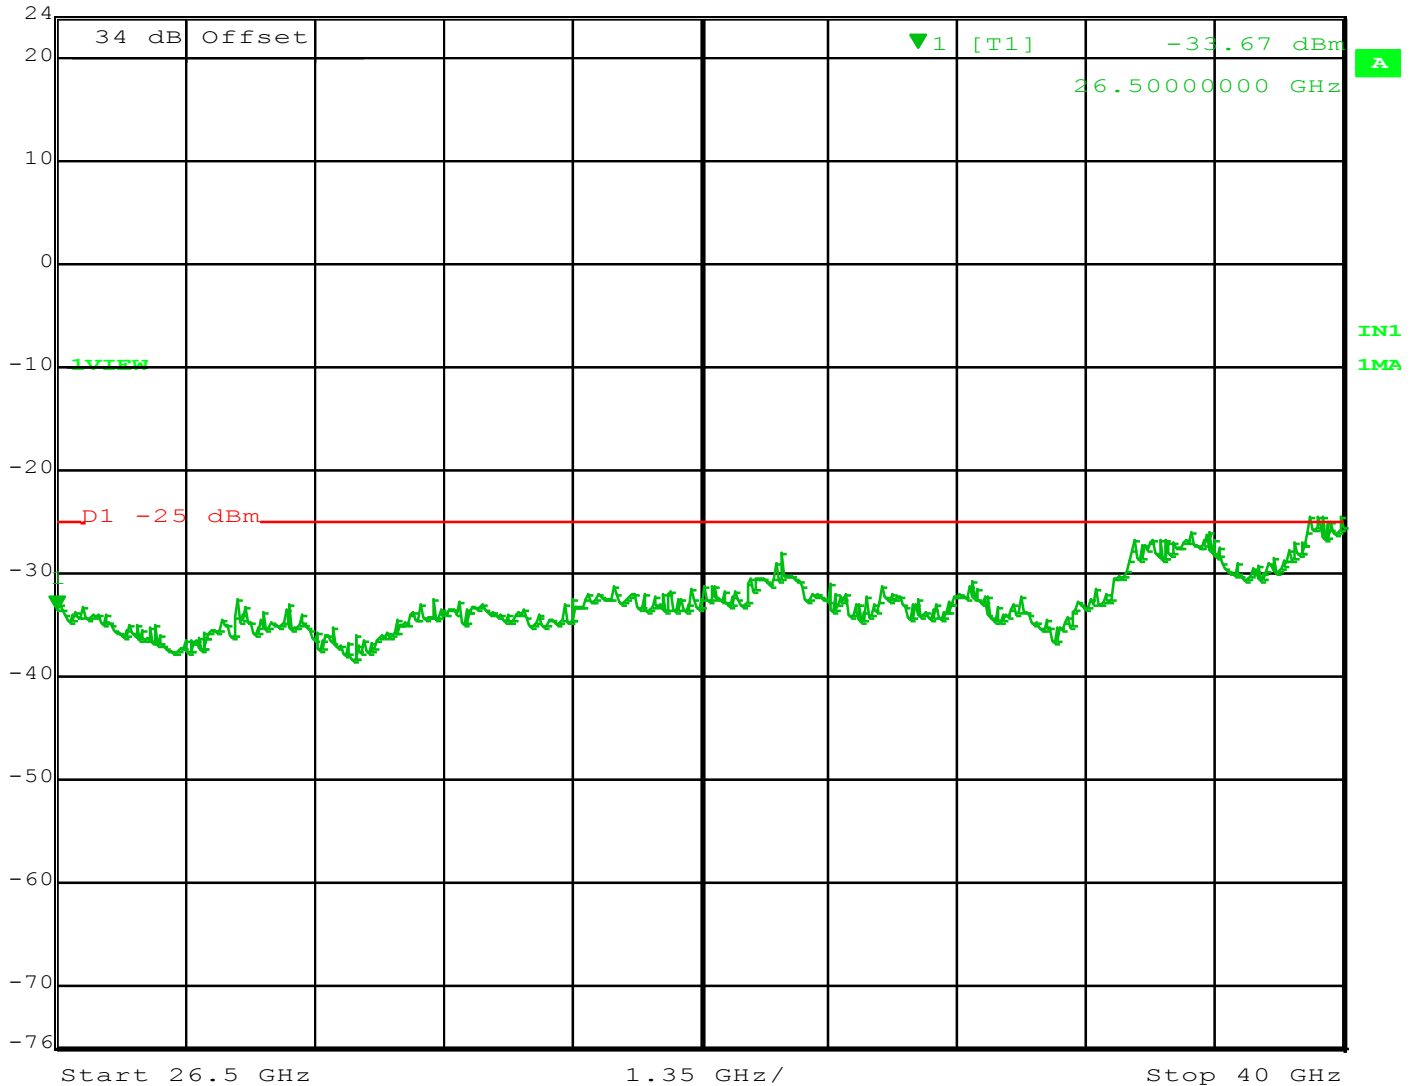

Date: 29.JUN.2015 12:34:26

Figure 61 - Spurs 4960 MHz – 20 MHz Channel, 26.5 - 40 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 81 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl 19.02 dBm VBW 3 MHz
24 dBm 4.98000000 GHz SWT 260 ms Unit dBm

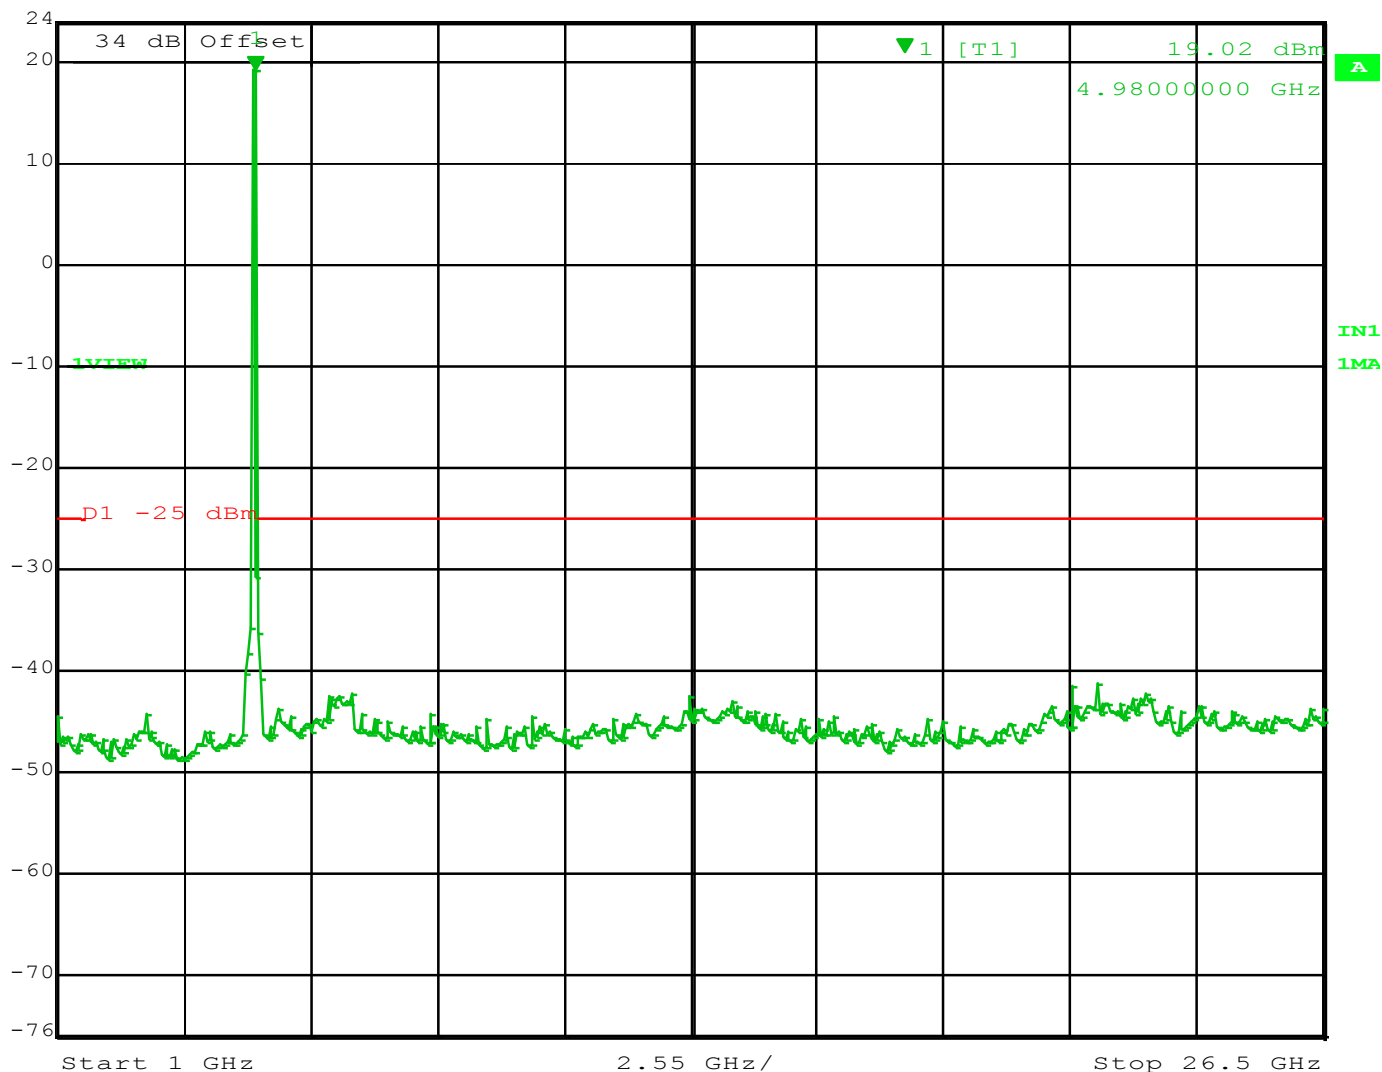

Date: 29.JUN.2015 12:37:06

Figure 62 - Spurs 4980 MHz – 20 MHz Channel, 1 - 26.5 GHz


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 82 of 89



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -33.80 dBm VBW 3 MHz
24 dBm 26.50000000 GHz SWT 205 ms Unit dBm

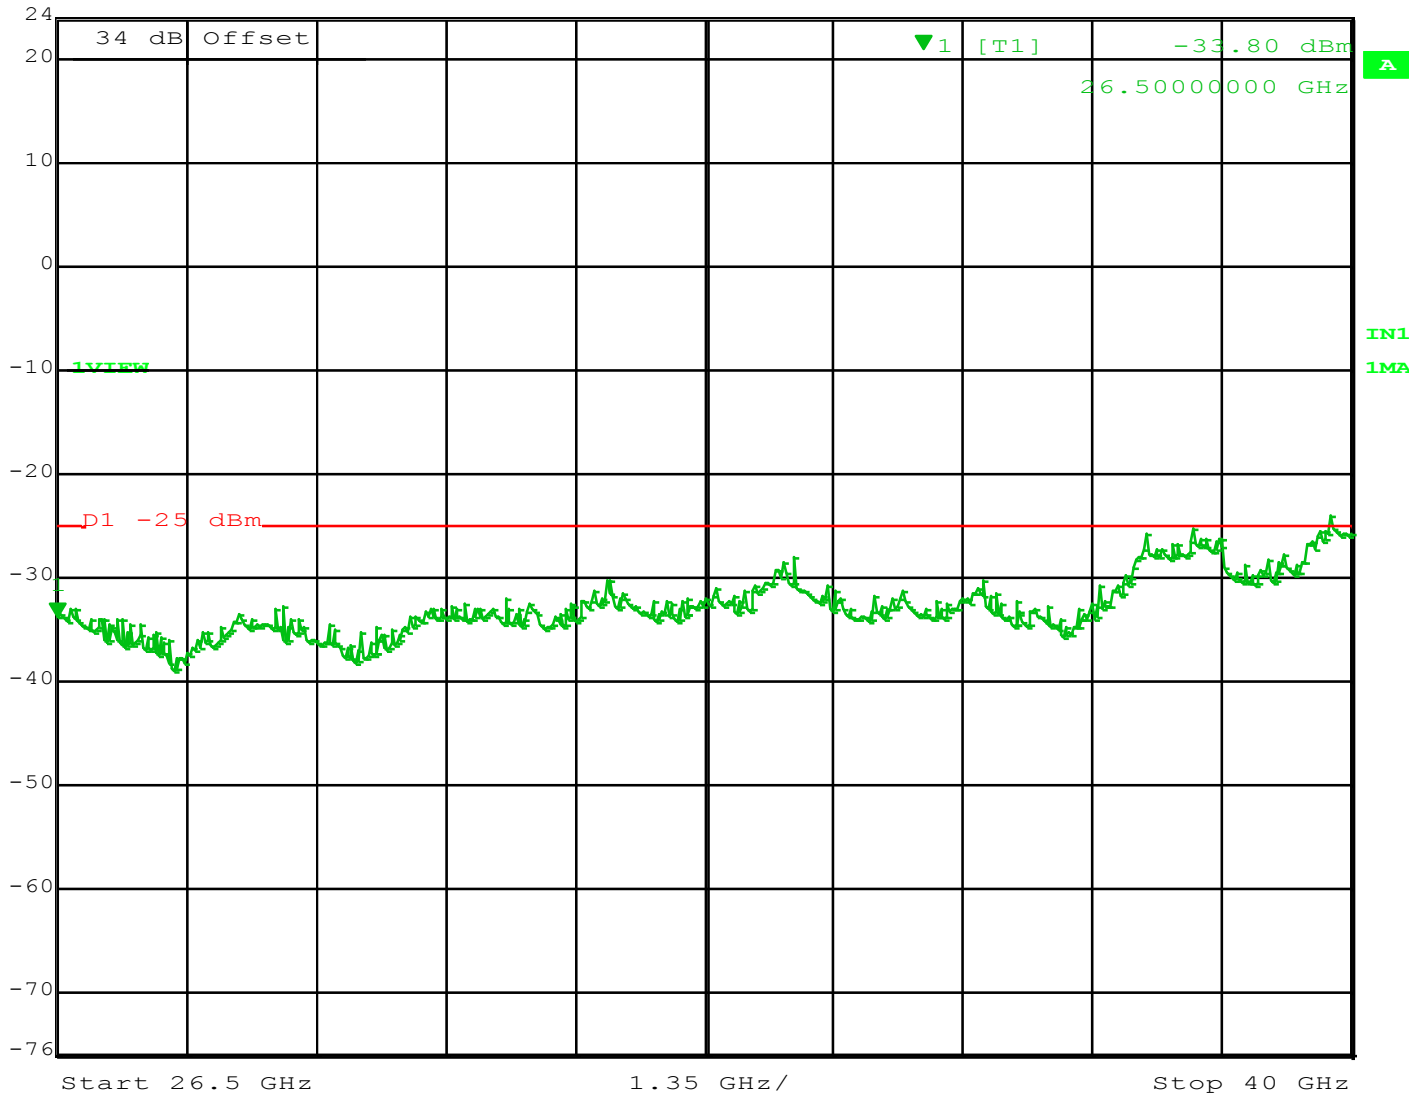

Date: 29.JUN.2015 12:37:46

Figure 63 - Spurs 4980 MHz – 20 MHz Channel, 26.5 - 40 GHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

6 RF Exposure

6.1 Exposure Requirements – FCC Parts 90.1217, 1.1307 and 1.1310

FCC 90.1217:- Licensees and manufacturers are subject to the radiofrequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091 and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of mobile or portable devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

FCC 1.1310:- The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)				
1500-100,000	...	...	5	6
(A) Limits for Occupational/Control Exposures				
1500-100,000	...	...	1.0	30
(B) Limits for General Population/Uncontrolled Exposure				

F = Frequency in MHz

6.1.1 RF Exposure Limit

According to FCC 1.1310 table 1: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30

F = Frequency in MHz

6.1.1.1 Antenna Gain

The maximum Gain measured in Semi-Anechoic Chamber is 8 dBi or 7.08 (numeric).

13.5 dBi or 25.12 (numeric)

21 dBi or 125.89 (numeric)

26 dBi or 398.11 (numeric)

30 dBi or 1000 (numeric)

6.1.1.2 Output Power into Antenna & RF Exposure value at distance >20cm: Mobile

Calculations for this report are based on highest power measurement and all the various antenna gains. Limit for MPE (from FCC part 1.1310 table 1) is 5 mW/cm² for professionally installed devices.

The highest output power is 25.55 dBm at 4965 MHz, this frequency and power will be used for all Antenna Calculations.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 85 of 89

8 dBi Gain Antenna at 4965 MHz

Corrected (including calibration factors) Measurement:	25.55	dBm	
The Gain of the antenna:	8.00	dBi	
Type of Measurement:	Conducted		Direct measurement at Antenna Port
Impedance:	50.00	Ω	
Measuring Distance:	3.00	m	Not used for Direct measurements.
Time weighted Duty Cycle:	100.00	%	

Frequency range from 10 MHz to 40 GHz:

Frequency:	4965	MHz
------------	------	-----

Power output with DC and antenna Gain
(EIRP):

Power (dBm):	33.55
Power (mW):	2264.644
Power (W):	2.264644

R = distance in	20	cm
-----------------	----	----

FCC:

Controlled Exposures - Limit =	5	mW/cm ²
Uncontrolled Exposures - Limit =	1	mW/cm ²
Pd =	0.4505367	mW/cm ²
Controlled Margin to Limit =	4.5495	mW/cm ²
Uncontrolled Margin to Limit =	0.5495	mW/cm ²

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Report No.: 31551685.004 Harris Part 90.doc

Page 86 of 89

While using the following antenna a minimum separation distance must be at least 30 cm

13.5 dBi Gain Antenna

Corrected (including calibration factors) Measurement:	25.55	dBm
The Gain of the antenna:	13.50	dBi
Type of Measurement:	Conducted	Direct measurement at Antenna Port
Impedance:	50.00	Ω
Measuring Distance:	3.00	m
Time weighted Duty Cycle:	100.00	%

The Power Out would

be:	0.358921935	Watts
or:	358.92193	mW
or:	358921.93	μ W
or:	25.55	dBm

Frequency range from 10 MHz to 40 GHz:

Frequency:	4965	MHz
------------	------	-----

Power output with DC and antenna Gain (EIRP):

Power (dBm):	39.05
Power (mW):	8035.261
Power (W):	8.035261

R = distance in	30	cm
-----------------	----	----

FCC:

Controlled Exposures - Limit =	5	mW/cm ²
Uncontrolled Exposures - Limit =	1	mW/cm ²
Pd =	0.7104731	mW/cm ²
Controlled Margin to Limit =	4.2895	mW/cm ²
Uncontrolled Margin to Limit =	0.2895	mW/cm ²

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

While using the following antenna a minimum separation distance must be at least 60 cm

21 dBi Gain Antenna

Corrected (including calibration factors) Measurement:	25.55	dBm
The Gain of the antenna:	21.00	dBi
Type of Measurement:	Conducted	Direct measurement at Antenna Port
Impedance:	50.00	Ω
Measuring Distance:	3.00	m
Time weighted Duty Cycle:	100.00	%

The Power Out would be:

0.358921935	Watts
358.92193	mW
358921.93	μ W
25.55	dBm

Frequency range from 10 MHz to 40 GHz:

Frequency:	4965	MHz
------------	------	-----

Power output with DC and antenna Gain (EIRP):

Power (dBm):	46.55
Power (mW):	45185.594
Power (W):	45.185594

R = distance in	60	cm
-----------------	----	----

FCC:

Controlled Exposures - Limit =	5	mW/cm ²
Uncontrolled Exposures - Limit =	1	mW/cm ²
Pd =	0.9988209	mW/cm ²
Controlled Margin to Limit =	4.0012	mW/cm ²
Uncontrolled Margin to Limit =	0.0012	mW/cm ²

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

While using the following antenna a minimum separation distance must be at least 120 cm

26 dBi Gain Antenna

Corrected (including calibration factors) Measurement:	25.55	dBm
The Gain of the antenna:	26.00	dBi
Type of Measurement:	Conducted	Direct measurement at Antenna Port
Impedance:	50.00	Ω
Measuring Distance:	3.00	m
Time weighted Duty Cycle:	100.00	%

The Power Out would

be:	0.358921935	Watts
or:	358.92193	mW
or:	358921.93	μ W
or:	25.55	dBm

Frequency range from 10 MHz to 40 GHz:

Frequency:	4965	MHz
------------	------	-----

Power output with DC and antenna Gain
(EIRP):

Power (dBm):	51.55
Power (mW):	142889.396
Power (W):	142.889396

R = distance in	120	cm
-----------------	-----	----

FCC:

Controlled Exposures - Limit =	5	mW/cm ²
Uncontrolled Exposures - Limit =	1	mW/cm ²
Pd =	0.7896373	mW/cm ²
Controlled Margin to Limit =	4.2104	mW/cm ²
Uncontrolled Margin to Limit =	0.2104	mW/cm ²

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

While using the following antenna a minimum separation distance must be at least 170 cm

30 dBi Gain Antenna

Corrected (including cal factors) Measurement:	25.55	dBm
The Gain of the antenna:	30.00	dBi
Type of Measurement:	Conducted	Direct measurement at Antenna Port
Impedance:	50.00	Ω
Measuring Distance:	3.00	m
Time weighted Duty Cycle:	100.00	%

The Power Out would

be:	0.358921935	Watts
or:	358.92193	mW
or:	358921.93	μ W
or:	25.55	dBm

Frequency range from 10 MHz to 40 GHz:

Frequency:	4965	MHz
------------	------	-----

Power output with DC and antenna Gain
(EIRP):

Power (dBm):	55.55
Power (mW):	358921.935
Power (W):	358.921935

R = distance in	170	cm
-----------------	-----	----

FCC:

Controlled Exposures - Limit =	5	mW/cm ²
Uncontrolled Exposures - Limit =	1	mW/cm ²
Pd =	0.9883080	mW/cm ²
Controlled Margin to Limit =	4.0117	mW/cm ²
Uncontrolled Margin to Limit =	0.0117	mW/cm ²

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.